



427 West 12800 South
Draper, UT 84020

Test Report Certification

FCC ID	SWX-E7
ISED ID	6545A-E7
Equipment Under Test	E7
Test Report Serial Number	TR9468_04
Date of Tests	21 – 23 February; 11 April; 5 – 6 May; 20 June; 6 November 2024
Report Issue Date	4 November 2024

Test Specification	Applicant
47 CFR FCC Part 15, Subpart E	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.



Certification of Engineering Report


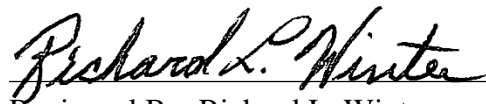
This report has been prepared by Unified Compliance Laboratory (UCL) to document compliance of the device described below with the requirement of Federal Communication Commissions (FCC) Part 15, Subpart E. This report may be reproduced in full. Partial reproduction of this report may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

Applicant	Ubiquiti Inc.
Manufacturer	Ubiquiti Inc.
Brand Name	UBIQUITI
Model Number	E7
FCC ID	SWX-E7
ISED ID	6545A-E7

On this 4th day of November 2024, I individually and for Unified Compliance Laboratory certify that the statements made in this engineering report are true, complete and correct to the best of my knowledge and are made in good faith.

Although NVLAP has accredited the Unified Compliance Laboratory testing facilities, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the U.S. federal government.

Unified Compliance Laboratory


Written By: Joseph W. Jackson
Reviewed By: Richard L. Winter

Revision History		
Revision	Description	Date
01	Original Report Release	4 November 2024
02	Amended Sections 5.3 with Corrected Measurements, 5.4 with Corrected Limit and Nss_1 Data and 5.6 with Corrected Limit and Nss_1 Data	6 November 2024
03	Added Nss_1 Limit to Section 5.6	7 November 2024
04	Removed Tables in Section 5.4 and 5.6	8 November 2024

Table of Contents

1	Client Information.....	5
1.1	Applicant.....	5
1.2	Manufacturer.....	5
2	Equipment Under Test (EUT).....	6
2.1	Identification of EUT	6
2.2	Description of EUT	6
2.3	EUT and Support Equipment	7
2.4	Interface Ports on EUT	7
2.5	Operating Environment.....	7
2.6	Operating Modes.....	7
2.7	EUT Exercise Software.....	8
2.8	Block Diagram of Test Configuration	8
2.9	Modification Incorporated/Special Accessories on EUT.....	8
2.10	Deviation, Opinions Additional Information or Interpretations from Test Standard.....	8
3	Test Specification, Method and Procedures.....	9
3.1	Test Specification.....	9
3.2	Methods & Procedures.....	9
3.3	FCC Part 15, Subpart E.....	9
3.4	Results.....	9
3.5	Test Location	10
4	Test Equipment	11
4.1	Conducted Emissions at Mains Ports.....	11
4.2	Direct Connect at the Antenna Port Tests.....	11
4.3	Radiated Emissions	12
4.4	Contention Base Protocol Tests	13
4.5	Equipment Calibration	13
4.6	Measurement Uncertainty	13
5	Test Results	14
5.1	§15.203 Antenna Requirements.....	14
5.2	Conducted Emissions at Mains Ports Data	15
5.3	§15.403(i) 26 dB Emissions Bandwidth	17
5.4	§15.407(a)(3) Maximum Average Output Power	18
5.5	§15.407(b)(7) Spurious Emissions.....	19
5.6	§15.407(a) Maximum Power Spectral Density	22
5.7	§15.407(d) Contention Based Protocol.....	28

1 Client Information

1.1 Applicant

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

1.2 Manufacturer

Company	Ubiquiti Inc. 685 Third Avenue New York, NY 10017 U.S.A.
Contact Name	Alex Macon
Title	Compliance

2 Equipment Under Test (EUT)

2.1 Identification of EUT

Brand Name	UBIQUITI
Model Number	E7
Serial Number	1FD62F
Dimensions (cm)	25 x 25 x 4.35

2.2 Description of EUT

The E7 is a WiFi 7 access point with (1) 10GbE PoE port and (1) 1GbE PoE port. The E7 transmits in the 2.4 GHz, 5 GHz, and 6 GHz frequency bands using integral antennas and is powered by an 802.3at PoE power adapter.

This device does not support channel puncturing.

This report covers the circuitry of the device subject to FCC Part 15, Subpart E. The circuitry of the device subject to FCC Part 15 Subpart B was found to be compliant and is covered under a separate Unified Compliance Laboratory test report.

The table below show the channels used within the different modulation bandwidths.

Band	Modulation Bandwidth	Frequency (MHz)	Maximum Power Setting
UNII-7	be (HE20)	6535	12
		6695	11
		6875	11
	be (HE40)	6525	15
		6685	14
		6885	14
	be (HE80)	6545	18
		6705	17
		6865	17
	be (HE160)	6505	20
		6665	19
		6825	20
	be (HE320)	6585	19

2.3 EUT and Support Equipment

The EUT and support equipment used during the test are listed below.

Brand Name Model Number Serial Number	Description	Name of Interface Ports / Interface Cables
BN: UBIQUITI MN: E7 SN: 1FD62F	Access Point	PoE Input / Shielded Cat 5E cable
BN: UBIQUITI MN: GP-h480-065G SN: N/A	PoE Injector	PoE Output / Shielded Cat 5E to E7, and Ethernet / unshielded Cat 5E to PC
BN: DELL MN: XPS SN: N/A	Laptop PC	Ethernet / un-shielded Cat 5E

Notes: (1) EUT

(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT

Name of Ports	No. of Ports Fitted to EUT	Cable Description/Length
PoE Input	1	7m Shielded Cat 5E
PoE Output (PoE Injector)	1	7m Shielded Cat 5E to E7 PoE Input
LAN (PoE Injector)	1	unshielded Cat 5E to Laptop PC
AC (PoE Injector)	1	3 Conductor power cord to AC mains/80cm

2.5 Operating Environment

Power Supply	120 VAC
AC Mains Frequency	60 Hz
Temperature	19.6-22.3 °C
Humidity	21.12-32.11 %
Barometric Pressure	1020 mBar

2.6 Operating Modes

The E7 was tested using test software in order to enable to constant transmission. All measurements are reported with the worst-case mode (802.11be) unless otherwise stated.

2.7 EUT Exercise Software

EUT firmware version 1.0 was used to operate the transmitter using a constant transmit mode.

2.8 Block Diagram of Test Configuration

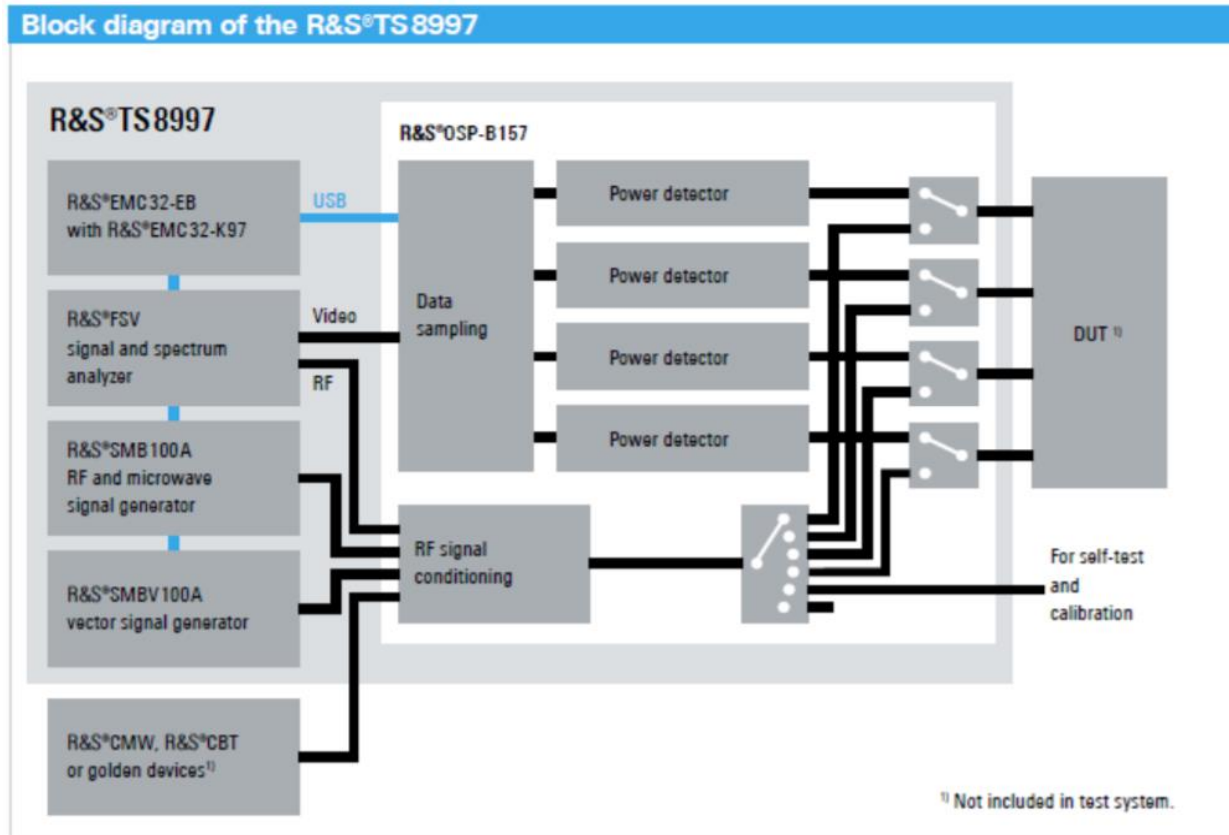


Diagram 1: Test Configuration Block Diagram

2.9 Modification Incorporated/Special Accessories on EUT

There were no modifications made to the EUT during testing to comply with the specification.

2.10 Deviation, Opinions Additional Information or Interpretations from Test Standard

There were no deviations, opinions, additional information or interpretations from the test specification.

3 Test Specification, Method and Procedures

3.1 Test Specification

Title	47 CFR FCC Part 15, Subpart E, Section 15.407 Limits and methods of measurement of radio interference characteristics of Unlicensed National Information Infrastructure Devices
Purpose of Test	The tests were performed to demonstrate initial compliance

3.2 Methods & Procedures

3.2.1 47 CFR FCC Part 15 Section 15.407

See test standard for details.

3.3 FCC Part 15, Subpart E

3.3.1 Summary of Tests

FCC Section	ISED Section	Environmental Phenomena	Frequency Range (MHZ)	Result
15.203	N/A	Antenna requirements	Structural Requirement	Compliant
15.207	RSS-Gen	Conducted Disturbance at Mains Port	0.15 to 30	Compliant
15.407(c)	RSS-248 §4.4	Bandwidth Requirement	6535 to 6885	Compliant
15.407(e)	RSS-248 §4.5	Peak Output Power ¹	6535 to 6885	Compliant
15.407(f)	RSS-248 §4.6	Antenna Conducted Spurious Emissions ¹	0.009 to 40000	N/A
15.407(g)	RSS-248 §4.6	Radiated Spurious Emissions	0.009 to 40000	Compliant
15.407(h)	RSS-248 §4.5	Peak Power Spectral Density ¹	6535 to 6885	Compliant
15.407(d)	RSS-248 §4.7	Contention Based Protocol	6535 to 6885	Compliant

The testing was performed according to the procedures in ANSI C63.10-2013, KDB 789033, KDB 987594 and 47 CFR Part 15. Where applicable, KDB 662911 was followed to sum required measurements.

Note ¹: Various RU modes were considered for RF Power, PSD, and Spurious Emissions, and the "single client" RU mode is the worst case - the results herein are "single client" RU mode.

3.4 Results

In the configuration tested, the EUT complied with the requirements of the specification.

3.5 Test Location

Testing was performed at the Unified Compliance Laboratory 3-meter and 10-meter chamber located at 427 West 12800 South, Draper, UT 84020. Unified Compliance Laboratory is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Code 600241-0 which is effective until 30 June 2025. This site has also been registered with Innovations, Science and Economic Development (ISED) department as was accepted under Appendix B, Phase 1 procedures of the APEC Tel MRA for Canadian recognition. ISED No.: 25346, effective until 30 June 2025.

Unified Compliance Laboratory has been assigned Designation Number US5037 by the FCC and Conformity Assessment Number US0223 by ISED.

4 Test Equipment

4.1 Conducted Emissions at Mains Ports

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	AFJ	FFT3010	UCL-2500	7/13/2023	7/13/2024
LISN	AFJ	LS16C/10	UCL-2512	5/26/2023	5/26/2024
ISN	Teseq	ISN T800	UCL-2974	6/27/2023	6/27/2024
LISN	AFJ	LS16C\10	UCL-6749	1/29/2024	1/29/2025
AC Power Source	Laplace Instruments	AC1000A	UCL-2857	N/A	N/A
Test Software	UCL	Revision 1	UCL-3107	N/A	N/A

Table 1: List of equipment used for Conducted Emissions Testing at Mains Port

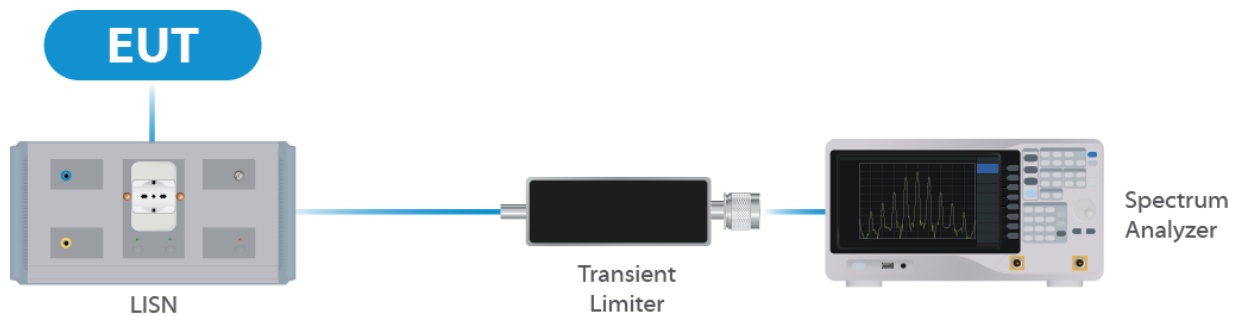


Figure 1: Conducted Emissions Test

4.2 Direct Connect at the Antenna Port Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	R&S	FSV40	UCL-2861	11/27/2023	11/27/2024
Signal Generator	R&S	SMB100A	UCL-2864	N/A	N/A
Vector Signal Generator	R&S	SMBV100A	UCL-2873	N/A	N/A
Switch Extension	R&S	OSP-B157WX	UCL-2867	4/12/2024	4/19/2025
Switch Extension	R&S	OSP-150W	UCL-2870	4/12/2024	4/19/2025

Table 2: List of equipment used for Direct Connect at the Antenna Port

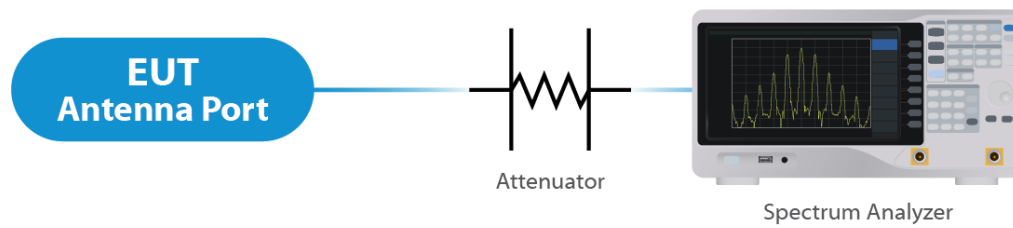


Figure 2: Direct Connect at the Antenna Port Test

4.3 Radiated Emissions

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
EMI Receiver	Keysight	N9038A	UCL-2778	1/25/2024	1/29/2025
Pre-Amplifier 9 kHz – 1 GHz	Sonoma Instruments	310N	UCL-2889	1/19/2024	1/19/2026
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3062	9/13/2022	9/13/2024
Broadband Antenna	Scwarzbeck	VULB 9163	UCL-3071	1/11/2023	1/11/2025
Double Ridge Horn Antenna	Scwarzbeck	BBHA 9120D	UCL-3065	1/27/2023	1/27/2025
Log Periodic	Scwarzbeck	STLP 9129	UCL-3068	1/27/2023	1/27/2025
15 - 40 GHz Horn Antenna	Scwarzbeck	BBHA 9170	UCL-2487	3/10/2023	3/10/2025
1 – 18 GHz Amplifier	Com-Power	PAM 118A	UCL-3833	1/19/2024	1/19/2026
Test Software	UCL	Revision 1	UCL-3108	N/A	N/A

Table 3: List of equipment used for Radiated Emissions

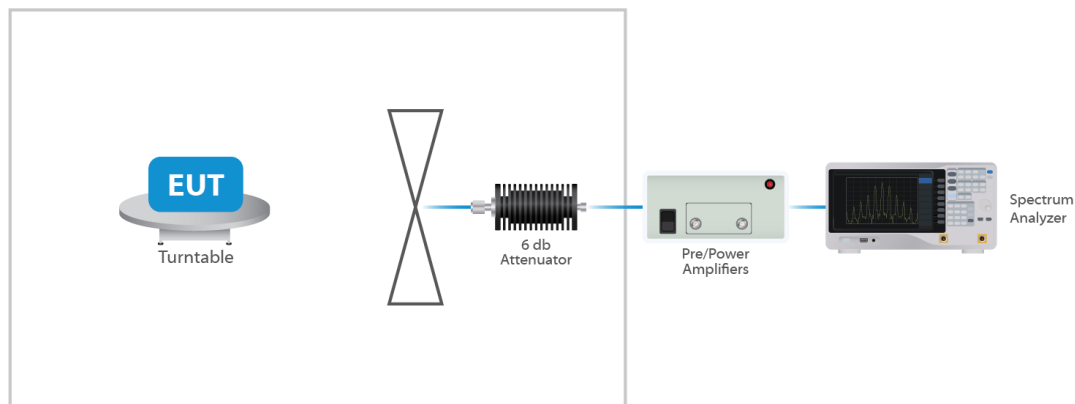


Figure 3: Radiated Emissions Test

4.4 Contention Base Protocol Tests

Type of Equipment	Manufacturer	Model Number	Asset Number	Date of Last Calibration	Due Date of Calibration
Spectrum Analyzer	Keysight	N9010B EXA	UCL-7069	5/3/2024	5/3/2025
Signal Generator	Keysight	MXG-B	UCL-6291	6/29/2023	6/29/2024
MIMO Test Set	Keysight	X8750A	UCL-7373	9/19/2023	9/19/2024

Table 4: List of equipment used for Direct Connect at the Antenna Port

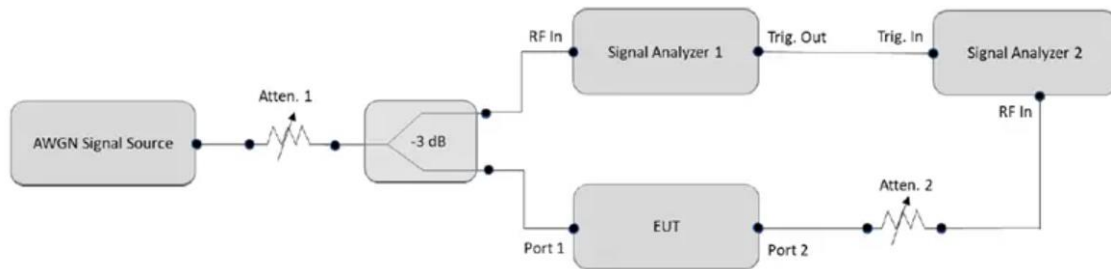


Figure 1. CBP conducted test setup diagram. Source: KDB 987594 D02 V01r01

Figure 4: Contention Base Protocol Test

4.5 Equipment Calibration

All applicable equipment is calibrated using either an independent calibration laboratory or Unified Compliance Laboratory personnel at intervals defined in ANSI C63.4:2014 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to traceability is on file and is available for examination upon request.

4.6 Measurement Uncertainty

Test	Uncertainty (\pm dB)	Confidence (%)
Conducted Emissions	1.44	95
Radiated Emissions (9 kHz to 30 MHz)	2.50	95
Radiated Emissions (30 MHz to 1 GHz)	4.38	95
Radiated Emissions (1 GHz to 18 GHz)	4.37	95
Radiated Emissions (18 GHz to 40 GHz)	3.93	95
Direct Connect Tests	K Factor	Value
Emissions Bandwidth	2	2.0%
Output Power	2	1.0 dB
Peak Power Spectral Density	2	1.3 dB
Band Edge	2	0.8 dB
Transmitter Spurious Emissions	2	1.8 dB

5 Test Results

5.1 §15.203 Antenna Requirements

The EUT uses an integral antenna. Per the manufacturer, the Maximum gain of the antenna per chain is 6 dBi. This is an 802.11 device and utilizes CDD as described in KDB 662911 D01. The antenna is not user replaceable. For CDD transmissions, directional gain is calculated as follows.

Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB

NANT = number of transmit antennas and

NSS = number of spatial streams. NSS = 1 considered worst case.

For power measurements on IEEE 802.11 devices, Array Gain = 0 dB for $\text{NANT} \leq 4$;


For PSD measurements when $\text{Nss}=1$: Array Gain = $10 \log(\text{NANT}/\text{NSS})$ dB + Antenna Gain (dBi). Or
 $6.02 \text{ dB} + 6 \text{ dBi} = 12.02 \text{ dBi}$.

Results

The EUT complied with the specification


5.2 Conducted Emissions at Mains Ports Data

5.2.1 Line

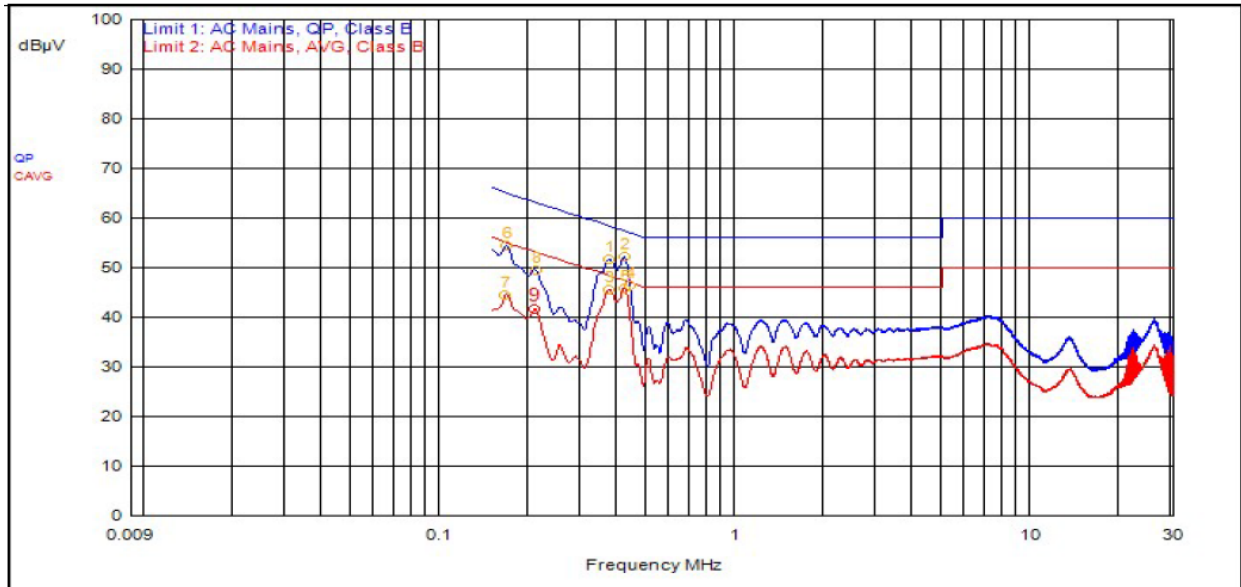

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBμV	dBμV	dBμV	dB	dBμV	dB	P/F
2	417,000kHz	12.39	0.00		QPeak	39.76	52.15	57.51	-5.36			
1	369,000kHz	12.37	0.00		QPeak	39.39	51.76	58.52	-6.77			
6	168,000kHz	12.35	0.00		QPeak	42.03	54.38	65.06	-10.68			
4	438,000kHz	12.40	0.00		QPeak	33.97	46.37	57.10	-10.73			
8	210,000kHz	12.37	0.00		QPeak	37.09	49.46	63.21	-13.75			
3	369,000kHz	12.37	0.00		C_AVG	33.20	45.57			48.52	-2.96	
5	417,000kHz	12.39	0.00		C_AVG	33.55	45.94			47.51	-1.56	
7	165,000kHz	12.36	0.00		C_AVG	31.95	44.31			55.21	-10.90	
9	207,000kHz	12.37	0.00		C_AVG	29.23	41.60			53.32	-11.72	

5.2.2 Neutral

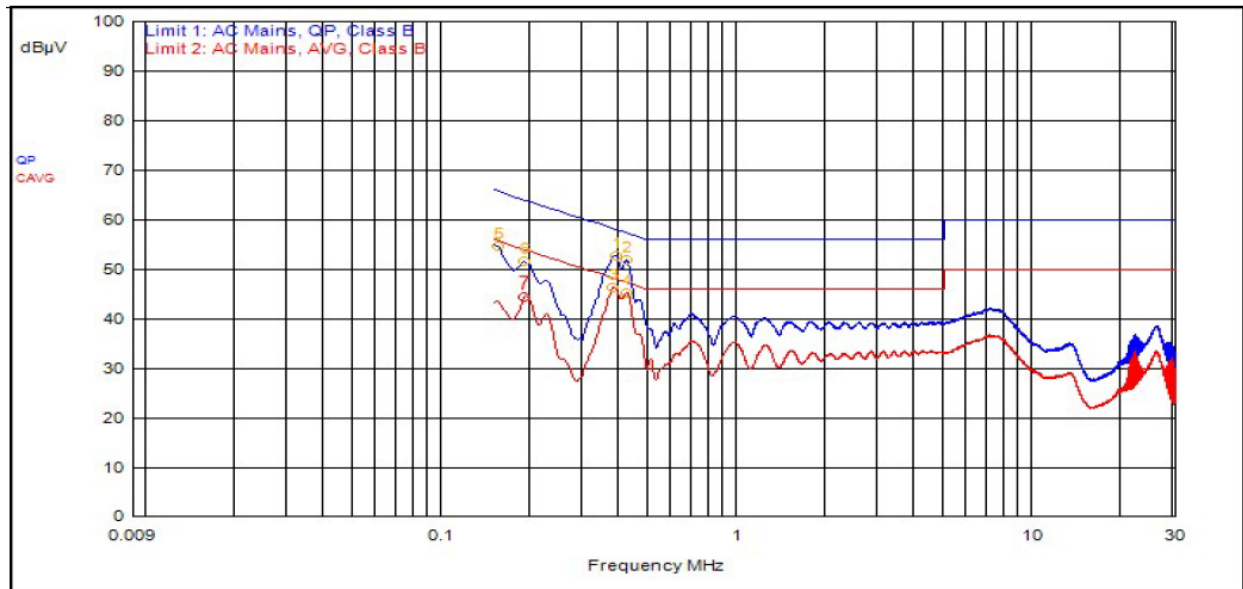

ID	Frequency	Probe	Cable	Atten.	Detector	Meter Read	Meas Level	Limit 1	Limit 1 Dist.	Limit 2	Limit 2 Dist.	P/F
MU	MHz	dB	dB	dB	Type	dBμV	dBμV	dBμV	dB	dBμV	dB	P/F
1	384,000kHz	12.39	0.00		QPeak	40.41	52.80	58.19	-5.40			
2	417,000kHz	12.40	0.00		QPeak	39.46	51.86	57.51	-5.65			
5	153,000kHz	12.37	0.00		QPeak	42.36	54.73	65.84	-11.11			
6	189,000kHz	12.41	0.00		QPeak	39.28	51.69	64.08	-12.39			
3	375,000kHz	12.39	0.00		C_AVG	33.92	46.31			48.39	-2.08	
4	417,000kHz	12.40	0.00		C_AVG	32.90	45.30			47.51	-2.21	
7	189,000kHz	12.41	0.00		C_AVG	32.07	44.48			54.08	-9.60	

Result

The EUT complied with the specification limit.

5.3 §15.403(i) 26 dB Emissions Bandwidth

All chains were measured under the guidance of KDB 789033 Section II.C. and KDB 662911 D01.

Please see associated annex for details on instrument settings.

Nominal BW (MHz)	Frequency (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)
20	6535	19.8	34.5
20	6695	20.0	38.3
20	6875	25.3	50.2
40	6525	38.3	43.8
40	6685	38.5	48.2
40	6885	39.5	78.0
80	6545	79.0	109.0
80	6705	80.0	123.5
80	6865	96.0	191.0
160	6505	165.0	305.0
160	6665	165.0	288.0
160	6825	165.0	273.0
320	6585	320.0	340.5

Result

All chains were tested and the highest bandwidth per chain is reported above.

For channels with a nominal bandwidth of 320 MHz compliance is demonstrated by way of the 99% bandwidth. Please see Annex for all bandwidth measurements.

5.4 §15.407(a)(3) Maximum Average Output Power

All chains were measured and summed under the guidance of KDB 789033 Section II. E.2. and KDB 662911 D01. Please see associated annex for details on instrument settings.

The maximum average RF conducted output power measured for this device was 29.81 dBm or 957.19 mW. The limit is 36 dBm EIRP. The antenna has a gain of 6 dBi.

The Nss1 test data is being shown representing worse case.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	Conducted Output Power	EIRP	Measured PSD
BE20	6535	Mcs0_Nss1	27	29.40	35.40	13.16
BE20	6695	Mcs0_Nss1	26	29.51	35.51	12.98
BE20	6875	Mcs0_Nss1	26	29.32	35.32	12.97
BE40	6525	Mcs0_Nss1	26	29.34	35.24	9.69
BE40	6685	Mcs0_Nss1	25	29.33	35.33	9.79
BE40	6885	Mcs0_Nss1	25	29.06	35.06	9.82
BE80	6545	Mcs0_Nss1	26	29.26	35.26	6.56
BE80	6705	Mcs0_Nss1	26	29.81	35.81	7.26
BE80	6865	Mcs0_Nss1	26	29.66	35.66	7.18
BE160	6505	Mcs0_Nss1	26	29.71	35.71	4.47
BE160	6665	Mcs0_Nss1	25	29.52	35.52	3.89
BE160	6825	Mcs0_Nss1	25	29.03	35.03	3.71
BE320	6585	Mcs0_Nss1	23	27.25	33.25	-0.64

Result

In the configuration tested, the maximum average RF outpower was less than 36 dBm EIRP; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots in attached Annex).

5.5 §15.407(b)(7) Spurious Emissions

5.5.1 Conducted Spurious Emissions

The frequency range from the lowest frequency generated or used in the device to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The graphs show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency and upper frequency. Shown below are plots with the EUT turned to the upper and lower channels with the antenna gain of 6 dBi accounted for. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be remain below -27 dBm EIRP.

Result

Conducted spurious emissions were attenuated below the limit; therefore, the EUT complies with the specification.


5.5.2 Radiated Spurious Emissions in the Restricted Bands of § 15.205

The EUT uses various power settings based on the channel in use. In order to reduce test time, the radiated spurious emissions at the lowest, middle, and highest channel were measured at the maximum power of TP31.

Correction Factor = Antenna Factor + Cable Loss - Pre-Amplifier Gain, and is added to the Receiver reading.

Result


All emissions in the restricted bands of § 15.205 met the limits specified in § 15.209; therefore, the EUT complies with the specification. See Annex for Conducted Band edge plots.

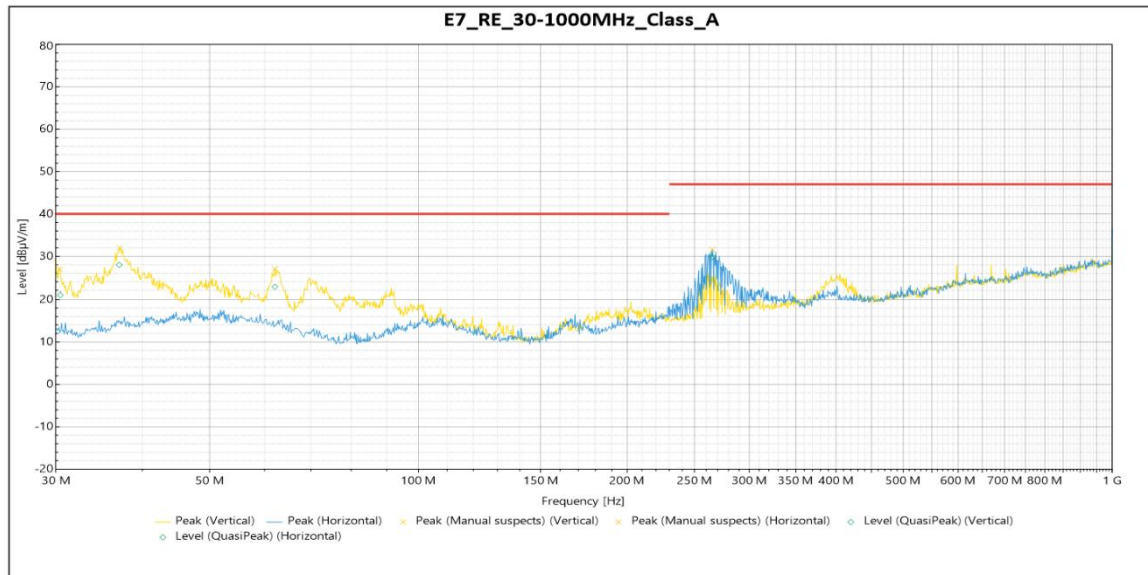

QuasiPeak


Frequency	Level (dBμV/m)	Limit (dBμV/m)	Margin	Azimuth (°)	Height	Pol.	Correction (dB)
30.455 MHz	21.073	40	-18.927	106	0.999	Vertical	-16.07
37.03 MHz	28.019	40	-11.981	238	1.132	Vertical	-14.769
62.105 MHz	22.817	40	-17.183	331	3.17	Vertical	-14.457
265.26 MHz	29.89	47	-17.11	95	3.35	Horizontal	-13.638

Table 5: Radiated Spurious Emissions within 30MHz-1GHz

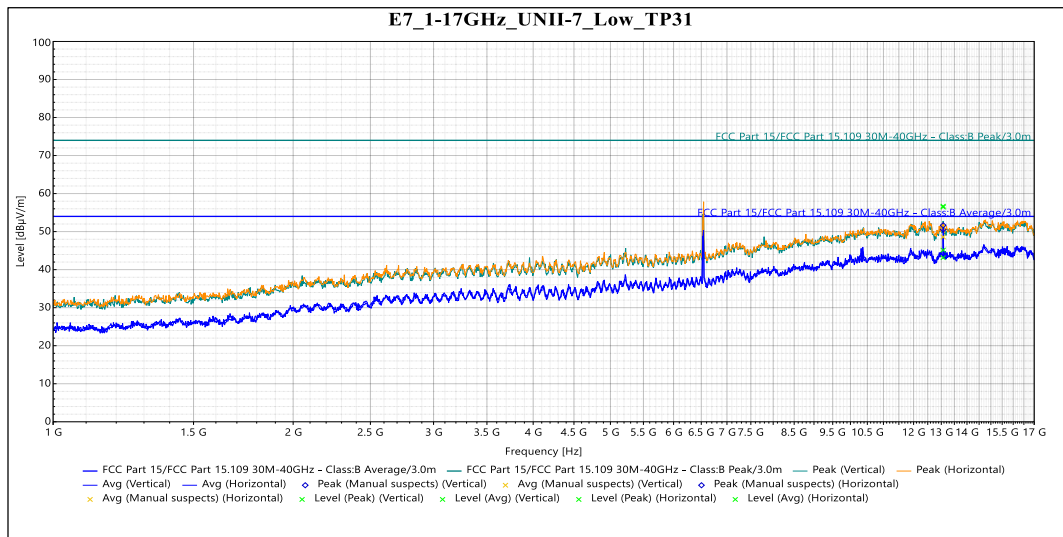

Frequency	SR #	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Height (m)	Pol.	Correction (dB)
13.07 GHz	Peak	56.451	74	-17.549	1	1.703	Vertical	16.1
13.07 GHz	AVG	45.143	54	-8.857	1	1.703	Vertical	16.1
13.07 GHz	Peak	56.689	74	-17.311	347	2.71	Horizontal	16.1
13.07 GHz	AVG	43.143	54	-10.857	347	2.71	Horizontal	16.1

Table 6: Radiated Emissions within 1-17GHz transmitting on 6535 MHz

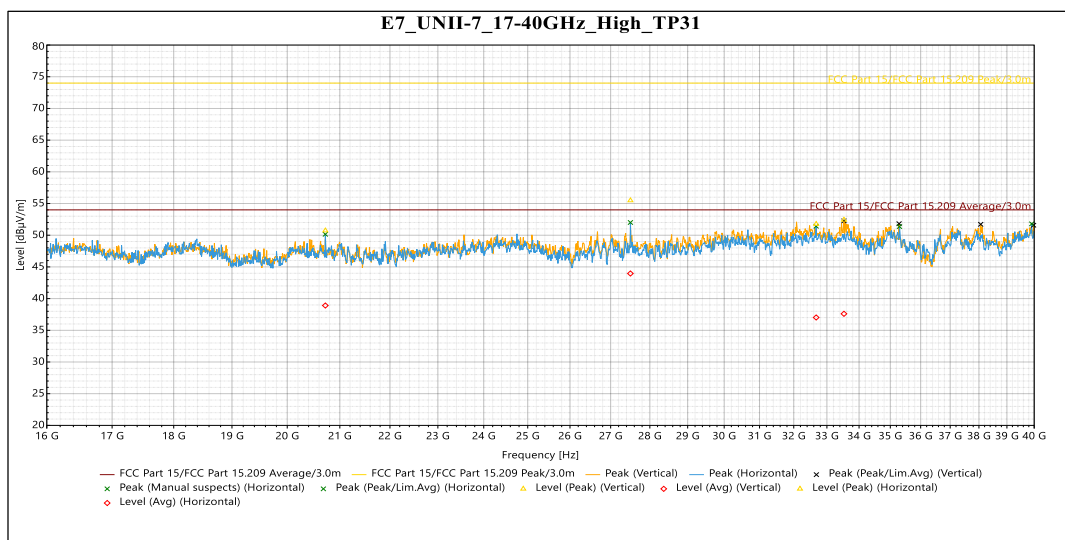

Frequency	SR #	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Azimuth (°)	Pol.	Correction (dB)
33.527 GHz	Peak	52.421	74	-21.579	330	Vertical	2.291
33.527 GHz	AVG	37.6	54	-16.4	330	Vertical	2.291
20.72 GHz	Peak	50.726	74	-23.274	36	Horizontal	-0.745
27.5 GHz	Peak	55.483	74	-18.517	84	Horizontal	0.872
32.673 GHz	Peak	51.759	74	-22.241	332	Horizontal	1.948
20.72 GHz	AVG	38.912	54	-15.088	36	Horizontal	-0.745
27.5 GHz	AVG	43.961	54	-10.039	84	Horizontal	0.872
32.673 GHz	AVG	37.019	54	-16.981	332	Horizontal	1.948

Table 7: Radiated Emissions within 17-40GHz transmitting on 6875 MHz

5.6 §15.407(a) Maximum Power Spectral Density

All chains were measured and summed under the guidance of KDB 789033 Section II. F. and KDB 662911 D01. Please see associated annex for details on instrument settings.

The maximum average power spectral density conducted from the intentional radiator of the antenna shall not be greater than 23 dBm EIRP in any 1 MHz band during any time interval of continuous transmission.

For the Nss = 1 case, the PSD Directional Gain = $10 \log(\text{NANT}/\text{NSS})$ dB + Antenna Gain (dBi) or (6.02 dB + 6 dBi) = 12.02 dBi. Thus, for the Nss =1 case, the EIRP PSD limit is 16.98.

The Nss1 test data is being shown representing worse case.

Results of this testing are summarized.

Modulation (BW)	Frequency (MHz)	Data Rate	TP Setting	EIRP Output Power	Measured PSD
BE20	6535	Mcs0_Nss1	27	35.40	13.16
BE20	6695	Mcs0_Nss1	26	35.51	12.98
BE20	6875	Mcs0_Nss1	26	35.32	12.97
BE40	6525	Mcs0_Nss1	26	35.24	9.69
BE40	6685	Mcs0_Nss1	25	35.33	9.79
BE40	6885	Mcs0_Nss1	25	35.06	9.82
BE80	6545	Mcs0_Nss1	26	35.26	6.56
BE80	6705	Mcs0_Nss1	26	35.81	7.26
BE80	6865	Mcs0_Nss1	26	35.66	7.318
BE160	6505	Mcs0_Nss1	26	35.71	4.47
BE160	6665	Mcs0_Nss1	25	35.52	3.89
BE160	6825	Mcs0_Nss1	25	35.03	3.71
BE320	6585	Mcs0_Nss1	23	33.25	-0.64

Result

The maximum average power spectral density was less than the limit of 23 dBm EIRP (16.98 dBm EIRP for Nss_1); therefore, the EUT complies with the specification.

5.6.1 OFDMA RU Check

If EUT supports OFDMA multiple partial Resource Unit (RU) configurations were verified and the worst case mode was tested.

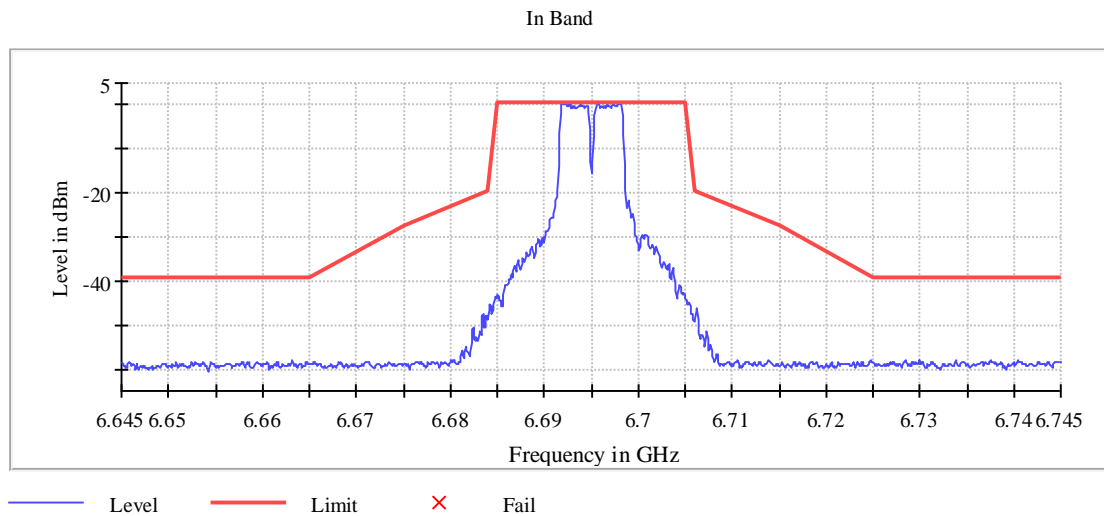


Figure 5: 6695 20MHz RU Vérification - Center

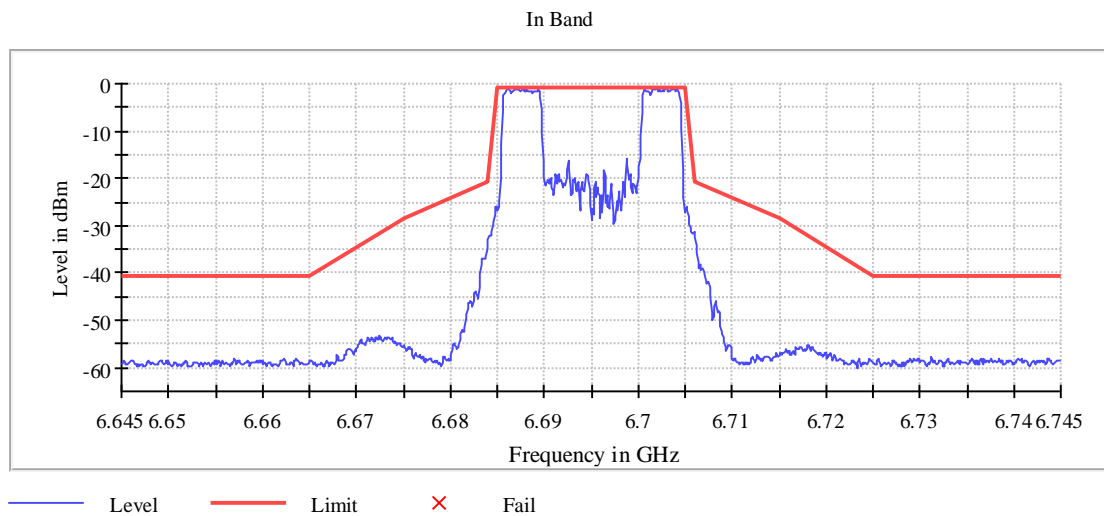


Figure 6: 6695 20MHz RU Vérification - Edge

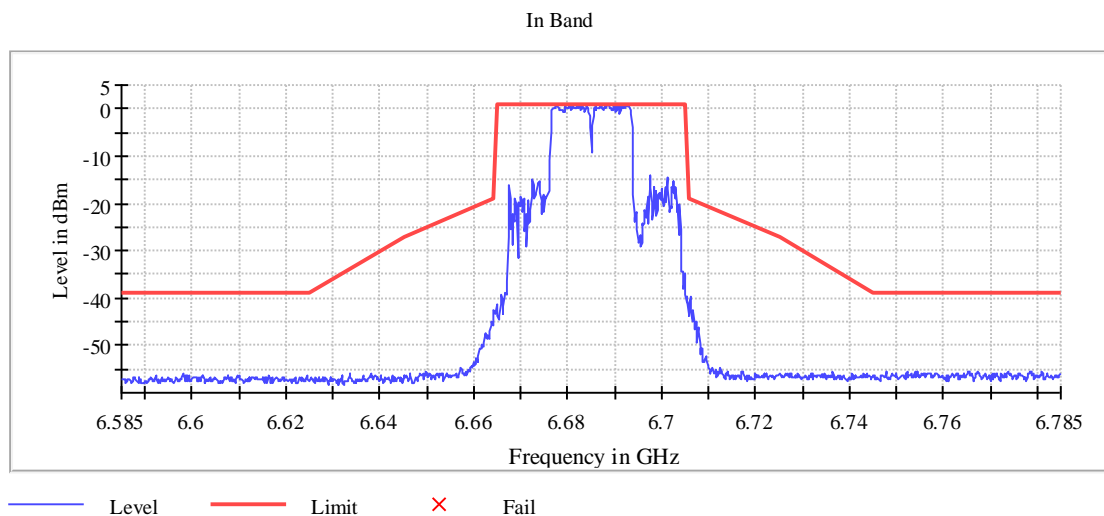


Figure 7: 6685 40MHz RU Vérification - Center

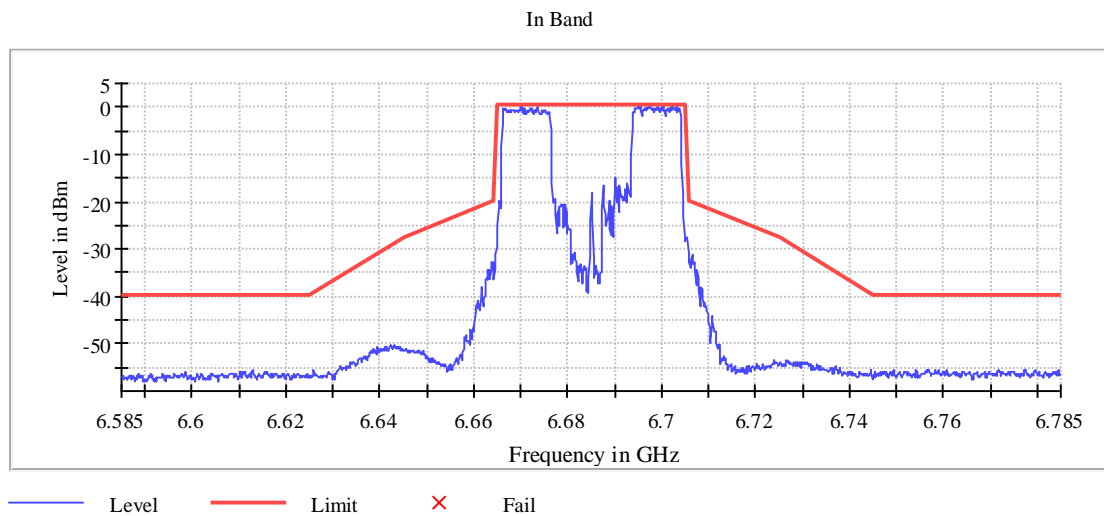


Figure 8: 6685 40MHz RU Vérification - Edge

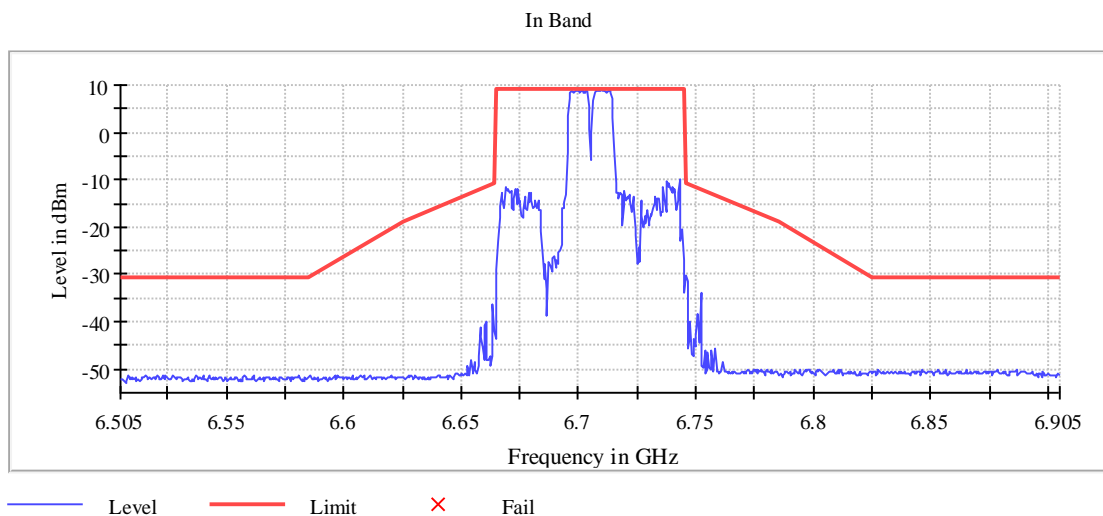


Figure 9: 6705 80MHz RU Vérification - Center

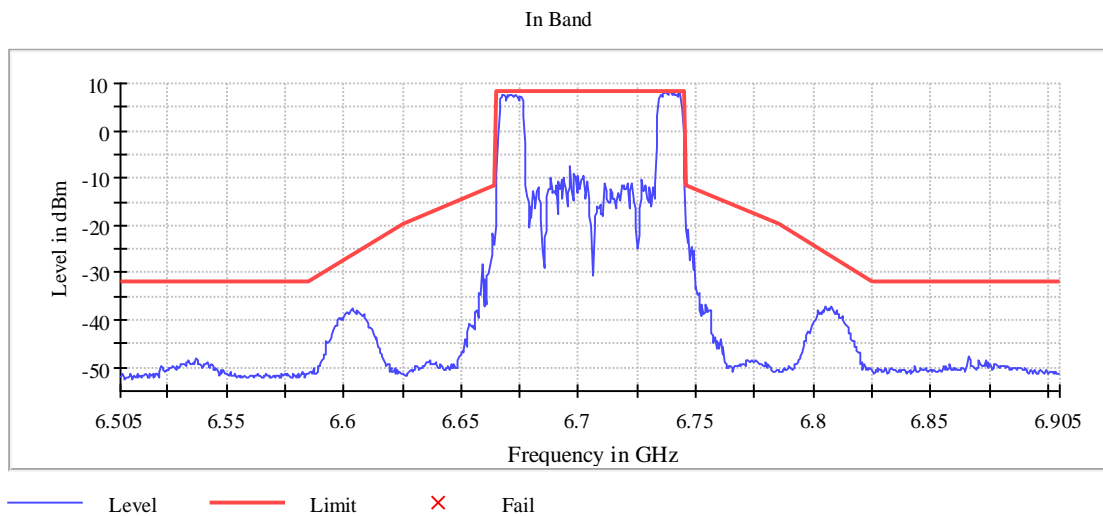


Figure 10: 6705 80MHz RU Vérification - Edge

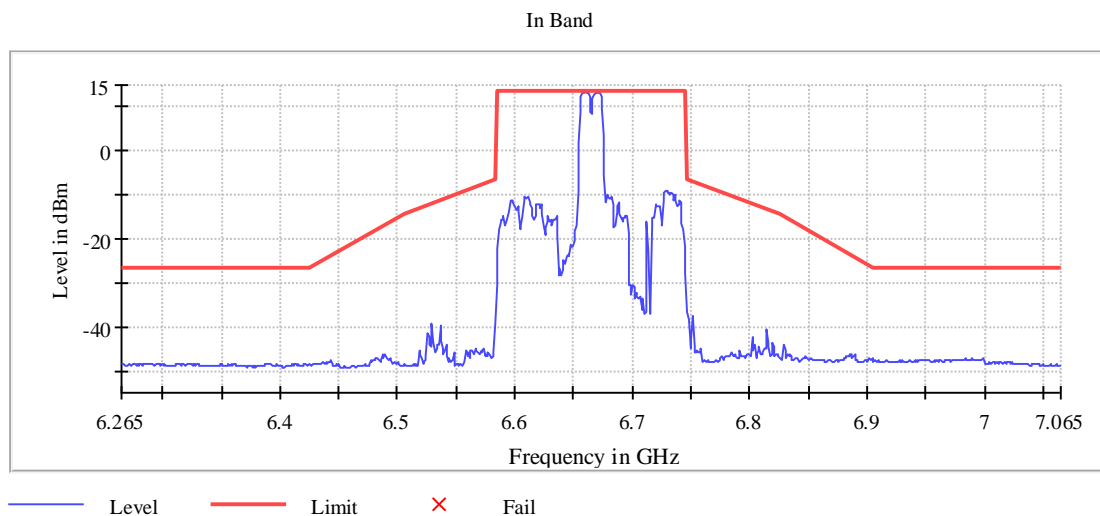


Figure 11: 6665 160MHz RU Vérification - Center

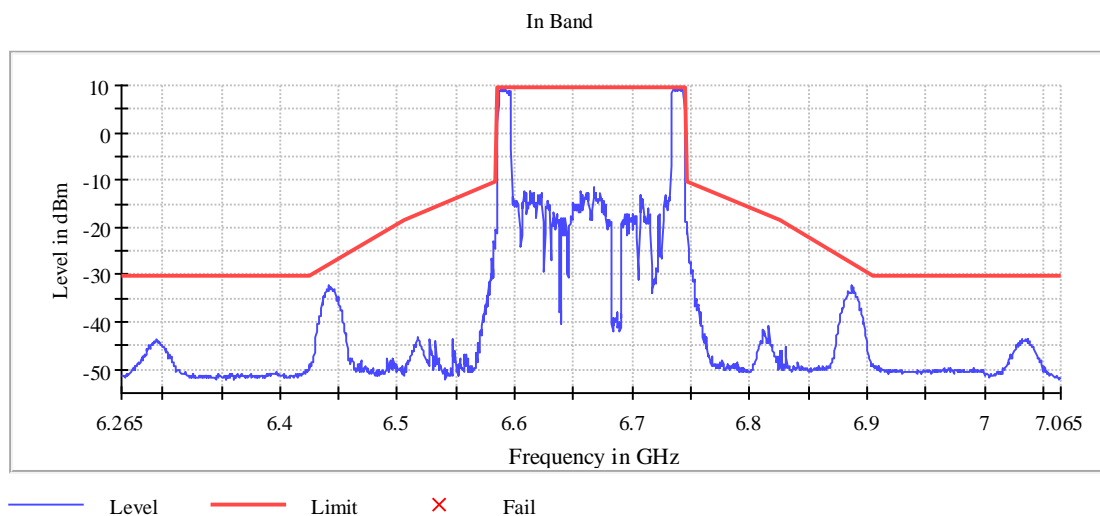


Figure 12: 6665 160MHz RU Vérification - Edge

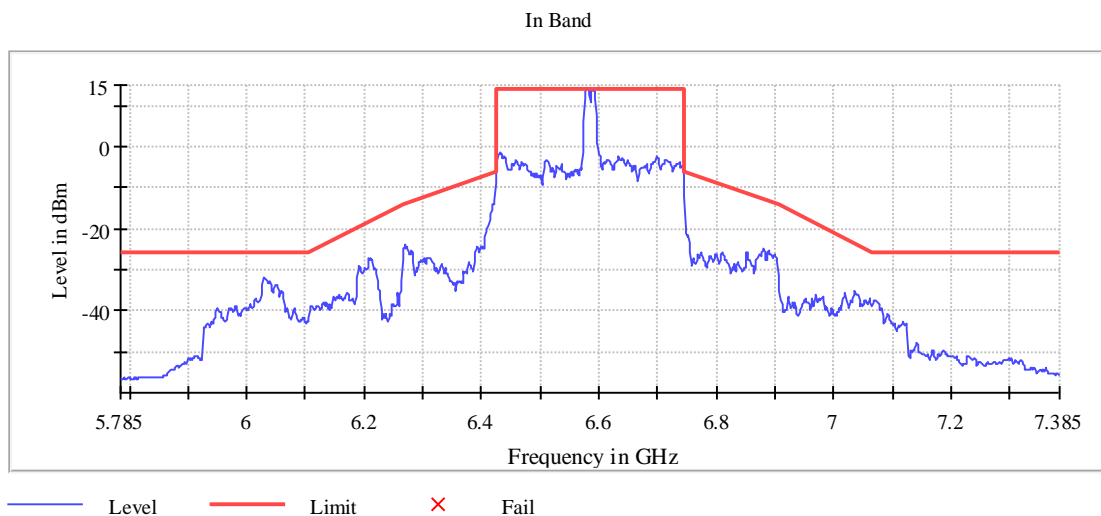


Figure 13: 6585 320MHz RU Vérification – Center

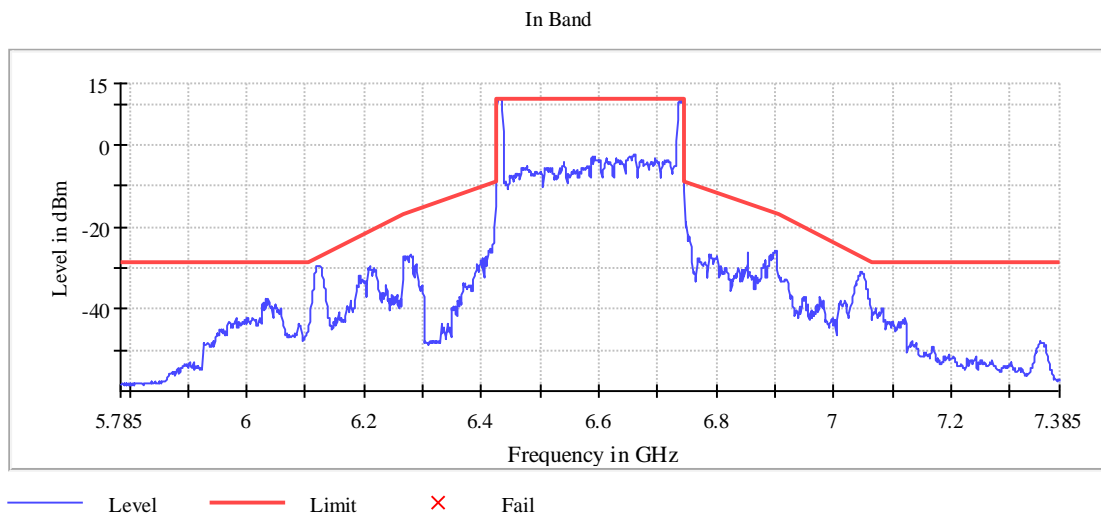


Figure 14: 6585 320MHz RU Vérification - Edge

5.7 §15.407(d) Contention Based Protocol

This product was tested and found to be compliant with the requirements of Contention-based Protocol as specified in FCC Part 15.407 and KDB 987594 D02.


Initially the test setup was connected directly to the signal source with all splitters (splitters terminated with a 50-ohm loads on unused ports) and cables in place to verify the AWGN signal is 10MHz wide at a signal level of less than or equal to -82dBm and for conducted measurements the threshold was adjusted for an antenna gain of 6 dBi. The level at the signal generator required to achieve the required signal level at the DUT was recorded for use during testing.

The DUT was connected as shown in figure 4 above and set to transmit at a constant duty cycle at each frequency and bandwidth noted in the table below and verified to be communicating with the companion device as intended.


Starting at the levels established above, the AWGN signal was introduced to the DUT and increased to determine a threshold level at where the DUT will terminate with at least a 90% detection rate. The level at the DUT, which the 90% detection rate was achieved was recorded as the “Sensitivity Level” below.

Any measurement below the sensitivity level will result in the Tx minimal and any further measurement below the sensitivity level will result in Tx on.


Testing shall be repeated at each applicable channel and bandwidth as noted in Table 1 of KDB 987594 D02.

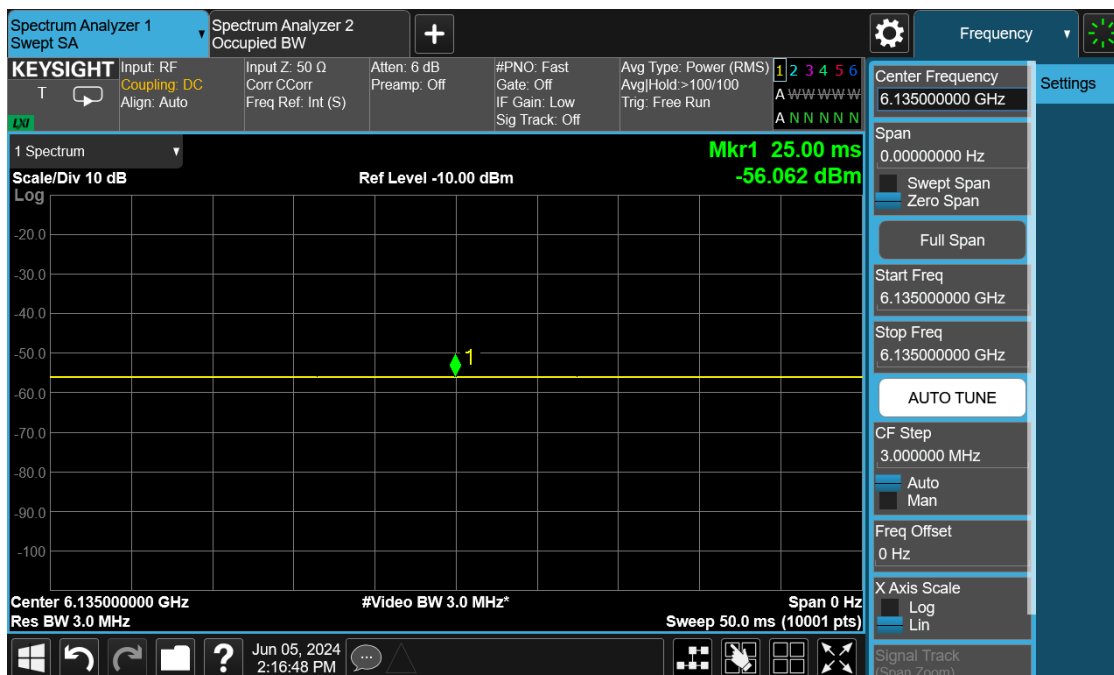


Plot 1: AWGN Signal BW Details

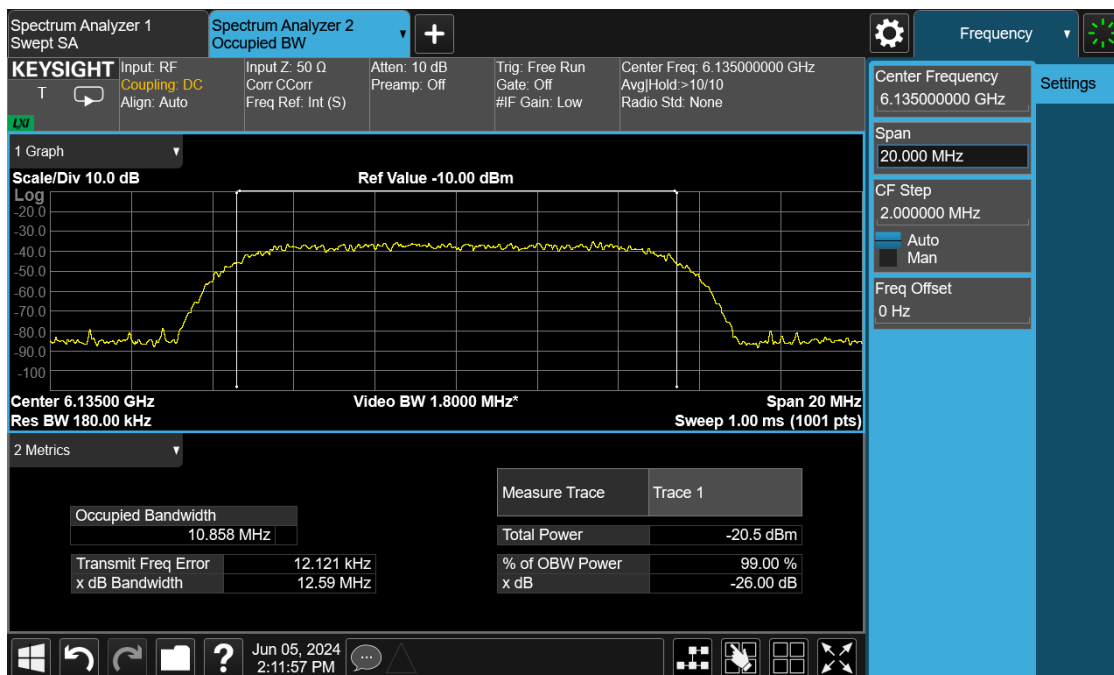


Plot 2: AWGN Signal Level Details

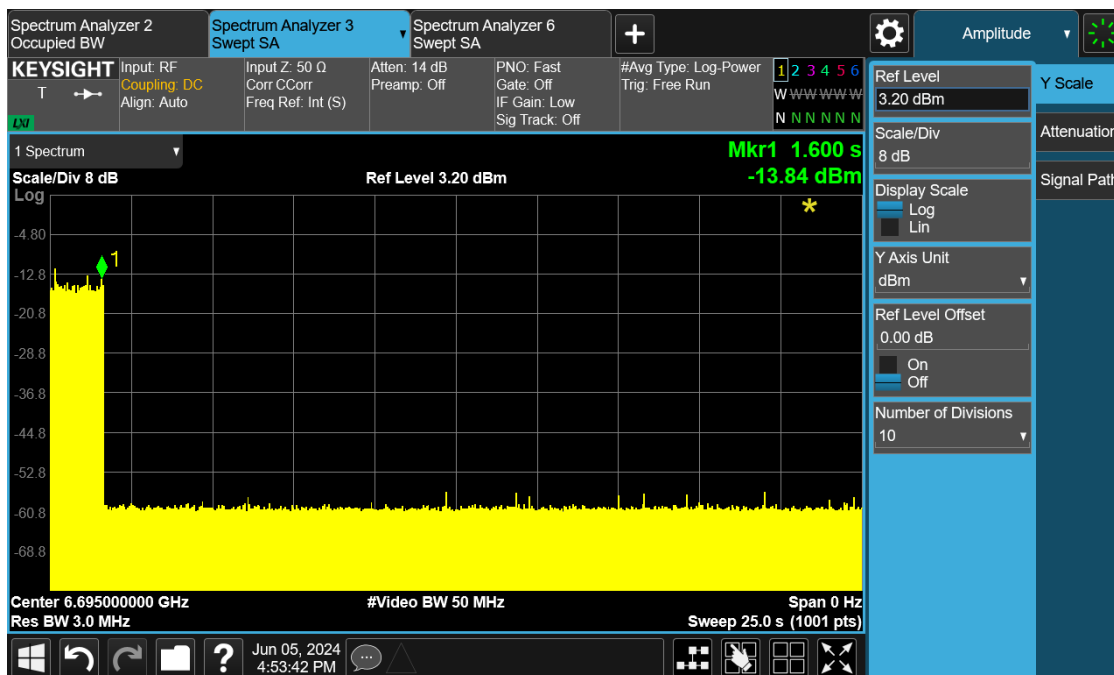


Plot 3: Reaction to interference signal fc2 6695MHz

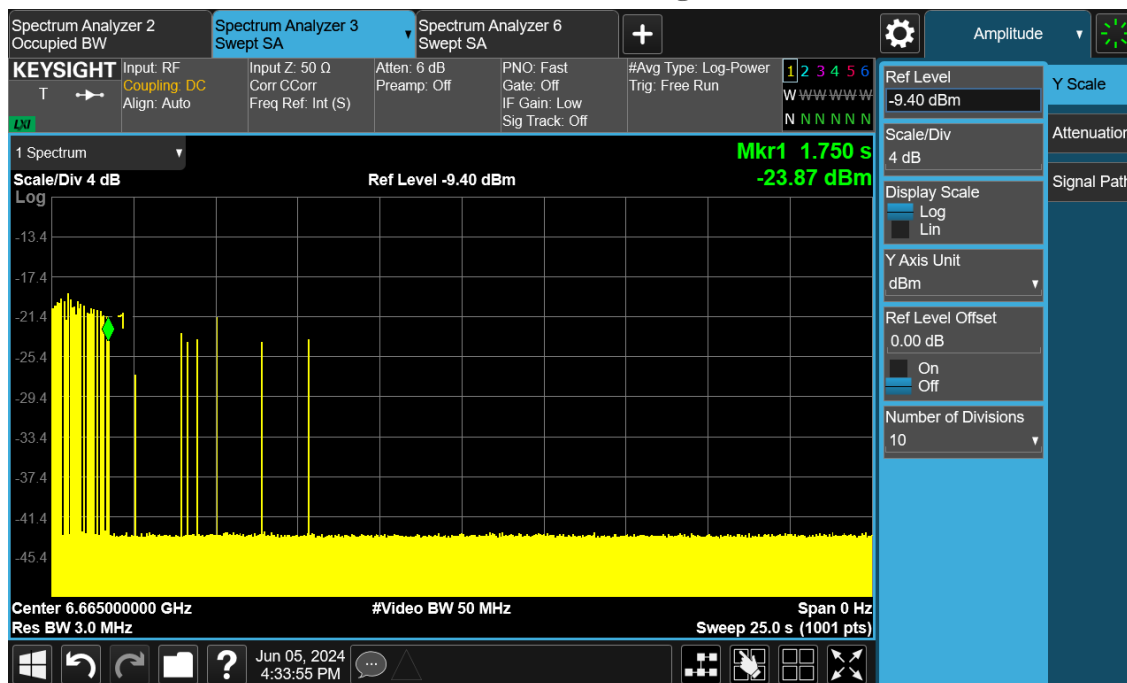


Plot 4: Reaction to interference signal fc2 6595MHz

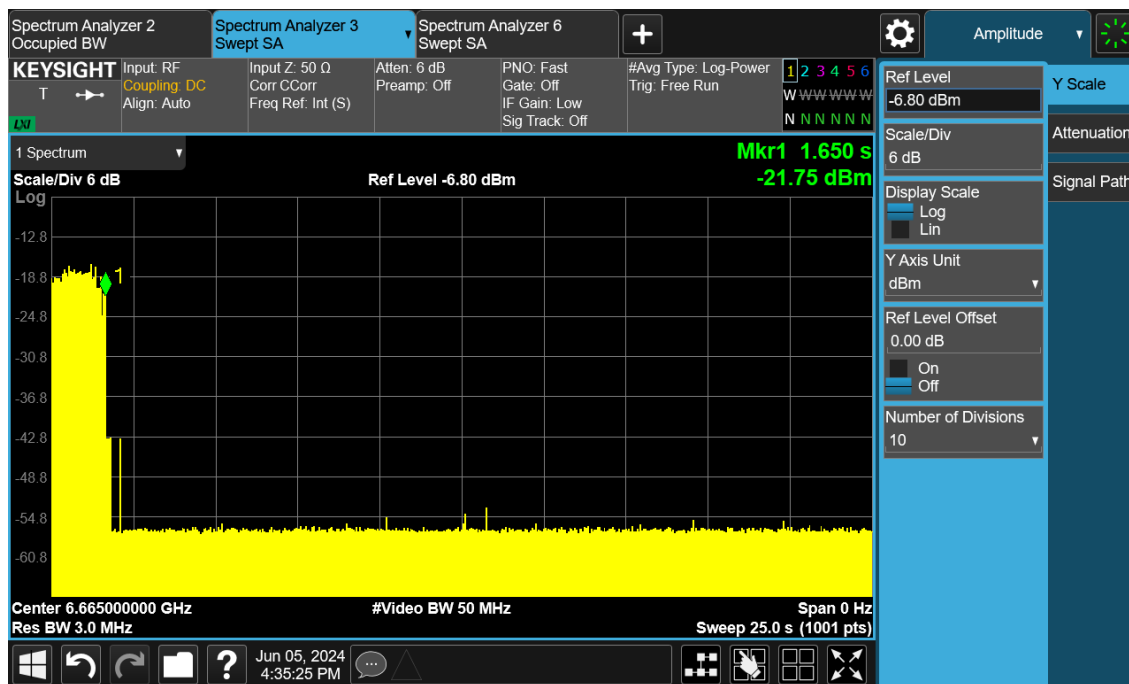


Plot 5: Reaction to interference signal fc2 6665MHz

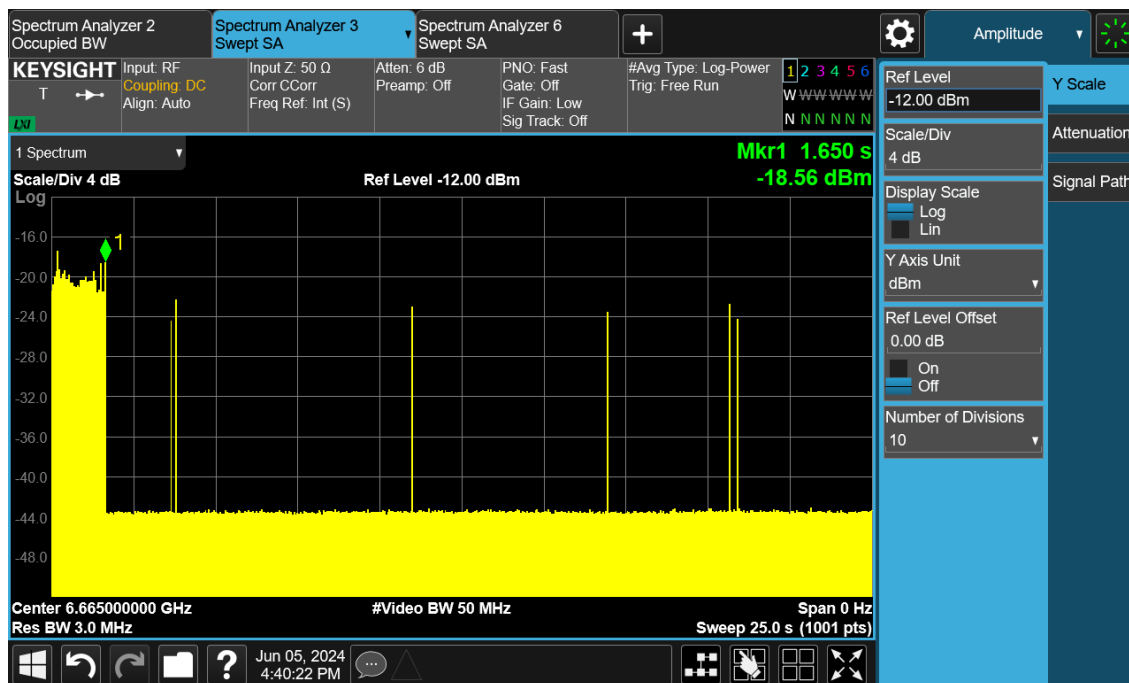


Plot 6: Reaction to interference signal fc2 6740MHz

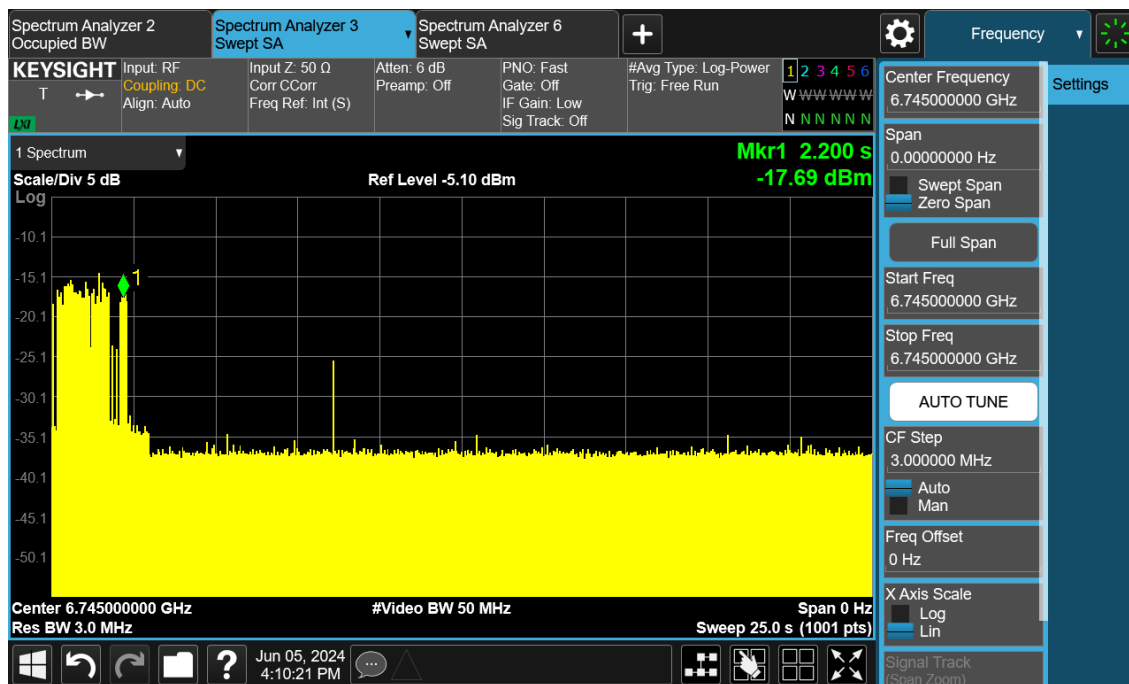

Plot 7: Reaction to interference signal fc2 6590MHz

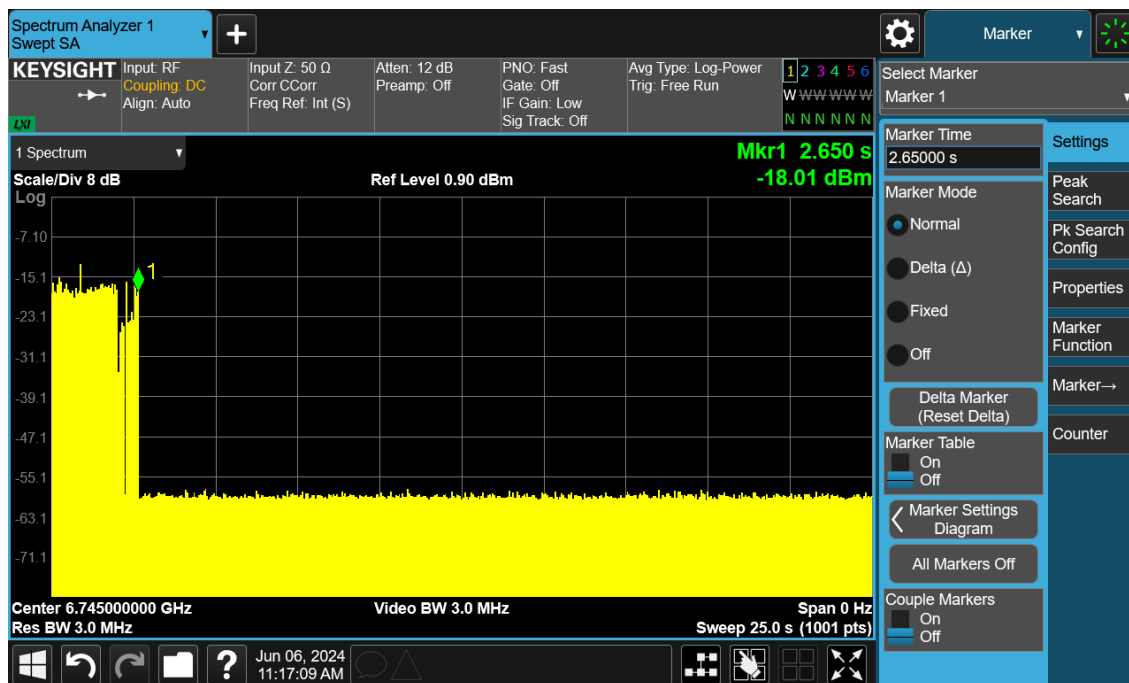

Plot 8: Reaction to interference signal fc2 6745MHz

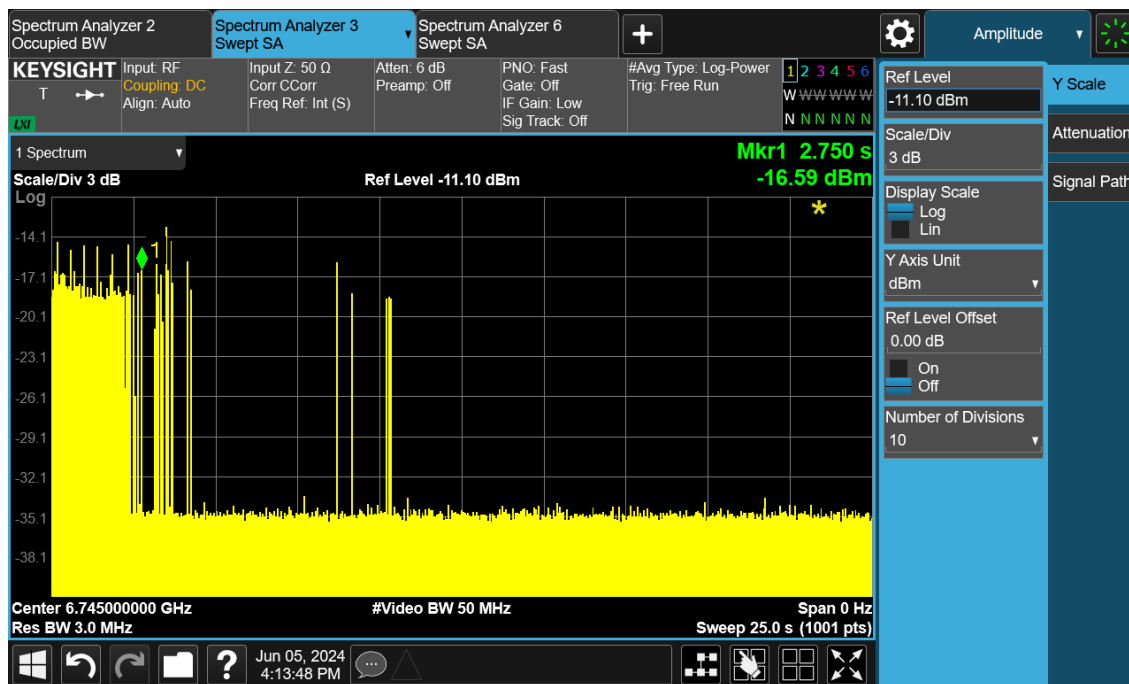

Plot 9: Reaction to interference signal fc2 6860MHz

Contention Based Protocol 987594 D02 U-NNI 6 GHz EMC Measurement

Band	BW _{EUT}	F _{c1}	F _{c2}	Signal Power Level (dBm)	Detection Rate (%)	Margin (dB)
UNII-5 5.925 - 6.425GHz	20	6135	6135	-70.3	100	14.3
	160	6185	6110	-66	100	10
			6185	-70.3	100	14.3
			6260	-71.5	100	15.5
	320	6265	6110	-57.7	100	1.7
			6265	-74.3	100	18.3
			6410	-56.7	100	0.7
UNII-6 6.425 - 6.525GHz	20	6455	6455	-74.3	100	18.3
	160	6505	6430	-69.6	100	13.6
			6505	-71.5	100	15.5
			6580	-62.3	100	6.3
UN11-7 6.525 - 6.875GHz	20	6695	6695	-75	100	19
	160	6665	6595	-62.3	100	6.3
			6665	-71.5	100	15.5
			6740	-66.9	100	10.9
	320	6745	6590	-57.6	100	1.6
			6745	-74.3	100	18.3
			6860	-66.9	100	10.9
UNII-8 6.875 - 7.125GHz	20	7015	7015	-75.3	100	19.3
	160	6985	6910	-61.3	100	5.3
			6985	-69.6	100	13.6
			7060	-57.6	100	1.6

Min. Antenna Gain (dBi)	6	Ports: 6G0,1,2,3	AWGN Clock
Max Threshold Level (TL)	-56	J44,43,36,42	25MHz

Table 8: Trial Table

CBP Path Lost is – 22 dB

Detection Level = Injected AWGN Power (dBm) – Antenna Gain (dBi) + Path Loss (dB)

Result

The EUT complies with the specification.

-- End of Test Report --