



# Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

Prepared for: Ubiquiti Networks, Inc

Model: LBE-M5

Description: LiteBeam M5

Serial Number: N/A

FCC ID: SWX-LBE5M

IC: 6545A-LBE5M

To

FCC Part 15.407

And

IC RSS-247

Date of Issue: November 18, 2015

On the behalf of the applicant:

Ubiquiti Networks, Inc  
2580 Orchard Parkway  
San Jose, CA 95131

Attention of:

Michael Taylor, Compliance Manager  
Ph: (408) 942-3085  
E-mail: [compliance@ubnt.com](mailto:compliance@ubnt.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p14a0032

**Kenneth Lee**  
**Project Test Engineer**

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



**Test Report Revision History**

Revision	Date	Revised By	Reason for Revision
1.0	October 16, 2015	Kenneth Lee	Original Document
2.0	November 18, 2015	Kenneth Lee	Updated PSD Table,



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices	6
Test Results Summary	9
Peak Output Power	10
Transmitter Power Spectral Density	12
Undesirable Emissions Conducted	14
Undesirable Emissions Radiated	16
Occupied Bandwidth	18
Frequency Stability	19
A/C Powerline Conducted Emission	20
Test Equipment Utilized	21



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The applicant has been cautioned as to the following**

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



## Standard Test Conditions Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with ANSI C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
23.0 – 26.5	22.7 – 36.5	962.9 – 972.7

### EUT Description

**Model:** LBE-M5

**Description:** LiteBeam M5

**Firmware:** N/A

**Software:** N/A

**Serial Number:** N/A

### Additional Information:

The EUT was tested conducted mode with RF connectors mounted on the EUT at the antenna input.

When the test cable is plugged into the RF connector mounted to the EUT it disables the antenna connection.

The EUT is powered by POE (Power Over Ethernet).

The different data rates were evaluated and the worst case data rate was chosen for all the testing.



**EUT Specifications**

<b>Equipment Code</b>	NII
<b>Model(s) Tested</b>	LBE-M5
<b>Model(s) covered</b>	LBE-M5
<b>Frequency Range</b>	5470-5600MHz and 5650-5725MHz
<b>Bandwidths</b>	10/20/30/40 MHz
<b>EUT temperature range</b>	-40°C to 80°C
<b>Data Rates</b>	6, 9, 12, 18, 24, 36, 48, 54, MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7, MCS8, MCS9
<b>Modulations</b>	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

**Antenna List**

No.	Manufacturer	Part #	Antenna Type	Peak Gain
1	Ubiquiti	LBE-AC Omni	OMNI	6
2	Ubiquiti	LBE-AC Dish	Dish	23

**15.203: Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply



**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Switching Gigabit Power Supply/POE	Ubiquiti	GP-A240-050G	N/A

**Cables:** None

**Modifications:** None





**Test Results Summary**

Specification	Test Name	Pass, Fail, N/A	Comments
§15.203	Antenna Requirements	Pass	
§15.207 §15.407(b)(6)	Line Conducted Emissions	Pass	
§15.407(a)(1)	Conducted Output Power	Pass	
§15.407(a)(1),(5)	Power Spectral Density	Pass	
§15.403(i) 15.407(a)(5)	26dB Occupied Bandwidth	Pass	
	99% Occupied Bandwidth		
§15.407(b)(1)	Undesirable Emissions	Pass	
§15.205 §15.407(b)(1),(5),(6)(7)	General Field Strength Limits (Restricted Bands and Radiated Emission limits)	Pass	
§15.407(g)	Frequency Stability	Pass	

References	Description
CFR47, Part 15, Subpart B	Unintentional Radiators
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed Nation Information Infrastructure Devices (U-NII)
ANSI C63.10-2009	American National standard for testing Unlicensed Wireless Devices
ANSI C63.4-2009	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ISO/IEC 17025:2005	General requirements for the Competence of Testing and Calibrations Laboratories
KDB 644545 D03	Guidance for IEEE 802 11ac New Rules
KDB 789033 D02	General U-NII Test Procedures New Rules V01
KDB 926956 D01	U-NII Transition Plan
RSS-247	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and License-Exempt Local Area Network (LE-LAN) Devices



**Peak Output Power**

**Engineer:** Kenneth Lee

**Test Date:** 10/15/2015

**Test Requirements**

(2) For the 5470-5600MHz and 5650-5725MHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


**Test Procedure**

The RF power was calculated using the spectrum analyzers' band power function per Method SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid, and high channels of the band.

**The Spectrum Analyzer was set to the following:**

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Sweep time = auto
- d. Detector = RMS
- e. 100 traces in power averaging mode

**Test Setup**





**Test Results**

**6dbi Antenna**

Bandwidth	Test Frequency	Data Rate	TP	J7 Measured Level	J7 Measured Level	Limit	Margin
MHz	MHz			dBm	mW	dBm	dB
10	5480	vt0	13	13.9	24.3	24	-10.2
10	5600	vt0	16	21.8	151.7	24	-2.2
10	5715	vt0	17	19.1	81.8	24	-4.9
20	5485	vt0	11	12.7	18.5	24	-11.3
20	5600	vt0	20	22.1	160.7	24	-1.9
20	5710	vt0	20	21.4	139.0	24	-2.6
30	5490	vt0	10	12.6	18.0	24	-11.5
30	5600	vt0	20	22.3	169.0	24	-1.7
30	5705	vt0	20	21.3	136.1	24	-2.7
40	5495	vf0	10	12.5	17.9	24	-11.5
40	5600	vf0	20	21.5	141.9	24	-2.5
40	5700	vf0	20	21.3	135.5	24	-2.7

**23dbi Antenna**

Bandwidth	Test Frequency	Data Rate	F37 Measured Level	F37 Measured Level	Limit	Margin
MHz	MHz		dBm	mW	dBm	dB
10	5480	vt0	-3.1	0.5	7	-10.1
10	5600	vt0	4.8	3.0	7	-2.2
10	5715	vt0	2.1	1.6	7	-4.9
20	5485	vt0	-4.3	0.4	7	-11.3
20	5600	vt0	5.1	3.2	7	-1.9
20	5710	vt0	4.4	2.8	7	-2.6
30	5490	vt0	-4.4	0.4	7	-11.4
30	5600	vt0	5.3	3.4	7	-1.7
30	5705	vt0	4.3	2.7	7	-2.7
40	5495	vf0	-4.5	0.4	7	-11.5
40	5600	vf0	4.5	2.8	7	-2.5
40	5700	vf0	4.3	2.7	7	-2.7



## Transmitter Power Spectral Density

**Engineer:** Kenneth Lee

**Test Date:** 10/15/2015

### Test Requirements

(2) For the 5470-5600MHz and 5650-5725MHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


### Test Procedure

The Power Spectral Density was measured using the method per SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid, and high channels of the band. The maximum PSD was determine by finding the peak value across the carrier bandwidth.

#### The Spectrum Analyzer was set to the following:

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Span  $1.5 * BW$
- d. Sweep time = auto
- e. Detector = RMS
- f. 100 traces in power averaging mode

#### Test Setup





**Test Results**

<b>Bandwidth</b>	<b>Test Frequency</b>	<b>Data Rate</b>	<b>TP</b>	<b>F37 Measured Level</b>	<b>F37 Measured Level</b>	<b>Limit</b>	<b>Margin</b>
<b>MHz</b>	<b>MHz</b>			<b>dBm</b>	<b>mW</b>	<b>dBm</b>	<b>dB</b>
10	5480	vt0	13	5.2	3.3	11	-5.8
10	5600	vt0	16	10.2	10.5	11	-0.8
10	5715	vt0	17	10.4	10.9	11	-0.6
20	5485	vt0	11	0.8	1.2	11	-10.3
20	5600	vt0	20	10.3	10.7	11	-0.7
20	5710	vt0	20	9.8	9.5	11	-1.2
30	5490	vt0	10	-1.1	0.8	11	-12.1
30	5600	vt0	20	8.7	7.3	11	-2.4
30	5705	vt0	20	8.0	6.3	11	-3.0
40	5495	vf0	10	-2.5	0.6	11	-13.5
40	5600	vf0	20	6.9	4.8	11	-4.2
40	5700	vf0	20	6.9	4.9	11	-4.1



## Undesirable Emissions Conducted

**Engineer:** Kenneth Lee

**Test Date:** 10/15/2015

### Test Requirements

#### Unwanted Emissions that fall Outside Restricted Bands

For transmitters operating in the 5470-5600MHz and 5650-5725MHz bands: All emissions outside of the 5470-5600MHz and 5650-5725MHz bands shall not exceed an e.i.r.p. of -27 dBm/MHz.

As specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz. However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz maximum emission limit.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz

The provisions of §15.205 apply to intentional radiators operating under this section

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

#### For Conducted Unwanted Emissions in the Restricted Bands

For conducted measurements above 1000 MHz, EIRP was determined and then the field strength computed by the following:

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77$ , where E = field strength and d = 3m

$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2$ , for d = 3 meters.

### Test Procedure

Per KDB 789033 D02 General U-NII Test Procedures New Rules v01 conducted RF port measurements were made in lieu of radiated. In addition, Cabinet Emissions measurements were performed in a semi-anechoic chamber with the antenna port terminated by a matching load. See additional section for Radiated Emissions.

The following criteria were addressed:

#### The Spectrum Analyzer was set to the following for emissions > 1000MHz:


- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Detector = Peak.
- d. Sweep time = auto
- e. Trace mode = max hold
  1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW  $\leq$  RBW/100 (i.e., 10 kHz) but not less than 10 Hz

#### For emissions below 1000MHz the Spectrum Analyzer settings were as follows:

- a. RBW = 100 kHz
- b. VBW  $\geq$  300 kHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold



**Test Setup**



**Test Results:**

**See Annex A: Undesirable Emissions Conducted**



**Undesirable Emissions Radiated**

**Engineer:** Kenneth Lee

**Test Date:** 10/15/2015

**Test Requirements**

The provision of §15.209 were applied. In addition the requirements of §15.205 were also applied.

**FCC Part 15 Subpart C Paragraph 15.209(a) Limits**

Frequency (MHz)	Frequency (microvolts/meter)	Frequency (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBµV/m) = 20 log E field strength (uV/m)

**Test Procedure**

The EUT was setup in accordance with ANSI C63.10. 2013 and tested per KDB 789033. The antenna was replaced with non-radiating matched load. The EUT is placed on non-conductive platform at a height of 0.8 meters above the ground plane of the semi-anechoic chambers. The EUT was rotated 360 degrees and the receive antenna raised and lowered to find the maximum emissions from 30MHz to the 10<sup>th</sup> harmonic of the fundamental. The EUT was set to the maximum power level allowed and the low, mid, and high channels were investigated for emissions.

**The Spectrum Analyzer was set to the following for emissions > 1000MHz:**

- a. (RBW = 1 MHz
- b. VBW ≥ 3 MHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold
  - 1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW ≤ RBW/100 (i.e., 10 kHz) but not less than 10Hz


**For emissions below 1000MHz the Spectrum Analyzer settings were as follows:**

- a. RBW = 100 kHz
- b. VBW ≥ 300 kHz
- c. Detector = Peak
- d. Sweep time = auto
- e. Trace mode = max hold
  - 1. Note: A quasi peak detector was used for emissions where the peak exceeded that of the average 15.209 emission limits






**Test Setup below 1000MHz**



**Test Setup above 1000MHz**

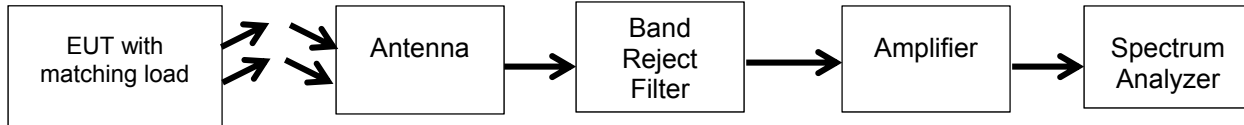

**Test Results:**            **See Annex B: Undesirable Emission Radiated**



## Occupied Bandwidth

**Engineer:** Kenneth Lee

**Test Date:** 10/15/2015

### Test Requirement


The emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement

### Test Procedure

**The Spectrum Analyzer was set to the following parameters:**

- a. RBW = approximately 1% of the emission bandwidth.
- b. VBW > RBW.
- c. Detector = Peak.
- d. Trace mode = max hold.

### Test Setup



**Test Results:** See Annex C: Occupied Bandwidth



## Frequency Stability

**Engineer:** Alex Macon

**Test Date:** 7/16/2015


### Test Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### Test Procedure

- a. The EUT was placed into a temperature chamber and the temperature ranges were set to the manufacturers' specifications.
- b. The RF output of the EUT was connected to a spectrum analyzer
- c. The lowest and highest channels of the band were set to transmit
- d. The carrier plots were measured to insure that the 26dB band width remained within the band over the prescribed temperature extremes.

### Test Setup

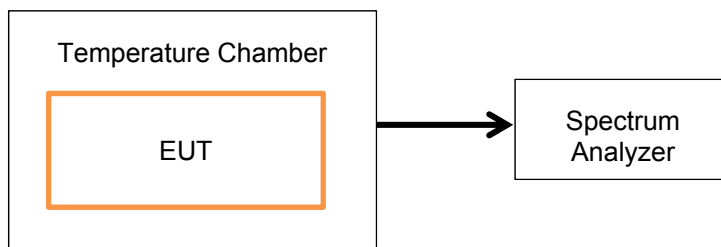

**Test Results:** See Annex D: Frequency Stability



## A/C Powerline Conducted Emission


**Engineer:** Alex Macon

**Test Date:** 7/10/2015

### Test Procedure

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.

### Test Setup



**Test Results:** See Annex E: A/C Powerline Conducted Emission



### Test Equipment Utilized



Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Temperature Chamber	Tenney	Tenney Jr	i00027	NCR	NCR
Temperature Chamber	Tenney	Tenney II Benchmaster	i00287	NCR	NCR
EMI Receiver	HP	8546A	i00033	2/26/15	2/26/16
Preamplifier	HP	8447D	i00055	NCR	NCR
Horn Antenna	EMCO	3116	i00085	1/29/15	1/29/17
Bi-Log Antenna	Schaffner	CBL611C	i00267	2/24/14	2/24/16
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/16
Horn Antenna, Amplified	ARA	MWH-1826/B	i00273	4/22/15	4/22/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	4/1/15	4/1/16
Spectrum Analyzer	Agilent	E4407B	i00331	9/18/15	9/18/16
Data Logger	Fluke	Hydra Data Bucket	i00343	3/24/15	3/24/16
EMI Analyzer	Agilent	E7405A	i00379	2/5/15	2/5/16
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	11/26/13	3/12/16
PSA Spectrum Analyzer	Agilent	E4445A	i00471	8/26/15	8/26/16

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT



**Annex E**  
**15.207**  
**A/C Powerline**  
**Conducted Emission**

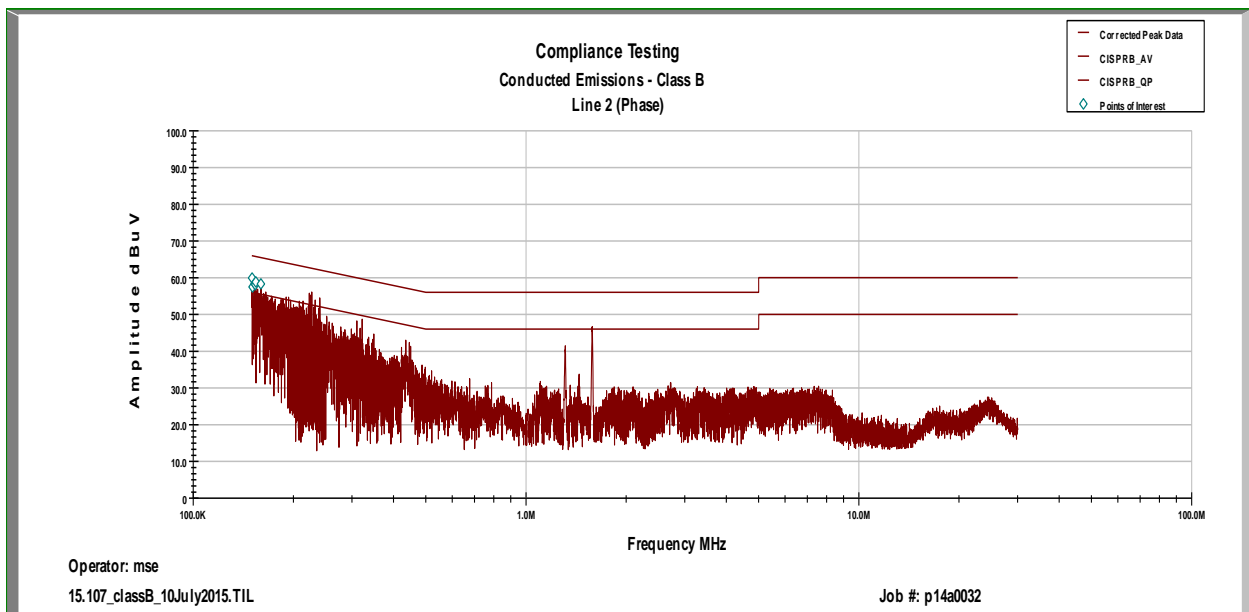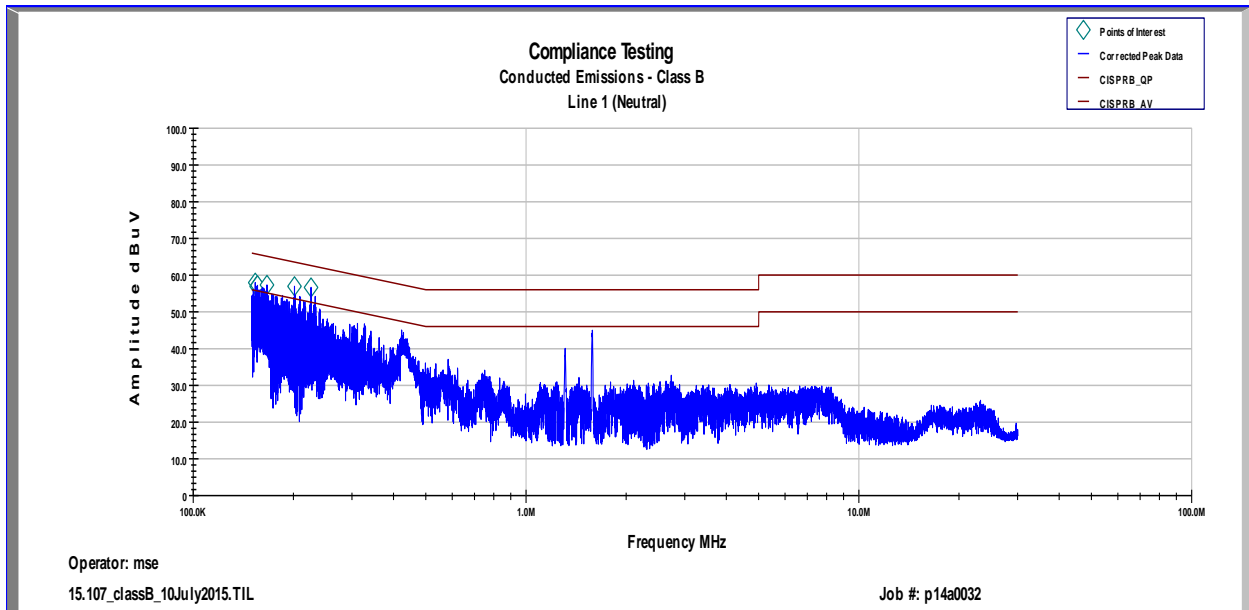



**L1 AVG**

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
220.53 KHz	16.51	0.19	0.021	10.1	26.821	53.985	-27.164
189.99 KHz	17.63	0.2	0.02	10.1	27.953	54.857	-26.904
160.86 KHz	23.5	0.2	0.02	10.191	33.915	55.69	-21.775
159.47 KHz	23.17	0.21	0.02	10.2	33.599	55.729	-22.131
157.01 KHz	23.44	0.23	0.02	10.2	33.887	55.8	-21.913
150.1 KHz	16.49	0.3	0.02	10.2	27.006	55.997	-28.991

**L2 AVG**

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
157.63 KHz	21.8	0.22	0.02	10.2	32.24	55.782	-23.542
155.22 KHz	20.32	0.25	0.02	10.2	30.788	55.851	-25.063
153.07 KHz	18.74	0.27	0.02	10.2	29.226	55.912	-26.686
152.65 KHz	17.92	0.27	0.02	10.2	28.417	55.924	-27.507
151.55 KHz	17.52	0.28	0.02	10.2	28.025	55.956	-27.931
150.95 KHz	16.43	0.29	0.02	10.2	26.937	55.973	-29.036

**L1 QP**

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
157.63 KHz	21.8	0.22	0.02	10.2	32.24	55.782	-23.542
155.22 KHz	20.32	0.25	0.02	10.2	30.788	55.851	-25.063
153.07 KHz	18.74	0.27	0.02	10.2	29.226	55.912	-26.686
152.65 KHz	17.92	0.27	0.02	10.2	28.417	55.924	-27.507
151.55 KHz	17.52	0.28	0.02	10.2	28.025	55.956	-27.931
150.95 KHz	16.43	0.29	0.02	10.2	26.937	55.973	-29.036

**L2 QP**

Frequency	Measured Data	LISN Correction Factor	Cable Correction Factor	Attenuator	Corrected Data	Limit	Margin
157.63 KHz	40.63	0.22	0.02	10.2	51.074	65.782	-14.708
155.22 KHz	40.46	0.25	0.02	10.2	50.928	65.851	-14.923
153.07 KHz	39.5	0.27	0.02	10.2	49.989	65.912	-15.923
152.65 KHz	39.32	0.27	0.02	10.2	49.813	65.924	-16.111
151.55 KHz	39.06	0.28	0.02	10.2	49.565	65.956	-16.391
150.95 KHz	38.99	0.29	0.02	10.2	49.5	65.973	-16.472




# **Annex D**


## **Frequency Stability**



### UNI-2C -40C

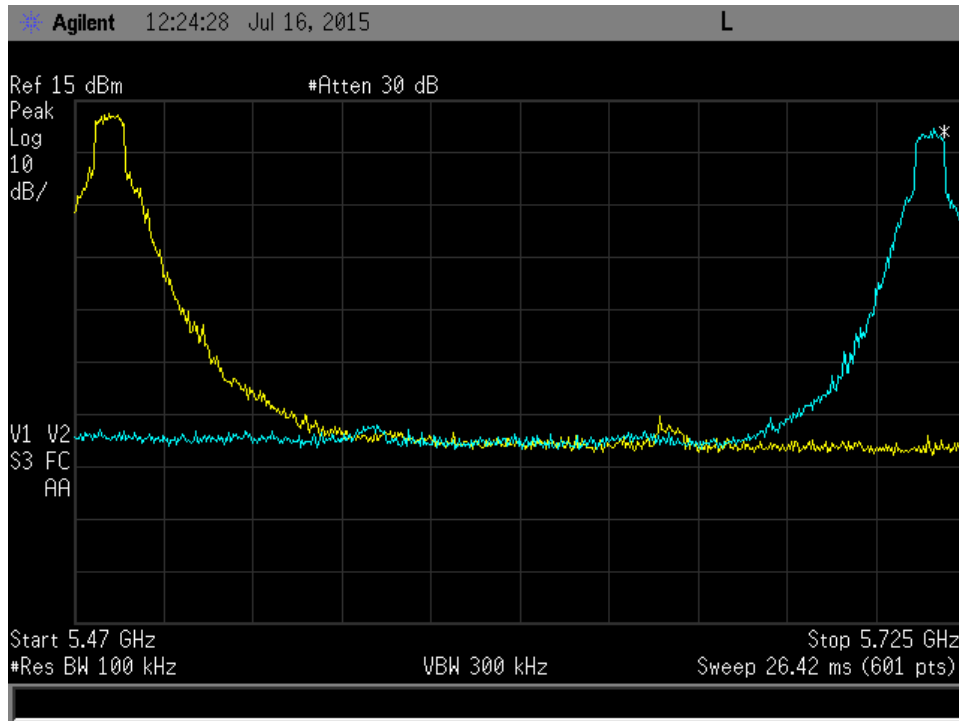


### UNI-2C 25C

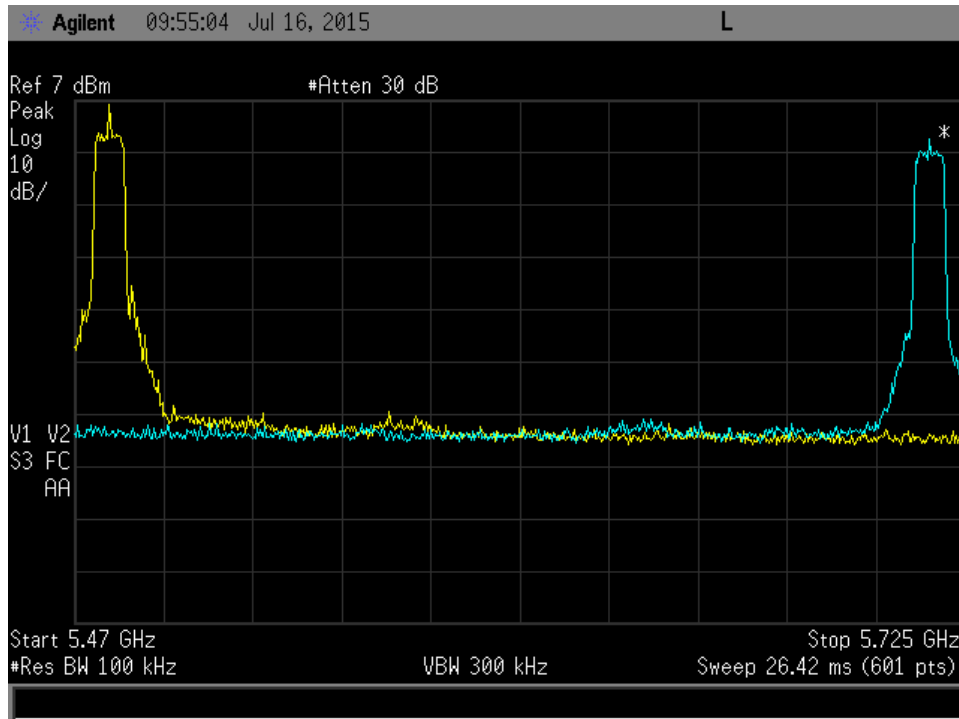



### UNI-2C 80C

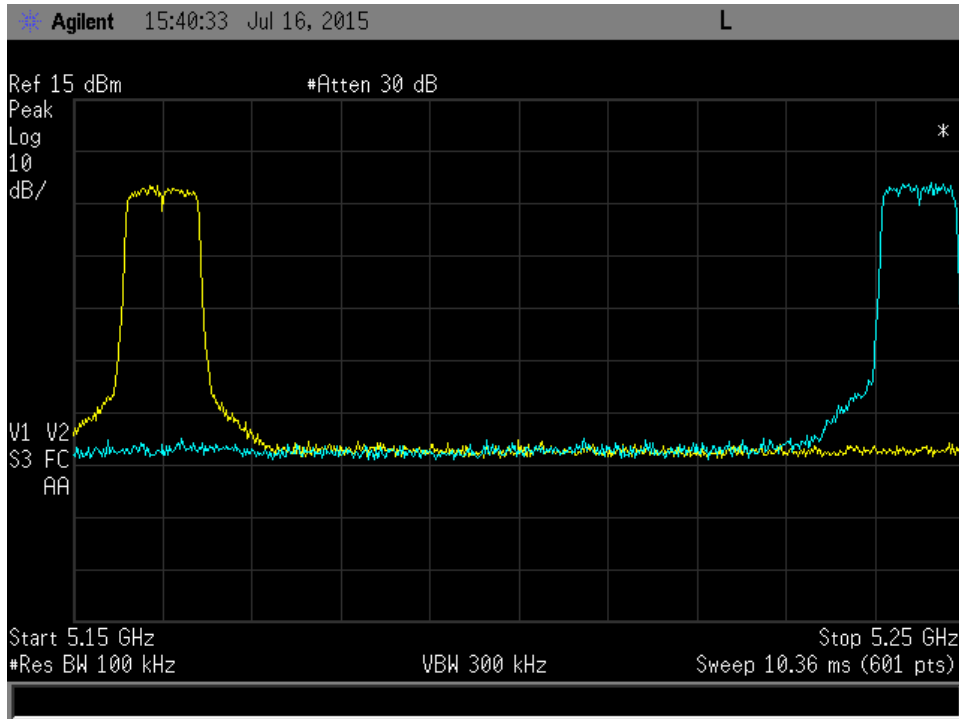


# **Annex C**

## **Occupied Bandwidth**


### **Port F37**



### 10 MHz high ch

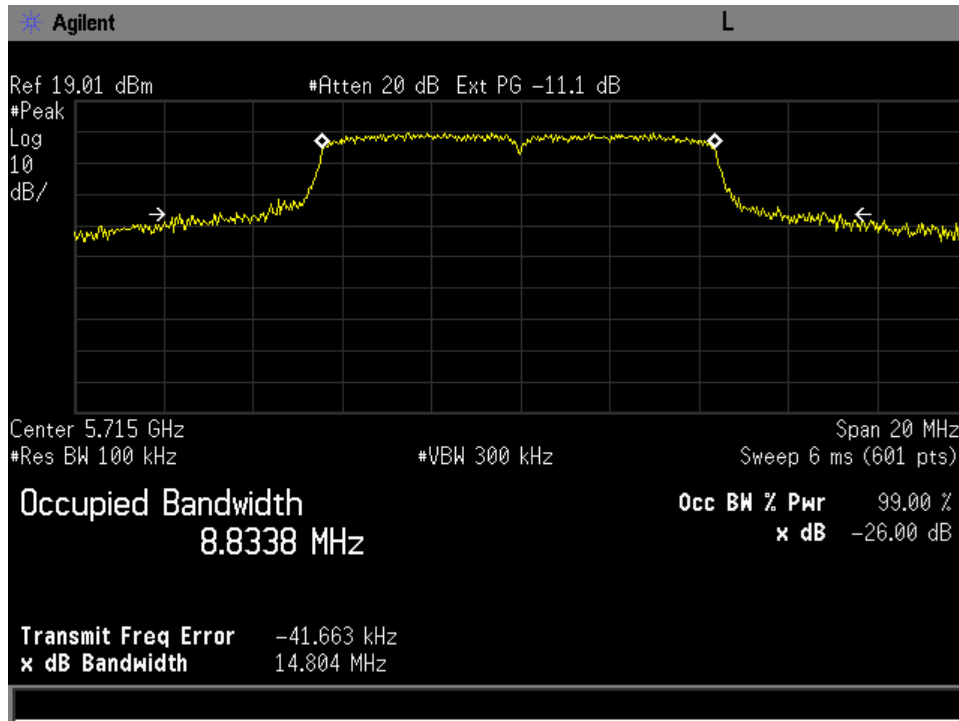


### 10 MHz low ch

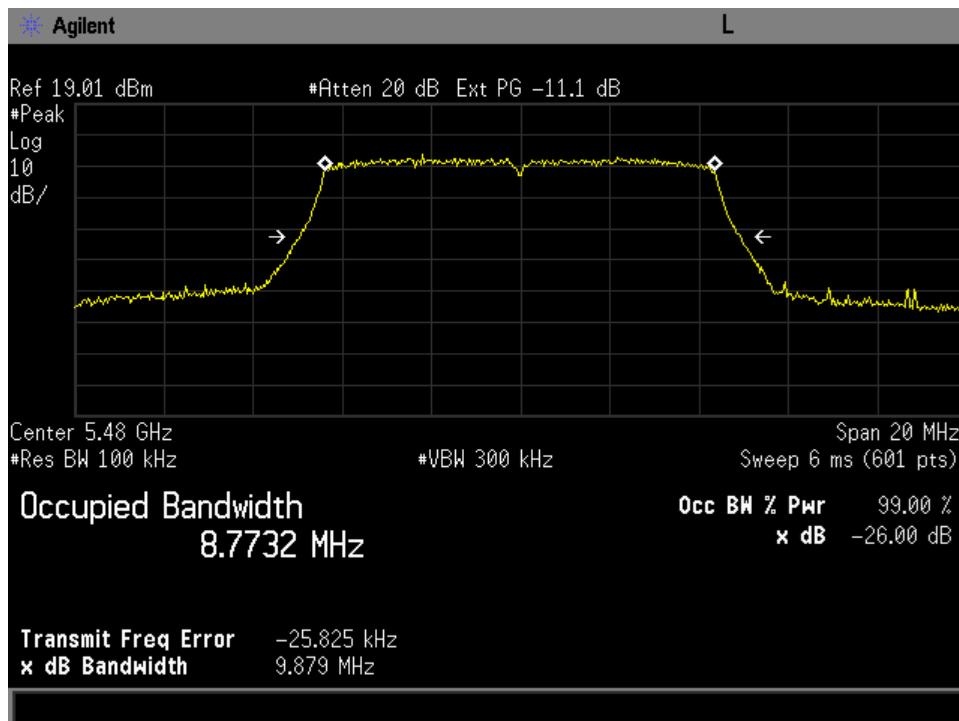




### 10 MHz mid ch

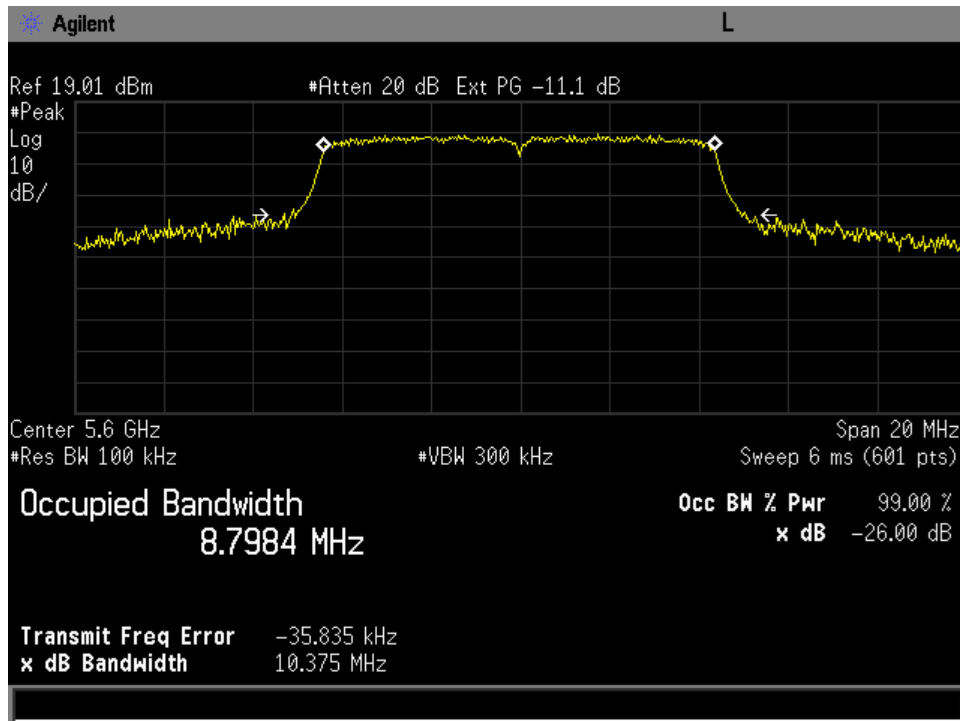


### 20 MHz high ch

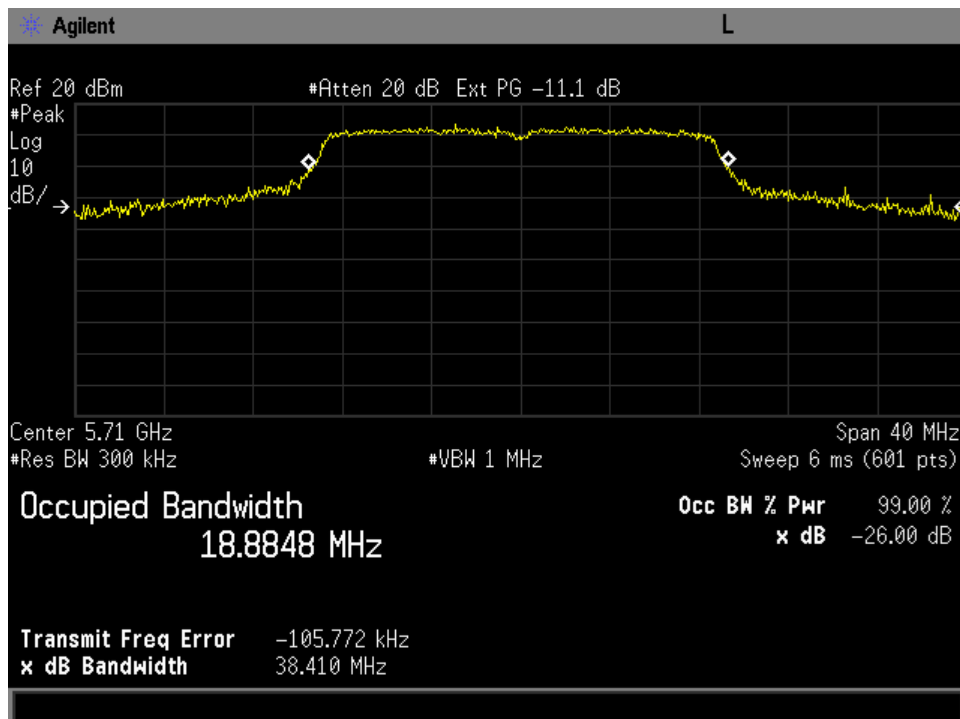




### 20 MHz low ch

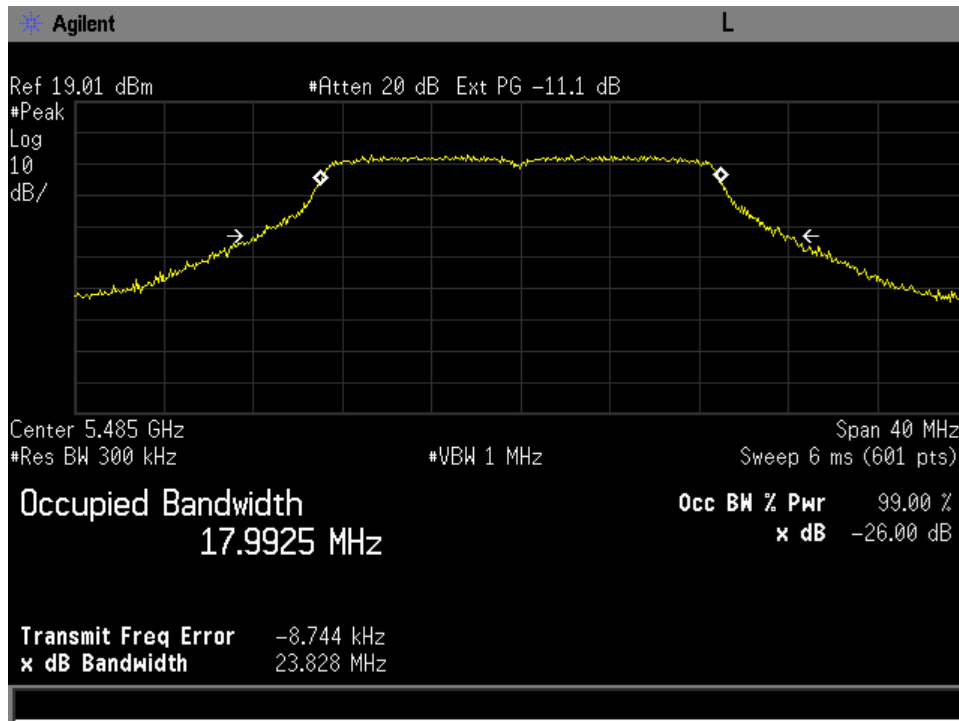


### 20 MHz mid ch

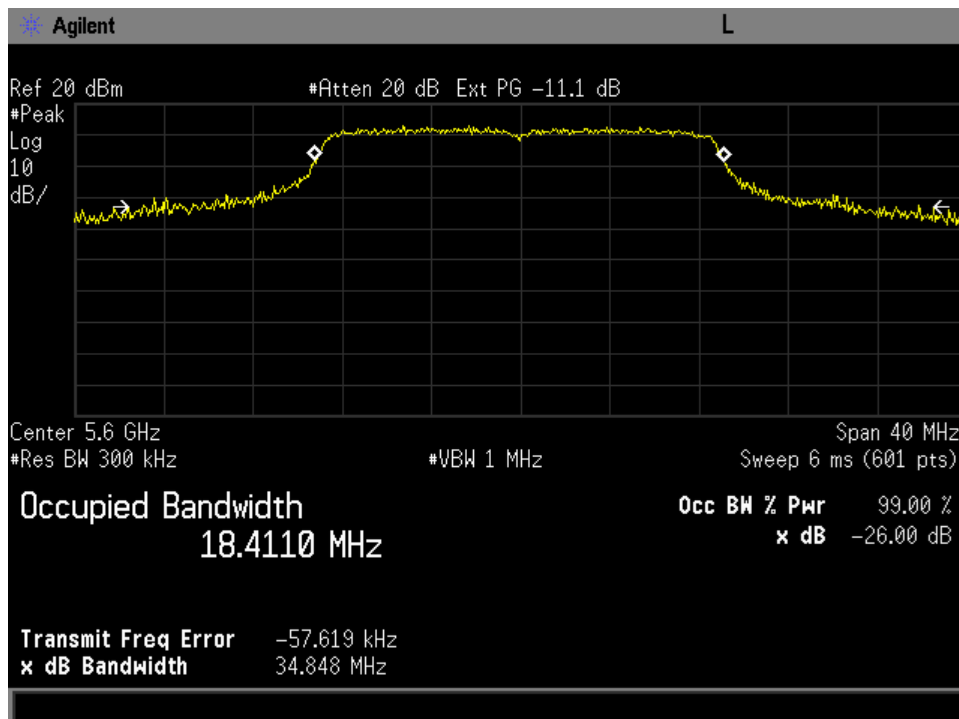




### 30 MHz high ch

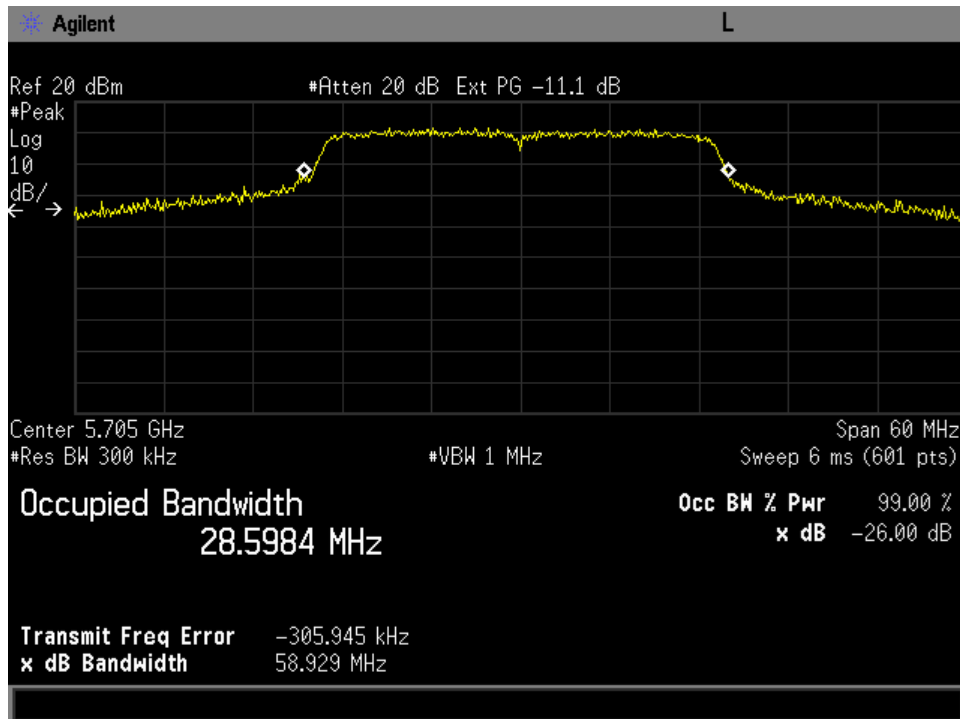


### 30 MHz low ch

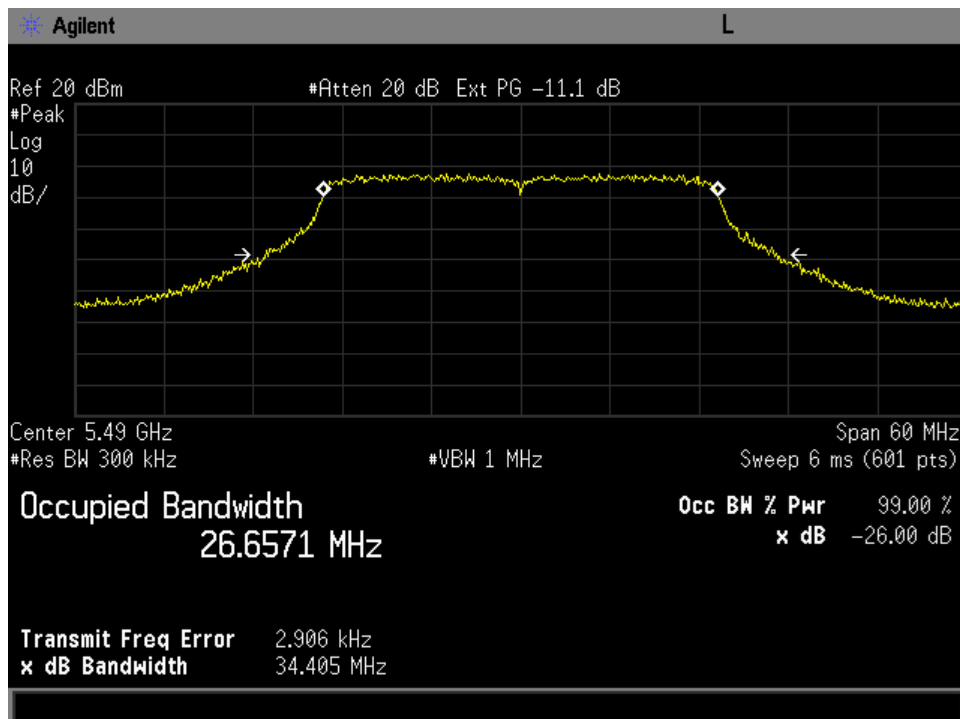






### 30 MHz mid ch

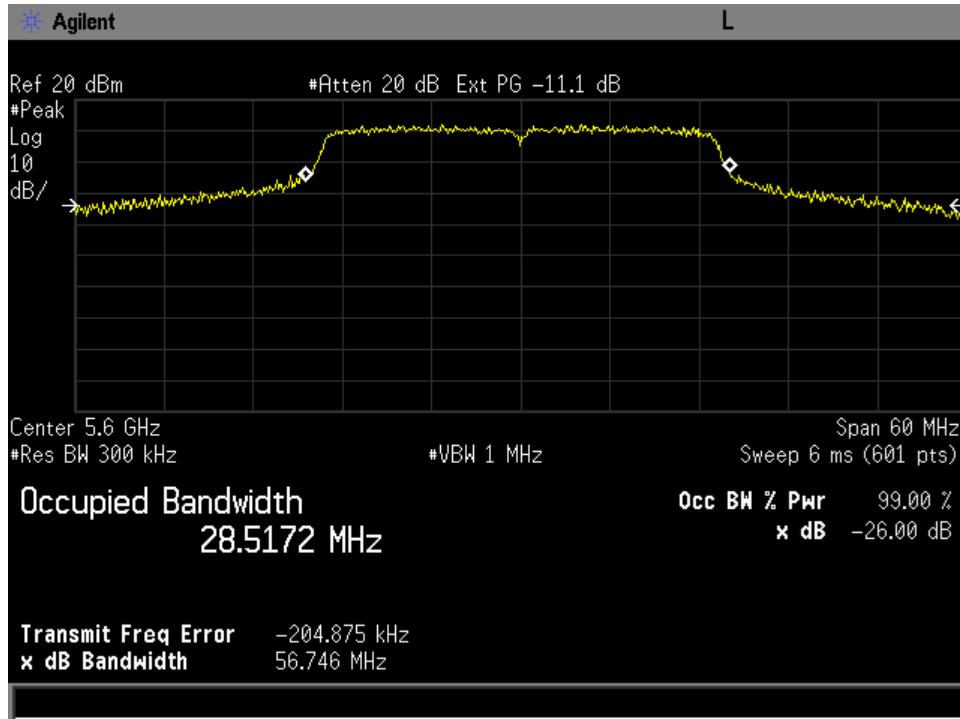


### 40 MHz high ch

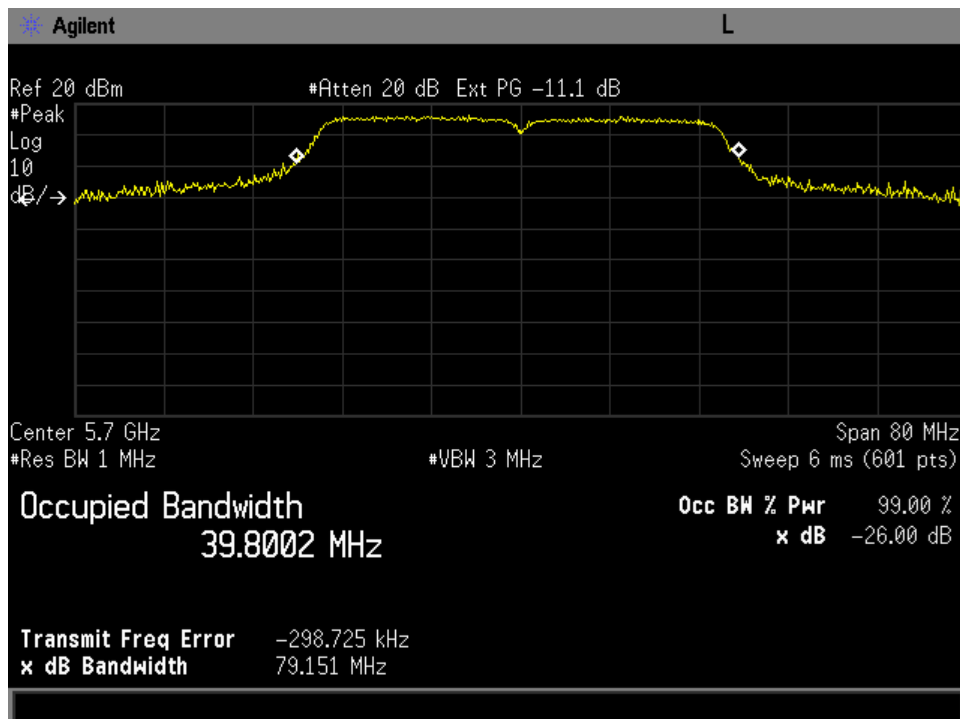




### 40 MHz low ch

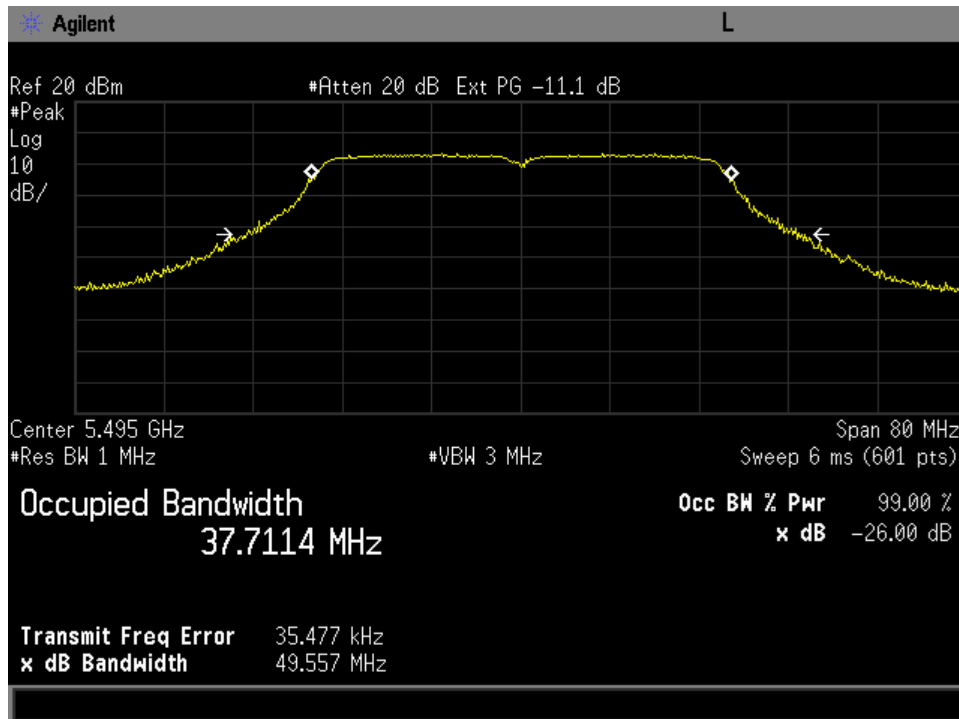

### 40 MHz mid ch

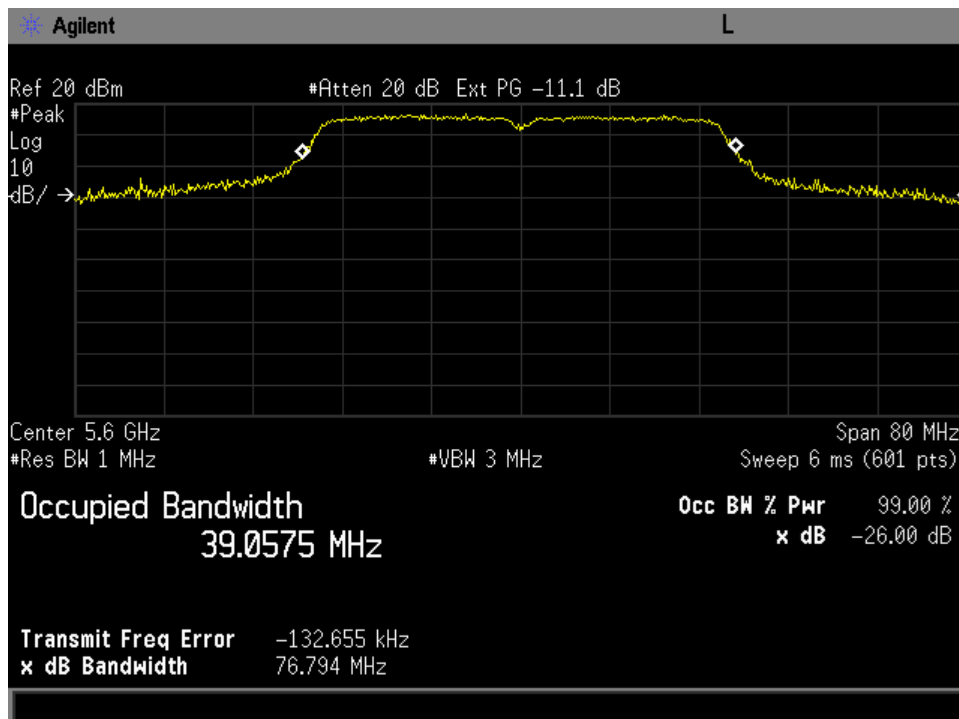

# Annex B


## Undesireable Emissions

### Radiated


**Annex B Notes:** The emissions that are over the limit in the 30 – 1000 MHz plots are from digital circuitry and not the transmitter, therefor these emissions only need to meet the -27 dBm/MHz general emission requirements. Emissions were investigated up to 40 GHz but only noise floor was measured.



### 10 MHz high ch 1-18 GHz

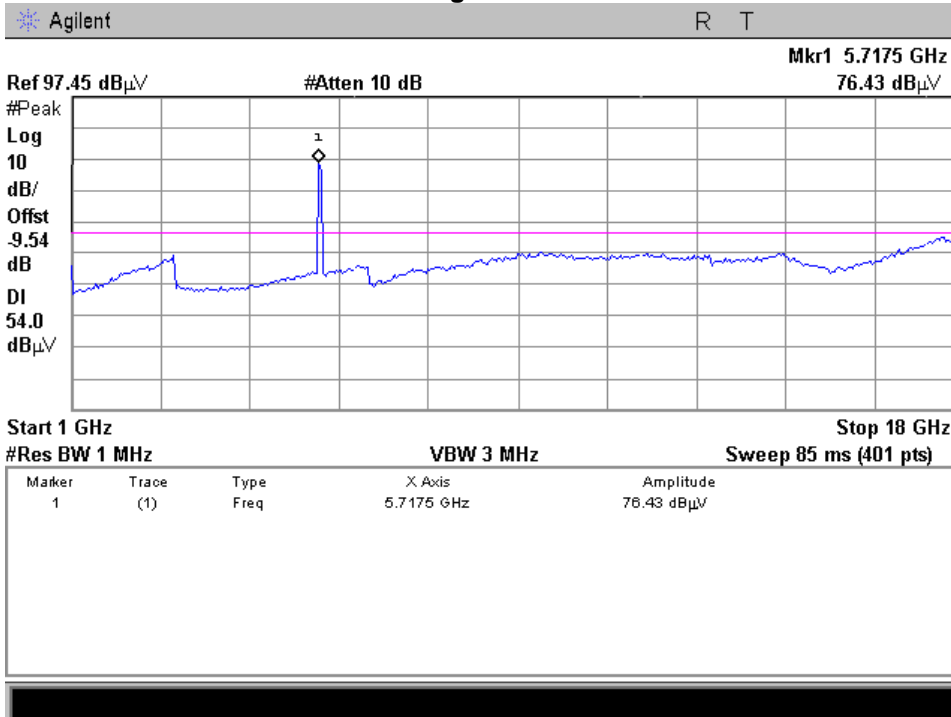


### 10 MHz high ch 18-26.5 GHz

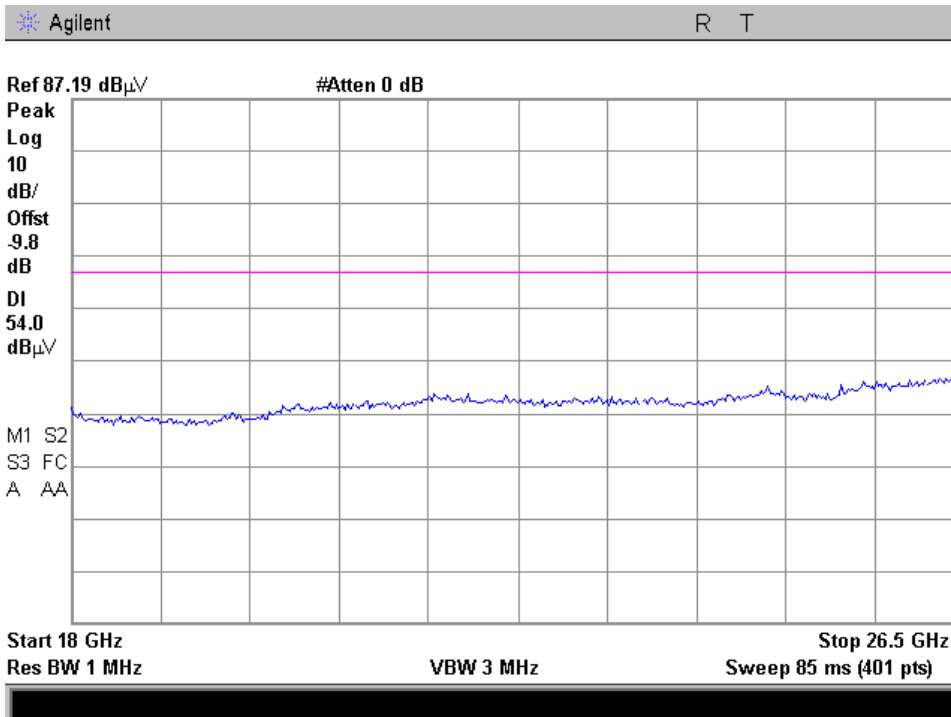




### 10 MHz high ch 30-1000 MHz

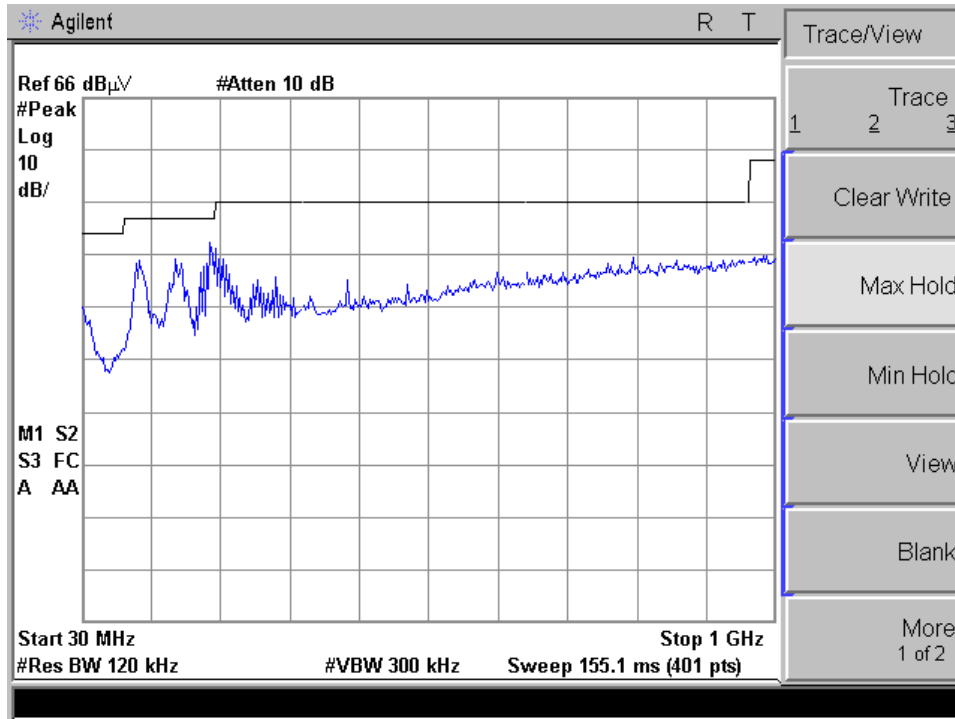


### 10 MHz low ch 1-18 GHz

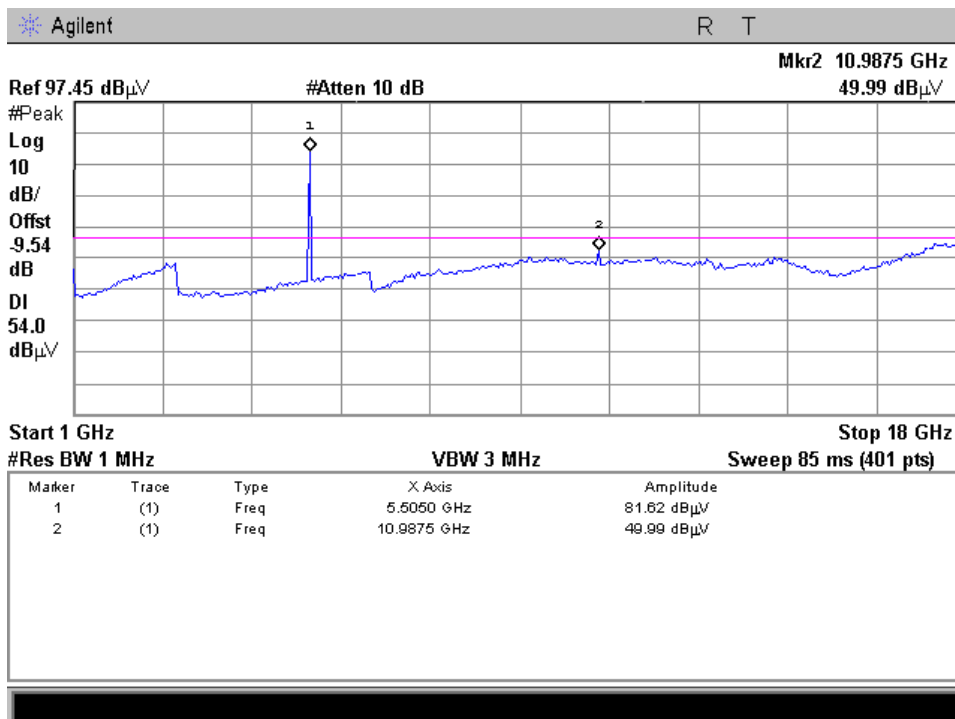




### 10 MHz low ch 18-26.5 GHz

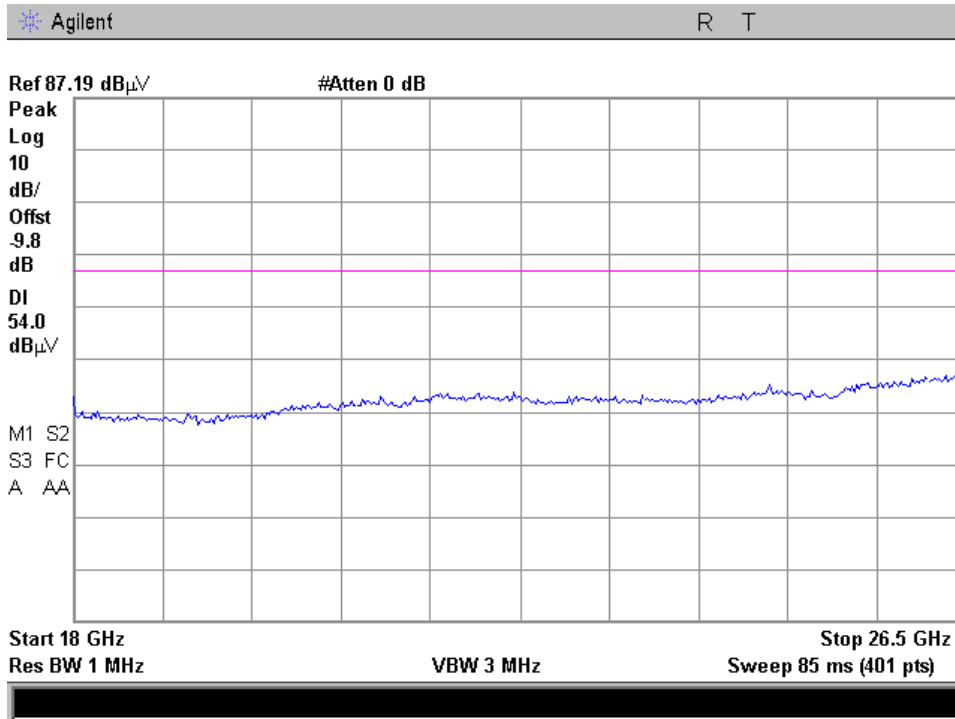


### 10 MHz low ch 30-1000 MHz

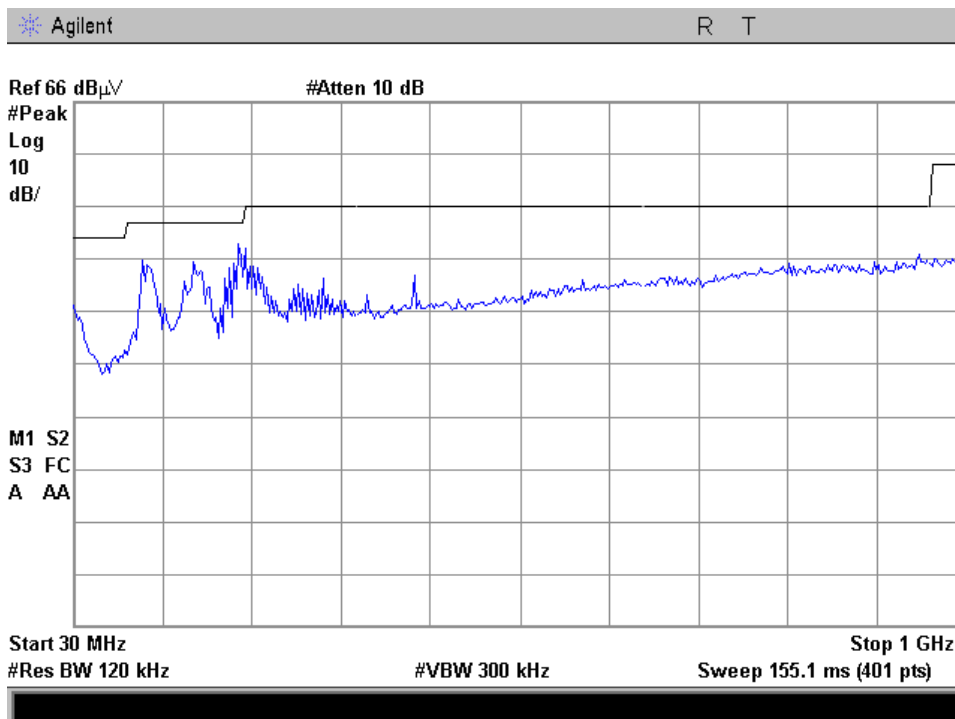




### 10 MHz mid ch 1-18 GHz

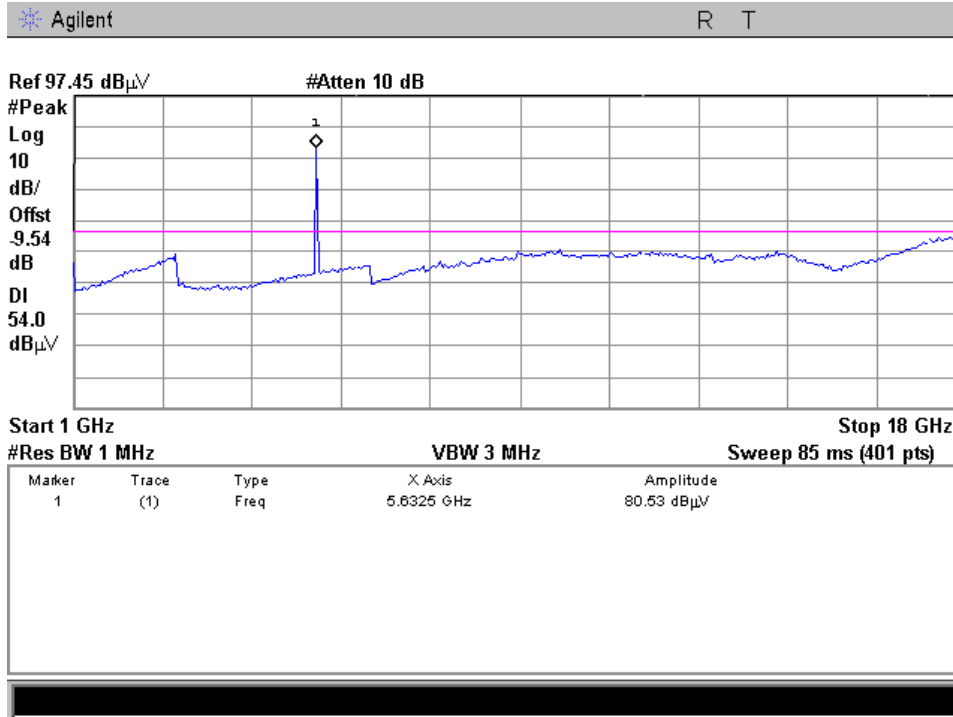


### 10 MHz mid ch 18-26.5 GHz

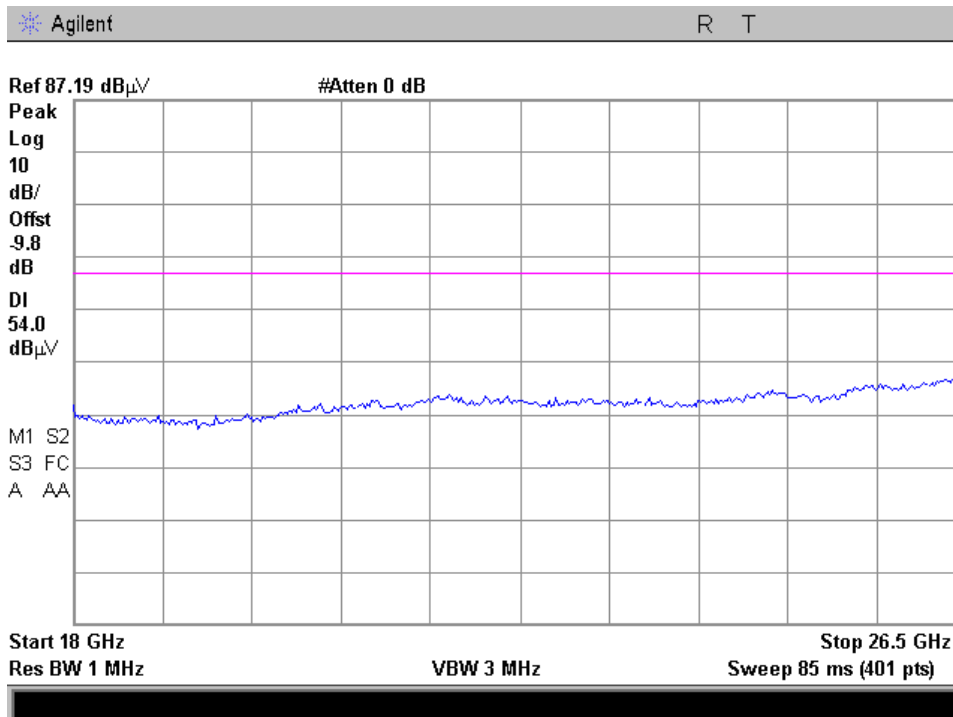



### 10 MHz mid ch 30-1000 MHz

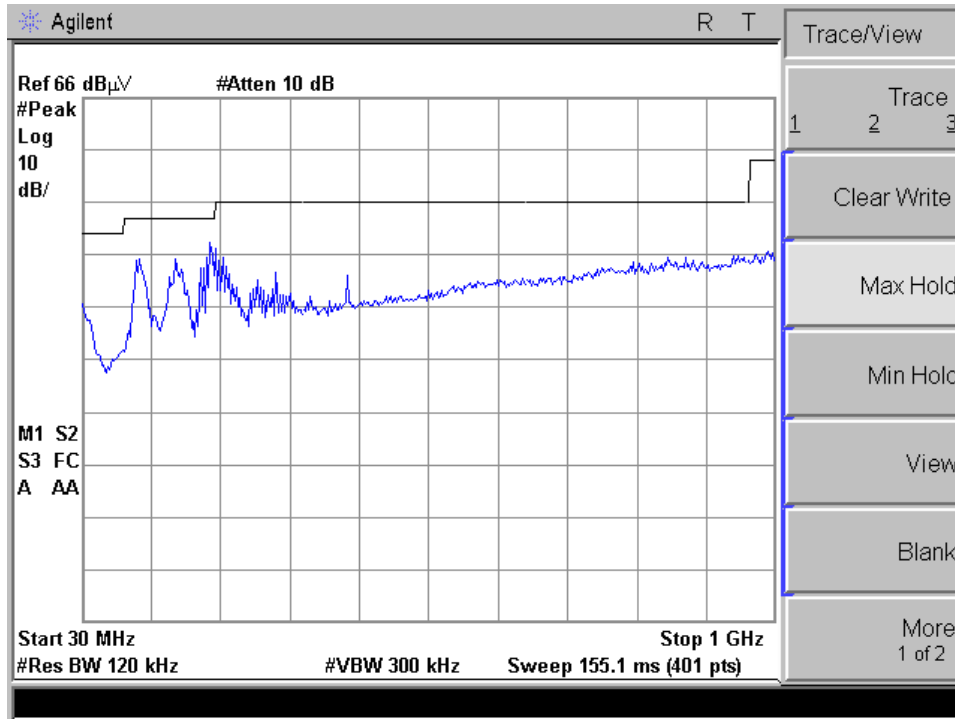



**Annex A**


**Undesirable Emissions Conducted**

**30-40000MHz**


**Port F37**



### 10 MHz high ch 1-26.5 GHz

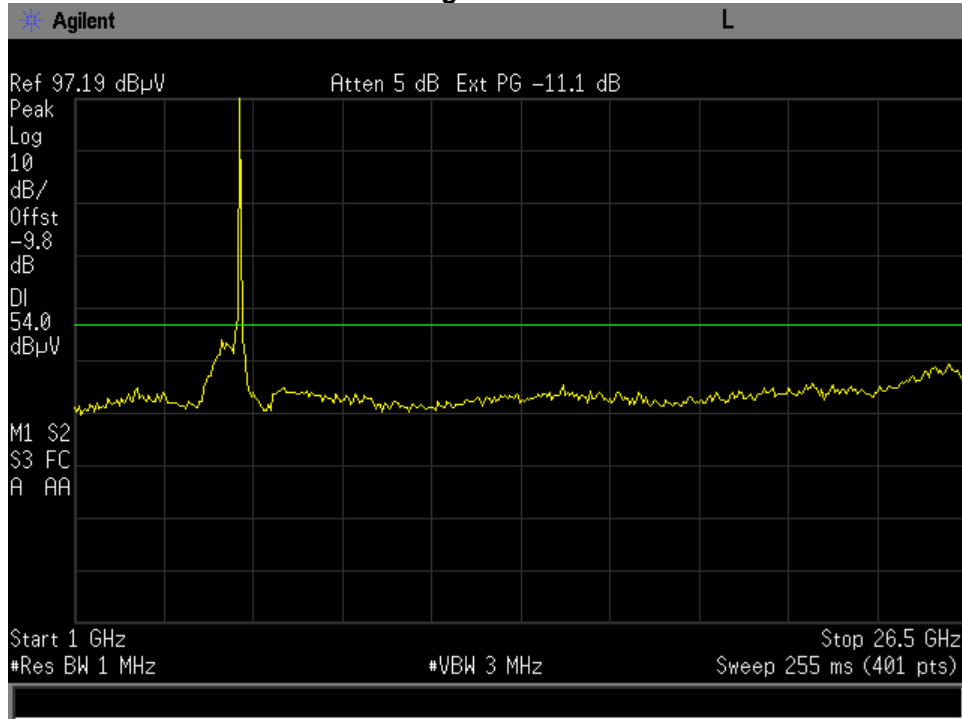


### 10 MHz high ch 26.5-40 GHz

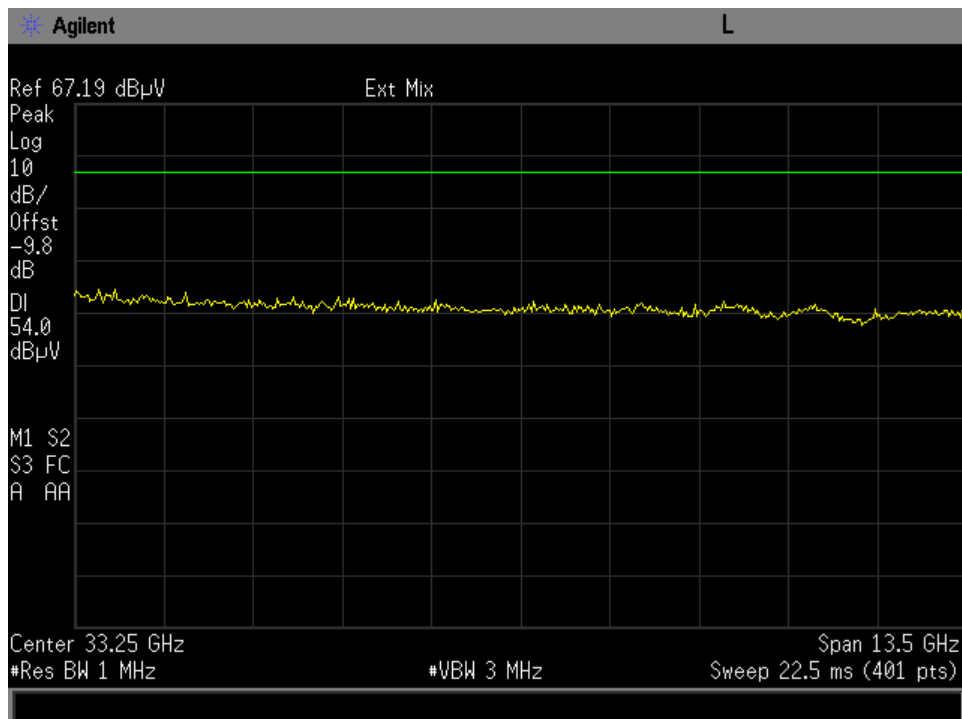




### 10 MHz high ch 30-1000 MHz

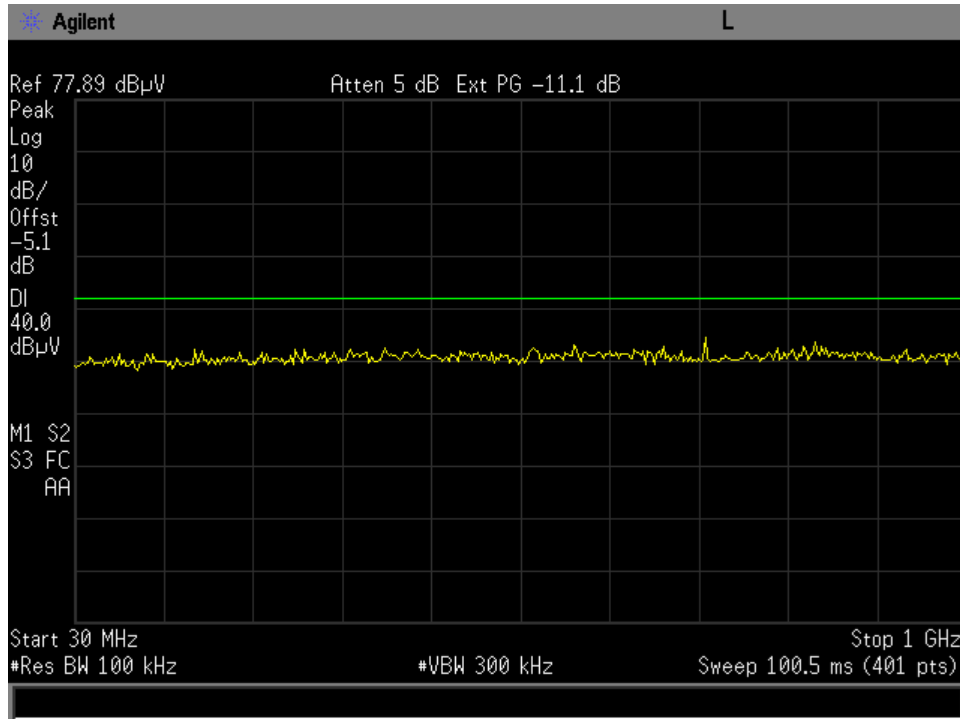


### 10 MHz low ch 1-26.5 GHz

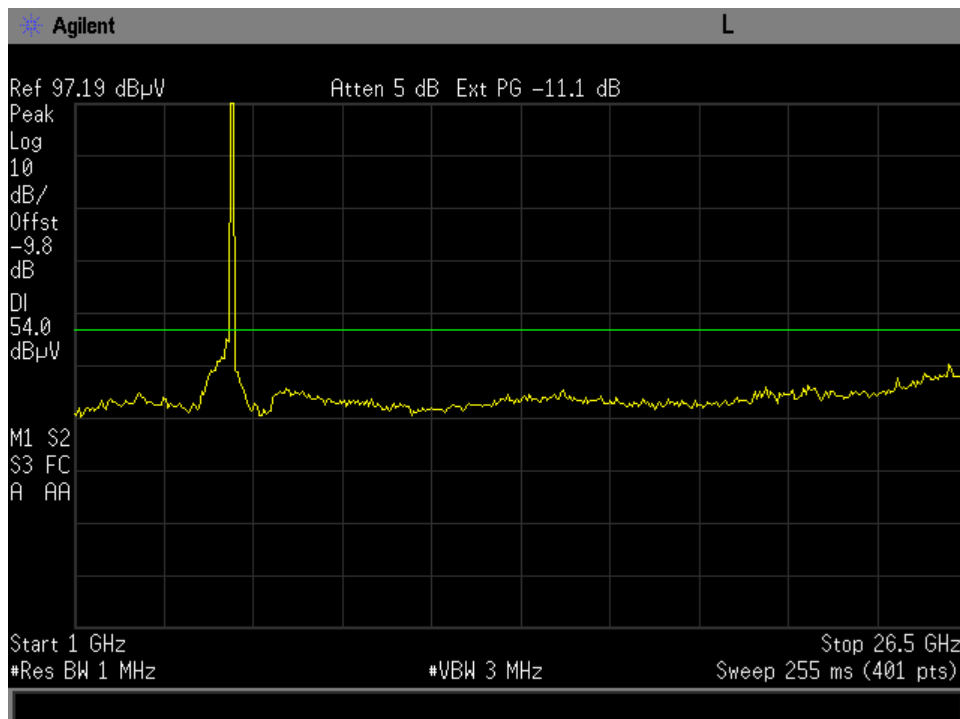




### 10 MHz low ch 26.5-40 GHz

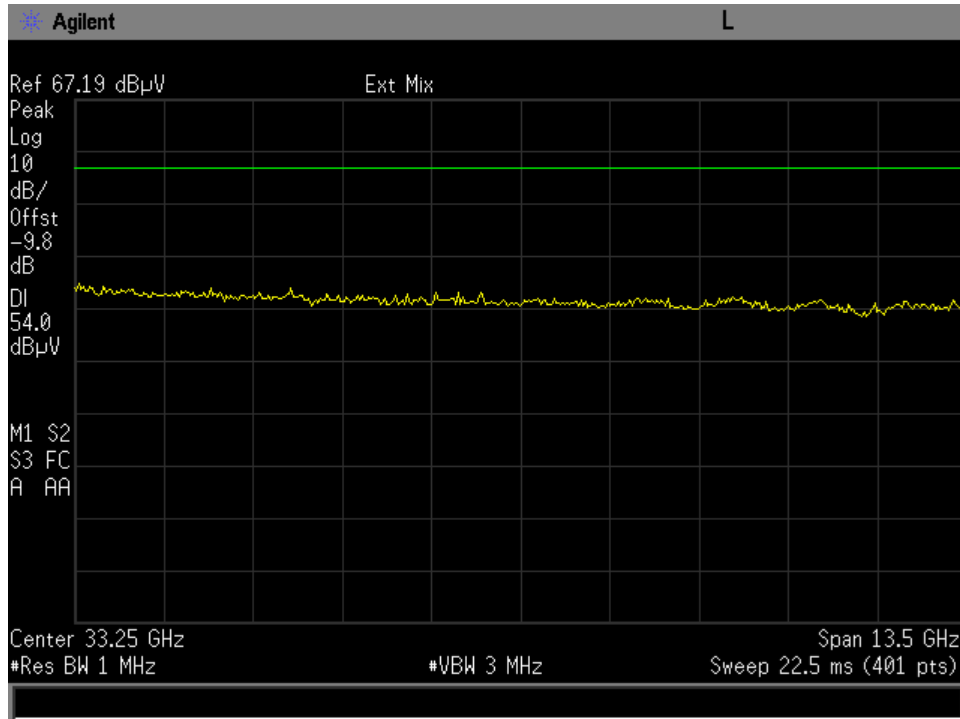


### 10 MHz low ch 30-1000 MHz

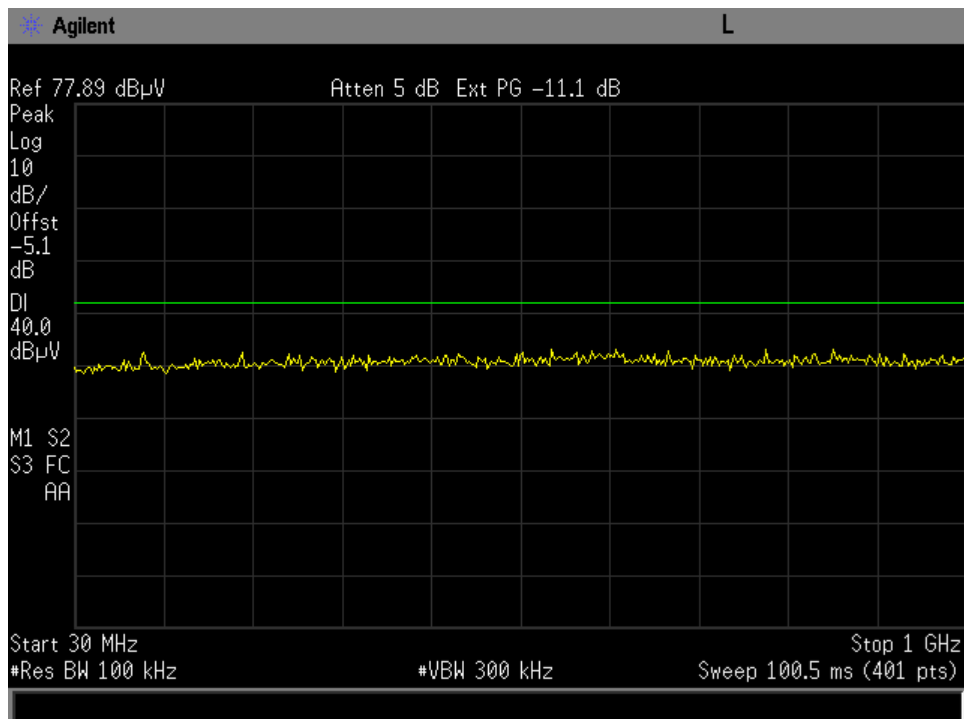




### 10 MHz mid ch 1-26.5 GHz

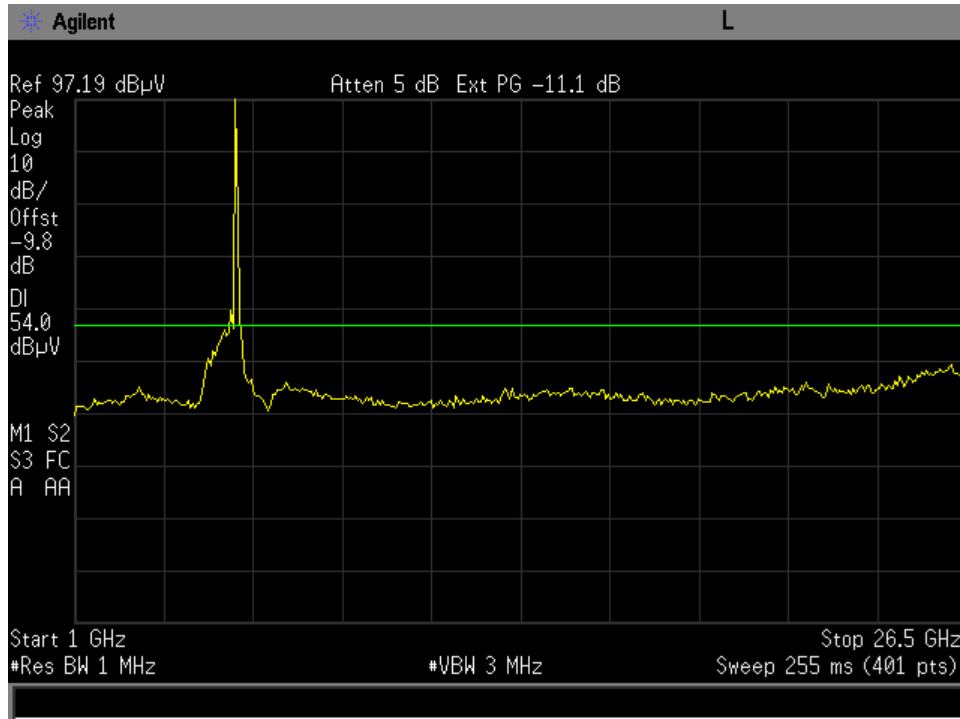


### 10 MHz mid ch 26.5-40 GHz

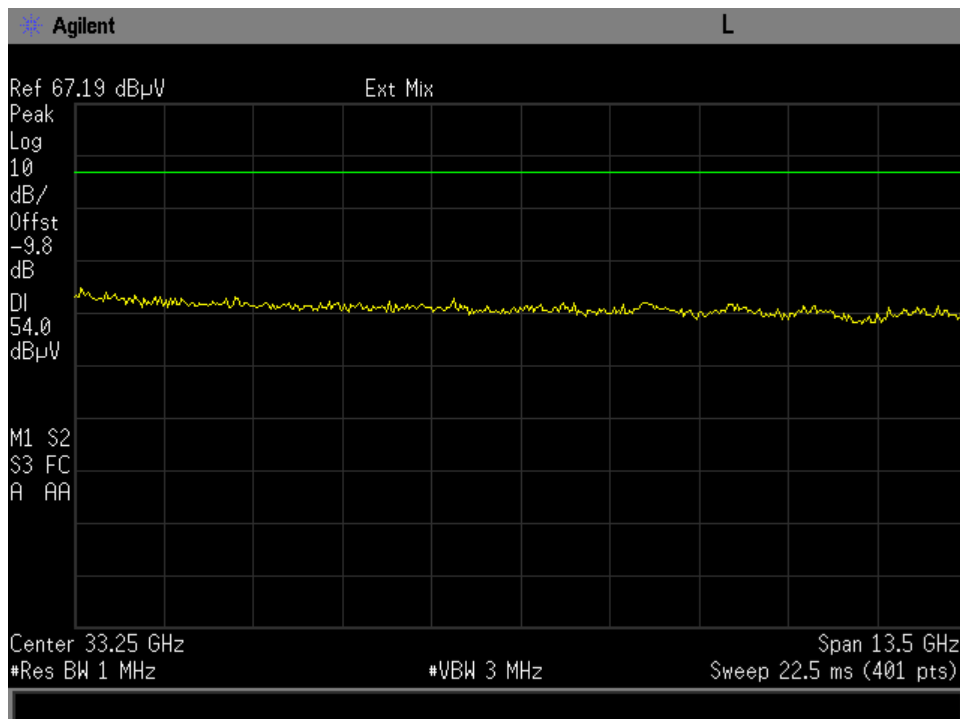




### 10 MHz mid ch 30-1000 MHz

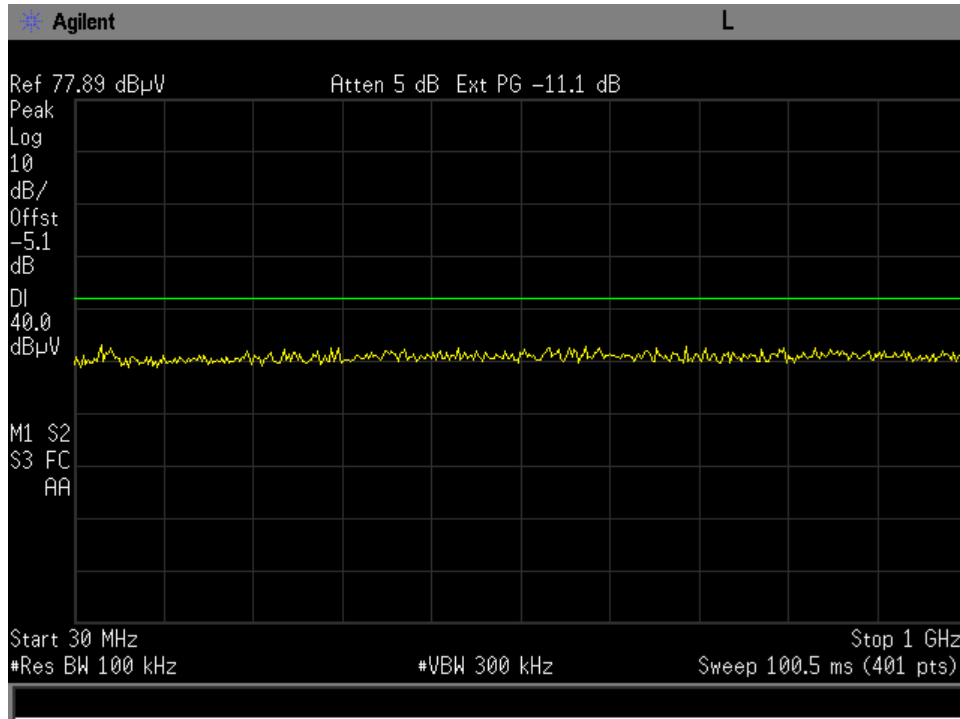


### 20 MHz high ch 1-26.5 GHz

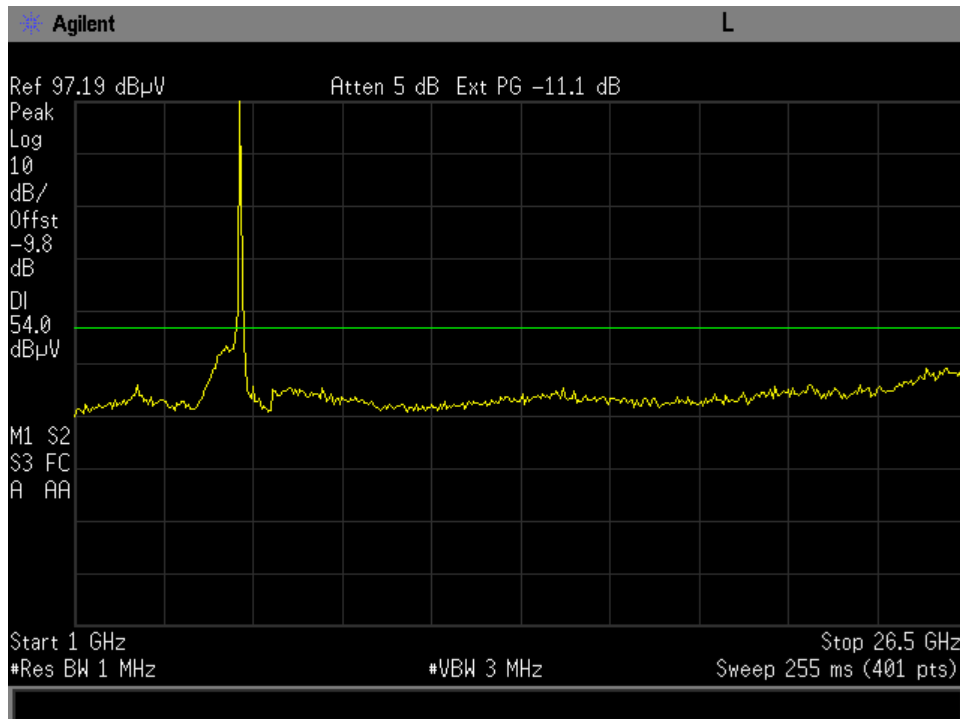




### 20 MHz high ch 26.5-40 GHz

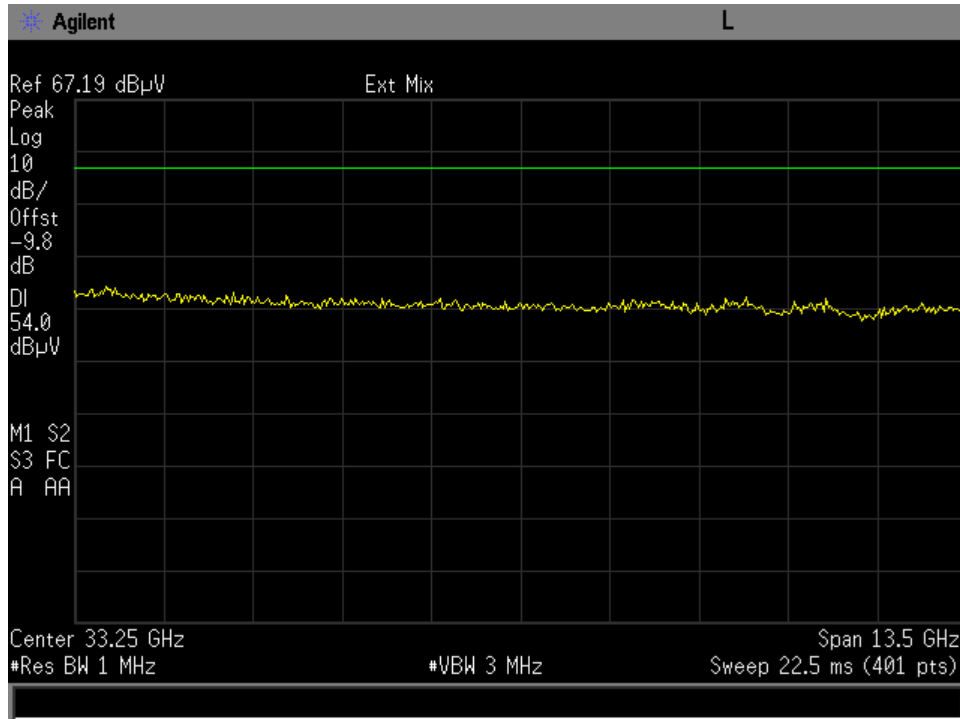


### 20 MHz high ch 30-1000 MHz

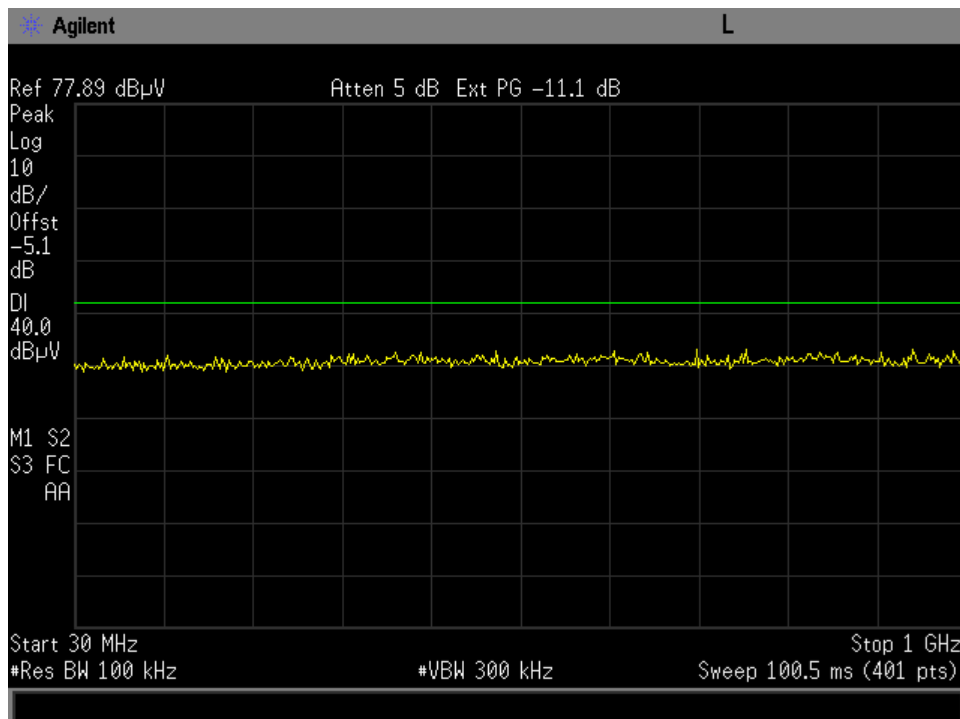




### 20 MHz low ch 1-26.5 GHz

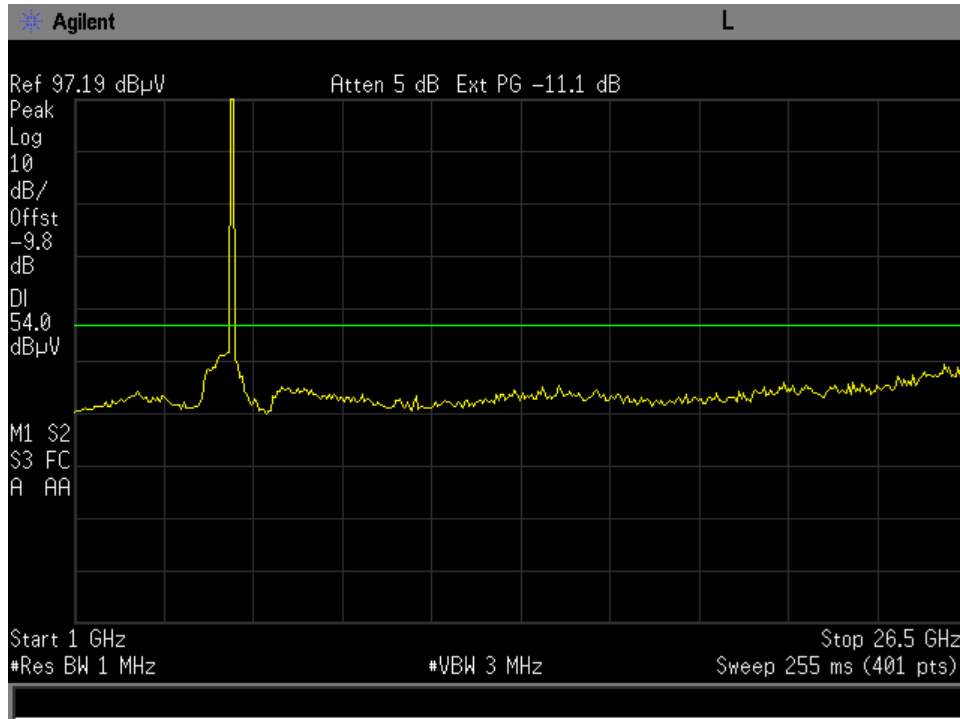


### 20 MHz low ch 26.5-40 GHz

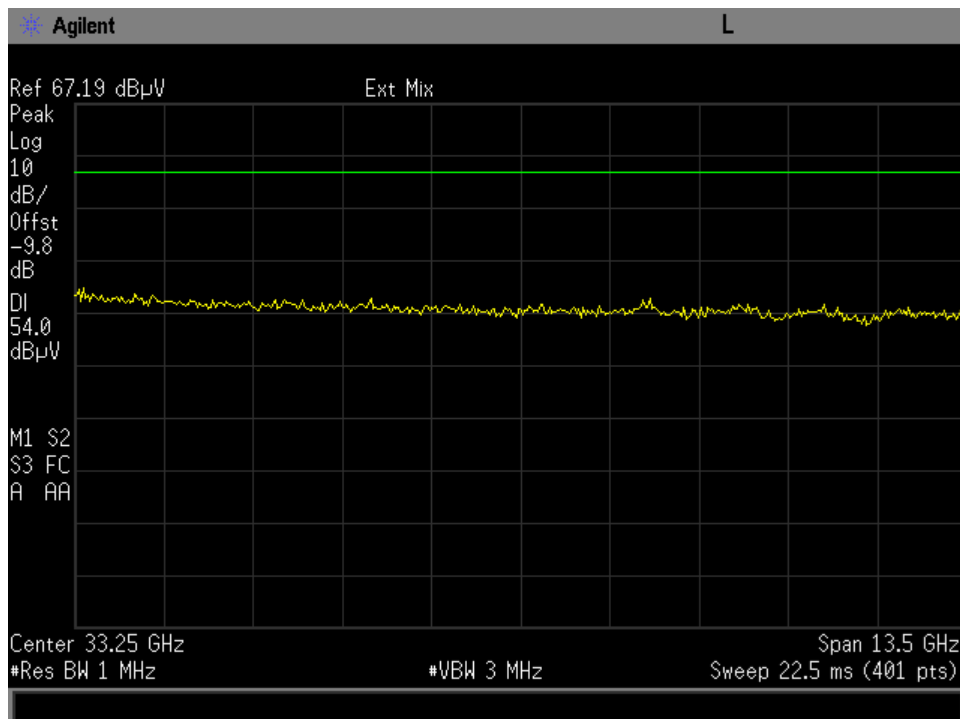






### 20 MHz low ch 30-1000 MHz

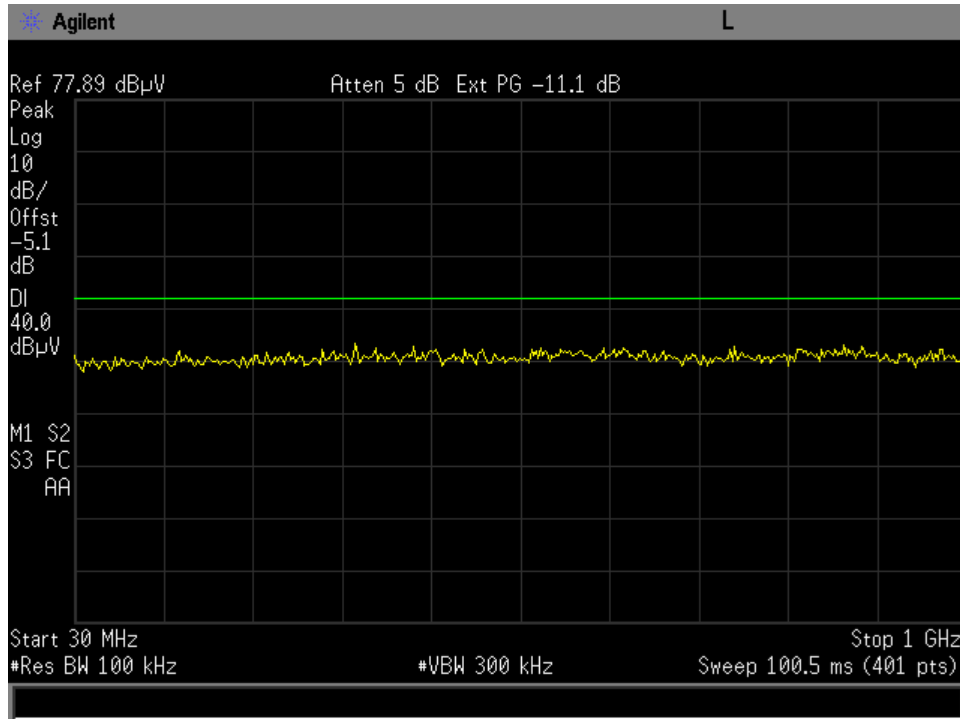


### 20 MHz mid ch 1-26.5 GHz

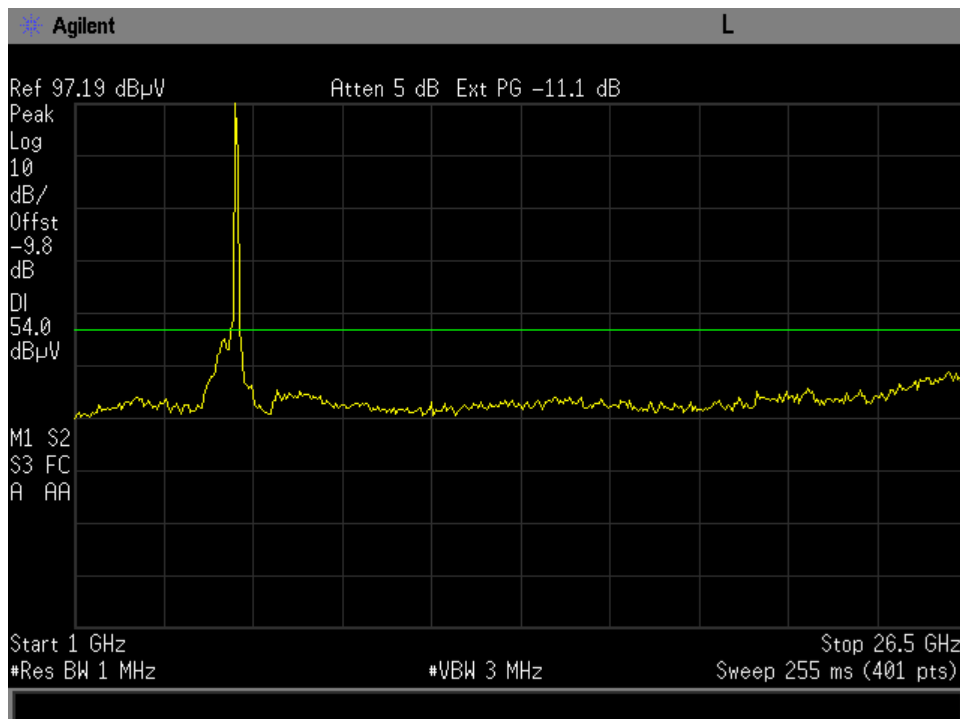




### 20 MHz mid ch 26.5-40 GHz

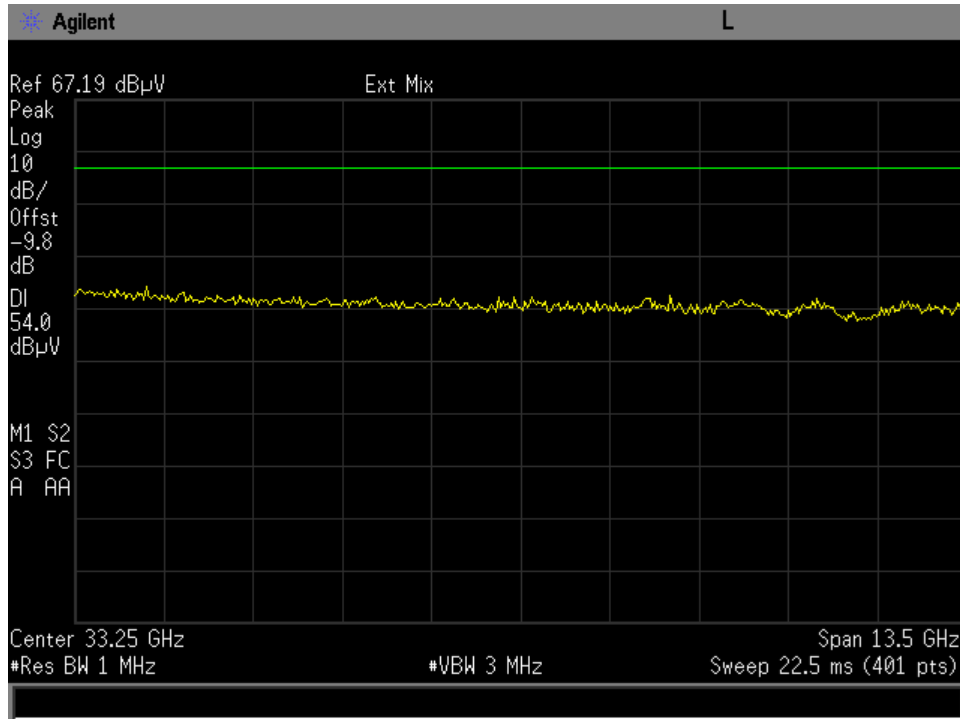


### 20 MHz mid ch 30-1000 MHz

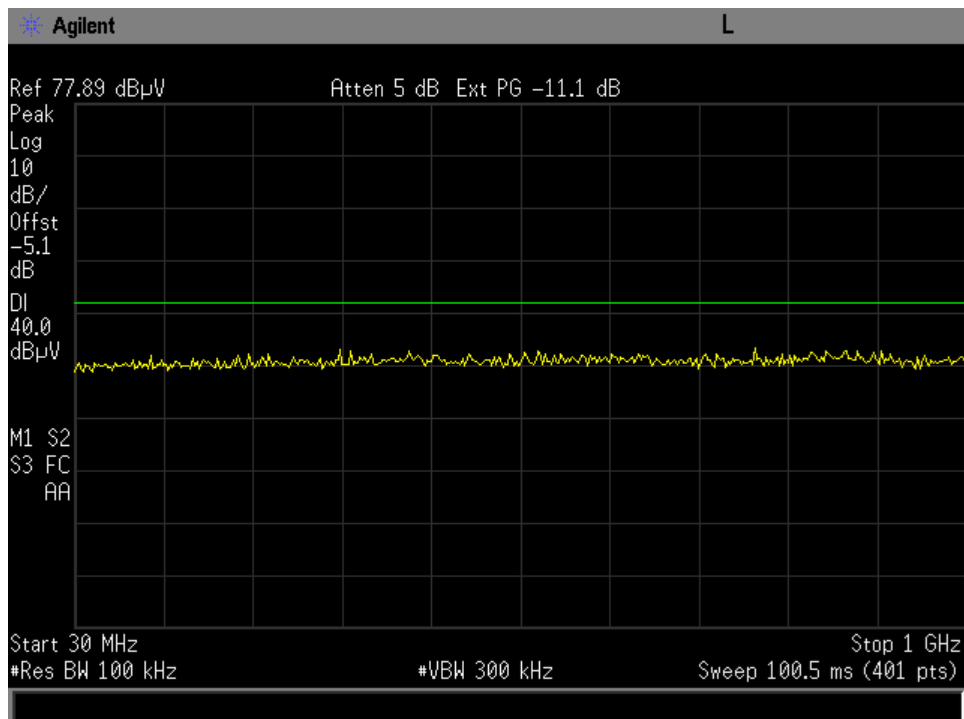




### 30 MHz high ch 1-26.5 GHz

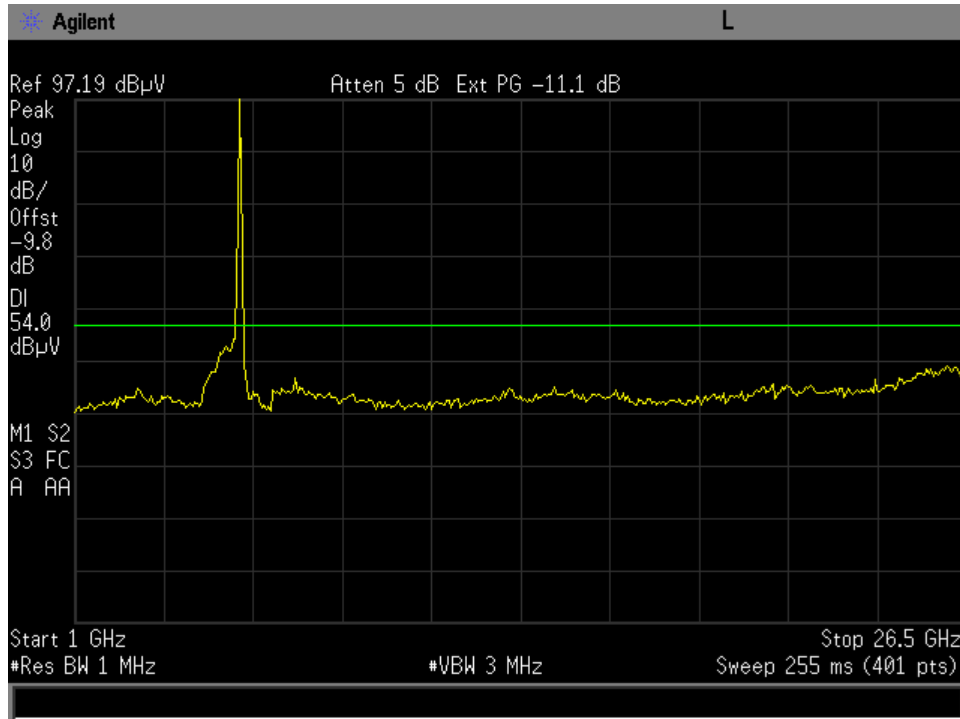


### 30 MHz high ch 26.5-40 GHz

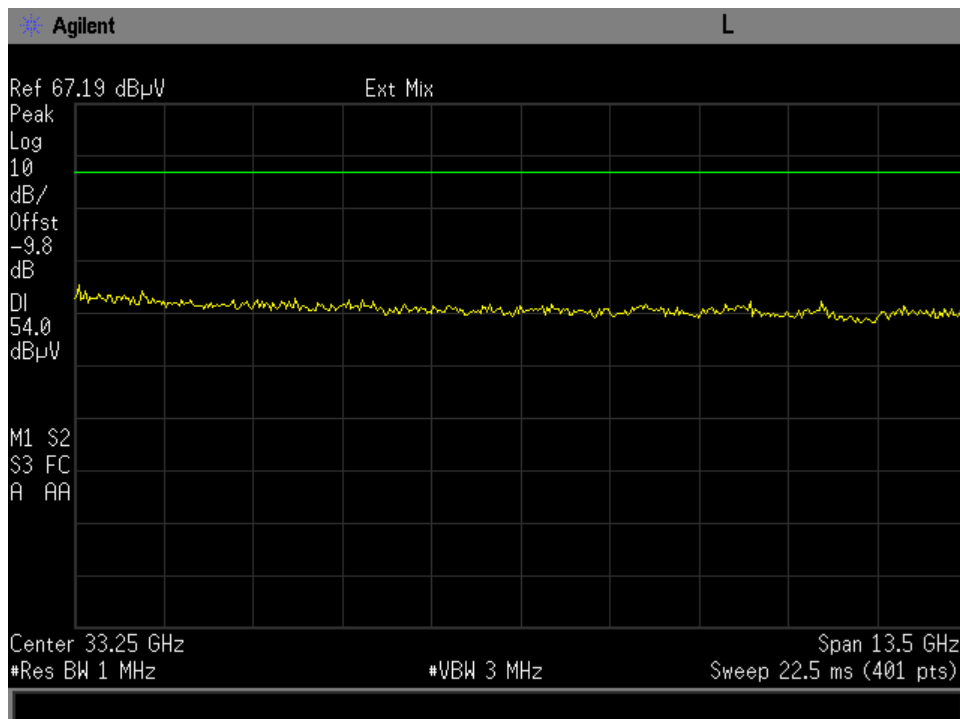




### 30 MHz high ch 30-1000 MHz

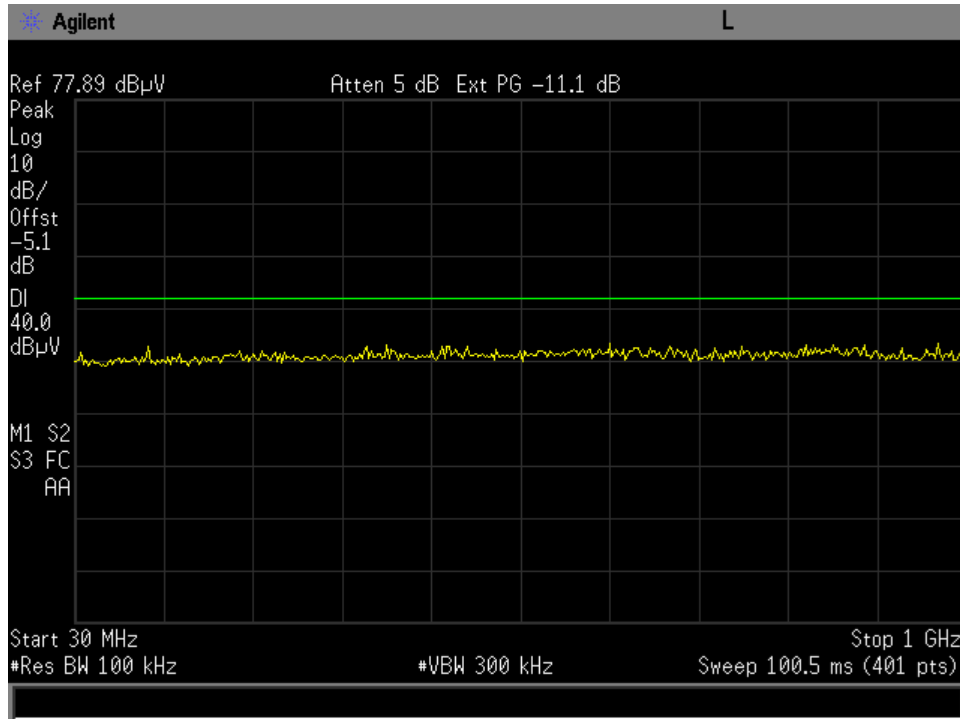


### 30 MHz low ch 1-26.5 GHz

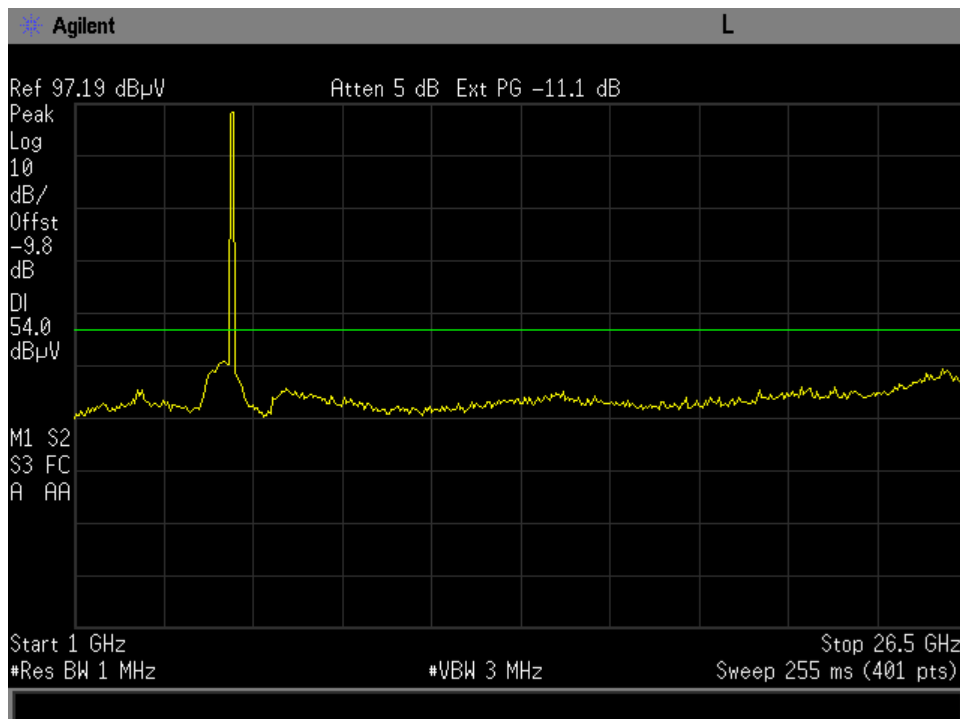




### 30 MHz low ch 26.5-40 GHz

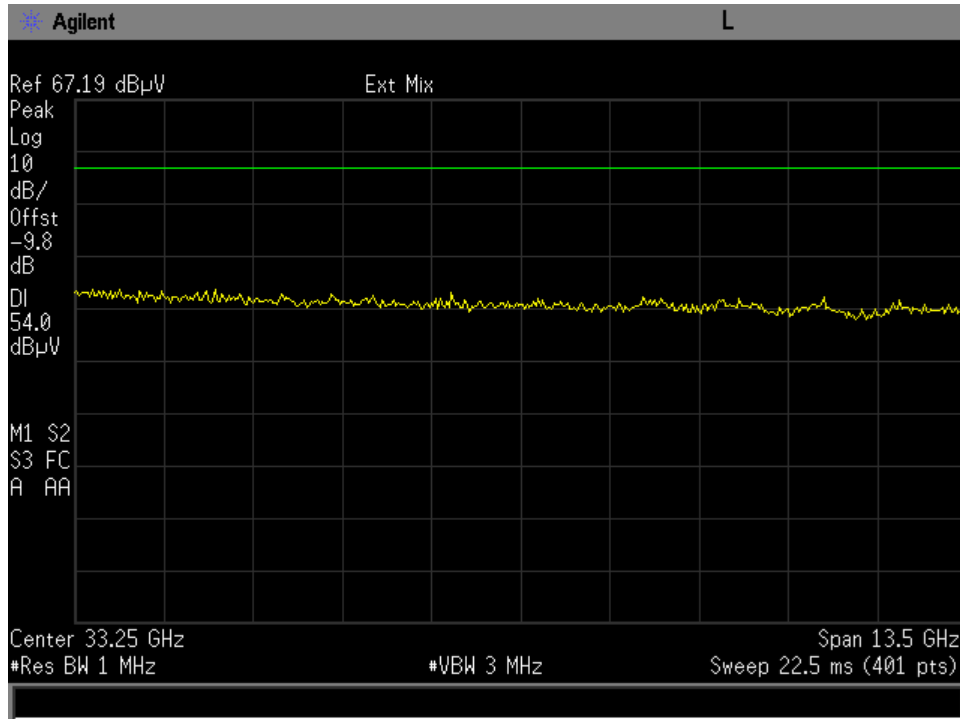


### 30 MHz low ch 30-1000 MHz

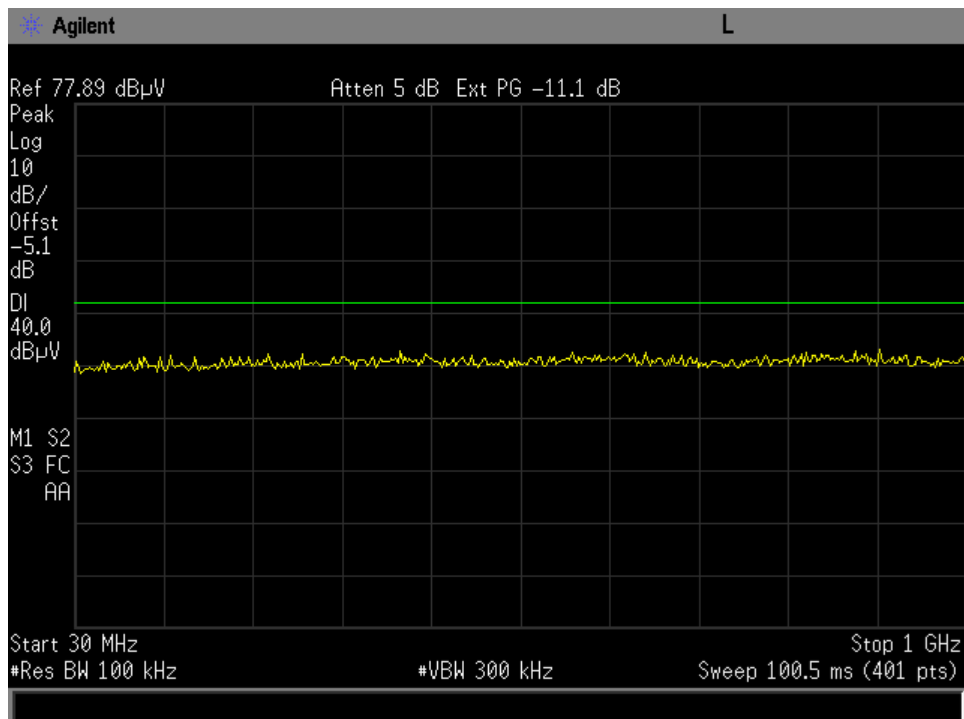




### 30 MHz mid ch 1-26.5 GHz

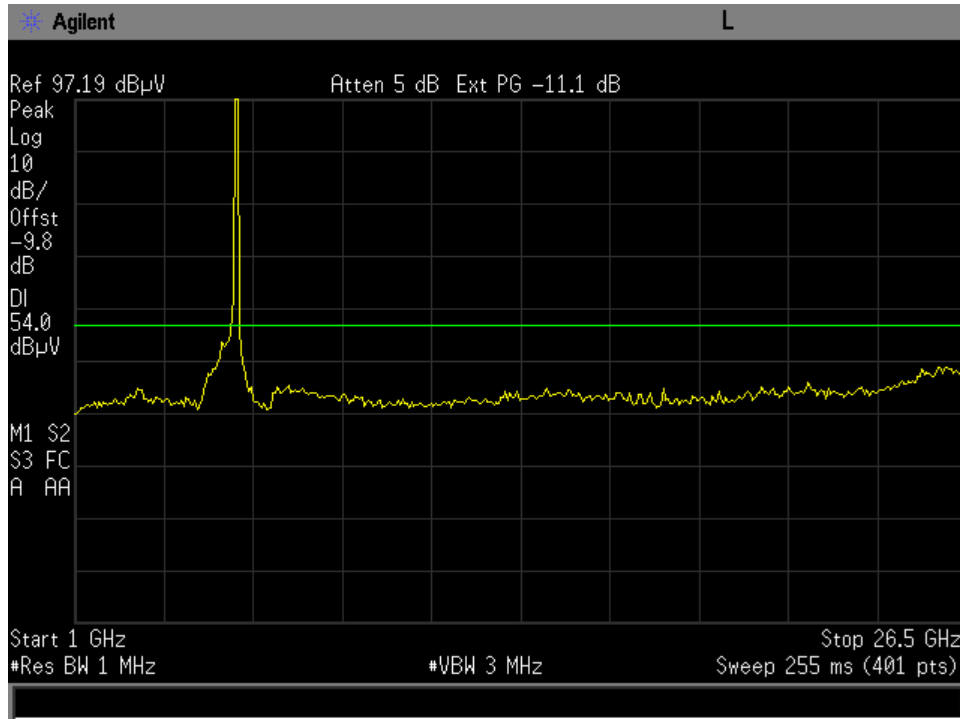


### 30 MHz mid ch 26.5-40 GHz

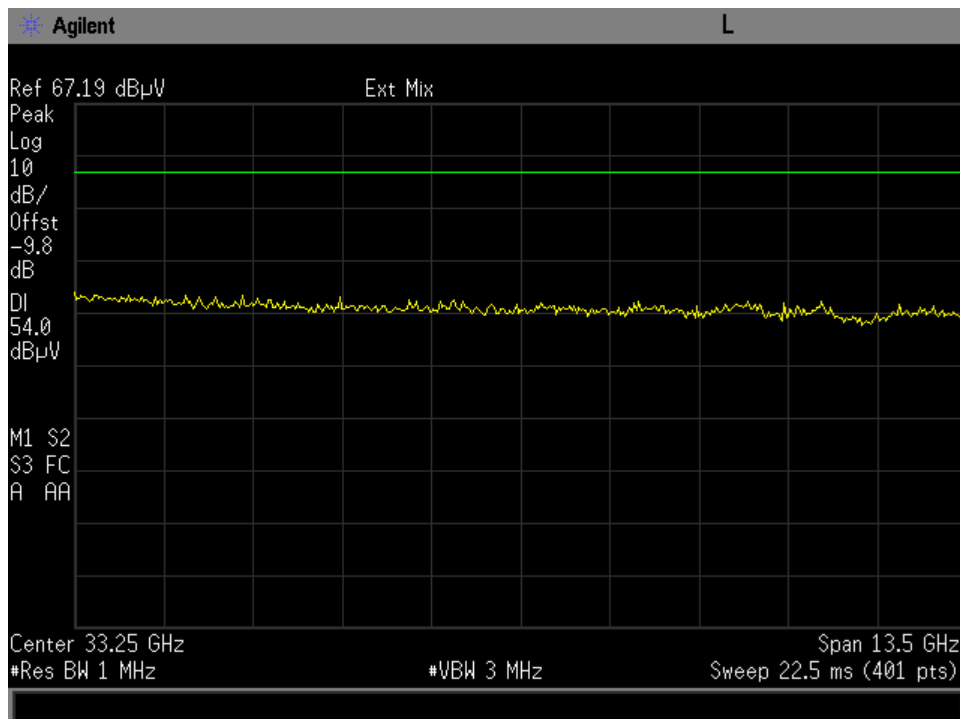




### 30 MHz mid ch 30-1000 MHz

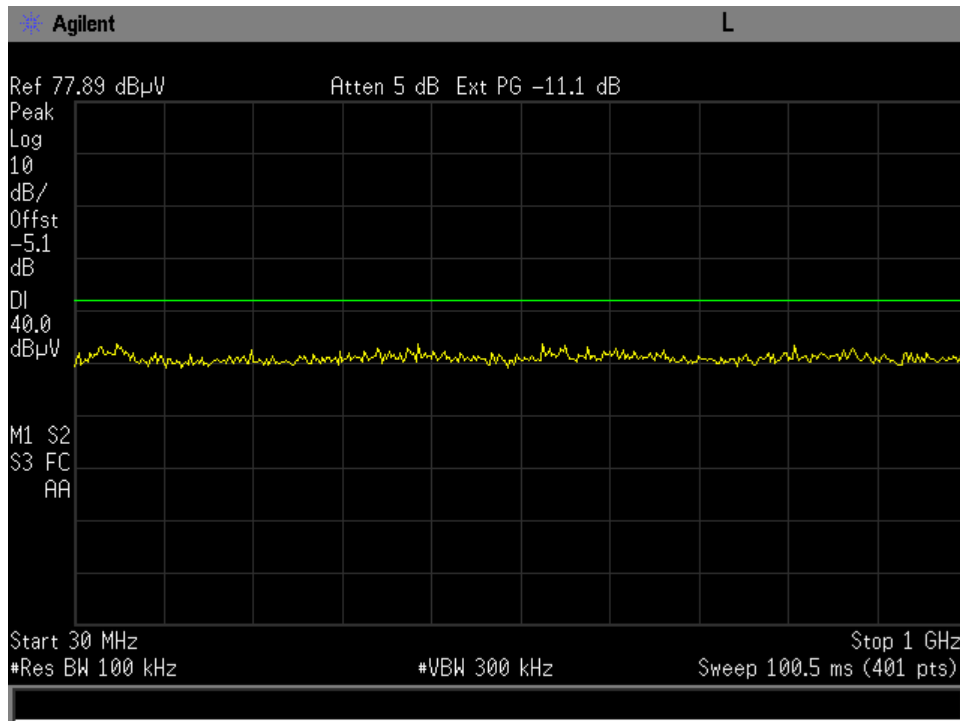


### 40 MHz high ch 1-26.5 GHz

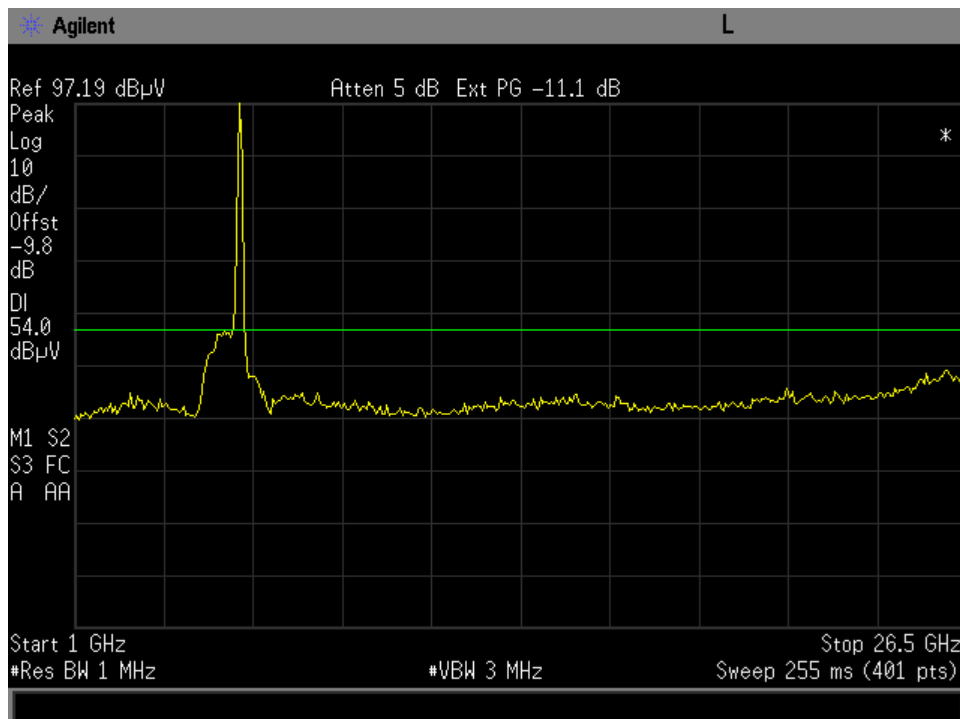




### 40 MHz high ch 26.5-40 GHz

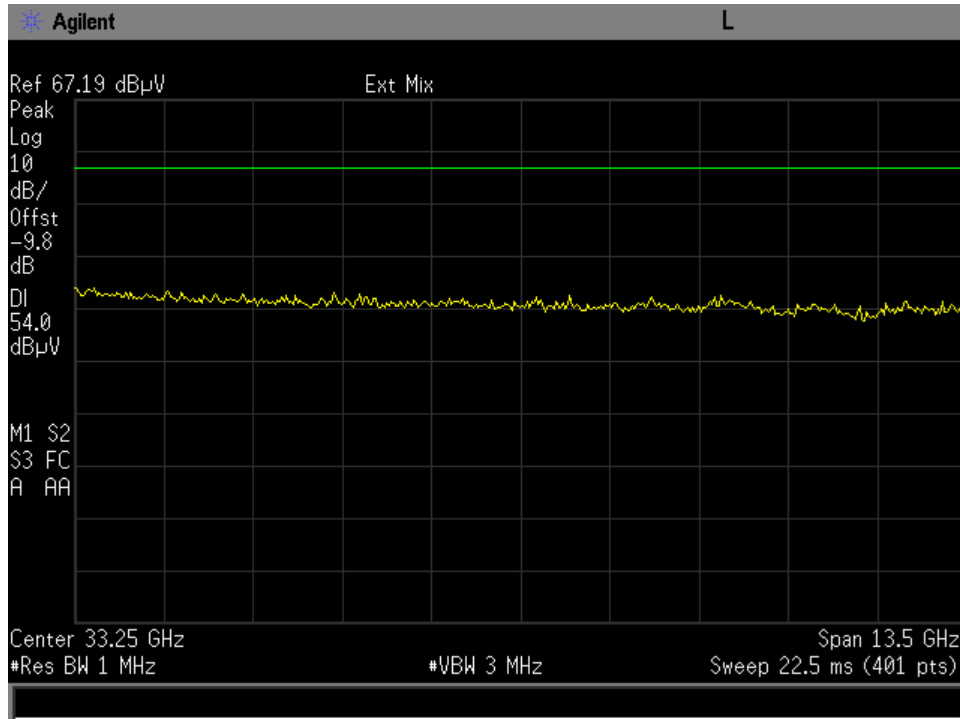


### 40 MHz high ch 30-1000 MHz

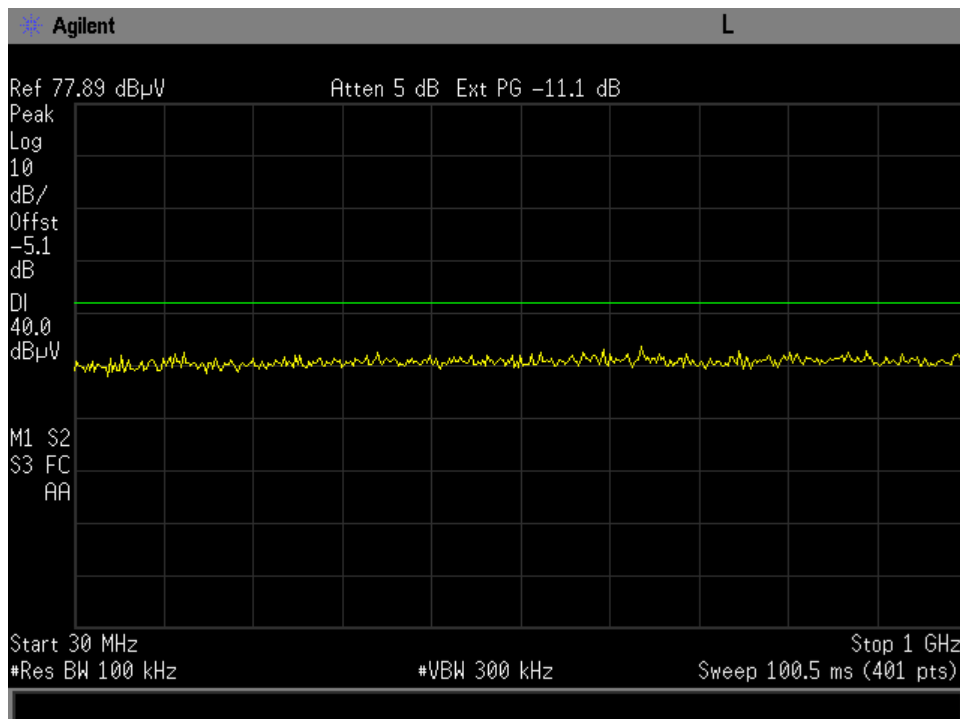






### 40 MHz low ch 1-26.5 GHz

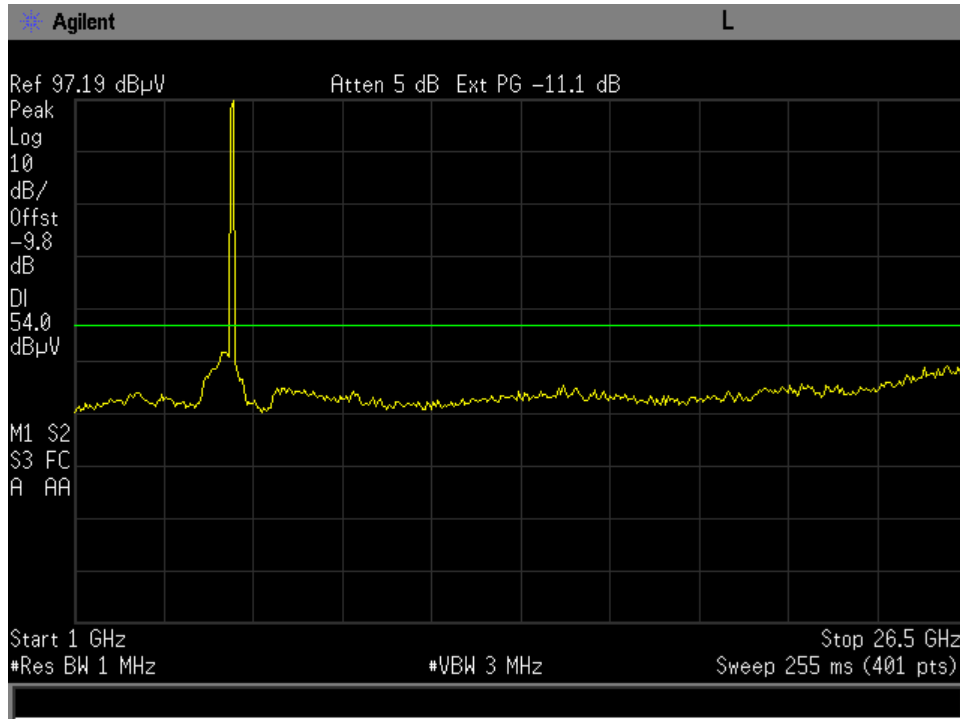


### 40 MHz low ch 26.5-40 GHz

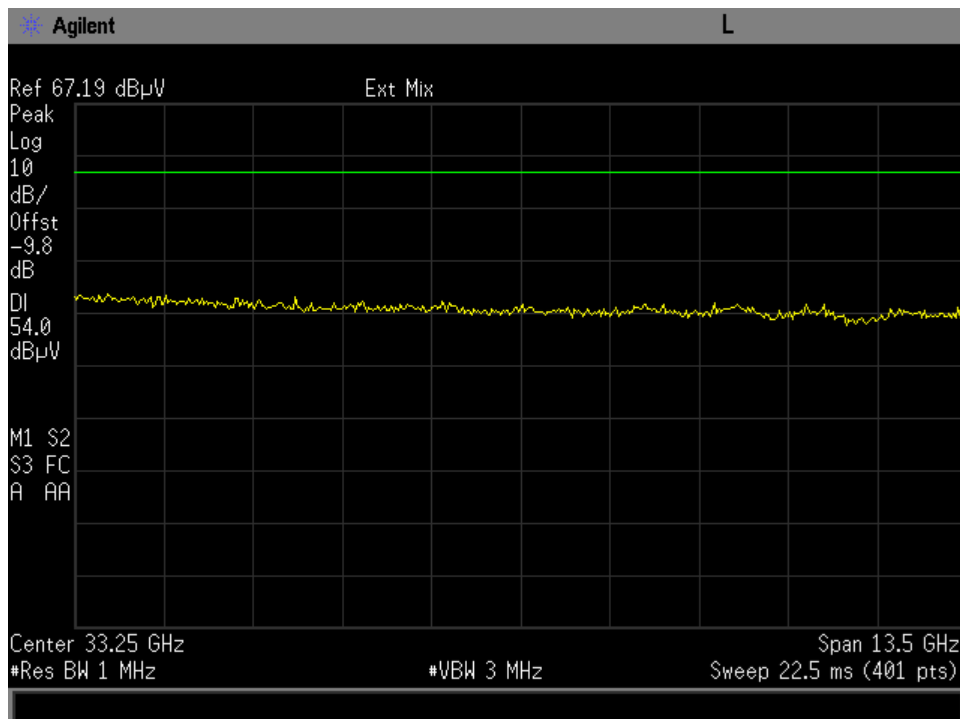




### 40 MHz low ch 30-1000 MHz

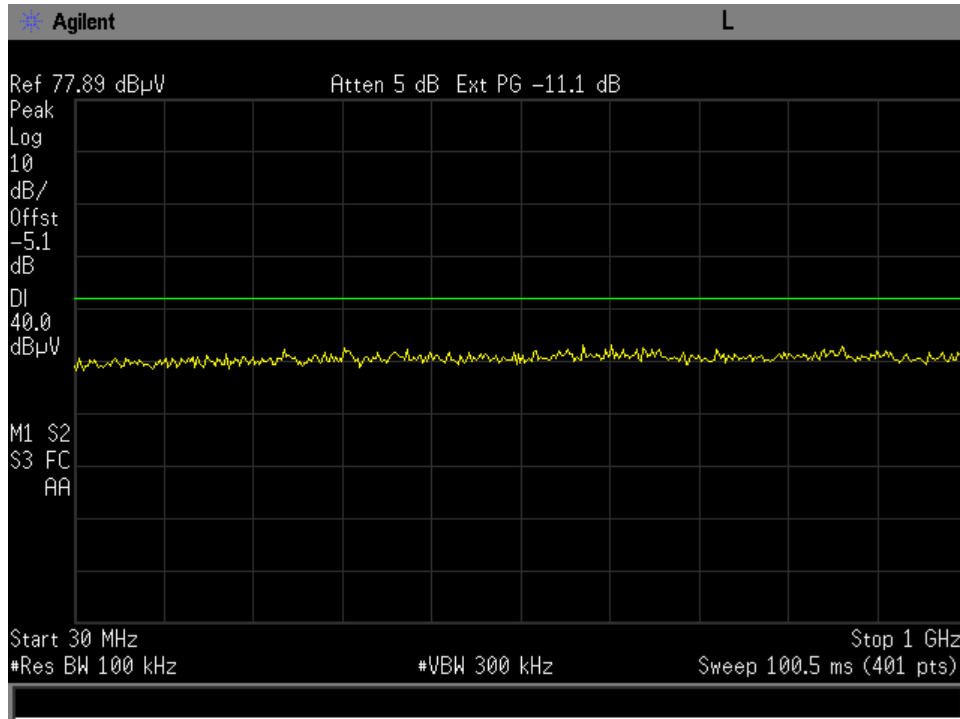


### 40 MHz mid ch 1-26.5 GHz

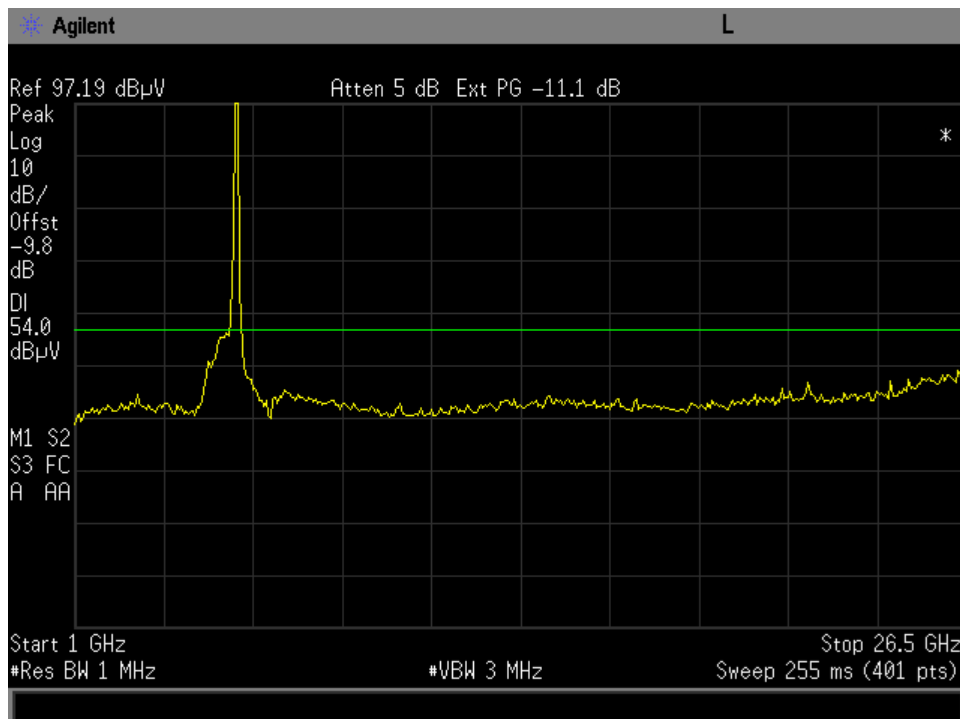



### 40 MHz mid ch 26.5-40 GHz

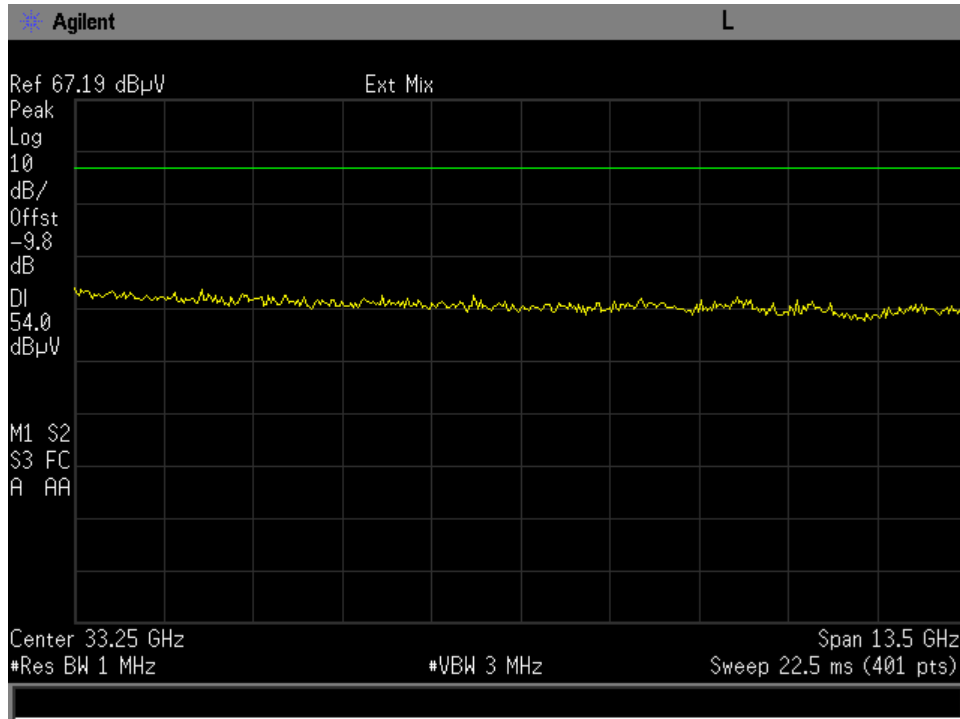

### 40 MHz mid ch 30-1000 MHz

