



# Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

Prepared for: Ubiquiti Networks, Inc

Models: PBE-5AC-Gen2

PBE-5AC-Omni-Gen2

Description: PowerBeam 5AC (G2)

PowerBeam 5AC Omni (G2)

Serial Number: NA

FCC ID: SWX-PBE5ACG2

IC: 6545A-PBE5ACG2

To

FCC Part 15.407

IC RSS-124

Date of Issue: April 11, 2017

On the behalf of the applicant:

Ubiquiti Networks, Inc  
2580 Orchard Parkway  
San Jose, CA 95131

Attention of:

Michael Taylor, Compliance Manager  
Ph: (408) 942-3085  
E-mail: [compliance@ubnt.com](mailto:compliance@ubnt.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1710010

Alex Macon  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.  
All results contained herein relate only to the sample tested.



**Test Report Revision History**

Revision	Date	Revised By	Reason for Revision
1.0	August 14, 2015	Alex Macon	Original Document



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions Engineering Practices	6
Test Results Summary	9
Peak Output Power	10
Transmitter Power Spectral Density (PSD)	13
Undesirable Emissions	16
Undesirable Emissions Radiated	17
Occupied Bandwidth	19
Frequency Stability	20
RF Exposure	21
A/C Powerline Conducted Emission	23
Test Equipment Utilized	24



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The applicant has been cautioned as to the following**

15.21 - Information to User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) - Special Accessories

Equipment marked to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



**Standard Test Conditions Engineering Practices**

Except as noted herein, the following conditions and procedures were observed during the testing:

In accordance with C63.10-2013 and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specified testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Measurement results, unless otherwise noted, are worst-case measurements.

Environmental Conditions		
Temperature (°C)	Humidity (%)	Pressure (mbar)
23.0 – 26.5	22.7 – 36.5	962.9 – 972.7

**EUT Operation during Tests**

The EUT was configured to run in a continuous data stream using ART software through a POE adaptor and Ethernet connection.

**EUT Description**

- Model:** PBE-5AC-Gen2, PBE-5AC-Omni-Gen2
- Description:** PowerBeam 5AC (G2), PowerBeam 5AC Omni (G2)
- Firmware:** AirOS 8.0.1
- Software:** AirOS 8.0.1
- Serial Number:** N/A

**Additional Information:**

The EUT was tested conducted mode with RF connectors mounted on the EUT at the antenna input. When the test cable is plugged into the RF connector mounted to the EUT it disables the antenna connection. The EUT is powered by POE (Power Over Ethernet). The different data rates were evaluated and the worst case data rate was chosen for all the testing.

**Reference Test Data:**

This report contains test data from a device which has already been certified pursuant to Part 15.407  
FCC ID: SWX- LBE5AC  
The certification being sought for PBE-5AC-G2 and PBE-5AC-G2-Omni contains the same RF circuitry as the mentioned FCC ID. The Gen2 device incorporates the 2.4GHz emission which was turned off via software in the previous certification. Testing was performed to FCC Part 15.247 to address the different emissions. This report is included under the 15.247 certification, FCC ID SWX-PBE5ACG2



**EUT Specifications**

<b>EUT Specifications</b>	15.407
<b>Equipment Code</b>	NII
<b>Model(s) Tested</b>	PBE-5AC-Gen2
<b>Model(s) Covered</b>	PBE-5AC-Omni-Gen2
<b>Maximum Conducted Output Power</b>	24.4 dBm
<b>Frequency Ranges covered</b>	5725-5850MHz
<b>EUT temperature range</b>	-40°C to 80°C
<b>Bandwidths</b>	10/20/30/40/50/60/80 MHz
<b>Data Rates</b>	6, 9, 12, 18, 24, 36, 48, 54, MCS0, MCS1, MCS2, MCS3, MCS4, MCS5, MCS6, MCS7, MCS8, MCS9
<b>Modulations</b>	BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

**Antenna List**

<b>Model No.</b>	<b>Manufacturer</b>	<b>Antenna Type</b>	<b>Peak Gain</b>
PBE-AC Omni	Ubiquiti	OMNI	6
PBE-AC-Dish	Ubiquiti	Dish	25

**15.203: Antenna Requirement:**

- The antenna is permanently attached to the EUT
- The antenna uses a unique coupling
- The EUT must be professionally installed
- The antenna requirement does not apply



**Accessories:**

Qty	Description	Manufacturer	Model	S/N
1	Switching Gigabit Power Supply/POE	Ubiquiti	GP-A240-050G	N/A

**Cables:** None

**Modifications:** None





## Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
§15.203	Antenna Requirements	Pass	
§15.207 §15.407(b)(6)	Line Conducted Emissions	Pass	
§15.407(a)(3)	Conducted Output Power	Pass	
§15.407(a)(3),(5)	Power Spectral Density	Pass	
§15.403(i) §15.407(e)	6dB Occupied Bandwidth 99% Occupied Bandwidth	Pass	
§15.407(b)(4)	Undesirable Emissions	Pass	
§15.205 §15.407(b)(4),(5),(6)	General Field Strength Limits (Restricted Bands and Radiated Emission limits)	Pass	
§15.407(g)	Frequency Stability	Pass	
§15.407(f)	RF Exposure	Pass	

References	Description
CFR47, Part 15, Subpart B	Unintentional Radiators
CFR47, Part 15, Subpart C	Intentional Radiators
CFR47, Part 15, Subpart E	Unlicensed Nation Information Infrastructure Devices (U-NII)
ANSI C63.10-2009	American National standard for testing Unlicensed Wireless Devices
ANSI C63.4-2009	Method and Measurements of Radio-Noise Emissions from low-Voltage Electrical and Electronic Equipment in the range 9kHz to 40GHz.
ISO/IEC 17025:2005	General requirements for the Competence of Testing and Calibrations Laboratories
KDB 644545 D03	Guidance for IEEE 802 11ac New Rules
KDB 789033 D02	General U-NII Test Procedures New Rules V01
KDB 926956 D01	U-NII Transition Plan



**Peak Output Power**

**Engineer:** Alex Macon

**Test Date:** 6/29/15

**Test Requirements**

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.


**Test Procedure**

The RF power was calculated using the spectrum analyzers' band power function per Method SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid and high channels of the band.

**The Spectrum analyzer was set to the following:**

- a. RBW = 1 MHz
- b. VBW  $\geq$  3 MHz
- c. Sweep time = auto
- d. Detector = RMS
- e. 100 traces in power averaging mode

**Test Setup**





**Test Results**

**Data for a 6dBi PTMP Antenna**

Bandwidth	Frequency	Data Rate	TP	J7 Level	J13 Level	J7 Level	J13 Level	Total Summed Power	Limit	Margin
MHz	MHz			dBm	dBm	mW	mW	dBm	dBm	dB
10	5735	vt0	19	20.0	20.2	100.0	104.7	23.1	30	-6.9
10	5800	vt0	20	21.2	21.5	131.8	141.3	24.4	30	-5.6
10	5840	vt0	18	19.0	18.9	79.4	77.6	22.0	30	-8.0
20	5740	vt0	18	19.0	17.5	79.4	56.2	21.3	30	-8.7
20	5800	vt0	20	21.0	21.7	125.9	147.9	24.4	30	-5.6
20	5835	vt0	17	17.7	17.9	58.9	61.7	20.8	30	-9.2
30	5745	vt0	17	17.9	16.7	61.7	46.8	20.4	30	-9.6
30	5800	vt0	20	21.0	21.6	125.9	144.5	24.3	30	-5.7
30	5830	vt0	16	17.1	16.9	51.3	49.0	20.0	30	-10.0
40	5750	vf0	17	16.9	17.7	49.0	58.9	20.3	30	-9.7
40	5800	vf0	20	20.8	21.0	120.2	125.9	23.9	30	-6.1
40	5825	vf0	17	17.5	17.6	56.2	57.5	20.6	30	-9.4
50	5755	vf0	17	16.5	17.8	44.7	60.3	20.2	30	-9.8
50	5800	vf0	19	20.0	20.5	100.0	112.2	23.3	30	-6.7
50	5820	vf0	16	16.8	15.5	47.9	35.5	19.2	30	-10.8
60	5760	vf0	15	14.9	15.2	30.9	33.1	18.1	30	-11.9
60	5800	vf0	17	18.2	18.9	66.1	77.6	21.6	30	-8.4
60	5815	vf0	15	15.8	14.7	38.0	29.5	18.3	30	-11.7
80	5770	ve00	14	12.6	14.2	18.2	26.3	16.5	30	-13.5
80	5800	ve00	16	16.7	17.7	46.8	58.9	20.2	30	-9.8
80	5810	ve00	12	10.7	12.1	11.7	16.2	14.5	30	-15.5



Data for 25 dBi PTP Antenna

Bandwidth	Frequency	Data Rate	TP	J7 Level	J13 Level	J7 Level	J13 Level	Total Summed Power	Limit	Margin
MHz	MHz			dBm	dBm	mW	mW	dBm	dBm	dB
10	5735	vt0	19	20.0	20.2	100.0	104.7	23.1	30	-6.9
10	5800	vt0	20	21.2	21.5	131.8	141.3	24.4	30	-5.6
10	5840	vt0	18	19.0	18.9	79.4	77.6	22.0	30	-8.0
20	5740	vt0	18	19.0	17.5	79.4	56.2	21.3	30	-8.7
20	5800	vt0	20	21.0	21.7	125.9	147.9	24.4	30	-5.6
20	5835	vt0	17	17.7	17.9	58.9	61.7	20.8	30	-9.2
30	5745	vt0	17	17.9	16.7	61.7	46.8	20.4	30	-9.6
30	5800	vt0	20	21.0	21.6	125.9	144.5	24.3	30	-5.7
30	5830	vt0	16	17.1	16.9	51.3	49.0	20.0	30	-10.0
40	5750	vf0	17	16.9	17.7	49.0	58.9	20.3	30	-9.7
40	5800	vf0	20	20.8	21.0	120.2	125.9	23.9	30	-6.1
40	5825	vf0	17	17.5	17.6	56.2	57.5	20.6	30	-9.4
50	5755	vf0	17	16.5	17.8	44.7	60.3	20.2	30	-9.8
50	5800	vf0	19	20.0	20.5	100.0	112.2	23.3	30	-6.7
50	5820	vf0	16	16.8	15.5	47.9	35.5	19.2	30	-10.8
60	5760	vf0	15	14.9	15.2	30.9	33.1	18.1	30	-11.9
60	5800	vf0	17	18.2	18.9	66.1	77.6	21.6	30	-8.4
60	5815	vf0	15	15.8	14.7	38.0	29.5	18.3	30	-11.7
80	5770	ve00	14	12.6	14.2	18.2	26.3	16.5	30	-13.5
80	5800	ve00	16	16.7	17.7	46.8	58.9	20.2	30	-9.8
80	5810	ve00	12	10.7	12.1	11.7	16.2	14.5	30	-15.5



## Transmitter Power Spectral Density

**Engineer:** Alex Macon

**Test Date:** 6/29/15

### Test Requirements

For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in power spectral density.


### Test Procedure

The Power Spectral Density was measured using the method per SA-1 from KDB 789033 D02 General U-NII Test Procedures New Rules v01. Measurements were made at the low, mid and high channels of the band. The maximum PSD was determine by finding the peak value across the carrier bandwidth.

The Spectrum Analyzer was set to the following:

- a. RBW = 500 KHz.
- b. VBW  $\geq$  1500 MHz
- c. Span  $1.5 * BW$
- d. Sweep time = auto
- e. Detector = RMS
- f. 100 traces in power averaging mode

### Test Setup





**Test Results**

**Data for a 6dBi PTMP Antenna**

Bandwidth	Frequency	Data Rate	TP	J7 Level	J13 Level	J7 Level	J13 Level	Total Summed SD	Limit/500KHz	Margin
MHz	MHz			dBm	dBm	W	W	dBm	dBm	dB
10	5735	vt0	19	8.9	9.2	7.8	8.3	12.1	30	-17.9
10	5800	vt0	20	9.8	10.8	9.5	12.0	13.3	30	-16.7
10	5840	vt0	18	8.0	7.6	6.3	5.8	10.8	30	-19.2
20	5740	vt0	18	5.1	3.7	3.2	2.3	7.5	30	-22.5
20	5800	vt0	20	7.1	7.6	5.1	5.8	10.4	30	-19.6
20	5835	vt0	17	3.9	4.2	2.5	2.6	7.1	30	-22.9
30	5745	vt0	17	2.1	1.0	1.6	1.3	4.6	30	-25.4
30	5800	vt0	20	5.0	5.8	3.2	3.8	8.4	30	-21.6
30	5830	vt0	16	1.1	0.4	1.3	1.1	3.8	30	-26.2
40	5750	vf0	17	-0.2	0.6	1.0	1.1	3.2	30	-26.8
40	5800	vf0	20	3.8	4.2	2.4	2.6	7.0	30	-23.0
40	5825	vf0	17	0.5	0.6	1.1	1.1	3.6	30	-26.4
50	5755	vf0	17	-1.3	-0.2	0.7	1.0	2.3	30	-27.7
50	5800	vf0	19	2.4	2.8	1.7	1.9	5.6	30	-24.4
50	5820	vf0	16	-1.0	-0.3	0.8	0.9	2.4	30	-27.6
60	5760	vf0	15	-4.3	-3.8	0.4	0.4	-1.0	30	-31.0
60	5800	vf0	17	-1.0	0.1	0.8	1.0	2.6	30	-27.4
60	5815	vf0	15	-3.3	-4.2	0.5	0.4	-0.7	30	-30.7
80	5770	ve00	14	-7.7	-6.1	0.2	0.2	-3.8	30	-33.8
80	5800	ve00	16	-3.4	-2.2	0.5	0.6	0.3	30	-29.7
80	5810	ve00	12	-9.7	-8.0	0.1	0.2	-5.8	30	-35.8



Data for a 25 dBi PTMP Antenna

Bandwidth	Frequency	Data Rate	TP	J7 Level	J13 Level	J7 Level	J13 Level	Total Summed SD	Limit/500KHz	Margin
MHz	MHz			dBm	dBm	W	W	dBm	dBm	dB
10	5735	vt0	19	8.9	9.2	7.8	8.3	12.1	30	-17.9
10	5800	vt0	20	9.8	10.8	9.5	12.0	13.3	30	-16.7
10	5840	vt0	18	8.0	7.6	6.3	5.8	10.8	30	-19.2
20	5740	vt0	18	5.1	3.7	3.2	2.3	7.5	30	-22.5
20	5800	vt0	20	7.1	7.6	5.1	5.8	10.4	30	-19.6
20	5835	vt0	17	3.9	4.2	2.5	2.6	7.1	30	-22.9
30	5745	vt0	17	2.1	1.0	1.6	1.3	4.6	30	-25.4
30	5800	vt0	20	5.0	5.8	3.2	3.8	8.4	30	-21.6
30	5830	vt0	16	1.1	0.4	1.3	1.1	3.8	30	-26.2
40	5750	vf0	17	-0.2	0.6	1.0	1.1	3.2	30	-26.8
40	5800	vf0	20	3.8	4.2	2.4	2.6	7.0	30	-23.0
40	5825	vf0	17	0.5	0.6	1.1	1.1	3.6	30	-26.4
50	5755	vf0	17	-1.3	-0.2	0.7	1.0	2.3	30	-27.7
50	5800	vf0	19	2.4	2.8	1.7	1.9	5.6	30	-24.4
50	5820	vf0	16	-1.0	-0.3	0.8	0.9	2.4	30	-27.6
60	5760	vf0	15	-4.3	-3.8	0.4	0.4	-1.0	30	-31.0
60	5800	vf0	17	-1.0	0.1	0.8	1.0	2.6	30	-27.4
60	5815	vf0	15	-3.3	-4.2	0.5	0.4	-0.7	30	-30.7
80	5770	ve00	14	-7.7	-6.1	0.2	0.2	-3.8	30	-33.8
80	5800	ve00	16	-3.4	-2.2	0.5	0.6	0.3	30	-29.7
80	5810	ve00	12	-9.7	-8.0	0.1	0.2	-5.8	30	-35.8



**Undesirable Emissions Conducted**

**Engineer:** Alex Macon

**Test Date:** 6/23/15

**Test Requirements**

**Unwanted Emissions that fall Outside Restricted Bands**

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz. The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz

The provisions of §15.205 apply to intentional radiators operating under this section.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

**For Conducted Unwanted Emissions in the Restricted Bands**

For conducted measurements above 1000 MHz, EIRP was determined and then the field strength computed by the following:

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3\text{m}$$

$$E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2, \text{ for } d = 3 \text{ meters.}$$

**Test Procedure**

Per KDB 789033 D02 General U-NII Test Procedures New Rules v01 conducted RF port measurements were made in lieu of radiated. In addition, Cabinet Emissions measurements were performed in a semi-anechoic chamber with the antenna port terminated by a matching load. See additional section for Radiated Emissions.

The following criteria were addressed:


**The Spectrum Analyzer was set to the following for emissions > 1000MHz:**

- a. RBW = 1 MHz
- b. VBW ≥ 3 MHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.
  - 1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW ≤ RBW/100 (i.e., 10 kHz) but not less than 10 Hz.

**For emissions below 1000MHz the Spectrum Analyzer settings were as follows:**

- a. RBW = 100 kHz
- b. VBW ≥ 300 kHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.

**Test Setup**



**Test Results:** See Annex A: Undesirable Emissions Conducted





**Undesirable Emissions Radiated**

**Engineer:** Alex Macon

**Test Date:** 8/14/15

**Test Requirements**

The provision of §15.209 were applied. In addition the requirements of §15.205 were also applied.

**FCC Part 15 Subpart C Paragraph 15.209(a) Limits**

Frequency (MHz)	Frequency (microvolts/meter)	Frequency (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBµV/m) = 20 log E field strength (µV/m)

**Test Procedure**

The EUT was setup in accordance with ANSI C63.10. 2013 and tested per KDB 789033. The antenna was replaced with non-radiating matched load. The EUT is placed on non-conductive platform at a height of 0.8 meters above the ground plane of the semi-anechoic chambers. The EUT was rotated 360 degrees and the receive antenna raised and lowered to find the maximum emissions from 30MHz to the 10<sup>th</sup> harmonic of the fundamental. The EUT was set to the maximum power level allowed and the low, mid, and high channels were investigated for emissions.

**The Spectrum Analyzer was set to the following for emissions > 1000MHz:**


- a. (RBW = 1 MHz
- b. VBW ≥ 3 MHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.
  - 1. Note: For emissions where the peak exceeded that of the average 15.209 emission limit the following was performed.
- f. RBW = 1 MHz
- g. VBW ≤ RBW/100 (i.e., 10 kHz) but not less than 10Hz

**For emissions below 1000MHz the Spectrum Analyzer settings were as follows:**


- a. RBW = 100 kHz
- b. VBW ≥ 300 kHz
- c. Detector = Peak.
- d. Sweep time = auto.
- e. Trace mode = max hold.
  - 1. Note: A quasi peak detector was used for emissions where the peak exceeded that of the average 15.209 emission limits



**Test Setup below 1000MHz**



**Test Setup above 1000MHz**

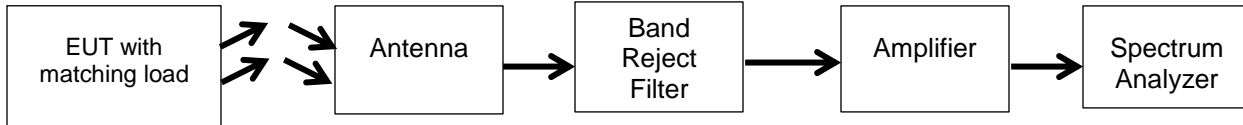

**Test Results:**            **See Annex B: Undesirable Emission Radiated**



## Occupied Bandwidth

**Engineer:** Alex Macon

**Test Date:** 6/23/15

### Test Requirement


Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz. For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 6 dB down relative to the maximum level of the modulated carrier. Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolution bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement

### Test Procedure

The Spectrum analyzer was set to the following parameters

- a. RBW = 100 kHz.
- b. VBW  $\geq$  300 kHz
- c. Detector = Peak.
- d. Trace mode = max hold.

### Test Setup



**Test Results:** See Annex C: Occupied Bandwidth



**Frequency Stability**

**Engineer:** Paul Hay

**Test Date:** 7/16/15


**Test Requirement**

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

**Test Procedure**

- a. The EUT was placed into a temperature chamber and the temperature ranges were set to the manufacturers' specifications.
- b. The RF output of the EUT was connected to a spectrum analyzer
- c. The lowest and highest channels of the band were set to transmit
- d. The carrier plots were measured to insure that the 6dB band width remained within the band over the prescribed temperature extremes.

**Test Setup**

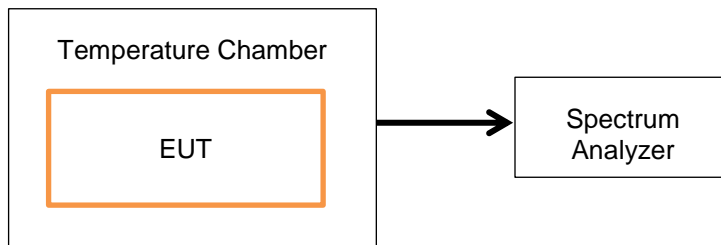

**Test Results:**

**See Annex D: Frequency Stability**



**RF Exposure**

**Engineer:** Alex Macon

**Test Date:** 8/14/15

**Requirements**

U-NII devices are subject to the radio frequency radiation exposure requirements specified in §1.1307(b), §2.1091 and §2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a “general population/uncontrolled” environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. In addition, systems operating under the provisions of this section shall be operated in a manner that insures that the public is not exposed to radio frequency energy levels in excess of the Commission’s guidelines.

**Exposure Limits**

At operating frequencies less than or equal to 6 GHz, the limits for maximum permissible exposure (MPE) shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Section 1.1307(b), except for portable devices as defined in §2.1093 as these evaluations shall be performed according to the SAR provisions in §2.1093 of this chapter.

**MPE Limit Calculations**

Exposure Limit 1mW/cm<sup>2</sup>

**Source Based Time Averaged Power Calculation**

**Average Power Calculations**

Average Power = Peak Power \* duty-cycle%

Tuned Frequency (MHz)	Conducted Peak Output Power (mW)	Duty Cycle (%)	Average Power (mW)
5800	275	100	275



**MPE Evaluation**

This is a **fixed/mobile** device used in uncontrolled /general population exposure environment.

<b>Limits Uncontrolled Exposure 47 CFR 1.1310 Table 1, (B)</b>	0.3-1.234 MHz	Limit [mW/cm <sup>2</sup> ] = 100
	1.34-30 MHz	Limit [mW/cm <sup>2</sup> ] = (180/f <sup>2</sup> )
	30-300 MHz	Limit [mW/cm <sup>2</sup> ] = 0.2
	300-1500 MHz	Limit [mW/cm <sup>2</sup> ] = f/1500
	1500-100,000 MHz	Limit [mW/cm <sup>2</sup> ] = 1.0

**Test Data**

Test Frequency, MHz	5800
Power, Conducted, mW (P)	275
Antenna Gain Isotropic	25
Antenna Gain Numeric (G)	316.2
Antenna Type	Dish
Distance (R)	20

$S = \frac{P * G}{4\pi r^2}$			
Power Density (S) mw/cm <sup>2</sup>	Power mW (P)	Numeric Gain (G)	Distance (r <sup>2</sup> ) cm
17.3	275	316.2	20

Power Density (S) =	17.3
Limit =(from above table) =	1.0

The Power Density of 17.3 mw/cm<sup>2</sup> is over the limit of 1.0 mw/cm<sup>2</sup> for the uncontrolled /general population exposure environment so Minimum Safe Distance was calculated.

$R = \sqrt{(PG/4\pi L)}$			
Distance (R) cm	Power mW (P)	Numeric Gain (G)	Limit (L)
83.2	275	316.2	1.0

The minimum safe distance is 83.2 cm.



**A/C Powerline Conducted Emission**


**Engineer:** Alex Macon

**Test Date:** 8/20/15

**Test Procedure**

The EUT power cable was connected to a LISN and the monitored output of the LISN was connected to a transient limiter, which then connected directly to a spectrum analyzer. The conducted emissions from 150 kHz to 30 MHz were measured and compared to the specification limits.

**Test Setup**



**Test Results:** See Annex E: A/C Powerline Conducted Emission



### Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Temperature Chamber	Tenney	Tenney Jr	i00027	NCR	NCR
Temperature Chamber	Tenney	Tenney II Benchmaster	i00287	NCR	NCR
EMI Receiver	HP	8546A	i00033	2/26/15	2/26/16
Preamplifier	HP	8447D	i00055	NCR	NCR
Horn Antenna	EMCO	3116	i00085	1/29/15	1/29/17
Bi-Log Antenna	Schaffner	CBL611C	i00267	2/24/14	2/24/16
Horn Antenna, Amplified	ARA	DRG-118/A	i00271	5/8/14	5/8/16
Horn Antenna, Amplified	ARA	MWH-1826/B	i00273	4/22/15	4/22/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	4/1/15	4/1/16
Spectrum Analyzer	Agilent	E4407B	i00331	6/13/14	6/13/15 **
Data Logger	Fluke	Hydra Data Bucket	i00343	3/24/15	3/24/16
EMI Analyzer	Agilent	E7405A	i00379	2/5/15	2/5/16
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	11/26/13	3/12/16
Spectrum Analyzer	Agilent	E4448A	S/N:MY46180566	12/1/2014	12/1/2016

\*\* Equipment is under a 90 day calibration extension per Lab Manager

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT