

FCC TEST REPORT

FCC ID : SXJ87039-T

Applicant : Asoka Incorporation

Address of Applicant : 5F, No.9, Kuang Fu N. Rd., Taipei, Taiwan

Equipment Under Test (EUT) :

Product description : Type Pad Pro

Model No. : 87039

Frequency Range : 2402MHz to 2466MHz

Standards : FCC 15 Paragraph 15.247

Date of Test : Sep. 22, 2009

Test Engineer : Olic huang

Reviewed By : 

PERPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel : +86-755-27553488

Fax: +86-755-27553868

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION	6
4.8 EQUIPMENT USED DURING TEST	7
5 CONDUCTED EMISSION TEST	10
5.1 TEST EQUIPMENT.....	10
5.2 TEST PROCEDURE	10
5.3 CONDUCTED TEST SETUP	11
5.4 EUT OPERATING CONDITION	11
5.5 CONDUCTED EMISSION LIMITS	12
5.6 CONDUCTED EMISSION TEST DATA	12
6 RADIATION EMISSION TEST.....	13
6.1 TEST EQUIPMENT.....	13
6.2 MEASUREMENT UNCERTAINTY.....	13
6.3 TEST PROCEDURE	13
6.4 RADIATED TEST SETUP	14
6.5 SPECTRUM ANALYZER SETUP.....	14
6.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
6.7 SUMMARY OF TEST RESULTS.....	15
6.8 EUT OPERATING CONDITION	16
6.9 RADIATED EMISSIONS LIMIT ON PARAGRAPH 15.209.....	16
6.10 RADIATED EMISSIONS TEST RESULT.....	17
6.11 RADIATED EMISSION DATA	17
7 MAXIMUM PEAK OUTPUT POWER.....	22
8 HOPPING CHANNEL NUMBER.....	23
9 FREQUENCY SEPARATED.....	24
10 DWELL TIME.....	27
11 20-DB BANDWIDTH.....	31

12 **RADIATED SPURIOUS EMISSIONS INTO ADJACENT RESTRICTED BAND33**

13 **RF EXPOSURE TEST.....35**

14 **PHOTOGRAPHS OF TESTING.....37**

15 **PHOTOGRAPHS - CONSTRUCTIONAL DETAILS38**

 15.1 EUT - FRONT VIEW38

 15.2 EUT - BACK VIEW.....38

 15.3 PCB1 - FRONT VIEW.....39

 15.4 PCB1 - BACK VIEW39

 15.5 PCB2 - FRONT VIEW.....40

 15.6 PCB2 - BACK VIEW40

16 **FCC ID LABEL.....41**

3 Test Summary

Test Items	Test Requirement	Test Method	Limit / Severity	Result
Maximum peak output power	FCC Part 15:2007	ANSI C63.4: 2003	30dBm	PASS
Restricted Band	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Dwell time	FCC Part 15:2007	ANSI C63.4: 2003	Maximum:0.4 s	PASS
Channel separation	FCC Part 15:2007	ANSI C63.4: 2003	Channel separation at least 1MHz	PASS
Hopping channel No.	FCC Part 15:2007	ANSI C63.4: 2003	Total 79 channels	PASS
20-dB Bandwidth	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
RF Exposure Test	FCC Part 15:2007	ANSI C63.4: 2003	Note	PASS
Mains Terminal Disturbance Voltage, 150kHz to 30MHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	N/A
Radiation Emission, 30MHz to 25GHz	FCC Part 15:2007	ANSI C63.4: 2003	N/A	PASS

Note : denote that for more details of the EUT , please refer to the relating test items as below .

Remark : the methods of measurement in all the test items were according to the FCC Public Notice DA 00-705 .

4 General Information

4.1 Client Information

Applicant:	Asoka Incorporation
Address of Applicant:	5F, No.9, Kuang Fu N. Rd., Taipei, Taiwan
Manufacturer:	Asoka Electronic (Shenzhen) Company Limited
Address of Manufacturer:	Da Yang Industrial Park, Lou Gang Road, Song Gang Town, Bao An District, Shen Zhen City, China.

4.2 General Description of E.U.T.

Product description:	Type Pad Pro
Model No.:	87039

Note: the PCB of the EUT is the same, and has ten types of different colors

4.3 Details of E.U.T.

Power Supply:	Battery :5.0V
---------------	---------------

4.4 Description of Support Units

The EUT has been tested as an independent unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a Type Pad Pro. The standards used were FCC 15 Paragraph 15.247, Paragraph 15.205, Paragraph 15.207, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, June 24, 2008.

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, July 24, 2008.

4.7 Test Location

All Emissions tests were performed at:-

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen 518105, Guangdong, China.

Remark : All the test results of the peripherals were conformed to the Fcc Verification requirements.

4.8 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY451149 43	W2008001	9k-26.5GHz	Aug-09	Aug-10	Wws200 81596	±1dB
Trilog Broadband Antenne 30-3000 MHz	SCHWARZB ECK MESS- ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug-09	Aug-10		±1dB
Broad-band Horn Antenna 1-18 GHz	SCHWARZB ECK MESS- ELEKTROM / VULB9163	667	W2008003	1-18GHz	Aug-09	Aug-10		f<10 GHz: ±1dB 10GHz<f< 18 GHz: ±1.5dB
Broadband Preamplifier 0.5-18 GHz	SCHWARZB ECK MESS- ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug-09	Aug-10		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 18GHz,	SCHWARZB ECK MESS- ELEKTROM / AK 9515 H	-	-	-	Aug-09	Aug-10		-
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZB ECK MESS- ELEKTROM / AK 9513				Aug-09	Aug-10		
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNSP0/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&SC HWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-09	Aug-10	Wws200 80942	±1dB
EMI Receiver	Beijingkehua n	KH3931		9k-1GHz	Aug-09	Aug-10		
Two-Line V-Network	ROHDE&SC HWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug-09	Aug-10	Wws200 80941	±10%

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
Absorbing Clamp	ROHDE&SC HWAZ/ MDS-21	100205	W2005003	impedance 50 Ω loss : 17 dB	Aug-09	Aug-10	Wws200 80943	± 1 dB
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9514				Aug-09	Aug-10		
Digital Power Analyzer	Em Test AG/Switzerland/ DPA 500	V07451 03095	W2008012	Power: 2000VA Vol-range: 0-300V Freq_range: 10-80Hz	Aug-09	Aug-10	Wwd200 81185	Voltage distinguish: 0.025% Power_freq distinguish: 0.02Hz
Power Source	Em Test AG/Switzerland/ ACS 500	V07451 03096	W2008013	Vol-range: 0-300V Power_freq: 10-80Hz				
Electrostatic Discharge Simulator	Em Test AG/Switzerland/DITO	V07451 03094	W2008005	Contact discharge: 500V-10KV Air discharge: 500V-16.5KV	Aug-09	Aug-10	Wwc200 82400	7.5A current will be changed in $V_m=1.5V$
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Freq-range: 9K-1GHz RF voltage: -60 dBm-+10dBm	Aug-09	Aug-10	Wws200 81890	Power_freq distinguish: 0.1Hz RF electricity distinguish 0.1 B
CDN M-Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	Aug-09	Aug-10	Wwc200 82396	150K-80MHz: ± 1 dB 80-230MHz: -2-+3dB
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range: 0.15-1000 MHz	Aug-09	Aug-10	Wwc200 82397	0.3-400 MHz: ± 4 dB Other freq: ± 5 dB
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			Aug-09	Aug-10	Wws200 81597	

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
All Modules Generator	SCHAFFNER/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-09	Aug-10	Wwc20082401	voltage: $\pm 10\%$ Pulse current: $\pm 10\%$
Capacitive Coupling Clamp	SCHAFFNER/CDN 8014	25311			Aug-09	Aug-10	Wwc20082398	-
Signal and Data Line Coupling Network	SCHAFFNER/CDN 117	25627	W2008011	1.2/50 μ S	Aug-09	Aug-10	Wwc20082399	-
AC Power Supply	TONGYUN/DTDGC-4				Aug-09	Aug-10	Wws20080944	-
Exposure Level Tester ELT-400	Narda Safety TEST Solutions/2304/03	M-0155	W2008022	Test freq range: 1—400kHz	Aug-09	Aug-10	Wwd20081191	Test uncertainty : 1—120kHz: $\pm 1.83\%$, 120 kHz-400 kHz: $\pm 4.06\%$
Magnetic Field Probe 100cm ²	Narda Safety TEST Solutions/2300/90.10	M-1070	W2008021	Test freq range: 1—400kHz				Test uncertainty : 1Hz-10Hz: $\pm 16.2\%$, 10Hz - 120kHz: $\pm 2.2\%$, 120 kHz-400 kHz: $\pm 4.7\%$
Active Loop Antenna Charger 10kHz-30MHz	Beijing Dazhi / ZN30900A	-	-	10kHz-30MHz	Aug-09	Aug-10		$\pm 1\text{dB}$

5 **Conducted Emission Test**

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	-----
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

5.1Test Equipment


Please refer to Section 5 this report.

5.2Test Procedure

1. The EUT was connected with signal generator and placed on a table.
2. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
3. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

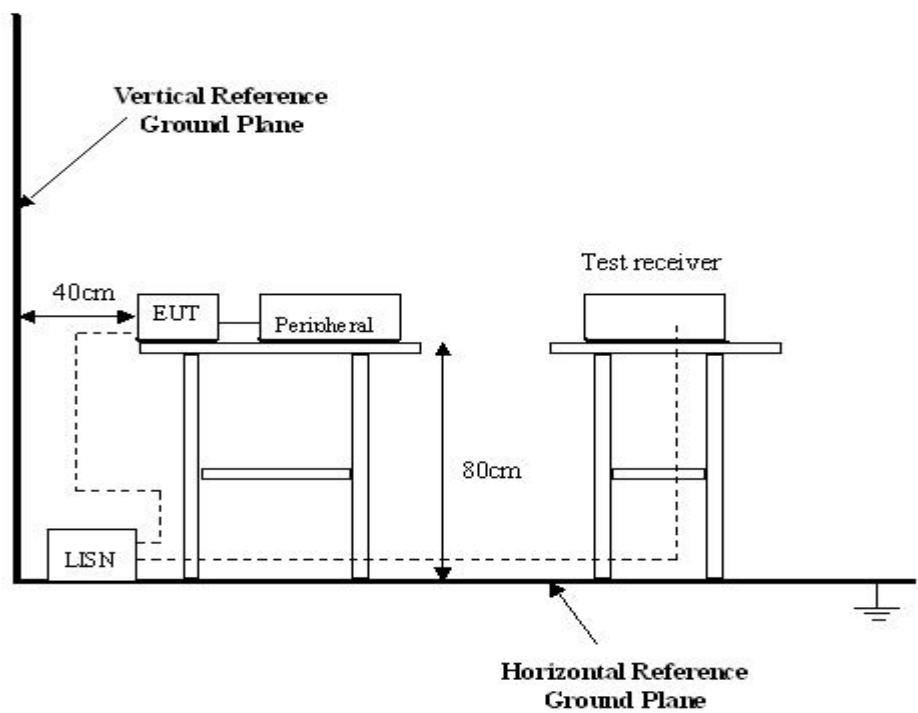

5.4EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

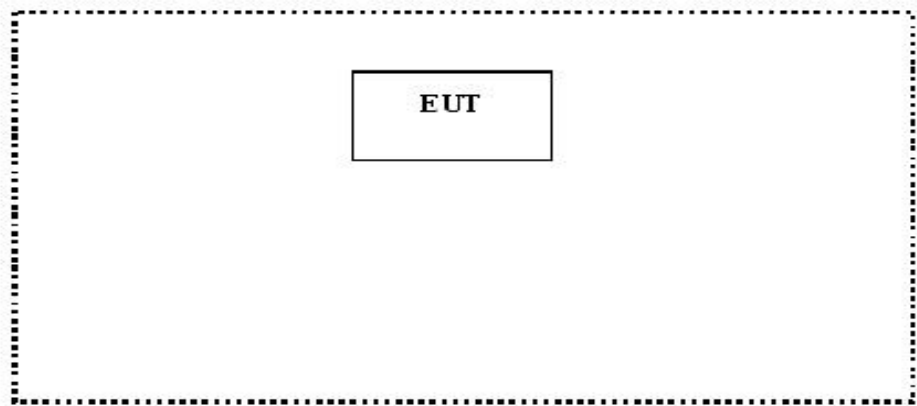

5.5 Conducted Emission Limits

66-56 dB μ V between 0.15MHz & 0.5MHz

56 dB μ V between 0.5MHz & 5MHz

60 dB μ V between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

5.6 Conducted Emission Test Data

Owing to the EUT was using battery , so this test was not performed.

6 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	Sep.22,2009
Frequency Range:	30MHz to 25GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

6.1 Test Equipment

Please refer to Section 5 this report.

6.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at WALTEK SERVICES EMC Lab is +2.9 dB.

6.3 Test Procedure

1. New battery was installed in the equipment under test for radiated emissions test.
2. This is a handheld device, The radiation emission should be tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.
3. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
4. All data was recorded in the peak and average detection mode.
5. The EUT was under working mode during the final qualification test and the configuration was used to represent the worst case results.

6.4Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209 limits and Paragraph 15.247 limits.

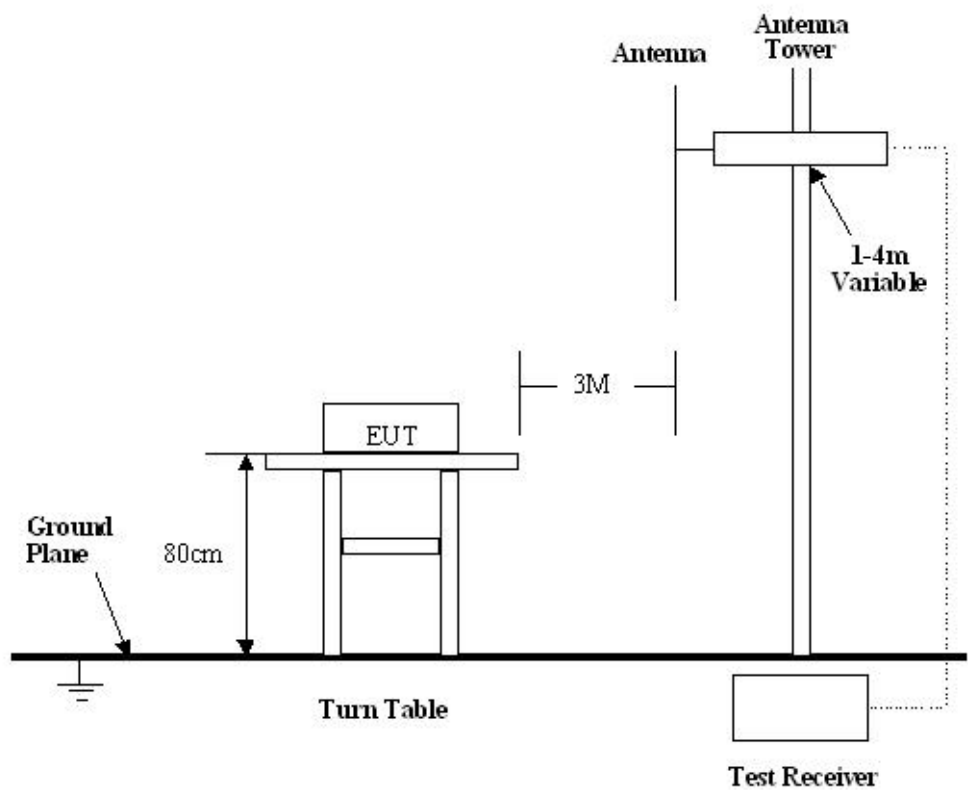

6.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.247 Rules, the system was tested to 25000 MHz. Below 1GHz

- Start Frequency30 MHz
- Stop Frequency1000 MHz
- Sweep Speed Auto
- IF Bandwidth.....120 kHz
- Video Bandwidth.....100KHz
- Quasi-Peak Adapter Bandwidth120 kHz
- Quasi-Peak Adapter Mode.....Normal
- Resolution Bandwidth100KHz

Above 1GHz

Start Frequency1000 MHz
 Stop Frequency25000MHz
 Sweep Speed Auto
 IF Bandwidth.....120 kHz
 Video Bandwidth1MHz
 Quasi-Peak Adapter Bandwidth120 kHz
 Quasi-Peak Adapter Mode.....Normal
 Resolution Bandwidth1MHz

6.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dBμV means the emission is 7dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

6.7 Summary of Test Results

According to the data in section 7.11, the EUT complied with the FCC Part15 Paragraph 15.247 standards.

6.8 EUT Operating Condition

The same as section 6.4 of this report.

Let the EUT work in test mode and test it.

6.9 Radiated Emissions Limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- Note:**
- (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$
 - (2) In the Above Table, the tighter limit applies at the band edges.
 - (3) Distance refers to the distance in meters between the measuring instrument antenna.
 - (4) The emission limit in this paragraph is based on measurement instrumentation employing an average detector. Measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
 - (5) Above 1GHz, make a Peak and average measurements for all emissions, Limit for peak is 74dBuV/m, According to Part 15.35(b) and average is 54BuV/m.

6.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV/m)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the pressletor was accounted
For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

6.11 Radiated Emission Data

A. Test Item: Radiated Emission Data
Test Voltage: Battery input 3.0V
Test Mode: TX On
Temperature: 24 °C
Humidity: 52%RH
Test Result: PASS

Remarks: 30-1000MHz radiation test no significant emissions above the equipment noise floor were detected.

And the below is the Fundamental and Harmonic .

Frequency (MHz)	Detect or	Antenna Polarization	Emission Level (dBuV/m)	FCC Part15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
Low frequency							
2402	AV	Vertical	89.41		(Fund.)	1.2	0
4804	AV	Vertical	42.32	54.00	11.68	1.2	10
7206	AV	Vertical	41.41	54.00	12.59	1.5	20
9608	AV	Vertical	40.04	54.00	13.96	1.8	60
12010	AV	Vertical	39.75	54.00	14.25	1.6	90
14412	AV	Vertical	38.74	54.00	15.26	1.4	20
16814	AV	Vertical	38.68	54.00	15.32	1.7	120
19216	AV	Vertical	36.42	54.00	17.58	1.5	100
21618	AV	Vertical	37.4	54.00	16.6	1.6	120
24020	AV	Vertical	37.37	54.00	16.63	1.2	45
2402	AV	Horizontal	86.42		(Fund.)	1.2	10

4804	AV	Horizontal	34.68	54.00	19.32	1.2	110
7206	AV	Horizontal	35.27	54.00	18.73	1.1	120
9608	AV	Horizontal	35.38	54.00	18.62	1.2	110
12010	AV	Horizontal	33.42	54.00	20.58	1.5	135
14412	AV	Horizontal	32.42	54.00	21.58	1.2	120
16814	AV	Horizontal	33.38	54.00	20.62	1.5	110
19216	AV	Horizontal	32.09	54.00	21.91	1.1	60
21618	AV	Horizontal	31.27	54.00	22.73	1.2	20
24020	AV	Horizontal	30.02	54.00	23.98	1.5	100
2402	PK	Vertical	98.35		(Fund.)	1.5	110
4804	PK	Vertical	51.26	74.00	22.74	1.8	30
7206	PK	Vertical	50.35	74.00	23.65	1.6	110
9608	PK	Vertical	48.98	74.00	25.02	1.4	100
12010	PK	Vertical	48.69	74.00	25.31	1.2	90
14412	PK	Vertical	47.68	74.00	26.32	1.2	60
16814	PK	Vertical	47.62	74.00	26.38	1.4	90
19216	PK	Vertical	45.36	74.00	28.64	1.2	120
21618	PK	Vertical	46.34	74.00	27.66	1.7	0
24020	PK	Vertical	46.31	74.00	27.69	1.4	45
2402	PK	Horizontal	95.32		(Fund.)	1.8	100
4804	PK	Horizontal	43.62	74.00	30.38	1.8	60
7206	PK	Horizontal	44.21	74.00	29.79	1.8	110
9608	PK	Horizontal	44.32	74.00	29.68	1.2	110
12010	PK	Horizontal	42.36	74.00	31.64	1.2	10
14412	PK	Horizontal	41.36	74.00	32.64	1.5	90
16814	PK	Horizontal	42.32	74.00	31.68	1.8	120
19216	PK	Horizontal	41.03	74.00	32.97	1.5	110
21618	PK	Horizontal	40.21	74.00	33.79	1.2	250
24020	PK	Horizontal	38.96	74.00	35.04	1.2	230
Middle frequency							
2434	AV	Vertical	90.73		(Fund.)	1.5	10
4868	AV	Vertical	43.37	54.00	10.63	1.2	10
7302	AV	Vertical	40.3	54.00	13.7	1.0	50
9736	AV	Vertical	40.18	54.00	13.82	1.2	20

12170	AV	Vertical	39.42	54.00	14.58	1.2	20
14604	AV	Vertical	38.75	54.00	15.25	1.2	110
17038	AV	Vertical	39.4	54.00	14.6	1.5	30
19472	AV	Vertical	37.44	54.00	16.56	1.5	10
21906	AV	Vertical	38.04	54.00	15.96	1.8	0
24340	AV	Vertical	38.32	54.00	15.68	1.2	90
2434	AV	Horizontal	87.51		(Fund.)	1.0	120
4868	AV	Horizontal	37.38	54.00	16.62	1.0	90
7302	AV	Horizontal	34.7	54.00	19.3	1.5	20
9736	AV	Horizontal	36.7	54.00	17.3	1.2	10
12170	AV	Horizontal	35.9	54.00	18.1	1.2	150
14604	AV	Horizontal	34.75	54.00	19.25	1.4	0
17038	AV	Horizontal	35.75	54.00	18.25	1.6	135
19472	AV	Horizontal	35.32	54.00	18.68	1.4	90
21906	AV	Horizontal	33.43	54.00	20.57	1.2	20
24340	AV	Horizontal	30.62	54.00	23.38	1.7	120
2434	PK	Vertical	99.67		(Fund.)	1.0	10
4868	PK	Vertical	52.31	74.00	21.69	1.1	90
7302	PK	Vertical	49.24	74.00	24.76	1.4	100
9736	PK	Vertical	49.12	74.00	24.88	1.3	120
12170	PK	Vertical	48.36	74.00	25.64	1.7	180
14604	PK	Vertical	47.69	74.00	26.31	1.2	0
17038	PK	Vertical	48.34	74.00	25.66	1.4	0
19472	PK	Vertical	46.38	74.00	27.62	1.5	120
21906	PK	Vertical	46.98	74.00	27.02	1.5	124
24340	PK	Vertical	47.26	74.00	26.74	1.2	120
2434	PK	Horizontal	96.45		(Fund.)	1.0	10
4868	PK	Horizontal	46.32	74.00	27.68	1.1	45
7302	PK	Horizontal	43.64	74.00	30.36	1.1	90
9736	PK	Horizontal	45.64	74.00	28.36	1.5	60
12170	PK	Horizontal	44.84	74.00	29.16	1.4	10
14604	PK	Horizontal	43.69	74.00	30.31	1.2	150
17038	PK	Horizontal	44.69	74.00	29.31	1.1	10
19472	PK	Horizontal	44.26	74.00	29.74	1.5	260

21906	PK	Horizontal	42.37	74.00	31.63	1.1	00
24340	PK	Horizontal	39.56	74.00	34.44	1.6	45
High frequency							
2466	AV	Vertical	89.04		(Fund.)	1.0	0
4932	AV	Vertical	42.09	54.00	11.91	1.2	120
7398	AV	Vertical	41.2	54.00	12.8	1.2	10
9864	AV	Vertical	41.4	54.00	12.6	1.4	45
12330	AV	Vertical	40.95	54.00	13.05	1.5	90
14796	AV	Vertical	40.69	54.00	13.31	1.8	60
17262	AV	Vertical	40.74	54.00	13.26	1.1	10
19728	AV	Vertical	39.04	54.00	14.96	1.1	120
22194	AV	Vertical	39.65	54.00	14.35	1.4	10
24660	AV	Vertical	38.42	54.00	15.58	1.5	60
2466	AV	Horizontal	83.91		(Fund.)	1.0	0
4932	AV	Horizontal	38.04	54.00	15.96	1.8	120
7398	AV	Horizontal	37.54	54.00	16.46	1.2	60
9864	AV	Horizontal	37.42	54.00	16.58	1.5	100
12330	AV	Horizontal	36.7	54.00	17.3	1.2	60
14796	AV	Horizontal	38.91	54.00	15.09	1.2	120
17262	AV	Horizontal	36.71	54.00	17.29	1.4	120
19728	AV	Horizontal	34.75	54.00	19.25	1.8	10
22194	AV	Horizontal	34.32	54.00	19.68	1.3	45
24660	AV	Horizontal	32.31	54.00	21.69	1.7	90
2466	PK	Vertical	97.98		(Fund.)	1.0	60
4932	PK	Vertical	51.03	74.00	22.97	1.2	10
7398	PK	Vertical	50.14	74.00	23.86	1.8	120
9864	PK	Vertical	50.34	74.00	23.66	1.5	10
12330	PK	Vertical	49.89	74.00	24.11	1.4	45
14796	PK	Vertical	49.63	74.00	24.37	1.2	90
17262	PK	Vertical	49.68	74.00	24.32	1.2	60
19728	PK	Vertical	47.98	74.00	26.02	1.2	120
22194	PK	Vertical	48.59	74.00	25.41	1.6	60
24660	PK	Vertical	47.36	74.00	26.64	1.4	90
2466	PK	Horizontal	92.85		(Fund.)	1.1	120

4932	PK	Horizontal	46.98	74.00	27.02	1.4	10
7398	PK	Horizontal	46.48	74.00	27.52	1.5	45
9864	PK	Horizontal	46.36	74.00	27.64	1.3	90
12330	PK	Horizontal	45.64	74.00	28.36	1.2	60
14796	PK	Horizontal	47.85	74.00	26.15	1.7	10
17262	PK	Horizontal	45.65	74.00	28.35	1.8	120
19728	PK	Horizontal	43.69	74.00	30.31	1.5	10
22194	PK	Horizontal	43.26	74.00	30.74	1.8	45
24660	PK	Horizontal	41.25	74.00	32.75	1.0	90

7 Maximum Peak Output Power

Test Requirement:	FCC Part15 Paragraph 15.247
Test Method:	Based on ANSI 63.4:2003
Test Date:	Sep.22,2009
Test mode:	Compliance test in the worse case: Tx Lower/Tx Middle/Tx Upper
Requirements:	Regulation 15.247(b) The limit of Maximum Peak Output Power Measurement is 1W(30dBm)

Test procedure:

The following test procedure as below:

The transmitter output (antenna port) was connected to the spectrum analyzer.EUT and its simulators are placed on a table, let EUT working in test mode,then test it.

The bandwidth of the fundamental frequency was measured with the spectrum analyser using 100kHz RBW and 100kHz VBW.


Test Result: The unit does meet the FCC requirements.

Test Channel	Fundamental Frequency(MHz)	Output Power (mW)	Limit (W)	Power output level
Lower	2402	1.36	1	conducted
Middle	2434	1.21	1	conducted
Upper	2466	1.26	1	conducted

8 Hopping Channel Number

Test Requirement:	FCC Part15 C
Test Method:	Based on FCC Part15 Paragraph 15.247
Test Date:	Sep. 22, 2009
Test mode:	The EUT work in test mode(Tx) and test it
Requirements:	Regulation 15.247(b) For frequency hopping systems operating In the 2400-2483.5MHz band employing at least 15 hopping channels.
Test result:	The total number of channels would be 65 channels. The unit does meet the FCC requirements.

Please refer the graph as below:

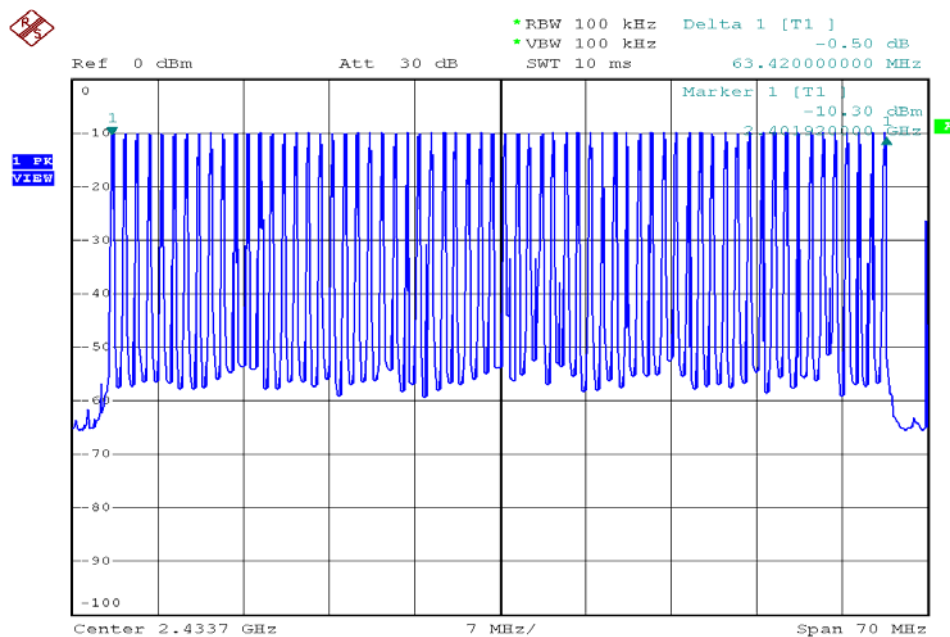

9 Frequency Separated

The requirements in this clause are only applicable to equipment using frequency hopping spread spectrum (FHSS) modulation.

Channel Separated

Definition: A hopping channel is any of the centre frequencies defined within the hopping sequence of a FHSS system.

Limit: Non-adaptive frequency hopping system shall make use of non-overlapping channels separated by the channel bandwidth as measured at 20dB below peak power.

The hopping channels defined within a hopping sequence shall be at least 1MHz apart(channel separation)

Operating Environment:

Temperature: 25.50 °C
Humidity: 51 % RH
Barometric Pressure: 1012 mbar

EUT Operation Condition:


The EUT was programmed to be in continuously transmitting mode.

Test Result: PASS

Test Channel	Channel Separation	PASS/FAIL
Lower Channels	1MHz	Pass
Middle Channels	1MHz	Pass
Upper Channels	1MHz	Pass

Please refer to the below photos for more details


Lower Channel

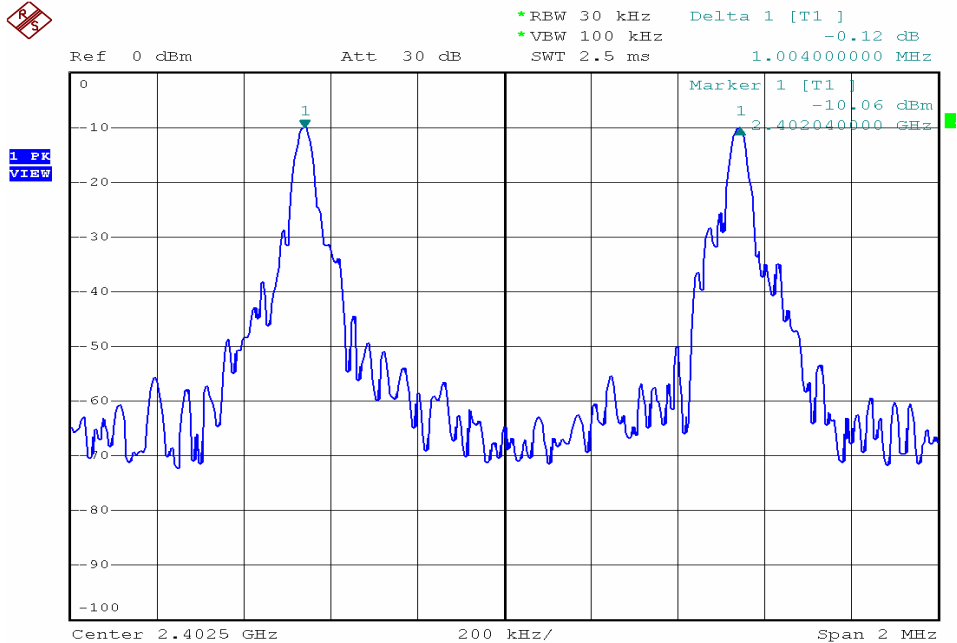

Middle Channel



Upper Channel

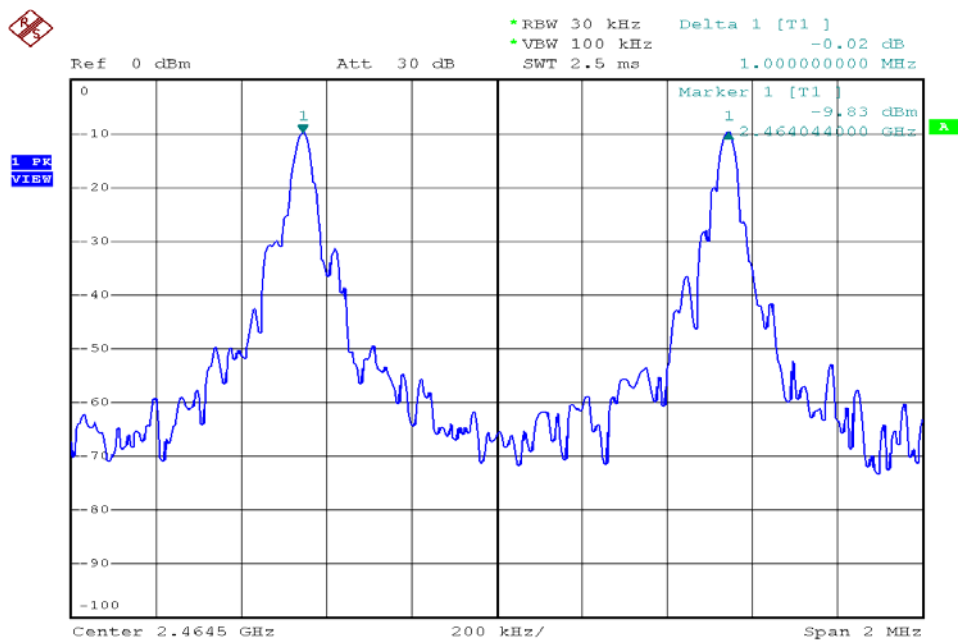

10 Dwell time

The dwell time is the time spent at a particular frequency during any single hop.

Limit: the maximum dwell time shall be less than 0.4s.

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Barometric Pressure: 1012 mbar

EUT Operation Condition:

The EUT was programmed to be in continuously transmitting mode.

11.2 Test Procedure

The EUT output antenna port was connected to the spectrum analyzer. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz, and the frequency span to zero span, measure the maximum time duration of one single pulse. So, the Dwell Time can be calculated as follows:

$$T = T_{\text{on-time}} * N_{\text{times}} / 1S * 0.4 * 65 \leq 0.4S.$$

11.3 Test Result: PASS


Please refer to the below photos for more details.

Channel 2402MHz

Dwell time of each occupation in this channel as follows:
 $0.00016 \times 80 / 15 \times 0.4 \times 65 = 0.3328 < 0.4S$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

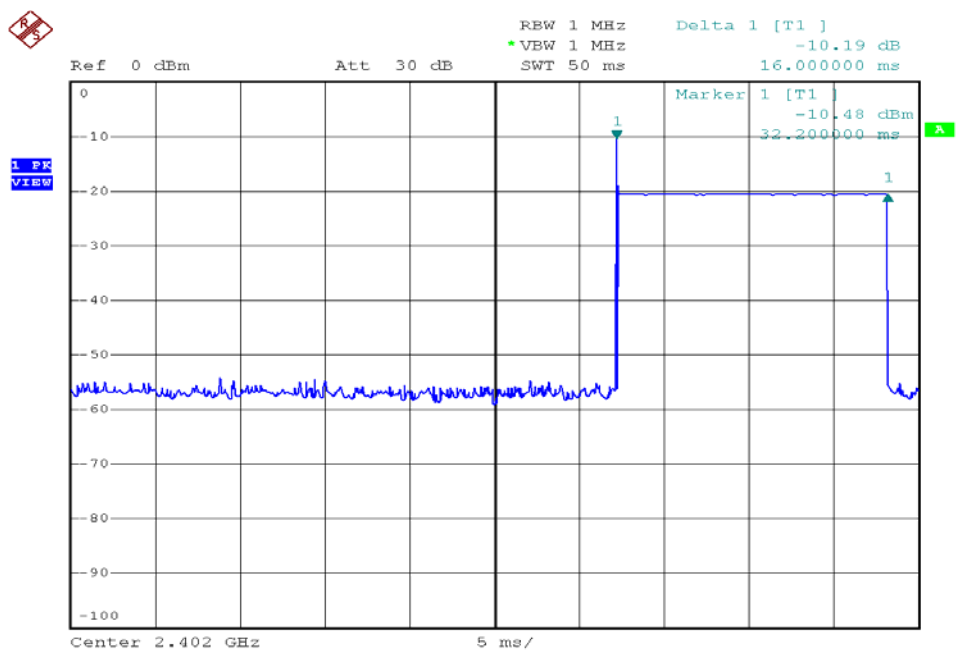


Channel 2434MHz

Dwell time of each occupation in this channel as follows:
 $0.00016 \times 80 / 15 \times 0.4 \times 65 = 0.3328 < 0.4S$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

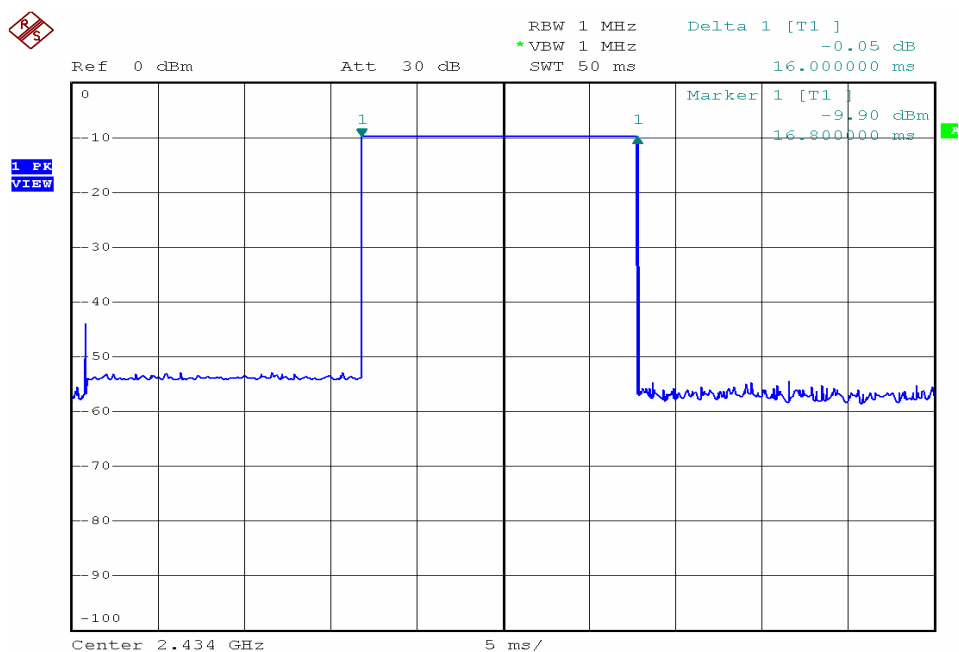


Channel 2466MHz

Dwell time of each occupation in this channel as follows:
 $0.00016 \times 80 / 15 \times 0.4 \times 65 = 0.3328 < 0.4S$

Test Result: PASS

The Results are not be greater than 0.4 seconds.

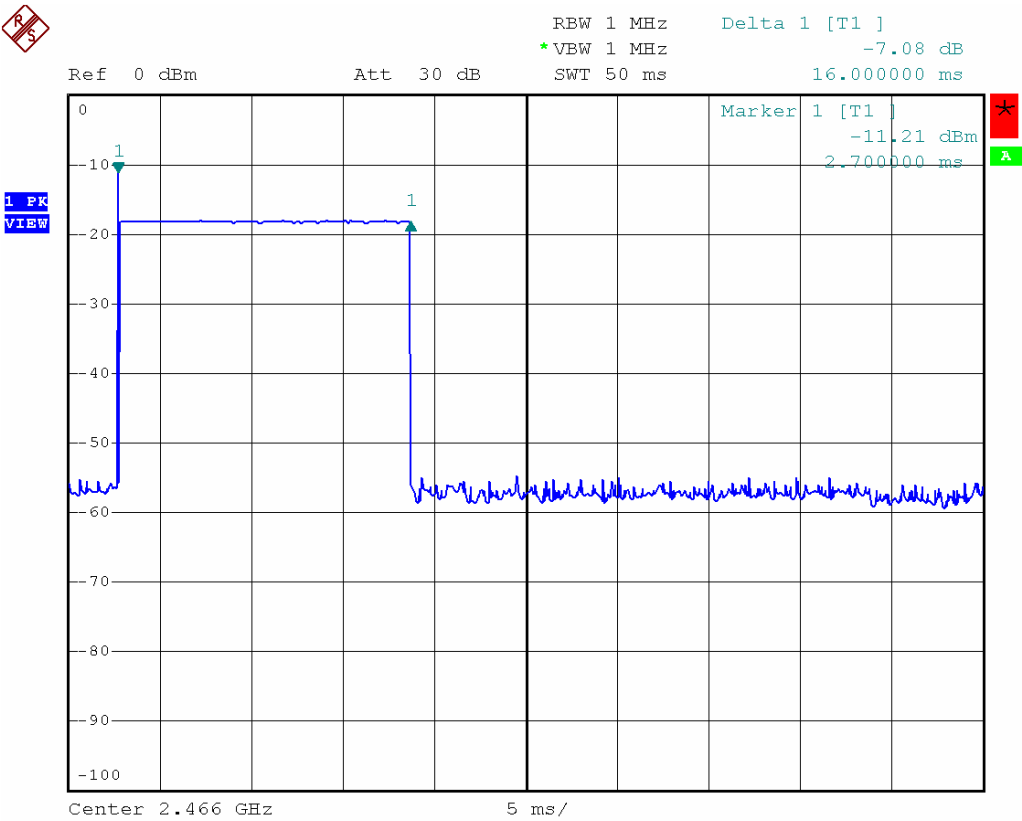

11 20-dB Bandwidth

Test Requirement: FCC Part15 C
Test Method: Based on FCC Part15 Paragraph 15.247
Test Date: Sep. 22, 2009
Test mode: The EUT work in test mode(Tx) and test it


Test Procedure

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer.
- 2. The bandwidth of the fundamental frequency was measure by spectrum analyser with 100KHz RBW and 100KHz VBW.The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power 20dB.


Test Result

Please refer the graph as below:


Lower Channel 2402MHz

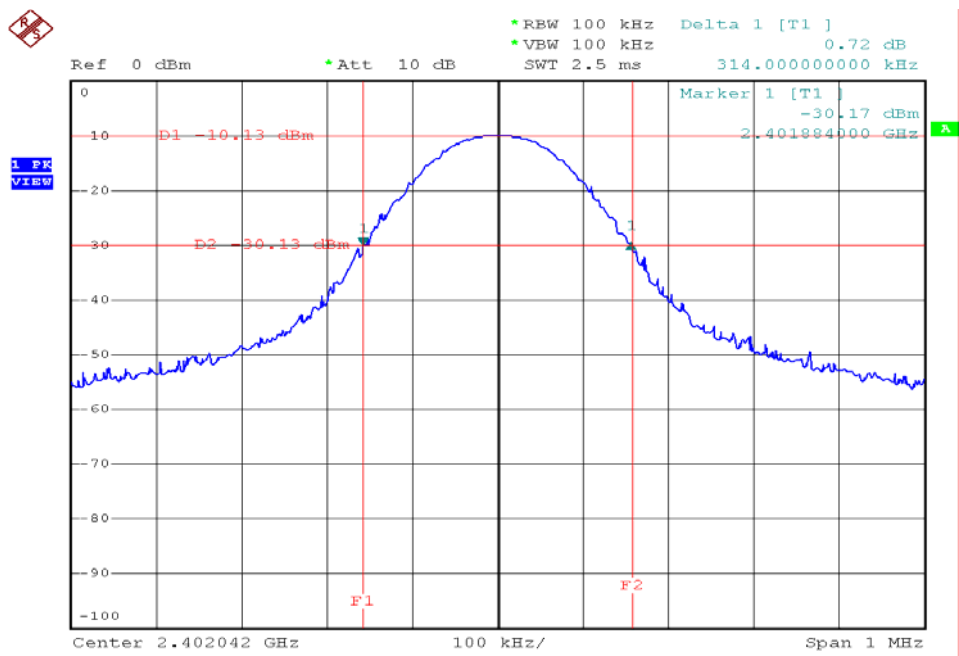

Middle Channel 2434MHz

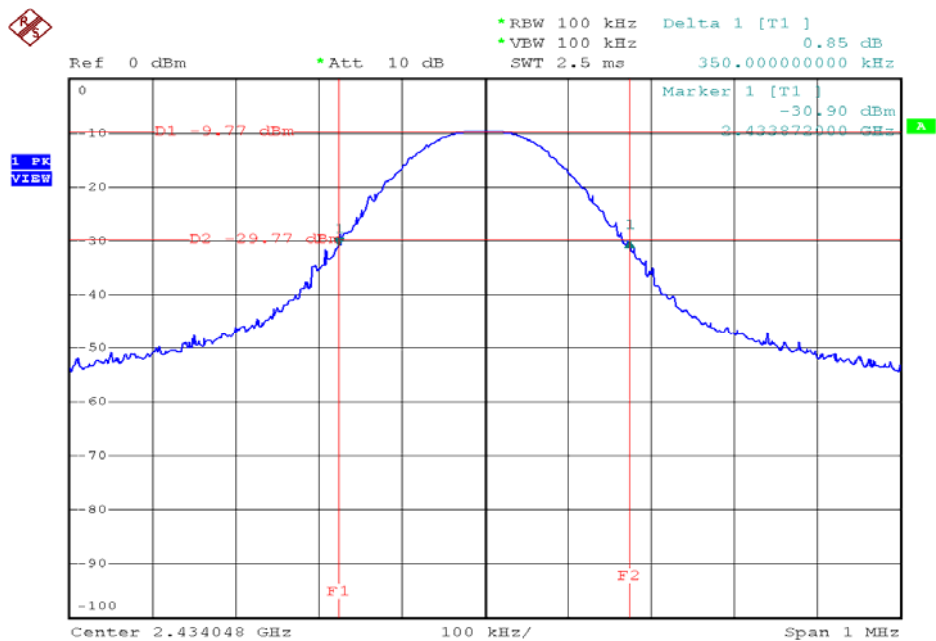

Upper Channel 2466MHz

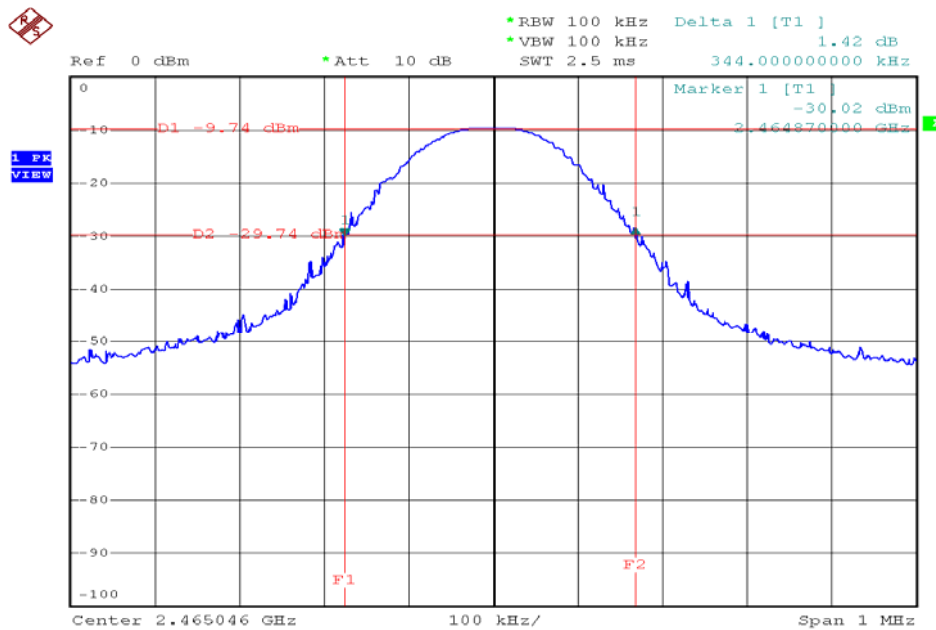

12 Radiated spurious emissions into adjacent restricted band

Test Requirement:	FCC Part15 Paragraph 15.205
Test Method:	Based on FCC Part 15 Paragraph 15.247
Test Date:	Sep. 22, 2009
Requirements:	The EUT work in test mode(Tx) and test it


Requiments:

emissions that fall in the restricted bands(15.205).Above 1000MHz, compliance with the emissions limits in section 15.209 shall be demonstrated based on the average value of the measured emissions,The provisions in section 15.35 apply to these measurements.


Test procedure:

An in band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4-2003 and FCC Rules.The procedure was repeated with an average detector and a plot made.The calculated field strength in the adjacent restricted band is presented below.

Lower bandedge/ restricted band (AV Value)

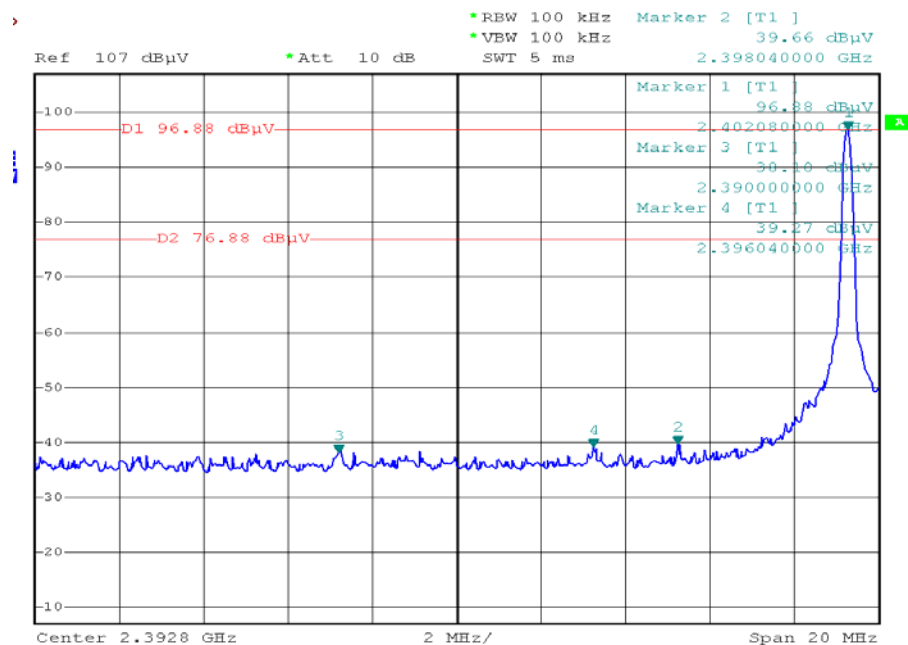

Upper Bandedge/ Restricted Band (AV Value)

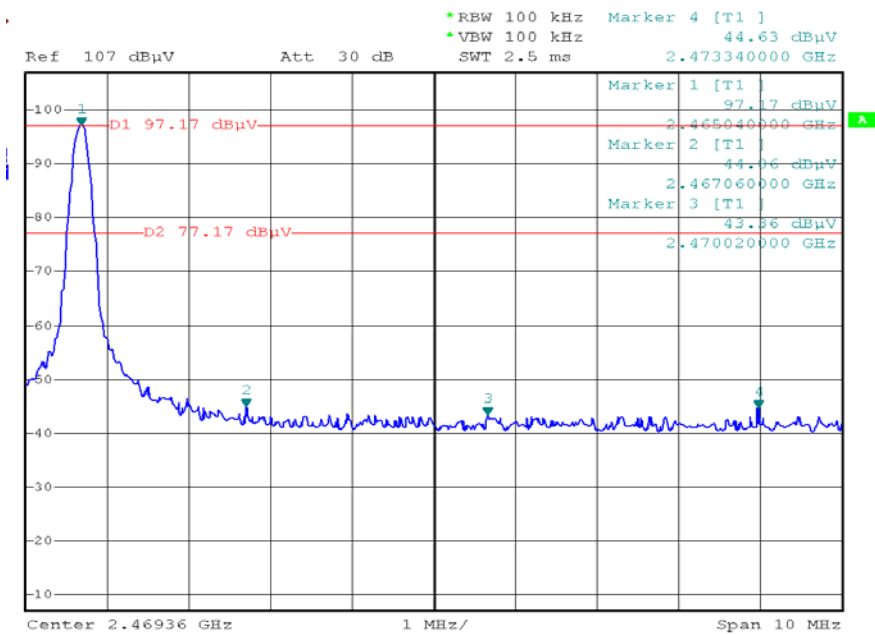

13 RF Exposure Test

Test Requirement:	FCC Part 2 Subpart J
Test Method:	Based on FCC Part 15 Paragraph 15.247
Test Date:	Sep. 22, 2009
Requirements:	The EUT work in test mode(Tx) and test it

Requiments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d}$$

$$\text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$


From the peak EUT RF output power, the minimum mobile separation distance,

d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained


Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
-2.21	0.601	1.987	1.36	0.00163	1	Complies
-2.21	0.601	1.931	1.21	0.00145	1	Complies
-2.21	0.601	2.095	1.26	0.00151	1	Complies

14 Photographs of Testing

Radiation Emission Test View For 30MHz-1000MHz

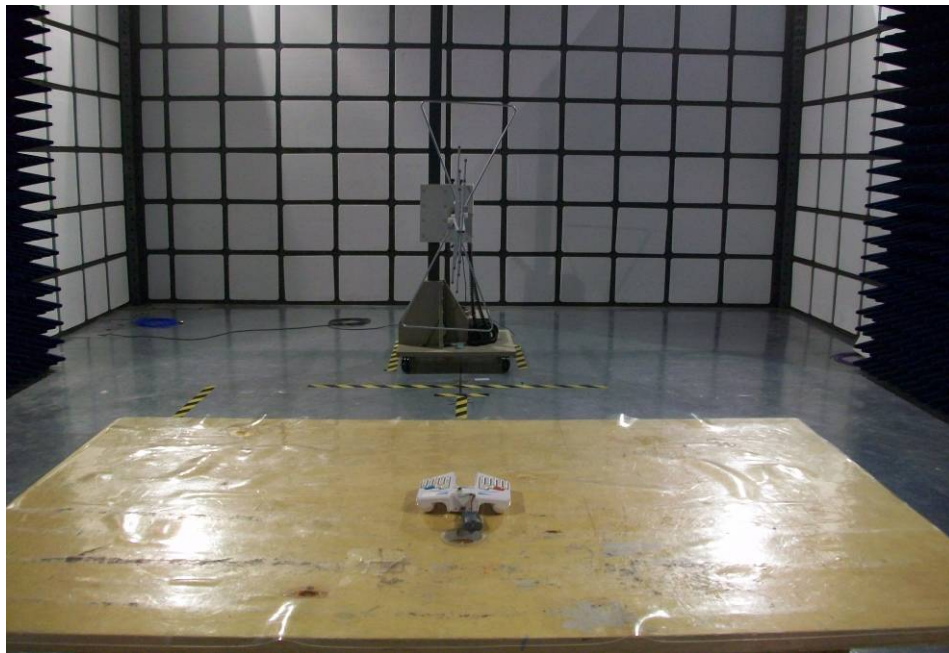

Radiation Emission Test View For 1GHz-25GHz

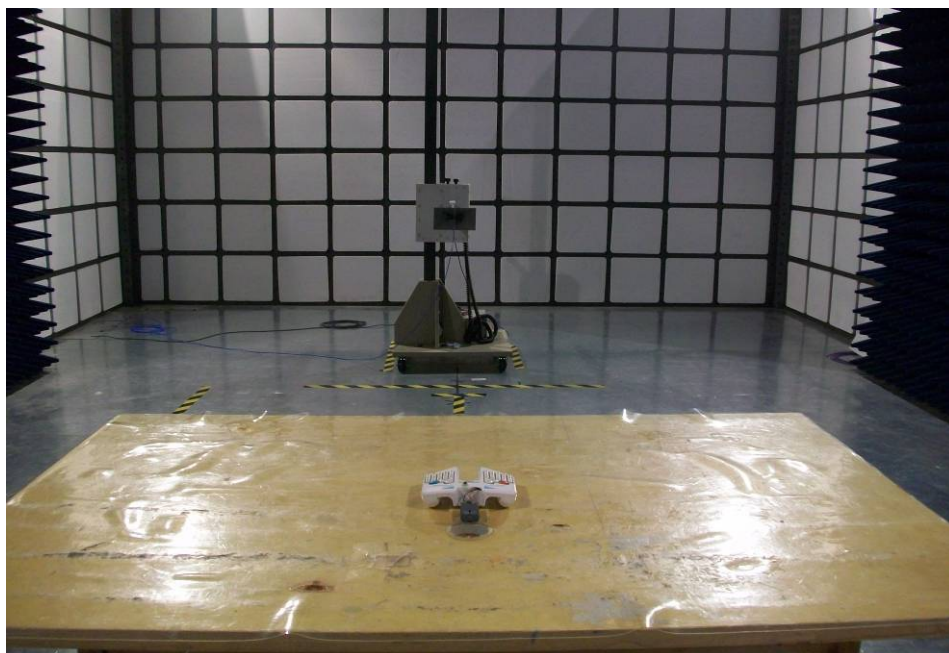



15 Photographs - Constructional Details

15.1 EUT - Front View



15.2 EUT - Back View

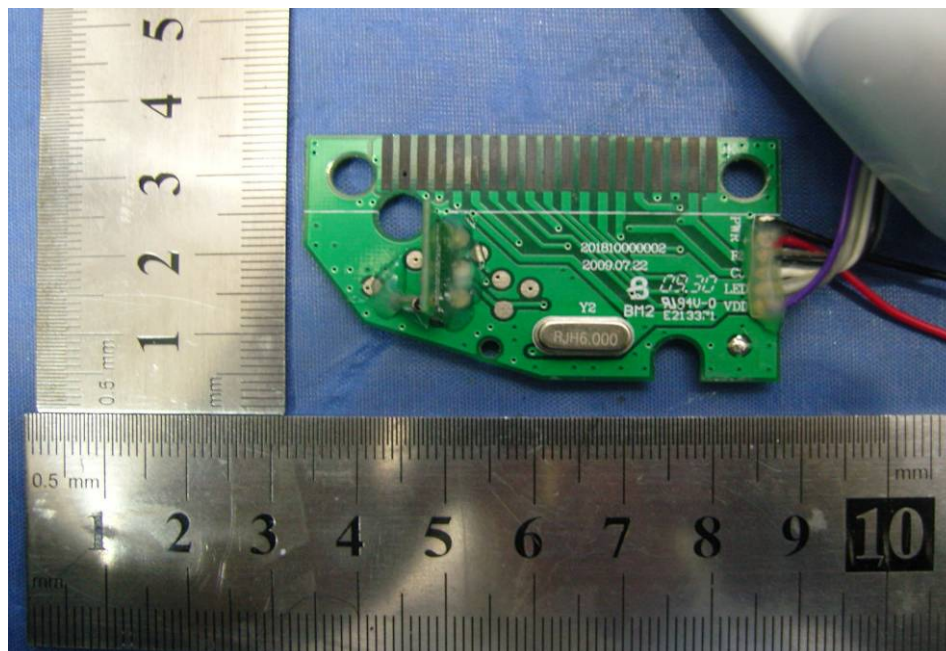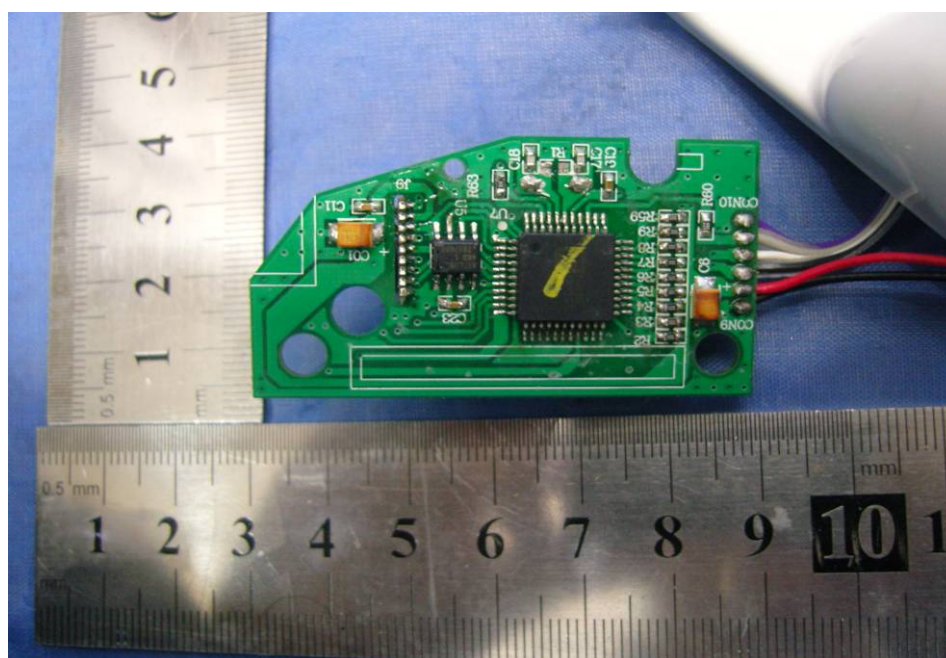


15.3 PCB1 - Front View**15.4 PCB1 - Back View**

15.5 PCB2 - Front View



15.6 PCB2 - Back View

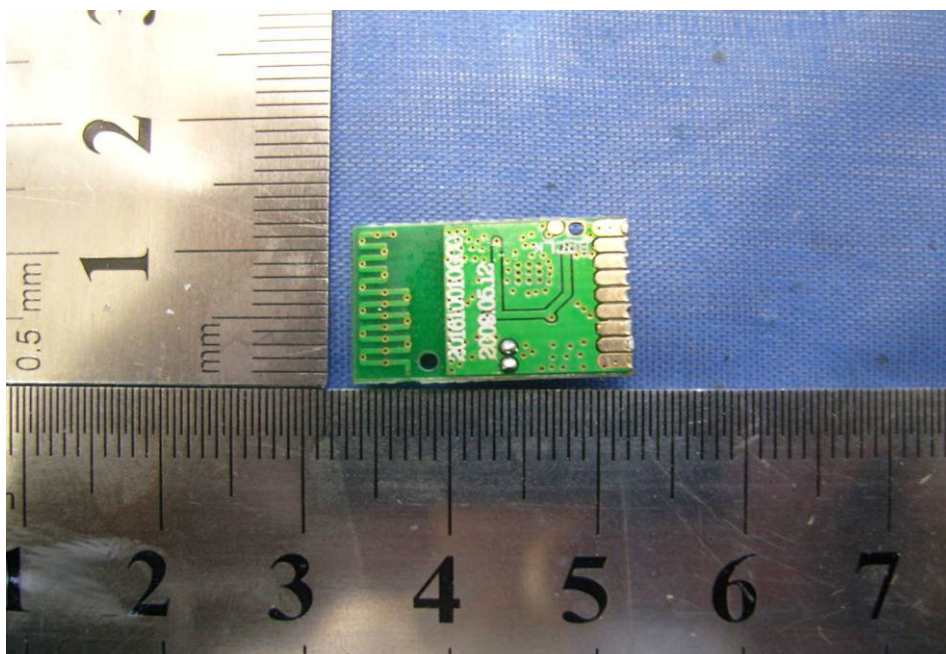

16 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference,and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

