

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

Bluetooth speaker

MODEL No.: H100, H200, H220

FCC ID: SXS-GSOUH100

REPORT NO: ES121231217E

ISSUE DATE: April 19, 2013

Prepared for

**Gsou Technology (Shenzhen)Co.,Ltd
14C, Block A, First World Plaza, No.7002 West Hongli Road, Futian District,
Shenzhen, Guangdong, China**

Prepared by
SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

VERIFICATION OF COMPLIANCE

Applicant:	Gsou Technology (Shenzhen)Co.,Ltd 14C, Block A, First World Plaza, No.7002 West Hongli Road, Futian District, Shenzhen, Guangdong, China
Manufacturer:	Gsou Technology (Shenzhen)Co.,Ltd 14C, Block A, First World Plaza, No.7002 West Hongli Road, Futian District, Shenzhen, Guangdong, China
Product Description:	Bluetooth speaker
Model Number:	H100, H200, H220
Trade Mark	N/A
Serial Number:	N/A
File Number:	ES121231217E
Date of Test:	April 1, 2013 to April 19, 2013

We hereby certify that:

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2009) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.247.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : April 1, 2013 to April 19, 2013

Prepared by : Jessie Hu
 Jessie Hu/Editor

Reviewer : King Wang
 King Wang/Supervisor

Approve & Authorized
 Signer : Lisa Wang
 Lisa Wang/Manager



Table of Contents

1.	GENERAL INFORMATION	5
1.1	PRODUCT DESCRIPTION.....	5
1.2	RELATED SUBMITTAL(S) / GRANT (S)	5
1.3	TEST METHODOLOGY.....	5
1.4	SPECIAL ACCESSORIES	5
1.5	EQUIPMENT MODIFICATIONS	5
1.6	TEST FACILITY	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	EUT CONFIGURATION	7
2.2	EUT EXERCISE	7
2.3	TEST PROCEDURE	7
2.4	LIMITATION	7
2.5	CONFIGURATION OF TESTED SYSTEM	11
2.6	EQUIPMENT USED IN TESTED SYSTEM	11
2.7	DESCRIPTION OF TEST MODES	12
3.	SUMMARY OF TEST RESULTS	13
4.	CONDUCTED EMISSIONS TEST	14
4.1	MEASUREMENT PROCEDURE:.....	14
4.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
4.3	MEASUREMENT EQUIPMENT USED:	14
4.4	CONDUCTED EMISSION LIMIT.....	14
4.5	MEASUREMENT RESULT:.....	15
5.	RADIATED EMISSION TEST	16
5.1	MEASUREMENT PROCEDURE.....	16
5.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	17
5.3	MEASUREMENT EQUIPMENT USED:	18
5.4	MEASUREMENT RESULT.....	19
6.	CHANNEL SEPARATION TEST	23
6.1	MEASUREMENT PROCEDURE.....	23
6.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	23
6.3	MEASUREMENT EQUIPMENT USED:	23
6.4	MEASUREMENT RESULTS:.....	23
7.	BANDWIDTH TEST	30
7.1	MEASUREMENT PROCEDURE.....	30
7.2	TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
7.3	MEASUREMENT EQUIPMENT USED:	30
7.4	MEASUREMENT RESULTS:.....	30

8. QUANTITY OF HOPPING CHANNEL TEST.....	37
8.1 MEASUREMENT PROCEDURE.....	37
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37
8.3 MEASUREMENT EQUIPMENT USED:	37
8.4 MEASUREMENT RESULTS:.....	37
9. TIME OF OCCUPANCY (DWELL TIME) TEST	39
9.1 MEASUREMENT PROCEDURE.....	39
9.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
9.3 MEASUREMENT EQUIPMENT USED:	39
9.4 MEASUREMENT RESULTS:.....	39
10. MAXIMUM PEAK OUTPUT POWER TEST	42
10.1 MEASUREMENT PROCEDURE.....	42
10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	42
10.3 MEASUREMENT EQUIPMENT USED:	42
10.4 MEASUREMENT RESULTS:.....	42
11. BAND EDGE TEST.....	44
11.1 MEASUREMENT PROCEDURE.....	44
11.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	44
11.3 MEASUREMENT EQUIPMENT USED:	44
11.4 MEASUREMENT RESULTS:.....	44
12. ANTENNA PORT EMISSION.....	46
12.1 TEST EQUIPMENT.....	46
12.2 MEASURING INSTRUMENTS AND SETTING.....	46
12.3 TEST PROCEDURES.....	46
12.4 BLOCK DIAGRAM OF TEST SETUP.....	46
12.5 TEST RESULT	46
13. ANTENNA APPLICATION.....	50
13.1 ANTENNA REQUIREMENT	50
13.2 RESULT	50

1. GENERAL INFORMATION

1.1 Product Description

Model: Twist (referred to as the EUT in this report) The EUT is a short range, lower power, Device. It is designed by way of utilizing the GFSK, $1/4 \pi$ DQPSK and 8DPSK modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

- A). Operation Frequency: 2402-2480MHz
- B). Modulation: GFSK, $1/4 \pi$ DQPSK, 8DPSK
- C). Number of Channel: 79
- D). Channel space: 1MHz
- E). Rated RF Output Power:3.80dBm
- F). BIT Rate of Transmission: 1Mbps, 2Mbps, 3Mbps
- G). Antenna Type: PCB antenna
- H). Antenna GAIN: 0dBi
- I). Power Supply: DC 5V from Adapter
- J). Adapter: Model: HPJ-A0503000C-01
Input: 100~240V 50/60Hz 0.6A
Output: DC 5V 3A

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: SXS-GSOUH100 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

1.3 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4 (2009) and FCC Public Notice DA 00-705. Radiated testing was performed at an antenna to EUT distance 3 meters.

1.4 Special Accessories

Not available for this EUT intended for grant.

1.5 Equipment Modifications

Not available for this EUT intended for grant.

1.6 Test Facility

Site Description
EMC Lab.

: Accredited by CNAS, 2010.10.29
The certificate is valid until 2013.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006(identical to ISO/IEC17025:2005)
The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2010.5.25
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, October 28, 2010
The Certificate Registration Number is 406365.

Accredited by Industry Canada, March 5, 2010
The Certificate Registration Number is 46405-4480.

Name of Firm
Site Location

: SHENZHEN EMTEK CO., LTD
: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2009. And RSS GEN Conducted emissions from the EUT measured in the **frequency range between 0.15 MHz and 30MHz** using **CISPR Quasi-Peak and average detector mode**.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter(EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2009 .

2.4 Limitation

(1) Channel Separation test

FCC Part 15, Subpart C Section 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20 Bandwidth of the hopping channel, whichever is greater.

Frequency Range (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz

(2)

20dB Bandwidth

Frequency Range(MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000

(3) **Quantity of Hopping Channel**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	20dB bandwidth	Limit(Quantity of Hopping Channel)		
		20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz
902-928	50	25	NA	NA
2400-2483.5	NA	NA	75	15
5725-5850	NA	NA	75	NA

(4) **Time of Occupancy(Dwell Time)**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	20dB bandwidth <250kHz(50Channel)	LIMIT(rms)	
		20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20S)	400(10S)	NA
2400-2483.5	NA	NA	400(30S)
5725-5850	NA	NA	400(30S)

Note: The “()” is all channel’s average time of occupancy.

(5) **Maximum Peak Output Power**

FCC Part 15, Subpart C Section 15.247

Frequency Range (MHz)	Quantity of Hopping Channel	LIMIT(W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

(6) Band edge

FCC Part15, Subpart C Section 15.247, In any 100kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, attenuation below the general limits specified in section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Operating Frequency Range(MHz)	Spurious emission frequency	Limit	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

(8) Radiated Emission

FCC Part 15, Subpart C Section 15.209 limit of radiated emission for frequency below 1000GHz. The emissions from an intentional radiator shall not exceed the field strength level specified in the following table:

Frequency (MHz)	Field strength $\mu\text{V/m}$	Distance(m)	Field strength at 3m $\text{dB}\mu\text{V/m}$
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Remark: 1. Emission level in $\text{dB}\mu\text{V/m}=20 \log (\text{uV/m})$
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

FCC Part 15, Section 15.35(b) limit of radiated emission for frequency above 1000MHz


Frequency(MHz)	Class A($\text{dB}\mu\text{V/m}$)(at 3m)		Class B($\text{dB}\mu\text{V/m}$)(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249 The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

2.5 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



2.6 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	Bluetooth speaker	N/A	H100	SXS-GSOUH100	N/A	<i>EUT</i>
2.	Adapter	N/A	HPJ-A0503000C-01	N/A	N/A	

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

2.7 Description of test modes

The EUT (Vibration Speaker) has been tested under normal operating condition.

This EUT is a FHSS system, we use blue test to control the EUT with parallel port, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
1	2402
40	2441
79	2480

3. Summary of Test Results

FCC Rule	Description Of Test	Result
15.247(a)(1)	Channel Separation test	Pass
15.247(a)(1)	20dB Bandwidth	Pass
15.247(a)(1)	Quantity of Hopping Channel	Pass
15.247(a)(1)	Time of Occupancy (Dwell Time)	Pass
15.247(b)(1)	Max Peak output Power test	Pass
15.247(d)	Band edge test	Pass
15.207	AC Power Conducted Emission	Pass
15.247(d)	Radiated Emission	Pass
§15.247(d)	Antenna Port Emission	Pass
15.203&15.247(b)	Antenna Application	Pass

4. Conducted Emissions Test

4.1 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

4.2 Test SET-UP (Block Diagram of Configuration)

N.A.

4.3 Measurement Equipment Used:

Conducted Emission Test Site # 4					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2012	05/29/2013
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2012	05/29/2013
L.I.S.N	Rohde & Schwarz	ESH2-Z5	834549/005	05/29/2012	05/29/2013
50ΩCoaxial Switch	Anritsu	MP59B	M20531	005/29/2012	05/29/2013

4.4 Conducted Emission Limit

(7) Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.5 Measurement Result:

Date of Test: April 1, 2013 Temperature: 22°C
 Frequency Detector: 0.15~30MHz Humidity: 50%
 Test Result: PASS Test Mode: TX Mode

Test Line	Frequency MHz	Emission Level QP dB(μV)	Emission Level AV dB(μV)	Limits QP dB(μV)	Limits AV dB(μV)	Over QP dB(μV)	Over AV dB(μV)
Line	0.535	51.00	42.80	56.00	46.00	-5.00	-3.20
	1.610	46.37	38.72	56.00	46.00	-9.63	-7.28
	2.690	35.79	29.24	56.00	46.00	-20.21	-16.76
	3.760	39.35	33.93	56.00	46.00	-16.65	-12.07
	5.370	37.70	32.64	60.00	50.00	-22.30	-17.36
	7.520	34.59	29.46	60.00	50.00	-25.41	-20.54
Neutral	0.535	51.11	42.09	56.00	46.00	-4.89	-3.91
	1.610	46.10	39.76	56.00	46.00	-9.90	-6.24
	2.680	34.77	29.46	56.00	46.00	-21.23	-16.54
	3.760	39.38	31.96	56.00	46.00	-16.62	-14.04
	4.830	38.74	33.47	56.00	46.00	-17.26	-12.53
	5.370	37.45	32.70	60.00	50.00	-22.55	-17.30


5. Radiated Emission Test

5.1 Measurement Procedure


- 1 The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measured were complete.

5.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

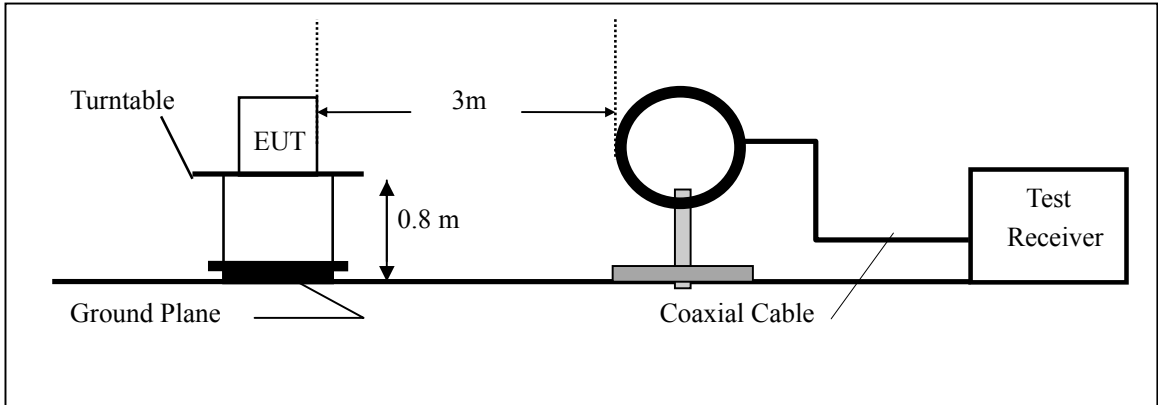

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

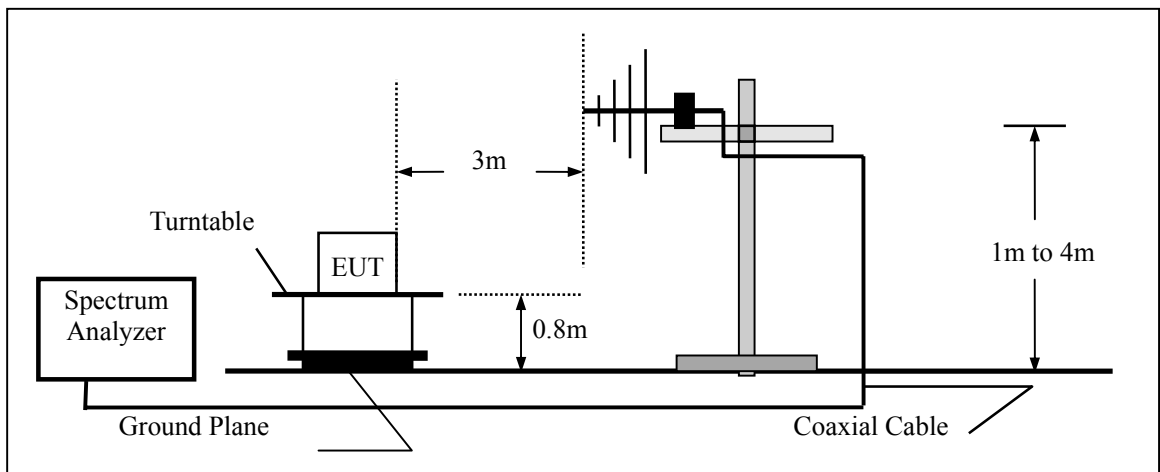

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

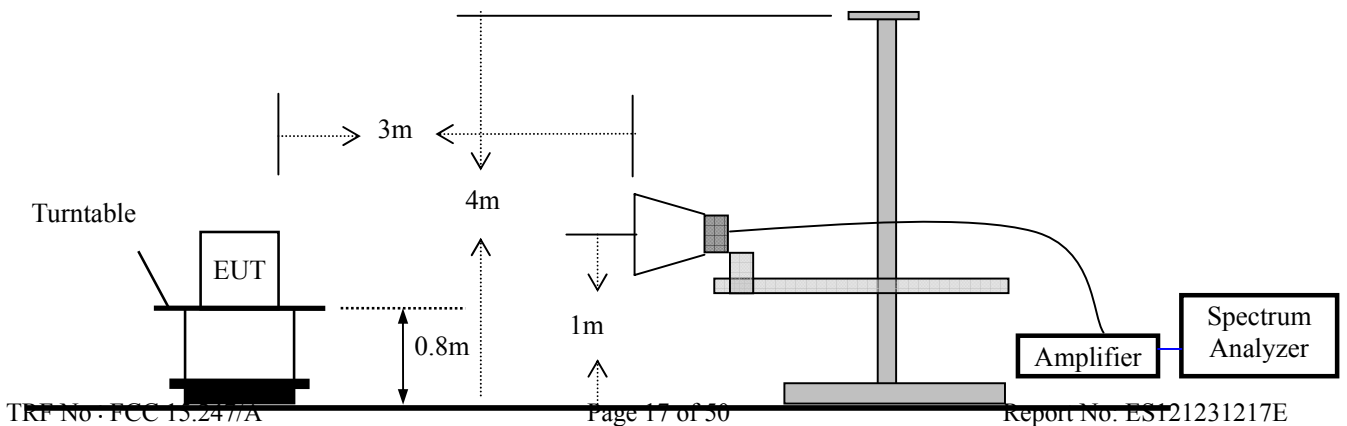

5.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2012	05/29/2013
Spectrum Analyzer	HP	E4407B	839840481	05/29/2012	05/29/2013
EMI Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/29/2012	05/29/2013
Pre-Amplifier	HP	8447D	2944A07999	05/29/2012	05/29/2013
Bilog Antenna	Schwarzbeck	VULB9163	142	05/29/2012	05/29/2013
Loop Antenna	ARA	PLA-1030/B	1029	05/29/2012	05/29/2013
Horn Antenna	Electro-Metrics	EM-6961	103314	05/29/2012	05/29/2013
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/29/2012	05/29/2013

5.4 Measurement Result

Operation Mode: TX Mode Test Date : April 1, 2013
 Frequency Range: 30~1000MHz Temperature : 28°C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: WOLF

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Operation Mode: 2402MHz Test Date : April 1, 2013
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
42.4360	V	28.47	40.00	-11.53	QP
99.9520	V	38.70	43.50	-4.80	QP
157.4680	V	27.88	43.50	-15.62	QP
286.4904	V	36.75	46.00	-9.25	QP
314.4712	V	35.28	46.00	-10.72	QP
344.0064	V	31.20	46.00	-14.80	QP
109.2788	H	35.04	43.50	-8.46	QP
157.4680	H	37.70	43.50	-5.80	QP
228.9744	H	34.53	46.00	-11.47	QP
256.9551	H	37.75	46.00	-8.25	QP
286.4904	H	42.69	46.00	-3.31	QP
314.4712	H	38.08	46.00	-7.92	QP

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Operation Mode: 2441MHz Test Date : April 1, 2013
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
42.4360	V	28.51	40.00	-11.49	QP
99.9520	V	38.84	43.50	-4.66	QP
256.9551	V	32.54	46.00	-13.46	QP
286.4904	V	40.32	46.00	-5.68	QP
314.4712	V	39.19	46.00	-6.81	QP
344.0064	V	33.63	46.00	-12.37	QP
109.2788	H	32.80	43.50	-10.70	QP
157.4680	H	35.08	43.50	-8.42	QP
228.9744	H	32.76	46.00	-13.24	QP
256.9551	H	35.40	46.00	-10.60	QP
286.4904	H	41.24	46.00	-4.76	QP
314.4712	H	37.43	46.00	-8.57	QP

Operation Mode: 2480MHz Test Date : April 1, 2013
 Frequency Range: 30~1000MHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: KL

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV)	Limit 3m (dBuV/m)	Margin (dB)	Note
42.4360	V	29.12	40.00	-10.88	QP
99.9520	V	37.33	43.50	-6.17	QP
157.4680	V	27.85	43.50	-15.65	QP
286.4904	V	37.14	46.00	-8.86	QP
314.4712	V	34.96	46.00	-11.04	QP
344.0064	V	29.35	46.00	-16.65	QP
109.2788	H	33.87	43.50	-9.63	QP
157.4680	H	34.95	43.50	-8.55	QP
228.9744	H	32.45	46.00	-13.55	QP
256.9551	H	35.33	46.00	-10.67	QP
286.4904	H	41.17	46.00	-4.83	QP
314.4712	H	37.52	46.00	-8.48	QP

- Note:**
- (1) All Readings are Peak Value.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) The average measurement was not performed when the peak measured data under the limit of average detection.

Above 1GHz

Operation Mode: 2402MHz Test Date : April 1, 2013
 Frequency Range: 1-25GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4804.81	V	59.97	36.00	74.00	54.00	-14.03	-18.00
7205.65	V	57.63	35.11	74.00	54.00	-16.37	-18.89
9607.72	V	60.19	32.56	74.00	54.00	-13.81	-21.44
4804.84	H	54.39	33.75	74.00	54.00	-19.61	-20.25
7205.76	H	58.93	32.16	74.00	54.00	-15.07	-21.84
9607.65	H	50.88	29.41	74.00	54.00	-23.12	-24.59

Operation Mode: 2441MHz Test Date : April 1, 2013
 Frequency Range: 1-25GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4881.81	V	59.74	36.90	74.00	54.00	-14.26	-17.10
7322.83	V	57.40	34.51	74.00	54.00	-16.60	-19.49
9763.89	V	56.30	33.64	74.00	54.00	-17.70	-20.36
4881.87	H	56.07	35.04	74.00	54.00	-17.93	-18.96
7322.72	H	58.41	34.99	74.00	54.00	-15.59	-19.01
9763.65	H	51.92	31.59	74.00	54.00	-22.08	-22.41

Other harmonics emissions are lower than 20dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Operation Mode: 2480MHz Test Date : April 1, 2013
 Frequency Range: 1-25GHz Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Measured Distance: 3m Test By: Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
4959.88	V	57.13	37.90	74.00	54.00	-16.87	-16.10
7439.84	V	60.16	35.37	74.00	54.00	-13.84	-18.63
9919.85	V	53.71	35.18	74.00	54.00	-20.29	-18.82
4960.86	H	59.56	35.99	74.00	54.00	-14.44	-18.01
7441.79	H	58.65	34.53	74.00	54.00	-15.35	-19.47
9924.69	H	50.86	28.51	74.00	54.00	-23.14	-25.49

Other harmonics emissions are lower than 20dB below the allowable limit.


- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6. Channel Separation test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/29/2012	05/29/2013

6.4 Measurement Results:

The following table is the setting of spectrum analyzer.



EMI Test Receiver	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold


All the modes GFSK, 1/4Π-DQPSK,8DPSK have been tested and the worst result recorded in the following pages.

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 7, 2013
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 20dB Down BW(kHz)
1	2402	1000.00	>849.492
40	2441	1000.00	>857.313
79	2480	1000.00	>857.628

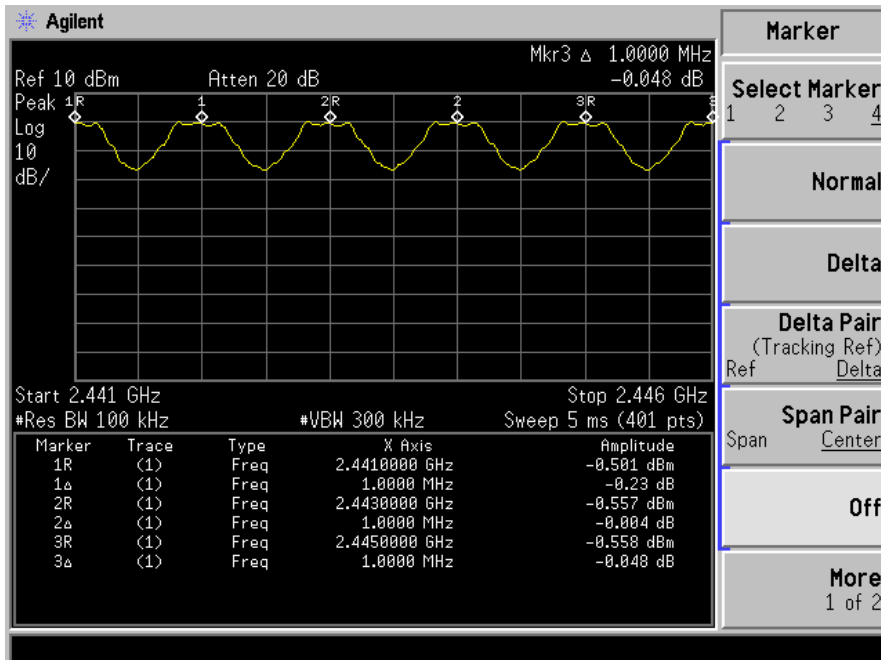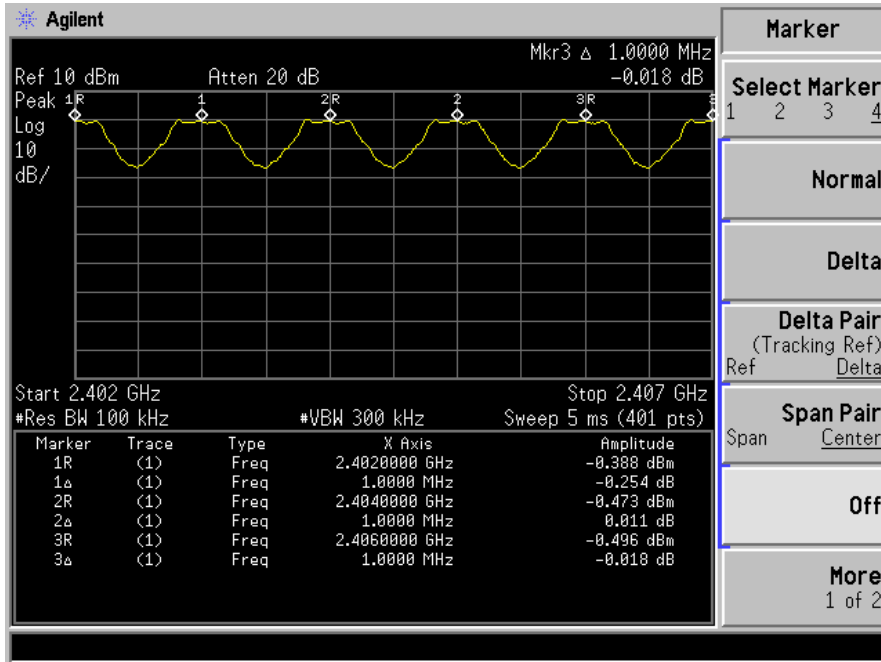


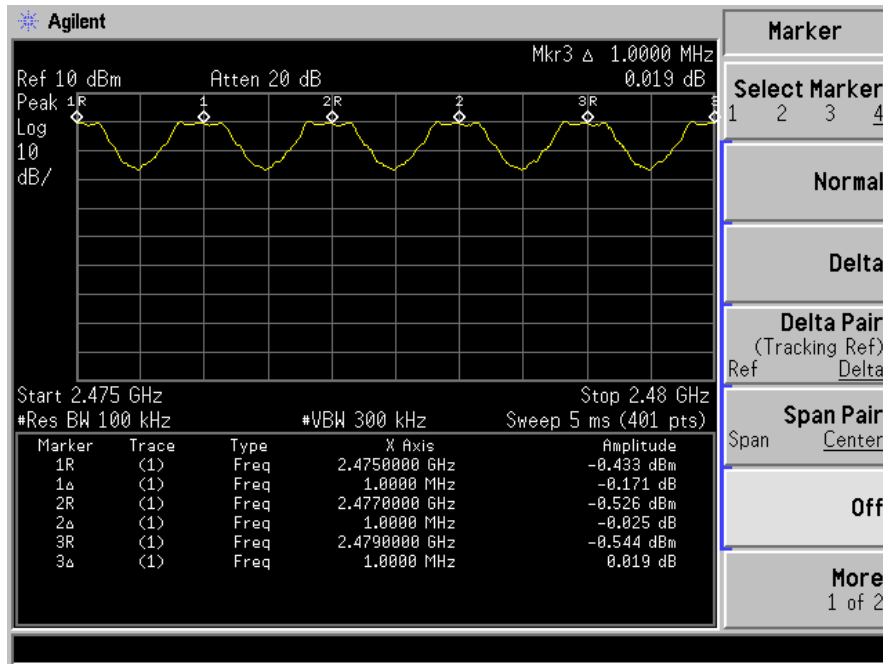

Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Modulation: 1/4 π DQPSK



Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>800
40	2441	1000.00	>811.33
79	2480	1000.00	>809.33

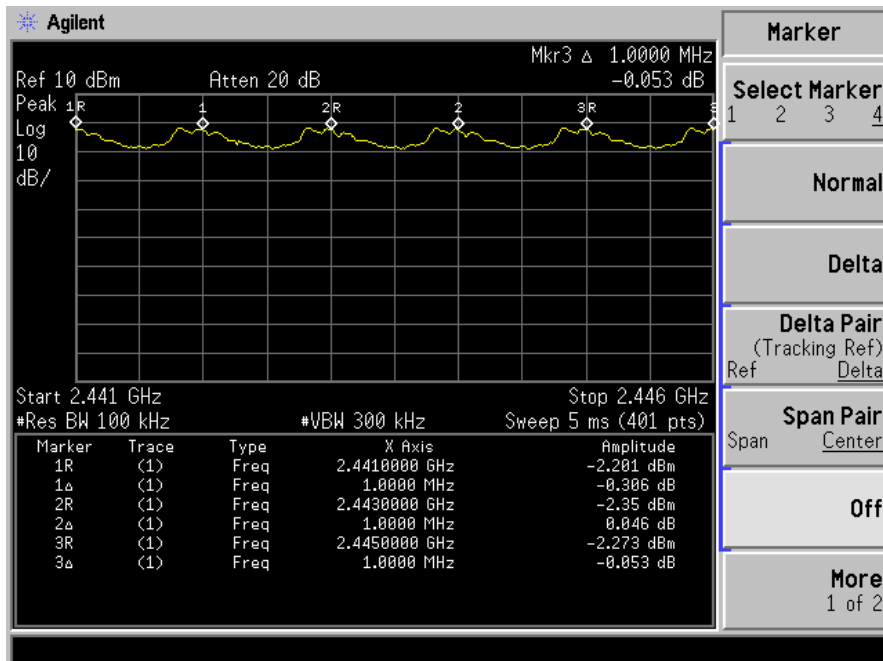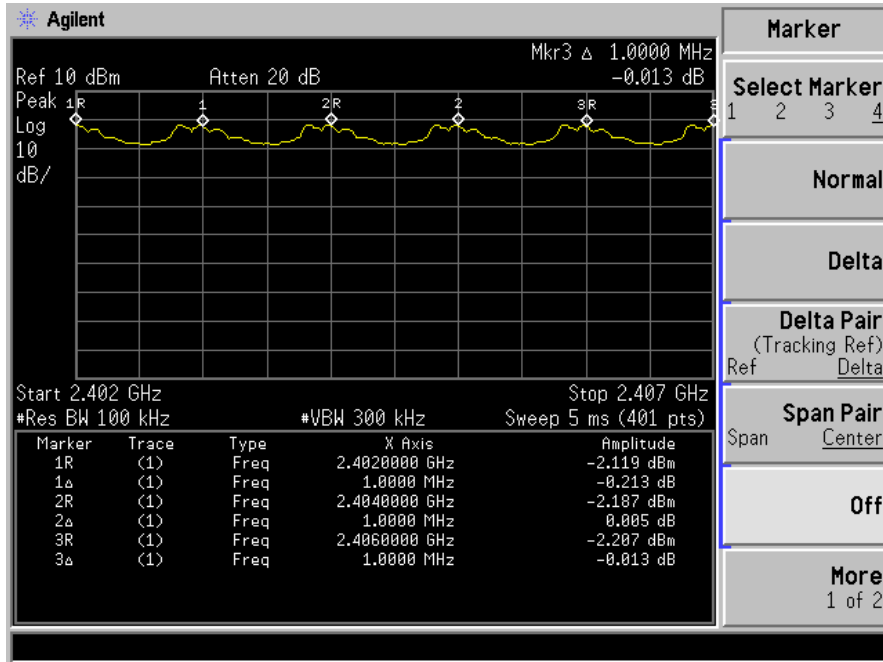


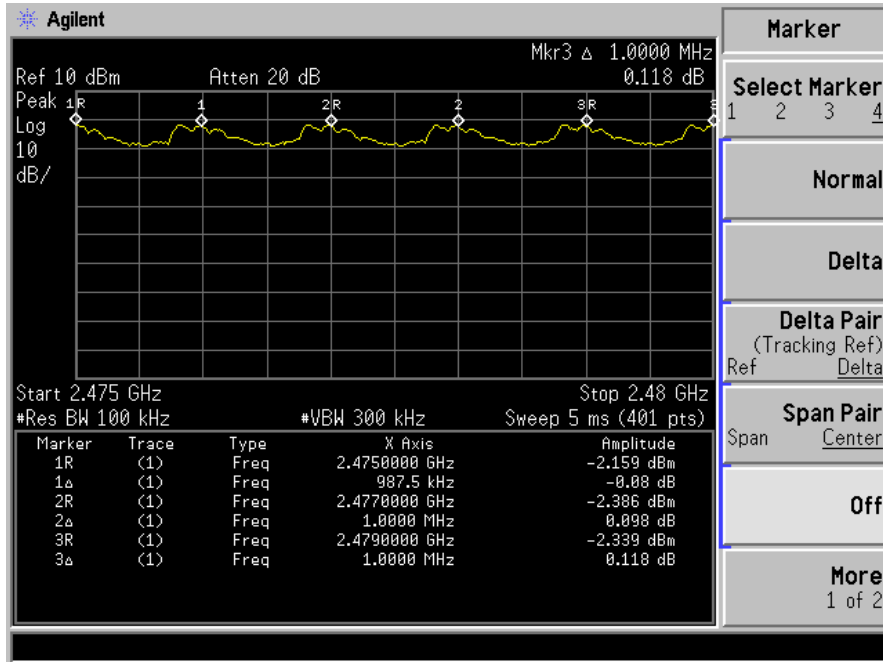

Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Modulation: 8DPSK

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
1	2402	1000.00	>810
40	2441	1000.00	>809.33
79	2480	1000.00	>807.33

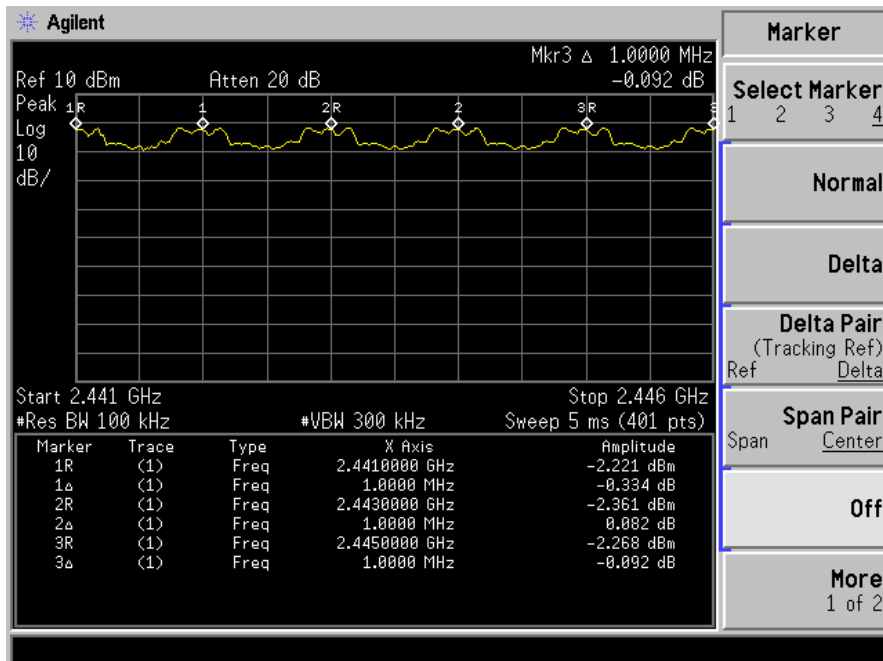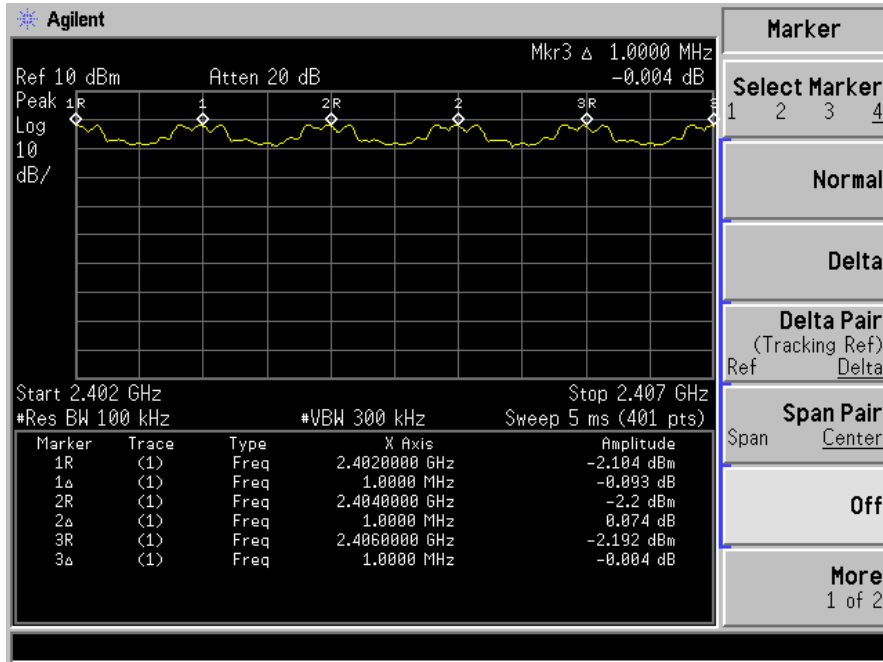

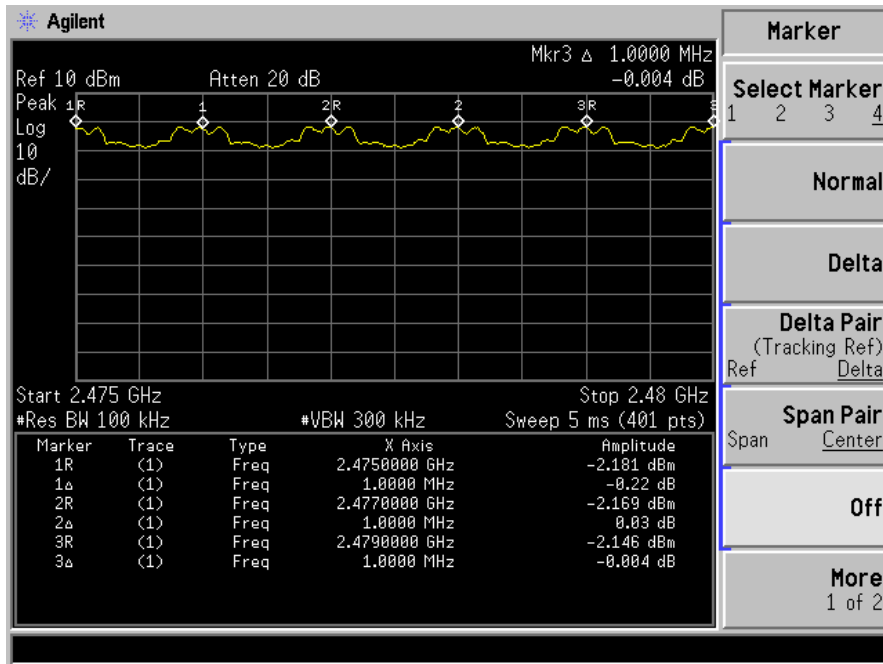


7. Bandwidth test

7.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/29/2013	05/29/2013

7.4 Measurement Results:



All the modes GFSK, 1/4 Π-DQPSK, 8DQPSK have been tested and the worst result recorded in the following pages.


7.4.1 20dB Bandwidth test data Chart:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date:	April 7, 2013
Test By:	Andy	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	GFSK		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	849.492
40	2441	857.313
79	2480	857.628

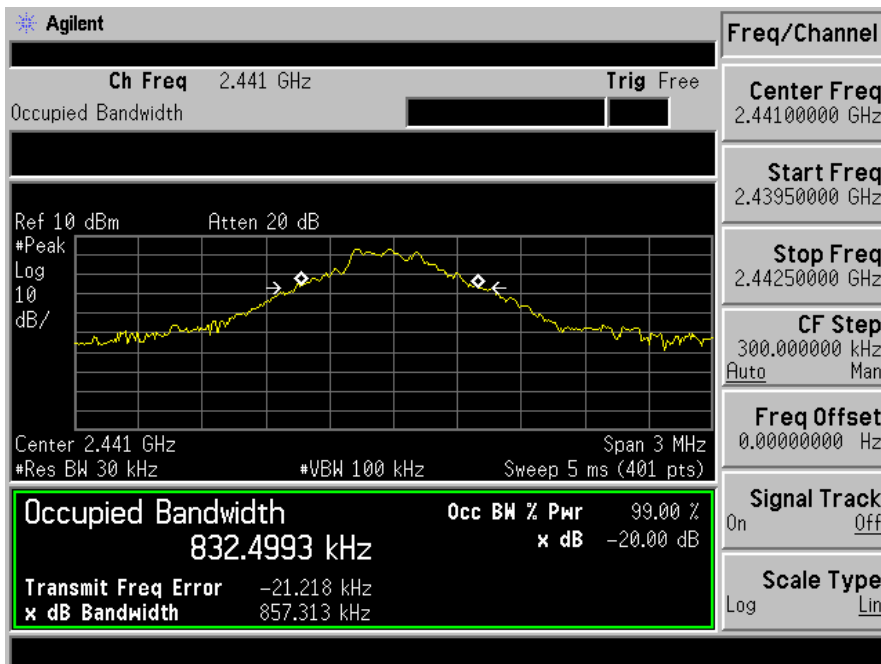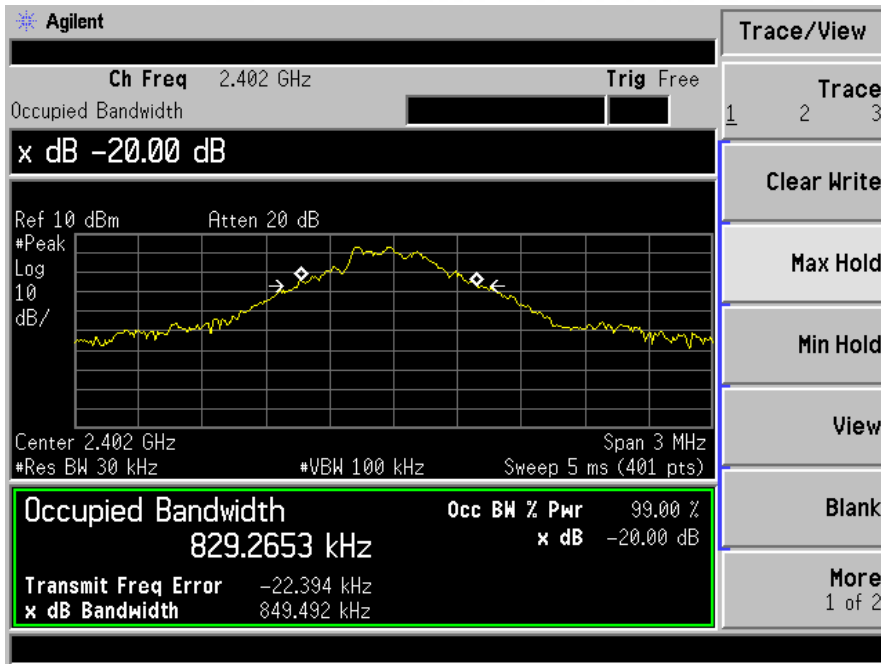


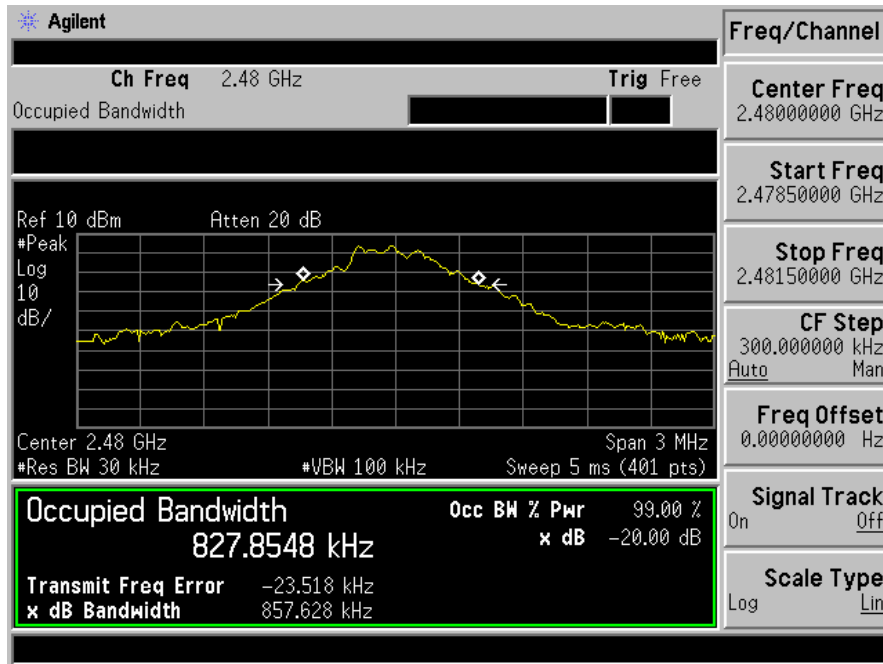

Spectrum Detector:	PK	Test Date:	April 7, 2013
Test By:	Andy	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	1/4Π dqpsk		



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1200
40	2441	1217
79	2480	1214

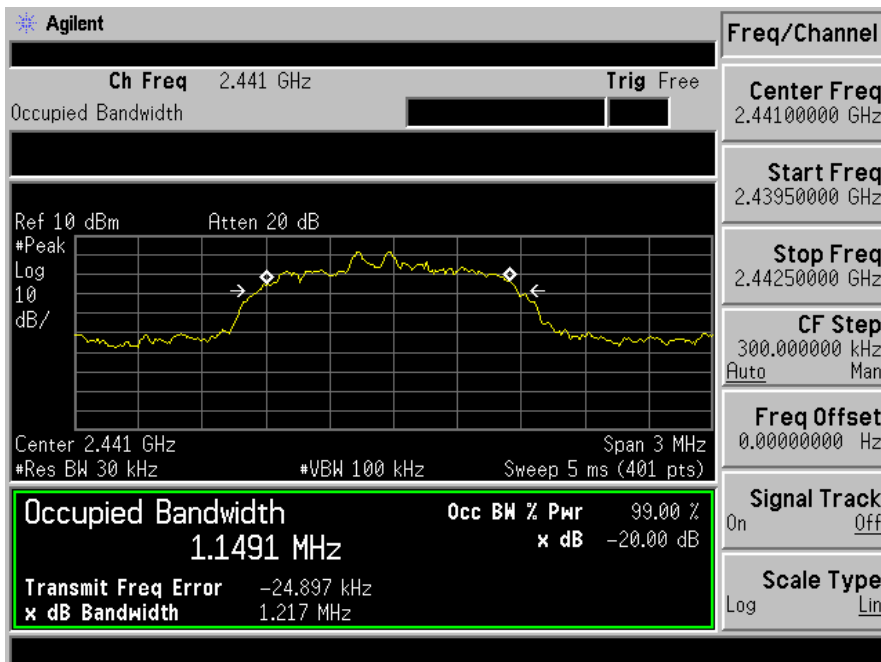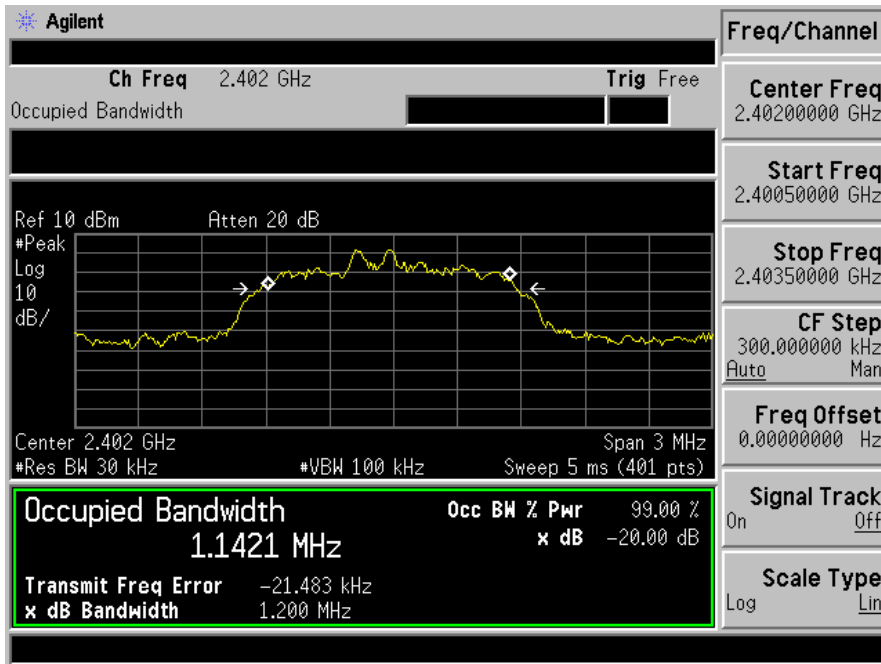


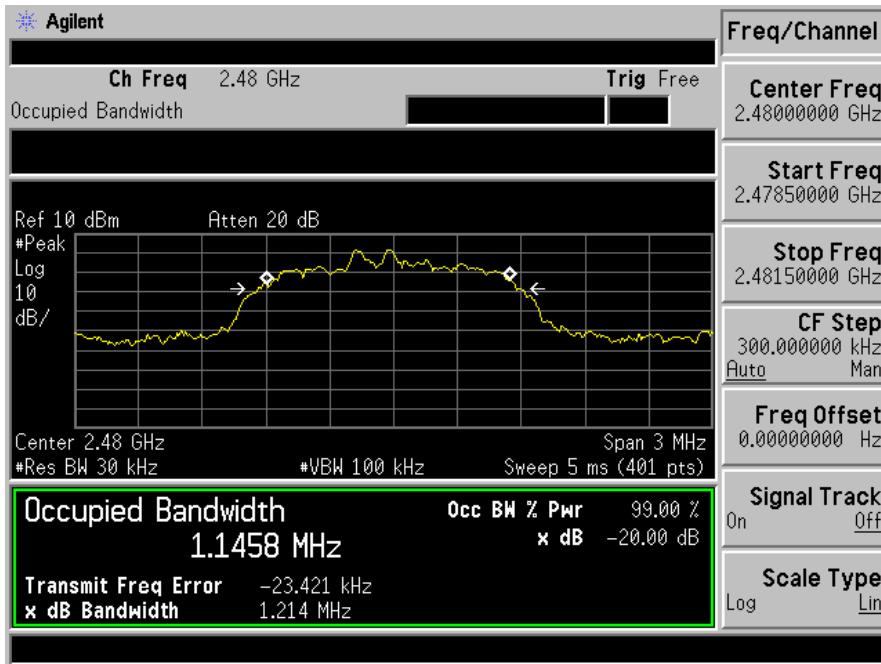

Spectrum Detector:	PK	Test Date:	April 7, 2013
Test By:	Andy	Temperature:	28 °C
Test Result:	PASS	Humidity:	65 %
Modulation:	8DPSK		

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
1	2402	1215
40	2441	1214
79	2480	1211

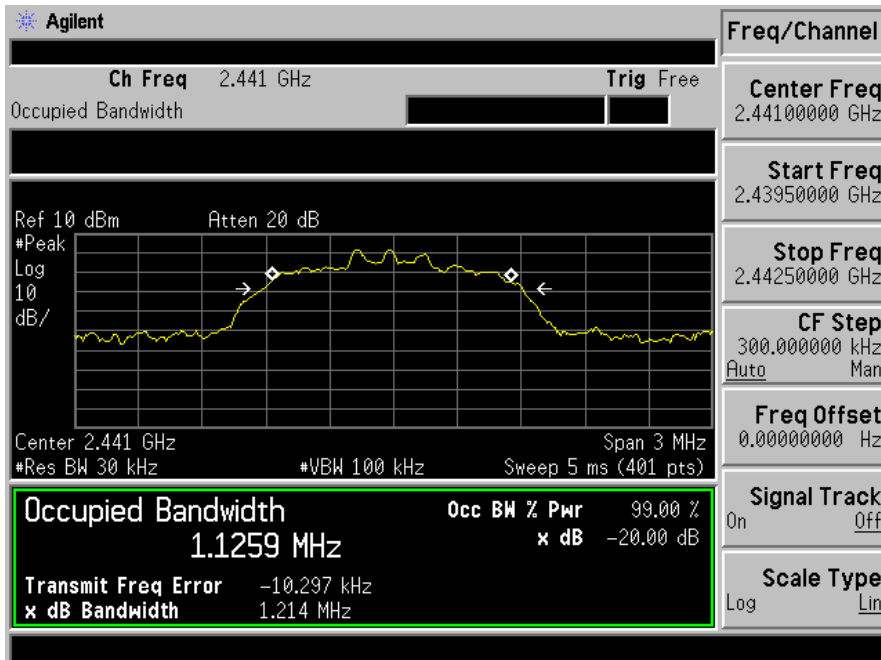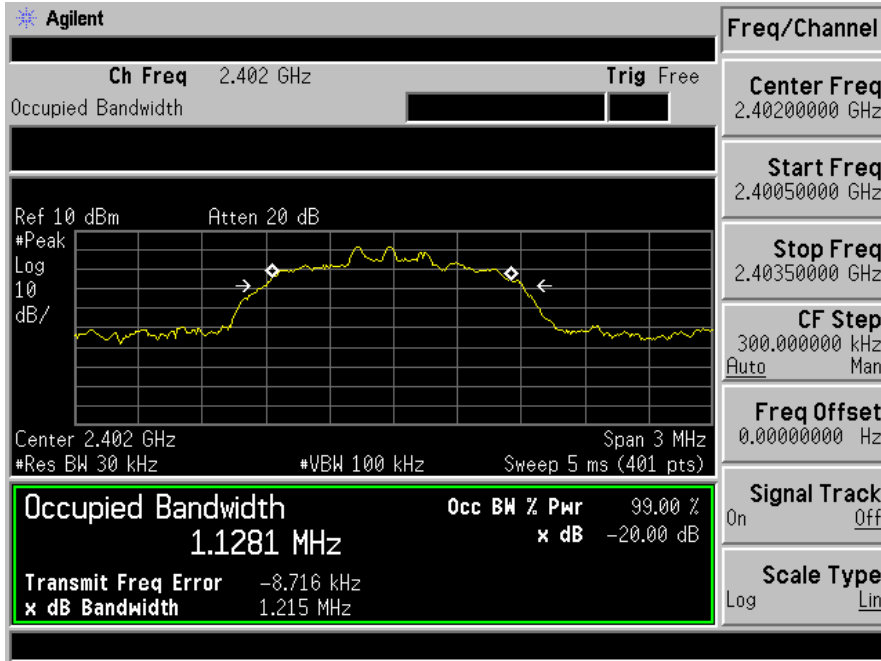

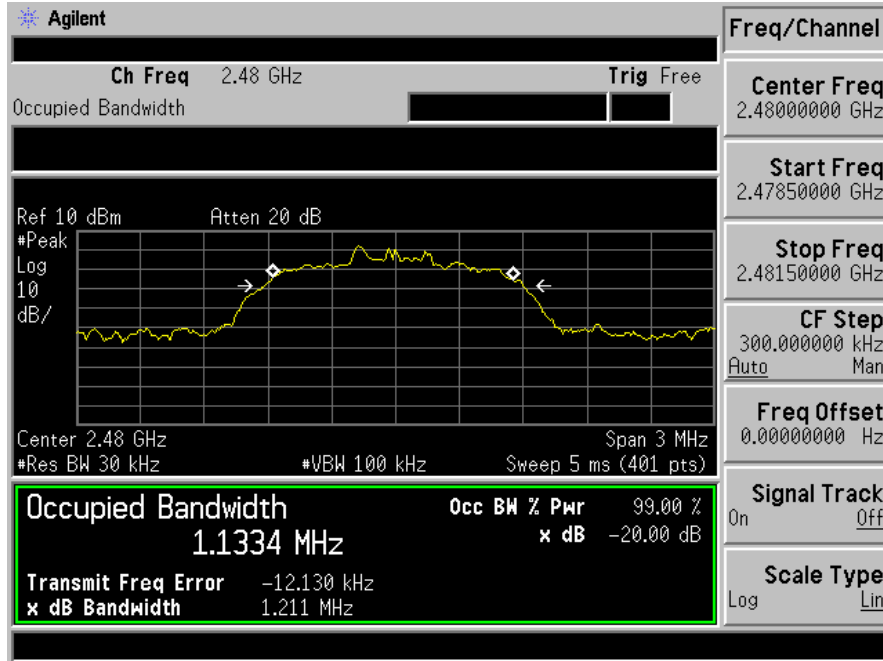


8. Quantity of Hopping Channel Test

8.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

8.2 Test SET-UP (Block Diagram of Configuration)



8.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/29/2012	05/29/2013


8.4 Measurement Results:

All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages all modulation methods do not exceed the above mentioned limits.

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	April 7, 2013
Test By:	Andy	Temperature :	28 °C
Test Result:	PASS	Humidity :	65 %

Hopping Channel Frequency Range	Quantity of Hopping Channel	Quantity of Hopping Channel limit
2402-2480	79	≥15

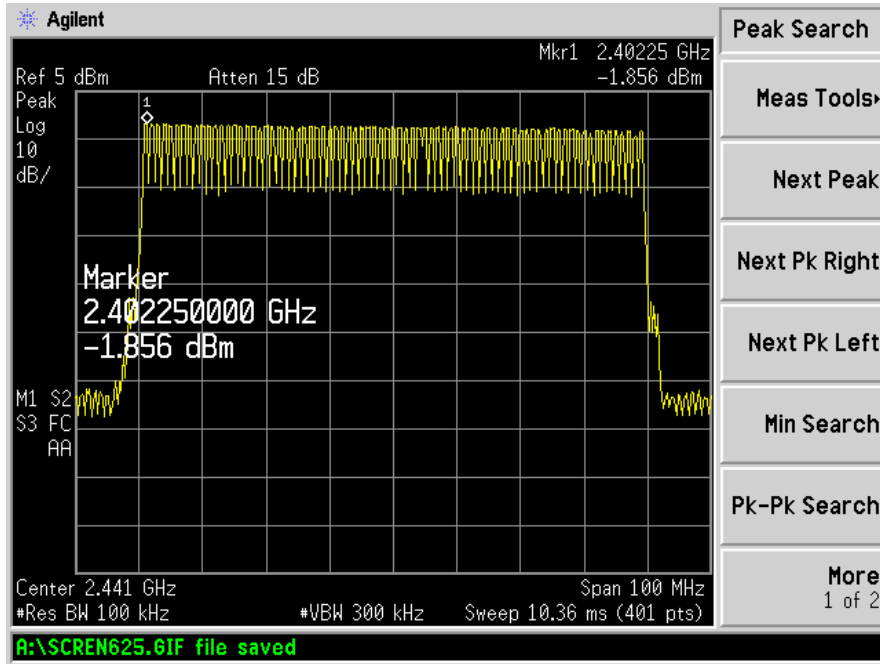


9. Time of Occupancy (Dwell Time) test

9.1 Measurement Procedure

- Check the calibration of the measuring instrument(SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- Repeat above procedures until all different time-slot modes have been completed.

9.2 Test SET-UP (Block Diagram of Configuration)



9.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/29/2012	05/29/2013

9.4 Measurement Results:


All the modulation modes were tested and the data of the GFSK mode are recorded in the following pages. Low, Middle and Highest channels have been tested, the worst test data channel 2402 was recorded in this report, and all modulation methods do not exceed the above mentioned limits.

Refer to attached data chart.


Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.4000	128.000	400
DH3	$1600/(4*79) \times 31.6 = 160$	1.638	262.084	400
DH5	$1600/(6*79) \times 31.6 = 106.67$	2.900	309.343	400


DH1

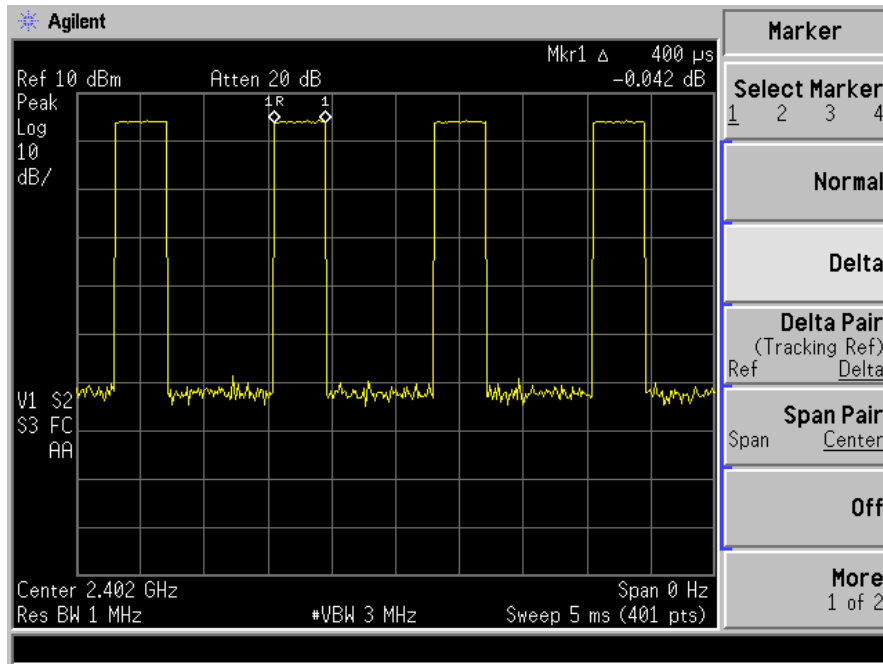

DH3

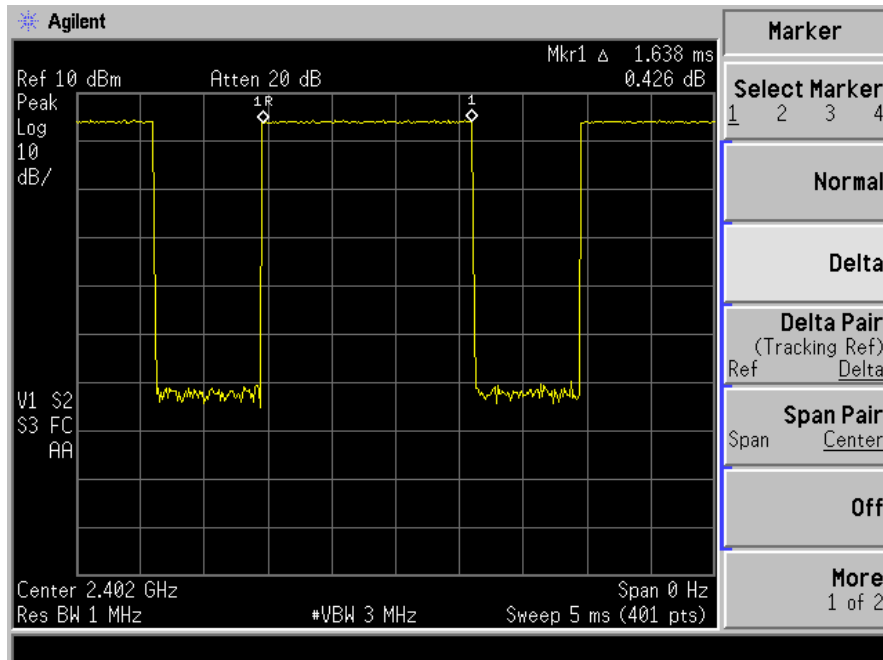

DH5

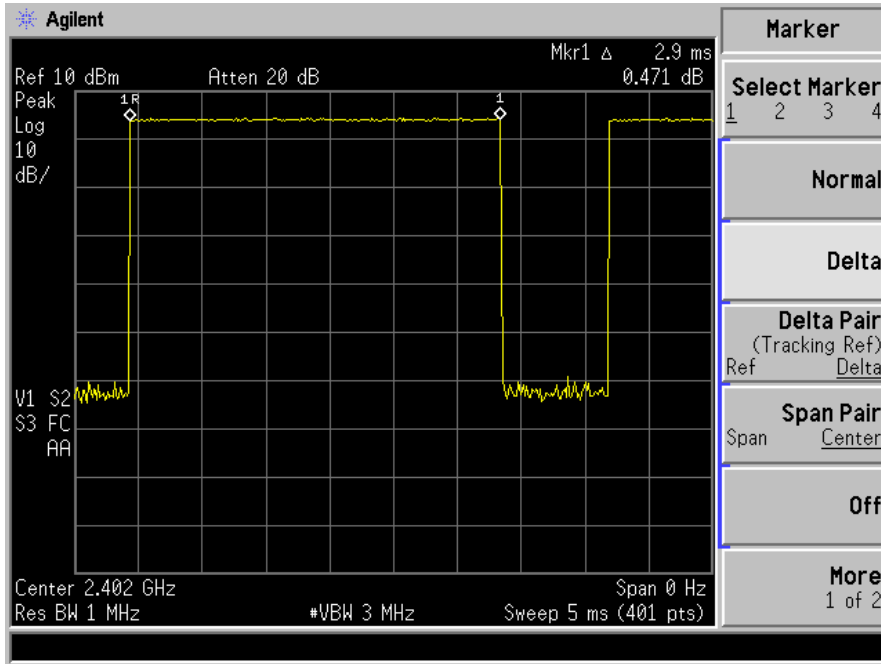


10. MAXIMUM PEAK OUTPUT POWER TEST

10.1 Measurement Procedure

- Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- The center frequency of the spectrum analyzer is set to the fundamental frequency and using proper RBW and VBW setting.
- Measure the captured power within the band and recording the plot.
- Repeat above procedures until all frequencies required were complete.

10.2 Test SET-UP (Block Diagram of Configuration)



10.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSP7	839511/010	05/29/2012	05/29/2013
Power meter	Boonton	4232A	29001	05/29/2012	05/29/2013
Power sensor	Boonton	51011-EMC	31184	05/29/2012	05/29/2013

10.4 Measurement Results:

All the modes GFSK, 1/4π-DQPSK, 8DQPSK have been tested and the worst result recorded in the following pages all modulation methods do not exceed the limits.

Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Modulation: GFSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(W)	Pass/Fail
1	2402.00	3.80	2.40	1	PASS
40	2441.00	3.42	2.20	1	PASS
79	2480.00	3.10	2.04	1	PASS

Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Modulation: 1/4 II -DQPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	3.04	2.01	125	PASS
40	2441.00	2.87	1.94	125	PASS
79	2480.00	2.76	1.89	125	PASS

Spectrum Detector: PK Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test Result: PASS Humidity : 65 %
 Modulation: 8DPSK

Channel number	Channel Frequency (MHz)	Peak Power output(dBm)	Peak Power output(mW)	Peak Power Limit(mW)	Pass/Fail
1	2402.00	2.95	1.97	125	PASS
40	2441.00	2.85	1.93	125	PASS
79	2480.00	2.64	1.84	125	PASS

11. Band EDGE test

11.1 Measurement Procedure

1. The EUT was Operating in hopping mode or could be controlled its channel. Printed out test result from the spectrum by hard copy function.
2. The EUT was placed on a turn table which is 0.8m above ground plane.
3. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
4. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
5. Repeat above procedures until all frequency measured were complete.

11.2 Test SET-UP (Block Diagram of Configuration)

As 5.2 Test set up (B) and (C)

11.3 Measurement Equipment Used:

Same as 5.3 Radiated Emission Measurement.

11.4 Measurement Results:

All the modes GFSK, 1/4 Π-DQPSK, 8DQPSK have been tested and the worst result recorded in the following pages all modulation methods do not exceed the limits.

Spectrum Detector:	PK/AV	Test Date :	April 7, 2013
Test By:	Andy	Temperature :	28 °C
Test channel:	00	Humidity :	65 %
Modulation:	GFSK		

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2388.62	H	49.86	38.29	74	54
2388.09	V	46.48	35.42	74	54

Spectrum Detector:	PK/AV	Test Date :	April 7, 2013
Test By:	Andy	Temperature :	28 °C
Test channel:	78	Humidity :	65 %
Modulation:	GFSK		

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2484.37	H	50.68	39.50	74	54
2487.7	V	47.79	36.64	74	54

Spectrum Detector: PK/AV Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test channel: 00 Humidity : 65 %
 Modulation: 1/4 Π-DQPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2387.99	H	47.79	36.48	74	54
2386.25	V	46.66	35.75	74	54

Spectrum Detector: PK/AV Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test channel: 78 Humidity : 65 %
 Modulation: 1/4 Π-DQPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2488.59	H	48.25	37.11	74	54
2487.69	V	46.65	35.29	74	54

Spectrum Detector: PK/AV Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test channel: 00 Humidity : 65 %
 Modulation: 8DPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2385.87	H	46.84	35.50	74	54
2387.12	V	45.64	34.65	74	54

Spectrum Detector: PK/AV Test Date : April 7, 2013
 Test By: Andy Temperature : 28 °C
 Test channel: 78 Humidity : 65 %
 Modulation: 8DPSK

Frequency (MHz)	Polarity	Level (dBuV/m)		Limited (dBuV/m)	
		PK	AV	PK	AV
2487.77	H	47.76	35.75	74	54
2485.6	V	46.49	34.88	74	54

12. Antenna Port Emission

12.1 Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	Agilent	E4407B	88156318	05/29/2012	05/29/2013

12.2 Measuring Instruments and setting


The following table is the setting of spectrum analyzer.

Spectrum analyzer	Setting
Attenuation	Auto
RB	100kHz
VB	300kHz
Detector	Peak
Trace	Max hold

12.3 Test Procedures

The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels, the limit was determined by attenuation 20dB of the RF peak power output.



12.4 Block Diagram of Test setup





12.5 Test Result

PASS.



TX 2402MHz

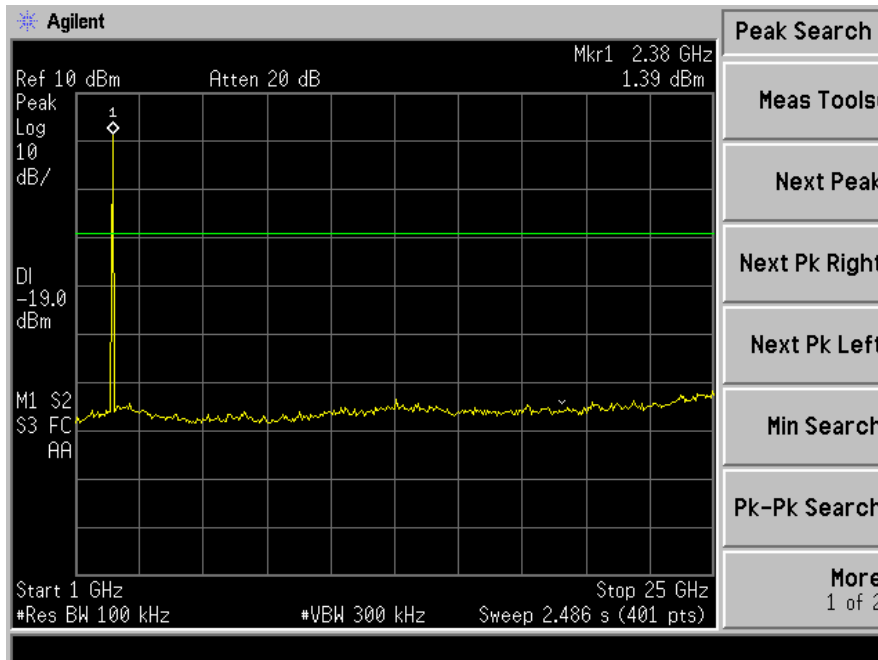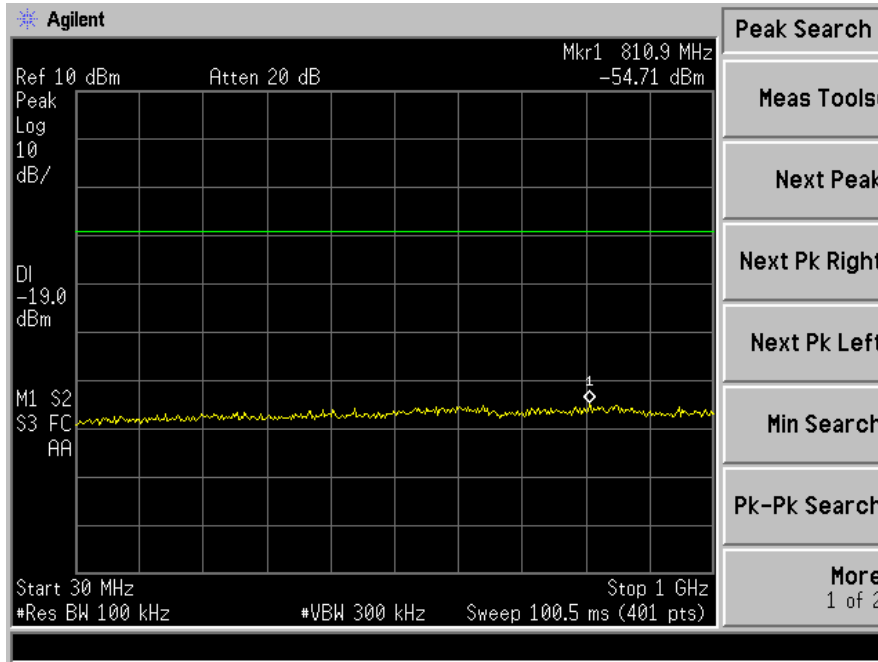

TX 2441MHz

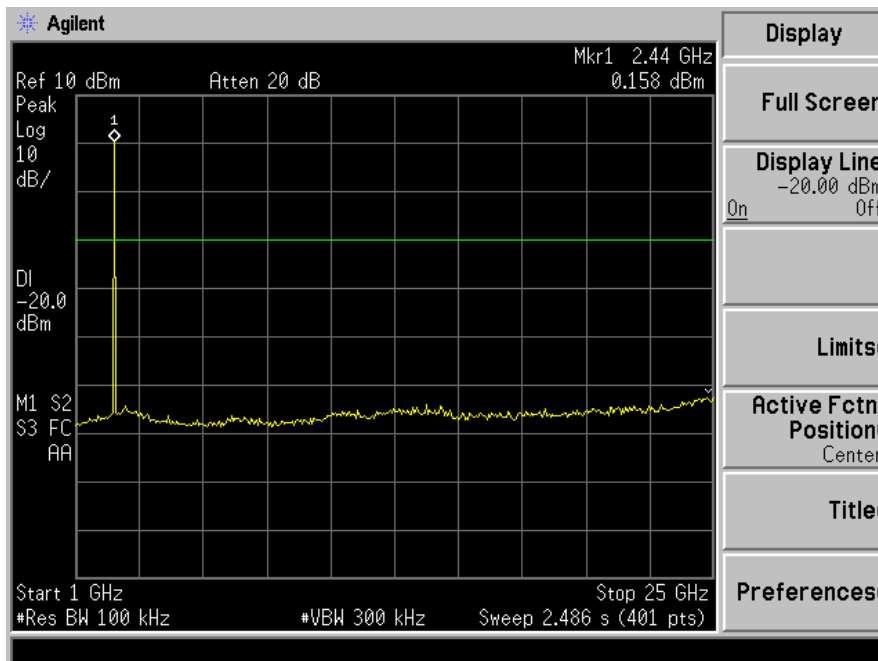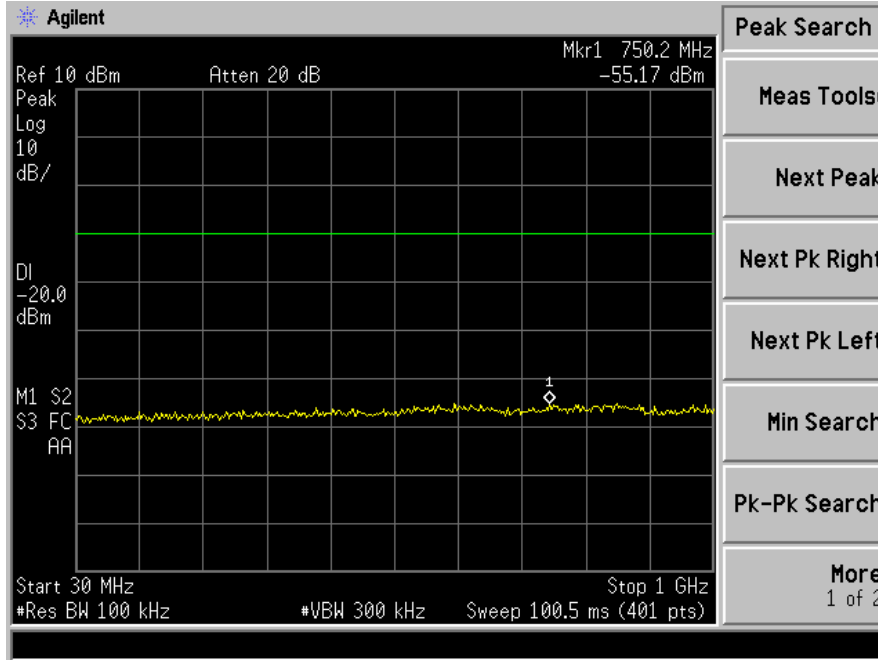

TX 2480MHz

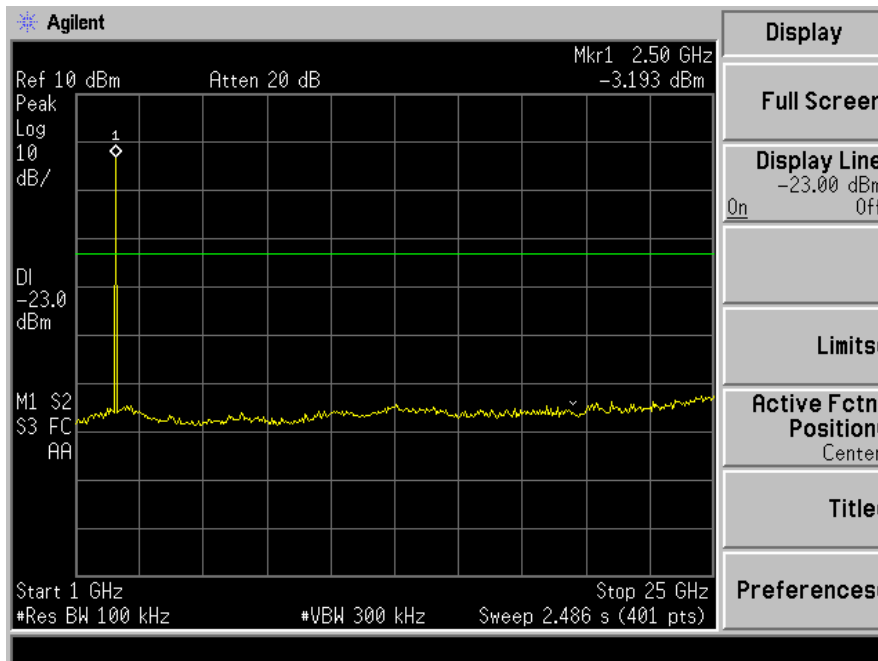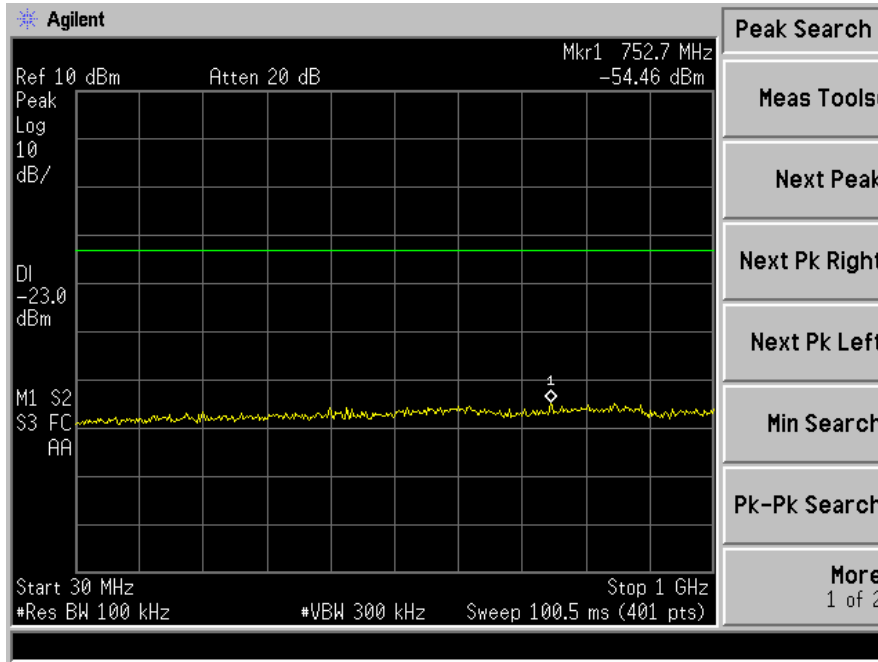

13. Antenna Application

13.1 Antenna requirement

The EUT'S antenna is met the requirement of FCC part 15C section 15.203 and 15.240.

FCC part 15C section 15.247 requirements:

Systems operating in the 2402-2480MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

13.2 Result

The EUT's antenna used a chip antenna and integrated on PCB, The antenna's gain is 0dBi and meets the requirement.