



243 Jubug-Ri, Yangji-Myeon, Yongin-Si, Gyeonggi-Do, Korea 449-822
 Tel: +82-31-323-6008 Fax: +82-31-323-6010
<http://www.ltalab.com>



Dates of Tests: NOV 3 ~ NOV 10, 2008
 Test Report S/N: LR500190811A
 Test Site : LTA CO., LTD.

CERTIFICATION OF COMPLIANCE

FCC ID.	SXV-COWON-S9
APPLICANT	COWON SYSTEMS, Inc.

Equipment Class	:	Part 15 Spread Spectrum Transmitter (DSS)
Manufacturing Description	:	Portable Multimedia Player
Manufacturer	:	COWON SYSTEMS, Inc.
Model name	:	COWON S9 DMB, COWON S9
Test Device Serial No.:	:	Identical prototype
Rule Part(s)	:	FCC Part 15.247 Subpart C; ANSI C-63.4-2003
Frequency Range	:	2402 ~ 2480MHz
RF power	:	Maximum 5.67dBm - Conducted
Data of issue	:	November 12, 2008

This test report is issued under the authority of:

The test was supervised by:

 Dong -Min JUNG, Technical Manager

 Kyung-Taek LEE, Test Engineer

This test result only responds to the tested sample. It is not allowed to copy this report even partly without the allowance of the test laboratory. This report must not be used by the applicant to claim product endorsement by any agency.



NVLAP LAB Code.: 200723-0

TABLE OF CONTENTS

1. GENERAL INFORMATION'S	3
2. INFORMATION'S ABOUT TEST ITEM	4
3. TEST REPORT	5
3.1 SUMMARY OF TESTS	5
3.2 TECHNICAL CHARACTERISTICS TEST	7
3.2.1 CARRIER FREQUENCY SEPARATION	7
3.2.2 NUMBER OF HOPPING FREQUENCIES	9
3.2.3 20 dB BANDWIDTH	11
3.2.4 TIME OF OCCUPANCY (Dwell Time)	18
3.2.5 TRANSMITTER OUTPUT POWER	24
3.2.6 BAND – EDGE & SPURIOUS	28
3.2.7 FIELD STRENGTH OF HARMONICS	39
3.2.8 AC CONDUCTED EMISSIONS	43
APPENDIX	
APPENDIX TEST EQUIPMENT USED FOR TESTS	51

1. General information's

1-1 Test Performed

Company name : LTA Co., Ltd.
 Address : 243, Jubug-ri, Yangji-Myeon, Youngin-Si, Kyunggi-Do, Korea. 449-822
 Web site : <http://www.ltalab.com>
 E-mail : chahn@ltalab.com
 Telephone : +82-31-323-6008
 Facsimile : +82-31-323-6010

Quality control in the testing laboratory is implemented as per ISO/IEC 17025 which is the “General requirements for the competents of calibration and testing laboratory”.

1-2 Accredited agencies

LTA Co., Ltd. is approved to perform EMC testing by the following agencies:

Agency	Country	Accreditation No.	Validity	Reference
NVLAP	U.S.A	200723-0	2009-09-30	ECT accredited Lab.
RRL	KOREA	KR0049	2009-06-20	EMC accredited Lab.
FCC	U.S.A	610755	2011-04-22	FCC filing
VCCI	JAPAN	R2133, C2307	2011-06-21	VCCI registration
IC	CANADA	IC5799	2010-05-03	IC filing

2. Information's about test item

2-1 Applicant & Manufacturer

Company name : COWON SYSTEMS, Inc.
Address : COWON Tower, 689-3, Yeoksam-dong, Gangnam-gu, Seoul 135-080, Korea
Tel / Fax : +82-2-6900-0102 / +82-2-6900-0022

2-2 Equipment Under Test (EUT)

Trade name : Portable Multimedia Player
FCC ID : SXV-COWON-S9
Model name : COWON S9 DMB, COWON S9
→ Refer to the Model Description
Serial number : Identical prototype
Memory size : 2GB / 4GB / 8GB / 16GB
Date of receipt : November 3, 2008
EUT condition : Pre-production, not damaged
Antenna type : Bluetooth chip antenna with Max. -4.38dBi gain
Frequency Range : 2402 ~ 2480MHz
RF output power : Maximum 5.67dBm - Conducted
Number of channels : 79
Channel spacing : 1MHz
Channel Access Protocol : Frequency Hopping
Type of Modulation : Normal Mode(GFSK), EDR Mode(DQPSK, 8DPSK)
Power Source for Batt. : Battery: 3.7V (Li-Polymer RECHARGEABLE BATTERY)

2-3 Tested frequency

	LOW	MID	HIGH
Frequency (MHz)	2402	2441	2480

2-4 Ancillary Equipment – Bluetooth + Play mode

Equipment	Model No.	Serial No.	Manufacturer
-	-	-	-
-	-	-	-

2-5 Ancillary Equipment – USB mode

Equipment	Model No.	Serial No.	Manufacturer
PC	HP Compaq dx7400	CNG8330J9S	HP
Monitor	HPL1710	CNC816QHFL	HP
Mouse	MO56UO	510022473	DELL
Keyboard	SK-8115	N/A	DELL
Print	Deskjet 600K	SG7631B1XX	HP
-	-	-	-

2-6 Model Description

Model	Bluetooth	DMB Module
COWON S9	O	X
COWON S9 DMB	O	O

3. Test Report

3.1 Summary of tests

FCC Part Section(s)	Parameter	Limit	Test Condition	Status (note 1)
15.247(a)	Carrier Frequency Separation	> 25 kHz	Conducted	C
15.247(a)	Number of Hopping Frequencies	> 15 hops		C
15.247(a)	20 dB Bandwidth 99% Bandwidth	> 1.5 MHz		C
15.247	Dwell Time	< 0.4 seconds		C
15.247(b)	Transmitter Output Power	< 250 mWatt		C
15.247(d)	Conducted Spurious emission	> 20 dBc		C
15.247(d)	Band Edge	> 20 dBc		C
15.249 / 15.209	Field Strength of Harmonics	< 54 dBuV (at 3m)		Radiated
15.109	Field Strength	-	C	
15.207 /15.107	AC Conducted Emissions	EN 55022	Line Conducted	C
15.203	Antenna requirement	-	-	C

Note 1: C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable

Note 2: The data in this test report are traceable to the national or international standards.

→ Antenna Requirement

The COWON SYSTEMS Inc. FCC ID: SXV-COWON-S9 unit complies with the requirement of §15.203.
The antenna is Chip antenna.

The sample was tested according to the following specification:
FCC Parts 15.247; ANSI C-63.4-2003

3.2 Transmitter requirements

3.2.1 Carrier Frequency Separation

Procedure:

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peaks of the adjacent channels using the marker-delta function was recorded as the measurement results.

The spectrum analyzer is set to:

- Span = 3 MHz (wide enough to capture the peaks of two adjacent channels)
- RBW = 10 kHz (1% of the span or more) Sweep = auto
- VBW = 10 kHz Detector function = peak
- Trace = max hold

Measurement Data:

Test Results	
Carrier Frequency Separation (MHz)	Result
1.000	Complies

- See next pages for actual measured spectrum plots.

Minimum Standard:

The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater.

Measurement Setup


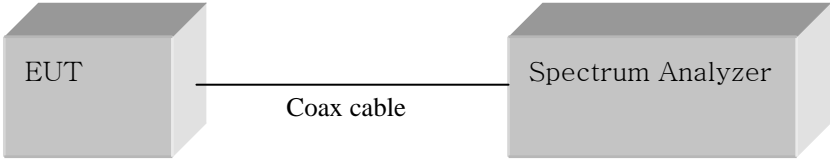



Figure 1: Measurement setup for the carrier frequency separation

Carrier Frequency Separation

Normal Mode

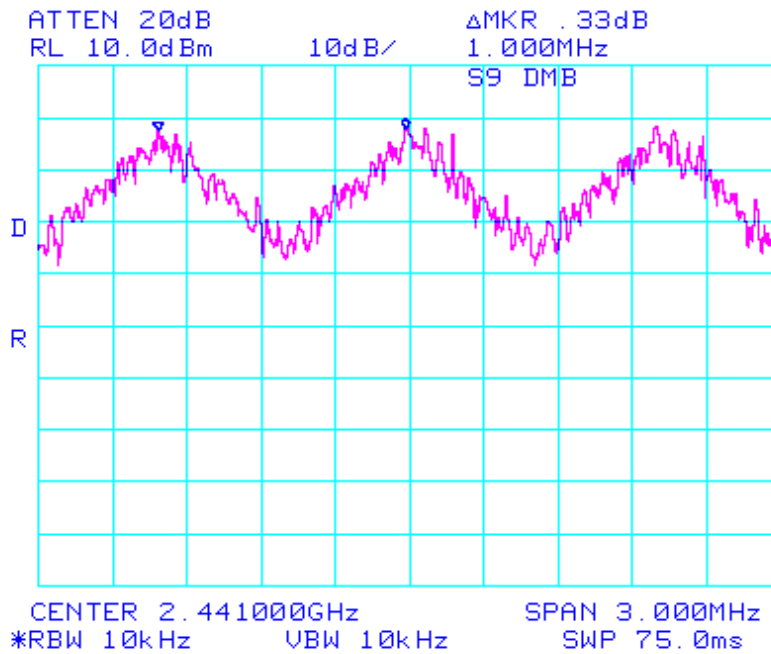

8DPSK Mode

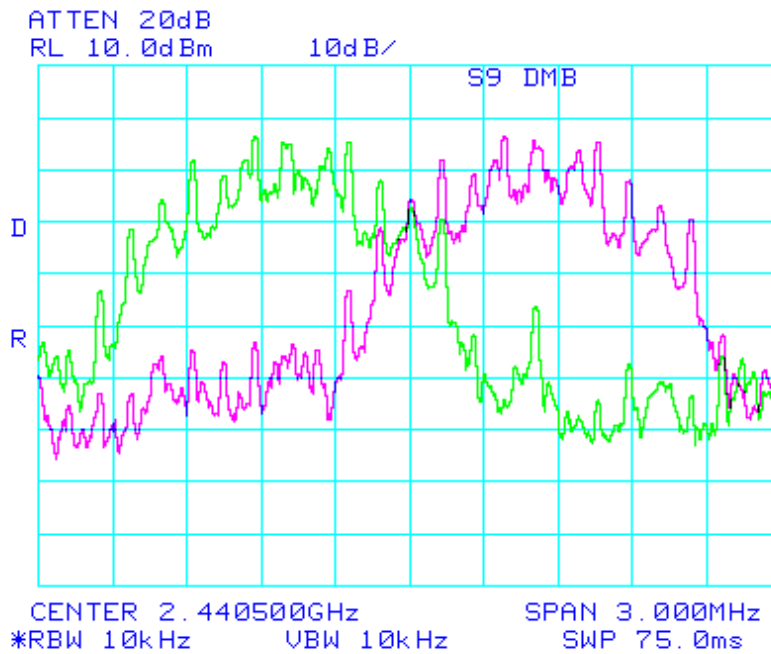

3.2.2 Number of Hopping Frequencies

Procedure:

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

To get higher resolution, four frequency ranges within the 2400 ~ 2483.5 MHz FH band were examined.

The spectrum analyzer is set to:

Frequency range 1: Start = 2400.0MHz, Stop = 2441.5 MHz

 2: Start = 2441.5MHz, Stop = 2483.5 MHz

RBW = 100 kHz (1% of the span or more) Sweep = auto

VBW = 100 kHz (VBW \geq RBW) Detector function = peak

Trace = max hold Span > 40MHz

Measurement Data: Complies

Total number of Hopping Channels	79
---	----

- See next pages for actual measured spectrum plots.



Minimum Standard:

At least 15 hops

Measurement Setup

Same as the Chapter 3.2.1 (Figure 1)

Number of Hopping Frequencies

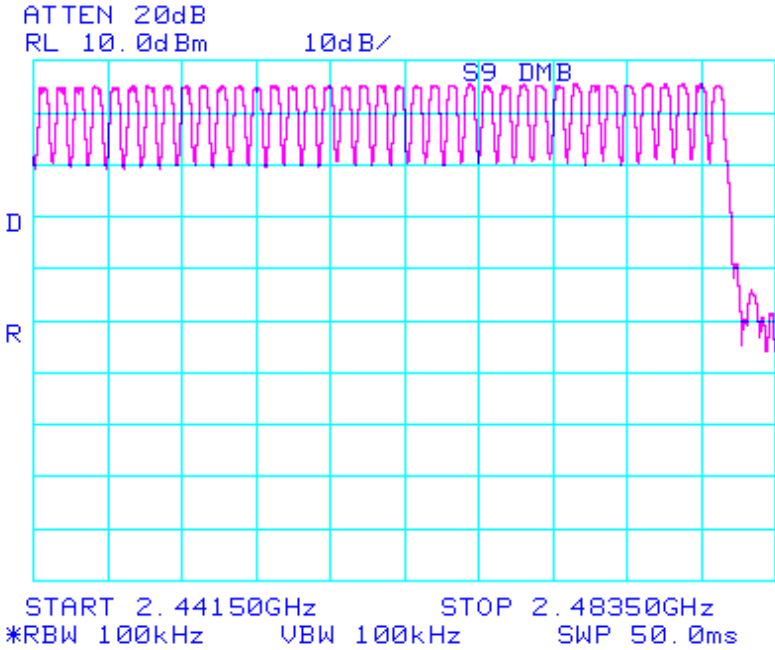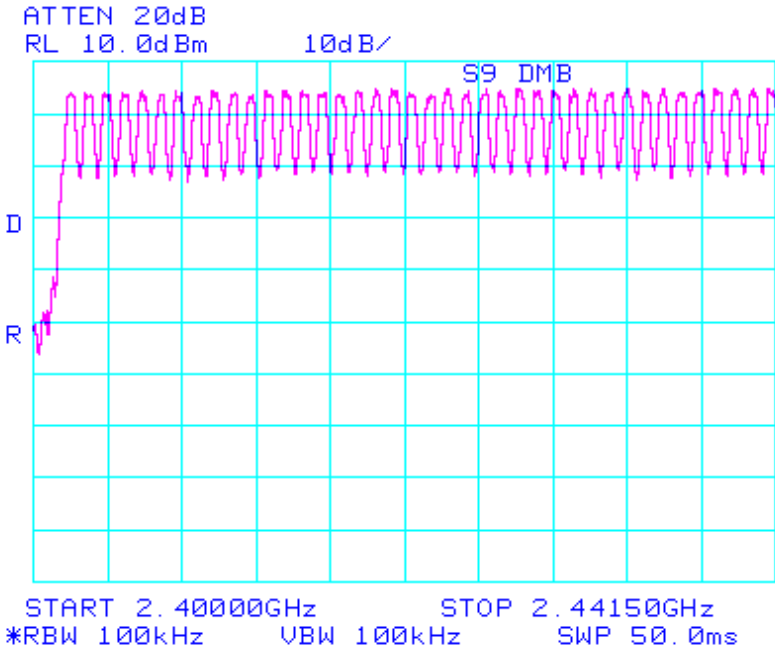

3.2.3 20 dB Bandwidth

Procedure:

The bandwidth at 20 dB below the highest inband spectral density was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 2 or 3 times of the 20 dB bandwidth)

RBW = 30 kHz

Sweep = auto

VBW = 30 kHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

dB/Div = 5dB

Measurement Data: Normal Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	0.940	0.895
2441	39	0.955	0.880
2480	78	0.955	0.900

Measurement Data: 8DPSK Mode

Frequency (MHz)	Channel No.	Test Results(MHz)	
		20dB Bandwidth	99% Bandwidth
2402	0	1.285	1.185
2441	39	1.275	1.185
2480	78	1.275	1.190

- See next pages for actual measured spectrum plots.

Minimum Standard:


The EUT shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of 20dB bandwidth of the hopping channel, whichever is greater. Therefore, limit of 20dB bandwidth is 1.5MHz.

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Channel 1 of normal mode

20 dB Bandwidth

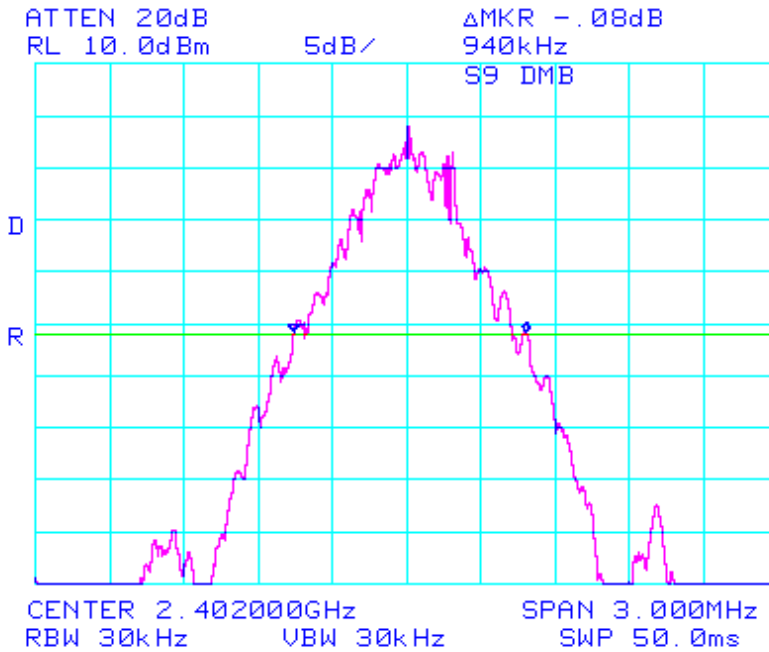


99% Bandwidth

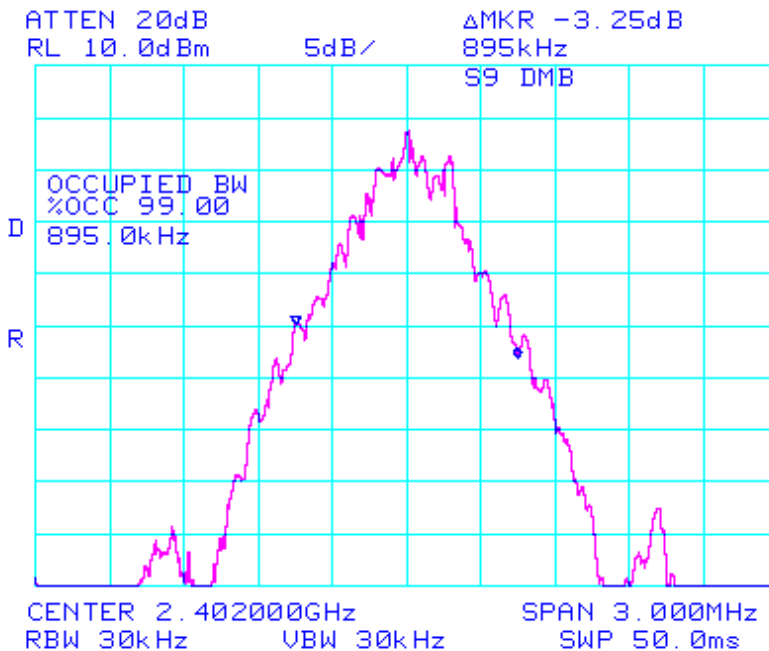


Channel 1 at 8DPSK mode


20 dB Bandwidth

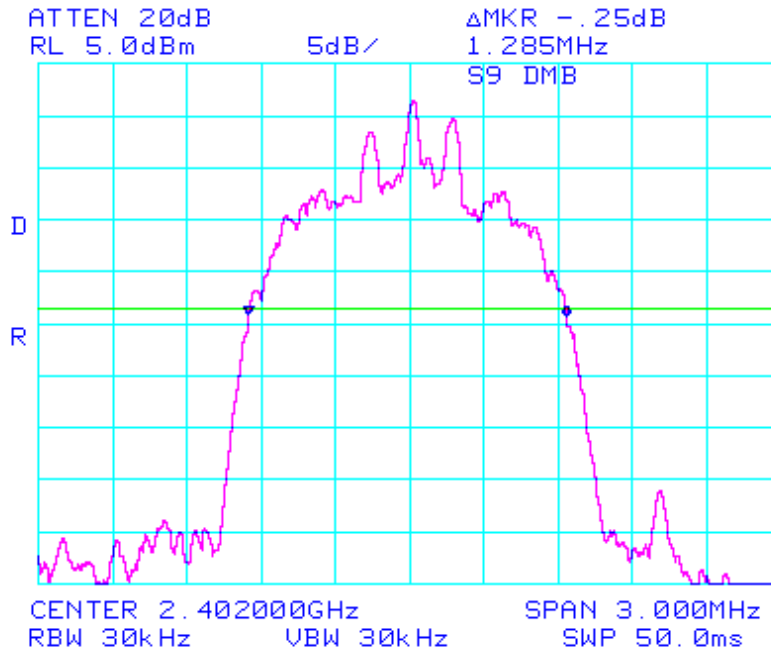


99% Bandwidth

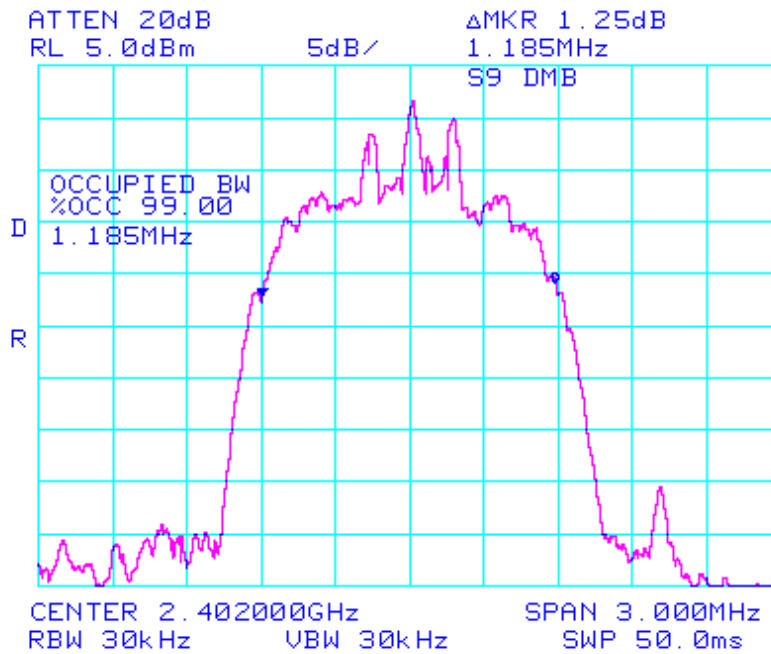

Channel 2 at 8DPSK mode
20 dB Bandwidth

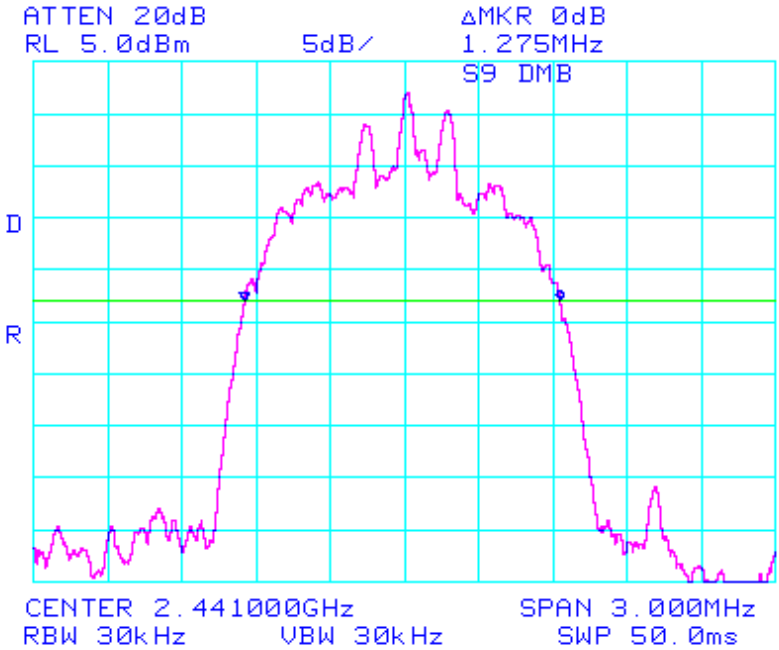


99% Bandwidth

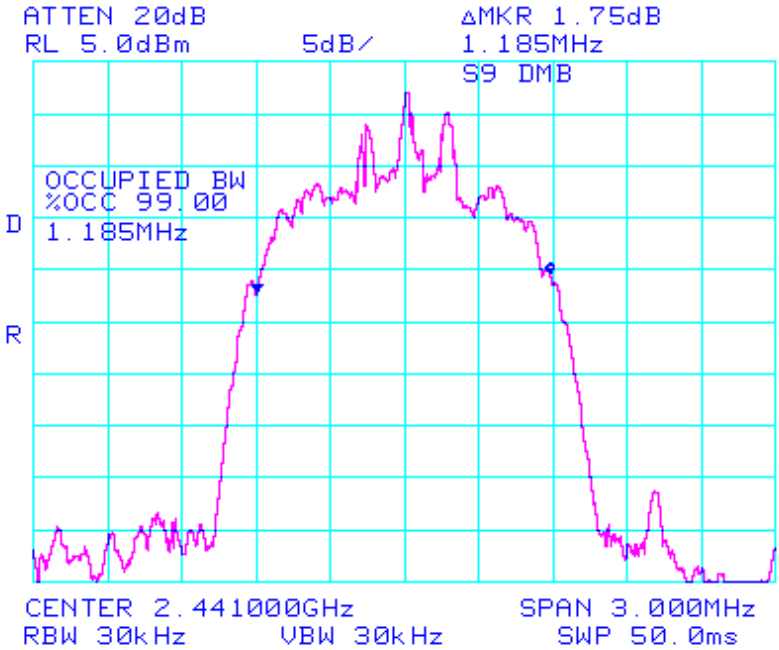


Channel 3 at 8DPSK mode

20 dB Bandwidth

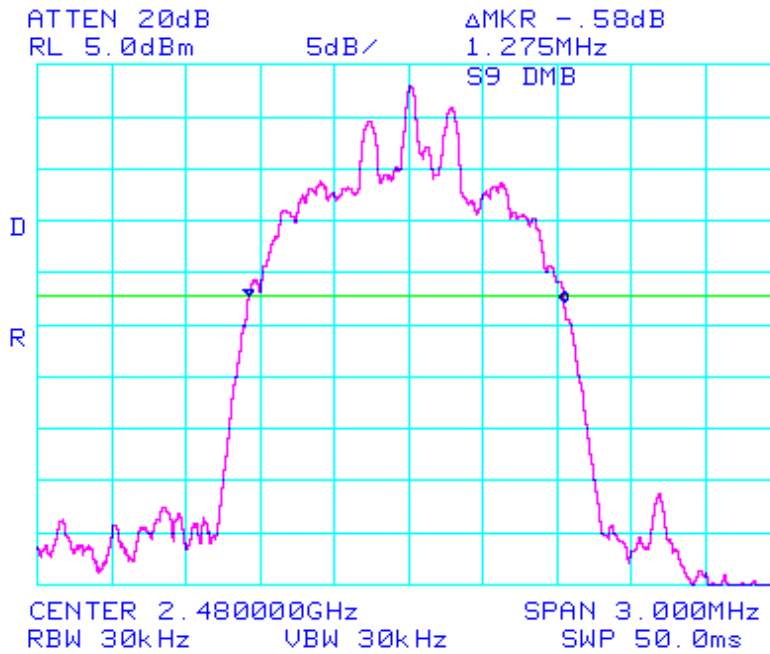

99% Bandwidth

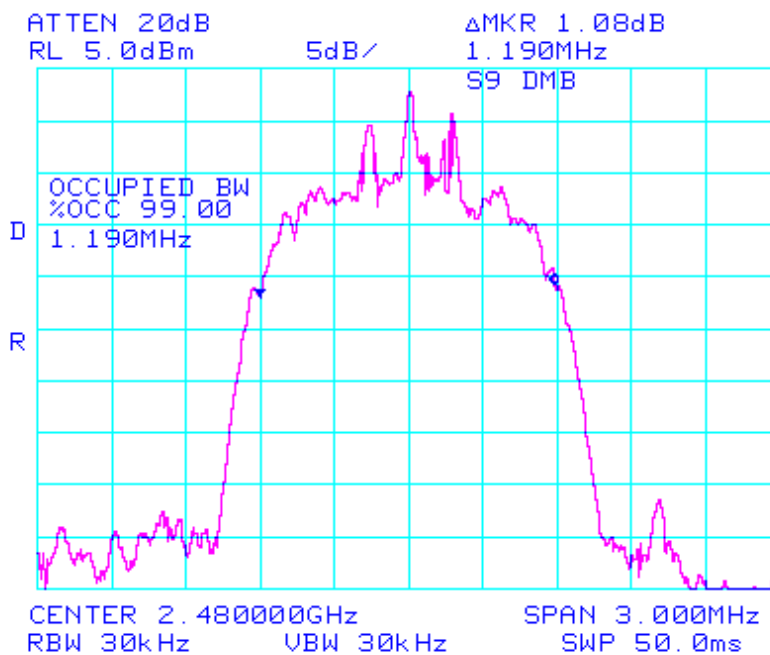

3.2.4 Time of Occupancy (Dwell Time)

Procedure:

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled.

The spectrum analyzer is set to:

Center frequency = 2441 MHz

Span = zero

RBW = 1 MHz

VBW = 1 MHz (VBW \geq RBW)

Trace = max hold

Detector function = peak

Measurement Data: Normal Mode

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results		
			Duration Time (ms)	Dwell Time (ms)	Result
39	2441	Normal DH 1	0.4267	136.544	Complies
		Normal DH 3	1.6750	268.000	Complies
		Normal DH 5	2.9250	321.750	Complies

Measurement Data: EDR Mode

Channel Number	Channel Frequency (MHz)	Packet Type	Test Results		
			Duration Time (ms)	Dwell Time (ms)	Result
39	2441	DQPSK	2.9333	322.663	Complies
		8DPSK	2.9417	323.587	Complies

- See next pages for actual measured spectrum plots.

- dwell time = {(number of hopping per second / number of slot) x duration time per channel} x 0.4 ms

Minimum Standard:


0.4 seconds within a 30 second period per any frequency

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

DH1 at normal mode


Period

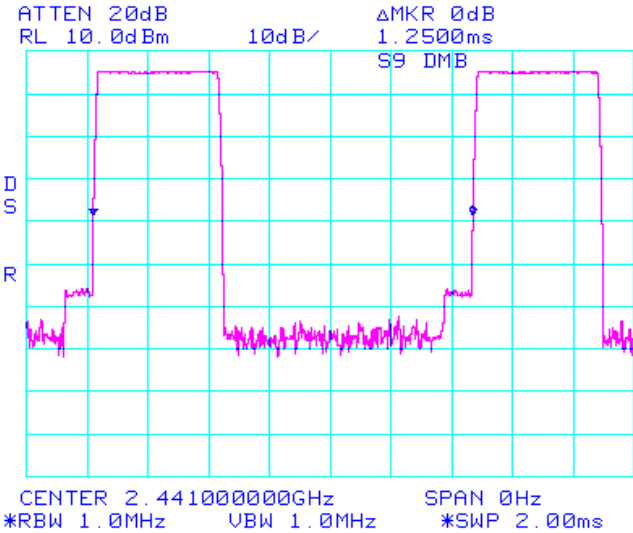

Dwell time

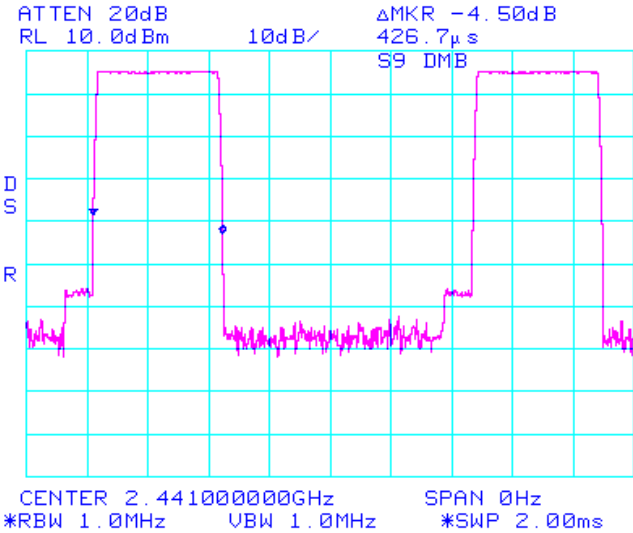


Number of hopping channel within 3.16 second

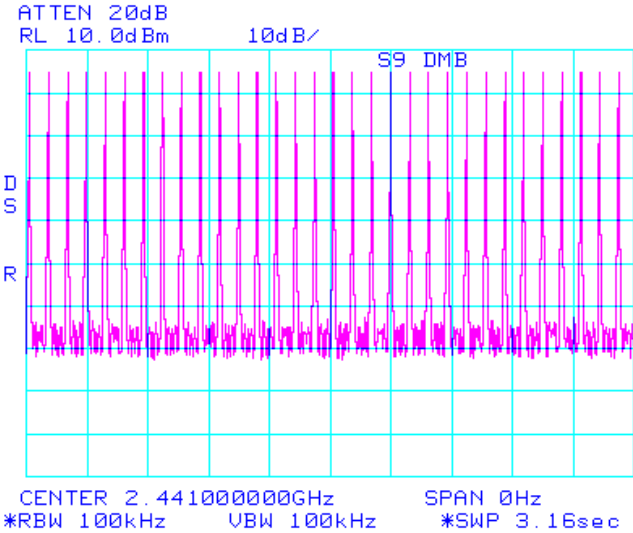


DH3 at normal mode


Period

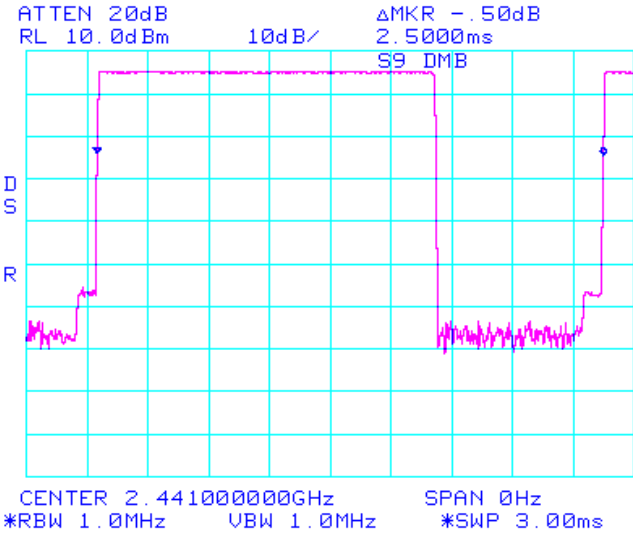

Dwell time

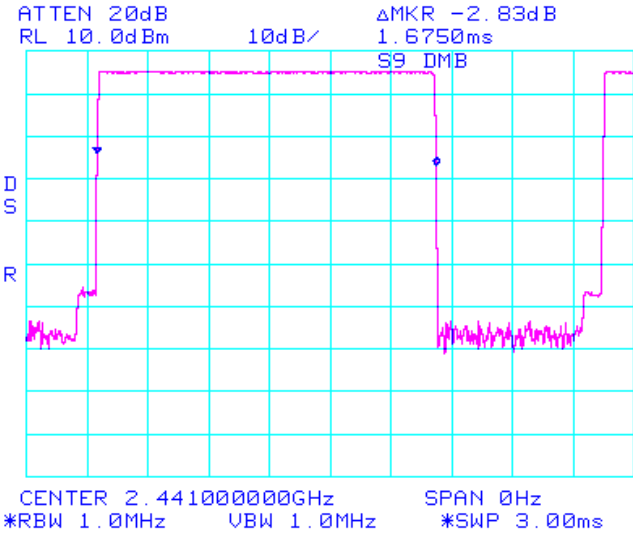


Number of hopping channel within 3.16 second

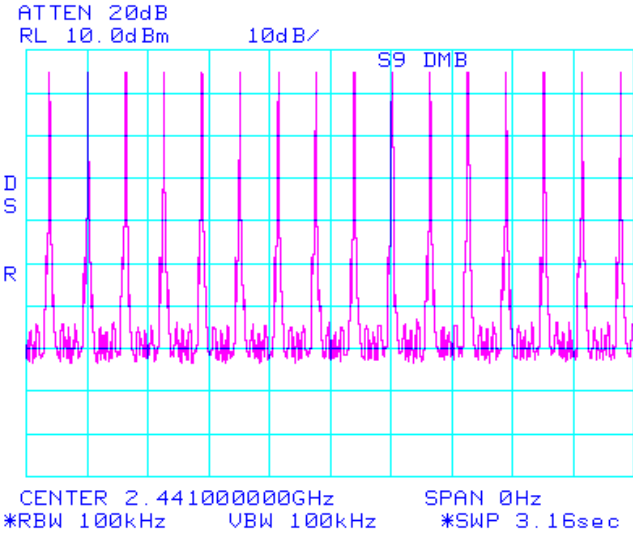


DH5 at normal mode


Period

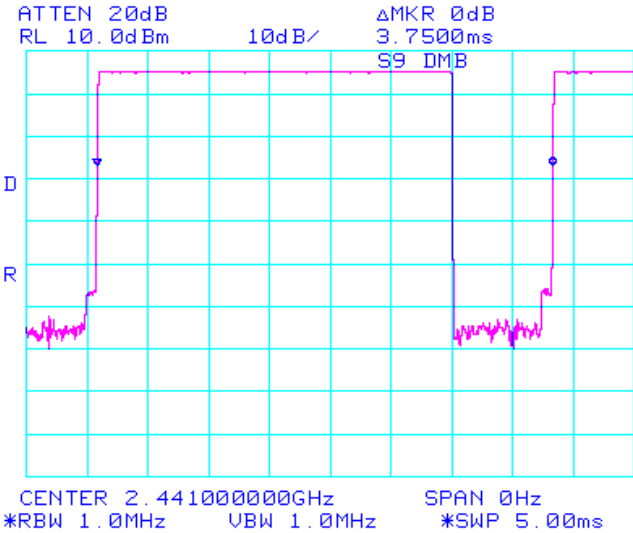

Dwell time

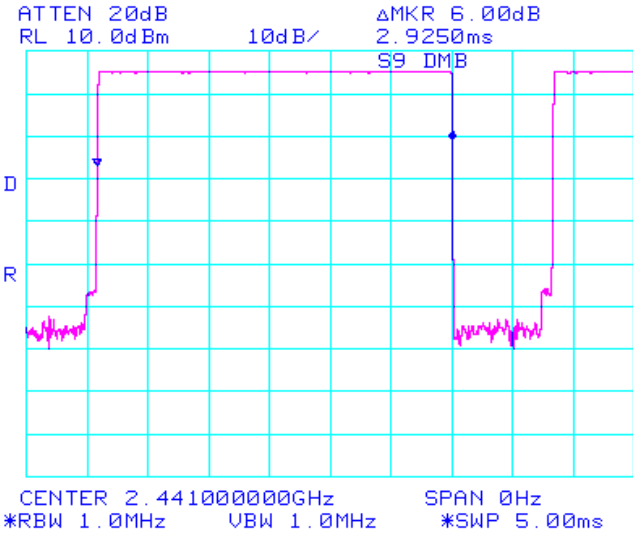


Number of hopping channel within 3.16 second

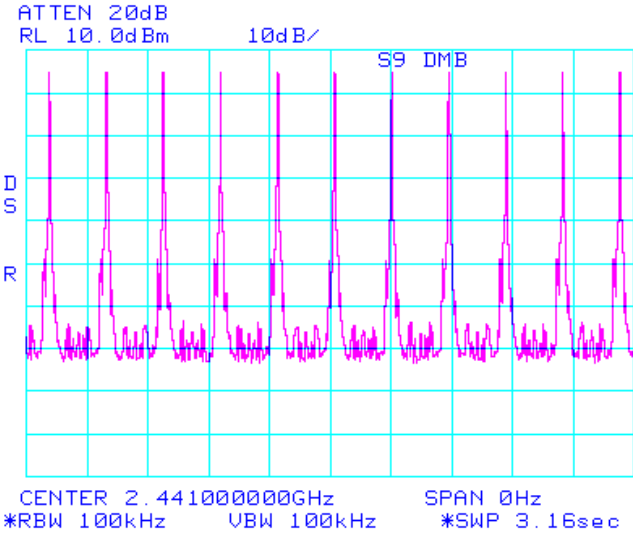


DH5 at DQPSK


Period

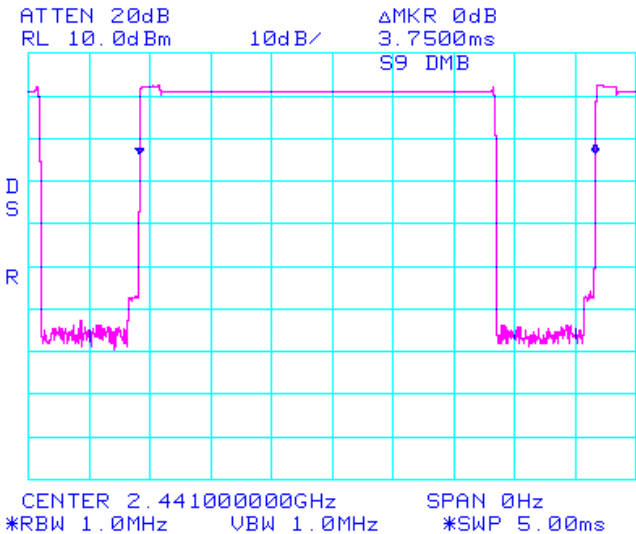

Dwell time

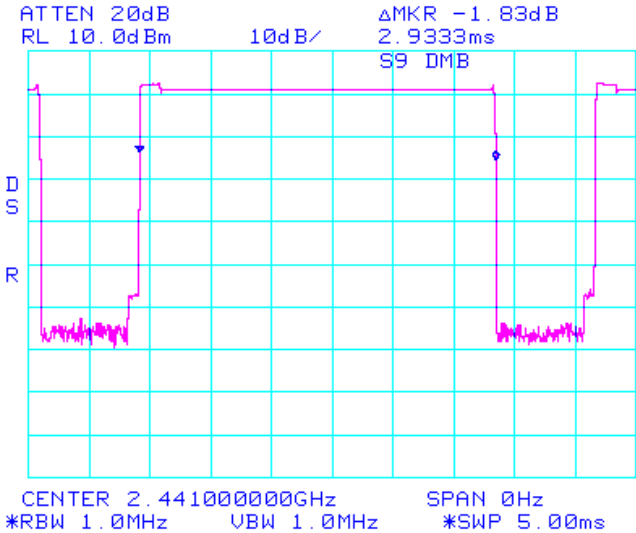


Number of hopping channel within 3.16 second

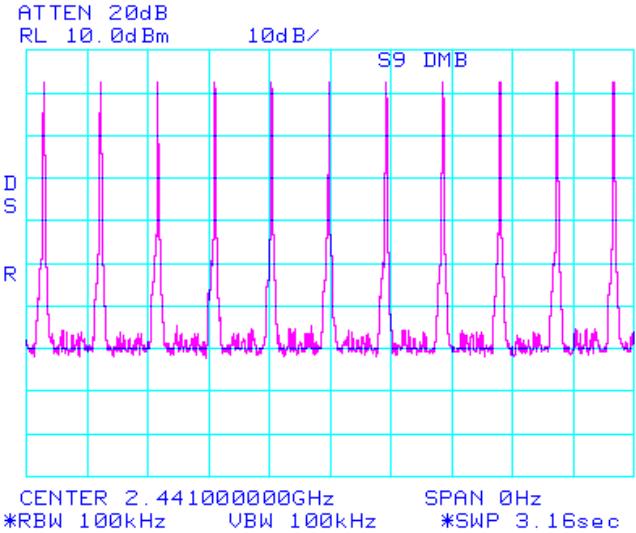


DH5 at 8DPSK


Period

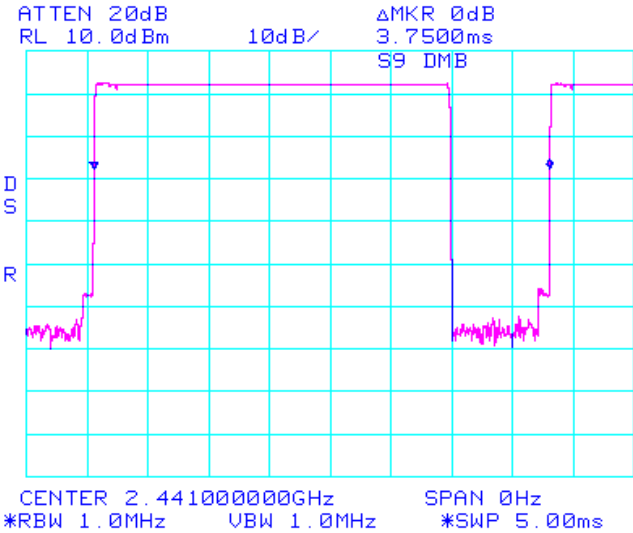

Dwell time

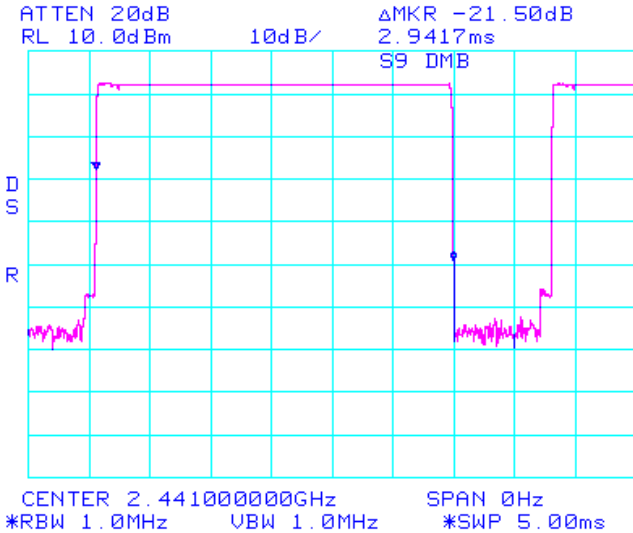

Number of hopping channel within 3.16 second

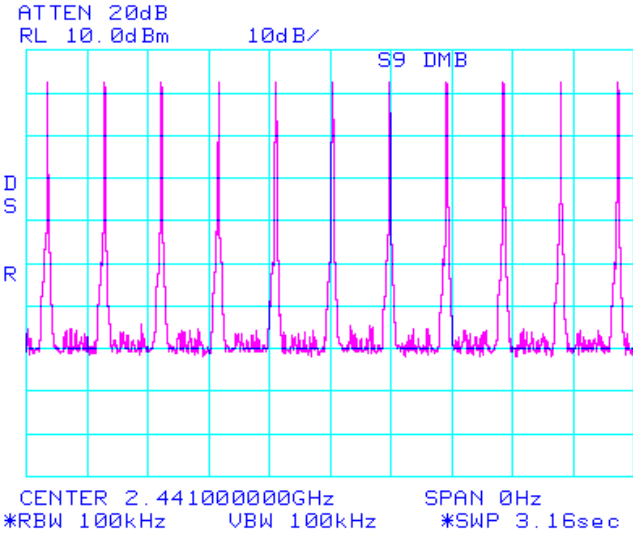

3.2.5 Transmitter Output Power

Procedure:

The peak output power was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels..

After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

Span = 3 MHz (approximately 5 times of the 20 dB bandwidth)

RBW = 1 MHz (greater than the 20dB bandwidth of the emission being measured)

VBW = 1 MHz (VBW \geq RBW)

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Normal Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	4.50	2.82	Complies
2441	39	5.17	3.39	Complies
2480	78	5.67	3.69	Complies

Measurement Data: 8DPSK Mode

Frequency (MHz)	Ch.	Test Results		
		dBm	mW	Result
2402	0	2.83	1.92	Complies
2441	39	3.17	2.07	Complies
2480	78	3.67	2.33	Complies

- See next pages for actual measured spectrum plots.


Minimum Standard:	< 250 mW
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Channel 1

Normal mode

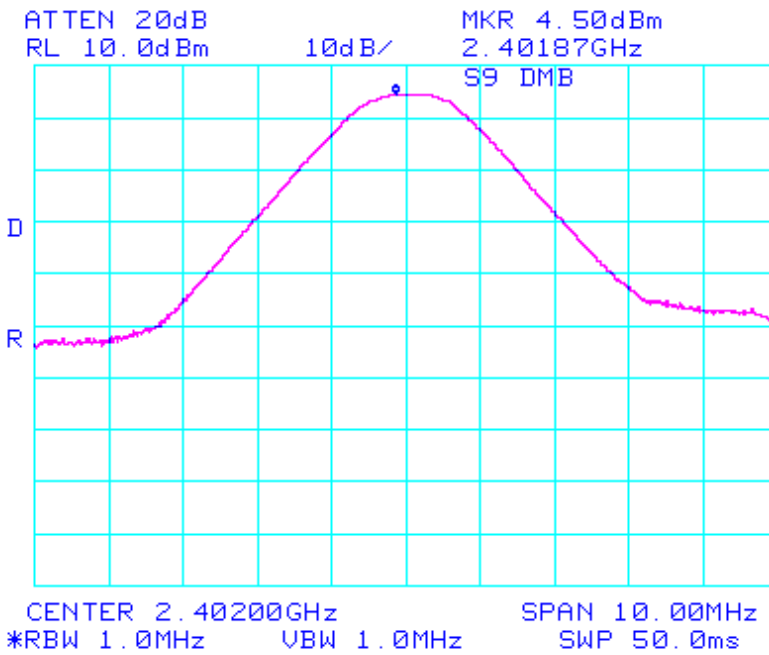


8DPSK mode

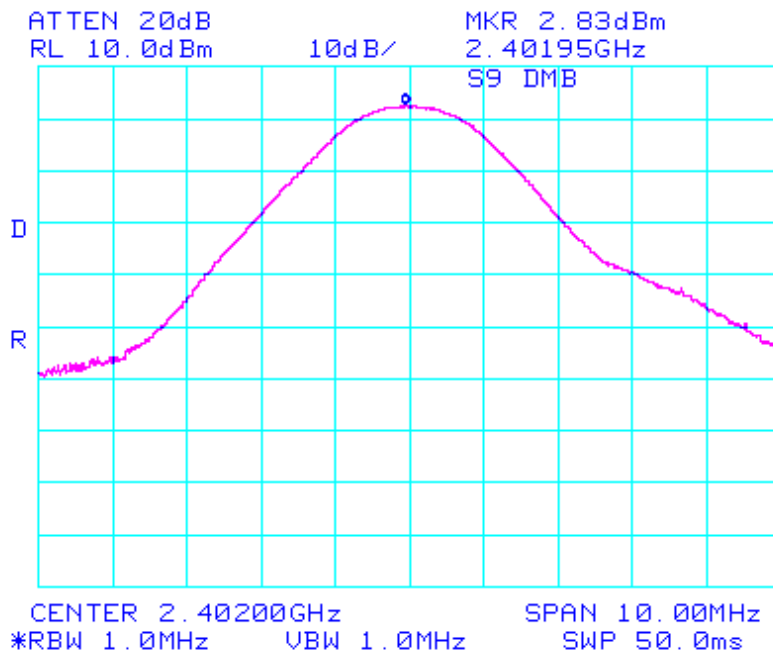


Channel 2

Normal mode

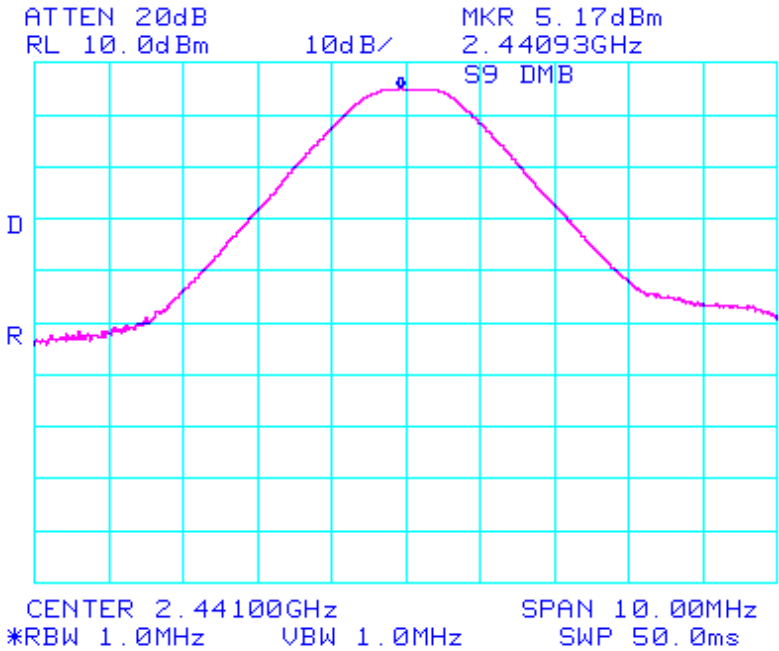


8DPSK mode

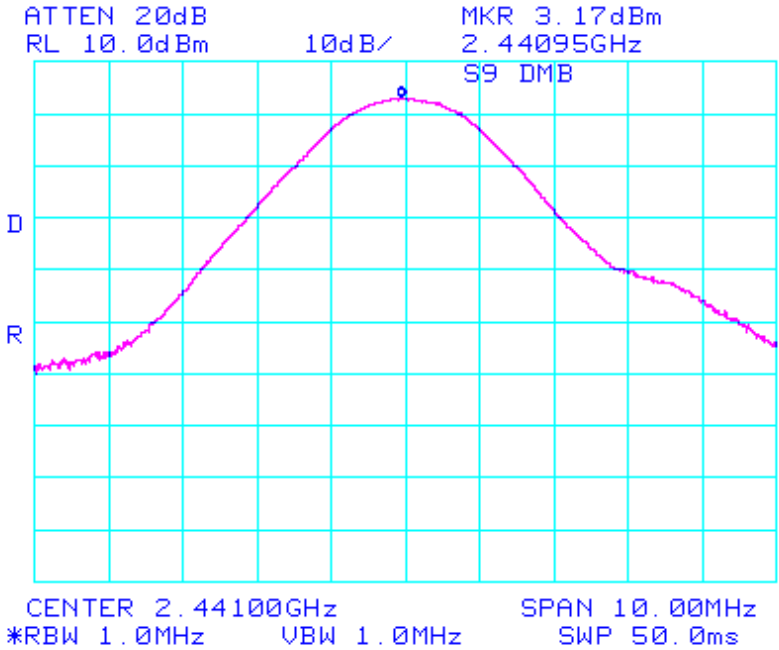


Channel 3

Normal mode

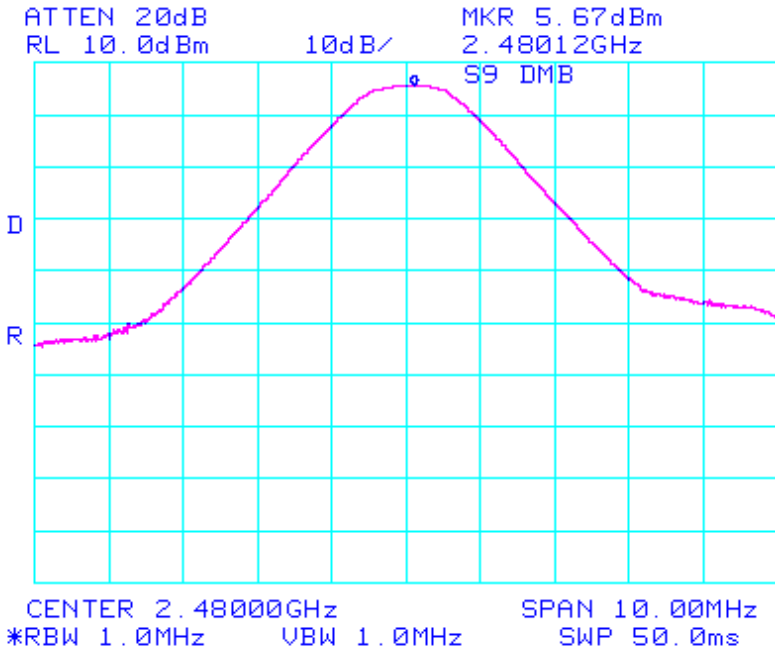

8DPSK mode

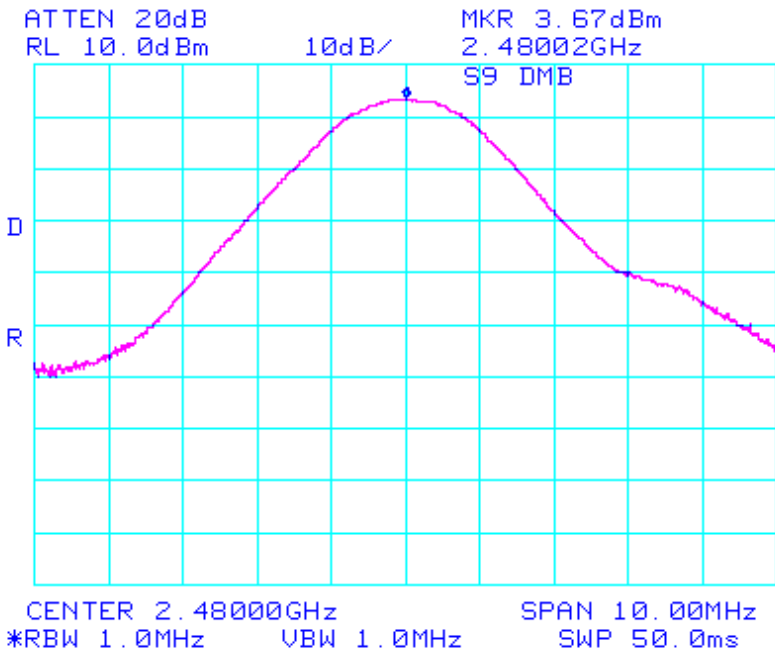

3.2.6 Band Edge

Procedure:

The bandwidth at 20dB down from the highest inband spectral density is measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disabled at the highest, middle and the lowest available channels.

After the trace being stable, Use the marker-to-peak function to measure 20 dB down both sides of the intentional emission.

The spectrum analyzer is set to:

Center frequency = the highest, middle and the lowest channels

RBW = 100 kHz

VBW = 100 kHz

Span = 10 MHz

Detector function = peak

Trace = max hold

Sweep = auto

Measurement Data: Complies

- All conducted emission in any 100kHz bandwidth outside of the spread spectrum band was at least 20dB lower than the highest inband spectral density. Therefore the applying equipment meets the requirement.
- See next pages for actual measured spectrum plots.


Minimum Standard:	> 20 dBc
--------------------------	----------

Measurement Setup


Same as the Chapter 3.2.1 (Figure 1)

Band - edge (with Hopping)

Lower edge

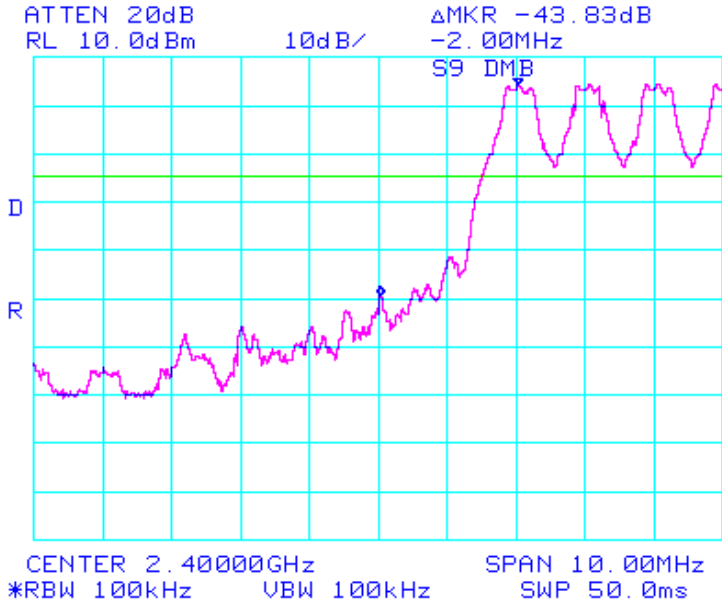

Upper edge

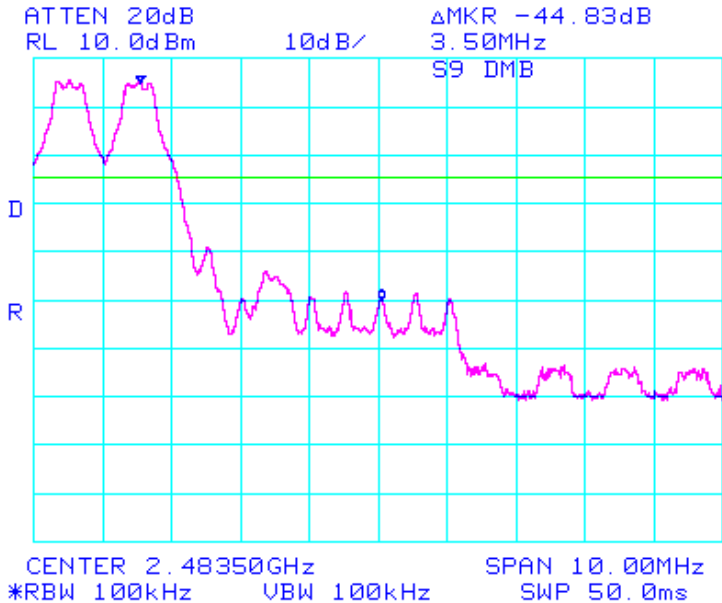

Band-edges in the restricted band 2483.5 ~ 2500 MHz measurement

- Document DA 00-705 Marker Delta Method


Frequency (MHz)	Detect mode	Pol.	Reading (dBUV/m)	T.F (dB)	Step 1 Data	delta	Step 3 Data	Limit
2480	PK	H	82.83	-0.92	81.91	44.83	37.08	74
	AV	H	72.83	-0.92	71.91	44.83	27.08	54

Note) Step 1 = Reading + T.F


T.F = Ant.F + Cable loss – PreAmp Gain

Step 3 = Step 1 – Delta Value


Unwanted Emission – Low channel
Frequency Range = 30 MHz ~ 26.5 GHz

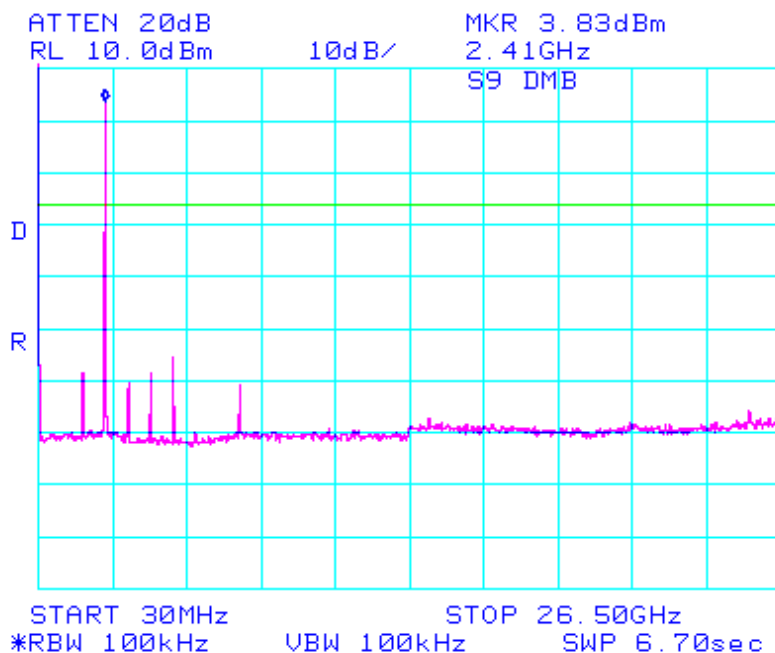


-47.50 dBm at 1.600 GHz

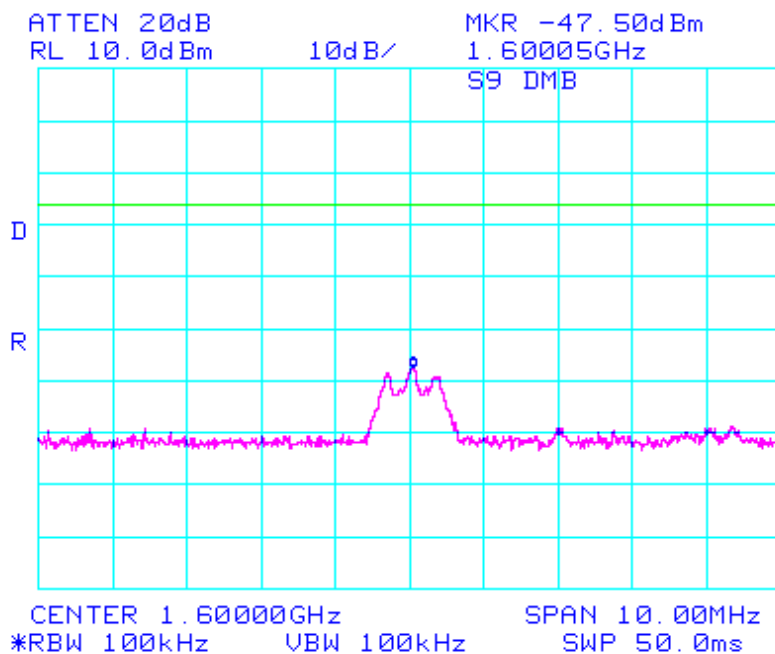


Unwanted Emission – Middle channel
Frequency Range = 30 MHz ~ 26.5 GHz

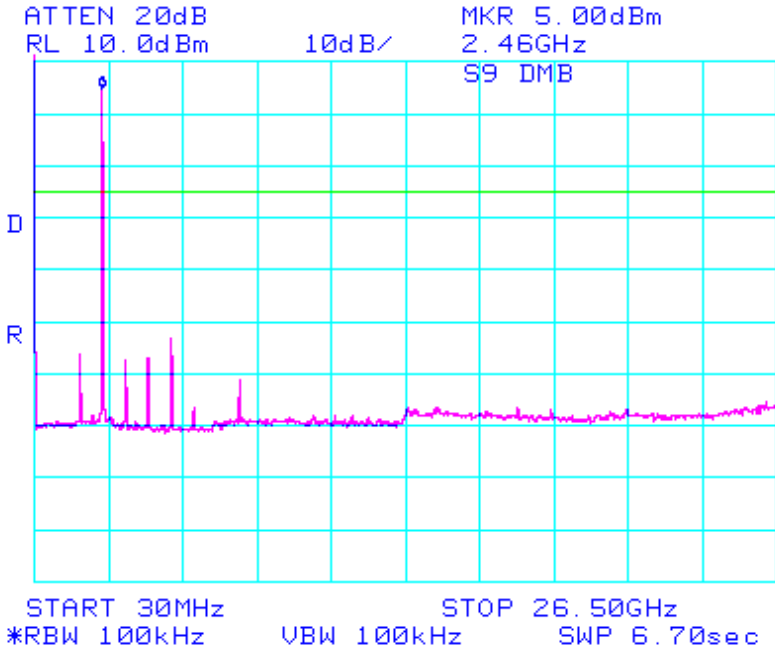


-46.33 dBm at 1.626 GHz

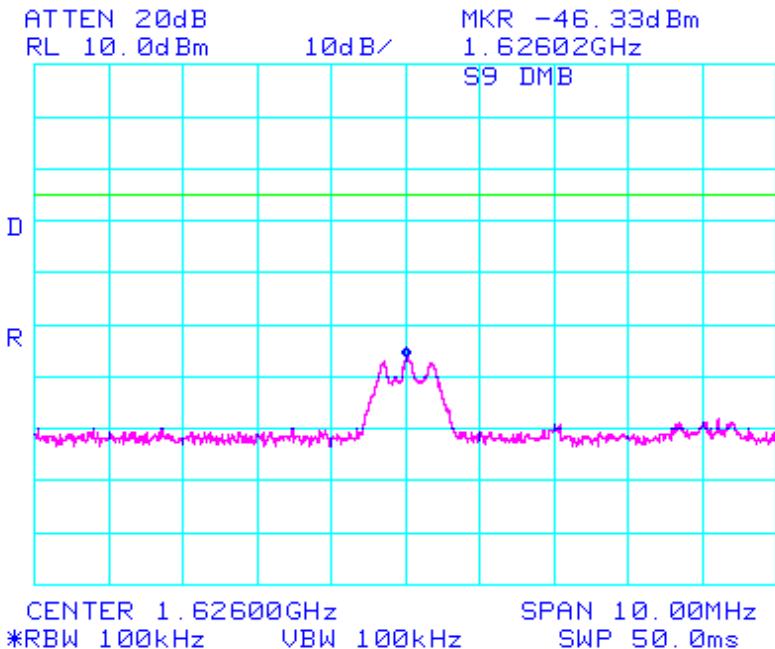


Unwanted Emission – High channel
Frequency Range = 30 MHz ~ 26.5 GHz

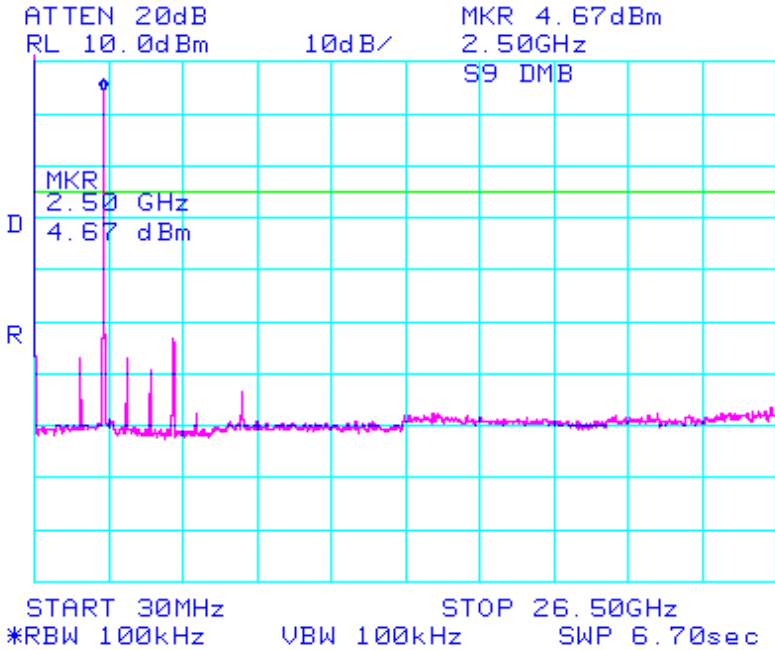


-45.83 dBm at 1.652 GHz

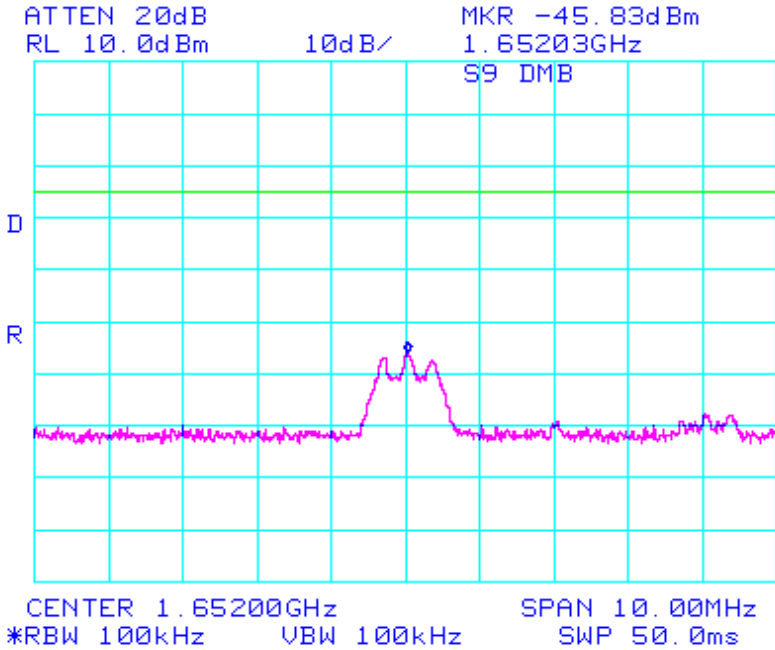

-43.17 dBm at 4.960 GHz

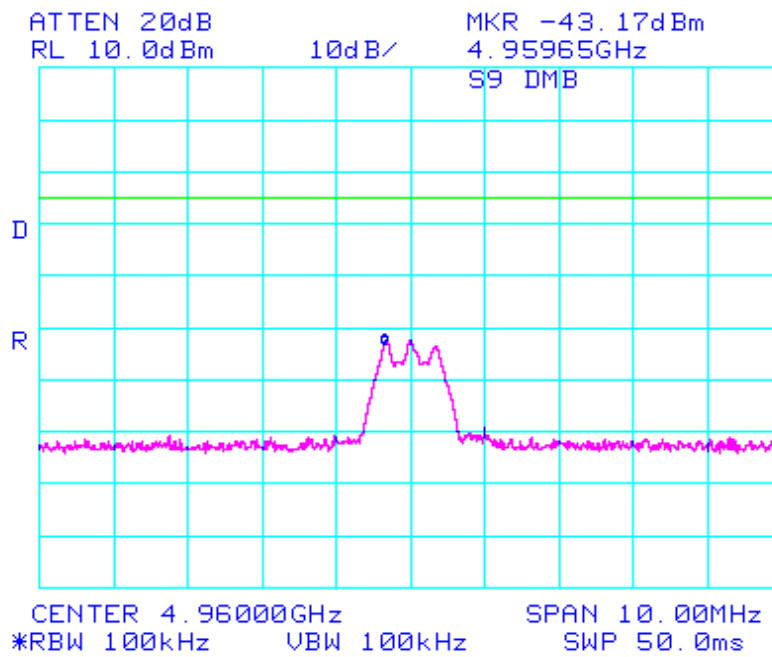

-51.50 dBm at 7.440 GHz

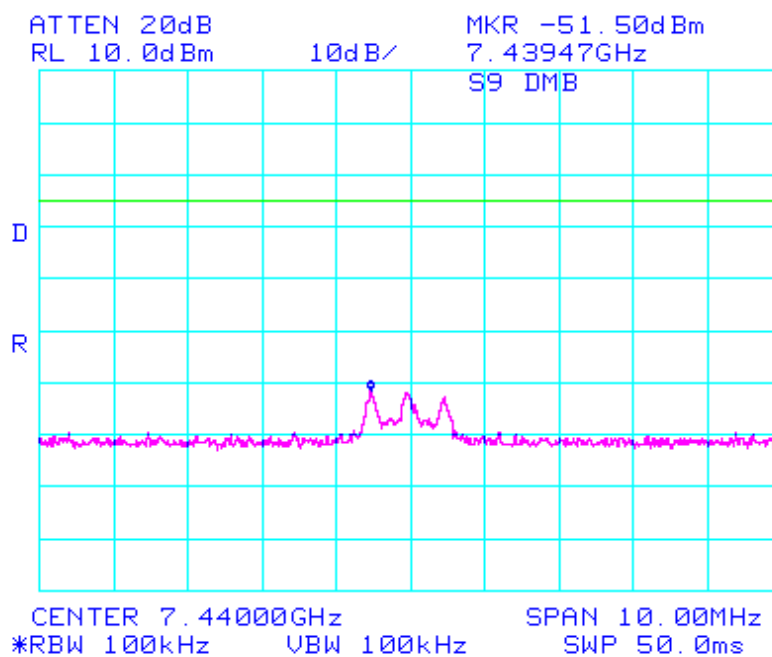

3.2.7 Field Strength of Harmonics

Procedure:

The EUT was placed on a 0.8m high wooden table inside a shielded enclosure. An antenna was placed near the EUT and measurements of frequencies and amplitudes of field strengths were recorded for reference during final measurements. For final radiated testing, measurements were performed in OATS. Measurements were performed with the EUT oriented in 3 orthogonal axis and rotated 360 degrees to determine worst-case orientation for maximum emissions.

The spectrum analyzer is set to:

Center frequency = the worst channel

Frequency Range = 30 MHz ~ 10th harmonic.

RBW = 100 kHz (30MHz ~ 1 GHz)

= 1 MHz (1 GHz ~ 10th harmonic)

Span = 100 MHz

Trace = max hold

Peak:VBW \geq RBW

Average:VBW=10Hz

Detector function = Peak and Average

Sweep = auto

Measurement Data: Complies

→ Refer to the next page.

→ No other emissions were detected at a level greater than 20dB below limit.

Minimum Standard: FCC Part 15.209(a)

Frequency (MHz)	Limit (uV/m) @ 3m
30 ~ 88	100 **
88 ~ 216	150 **
216 ~ 960	200 **
Above 960	500

** Except as provided in 15.209(g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g. 15.231 and 15.241.

Measurement Data:**1. PEAK data**

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
4804	51.8	4882	54.8	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			

Remark: No other emissions were detected at a level greater than 20dB below limit.

2. AVERAGE data

Low channel		Mid channel		High channel	
Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)	Frequency (MHz)	Level (dBuV/m)
4804	40.9	4882	48.6	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
Measurement uncertainty		± 6 dB			


Remark: No other emissions were detected at a level greater than 20dB below limit.

Field strength at play mode



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: COWON S9_16G TEST MODE: PLAY mode
Temp Humi : 15 / 25 Tested by: KIM.B.S

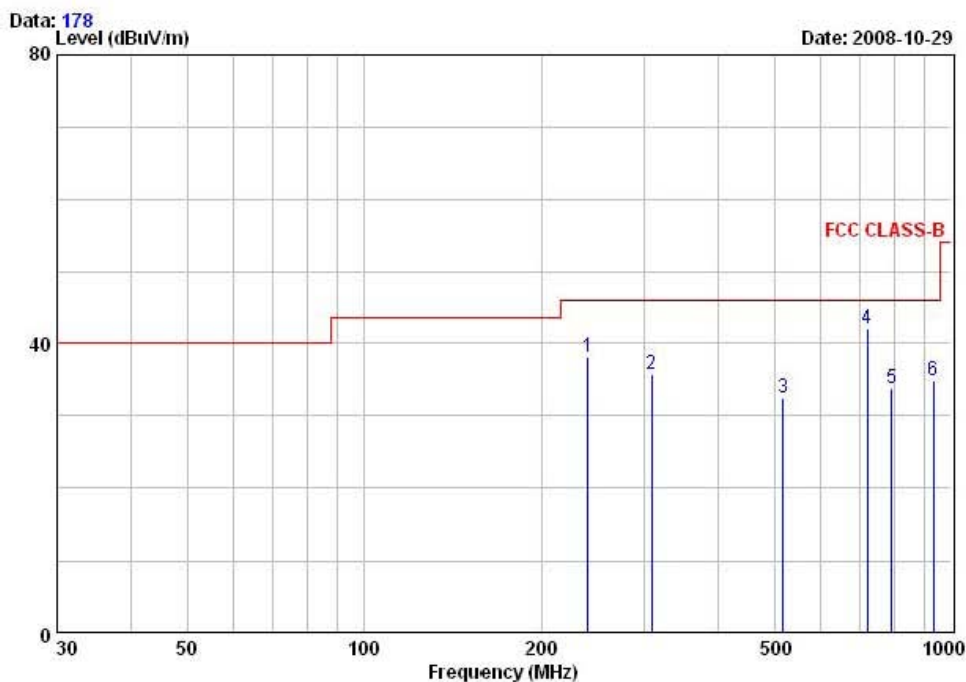

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 240.00	50.10	-11.87	38.23	46.00	7.77	275	203	HORIZONTAL
2 308.32	45.10	-9.29	35.81	46.00	10.19	185	23	HORIZONTAL
3 517.29	37.30	-4.85	32.45	46.00	13.55	269	332	HORIZONTAL
4 720.00	42.10	0.00	42.10	46.00	3.90	206	323	HORIZONTAL
5 790.88	32.50	1.30	33.80	46.00	12.20	379	32	HORIZONTAL
6 932.33	30.30	4.58	34.88	46.00	11.12	185	30	HORIZONTAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Field strength at data transmitting



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: COWON S9_16G TEST MODE: File up / down mode
Temp Humi : 15 / 25 Tested by: KIM.B.S

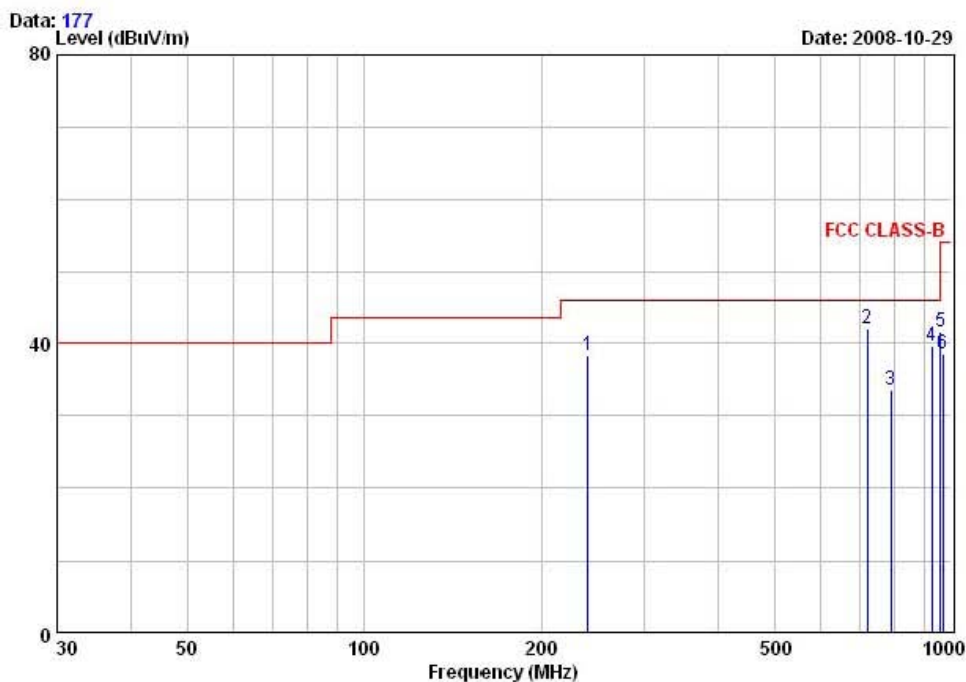

Freq	Reading	C.F	Result	Limit	Margin	Height	Angle	Polarity
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	deg	
1 240.01	50.30	-11.87	38.43	46.00	7.57	151	215	HORIZONTAL
2 720.00	42.00	0.00	42.00	46.00	4.00	163	25	HORIZONTAL
3 790.18	32.20	1.29	33.49	46.00	12.51	286	225	HORIZONTAL
4 927.33	35.20	4.42	39.62	46.00	6.38	236	203	HORIZONTAL
5 960.04	36.30	5.40	41.70	54.00	12.30	235	15	HORIZONTAL
6 966.90	33.10	5.56	38.66	54.00	15.34	218	283	HORIZONTAL


Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

Field strength at recording mode



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel :+82-31-3236008,9
Fax:+82-31-3236010

EUT/Model No.: COWON S9_2G TEST MODE: REC mode
Temp Humi : 15 / 25 Tested by: KIM.B.S

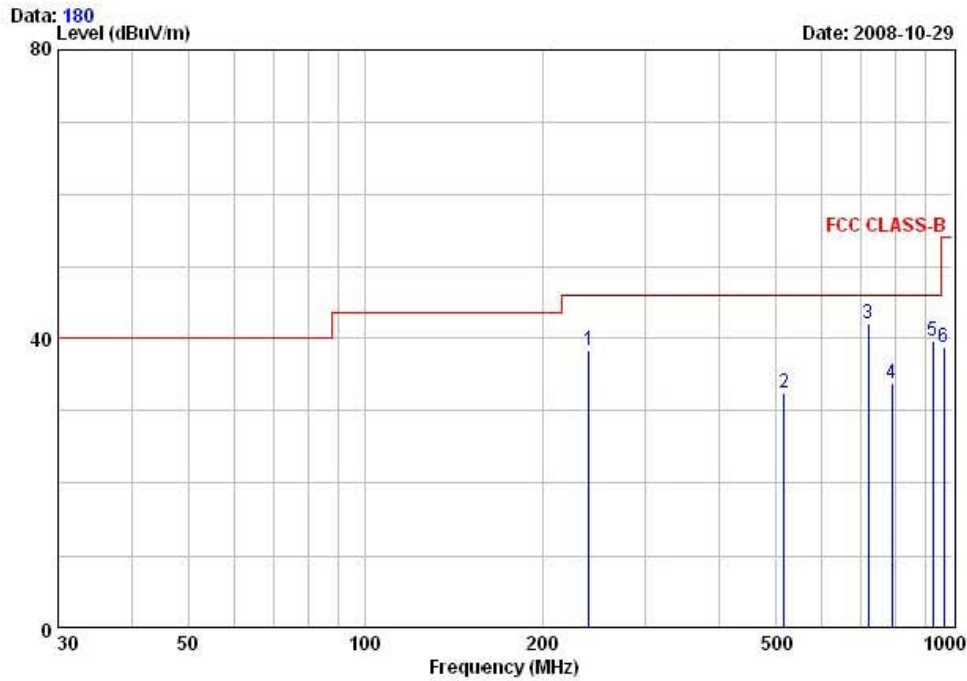

Peak	Freq MHz	Reading dBuV	C.F dB	Result QK dBuV/m	Limit dBuV/m	Margin dB	Height cm	Angle deg	Polarity
1	240.00	50.20	-11.87	38.33	46.00	7.67	121	285	HORIZONTAL
2	517.25	37.30	-4.86	32.44	46.00	13.56	165	32	HORIZONTAL
3	720.00	42.10	0.00	42.10	46.00	3.90	133	238	HORIZONTAL
4	790.36	32.50	1.29	33.79	46.00	12.21	182	52	HORIZONTAL
5	927.99	35.30	4.44	39.74	46.00	6.26	152	231	HORIZONTAL
6	966.98	33.20	5.56	38.76	54.00	15.24	315	321	HORIZONTAL

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

3.2.8 AC Conducted Emissions

Procedure:

The conducted emissions are measured in the shielded room with a spectrum analyzer in peak hold. While the measurement, EUT had its hopping function disabled at the middle channels in line with Section 15.31(m). Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation and Exerciser operation. The highest emissions relative to the limit are listed.

Measurement Data: Complies

- See next pages for actual measured spectrum plots.
- No emissions were detected at a level greater than 10dB below limit.

Minimum Standard: FCC Part 15.207(a)/EN 55022

Frequency Range (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency


AC Conducted Emissions at play mode – Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G	Phase : LINE
Test Mode : PLAY mode	Test Power : 120 / 60
Temp./Humi. : 24 / 43	Test Engineer : B.S.KIM

Data: 238 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-07

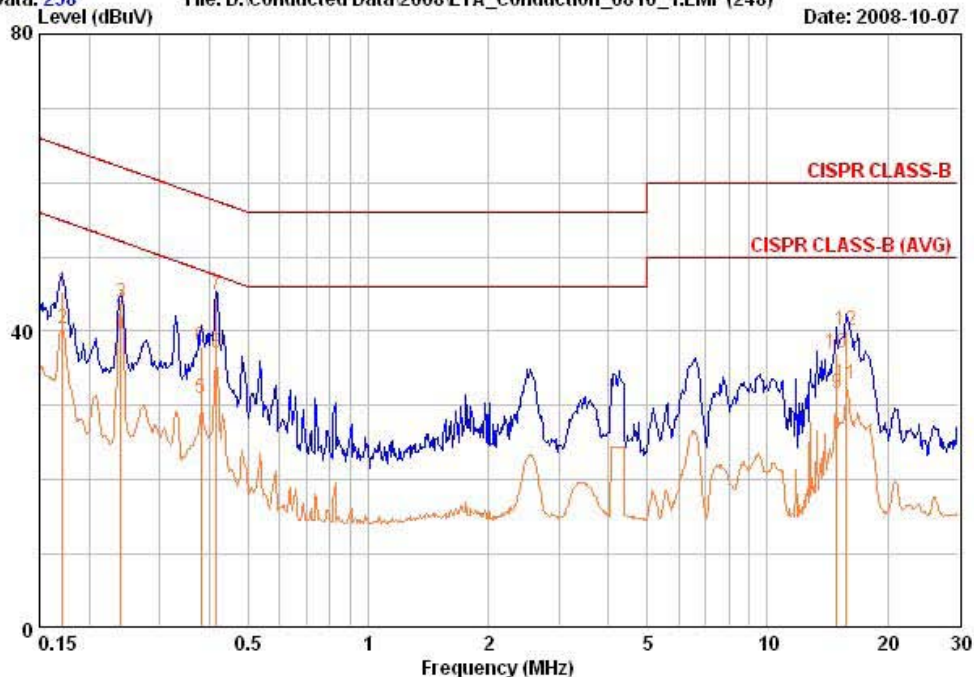

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.171	35.80	30.70	9.57	45.37	40.27	64.91	54.91	19.54	14.64
0.240	34.20	33.20	9.53	43.73	42.73	62.10	52.10	18.37	9.37
0.381	28.30	21.40	9.57	37.87	30.97	58.26	48.26	20.39	17.29
0.416	35.30	27.40	9.57	44.87	36.97	57.53	47.53	12.65	10.55
14.886	26.70	21.30	10.29	36.99	31.59	60.00	50.00	23.01	18.41
15.799	29.70	22.70	10.31	40.01	33.01	60.00	50.00	19.99	16.99

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions at play mode – Neutral



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G	Phase : NEUTRAL
Test Mode : PLAY mode	Test Power : 120 / 60
Temp./Humi. : 24 / 43	Test Engineer : B.S.KIM

Data: 240 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-27

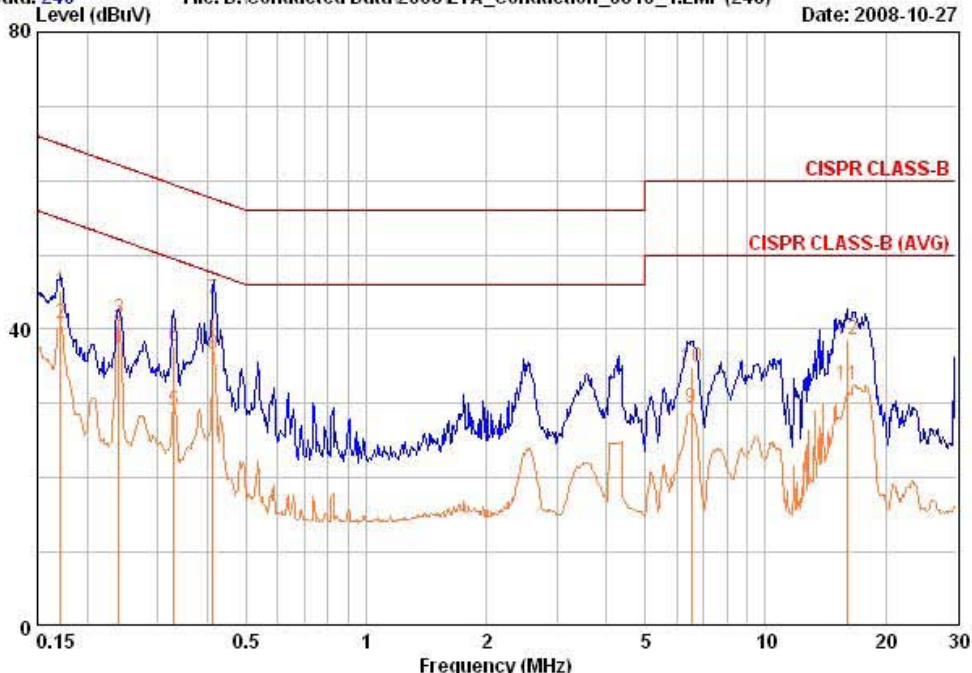

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.171	35.40	31.20	9.63	45.03	40.83	64.91	54.91	19.88	14.08
0.240	32.00	30.90	9.52	41.52	40.42	62.10	52.10	20.57	11.67
0.330	28.20	19.40	9.55	37.75	28.95	59.45	49.45	21.70	20.50
0.413	34.50	27.10	9.57	44.07	36.67	57.59	47.59	13.52	10.92
6.536	25.00	19.60	9.90	34.90	29.50	60.00	50.00	25.10	20.50
15.993	28.20	22.10	10.34	38.54	32.44	60.00	50.00	21.46	17.56

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions at data transmitting – Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G Phase : LINE
 Test Mode : File up / down mode Test Power : 120 / 60
 Temp./Humi. : 24 / 43 Test Engineer : B.S.KIM

Data: 230 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-27

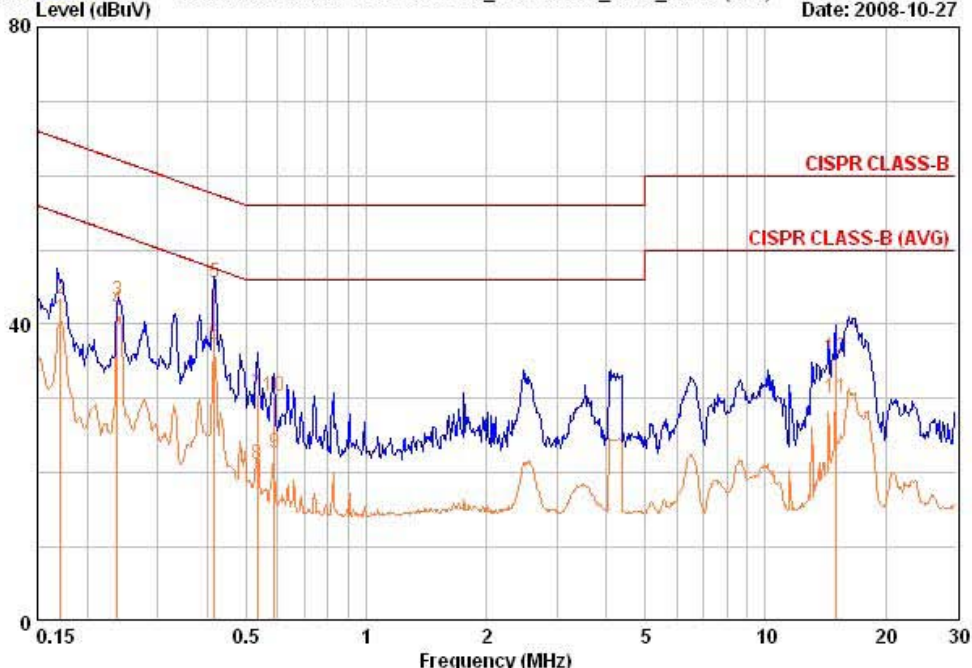

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.171	33.80	31.30	9.57	43.37	40.87	64.91	54.91	21.54	14.04
0.238	33.60	32.40	9.53	43.13	41.93	62.17	52.17	19.04	10.24
0.416	36.00	27.70	9.57	45.57	37.27	57.53	47.53	11.95	10.25
0.534	21.00	11.50	9.60	30.60	21.10	56.00	46.00	25.40	24.90
0.587	20.60	13.10	9.61	30.21	22.71	56.00	46.00	25.79	23.29
14.992	25.30	19.80	10.29	35.59	30.09	60.00	50.00	24.41	19.91

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions at data transmitting – Neutral



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G Phase : NEUTRAL
 Test Mode : File up / down mode Test Power : 120 / 60
 Temp./Humi. : 24 / 43 Test Engineer : B.S.KIM

Data: 232 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-27

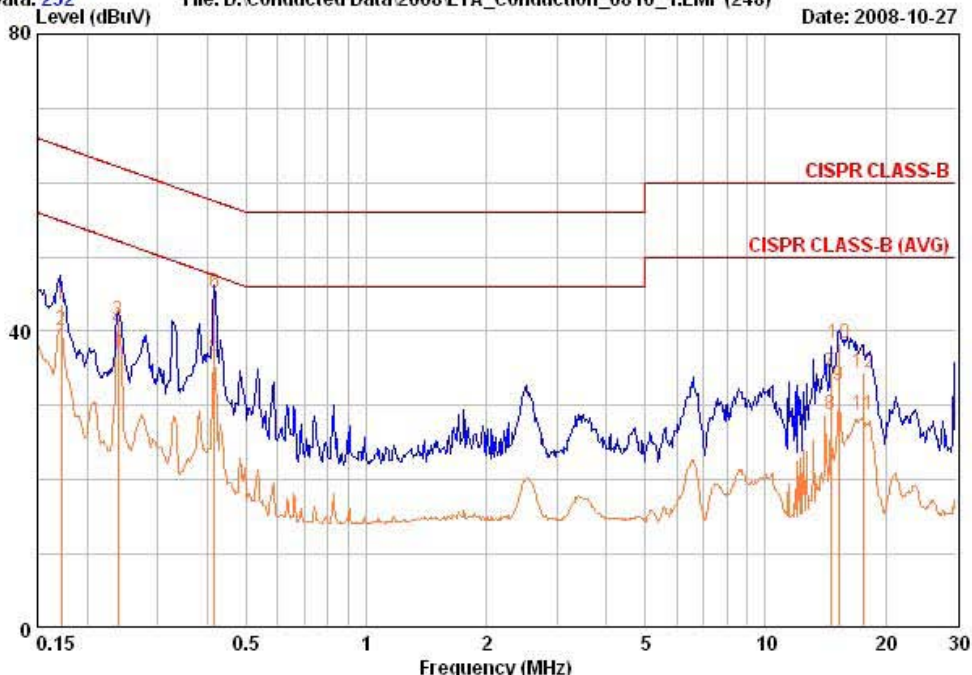

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.172	34.00	30.50	9.63	43.63	40.13	64.86	54.86	21.24	14.74
0.239	32.00	30.90	9.52	41.52	40.42	62.13	52.13	20.61	11.71
0.417	35.60	27.10	9.57	45.17	36.67	57.51	47.51	12.34	10.84
14.583	24.10	18.50	10.31	34.41	28.81	60.00	50.00	25.59	21.19
15.303	28.10	22.40	10.33	38.43	32.73	60.00	50.00	21.57	17.27
17.595	24.10	18.30	10.38	34.48	28.68	60.00	50.00	25.52	21.32

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss


AC Conducted Emissions at recording mode – Line



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G Phase : LINE
 Test Mode : REC mode Test Power : 120 / 60
 Temp./Humi. : 24 / 43 Test Engineer : B.S.KIM

Data: 246 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-27

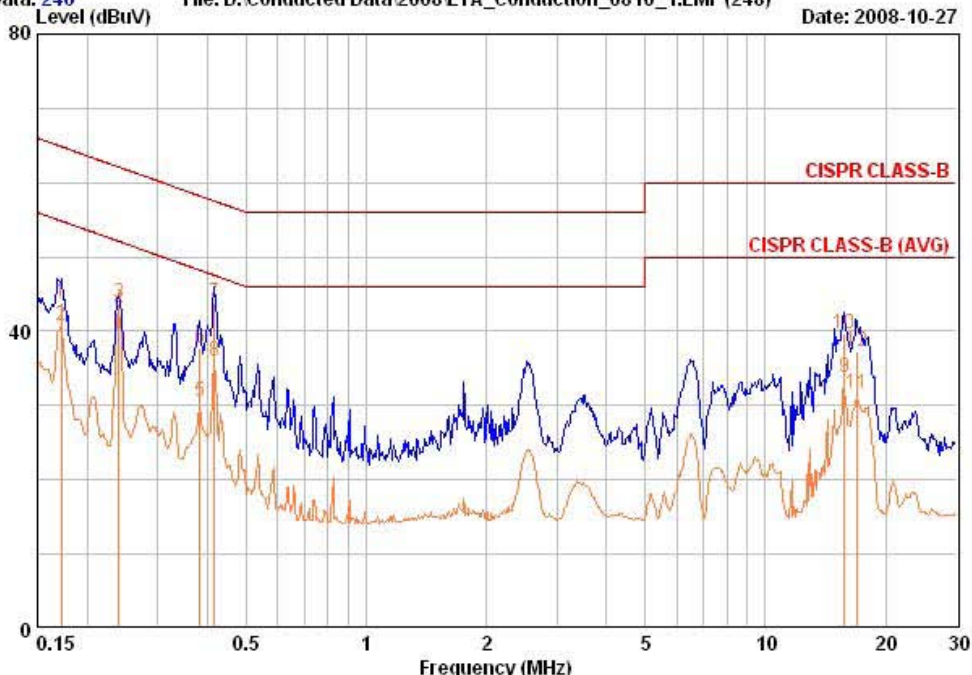

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.172	34.30	31.10	9.57	43.87	40.67	64.86	54.86	21.00	14.20
0.240	34.20	33.20	9.53	43.73	42.73	62.10	52.10	18.37	9.37
0.383	28.10	20.90	9.57	37.67	30.47	58.21	48.21	20.55	17.75
0.416	34.30	26.40	9.57	43.87	35.97	57.53	47.53	13.65	11.55
15.801	29.30	23.40	10.31	39.61	33.71	60.00	50.00	20.39	16.29
16.912	27.00	21.30	10.34	37.34	31.64	60.00	50.00	22.66	18.36


Remarks: C.F (Correction Factor) = Insertion loss + Cable loss



243 Jubug-ri, yangji-Myeon, Youngin-si,
Gyeonggi-do 449-822 Korea
Tel +82-31-323-6008
Fax:+82-31-323-6010

EUT / Model No. : COWON S9 DMB_16G Phase : NEUTRAL
 Test Mode : REC mode Test Power : 120 / 60
 Temp./Humi. : 24 / 43 Test Engineer : B.S.KIM

Data: 248 File: D:\Conducted Data\2008\LTA_Conduction_0810_1.EMI (248) Date: 2008-10-27

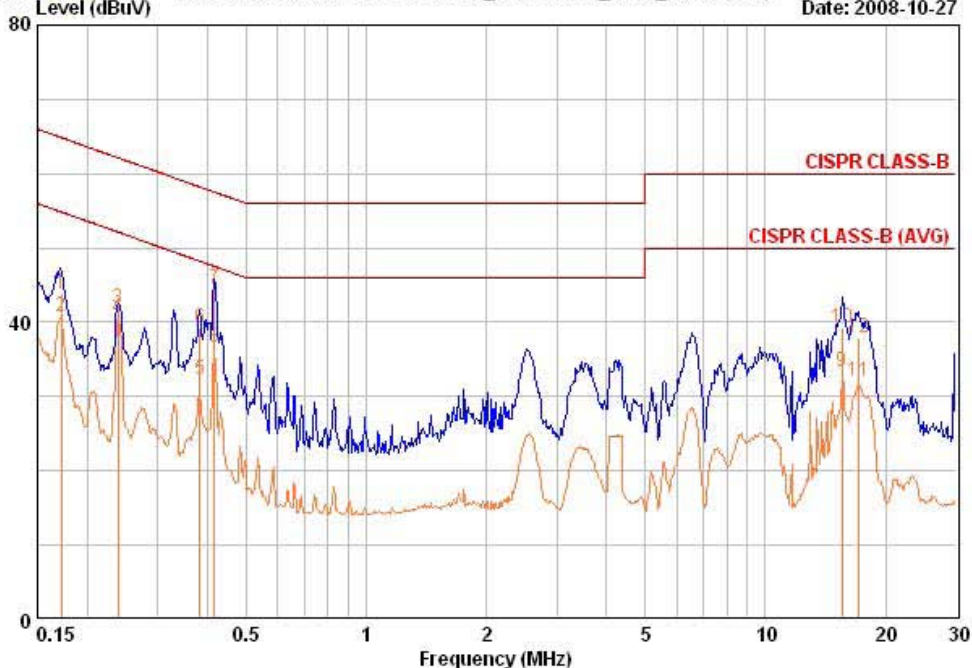

Freq MHz	RD		C.F	Result		Limit		Margin	
	QP dBuV	AV dBuV		QP dBuV	AV dBuV	QP dBuV	AV dBuV	QP dB	AV dB
0.172	34.10	31.20	9.63	43.73	40.83	64.86	54.86	21.14	14.04
0.239	32.30	31.10	9.52	41.82	40.62	62.13	52.13	20.31	11.51
0.383	29.70	22.60	9.56	39.26	32.16	58.21	48.21	18.95	16.05
0.417	34.80	27.00	9.57	44.37	36.57	57.51	47.51	13.14	10.94
15.549	28.80	23.00	10.33	39.13	33.33	60.00	50.00	20.87	16.67
17.119	27.50	21.60	10.37	37.87	31.97	60.00	50.00	22.13	18.03

Remarks: C.F (Correction Factor) = Insertion loss + Cable loss

APPENDIX

TEST EQUIPMENT USED FOR TESTS

	Description	Model No.	Serial No.	Manufacturer	Next Cal. Date
1	Spectrum Analyzer	8594E	3649A03649	HP	Apr-09
2	Signal Generator	8648C	3623A02597	HP	Apr-09
3	Attenuator (3dB)	8491A	37822	HP	Oct-09
4	Attenuator (10dB)	8491A	63196	HP	Oct-09
5	EMI Test Receiver	ESVD	843748/001	R&S	Aug-09
6	LISN	KNW-407	8-1430-1	Kyoritsu	Jan-09
7	Two-Line V-Network	ESH3-Z5	893045/017	R&S	Oct-09
8	RF Amplifier	8447D	2949A02670	HP	Jan-09
9	RF Amplifier	8447D	2439A09058	HP	Oct-09
10	RF Amplifier	8449B	3008A02126	HP	Apr-09
11	Test Receiver	ESHS10	828404009	R&S	Aug-09
12	TRILOG Antenna	VULB 9160	9160-3212	SCHWARZBECK	Jul-09
13	Log.-Per. Antenna	VULP 9118	9118 A 401	SCHWARZBECK	Apr-09
14	Biconical Antenna	BBA 9106	VHA 9103-2315	SCHWARZBECK	Apr-09
15	Horn Antenna	3115	00055005	ETS LINDGREN	Mar-09
16	Dipole Antenna	VHA9103	2116	Schwarzbeck	Nov-08
17	Dipole Antenna	VHA9103	2117	Schwarzbeck	Nov-08
18	Dipole Antenna	UHA9105	2261	Schwarzbeck	Nov-08
19	Dipole Antenna	UHA9105	2262	Schwarzbeck	Nov-08
20	Spectrum Analyzer	8591E	3649A05888	HP	Oct-09
21	Spectrum Analyzer	8563E	3425A02505	HP	Apr-09
22	Hygro-Thermograph	THB-36	0041557-01	ISUZU	Apr-09
23	Splitter (SMA)	ZFSC-2-2500	SF617800326	Mini-Circuits	Jun-09
24	RF Switch	MP59B	6200414971	ANRITSU	Jun-09
25	RF Switch	MP59B	6200438565	ANRITSU	Jun-09
26	Power Divider	11636A	6243	HP	Oct-09
27	DC Power Supply	6622A	3448A03079	HP	Oct-09
28	Attenuator (30dB)	11636A	6243	HP	Oct-09
29	Frequency Counter	5342A	2826A12411	HP	Apr-09
30	Power Meter	EPM-441A	GB32481702	HP	Apr-09
31	Power Sensor	8481A	2702A64048	HP	Apr-09
32	Audio Analyzer	8903B	3729A18901	HP	Oct-09
33	Modulation Analyzer	8901B	3749A05878	HP	Oct-09
34	TEMP & HUMIDITY Chamber	YJ-500	L05022	JinYoung Tech	Oct-09
35	LOOP-ANTENNA	FMZB 1516	151602/94	SCHWARZBECK	Mar-09
36	Stop Watch	HS-3	601Q09R	CASIO	Apr-09