

# TEST REPORT

Applicant Name: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Address: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China  
Report Number: SZ1240109-02077E-RFC  
FCC ID: T2C-MP58E2  
IC: 10741A-MP58E2

## Test Standard (s)

FCC PART 15.247; RSS-GEN ISSUE 5, FEBRUARY 2021 AMENDMENT 2;  
RSS-247 ISSUE 3, AUGUST 2023

## Sample Description

Product Type: Smart Business Phone  
Model No.: MP58 E2  
Multiple Model(s) No.: N/A  
Trade Mark: **Yealink**  
Date Received: 2024/01/09  
Issue Date: 2024/05/08

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

## Prepared and Checked By:

*Andy Yu*

Andy Yu  
RF Engineer

## Approved By:

*Nancy Wang*

Nancy Wang  
RF Supervisor

Note: The information marked<sup>#</sup> is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

## Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China  
Tel: +86-755-33320018    Fax: +86-755-33320008    www.baclcorp.com.cn

## **TABLE OF CONTENTS**

<b>DOCUMENT REVISION HISTORY .....</b>	<b>4</b>
<b>GENERAL INFORMATION.....</b>	<b>5</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....	5
OBJECTIVE .....	5
TEST METHODOLOGY .....	6
MEASUREMENT UNCERTAINTY .....	6
TEST FACILITY .....	7
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>8</b>
DESCRIPTION OF TEST CONFIGURATION .....	8
EQUIPMENT MODIFICATIONS .....	9
EUT EXERCISE SOFTWARE .....	9
DUTY CYCLE .....	9
SUPPORT EQUIPMENT LIST AND DETAILS .....	9
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP .....	10
<b>SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>TEST EQUIPMENT LIST .....</b>	<b>13</b>
<b>FCC §1.1307 (B) &amp; §2.1091- MPE-BASED EXEMPTION .....</b>	<b>15</b>
APPLICABLE STANDARD .....	15
RESULT .....	15
<b>RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION</b>	<b>16</b>
APPLICABLE STANDARD .....	16
RESULT .....	16
<b>§15.203 &amp; RSS-GEN §6.8 ANTENNA REQUIREMENT.....</b>	<b>17</b>
APPLICABLE STANDARD .....	17
ANTENNA CONNECTOR CONSTRUCTION .....	18
<b>§15.207 (A) &amp; RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS .....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
EUT SETUP .....	20
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE .....	20
FACTOR & OVER LIMIT CALCULATION.....	21
TEST DATA .....	21
<b>§15.205, §15.209, §15.247(D) &amp; RSS-GEN § 8.10 &amp; RSS-247 § 5.5 SPURIOUS EMISSIONS.....</b>	<b>26</b>
APPLICABLE STANDARD .....	26
EUT SETUP .....	26
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	28
TEST PROCEDURE .....	28
FACTOR & OVER LIMIT/MARGIN CALCULATION .....	29
TEST DATA .....	29

<b>§15.247 (A)(2) &amp; RSS-GEN§6.7 RSS-247 § 5.2 (A) 99% OCCUPIED BANDWIDTH &amp; 6 DB EMISSION BANDWIDTH.....</b>	<b>59</b>
APPLICABLE STANDARD .....	.59
TEST PROCEDURE .....	.59
TEST DATA .....	.60
<b>§15.247(B)(3) &amp; RSS-247 § 5.4(D) MAXIMUM CONDUCTED OUTPUT POWER .....</b>	<b>61</b>
APPLICABLE STANDARD .....	.61
TEST PROCEDURE .....	.61
TEST DATA .....	.62
<b>§15.247(D) &amp; RSS-247 § 5.5 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....</b>	<b>63</b>
APPLICABLE STANDARD .....	.63
TEST PROCEDURE .....	.63
TEST DATA .....	.63
<b>§15.247(E) &amp; RSS-247 § 5.2 (B) POWER SPECTRAL DENSITY .....</b>	<b>64</b>
APPLICABLE STANDARD .....	.64
TEST PROCEDURE .....	.64
TEST DATA .....	.65
<b>EUT PHOTOGRAPHS.....</b>	<b>66</b>
<b>TEST SETUP PHOTOGRAPHS.....</b>	<b>67</b>
<b>APPENDIX-BLE .....</b>	<b>68</b>
APPENDIX A: DTS BANDWIDTH .....	.68
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	.70
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....	.72
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....	.74
APPENDIX E: BAND EDGE MEASUREMENTS.....	.76
APPENDIX F: DUTY CYCLE .....	.77
<b>APPENDIX-WI-FI .....</b>	<b>78</b>
APPENDIX A: DTS BANDWIDTH .....	.78
APPENDIX B: OCCUPIED CHANNEL BANDWIDTH .....	.84
APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER .....	.90
APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY .....	.91
APPENDIX E: BAND EDGE MEASUREMENTS.....	.97
APPENDIX F: DUTY CYCLE .....	.100

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	SZ1240109-02077E-RFC	Original Report	2024/05/08

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

HVIN	MP58 E2
FVIN	176.15.0.13
Product	Smart Business Phone
Tested Model	MP58 E2
Multiple Model(s)	N/A
Frequency Range	BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz
Maximum Conducted Peak Output Power	BLE: 6.08dBm Wi-Fi: 23.83dBm
Modulation Technique	BLE: GFSK Wi-Fi: DSSS, OFDM
Antenna Specification <sup>#</sup>	2.66dBi (provided by the applicant)
Voltage Range	DC 48V from POE or DC 12V from adapter
Sample serial number	2GDS-8 for Conducted and Radiated Emissions Test 2GDS-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Adapter Information	Model: YLPS121000C-US Input: AC 100-240V, 50~60Hz, 0.5A Output: DC 12V, 1.0A

Note: The EUT powered by adapter or POE, the worst case power supply was selected to test for AC line conducted and radiated emission below 1GHz according to DSS report test result.

### Objective

This report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023 of the Innovation, Science and Economic Development Canada rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

## Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliant Testing of Unlicensed Wireless Devices and RSS-GEN Issue 5, February 2021 Amendment 2 and RSS-247 Issue 3, August 2023.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

## Measurement Uncertainty

Parameter	Uncertainty	
Occupied Channel Bandwidth	±5%	
RF Frequency	213.55 Hz(k=2, 95% level of confidence)	
RF output power, conducted	0.72 dB(k=2, 95% level of confidence)	
Unwanted Emission, conducted	1.75 dB(k=2, 95% level of confidence)	
AC Power Lines Conducted Emissions	9 kHz~150 KHz 150 kHz ~30MHz	3.94dB(k=2, 95% level of confidence) 3.84dB(k=2, 95% level of confidence)
Radiated Emissions	9kHz - 30MHz	3.30dB(k=2, 95% level of confidence)
	30MHz~200MHz (Horizontal)	4.48dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	4.55dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	4.85dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.05dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.35dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.44dB(k=2, 95% level of confidence)
	18GHz - 40GHz	5.16dB(k=2, 95% level of confidence)
Temperature	±1°C	
Humidity	±1%	
Supply voltages	±0.4%	

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0023.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For Wi-Fi mode, total 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	8	2447
2	2417	9	2452
3	2422	10	2457
4	2427	11	2462
5	2432	/	/
6	2437	/	/
7	2442	/	/

For 802.11b, 802.11g, 802.11n-HT20, EUT was tested with Channel 1, 6 and 11.

For BLE 1M mode, 40 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with Channel 0, 19 and 39.

## Equipment Modifications

No modification was made to the EUT tested.

## EUT Exercise Software

“AuthenticTool\_1.2.25.0#” exercise software was used for BLE test and Wi-Fi test.

The device was tested with the worst case was performed as below:

Mode	Data rate	Power Level <sup>#</sup>		
		Low Channel	Middle Channel	High Channel
802.11b	1Mbps	16	16	16
802.11g	6Mbps	15	15	15
802.11n20	MCS0	15	15	15
BLE	1Mbps	9	9	9

The software and power level was provided by the applicant.

## Duty cycle

Please refer to the Appendix.

## Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-415K	5503290068073
DELL	PC	Latitude E5430	JG3NLV1
NOKIA	POE	G0545-530-060-PSE1000	Unknown
Grandstream	IP Phone	GXV3480	T11223323B898
Yealink	Earphone	Unknown	Unknown
Yealink	Handset	BTH58	Unknown
Thinkplus	U disk	MU251	Unknown

## External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielded un-detachable AC cable	1.2	Socket	LISN
Un-shielded un-detachable DC cable	1.5	Adapter	EUT
Un-shielded detachable RJ45 cable	3.0	EUT	IP Phone
Un-shielded detachable RJ45 cable	3.0	EUT	PC
Un-shielded detachable RJ11 cable	1.8	EUT	Earphone
Un-shielded detachable RJ45 cable	3.0	POE	IP Phone
Un-shielded detachable RJ45 cable	10.0	EUT	PC
Un-shielded detachable RJ45 cable	10.0	EUT	POE

## Block Diagram of Test Setup

For Conducted Emissions:

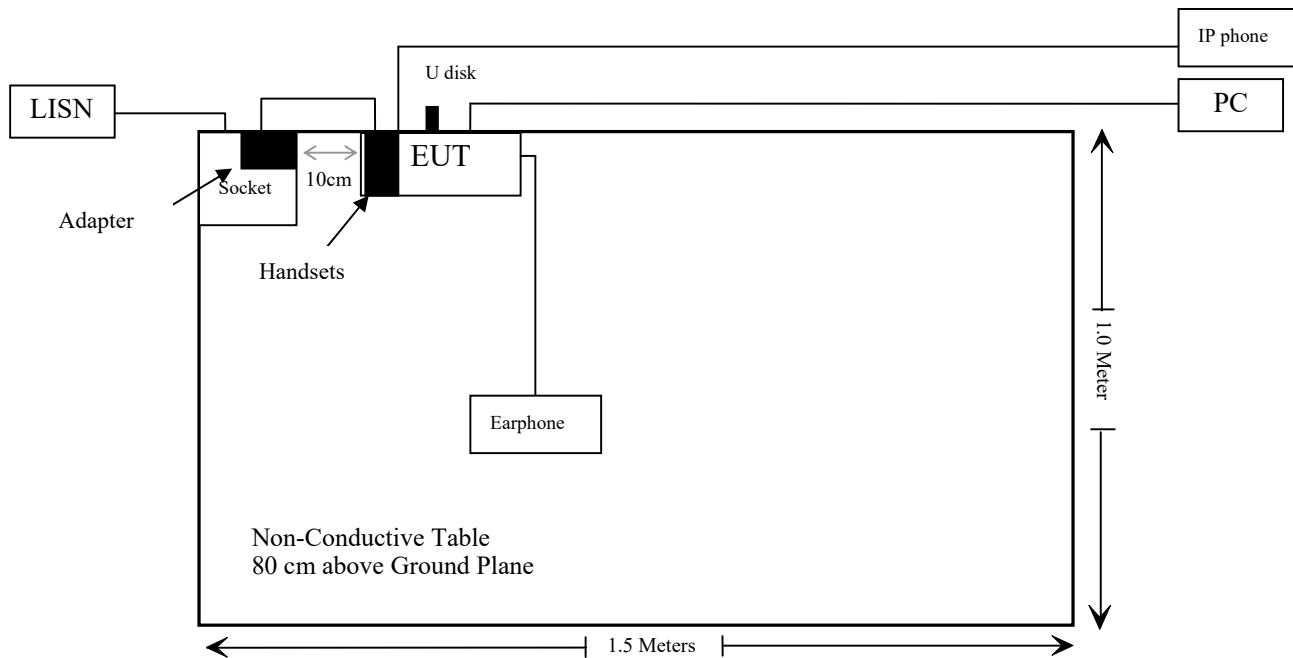

For Radiated Emissions:

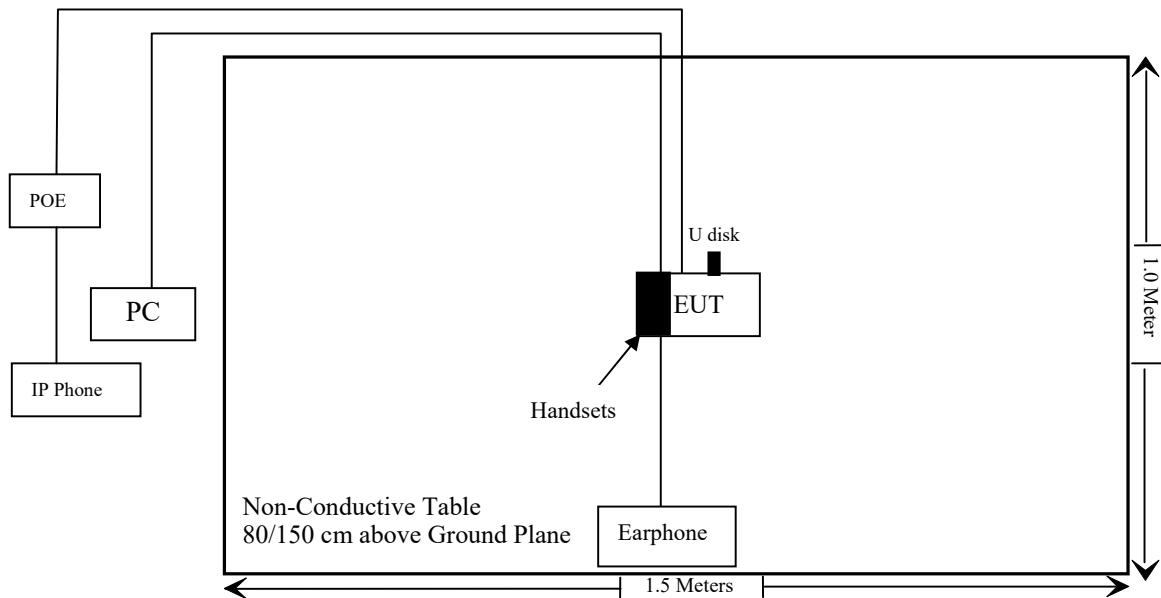

## SUMMARY OF TEST RESULTS

FCC Rules	RSS Rules	Description of Test	Result
§1.1307 ,§2.1091	/	MPE-Based Exemption	Compliant
/	RSS-102 § 2.5.2	Exemption Limits for Routine Evaluation – RF Exposure Evaluation	Compliant
§15.203	RSS-Gen §6.8	Antenna Requirement	Compliant
§15.207 (a)	RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	RSS-GEN § 8.10 & RSS-247 § 5.5	Spurious Emissions	Compliant
§15.247 (a)(2)	RSS- Gen§6.7 RSS-247 § 5.2 (a)	99% Occupied Bandwidth & 6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	RSS-247 § 5.4(d)	Maximum Conducted Output Power	Compliant
§15.247(d)	RSS-247 § 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliant
§15.247(e)	RSS-247 § 5.2 (b)	Power Spectral Density	Compliant

## TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2024/01/16	2025/01/15
Rohde & Schwarz	LISN	ENV216	101613	2024/01/16	2025/01/15
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2023/08/03	2024/08/02
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2023/08/03	2024/08/02
Audix	EMI Test software	E3	191218	NCR	NCR
<b>Radiated Emission Test</b>					
R&S	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2023/06/08	2024/06/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2024/07/19
ETS	Passive Loop Antenna	6512	29604	2023/07/07	2024/07/06
Unknown	Cable	Chamber Cable 1	F-03-EM236	2023/08/03	2024/08/02
Unknown	Cable	Chamber Cable 4	EC-007	2023/08/03	2024/08/02
Audix	EMI Test software	E3	19821b(V9)	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2023/04/18	2024/04/17
COM-POWER	Pre-amplifier	PA-122	181919	2023/06/29	2024/06/28
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2024/07/25
Unknown	RF Cable	KMSE	0735	2023/10/08	2024/10/07
Unknown	RF Cable	UFA147	219661	2023/10/08	2024/10/07
SNSD	2.4G Band Reject filter	BSF2402-2480MN-0898-001	2.4G filter	2023/08/03	2024/08/02
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	NCR	NCR
Audix	EMI Test software	E3	191218(V9)	NCR	NCR
A.H.System	Pre-amplifier	PAM-1840VH	190	2023/08/03	2024/08/02
Electro-Mechanics Co	Horn Antenna	3116	9510-2270	2023/09/18	2026/09/17
UTIFLEX	RF Cable	NO. 13	232308-001	2023/08/03	2024/08/02

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>RF Conducted Test</b>					
Tonscend	RF control Unit	JS0806-2	19D8060154	2023/09/06	2024/09/05
Rohde & Schwarz	Signal and Spectrum Analyzer	FSV40	101473	2024/01/16	2025/01/15
MARCONI	10dB Attenuator	6534/3	2942	2023/07/04	2024/07/03
Unknown	RF Cable	65475	01670515	2023/07/04	2024/07/03

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §1.1307 (B) & §2.1091- MPE-BASED EXEMPTION

### Applicable Standard

According to subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

According to KDB 447498 D04 Interim General RF Exposure Guidance

MPE-Based Exemption:

General frequency and separation-distance dependent MPE-based effective radiated power(ERP) thresholds are in Table B.1 [Table 1 of § 1.1307(b)(1)(i)(C)] to support an exemptionfrom further evaluation from 300 kHz through 100 GHz.

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$ .
1.34-30	$3,450 R^2/f^2$ .
30-300	$3.83 R^2$ .
300-1,500	$0.0128 R^2f$ .
1,500-100,000	$19.2R^2$ .

R is the minimum separation distance in meters  
f = frequency in MHz

### Result

Mode	Frequency (MHz)	Tune up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup>		ERP		Evaluation Distance (m)	ERP Limit (mW)
		(dBm)	(dBi)	(dBd)	(dBm)	(mW)		
BT	2402-2480	11.0	2.66	0.51	11.51	14.16	0.2	768
BLE	2402-2480	6.5	2.66	0.51	7.01	5.02	0.2	768
2.4G Wi-Fi	2412-2462	24.0	2.66	0.51	24.51	282.49	0.2	768
5.2G Wi-Fi	5180-5240	15.0	2.23	0.08	15.08	32.21	0.2	768
5.3G Wi-Fi	5260-5320	15.5	2.23	0.08	15.58	36.14	0.2	768
5.6G Wi-Fi	5500-5720	13.5	2.23	0.08	13.58	22.80	0.2	768
5.8G Wi-Fi	5745-5825	14.5	2.23	0.08	14.58	28.71	0.2	768

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
 2. The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time.  
 3. 0dBd=2.15dBi

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result: Compliant.**

## RSS-102 § 2.5.2 –EXEMPTION LIMITS FOR ROUTINE EVALUATION-RF EXPOSURE EVALUATION

### Applicable Standard

According to RSS-102 § (2.5.2):

#### 2.5.2 Exemption Limits for Routine Evaluation — RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz<sup>6</sup> and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $22.48/f^{0.5}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### Result

For worst case:

Mode	Frequency (MHz)	Maximum tune-up conducted power <sup>#</sup>	Antenna Gain <sup>#</sup> (dBi)	Maximum tune-up EIRP		Evaluation Distance (cm)	Limit (mW)
		(dBm)		(dBm)	(mW)		
BT	2402-2480	11.0	2.66	13.66	23.23	20	2676
BLE	2402-2480	6.5	2.66	9.16	8.24	20	2676
2.4G Wi-Fi	2412-2462	24.0	2.66	26.66	463.45	20	2684
5.2G Wi-Fi	5180-5240	15.0	2.23	17.23	52.84	20	4525
5.3G Wi-Fi	5260-5320	15.5	2.23	17.73	59.29	20	4573
5.6G Wi-Fi	5500-5720	13.5	2.23	15.73	37.41	20	4714
5.8G Wi-Fi	5745-5825	14.5	2.23	16.73	47.10	20	4857

Note: 1. The tune up conducted power and antenna gain was declared by the applicant.  
2. The BT, 2.4G Wi-Fi and 5G Wi-Fi cannot transmit at same time.

To maintain compliance with the IC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

**Result:** The RF Exposure evaluation can be exempted.

## §15.203 & RSS-Gen §6.8 ANTENNA REQUIREMENT

### Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Connector Construction**

The EUT has one internal antenna arrangement which was permanently attached, fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	Antenna Gain <sup>#</sup>	Impedance	Frequency Range
PCB	2.66dBi	50Ω	2.4~2.5GHz

**Result: Compliant.**

## **§15.207 (a) & RSS-GEN §8.8 AC LINE CONDUCTED EMISSIONS**

### **Applicable Standard**

FCC§15.207 (a) & RSS-GEN §8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50  $\mu$ H / 50  $\Omega$  line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

**Table 4 - AC Power Lines Conducted Emission Limits**


Frequency range (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 <sup>1</sup>	56 to 46 <sup>1</sup>
0.5 – 5	56	46
5 – 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

- (a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.
- (b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

## EUT Setup

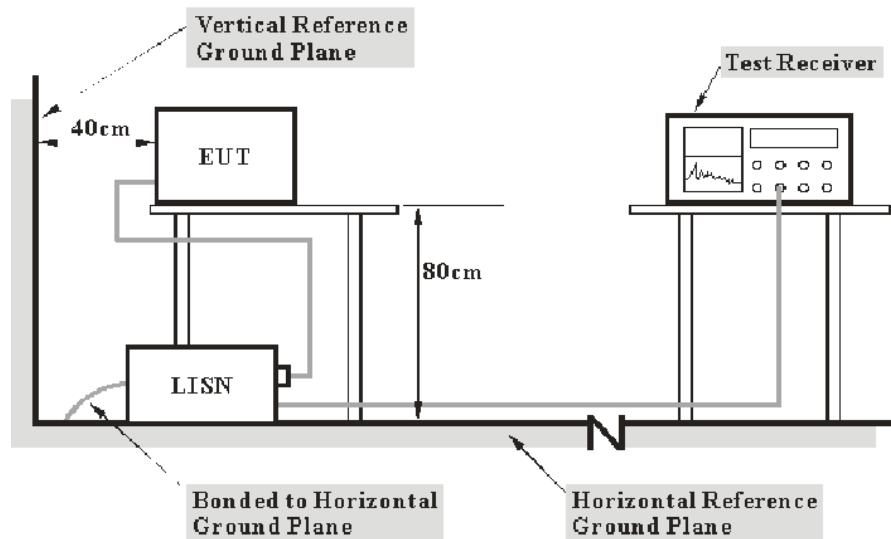

- Note:
1. Support units were connected to second LISN.
  2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 & RSS-247/RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

## Factor & Over Limit Calculation

The factor is calculated by adding LISN VDF (Voltage Division Factor) and Cable Loss. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over limit of -7 dB means the emission is 7 dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit} &= \text{Level} - \text{Limit} \\ \text{Level} &= \text{Read Level} + \text{Factor}\end{aligned}$$

Note: The term "cable loss" refers to the combination of a cable and a 10dB transient limiter (attenuator).


## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	38~48 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Macy Shi on 2024-03-21.*

*EUT operation mode: Transmitting (Adapter power supply is worst case)*

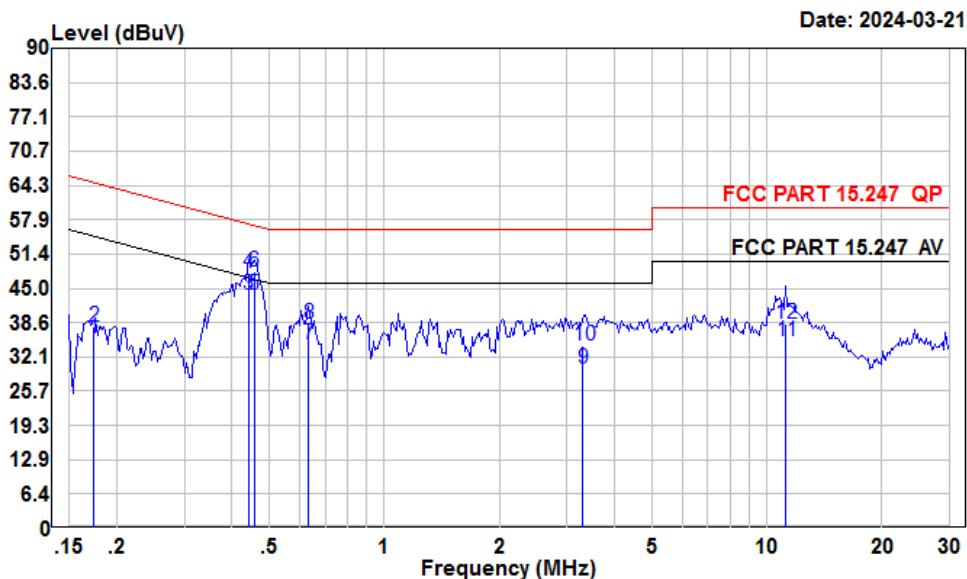**BLE:** (maximum output power mode, Low channel)**AC 120V/60 Hz, Line**


Condition: Line

Project : SZ1240109-02077E-RF

Tester : Macy shi

Note : BLE

Freq	Read		LISN Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV					
1	0.17	15.03	35.57	10.40	10.14	54.77	-19.20 Average
2	0.17	17.33	37.87	10.40	10.14	64.77	-26.90 QP
3	0.44	23.40	43.82	10.23	10.19	47.02	-3.20 Average
4	0.44	27.40	47.82	10.23	10.19	57.02	-9.20 QP
5	0.46	23.36	43.76	10.22	10.18	46.76	-3.00 Average
6	0.46	27.84	48.24	10.22	10.18	56.76	-8.52 QP
7	0.63	14.11	34.67	10.34	10.22	46.00	-11.33 Average
8	0.63	17.84	38.40	10.34	10.22	56.00	-17.60 QP
9	3.31	9.27	29.91	10.37	10.27	46.00	-16.09 Average
10	3.31	13.76	34.40	10.37	10.27	56.00	-21.60 QP
11	11.20	14.72	35.02	10.08	10.22	50.00	-14.98 Average
12	11.20	18.11	38.41	10.08	10.22	60.00	-21.59 QP

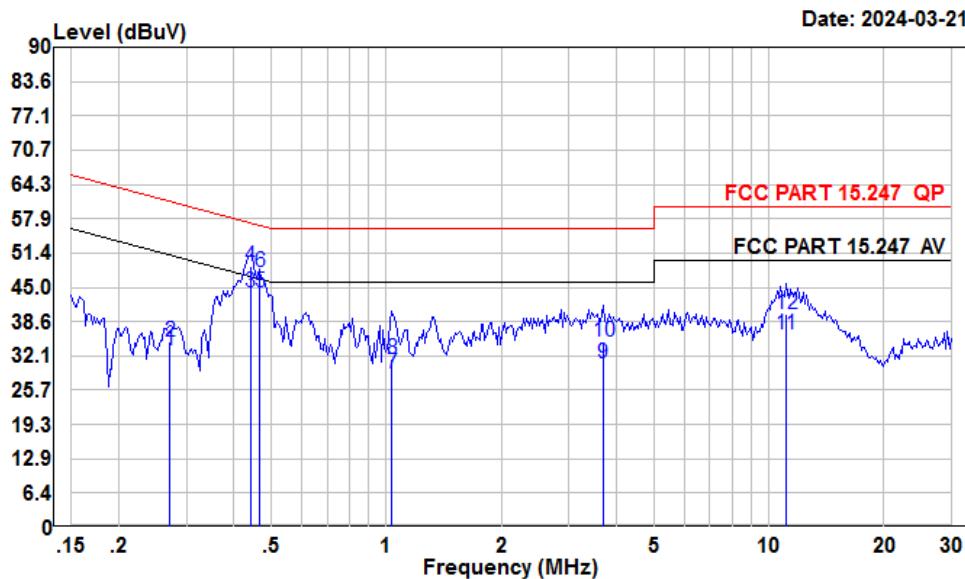**AC 120V/60 Hz, Neutral**

Condition: Neutral

Project : SZ1240109-02077E-RF


Tester : Macy shi

Note : BLE

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level Factor	Loss	Line	
1	0.27	12.41	33.25	10.67	10.17	51.07 -17.82 Average
2	0.27	14.10	34.94	10.67	10.17	61.07 -26.13 QP
3	0.44	23.13	44.09	10.77	10.19	47.02 -2.93 Average
4	0.44	27.92	48.88	10.77	10.19	57.02 -8.14 QP
5	0.47	23.01	43.96	10.78	10.17	46.58 -2.62 Average
6	0.47	26.91	47.86	10.78	10.17	56.58 -8.72 QP
7	1.03	8.46	28.93	10.29	10.18	46.00 -17.07 Average
8	1.03	11.06	31.53	10.29	10.18	56.00 -24.47 QP
9	3.68	10.17	30.79	10.36	10.26	46.00 -15.21 Average
10	3.68	14.27	34.89	10.36	10.26	56.00 -21.11 QP
11	11.08	15.53	36.31	10.55	10.23	50.00 -13.69 Average
12	11.08	19.33	40.11	10.55	10.23	60.00 -19.89 QP

**2.4G Wi-Fi:** (maximum output power mode, 802.11g low channel)

**AC 120V/60 Hz, Line**

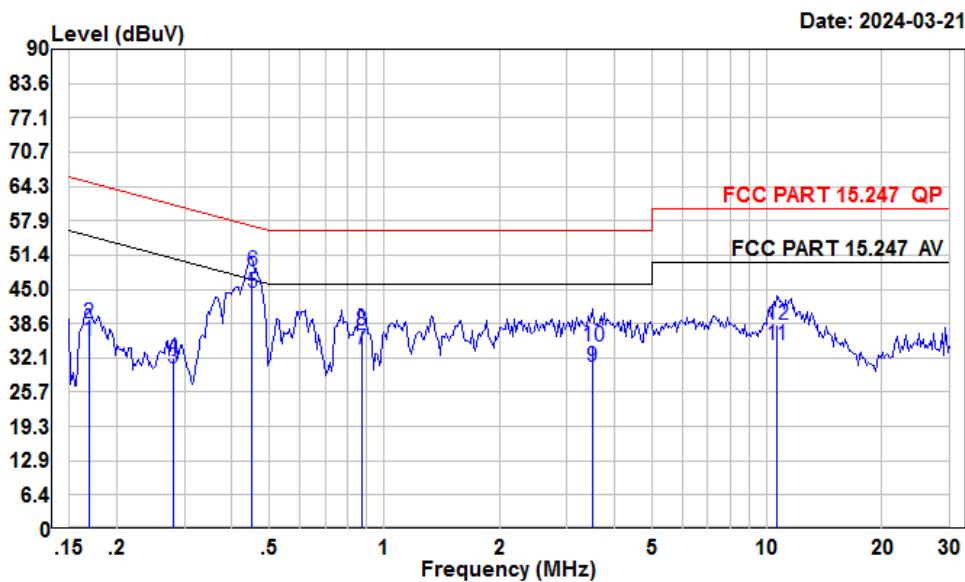


Condition: Line

Project : SZ1240109-02077E-RF

Tester : Macy shi

Note : 2.4G WIFI

Freq	Read	LISN	Cable	Limit	Over	Remark
	MHz	Level	Level	Factor	Loss	
1	0.17	14.90	35.45	10.40	10.15	55.03 -19.58 Average
2	0.17	17.94	38.49	10.40	10.15	65.03 -26.54 QP
3	0.28	9.69	30.18	10.33	10.16	50.81 -20.63 Average
4	0.28	11.74	32.23	10.33	10.16	60.81 -28.58 QP
5	0.45	23.97	44.37	10.22	10.18	46.85 -2.48 Average
6	0.45	27.99	48.39	10.22	10.18	56.85 -8.46 QP
7	0.87	13.10	33.79	10.52	10.17	46.00 -12.21 Average
8	0.87	16.63	37.32	10.52	10.17	56.00 -18.68 QP
9	3.49	9.88	30.53	10.38	10.27	46.00 -15.47 Average
10	3.49	13.68	34.33	10.38	10.27	56.00 -21.67 QP
11	10.62	14.27	34.55	10.04	10.24	50.00 -15.45 Average
12	10.62	18.10	38.38	10.04	10.24	60.00 -21.62 QP

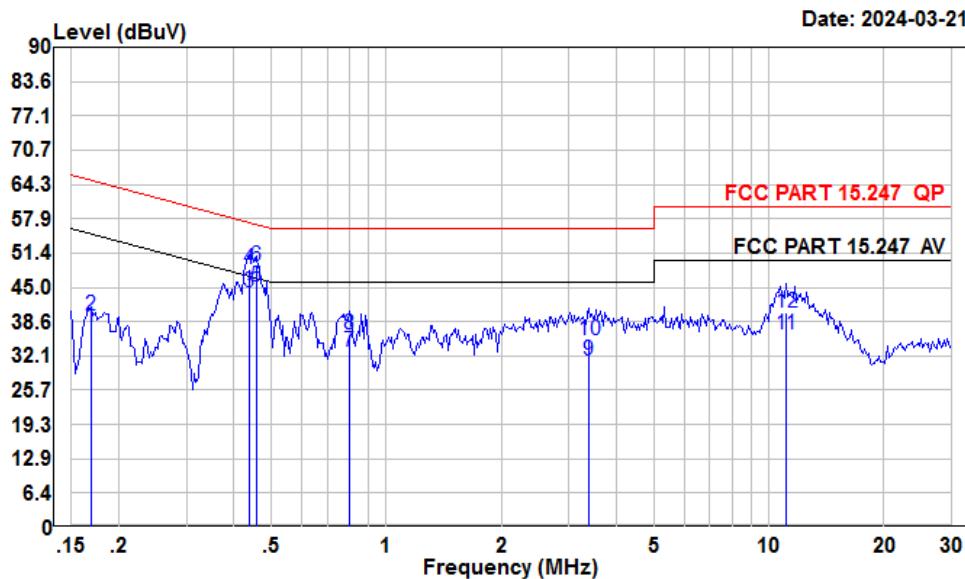**AC 120V/60 Hz, Neutral**

Condition: Neutral

Project : SZ1240109-02077E-RF

Tester : Macy shi

Note : 2.4G WIFI

Freq	Read		LISN	Cable	Limit	Over	Remark
	MHz	dBuV	Level	Factor	Loss	Line	
1	0.17	17.07	37.58	10.36	10.15	55.03	-17.45 Average
2	0.17	19.30	39.81	10.36	10.15	65.03	-25.22 QP
3	0.44	23.19	44.15	10.77	10.19	47.11	-2.96 Average
4	0.44	27.58	48.54	10.77	10.19	57.11	-8.57 QP
5	0.46	24.10	45.06	10.78	10.18	46.76	-1.70 Average
6	0.46	27.90	48.86	10.78	10.18	56.76	-7.90 QP
7	0.80	12.41	33.00	10.42	10.17	46.00	-13.00 Average
8	0.80	15.53	36.12	10.42	10.17	56.00	-19.88 QP
9	3.38	10.72	31.32	10.33	10.27	46.00	-14.68 Average
10	3.38	14.37	34.97	10.33	10.27	56.00	-21.03 QP
11	11.08	15.52	36.30	10.55	10.23	50.00	-13.70 Average
12	11.08	19.37	40.15	10.55	10.23	60.00	-19.85 QP

## §15.205, §15.209, §15.247(d) & RSS-GEN § 8.10 & RSS-247 § 5.5 SPURIOUS EMISSIONS

### Applicable Standard

FCC §15.247 (d); §15.209; §15.205;


According to RSS-GEN § 8.10 & RSS-247 § 5.5



Restricted frequency bands, identified in table 7, are designated primarily for safety-of-life services (distress calling and certain aeronautical activities), certain satellite downlinks, radio astronomy and some government uses. Except where otherwise indicated, the following conditions related to the restricted frequency bands apply:(a) The transmit frequency, including fundamental components of modulation, of licence-exempt radio apparatus shall not fall within the restricted frequency bands listed in table 7 except for apparatus compliant with RSS-287, Emergency Position Indicating Radio Beacons (EPIRB), Emergency Locator Transmitters (ELT), Personal Locator Beacons (PLB), and Maritime Survivor Locator Devices (MSLD).(b) Unwanted emissions that fall into restricted frequency bands listed in table 7 shall comply with the limits specified in table 5 and table 6.(c) Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

### EUT Setup

9 kHz-30MHz:

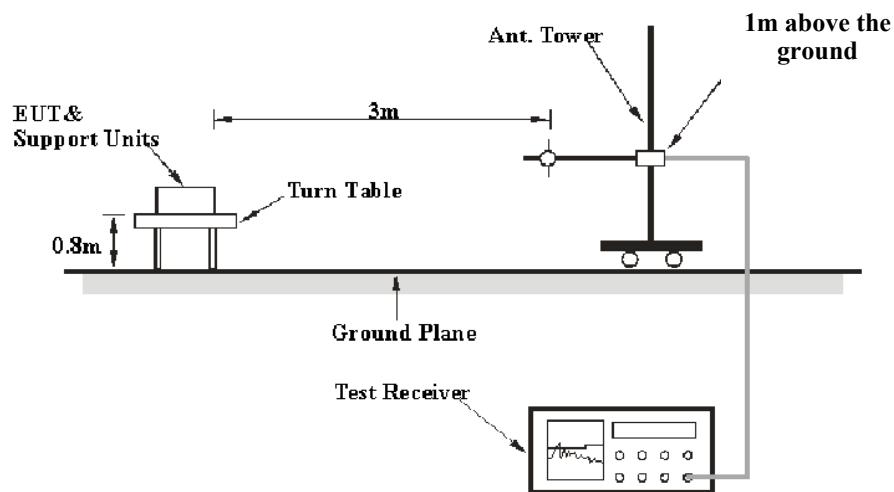

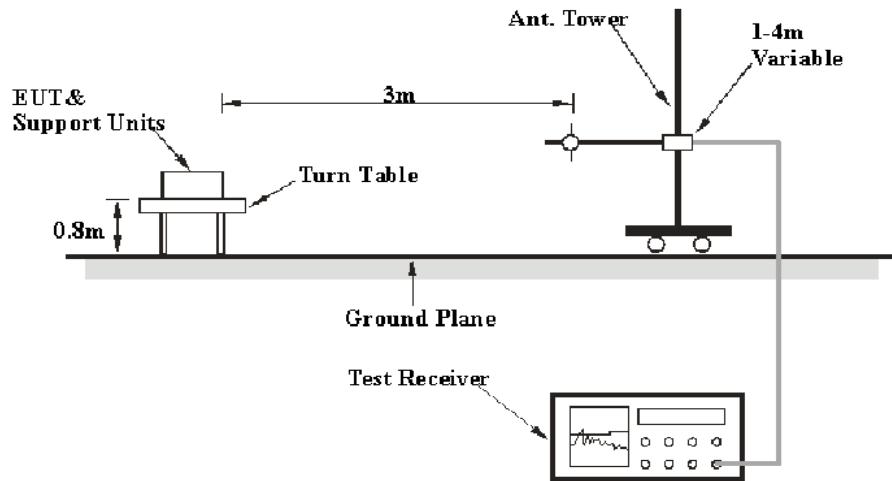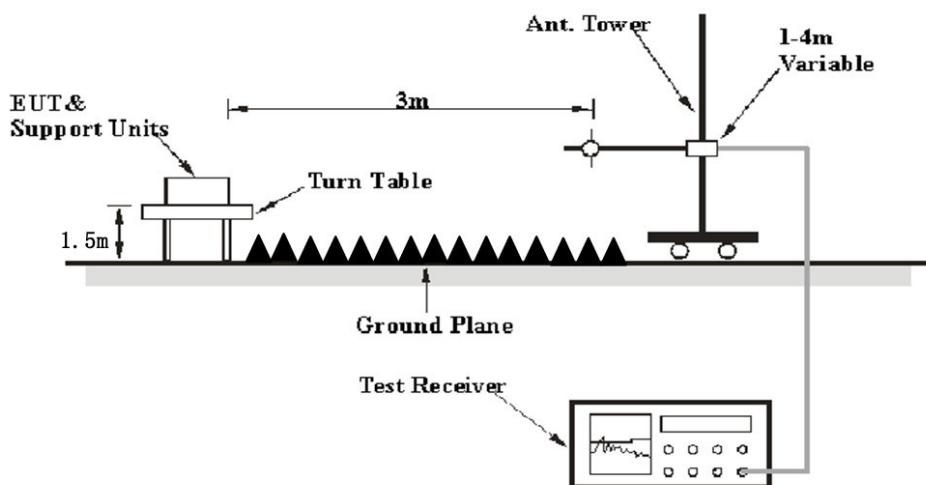**30MHz-1GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013 & RSS-Gen. The specification used was the FCC 15.209, and FCC 15.247 & RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9 kHz-1GHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
9 kHz – 150 kHz	/	/	200 Hz	QP
	300 Hz	1 kHz	/	PK
150 kHz – 30 MHz	/	/	9 kHz	QP
	10 kHz	30 kHz	/	PK
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK

1-25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, average detection modes for frequency bands 9–90 kHz and 110–490 kHz, peak and average detection modes for frequencies above 1 GHz.

For 9 kHz-30MHz, the report shall list the six emissions with the smallest margin relative to the limit, for each of the three antenna orientations (parallel, perpendicular, and ground-parallel) unless the margin is greater than 20 dB.

All emissions under the average limit and under the noise floor have not recorded in the report.

## Factor & Over Limit/Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Over Limit/Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit/margin of -7dB means the emission is 7dB below the limit. The equation for calculation is as follows:

$$\begin{aligned}\text{Over Limit/Margin} &= \text{Level/Corrected Amplitude} - \text{Limit} \\ \text{Level / Corrected Amplitude} &= \text{Read Level} + \text{Factor}\end{aligned}$$

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23~26 °C
<b>Relative Humidity:</b>	51~55 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Warren Huang on 2024-03-21 for below 1GHz, Tyler Wu and Zenos Qiao on 2024-03-15 for above 1GHz.*

*EUT operation mode: Transmitting (POE power supply is worst case)*


**BLE:** (Maximum output power mode, Low channel)

**9 kHz-30MHz:**

*The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.*


**30MHz-1GHz:**

Horizontal

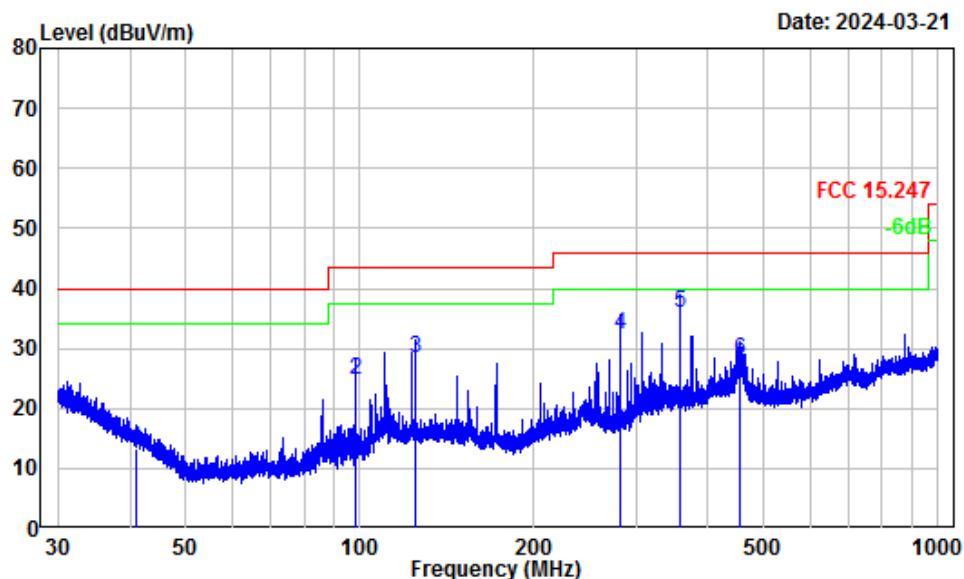

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: SZ1240109-02077E-RF  
Note : BLE  
Tester : Warren Huang

Freq	Factor	Read		Limit		Over Line Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	40.95	-11.00	24.18	13.18	40.00	-26.82	QP
2	98.31	-14.21	38.89	24.68	43.50	-18.82	QP
3	125.01	-10.32	38.64	28.32	43.50	-15.18	QP
4	282.61	-10.62	42.80	32.18	46.00	-13.82	QP
5	358.24	-9.44	45.23	35.79	46.00	-10.21	QP
6	454.71	-5.56	33.71	28.15	46.00	-17.85	QP

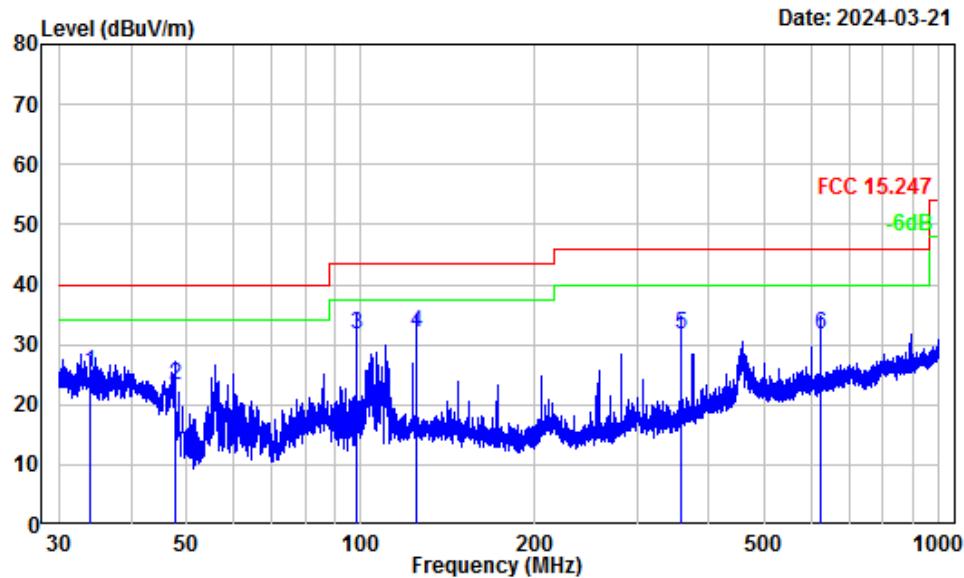**Vertical**

Site : Chamber A  
Condition : 3m Vertical  
Project Number: SZ1240109-02077E-RF  
Note : BLE  
Tester : Warren Huang

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	34.08	-8.18	33.50	25.32	40.00	-14.68	QP
2	47.81	-16.27	39.48	23.21	40.00	-16.79	QP
3	98.27	-15.60	47.21	31.61	43.50	-11.89	QP
4	125.01	-10.77	42.73	31.96	43.50	-11.54	QP
5	358.24	-9.72	41.48	31.76	46.00	-14.24	QP
6	625.08	-3.65	35.38	31.73	46.00	-14.27	QP


**2.4G Wi-Fi:** (maximum output power mode, 802.11g low channel)

**9 kHz-30MHz:**

The amplitude of spurious emissions attenuated more than 20 dB below the limit was not recorded.


**30MHz-1GHz:**

**Horizontal**

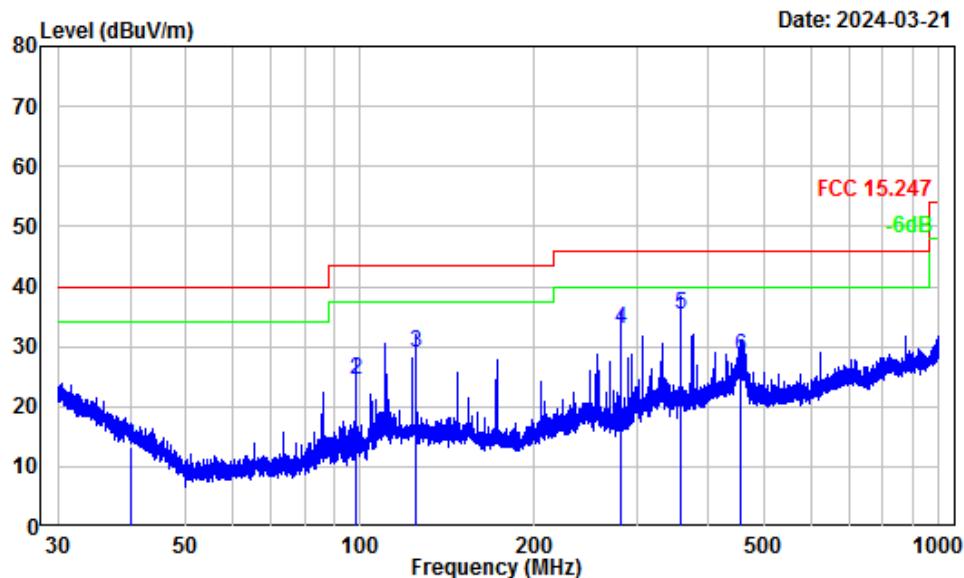

Site : Chamber A  
Condition : 3m Horizontal  
Project Number: SZ1240109-02077E-RF  
Note : 2.4G WIFI  
Tester : Warren Huang

Freq	Factor	Read		Limit Line	Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m	dB
1		40.21	-10.52	23.65	13.13	40.00 -26.87 QP
2		98.31	-14.21	38.55	24.34	43.50 -19.16 QP
3		125.01	-10.32	39.18	28.86	43.50 -14.64 QP
4		282.61	-10.62	43.60	32.98	46.00 -13.02 QP
5		358.24	-9.44	44.67	35.23	46.00 -10.77 QP
6		454.71	-5.56	33.84	28.28	46.00 -17.72 QP

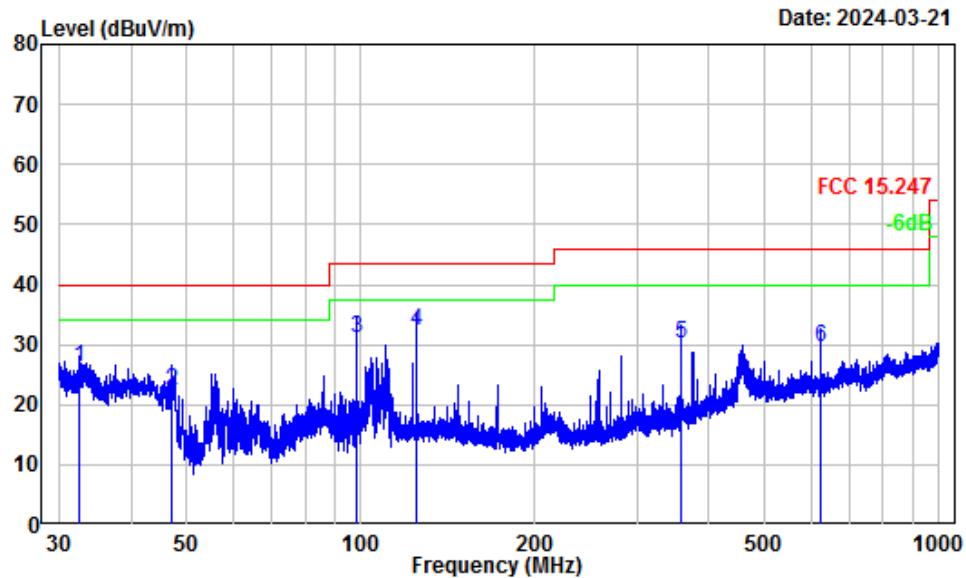**Vertical**

Site : Chamber A  
Condition : 3m Vertical  
Project Number: SZ1240109-02077E-RF  
Note : 2.4G WIFI  
Tester : Warren Huang

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m	dBuV/m	
1	32.56	-7.20	33.40	26.20	40.00	-13.80	QP
2	47.06	-15.86	38.32	22.46	40.00	-17.54	QP
3	98.27	-15.60	46.69	31.09	43.50	-12.41	QP
4	125.01	-10.77	43.03	32.26	43.50	-11.24	QP
5	358.24	-9.72	39.78	30.06	46.00	-15.94	QP
6	625.08	-3.65	33.27	29.62	46.00	-16.38	QP

**1-25 GHz:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave										
BLE 1M												
Low Channel 2402MHz												
4804.00	49.18	PK	H	2.42	51.60	74	-22.40					
4804.00	40.27	AV	H	2.42	42.69	54	-11.31					
4804.00	48.32	PK	V	2.42	50.74	74	-23.26					
4804.00	39.69	PK	V	2.42	42.11	54	-11.89					
Middle Channel 2440MHz												
4880.00	50.37	PK	H	2.58	52.95	74	-21.05					
4880.00	42.54	AV	H	2.58	45.12	54	-8.88					
4880.00	49.43	PK	V	2.58	52.01	74	-21.99					
4880.00	41.72	PK	V	2.58	44.30	54	-9.70					
High Channel 2480MHz												
4960.00	51.36	PK	H	2.68	54.04	74	-19.96					
4960.00	44.85	AV	H	2.68	47.53	54	-6.47					
4960.00	50.39	PK	V	2.68	53.07	74	-20.93					
4960.00	44.14	PK	V	2.68	46.82	54	-7.18					

**Note:**

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

**2.4G Wi-Fi**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave										
<b>802.11b</b>												
Low Channel 2412MHz												
4824.00	48.48	PK	H	2.45	50.93	74	-23.07					
4824.00	33.69	AV	H	2.45	36.14	54	-17.86					
4824.00	47.82	PK	V	2.45	50.27	74	-23.73					
4824.00	32.91	PK	V	2.45	35.36	54	-18.64					
Middle Channel 2437MHz												
4874.00	49.76	PK	H	2.56	52.32	74	-21.68					
4874.00	38.52	AV	H	2.56	41.08	54	-12.92					
4874.00	49.01	PK	V	2.56	51.57	74	-22.43					
4874.00	37.63	PK	V	2.56	40.19	54	-13.81					
High Channel 2462MHz												
4924.00	51.05	PK	H	2.63	53.68	74	-20.32					
4924.00	43.32	AV	H	2.63	45.95	54	-8.05					
4924.00	50.24	PK	V	2.63	52.87	74	-21.13					
4924.00	42.57	PK	V	2.63	45.20	54	-8.80					
<b>802.11g</b>												
Low Channel 2412MHz												
4824.00	50.17	PK	H	2.45	52.62	74	-21.38					
4824.00	34.04	AV	H	2.45	36.49	54	-17.51					
4824.00	49.29	PK	V	2.45	51.74	74	-22.26					
4824.00	33.38	PK	V	2.45	35.83	54	-18.17					
Middle Channel 2437MHz												
4874.00	53.25	PK	H	2.56	55.81	74	-18.19					
4874.00	36.87	AV	H	2.56	39.43	54	-14.57					
4874.00	52.41	PK	V	2.56	54.97	74	-19.03					
4874.00	35.96	PK	V	2.56	38.52	54	-15.48					
High Channel 2462MHz												
4924.00	56.36	PK	H	2.63	58.99	74	-15.01					
4924.00	39.93	AV	H	2.63	42.56	54	-11.44					
4924.00	55.52	PK	V	2.63	58.15	74	-15.85					
4924.00	39.05	PK	V	2.63	41.68	54	-12.32					

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)					
	Reading (dB $\mu$ V)	PK/Ave										
<b>802.11n20</b>												
Low Channel 2412MHz												
4824.00	50.58	PK	H	2.45	53.03	74	-20.97					
4824.00	33.91	AV	H	2.45	36.36	54	-17.64					
4824.00	49.73	PK	V	2.45	52.18	74	-21.82					
4824.00	33.12	PK	V	2.45	35.57	54	-18.43					
Middle Channel 2437MHz												
4874.00	52.96	PK	H	2.56	55.52	74	-18.48					
4874.00	36.63	AV	H	2.56	39.19	54	-14.81					
4874.00	52.18	PK	V	2.56	54.74	74	-19.26					
4874.00	35.87	PK	V	2.56	38.43	54	-15.57					
High Channel 2462MHz												
4924.00	56.01	PK	H	2.63	58.64	74	-15.36					
4924.00	39.24	AV	H	2.63	41.87	54	-12.13					
4924.00	55.19	PK	V	2.63	57.82	74	-16.18					
4924.00	38.37	PK	V	2.63	41.00	54	-13.00					


**Note:**

Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor


Corrected Amplitude = Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.

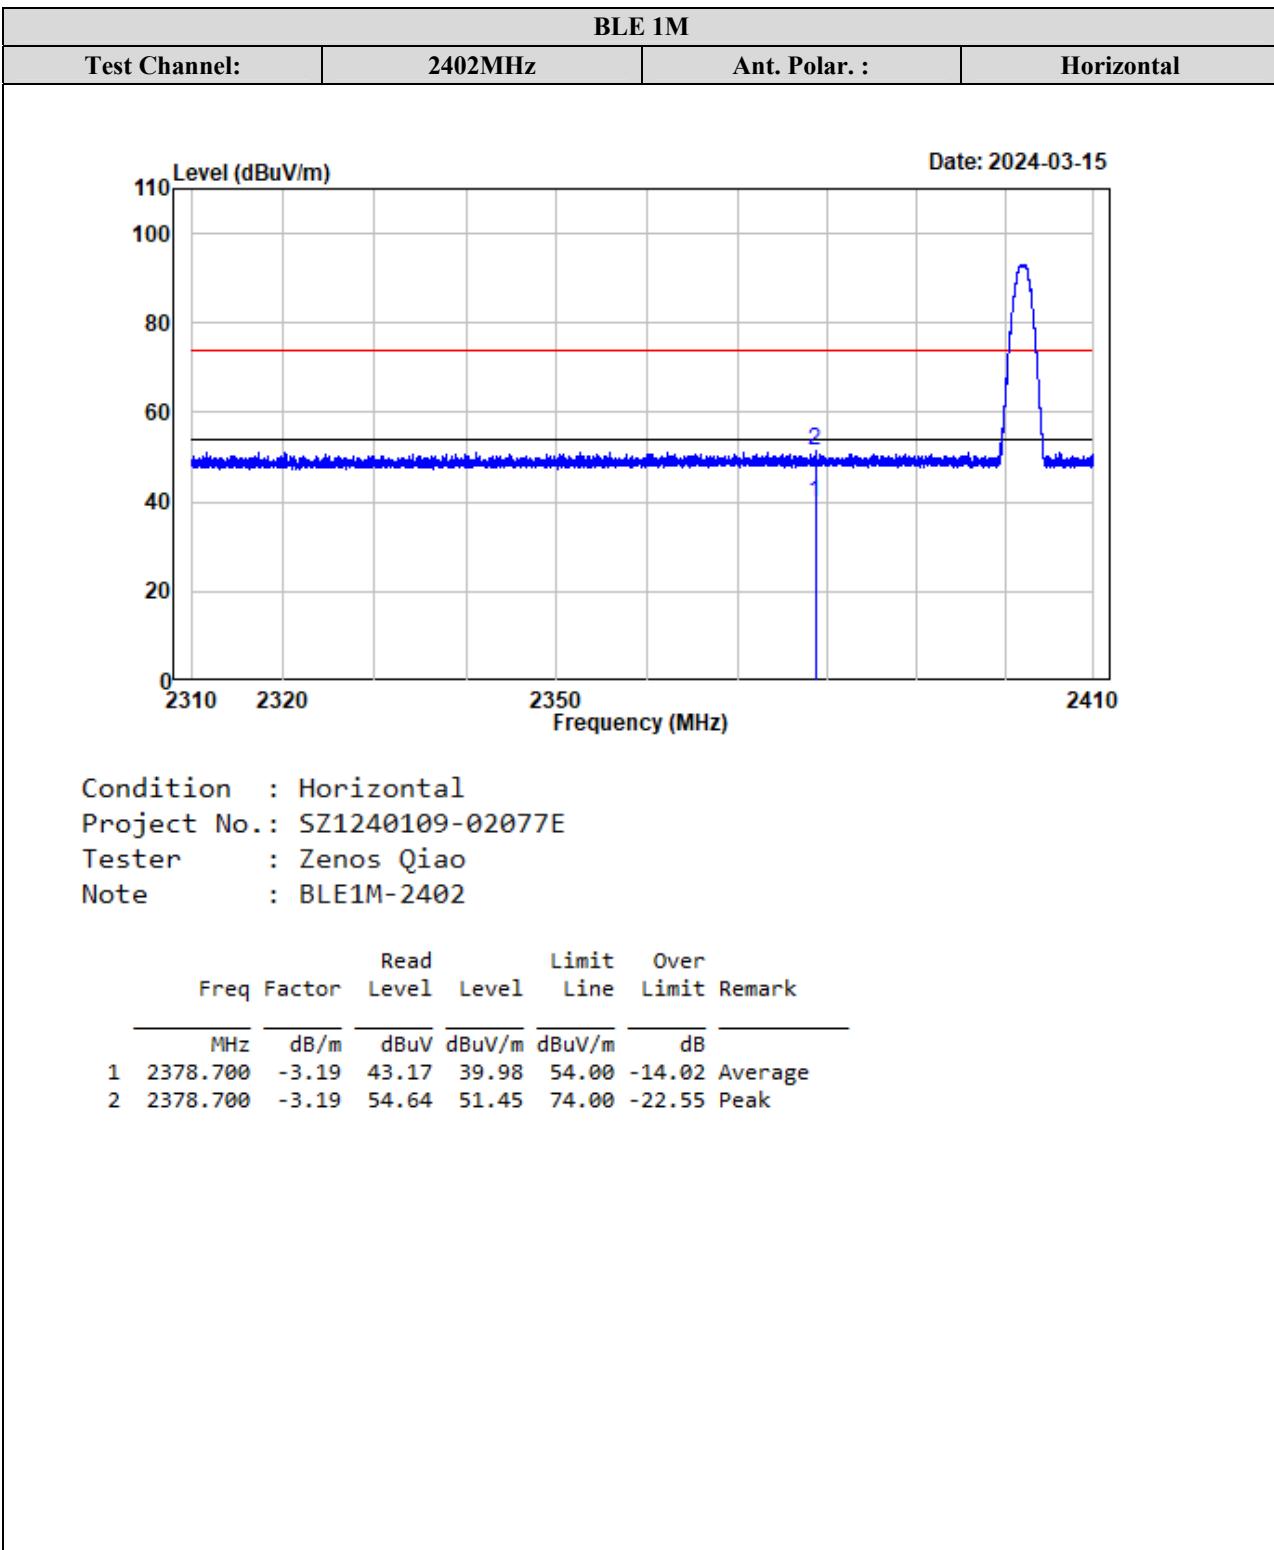**Test plots for Band Edge Measurements (Radiated):**


BLE 1M			
Test Channel:	2402MHz	Ant. Polar. :	Vertical

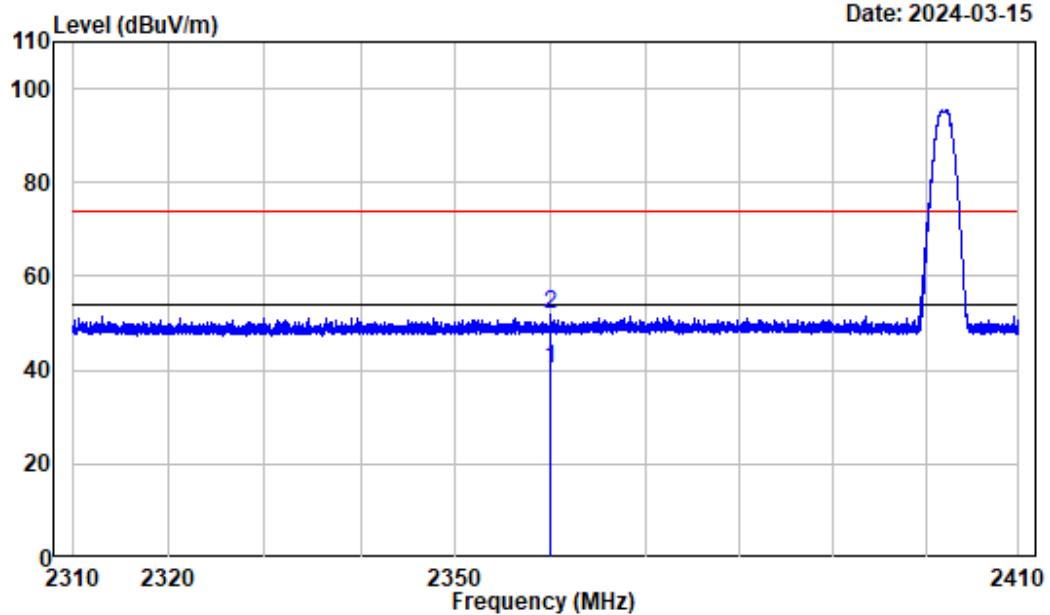

Condition : Vertical  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : BLE1M-2402

	Freq	Read Factor	Level	Limit Level	Line	Over Limit	Remark
	MHz	dB/m	dBuV	dBuV/m	dBuV/m	dB	
1	2359.925	-3.16	43.35	40.19	54.00	-13.81	Average
2	2359.925	-3.16	54.99	51.83	74.00	-22.17	Peak


Test Channel:	2480MHz	Ant. Polar. :	Horizontal
---------------	---------	---------------	------------

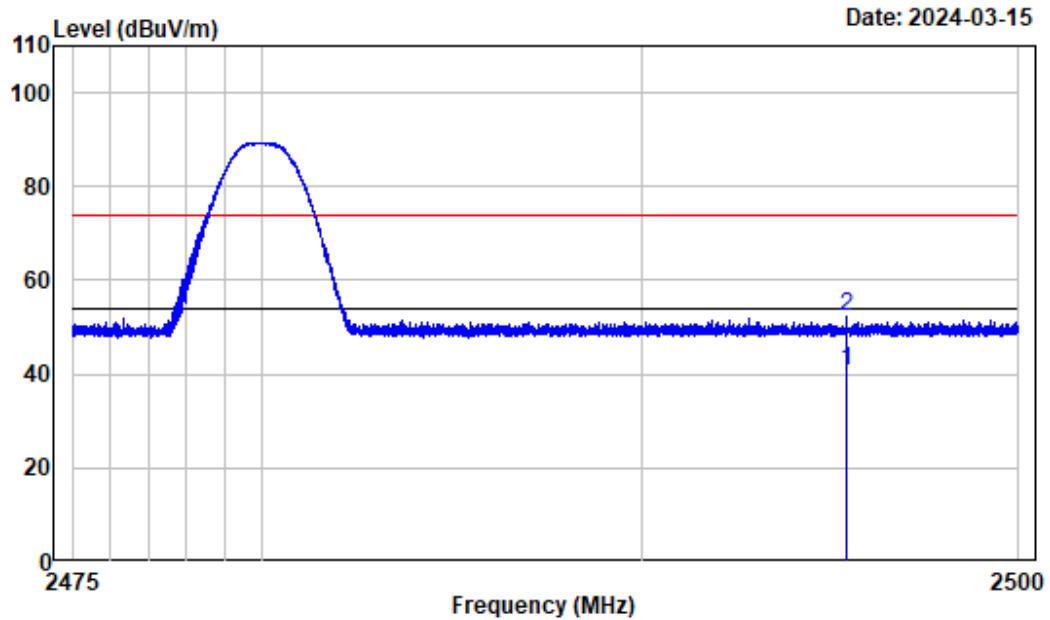

Condition : Vertical  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : BLE1M-2480

Freq	Factor	Read		Limit		Over Line	Remark
		MHz	dB/m	Level	dBuV	dBuV/m	
1	2495.447	-3.19	44.01	40.82	54.00	-13.18	Average
2	2495.447	-3.19	55.35	52.16	74.00	-21.84	Peak


BLE 1M			
Test Channel:	2480MHz	Ant. Polar. :	Vertical

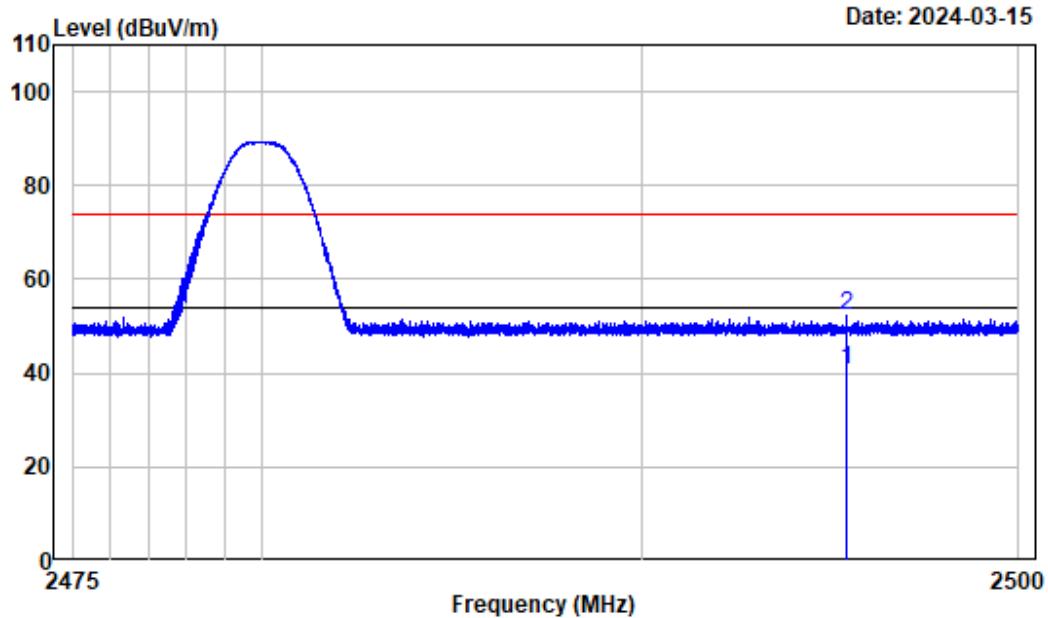

Condition : Vertical  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : BLE1M-2480

Freq	Factor	Read		Limit		Over	Remark
		Level	dBuV	Line	dBuV/m		
1	2495.447	-3.19	44.01	40.82	54.00	-13.18	Average
2	2495.447	-3.19	55.35	52.16	74.00	-21.84	Peak


802.11b			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

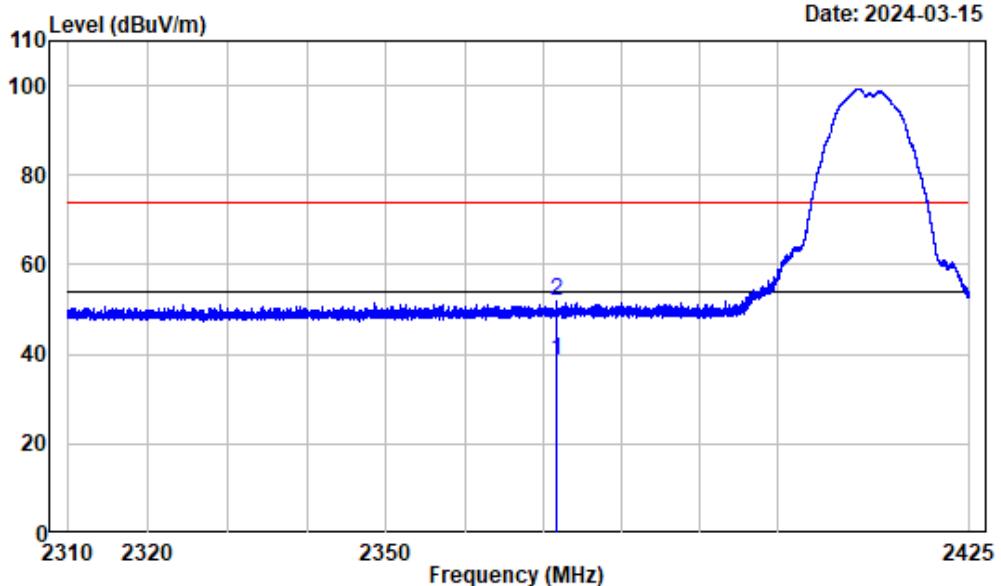

Condition : Horizontal  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2371.683	-3.17	41.74	38.57	54.00	-15.43	Average
2	2371.683	-3.17	55.26	52.09	74.00	-21.91	Peak

802.11b			
Test Channel:	2412MHz	Ant. Polar. :	Vertical

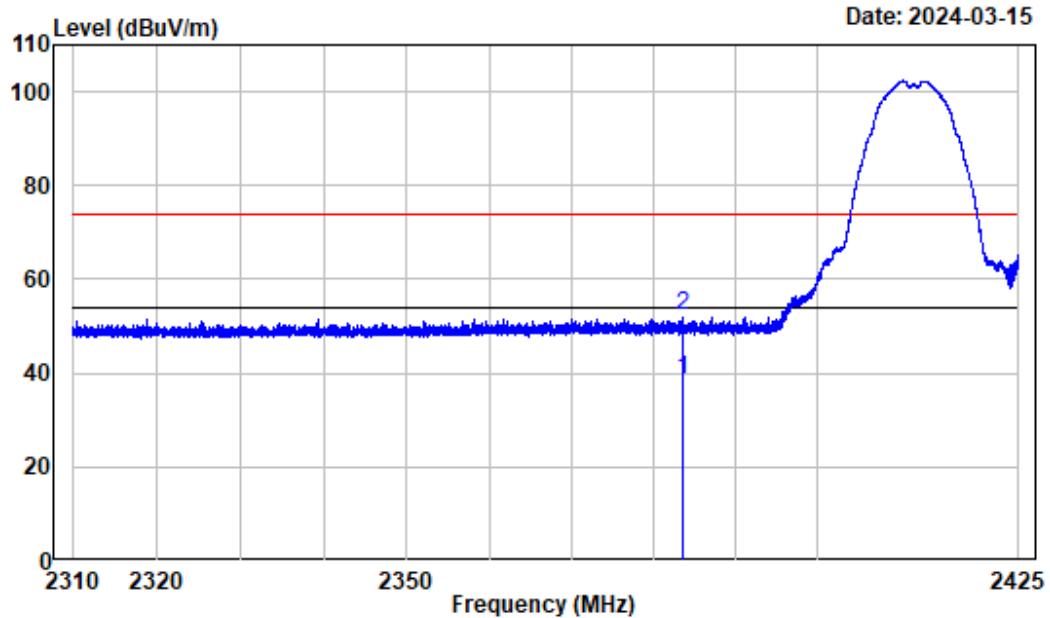

Condition : Vertical  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2412


Freq	Factor	Read		Limit		Over	Remark
		Level	dBuV	Line	dBuV/m		
1	2383.557	-3.20	41.94	38.74	54.00	-15.26	Average
2	2383.557	-3.20	55.48	52.28	74.00	-21.72	Peak

Test Channel:

2462MHz


Ant. Polar. :


Horizontal

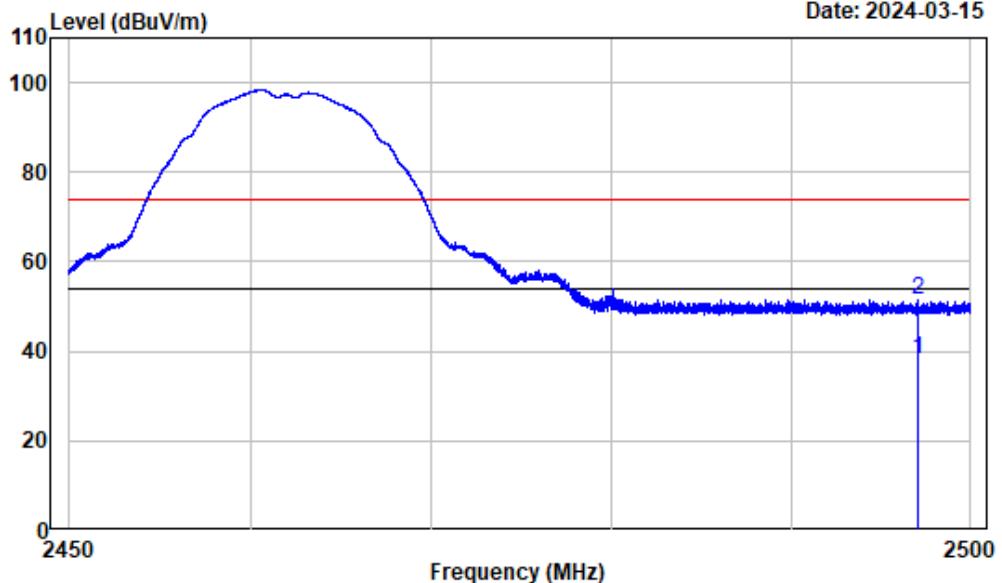


Condition : Horizontal  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GWiFi-b-2462


Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2497.025	-3.19	41.55	38.36	54.00	-15.64	Average
2	2497.025	-3.19	54.78	51.59	74.00	-22.41	Peak

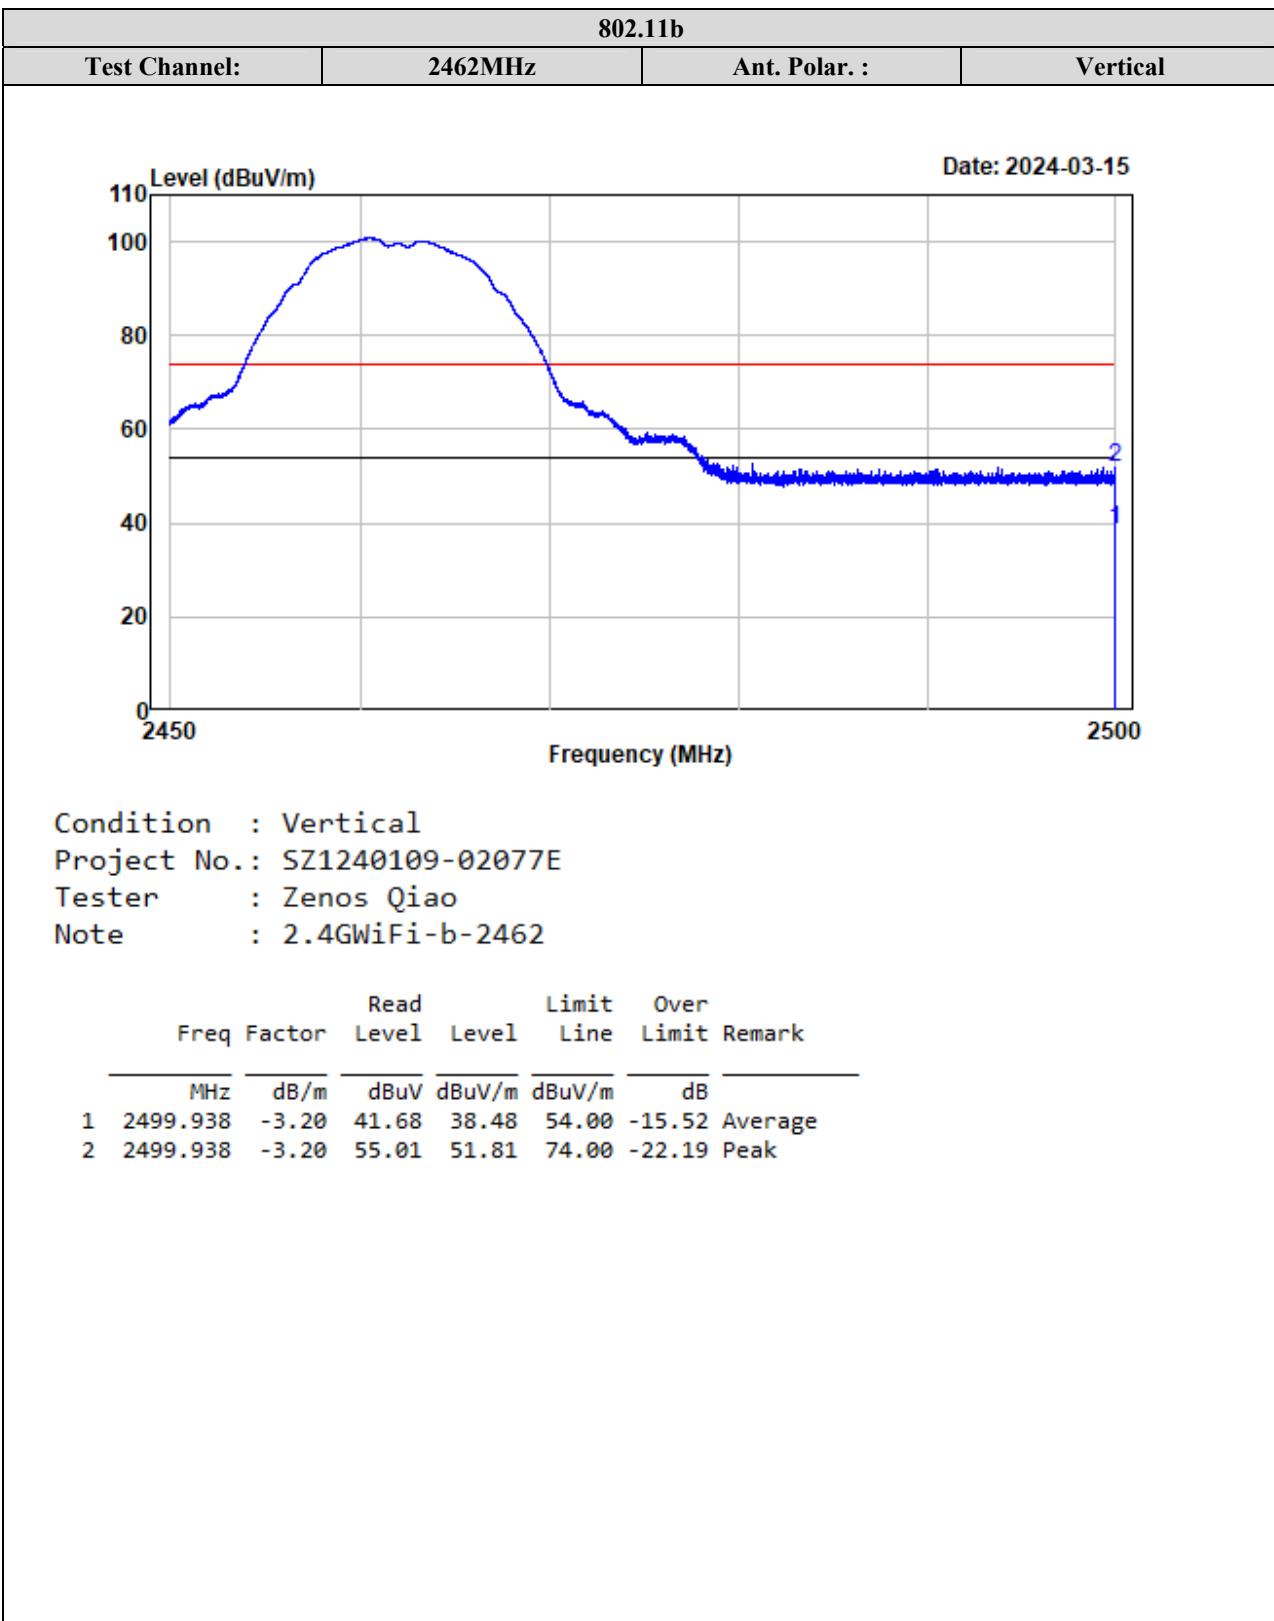

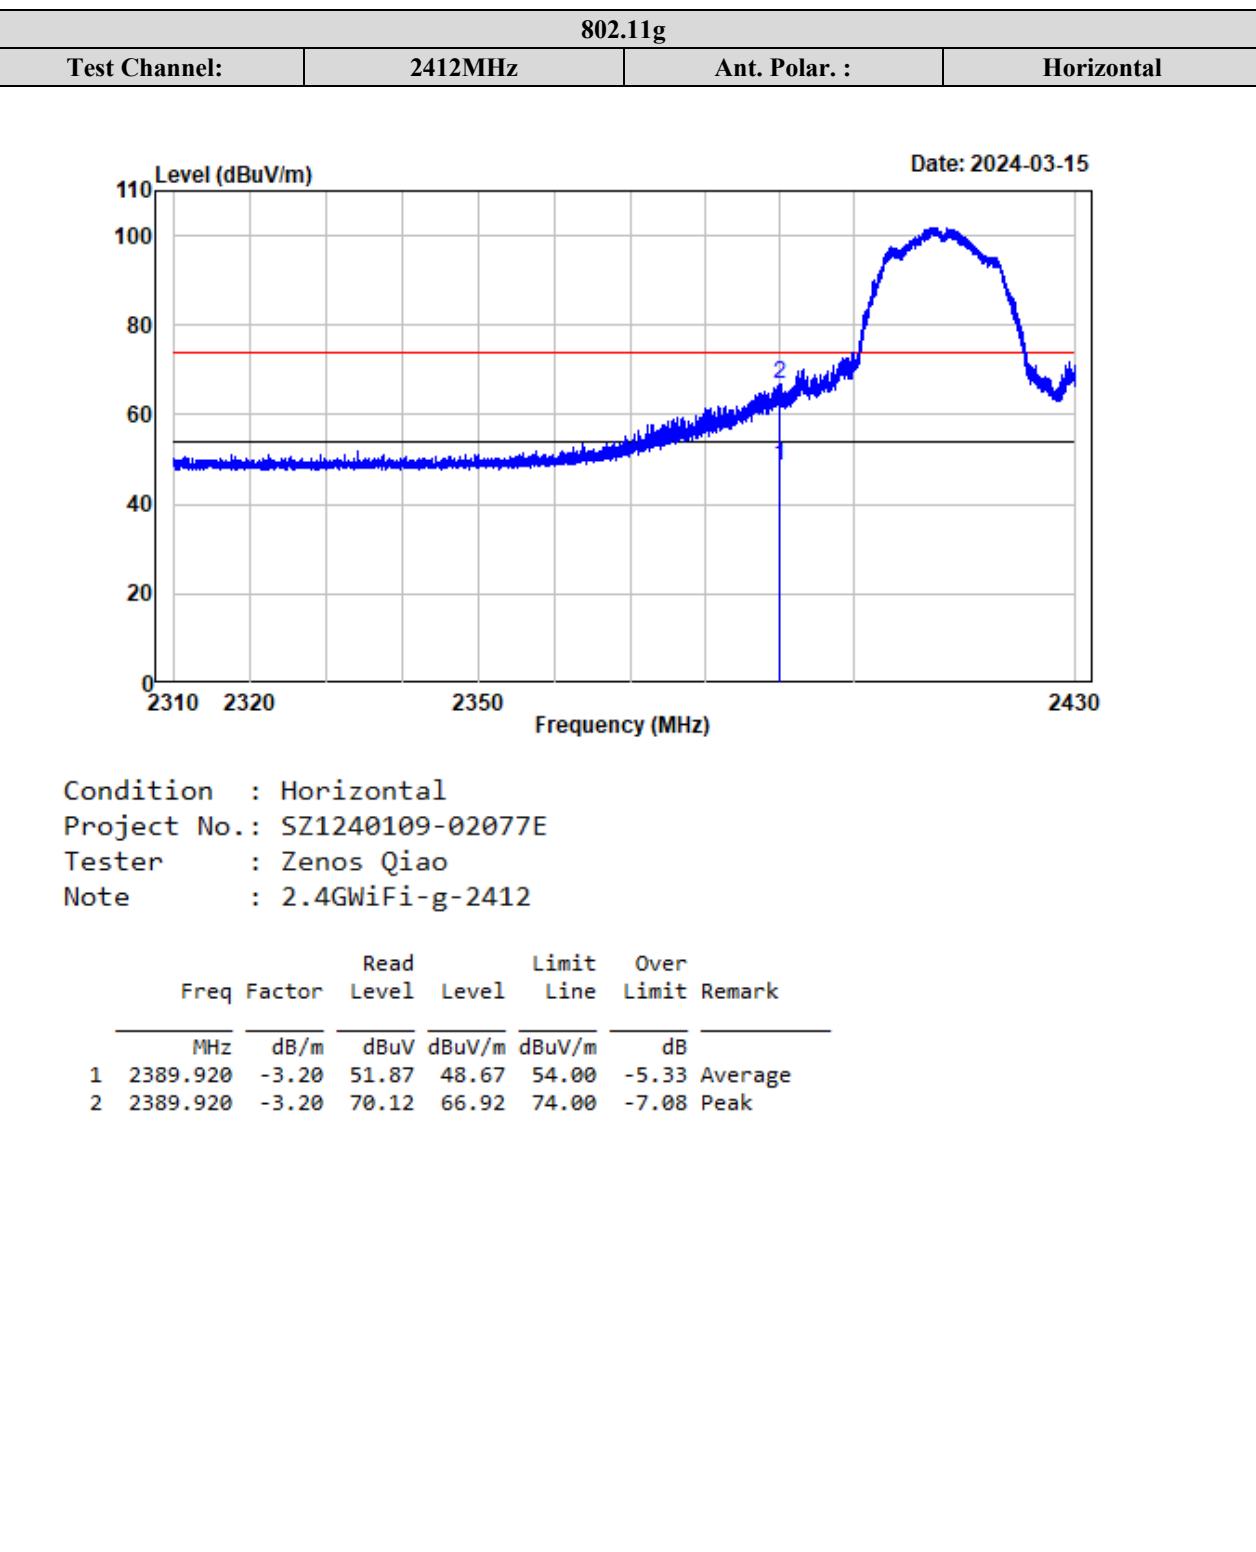

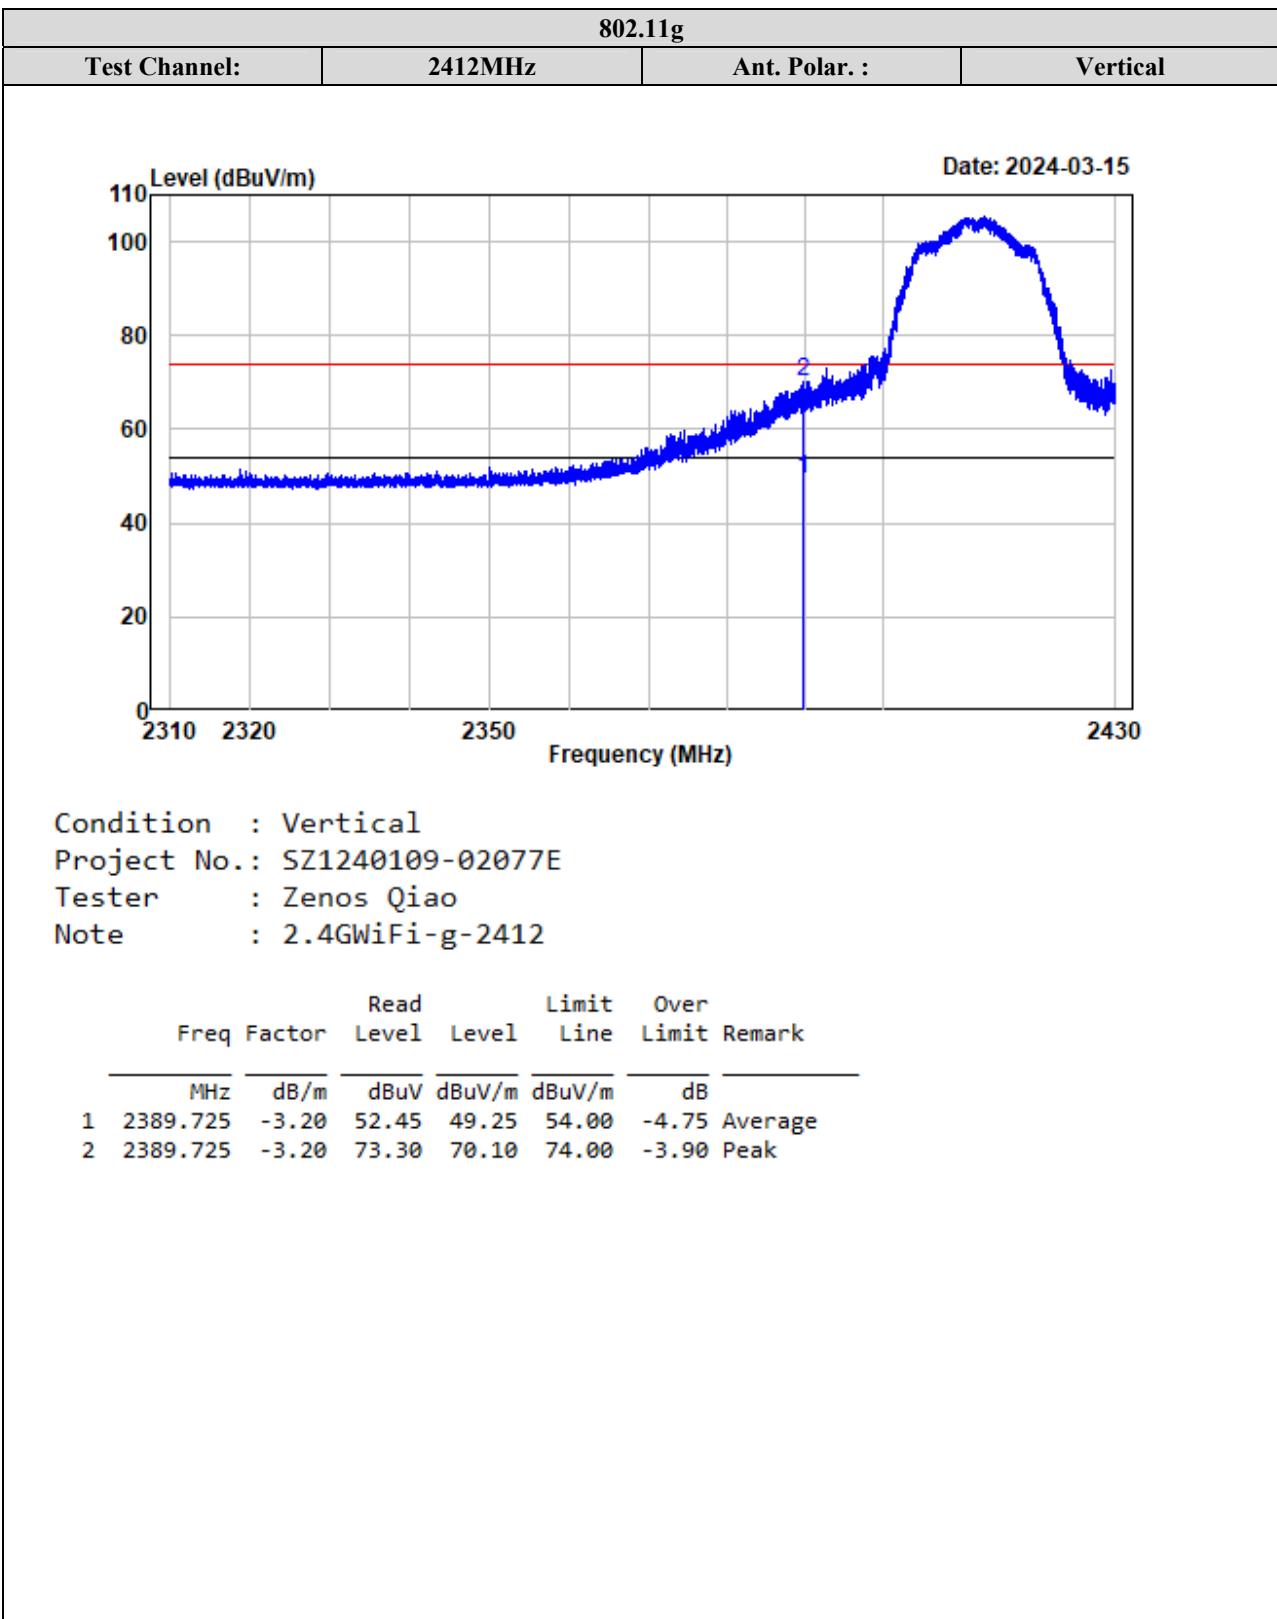


802.11g			
Test Channel:	2462MHz	Ant. Polar. :	Horizontal

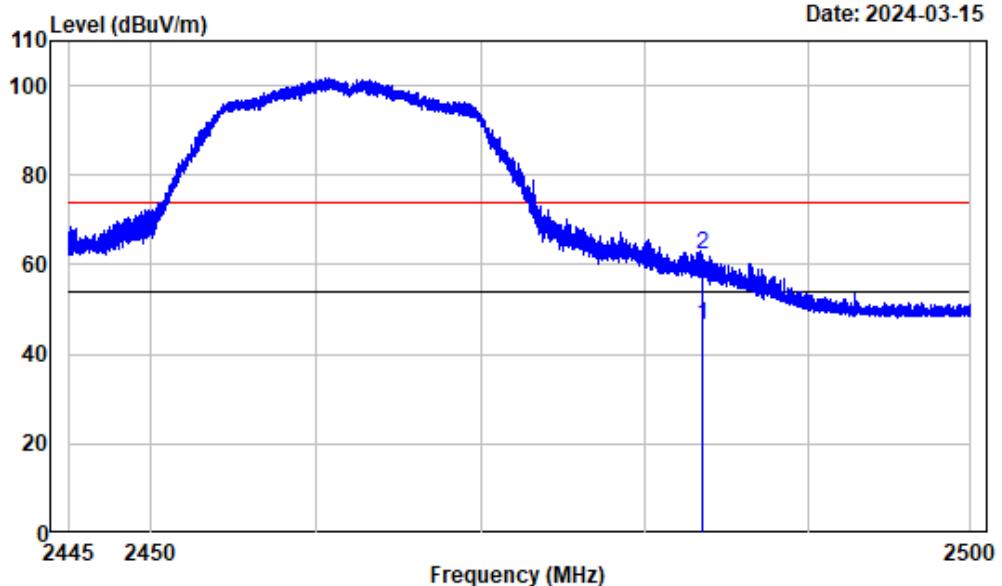


Condition : Horizontal  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GWiFi-g-2462

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2483.500	-3.17	49.64	46.47	54.00	-7.53	Average
2	2483.500	-3.17	65.36	62.19	74.00	-11.81	Peak

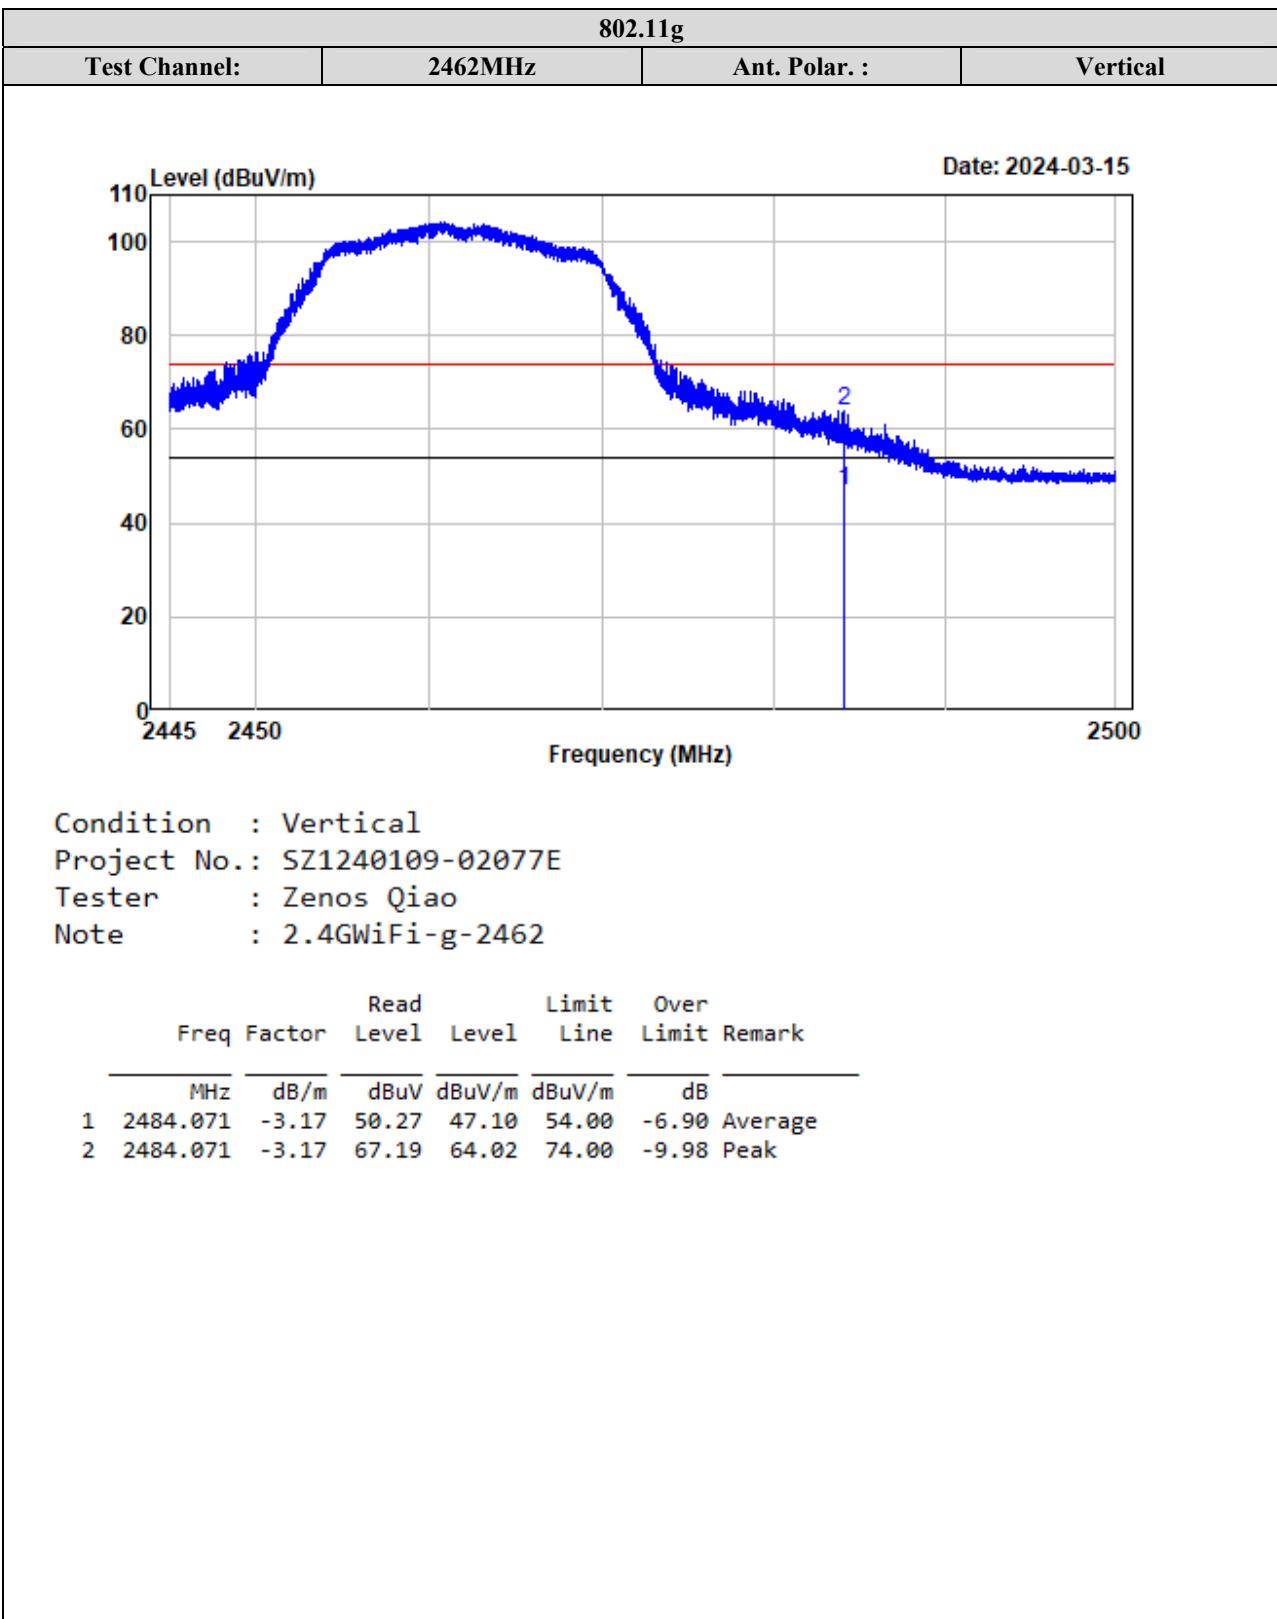


802.11n20			
Test Channel:	2412MHz	Ant. Polar. :	Horizontal

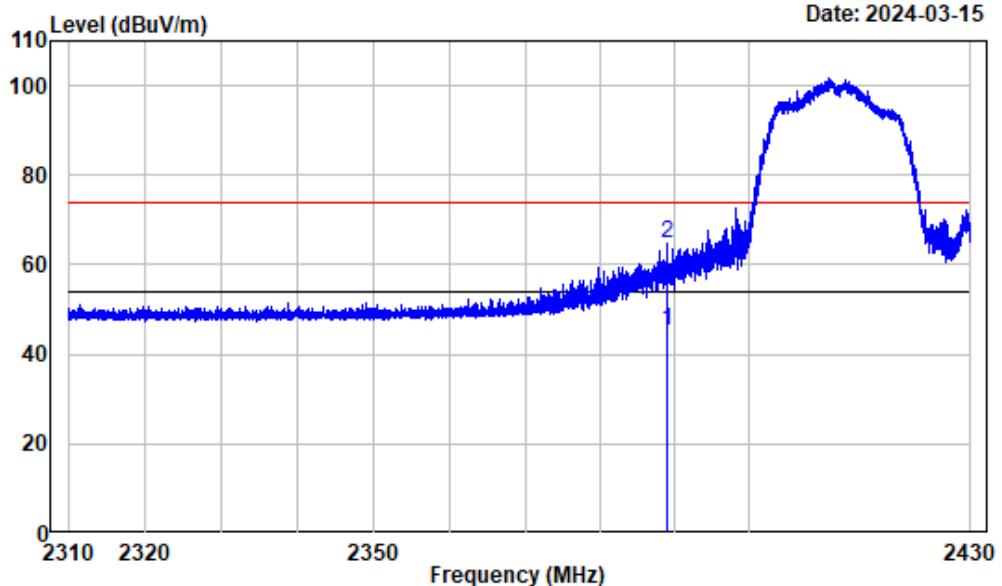


Condition : Horizontal  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GHzFi-n20-2412

Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2388.900	-3.20	48.57	45.37	54.00	-8.63	Average
2	2388.900	-3.20	67.90	64.70	74.00	-9.30	Peak

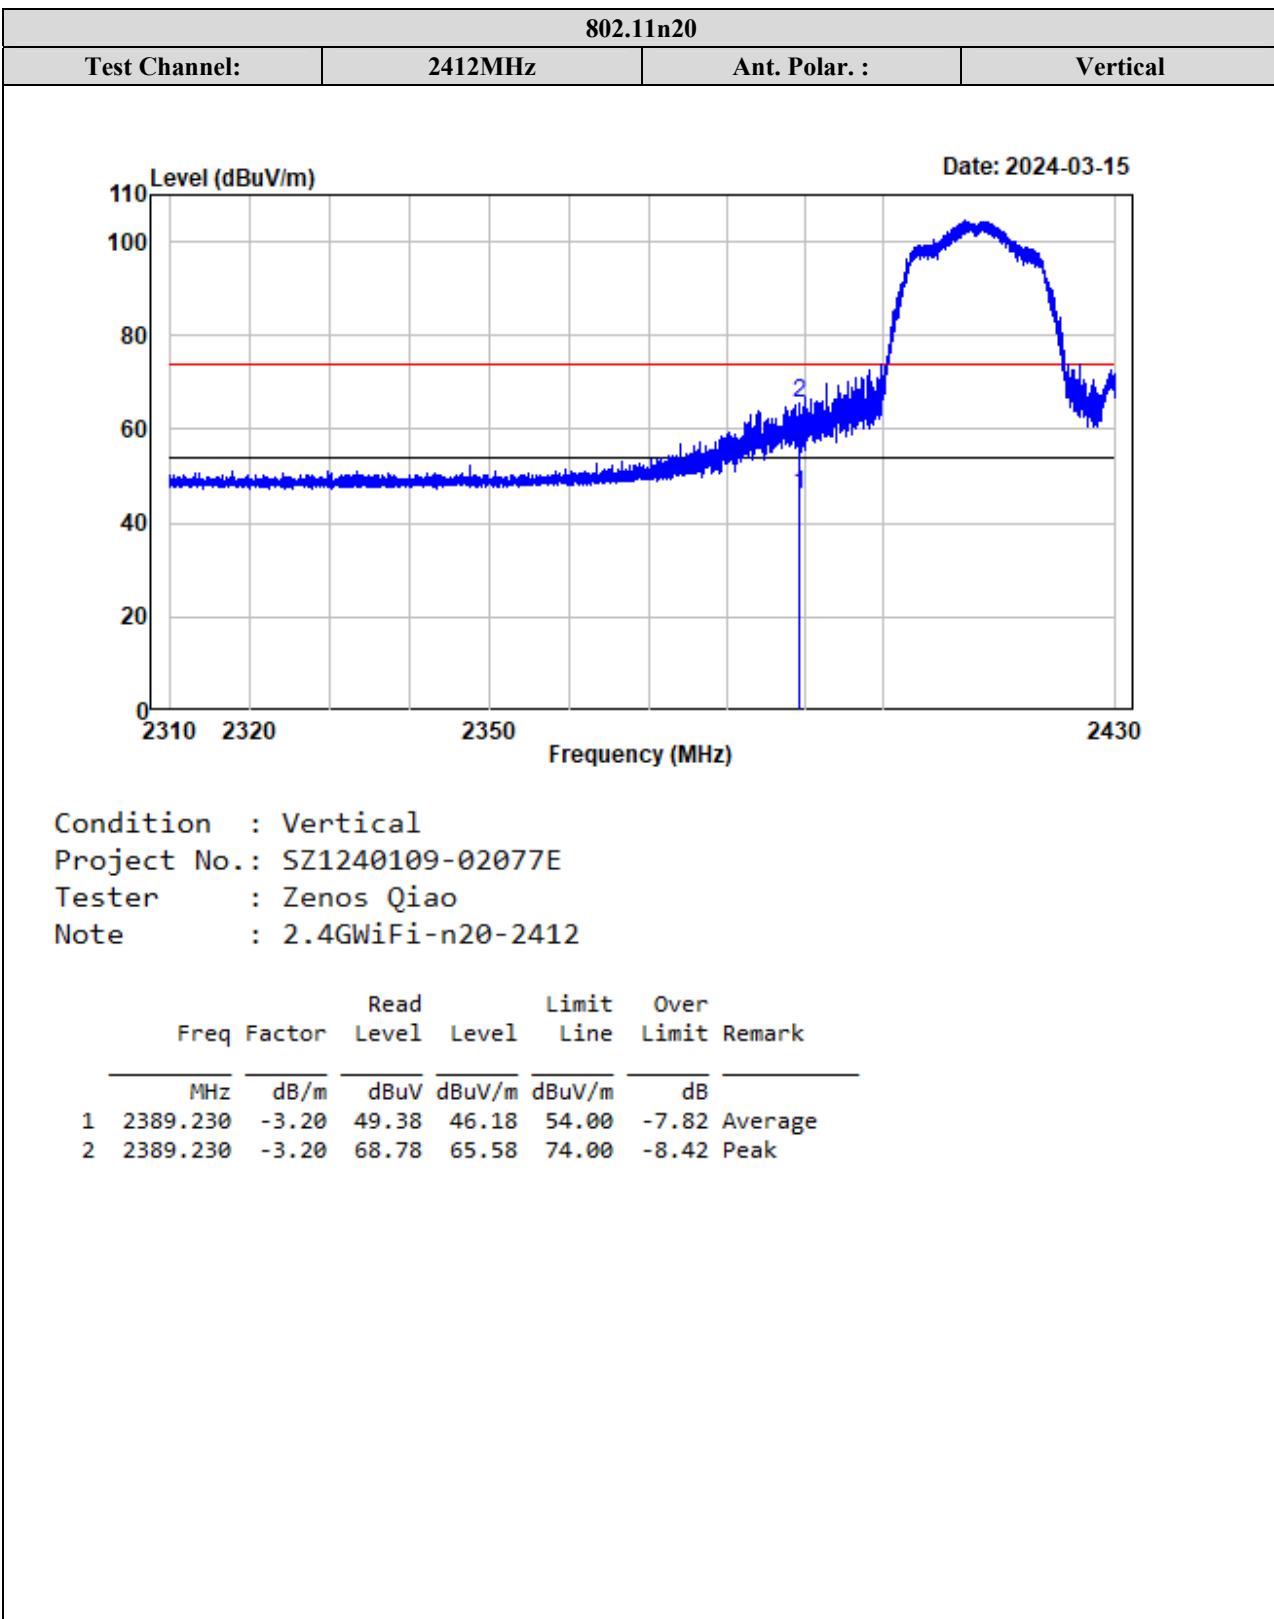


**802.11n20**


Test Channel: 2462MHz Ant. Polar.: Horizontal

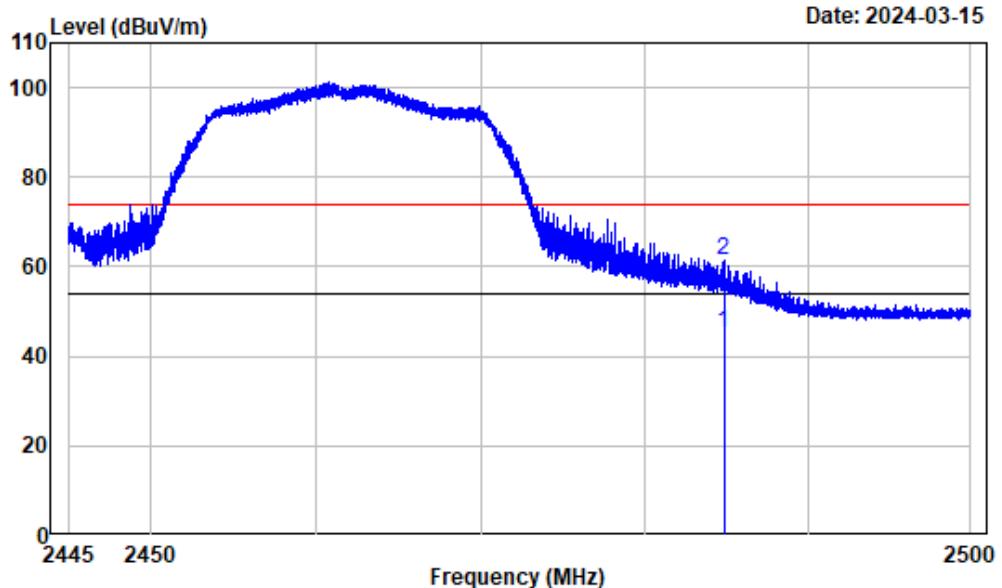



Condition : Horizontal  
Project No.: SZ1240109-02077E  
Tester : Zenos Qiao  
Note : 2.4GHzFi-n20-2462


Freq	Factor	Read		Limit		Over Limit	Remark
		MHz	dB/m	dBuV	dBuV/m		
1	2484.841	-3.17	48.26	45.09	54.00	-8.91	Average
2	2484.841	-3.17	64.61	61.44	74.00	-12.56	Peak

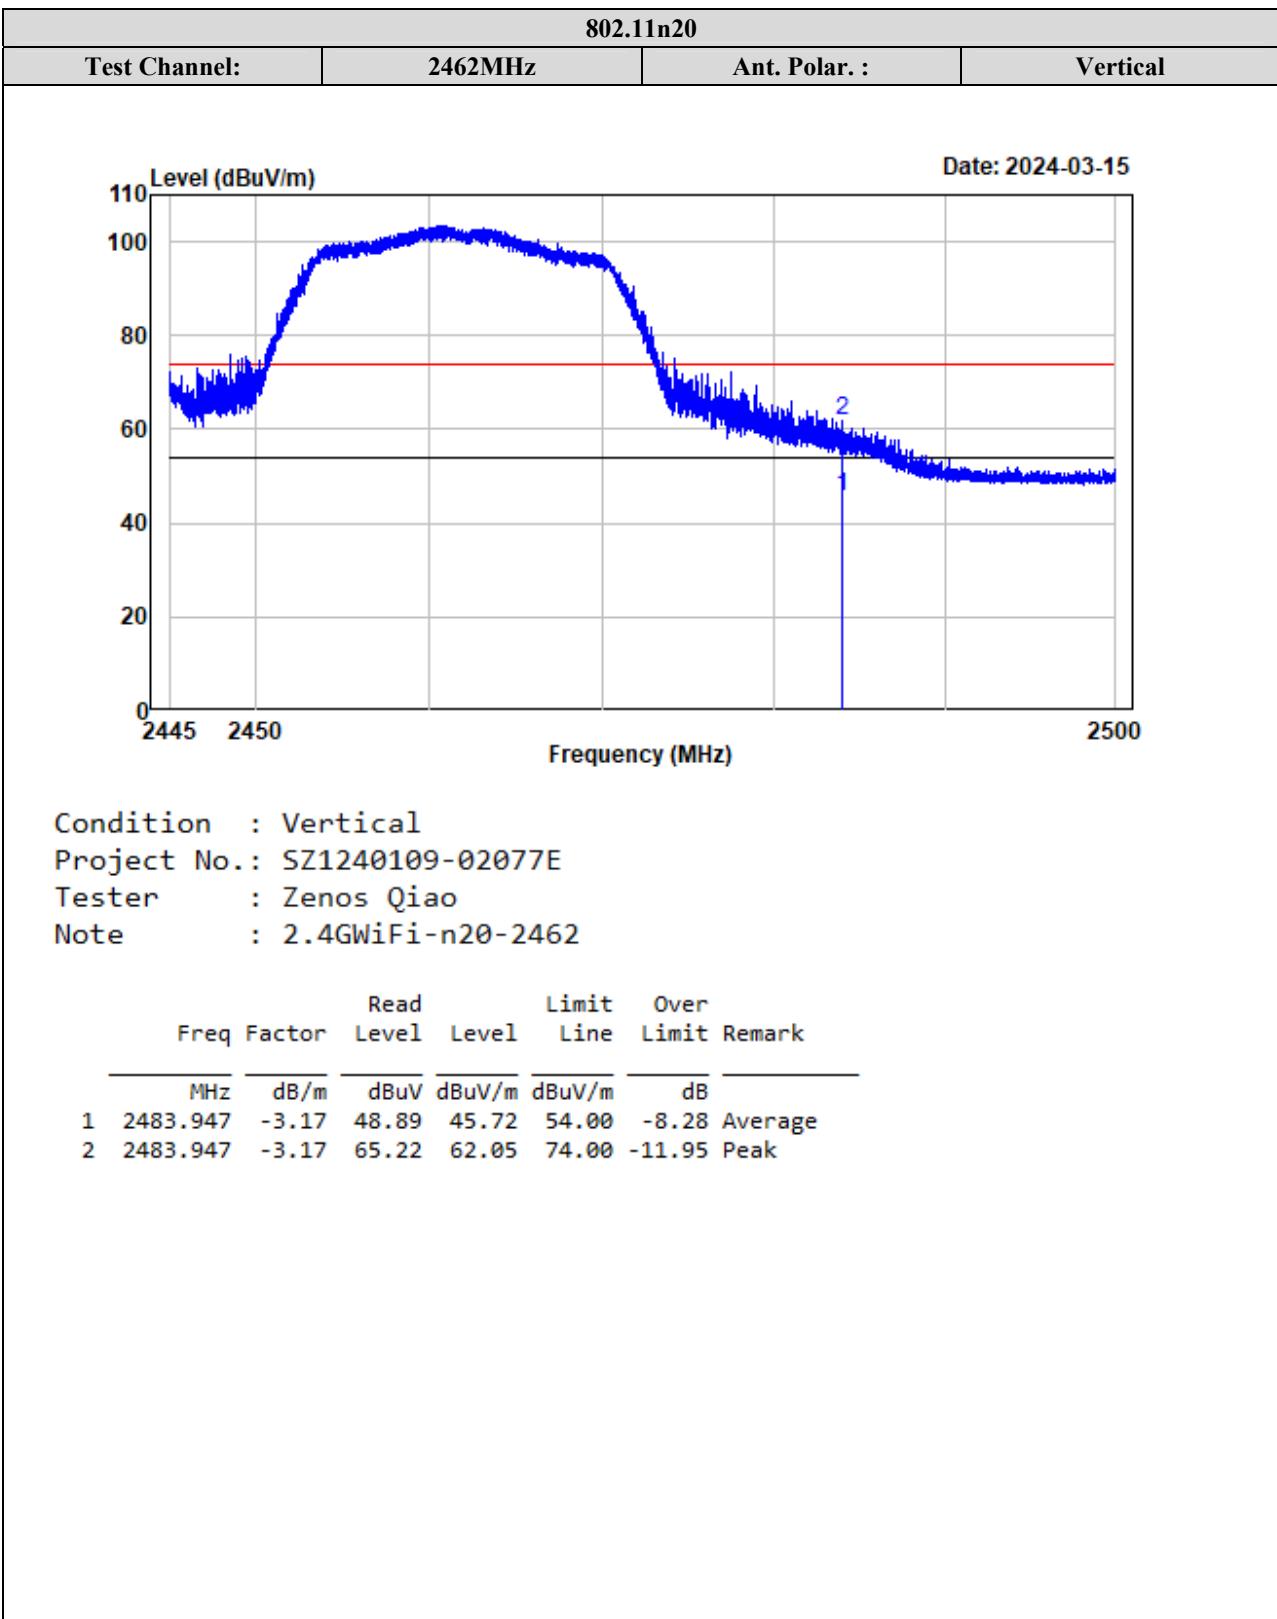


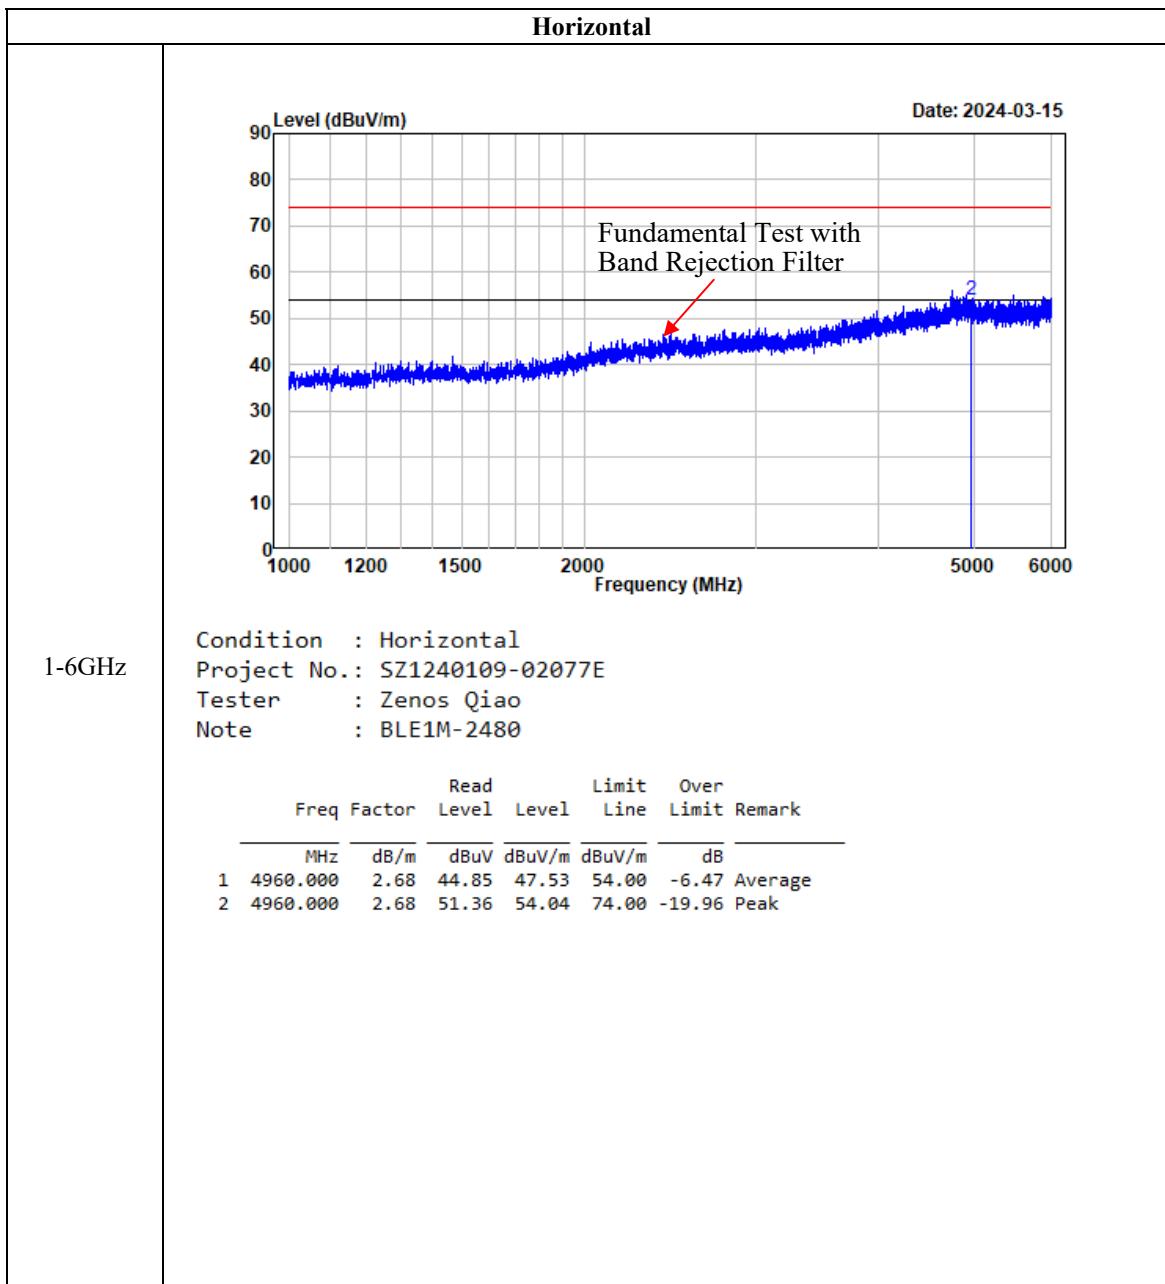
**Listed with the worst harmonic margin test plot:**

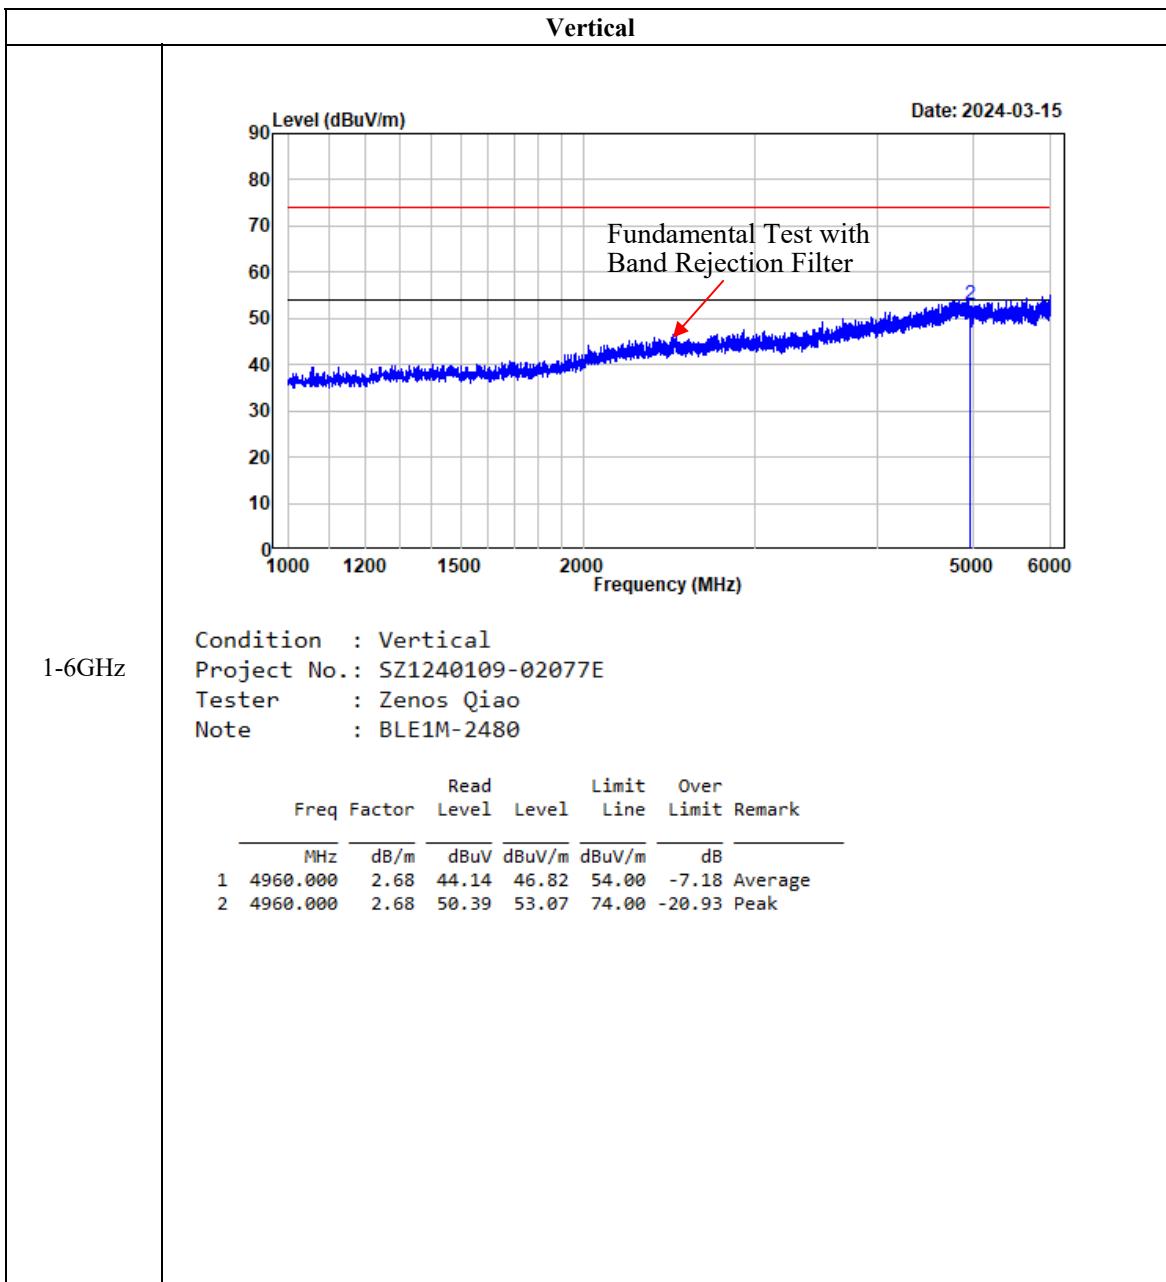

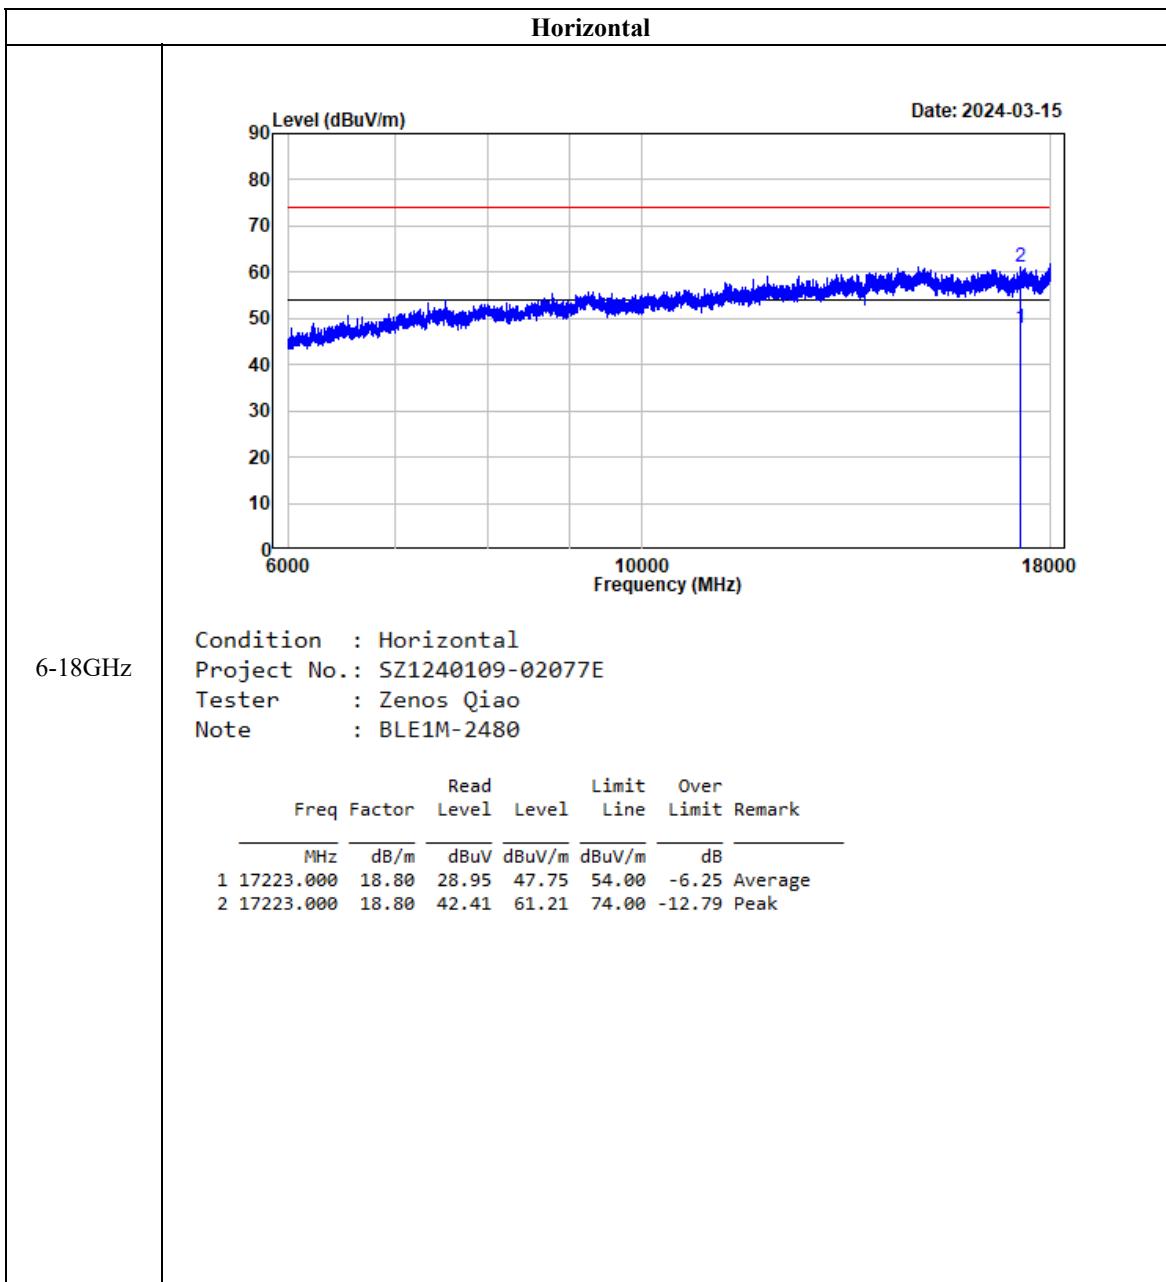

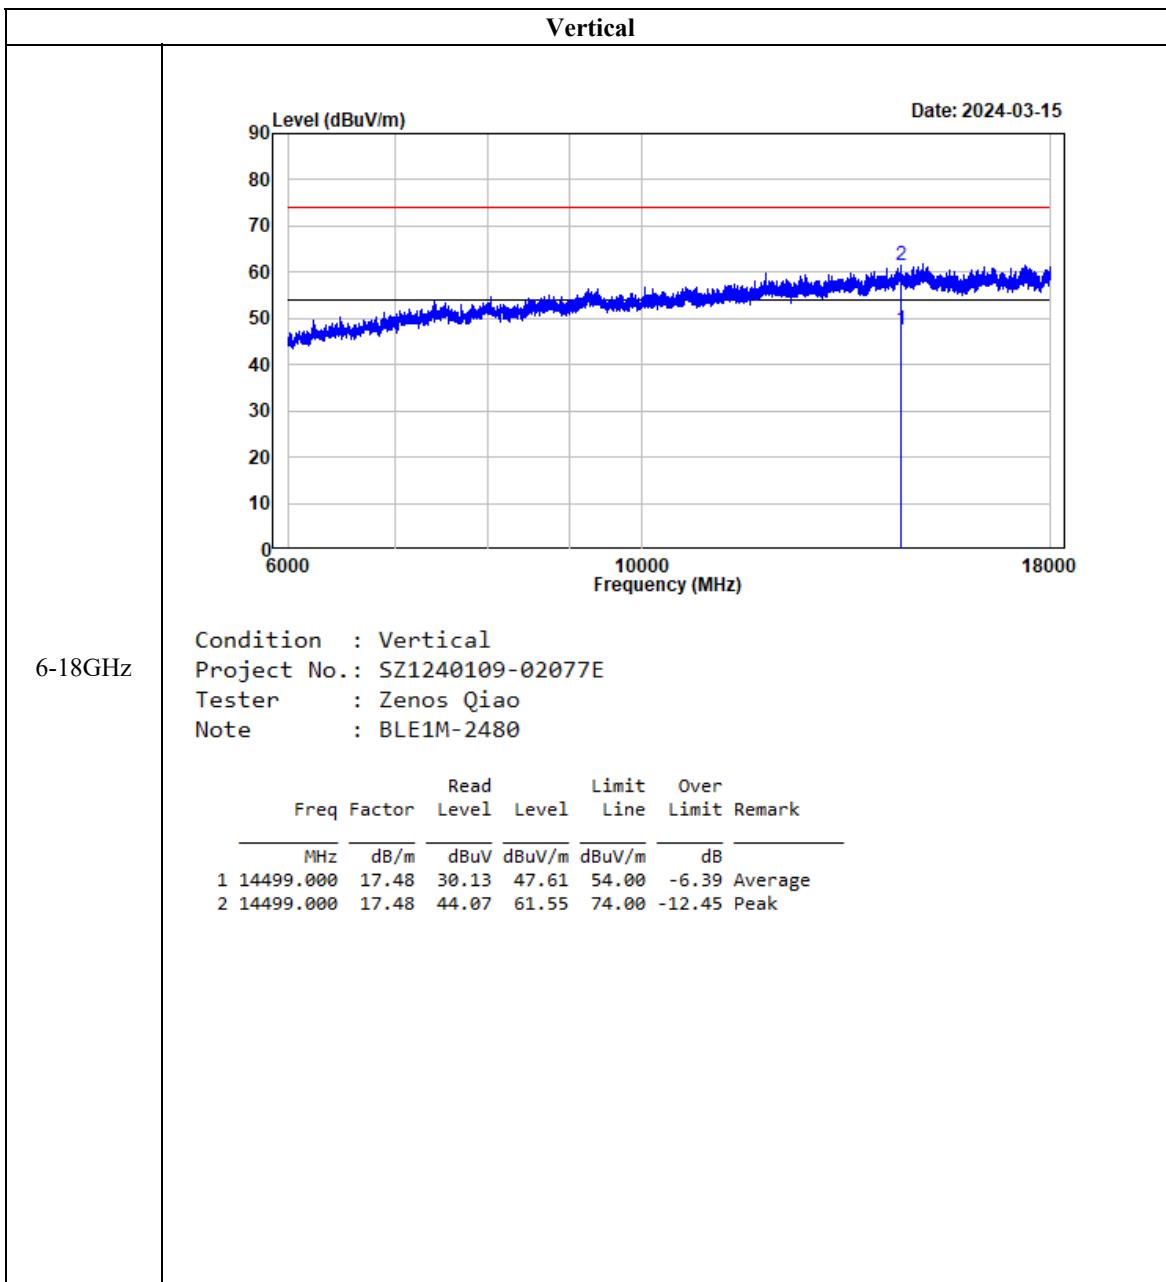

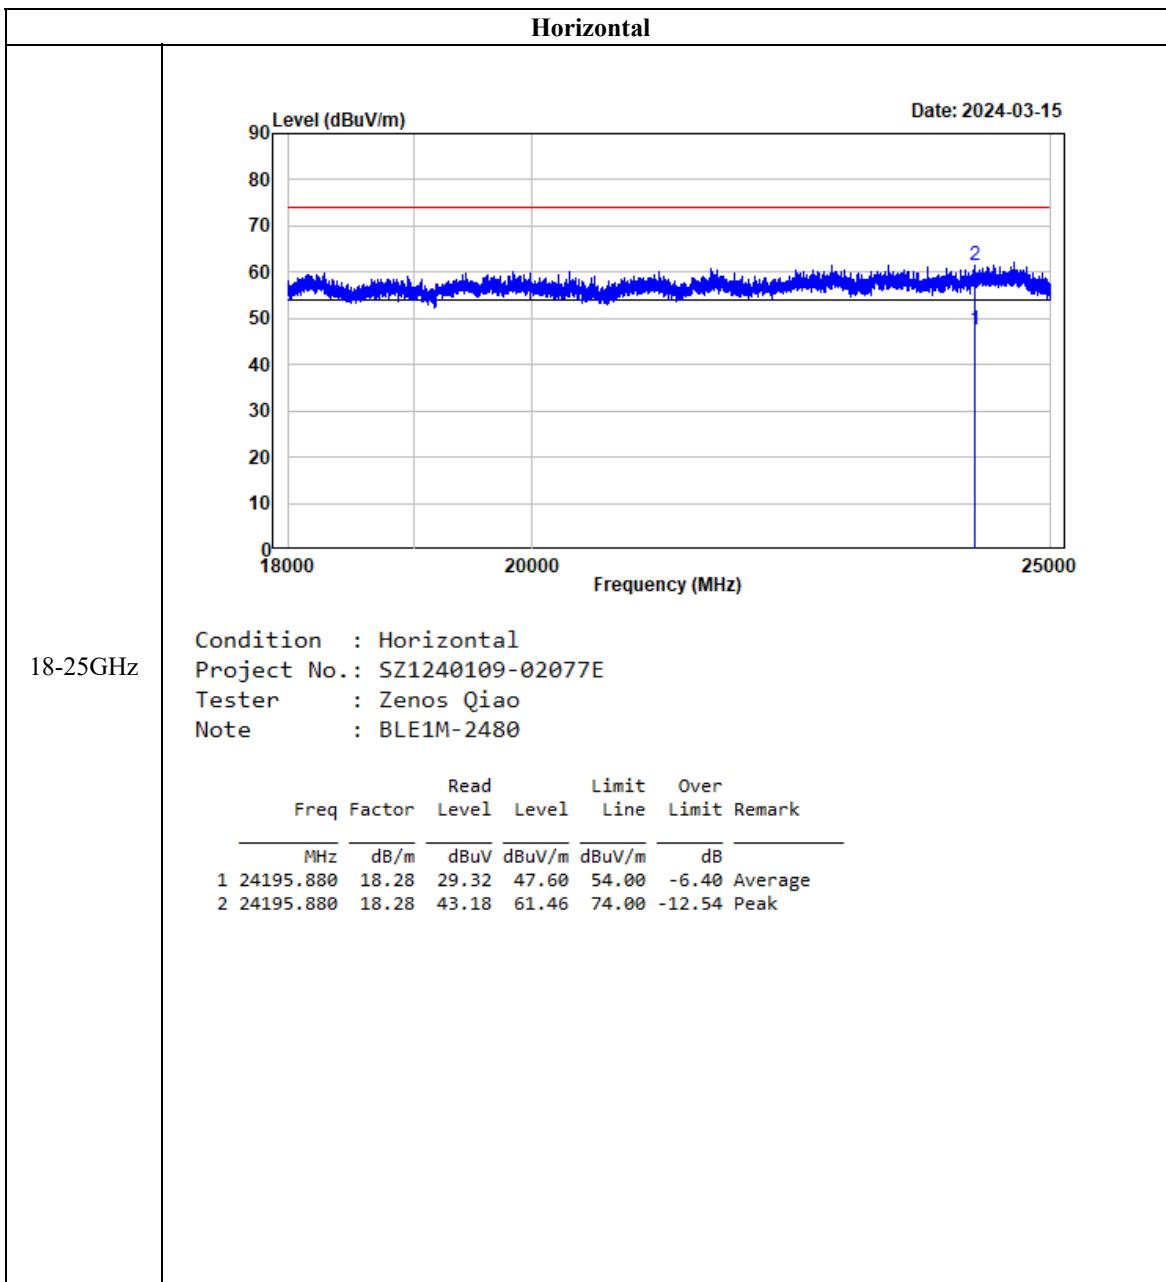

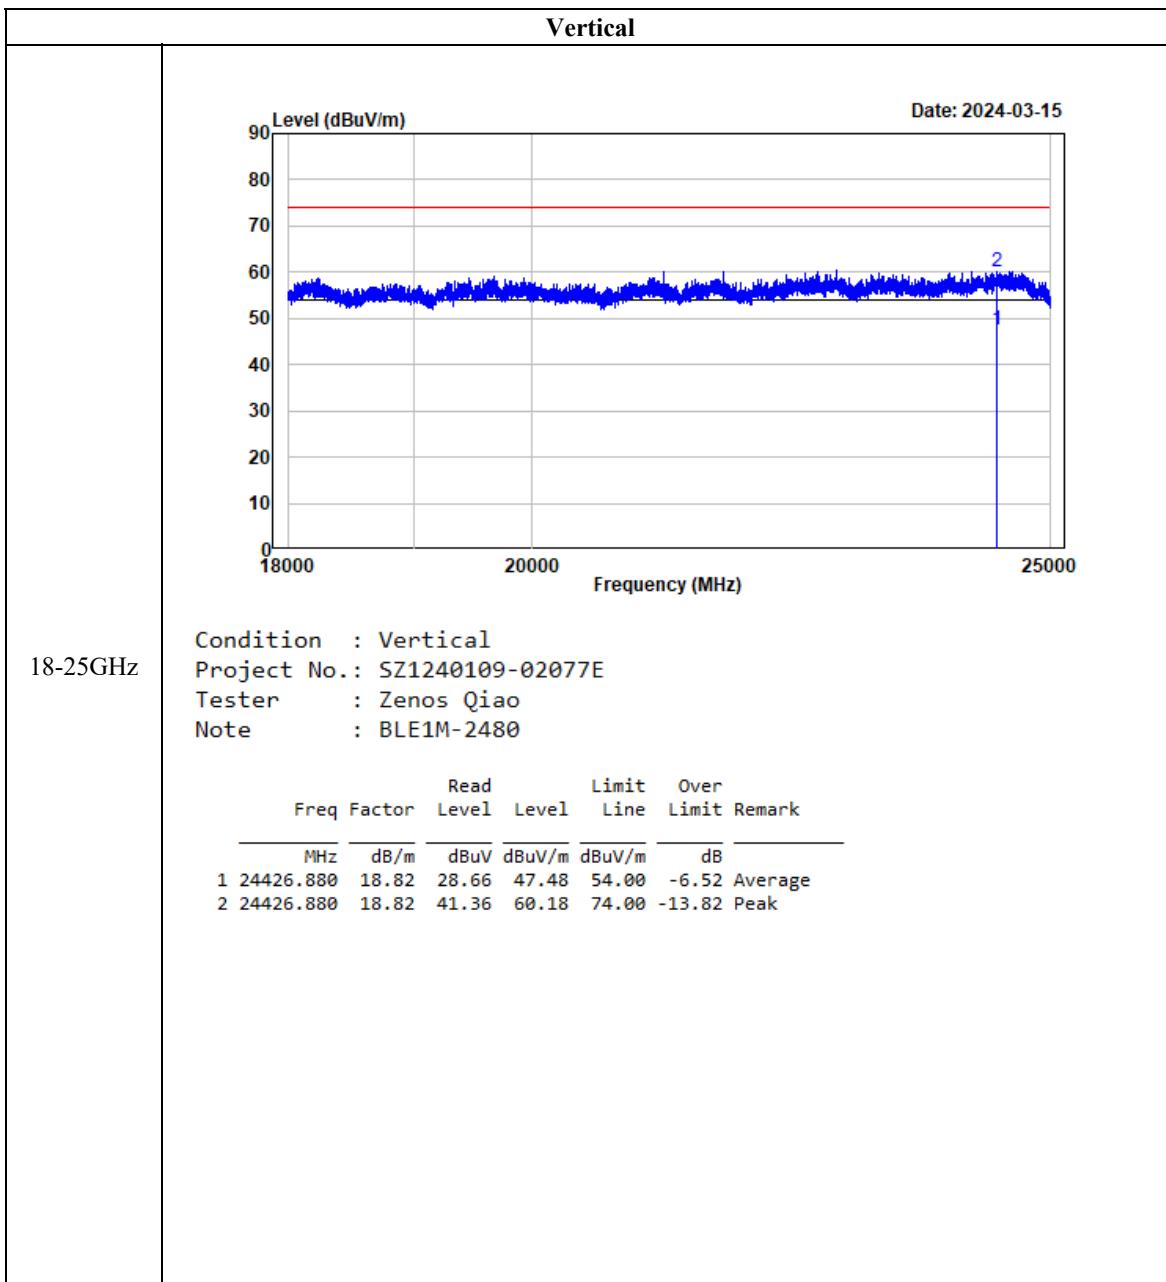

## **§15.247 (a)(2) & RSS-Gen§6.7 RSS-247 § 5.2 (a) 99% OCCUPIED BANDWIDTH & 6 dB EMISSION BANDWIDTH**

### **Applicable Standard**

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “6 dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated 6 dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

### **Test Procedure**

Test Method: ANSI C63.10-2013 Clause 11.8.1 and Clause 6.9.3


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

The following conditions shall be observed for measuring the occupied bandwidth and 6 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 6 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 6 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

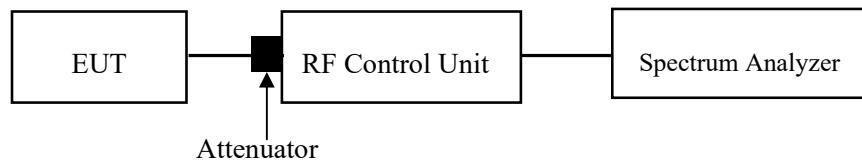

## Test Data

### Environmental Conditions

Temperature:	23~24 °C
Relative Humidity:	48~52 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-03-19 and 2024-03-27.

EUT operation mode: Transmitting

**Test Result: Compliant. Please refer to the Appendix.**

## §15.247(b)(3) & RSS-247 § 5.4(d) MAXIMUM CONDUCTED OUTPUT POWER

### Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).


As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.9.1.1 for BLE and 11.9.1.3 for Wi-Fi


1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

For Wi-Fi mode:

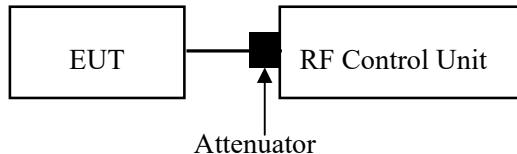

Note: the power meter was integrated in the RF control Unit.

For BLE mode:

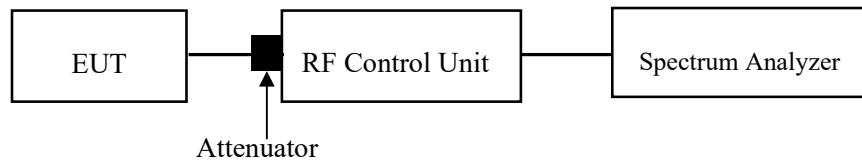

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23~24 °C
<b>Relative Humidity:</b>	48~52 %
<b>ATM Pressure:</b>	101 kPa

The testing was performed by Tom Tan on 2024-03-19 and 2024-03-27.

EUT operation mode: Transmitting

**Test Result: Compliant. Please refer to the Appendix.**

## §15.247(d) & RSS-247 § 5.5 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE


### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.11

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

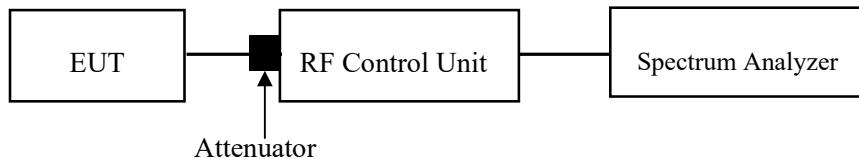

### Test Data

#### Environmental Conditions

Temperature:	23~24 °C
Relative Humidity:	48~52 %
ATM Pressure:	101 kPa

The testing was performed by Tom Tan on 2024-03-19 and 2024-03-27.

EUT operation mode: Transmitting

**Test Result: Compliant. Please refer to the Appendix.**

## §15.247(e) & RSS-247 § 5.2 (b) POWER SPECTRAL DENSITY

### Applicable Standard


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

### Test Procedure

Test Method: ANSI C63.10-2013 Clause 11.10.2

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to:  $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
3. Set the VBW  $\geq 3 \times \text{RBW}$ .
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

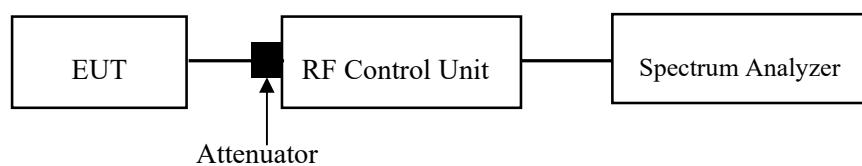

## Test Data

### Environmental Conditions

<b>Temperature:</b>	23~24 °C
<b>Relative Humidity:</b>	48~52 %
<b>ATM Pressure:</b>	101 kPa

*The testing was performed by Tom Tan on 2024-03-19 and 2024-03-27.*

*EUT operation mode: Transmitting*

***Test Result: Compliant. Please refer to the Appendix.***

## **EUT PHOTOGRAPHS**

Please refer to the attachment SZ1240109-02077E-RF External photo and SZ1240109-02077E-RF Internal photo.

## **TEST SETUP PHOTOGRAPHS**

Please refer to the attachment SZ1240109-02077E-RFC Test Setup photo.


## APPENDIX-BLE


### Appendix A: DTS Bandwidth

#### Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.72	0.5	PASS
		2440	0.72	0.5	PASS
		2480	0.72	0.5	PASS

#### Test Graphs

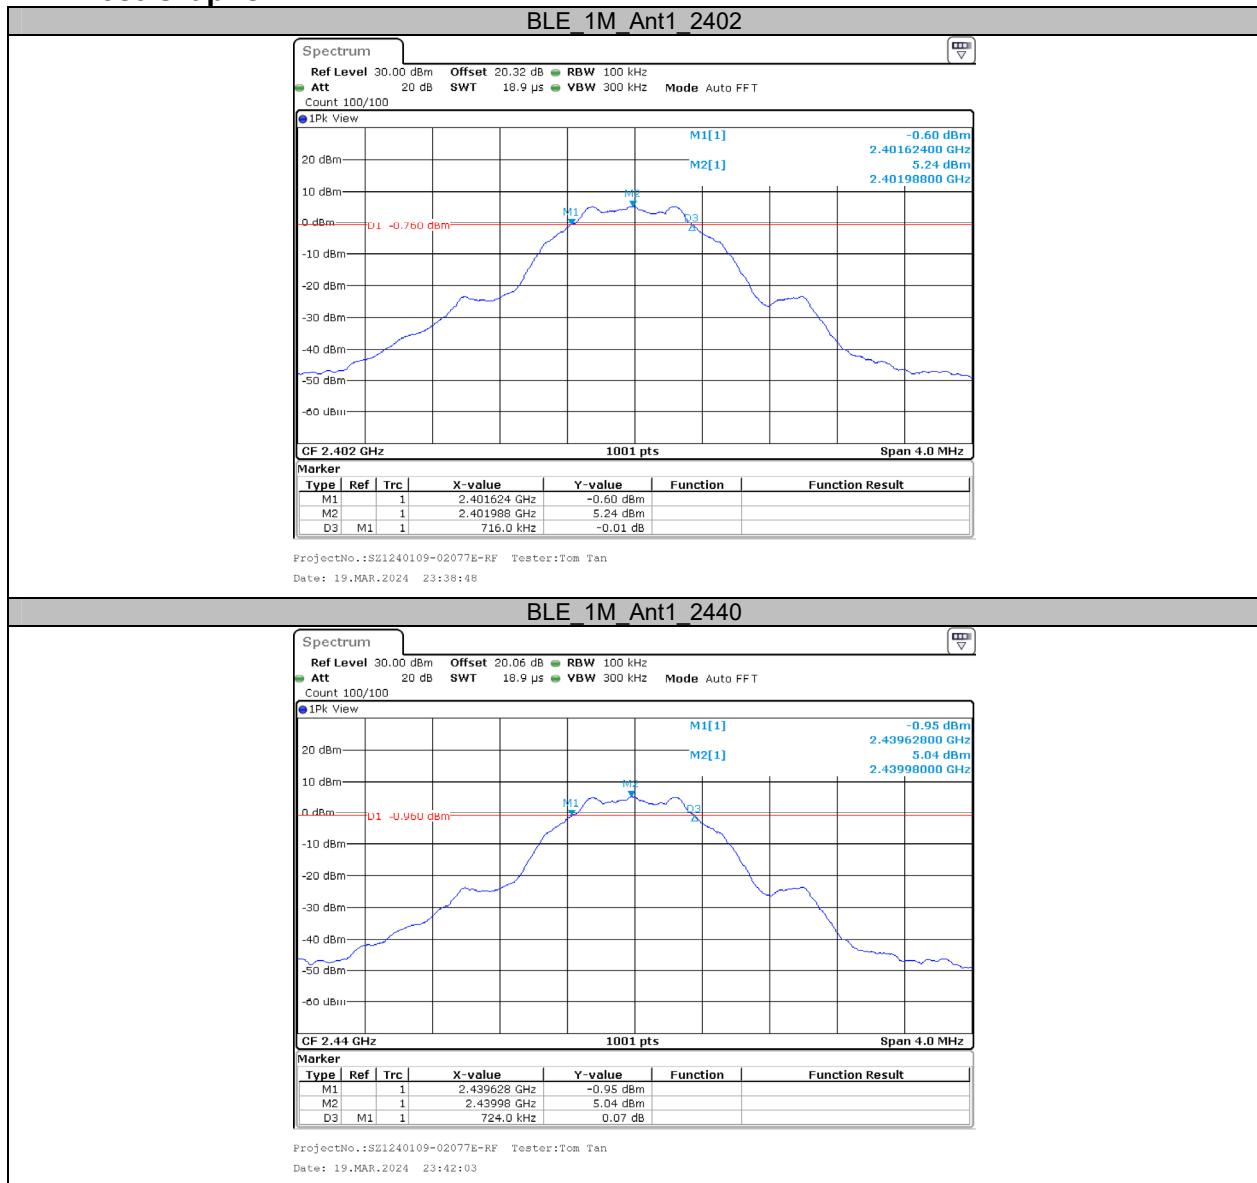

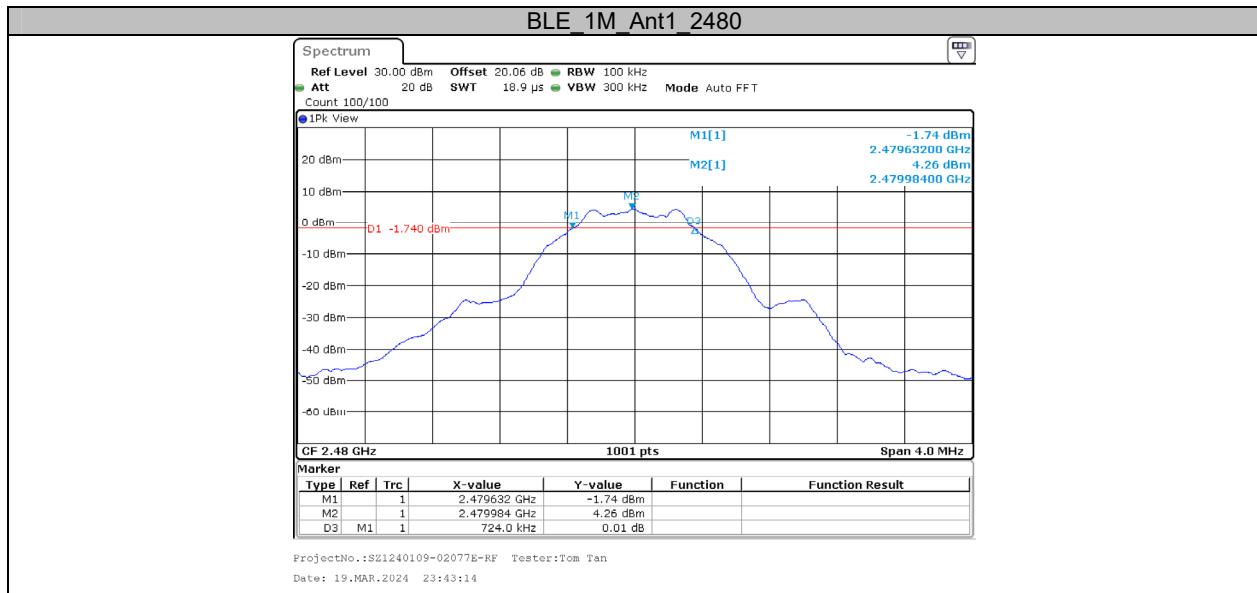


## Appendix B: Occupied Channel Bandwidth

### Test Result

Test Mode	Antenna	Channel	OCB [MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	1.051	---	---
		2440	1.051	---	---
		2480	1.051	---	---

### Test Graphs

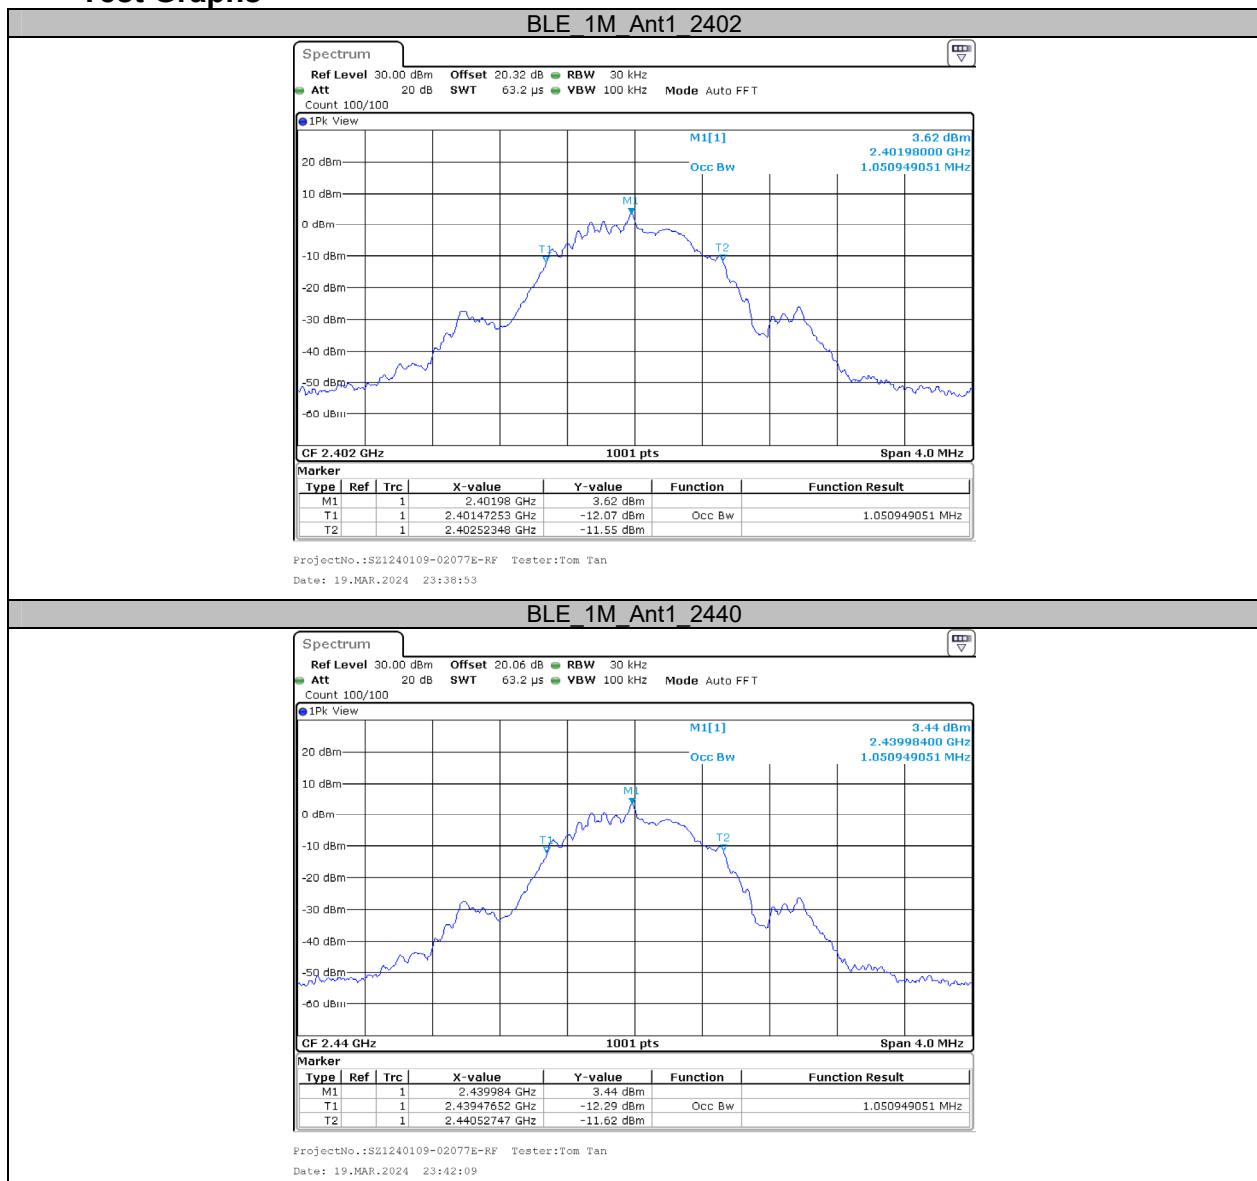




## Appendix C: Maximum conducted output power

### Test Result

Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power [dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	6.08	≤30	8.74	≤36	PASS
		2440	5.92	≤30	8.58	≤36	PASS
		2480	5.22	≤30	7.88	≤36	PASS

### Test Graphs Peak

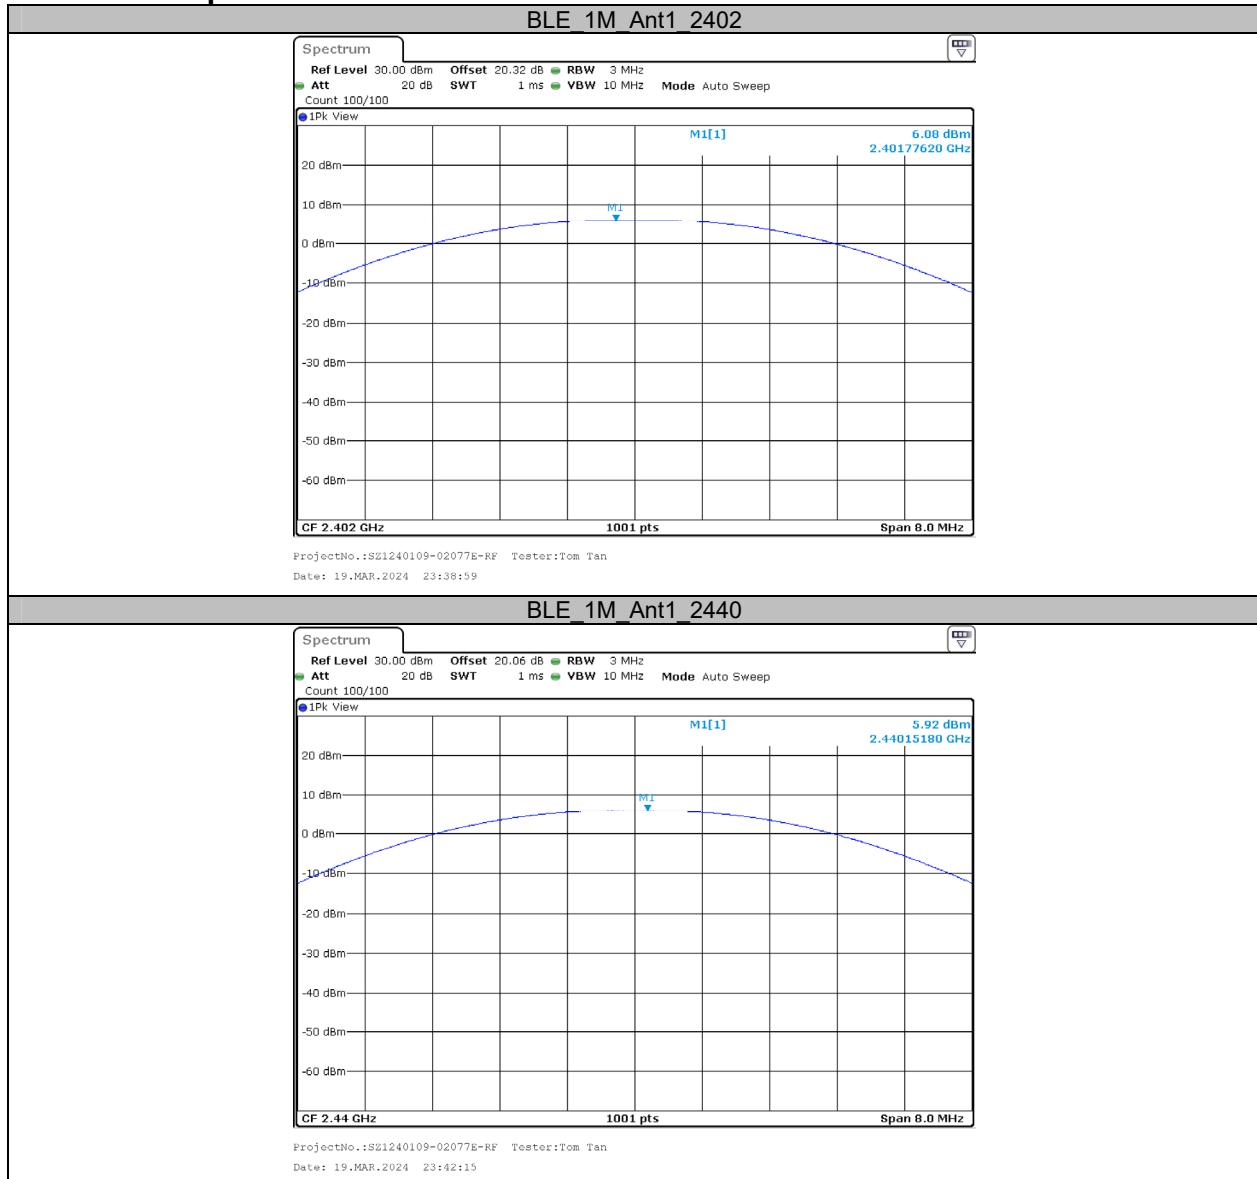





## Appendix D: Maximum power spectral density

### Test Result

Test Mode	Antenna	Channel	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-8.23	≤8.00	PASS
		2440	-8.40	≤8.00	PASS
		2480	-9.12	≤8.00	PASS


### Test Graphs

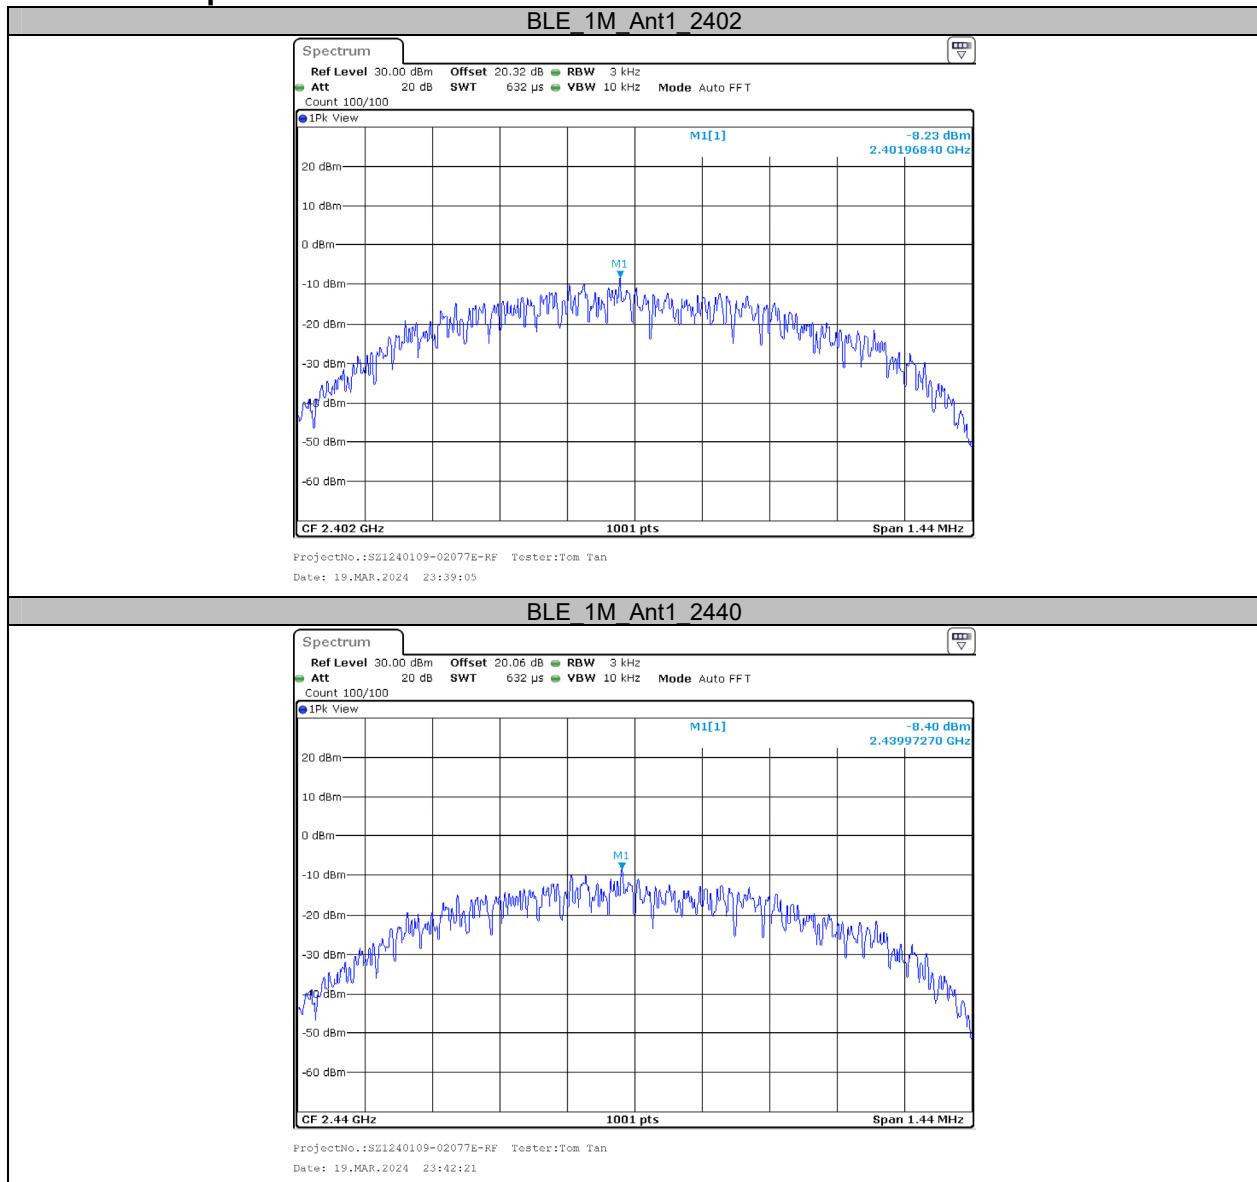

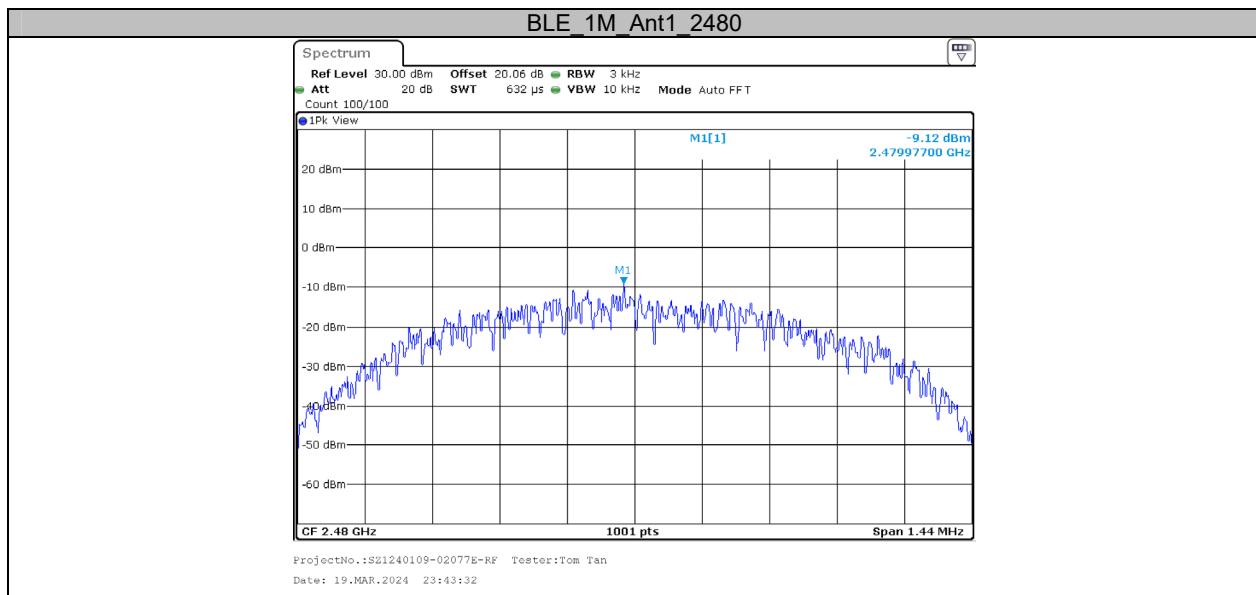

## Appendix E: Band edge measurements

### Test Graphs

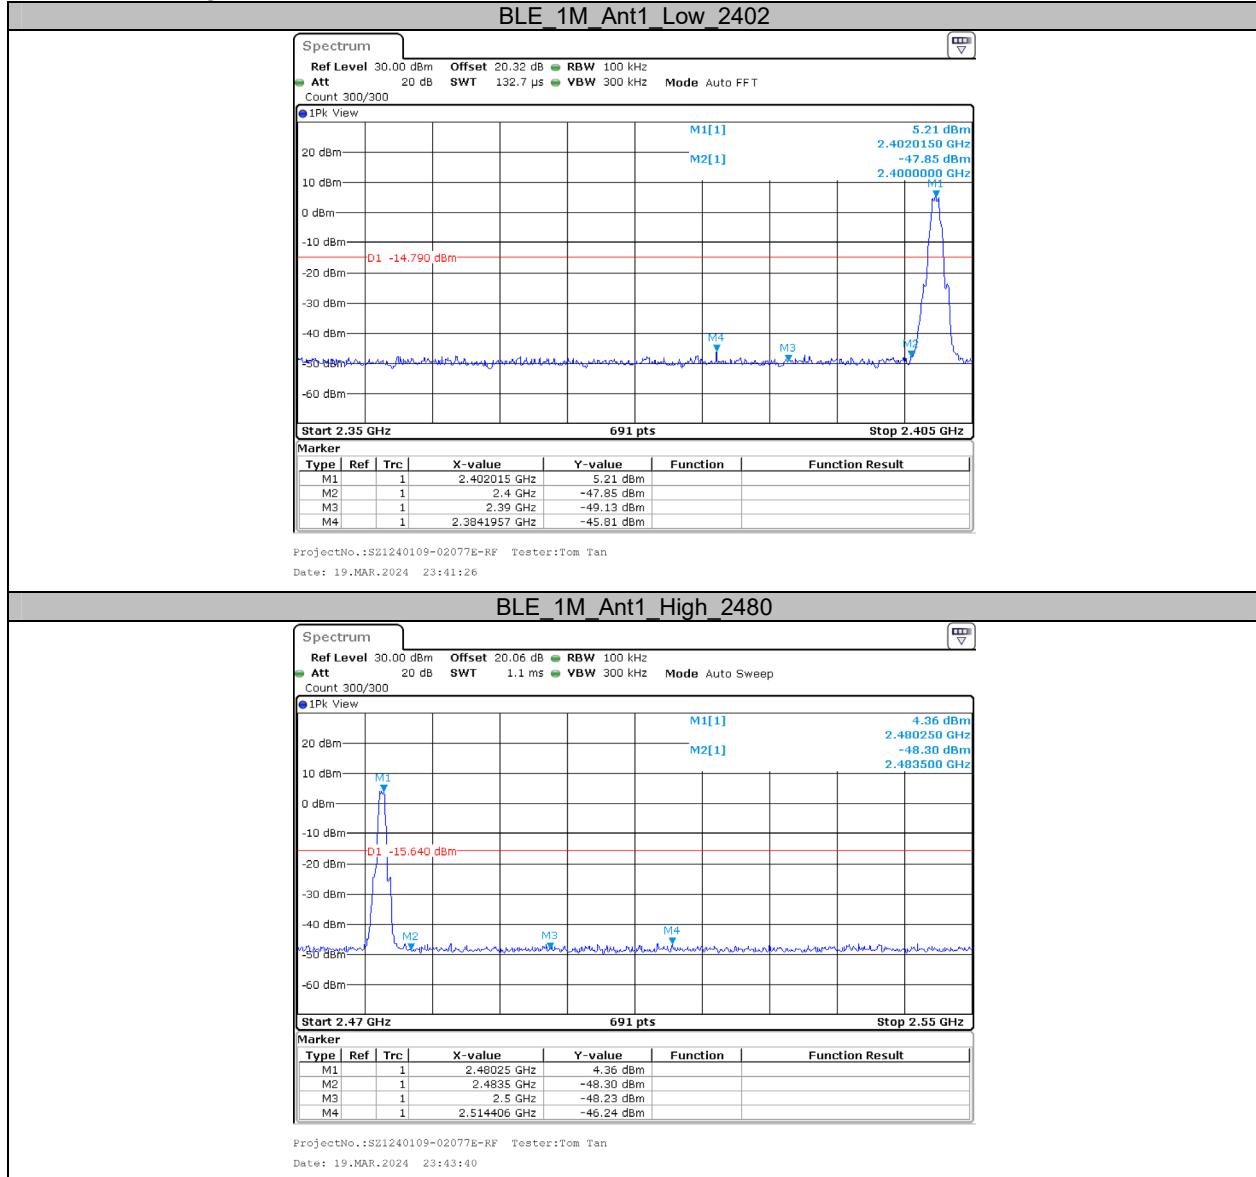


## Appendix F: Duty Cycle

### Test Result

Test Mode	Antenna	Channel	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [Hz]	VBW Setting [Hz]
BLE_1M	Ant1	2440	0.39	0.63	61.90	2564	3000

### Test Graphs

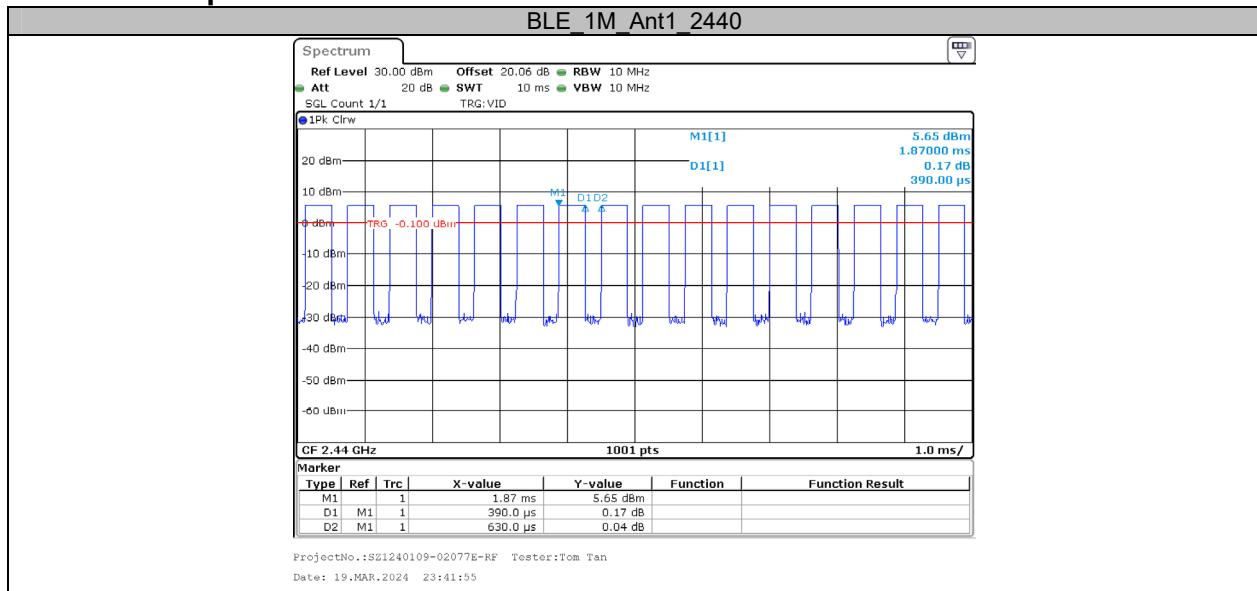


## APPENDIX-Wi-Fi


### Appendix A: DTS Bandwidth


#### Test Result


Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	7.12	2408.40	2415.52	0.5	PASS
		2437	7.56	2433.40	2440.96	0.5	PASS
		2462	7.12	2458.40	2465.52	0.5	PASS
11G	Ant1	2412	15.20	2404.36	2419.56	0.5	PASS
		2437	16.28	2428.84	2445.12	0.5	PASS
		2462	15.52	2454.36	2469.88	0.5	PASS
11N20SISO	Ant1	2412	15.20	2404.36	2419.56	0.5	PASS
		2437	17.16	2428.56	2445.72	0.5	PASS
		2462	15.76	2454.36	2470.12	0.5	PASS


## Test Graphs

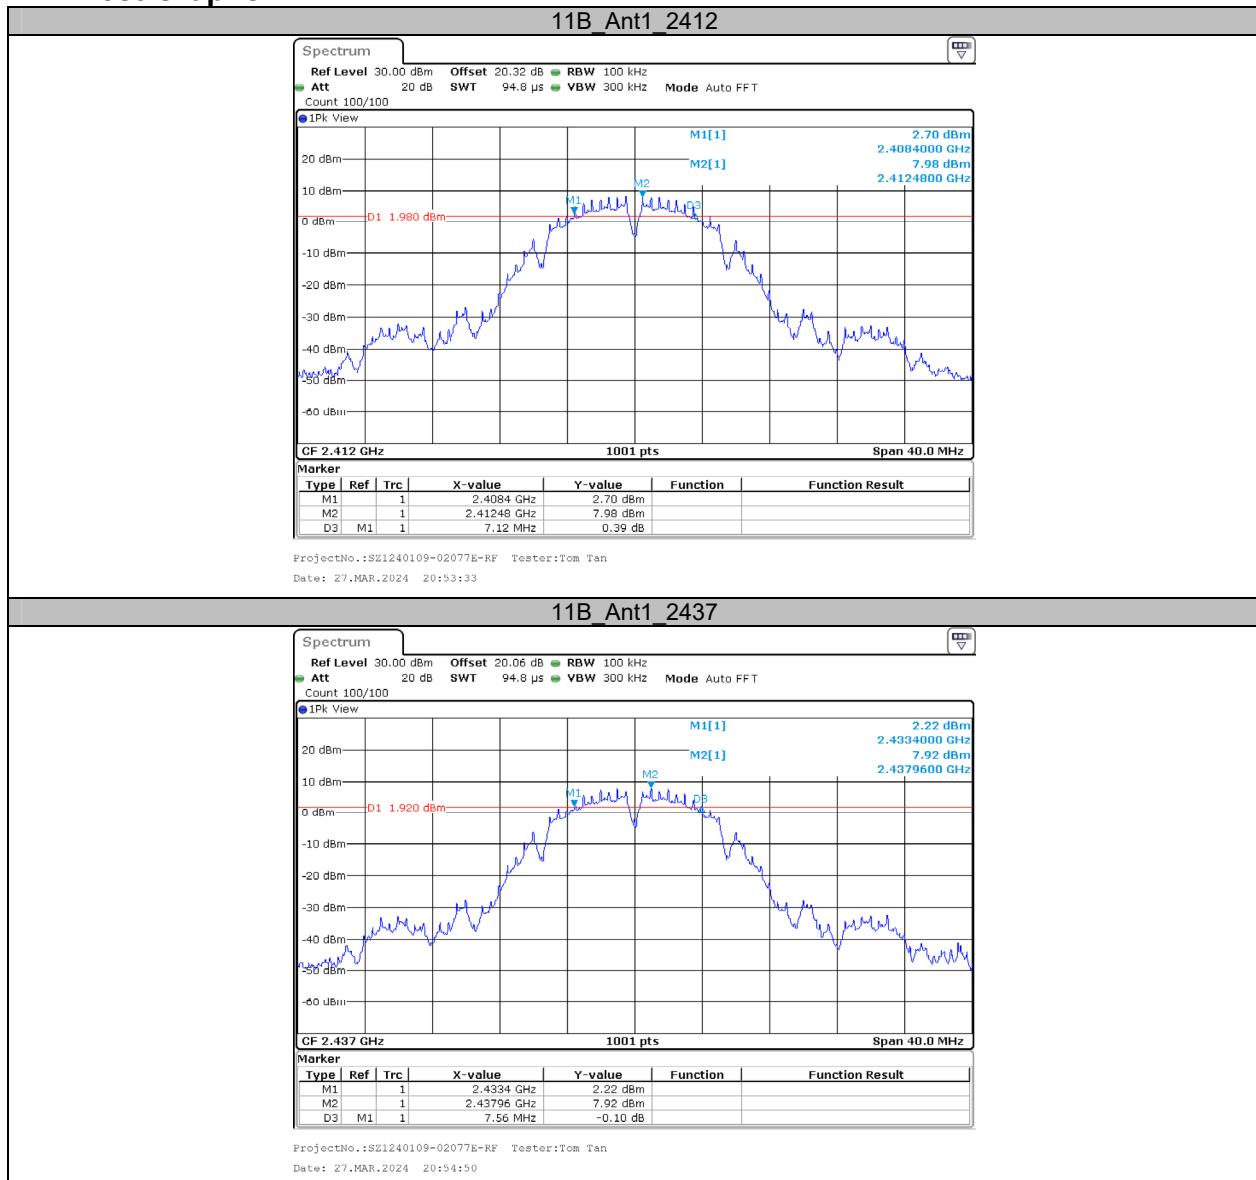

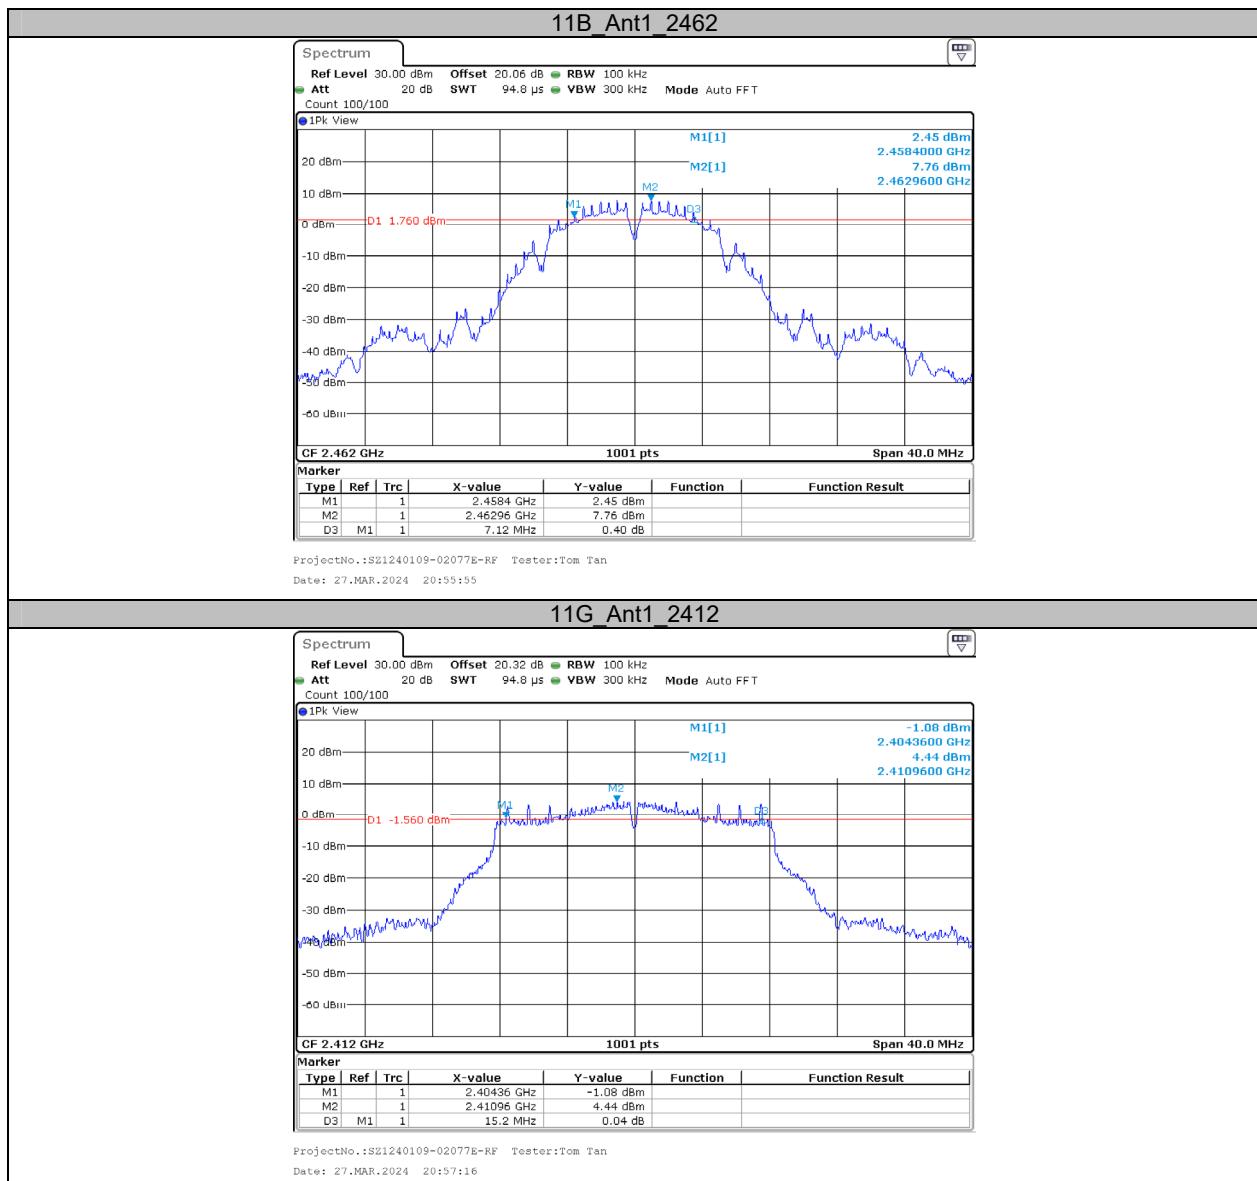

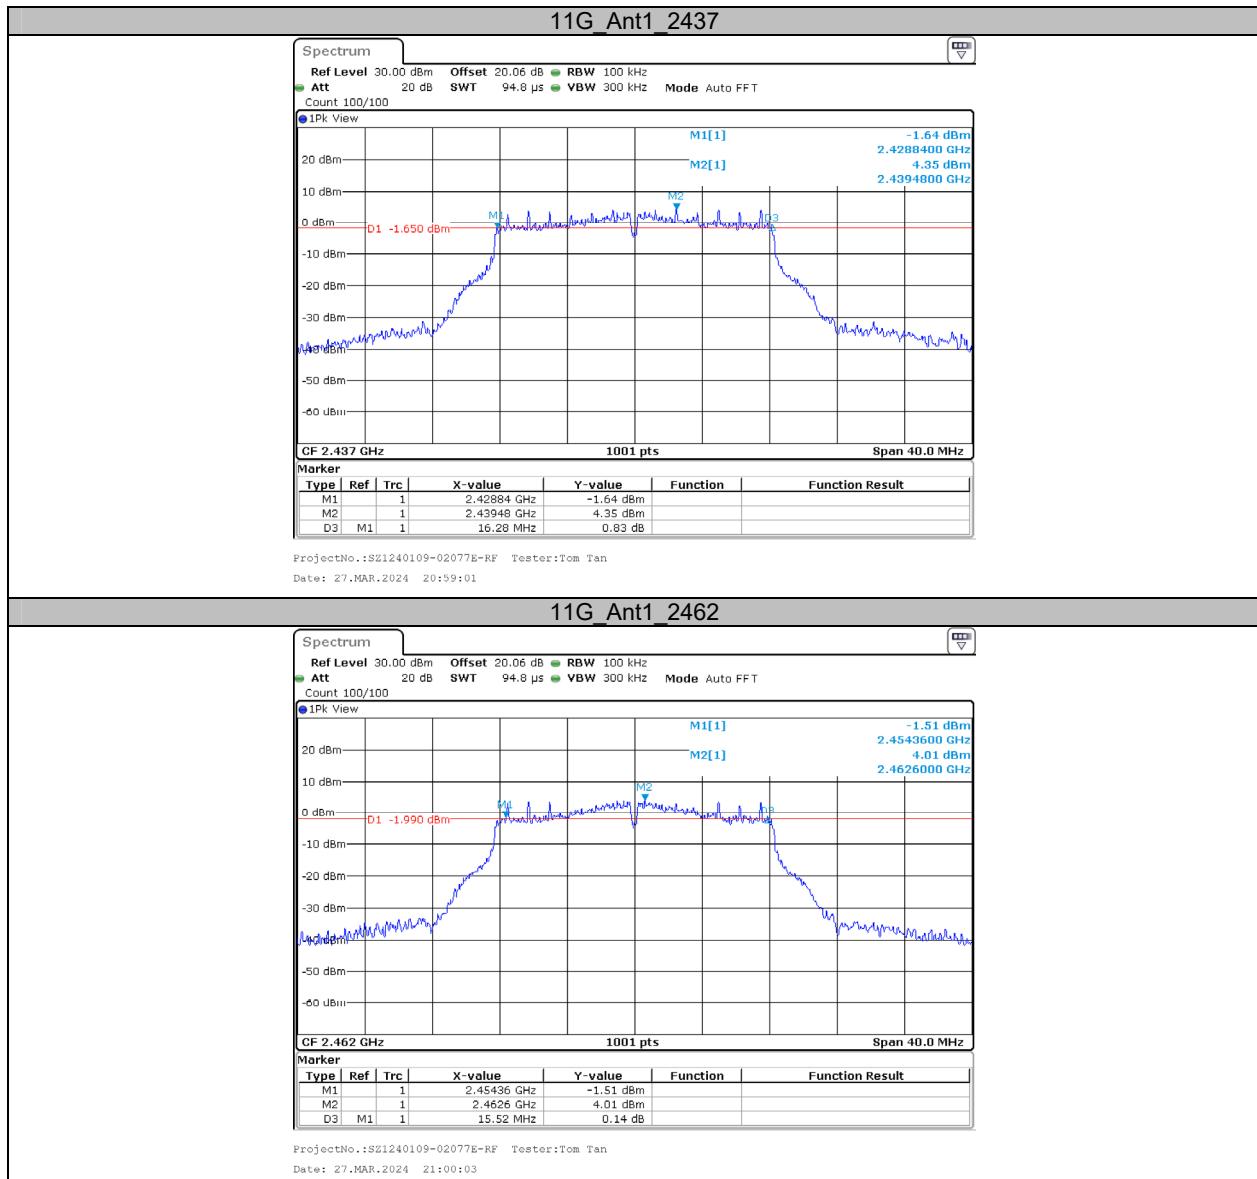

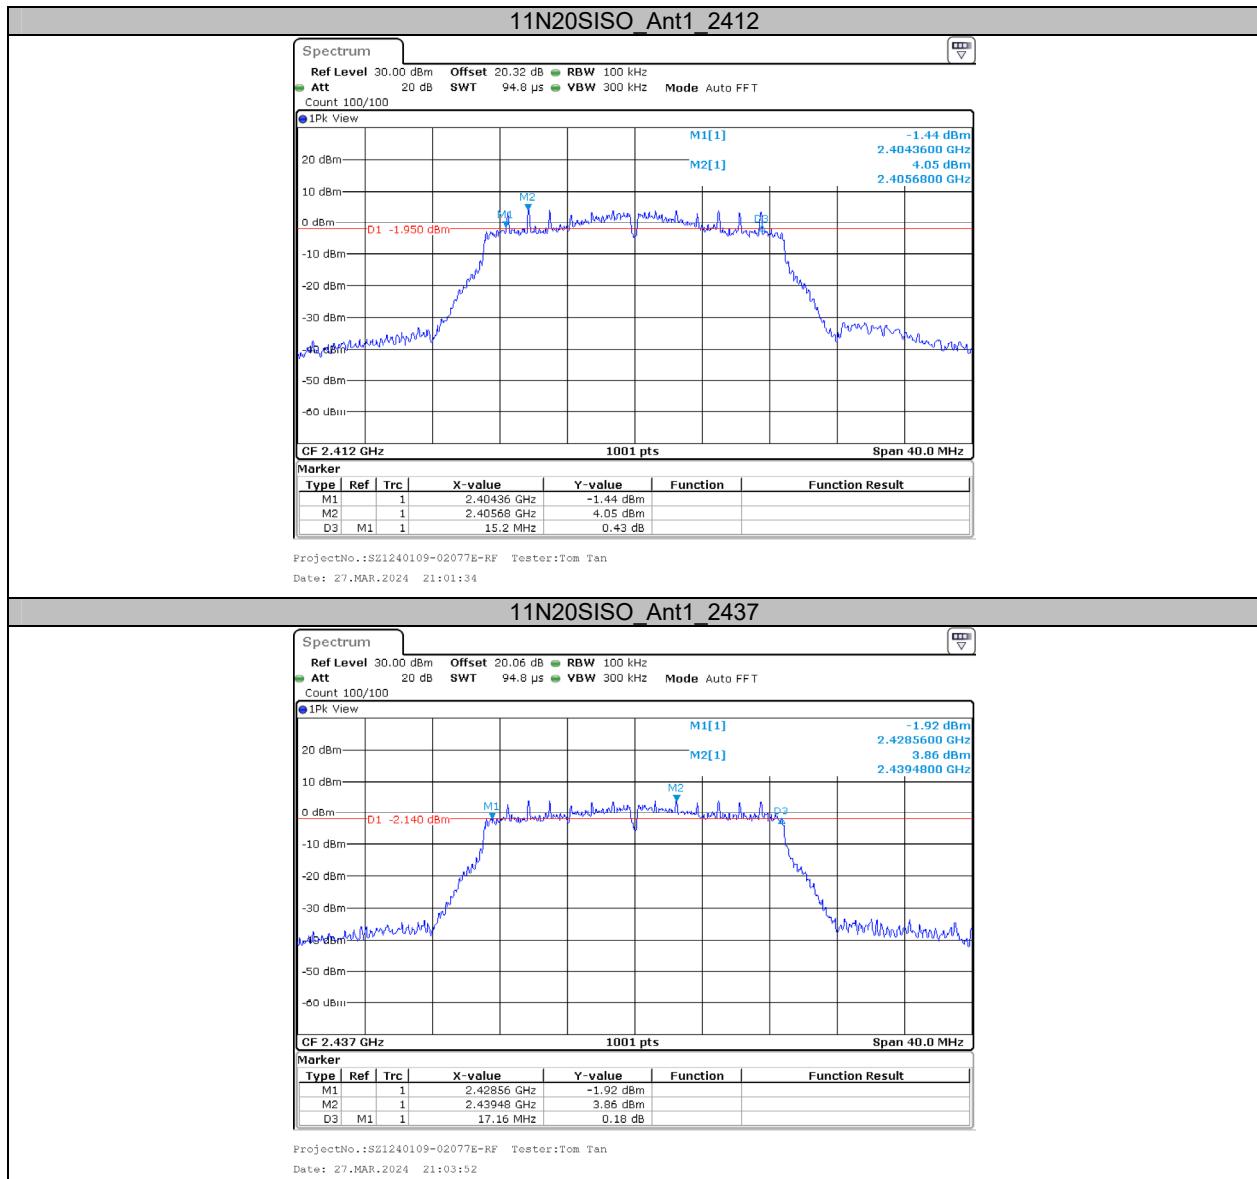


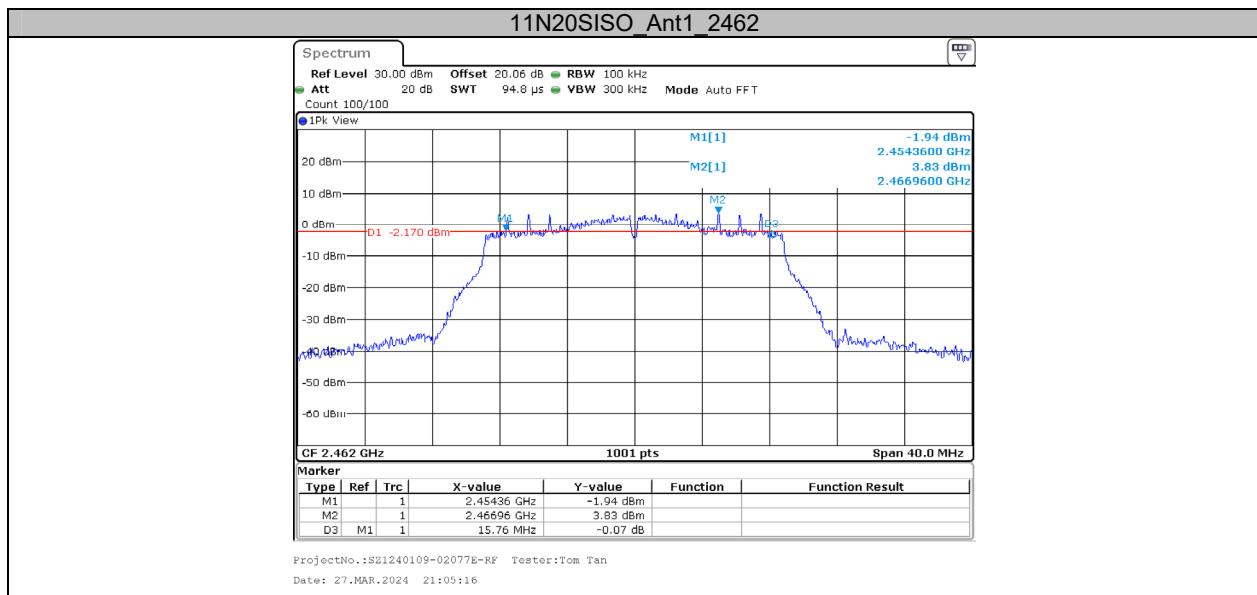



**Appendix B: Occupied Channel Bandwidth****Test Result**


Test Mode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	11.908	2406.0060	2417.9141	---	---
		2437	11.948	2431.0460	2442.9940	---	---
		2462	12.028	2455.9660	2467.9940	---	---
11G	Ant1	2412	17.502	2403.2088	2420.7113	---	---
		2437	17.622	2428.2088	2445.8312	---	---
		2462	17.423	2453.2488	2470.6713	---	---
11N20SISO	Ant1	2412	18.302	2402.8092	2421.1109	---	---
		2437	18.501	2427.8092	2446.3107	---	---
		2462	18.342	2452.8092	2471.1508	---	---


## Test Graphs

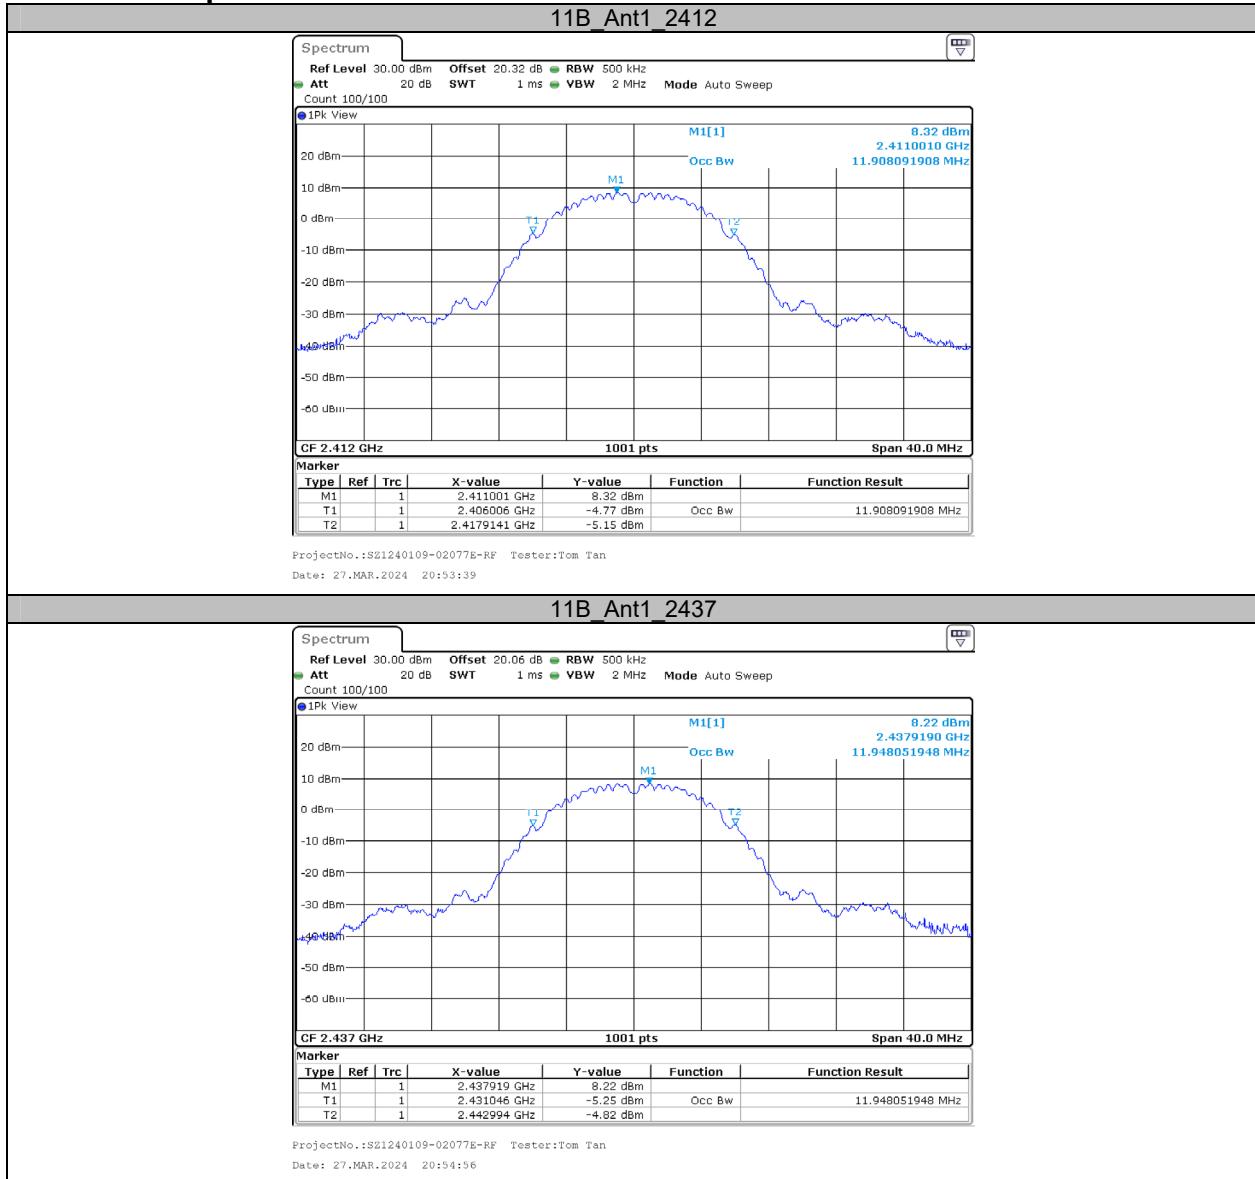

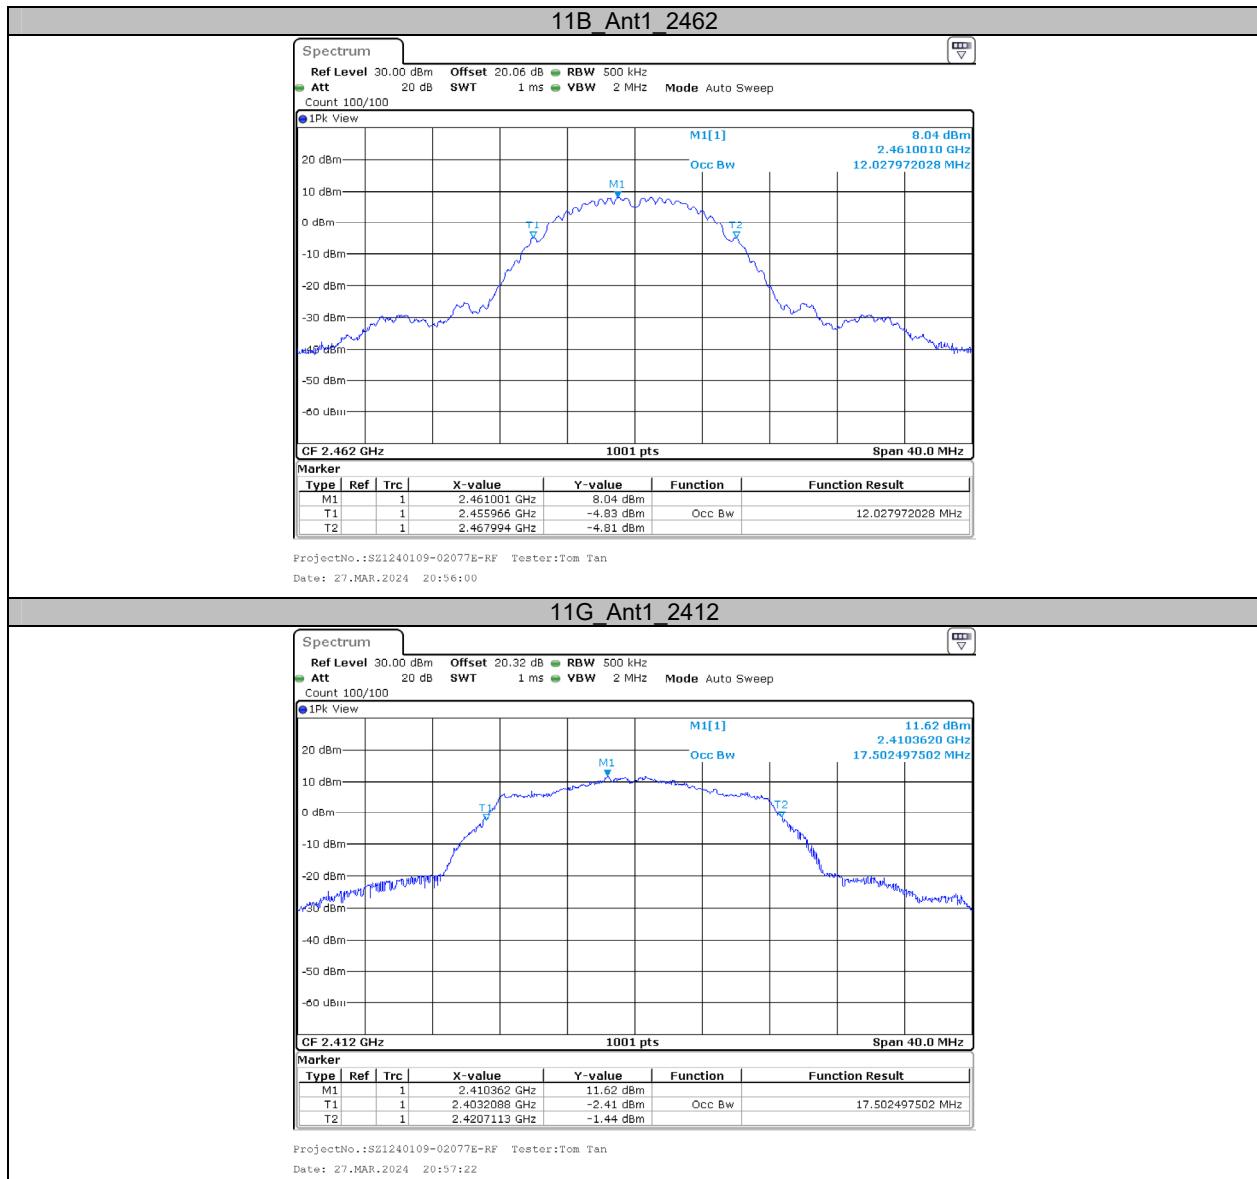

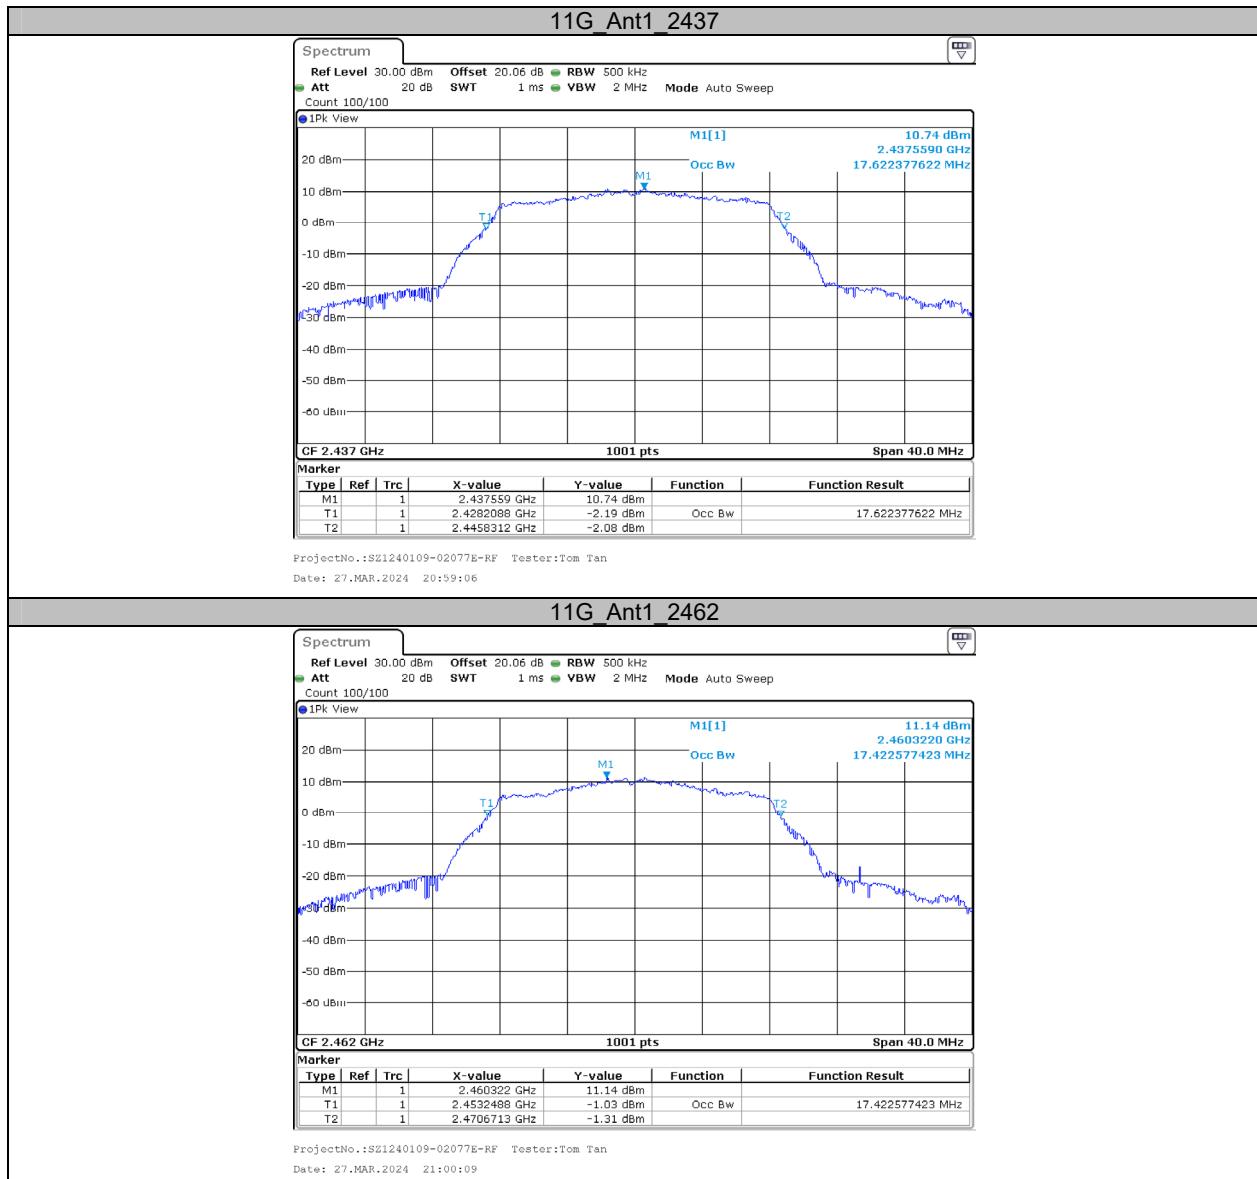

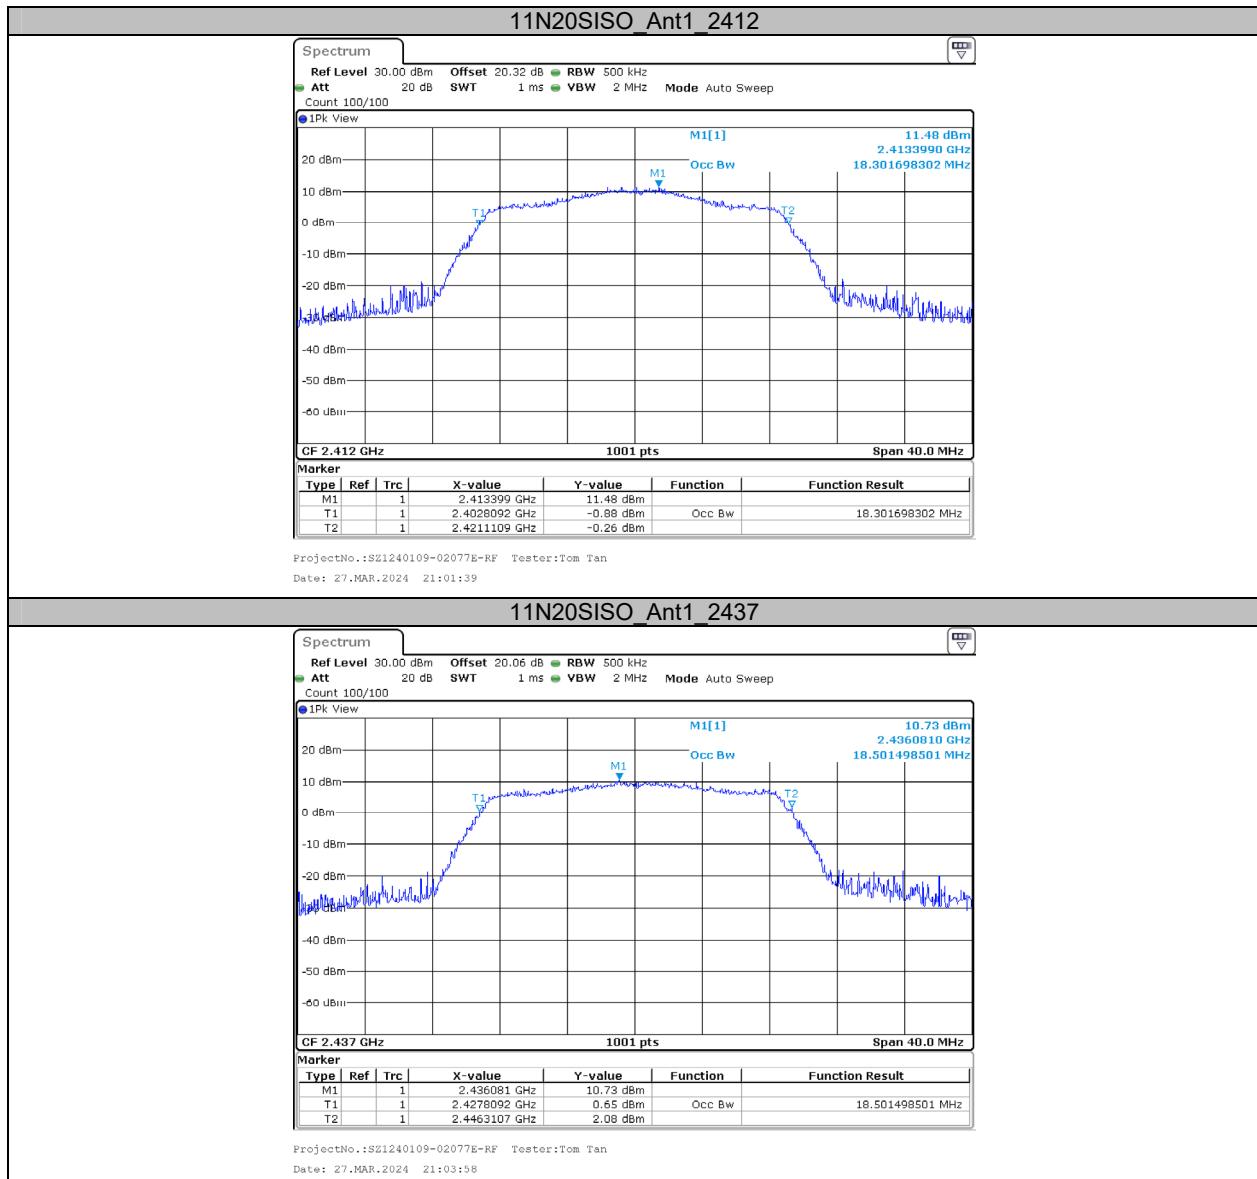

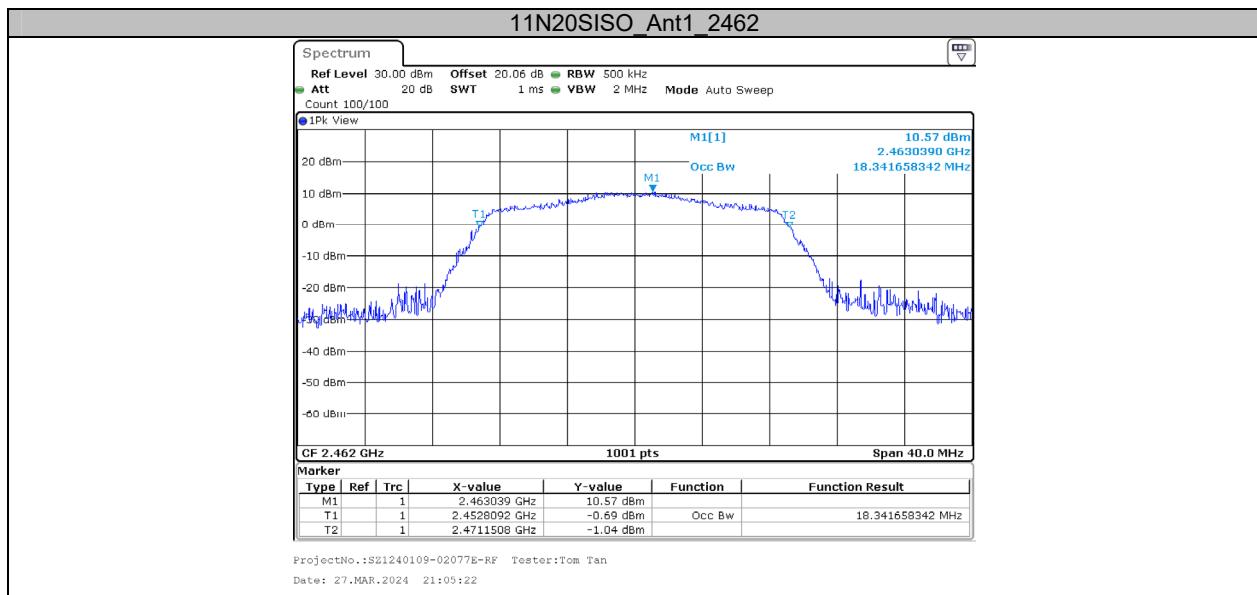


**Appendix C: Maximum conducted output power****Test Result**


Test Mode	Antenna	Frequency[MHz]	Peak Power [dBm]	Conducted Limit [dBm]	EIRP [dBm]	EIRP Limit[dBm]	Verdict
11B	Ant1	2412	19.24	≤30.00	21.90	≤36.00	PASS
		2437	19.21	≤30.00	21.87	≤36.00	PASS
		2462	19.06	≤30.00	21.72	≤36.00	PASS
11G	Ant1	2412	23.83	≤30.00	26.49	≤36.00	PASS
		2437	23.74	≤30.00	26.40	≤36.00	PASS
		2462	23.65	≤30.00	26.31	≤36.00	PASS
11N20SISO	Ant1	2412	23.29	≤30.00	25.95	≤36.00	PASS
		2437	23.31	≤30.00	25.97	≤36.00	PASS
		2462	23.14	≤30.00	25.80	≤36.00	PASS


**Appendix D: Maximum power spectral density****Test Result**


Test Mode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-4.35	≤8.00	PASS
		2437	-4.48	≤8.00	PASS
		2462	-4.34	≤8.00	PASS
11G	Ant1	2412	-6.50	≤8.00	PASS
		2437	-7.15	≤8.00	PASS
		2462	-6.97	≤8.00	PASS
11N20SISO	Ant1	2412	-6.73	≤8.00	PASS
		2437	-7.60	≤8.00	PASS
		2462	-7.13	≤8.00	PASS


## Test Graphs

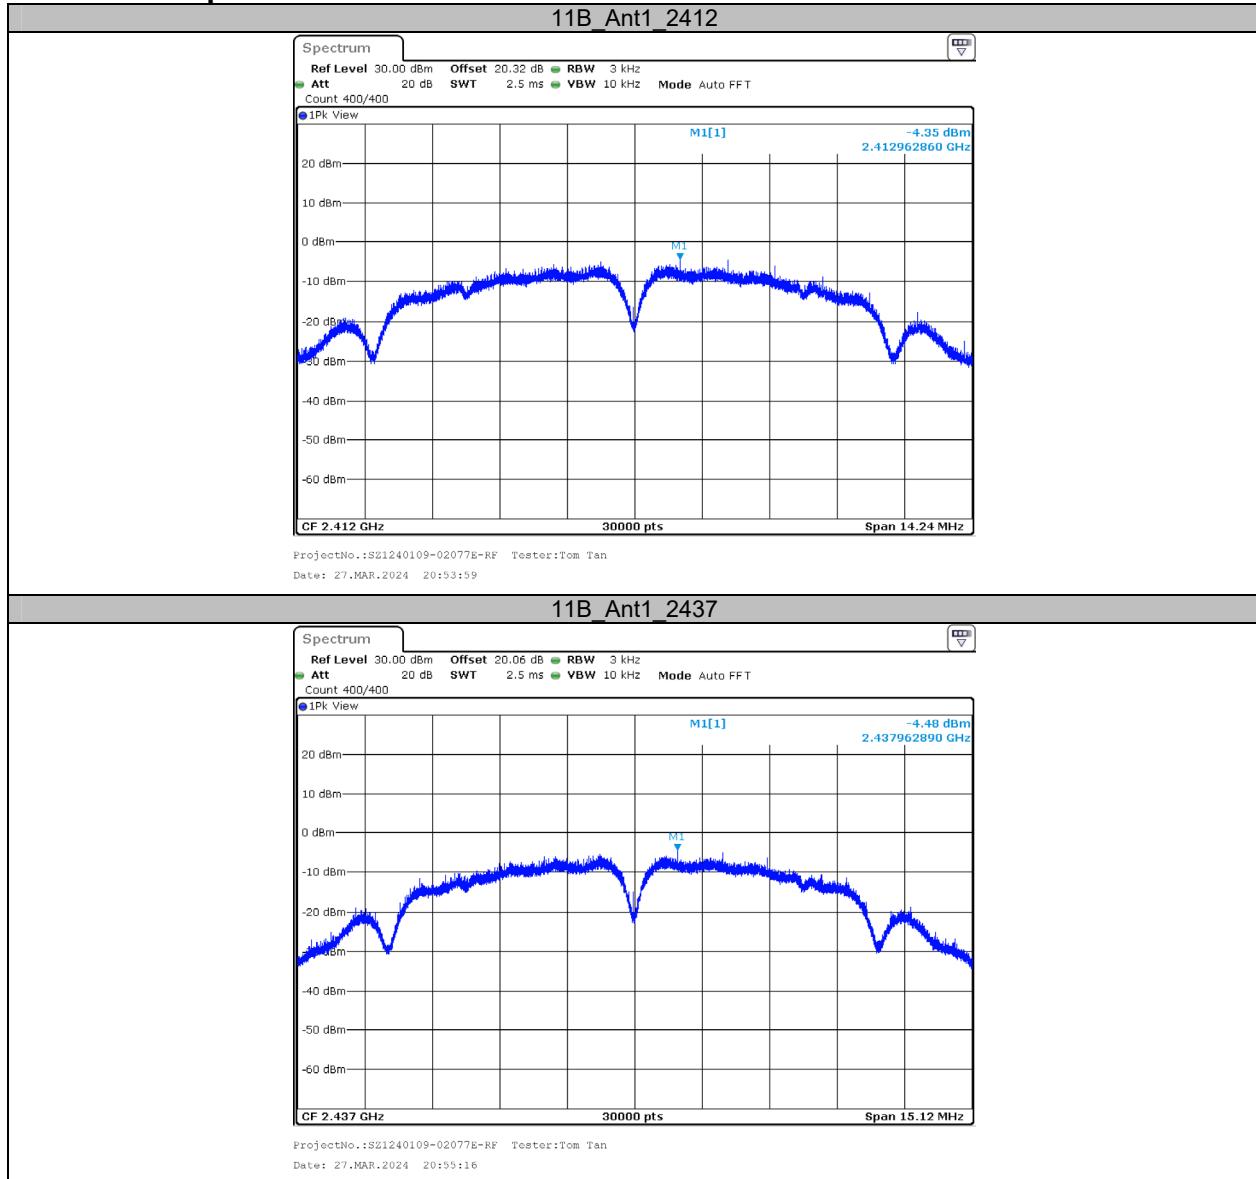

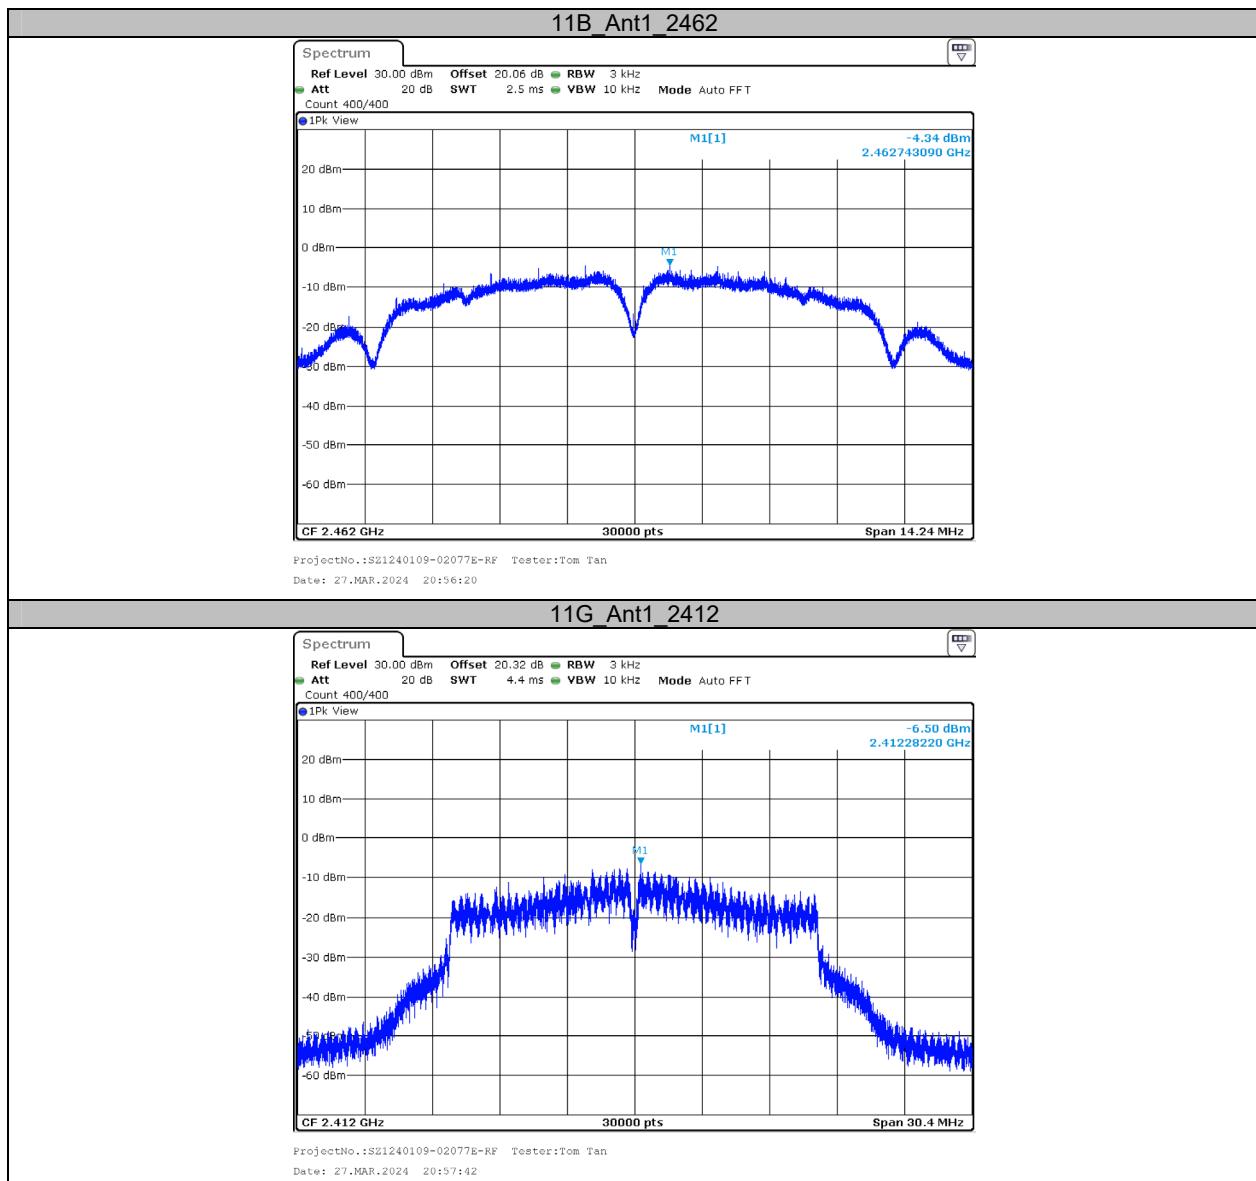

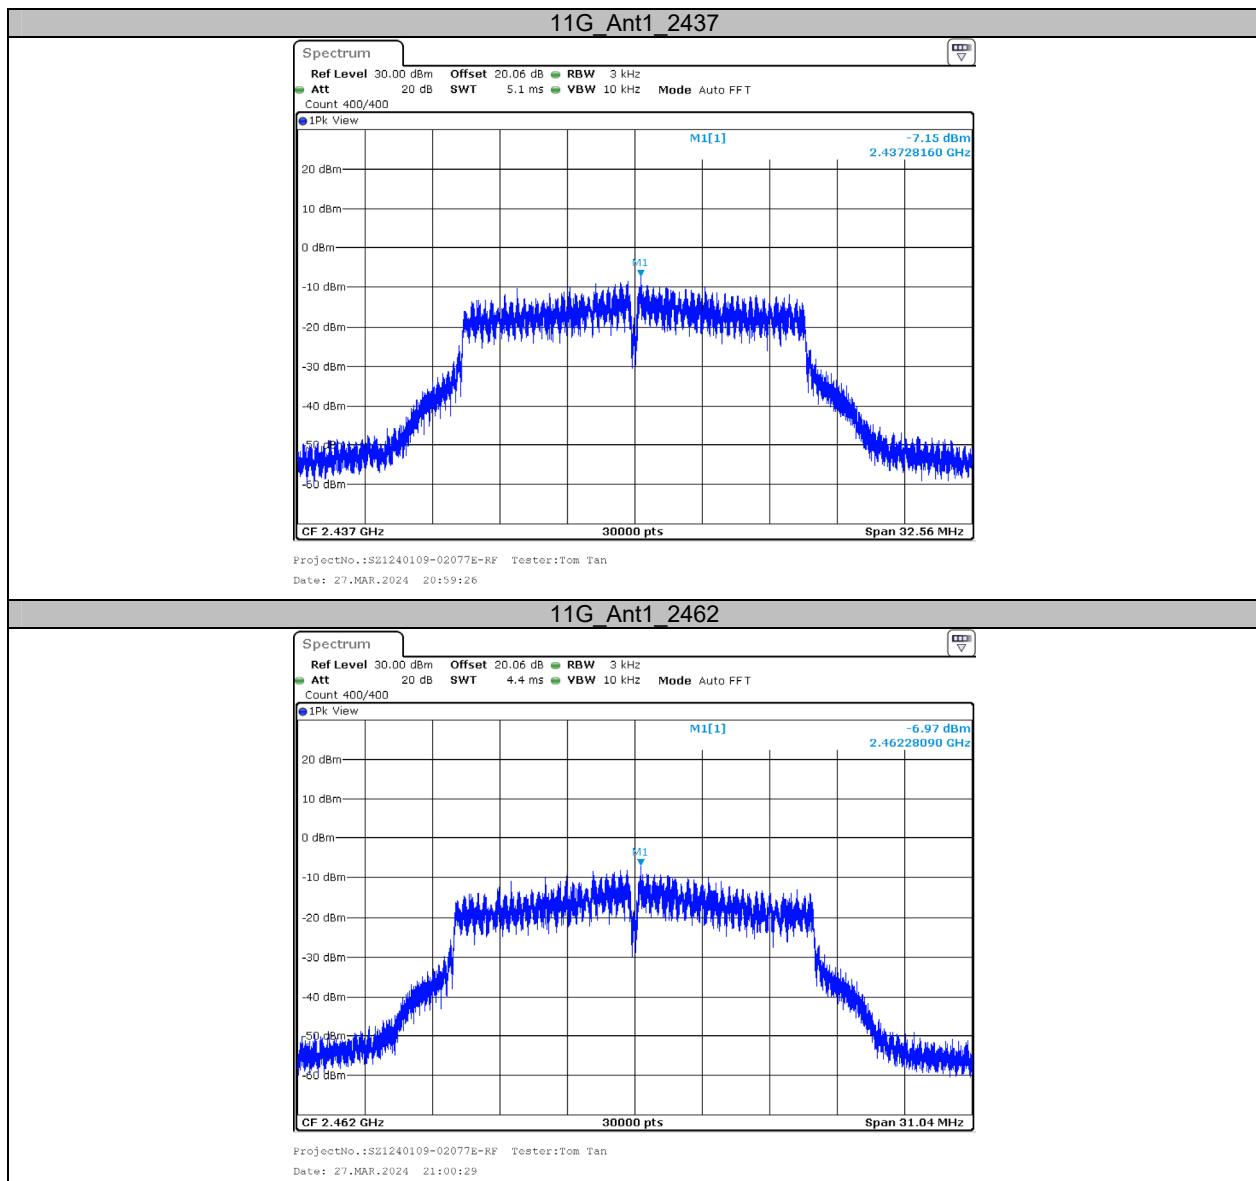


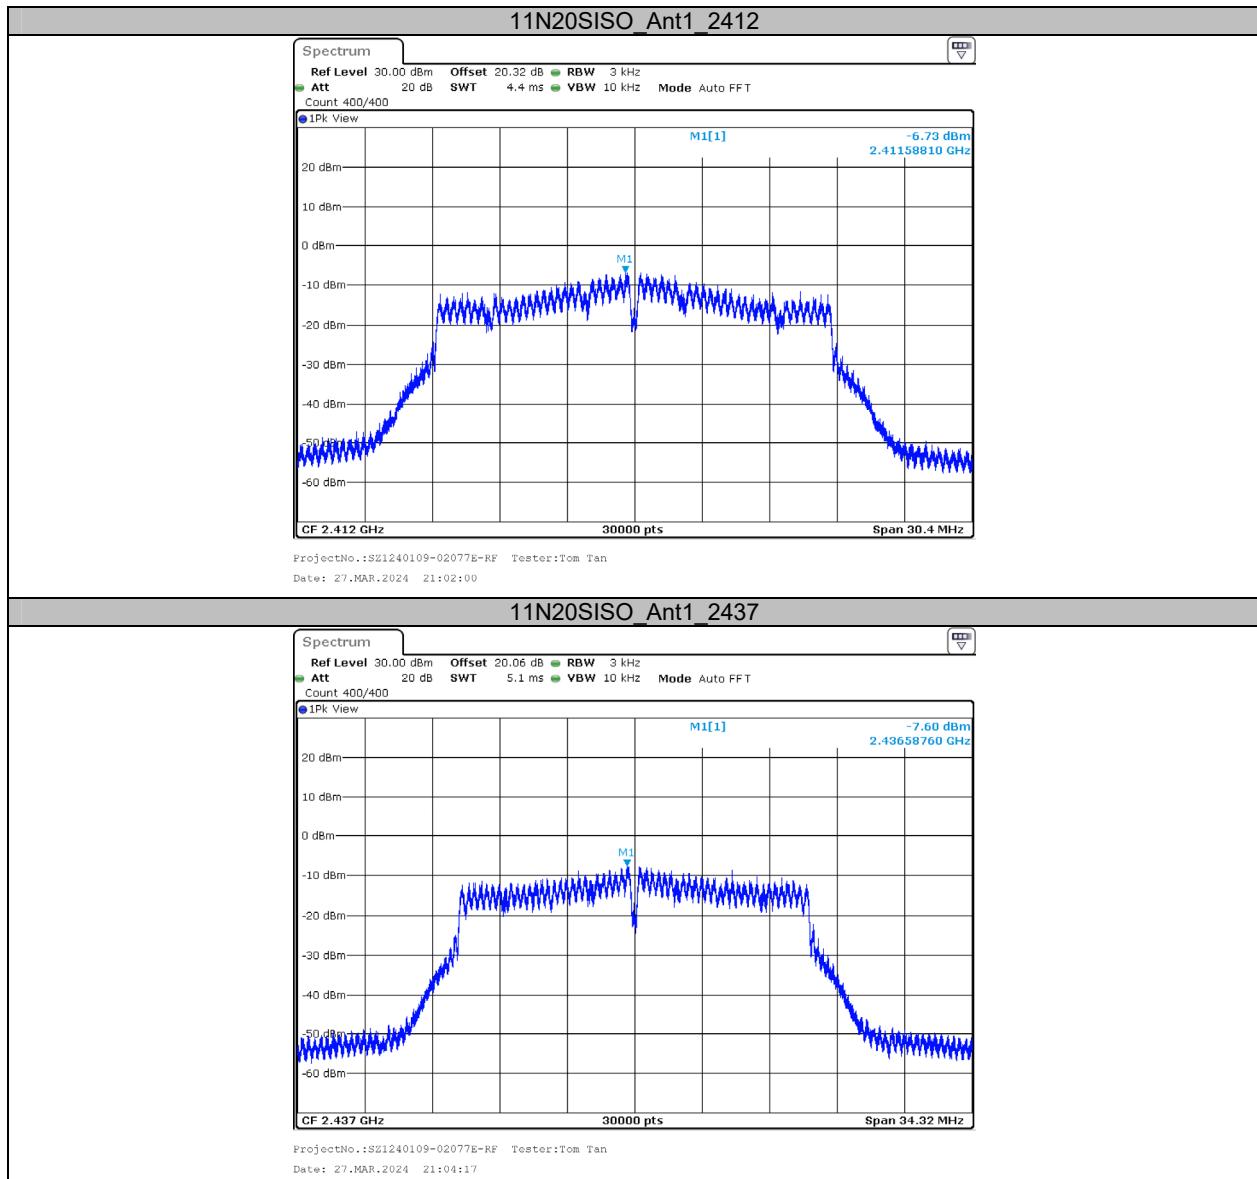


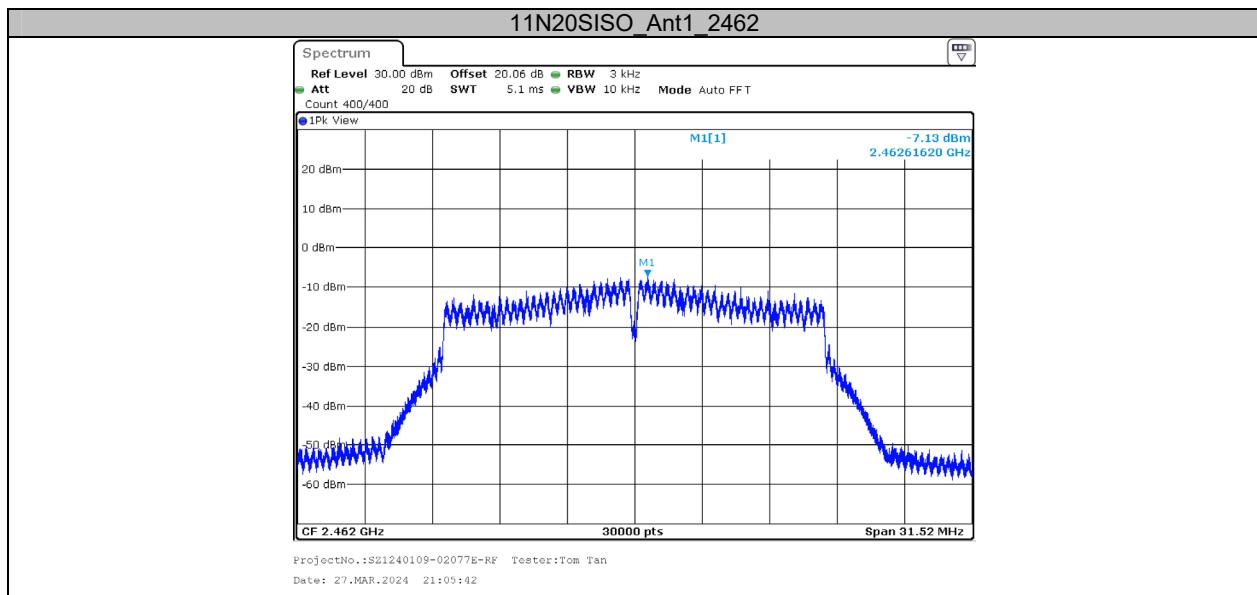


## Appendix E: Band edge measurements

### Test Graphs

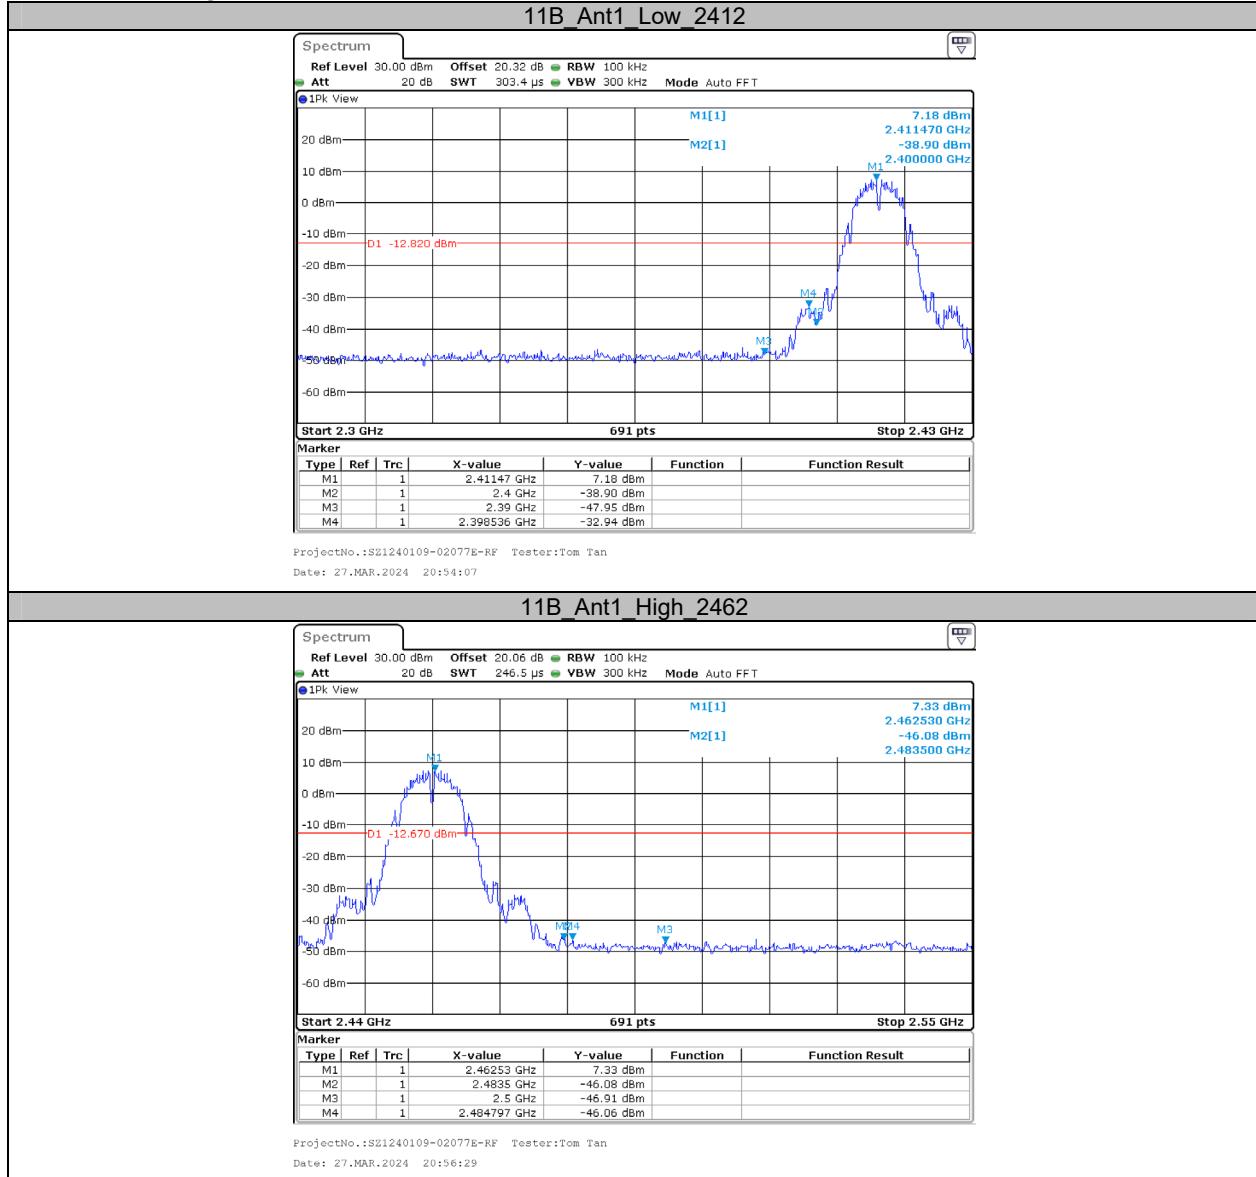

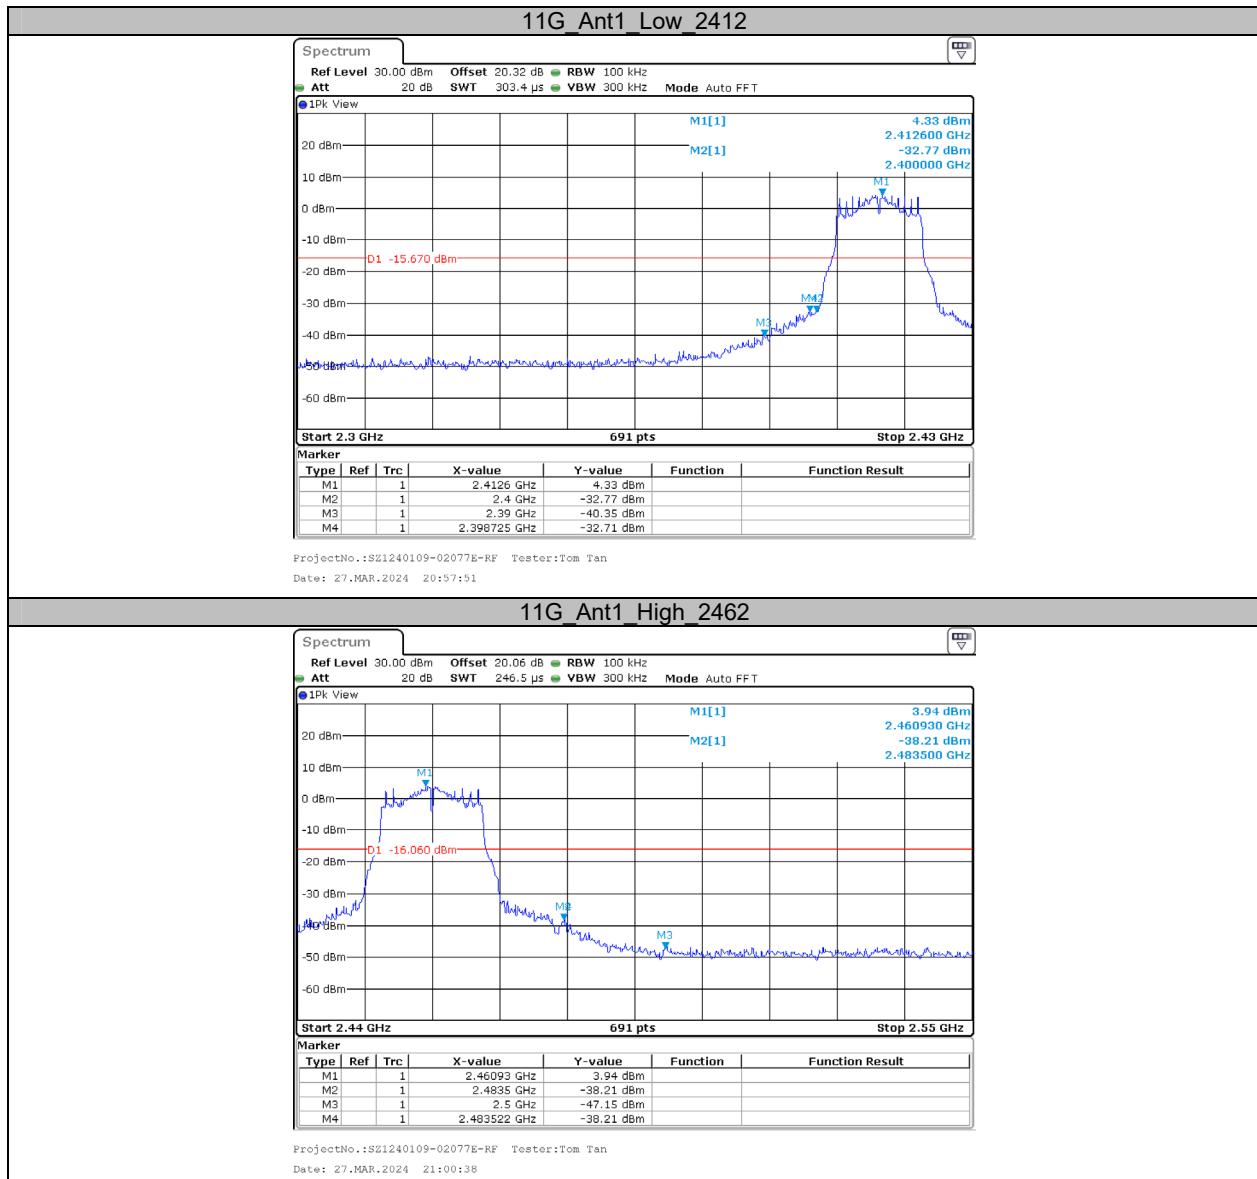


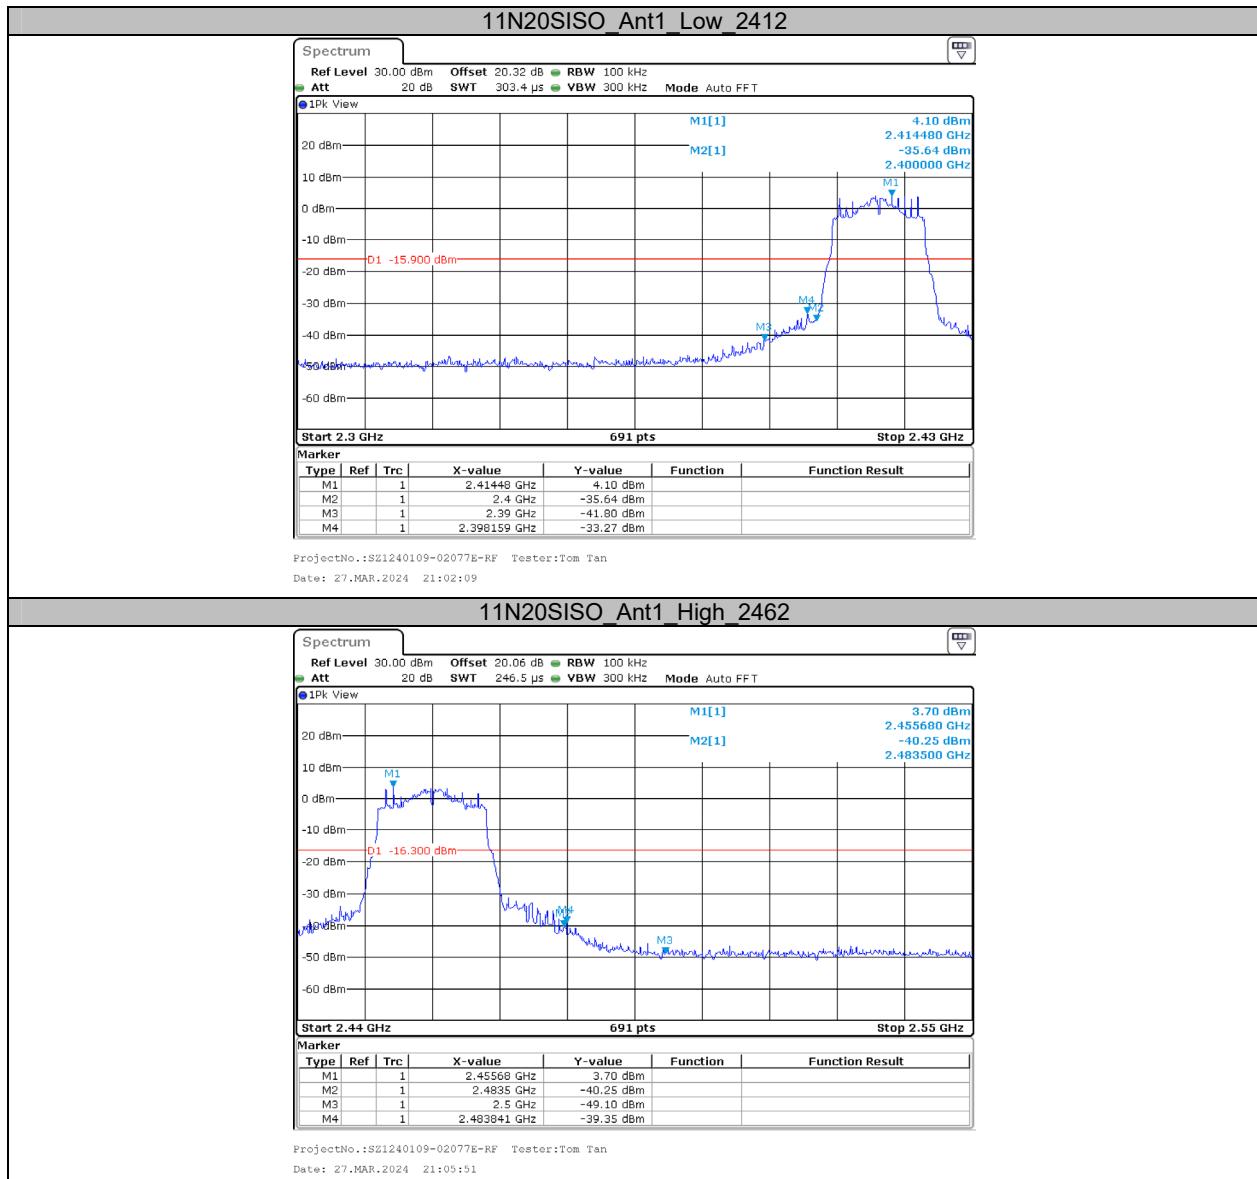


**Appendix F: Duty Cycle****Test Result**


Test Mode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	1/T [Hz]	VBW Setting [Hz]
11B	Ant1	2412	8.41	8.51	98.82	-	10
		2437	8.41	8.51	98.82	-	10
		2462	8.43	8.51	99.06	-	10
11G	Ant1	2412	1.39	1.50	92.67	719	1000
		2437	1.39	1.50	92.67	719	1000
		2462	1.39	1.50	92.67	719	1000
11N20SISO	Ant1	2412	1.33	1.44	92.36	752	1000
		2437	1.33	1.44	92.36	752	1000
		2462	1.34	1.45	92.41	746	1000


## Test Graphs

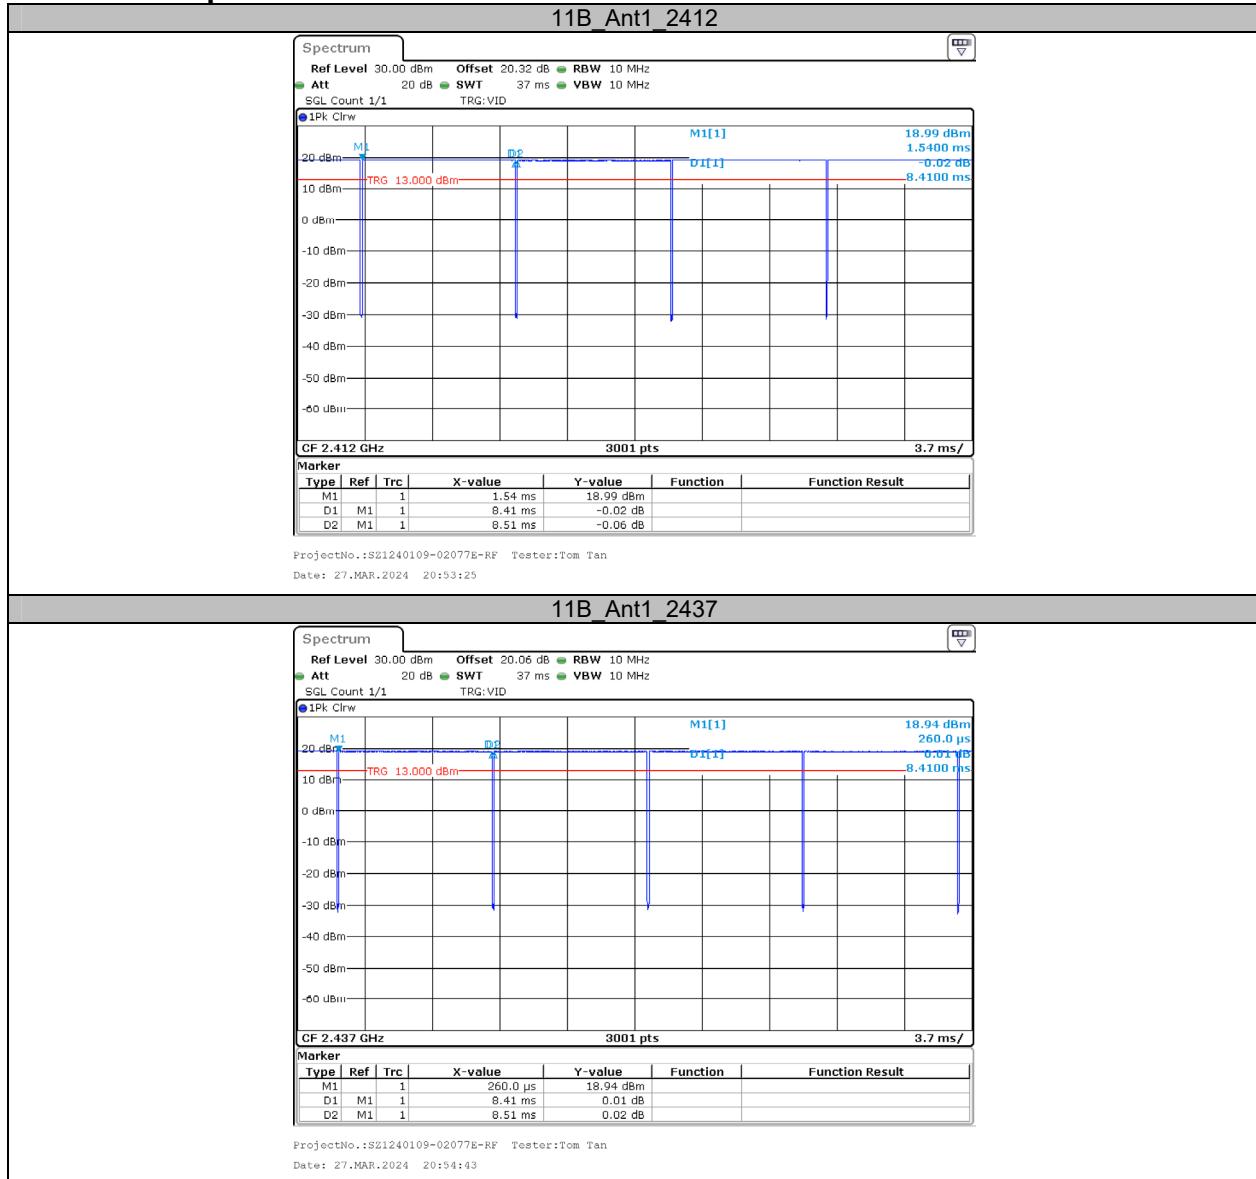



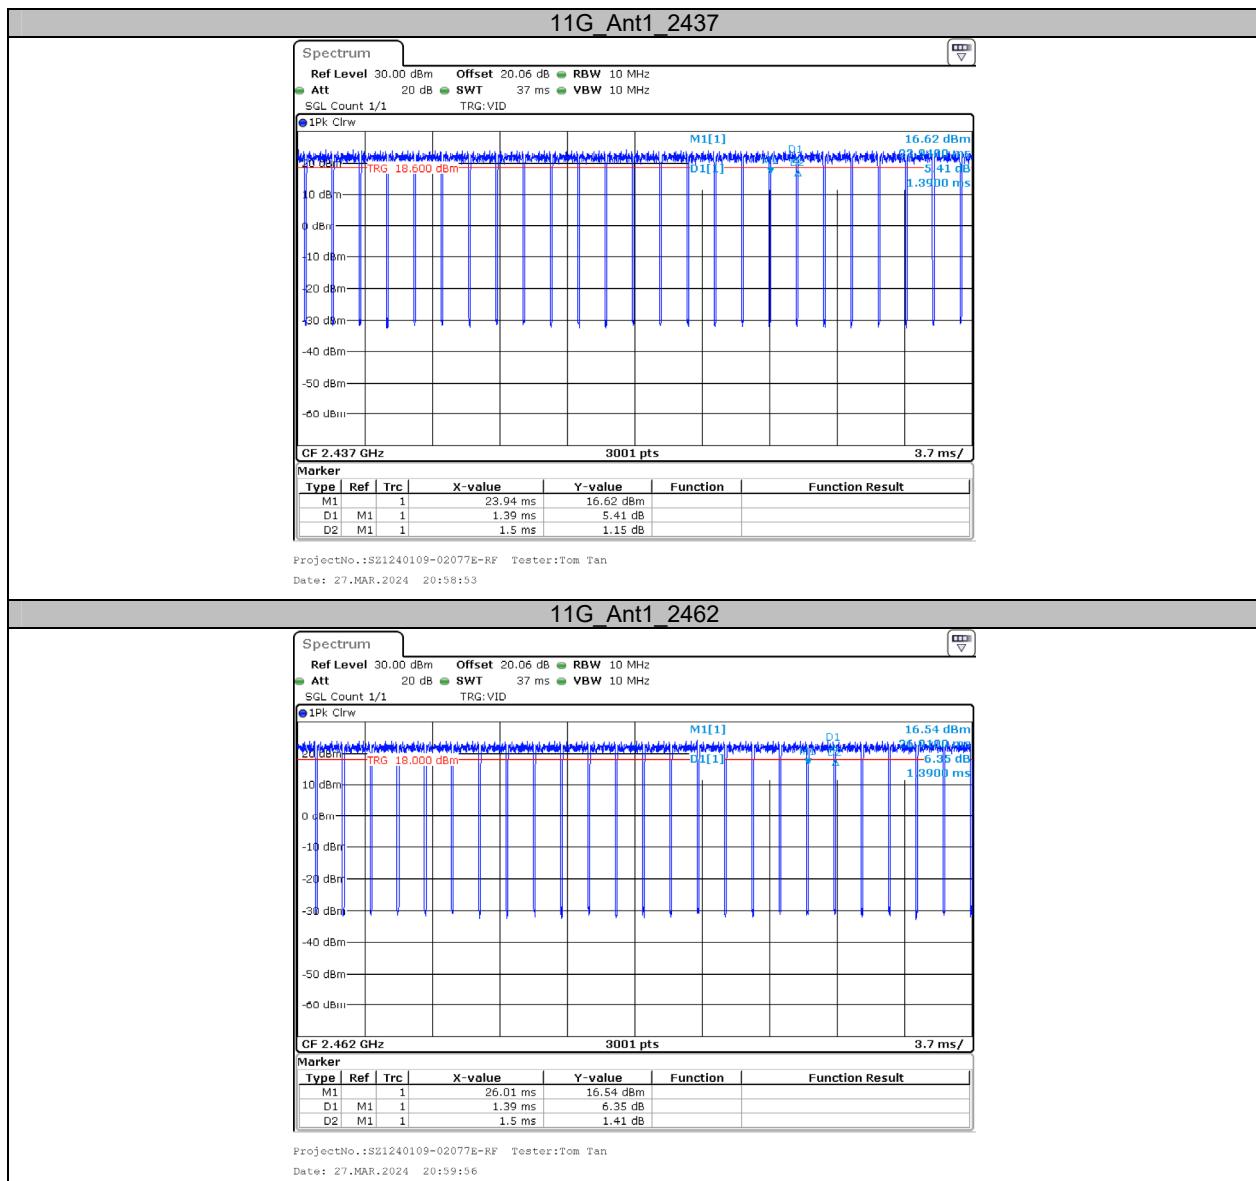

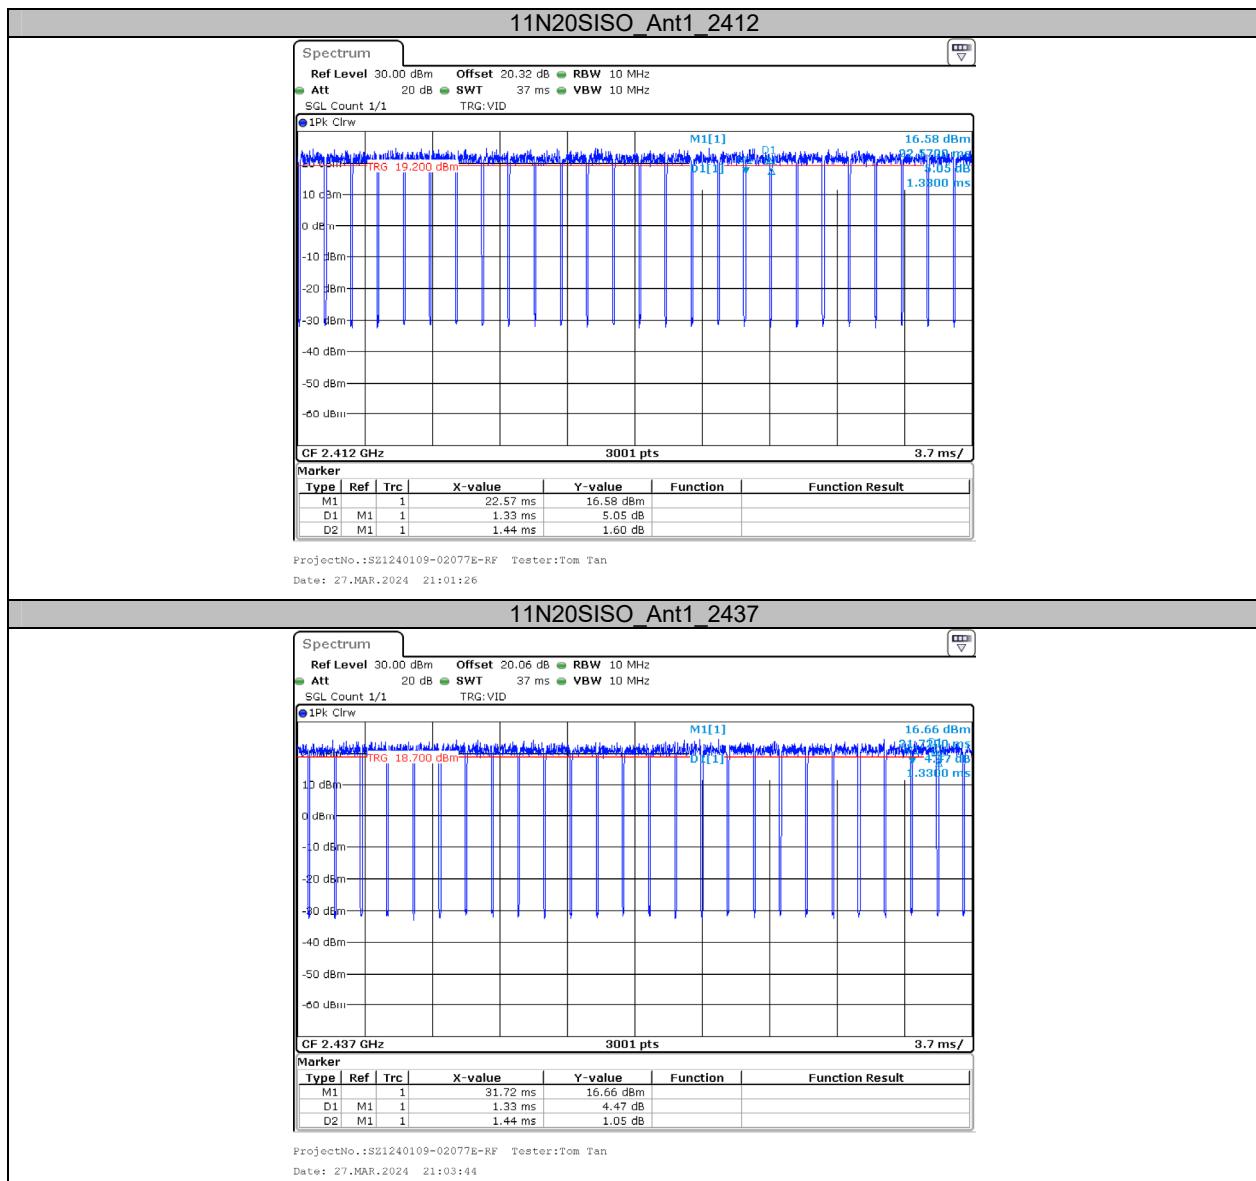

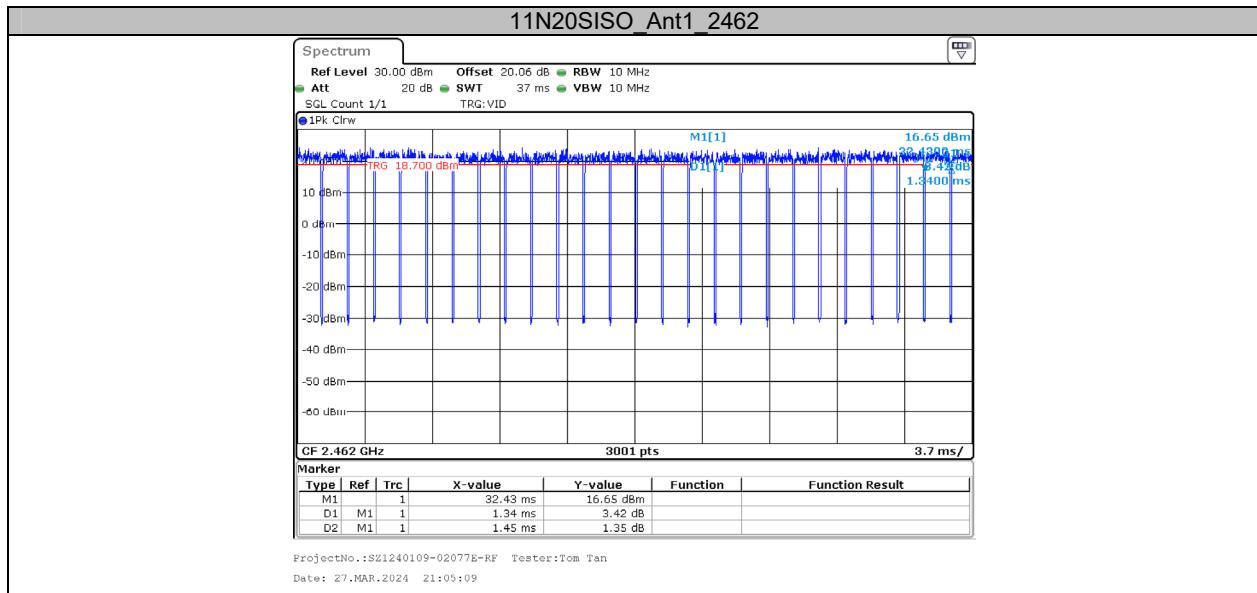

\*\*\*\*\* END OF REPORT \*\*\*\*\*