

Antenna Specification

Specifications Summary

ITEM	SPEC.	
	2.4GHz	
Center Frequency	2402 MHz	0.71 dBi
	2442 MHz	-0.76 dBi
	2484 MHz	-0.77dBi
MAX. GAIN	0.71 dBi	

ITEM	SPEC.	
	5 GHz	
Center Frequency	5150 MHz	2.31 dBi
	5300 MHz	2.94 dBi
	5500 MHz	3.01 dBi
	5800 MHz	1.56 dBi
MAX. GAIN	3.01 dBi	

Antenna Photo & Length

天线类型/
ANT Type:

PCB


天线型号/

ANT Model: 2.4G&5G ANT2

制造商/



Manufactory: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd. Huli District Xiamen City, Fujian, P.R. China

天线尺寸/ANT Size


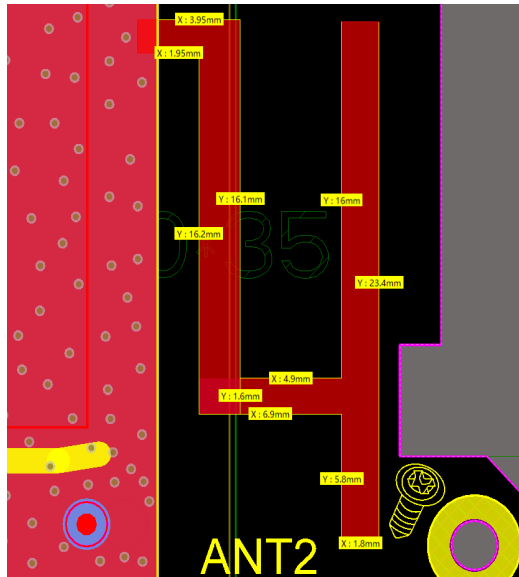


2402MHz

3D Antenna Pattern

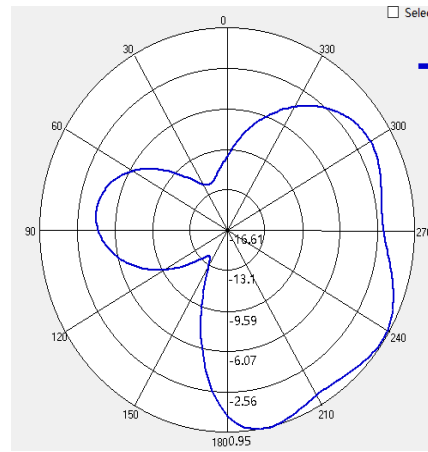
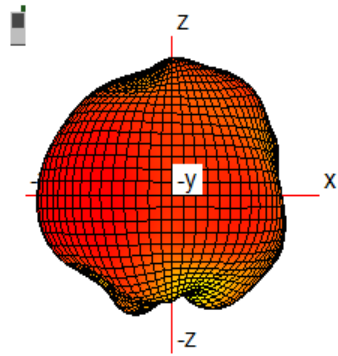


2D Antenna Pattern (X->Y; X->Z; Y->Z)

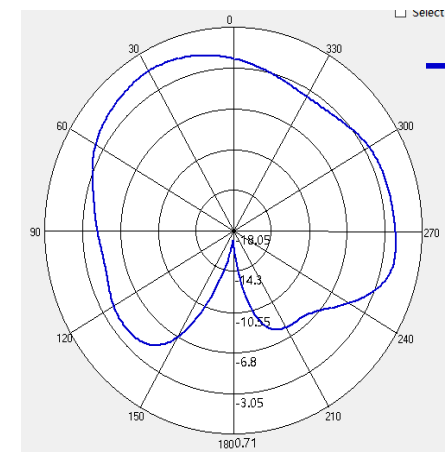
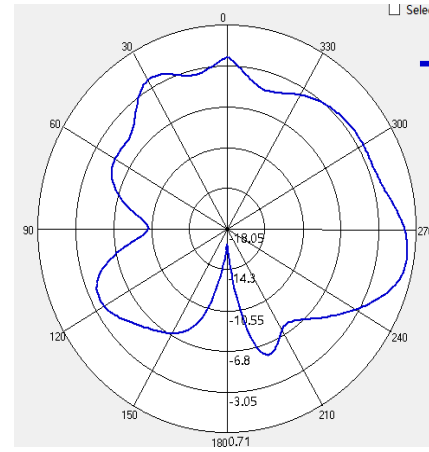


2442MHz

3D Antenna Pattern

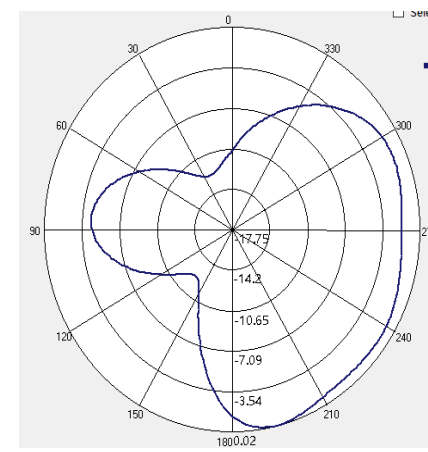
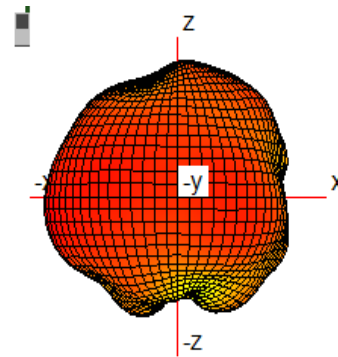


2D Antenna Pattern (X->Y; X->Z; Y->Z)

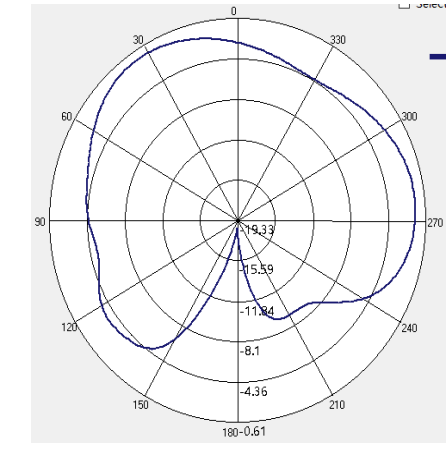
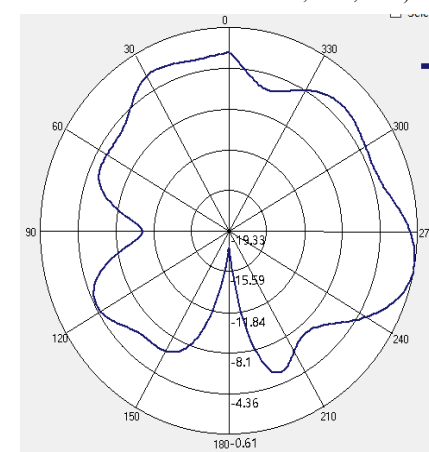


2484MHz

3D Antenna Pattern

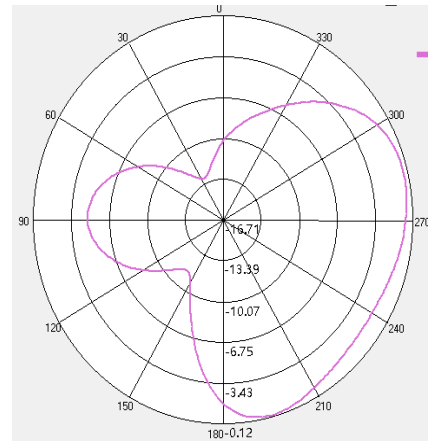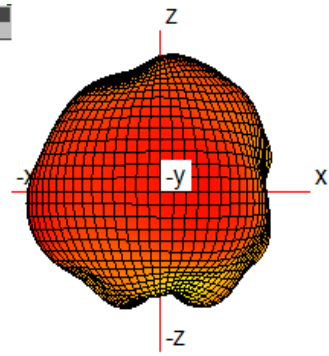



2D Antenna Pattern (X->Y;X->Z;Y->Z)

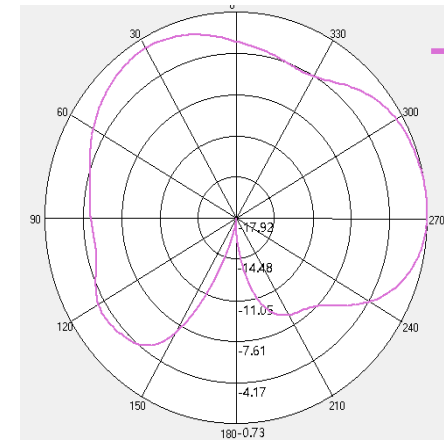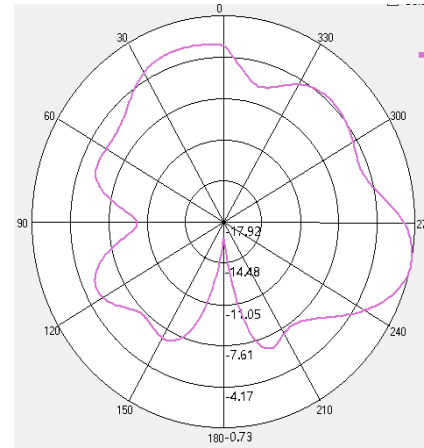



Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
2402	-16.5841	0.70717	-4.01609
2442	-17.7364	-0.75824	-4.54496
2484	-16.5422	-0.76540	-4.64366

5150MHz

3D Antenna Pattern

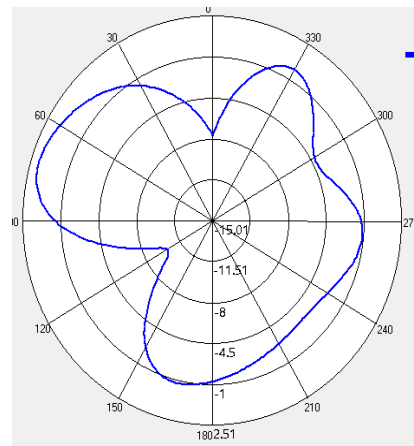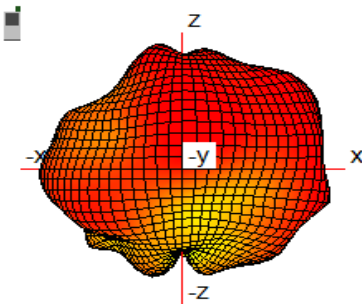


2D Antenna Pattern (X->Y;X->Z;Y->Z)


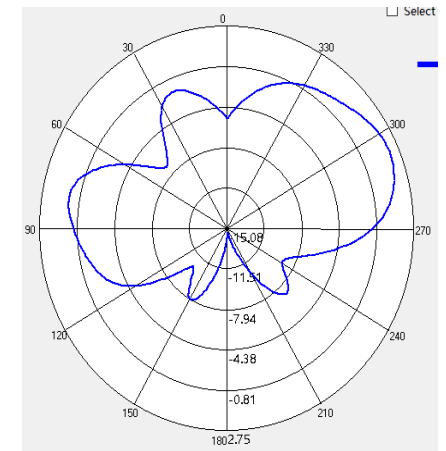
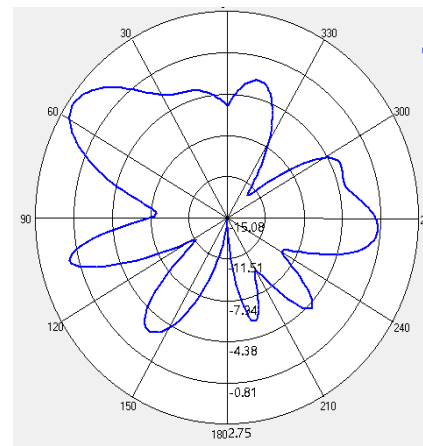


5300MHz

3D Antenna Pattern

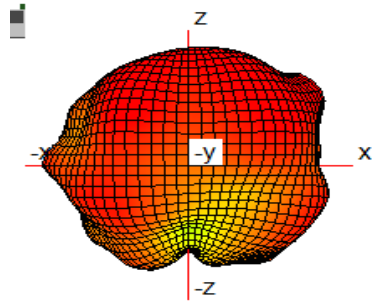


2D Antenna Pattern (X->Y;X->Z;Y->Z)

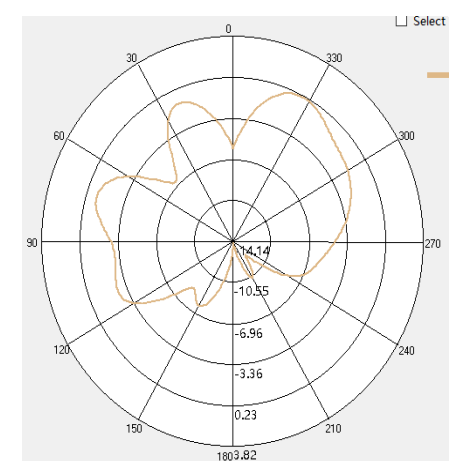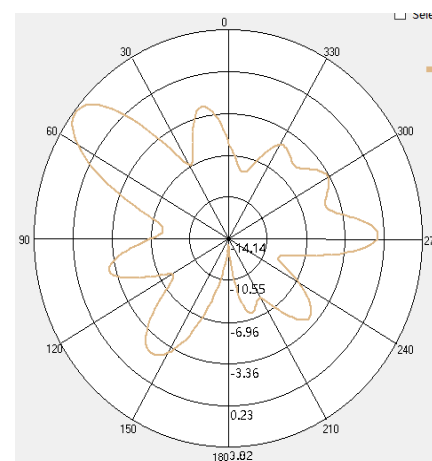
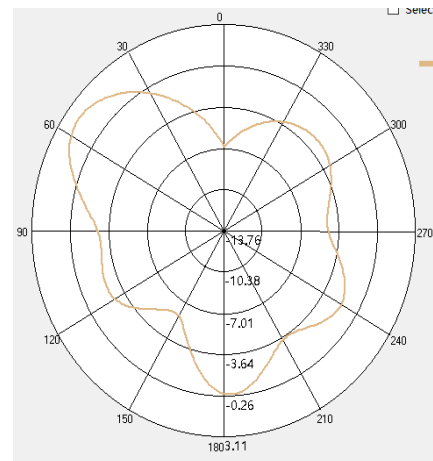


5500MHz

3D Antenna Pattern

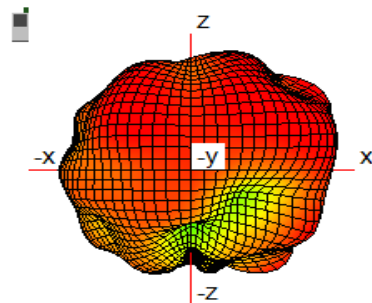


2D Antenna Pattern (X->Y;X->Z;Y->Z)


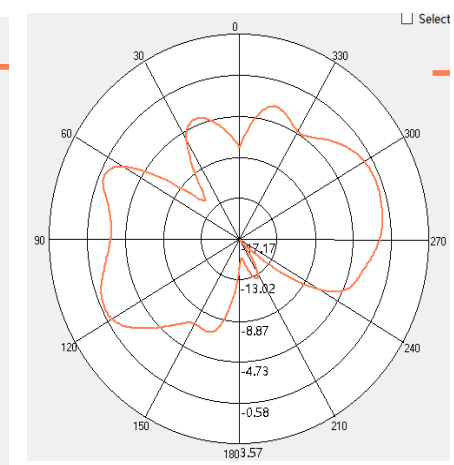
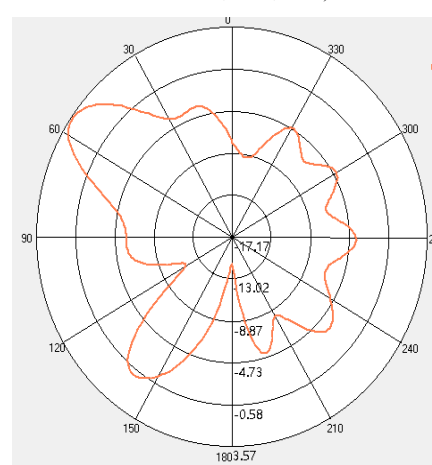


5800MHz

3D Antenna Pattern

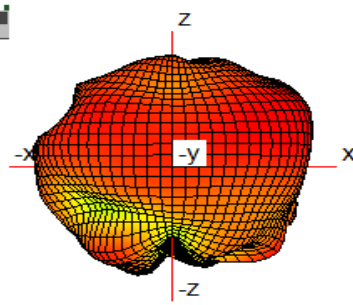

2D Antenna Pattern (X->Y; X->Z; Y->Z)

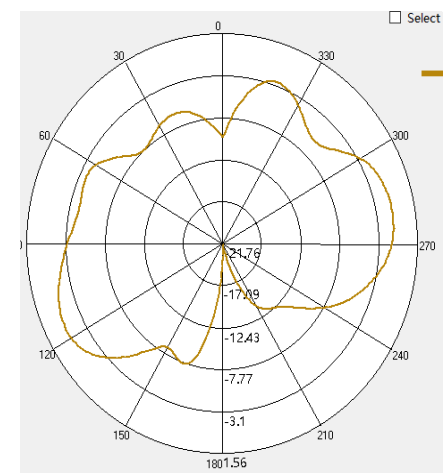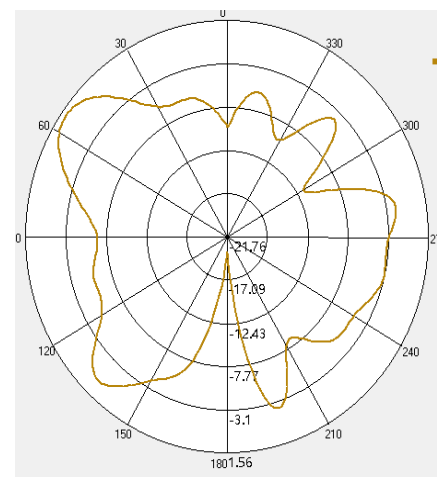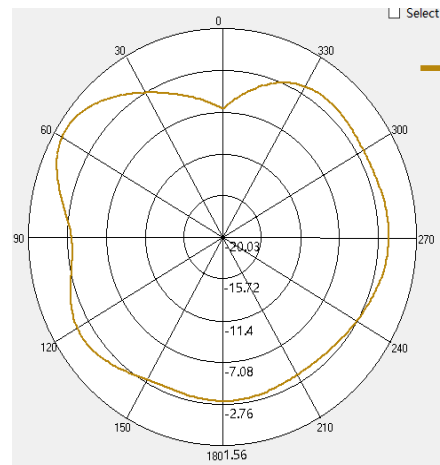

Point Values	Minimum Gain (dBi)	Maximum Gain (dBi)	Average Gain (dBi)
Frequency (MHz)			
5150	-14.3341	2.31240	-2.56696
5300	-13.7527	2.93982	-2.33095
5500	-16.9581	3.01229	-2.44377
5800	-19.9832	1.55898	-3.14460