

**FCC 47 CFR PART 15 SUBPART C
INDUSTRY CANADA RSS-247 ISSUE 2 February 2017**

CERTIFICATION TEST REPORT

For

Product: Video Conferencing Endpoint

MODEL No.:VC200

FCC ID: T2C-VC200

IC: 10741A-VC200

Trade Mark: Yealink

REPORT NO: ES180426021W02

ISSUE DATE: May 07, 2018

Prepared for

**YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
309, 3th Floor, No.16, Yun Ding North Road, Huli District, Xiamen City,
Fujian, P.R. China**

Prepared by

**EMTEK(SHENZHEN) CO., LTD.
Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION.....	3
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT.....	5
4	TEST METHODOLOGY.....	6
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
4.2	MEASUREMENT EQUIPMENT USED	6
4.3	DESCRIPTION OF TEST MODES.....	7
5	FACILITIES AND ACCREDITATIONS.....	8
5.1	FACILITIES	8
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
6	TEST SYSTEM UNCERTAINTY	9
7	SETUP OF EQUIPMENT UNDER TEST	10
7.1	RADIO FREQUENCY TEST SETUP 1	10
7.2	RADIO FREQUENCY TEST SETUP 2.....	10
7.3	CONDUCTED EMISSION TEST SETUP	11
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
7.5	SUPPORT EQUIPMENT.....	12
8	TEST REQUIREMENTS.....	13
8.1	DTS(6DB)BANDWIDTH.....	13
8.2	99% OCCUPIED BANDWIDTH	20
8.3	MAXIMUM PEAK CONDUCTED OUTPUT POWER	28
8.4	MAXIMUM POWER SPECTRAL DENSITY	30
8.5	UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS	37
8.6	RADIATED SPURIOUS EMISSION	42
8.7	CONDUCTED EMISSIONS TEST	66
8.8	ANTENNA APPLICATION.....	73

1 TEST RESULT CERTIFICATION

Applicant: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
309, 3th Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China

Manufacturer: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
309, 3th Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China

EUT Description: Video Conferencing Endpoint

Model Number: VC200

Trade Mark: Yealink

File Number: ES180426021W02

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 2017, Subpart J FCC 47 CFR Part 15 2017, Subpart C IC RSS-GEN, Issue 4, Nov 2014 IC RSS-247 Issue 2 February 2017	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2, Part 15.247, IC RSS-247 Issue 2 and IC RSS-GEN, Issue 4

The test results of this report relate only to the tested sample identified in this report

Date of Test : March 15, 2018 to April 29, 2018

Prepared by : Yaping Shen
YapingShen /Tester

Reviewer : Joe Xia
Joe Xia/ Supervisor

Approve & Authorized Signer : Lisa Wang
Lisa Wang/Manager



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11b <input checked="" type="checkbox"/> 802.11g <input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7; 802.11n(HT40): MCS0-MCS7;
Modulation	WIFI: DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	WIFI: 2412-2462MHz for 802.11b/g/n(HT20); 2422-2452MHz for 802.11n(HT40);
Number of Channels	WIFI: 11 channels for 802.11b/g n(HT20); 7 channels for 802.11n(HT40)
Transmit Power Max	WIFI: 18.02dBm for 802.11b; 19.09dBm for 802.11g; 18.83dBm for 802.11/n(HT20); 18.97dBm for 802.11/n(HT40);
Antenna Type	PCB Antenna
Antenna Gain	3.31dBi
Power supply	<input checked="" type="checkbox"/> DC 54V from POE POE Rating: Model: YLPOE30 Input: 100-240~ 50/60Hz 1.0A Output: DC 54V 0.56A
Temperature Range	-10°C ~ +50°C

3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	
	NOTE1:N/A (Not Applicable) NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.		

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: T2C-VC200 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

This submittal(s) (test report) is intended for IC: 10741A-VC200 filing to comply with IC RSS-247 Issue 2 and IC RSS-GEN, Issue 4

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v04

IC RSS-Gen, ISSUE 4

IC RSS-247 , ISSUE 2 February 2017

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 20, 2017	May 19, 2018
L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 20, 2017	May 19, 2018
50ΩCoaxial Switch	Anritsu	MP59B	6100175589	May 21, 2017	May 20, 2018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 21, 2017	May 20, 2018
Pre-Amplifier	HP	8447F	2944A07999	May 20, 2017	May 19, 2018
Bilog Antenna	Schwarzbeck	VULB9163	142	May 20, 2017	May 19, 2018
Loop Antenna	ARA	PLA-1030/B	1029	May 20, 2017	May 19, 2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 21, 2017	May 20, 2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 20, 2017	May 19, 2018
Cable	Schwarzbeck	AK9513	ACRX1	May 21, 2017	May 20, 2018
Cable	Rosenberger	N/A	FP2RX2	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRPX1	May 21, 2017	May 20, 2018
Cable	Schwarzbeck	AK9513	CRRX2	May 21, 2017	May 20, 2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	May 21, 2017	May 20, 2018
Signal Analyzer	Agilent	N9010A	My53470879	May 21, 2017	May 20, 2018
Power Meter	Anritsu	ML2495A	0824006	May 21, 2017	May 20, 2018
Power sensor	Anritsu	MA2411B	0738172	May 21, 2017	May 20, 2018

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b:1 Mbps;802.11g: 6 Mbps;802.11n(HT20): MCS0; 802.11(HT40): MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Frequency and Channel list for 802.11 n (HT40):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	8	2447
4	2427	6	2437	9	2452
		7	2442		

Test Frequency and Channel for 802.11 b/g/n (HT20):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

Test Frequency and channel for 802.11 n (HT40):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

- EMC Lab.
- : Accredited by CNAS, 2016.10.24
The certificate is valid until 2022.10.28
The Laboratory has been assessed and proved to be in compliance with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)
The Certificate Registration Number is L229

 - : Accredited by TUV Rheinland Shenzhen, 2016.5.19
The Laboratory has been assessed according to the requirements ISO/IEC 17025.

 - : Accredited by FCC, August 03, 2017
Designation Number: CN1204
Test Firm Registration Number: 882943

 - : Accredited by Industry Canada, November 24, 2015
The Certificate Registration Number is 4480A.

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

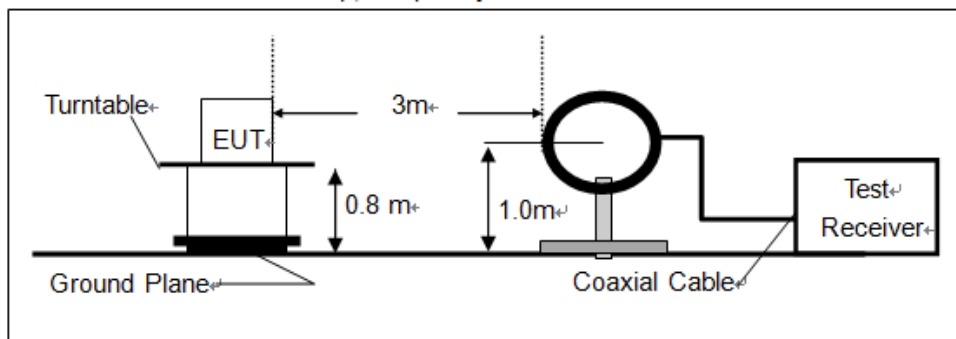

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

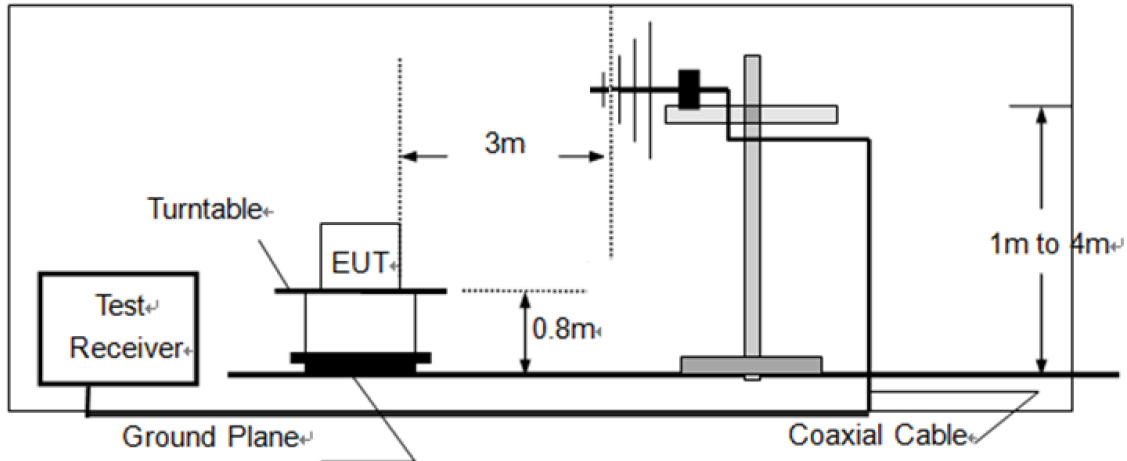

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

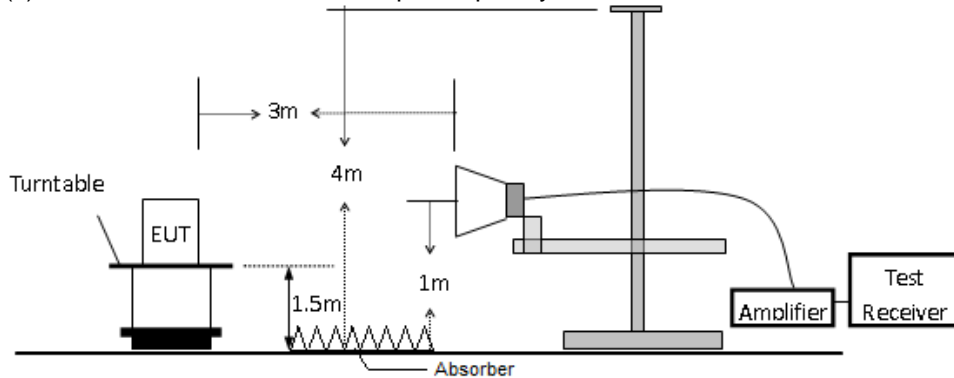


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

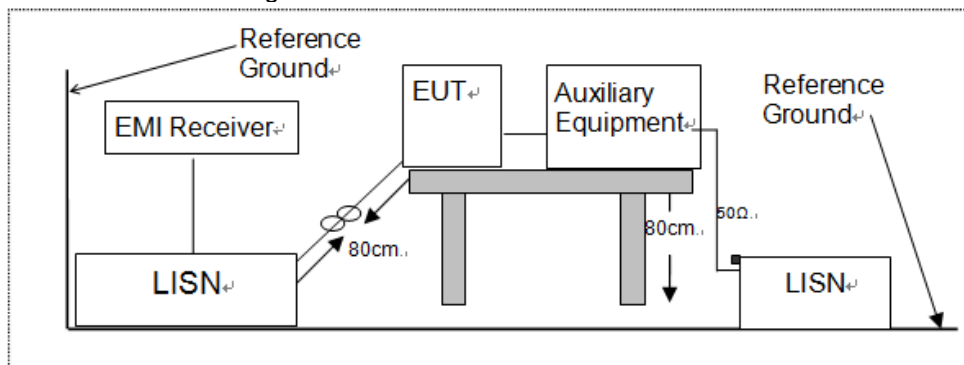

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

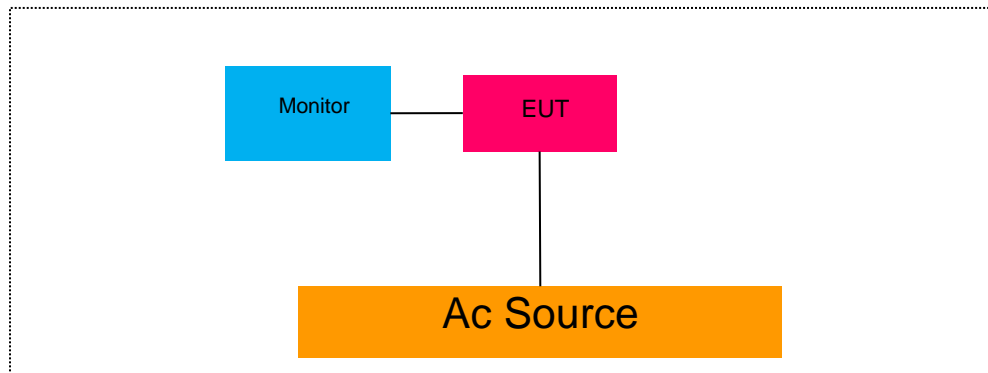

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	LCD Monitor	Lenovo	9227-AE6	4M0293084302824	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04
 According to IC RSS-247.5.2(a)

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

8.1.5 Test Results

Temperature : 26°C Test Date : March 26, 2018
 Humidity : 60 % Test By: King Kong


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
802.11b	1	2412	7.330	>500	PASS
	6	2437	7.510	>500	PASS
	11	2462	6.820	>500	PASS
802.11g	1	2412	15.305	>500	PASS
	6	2437	15.744	>500	PASS
	11	2462	15.345	>500	PASS
802.11n (HT20)	1	2412	15.544	>500	PASS
	6	2437	15.145	>500	PASS
	11	2462	14.465	>500	PASS
802.11n (HT40)	3	2422	35.105	>500	PASS
	6	2437	35.025	>500	PASS
	9	2452	35.105	>500	PASS

Test Model DTS (6dB) Bandwidth
802.11b
Channel 1: 2412MHz

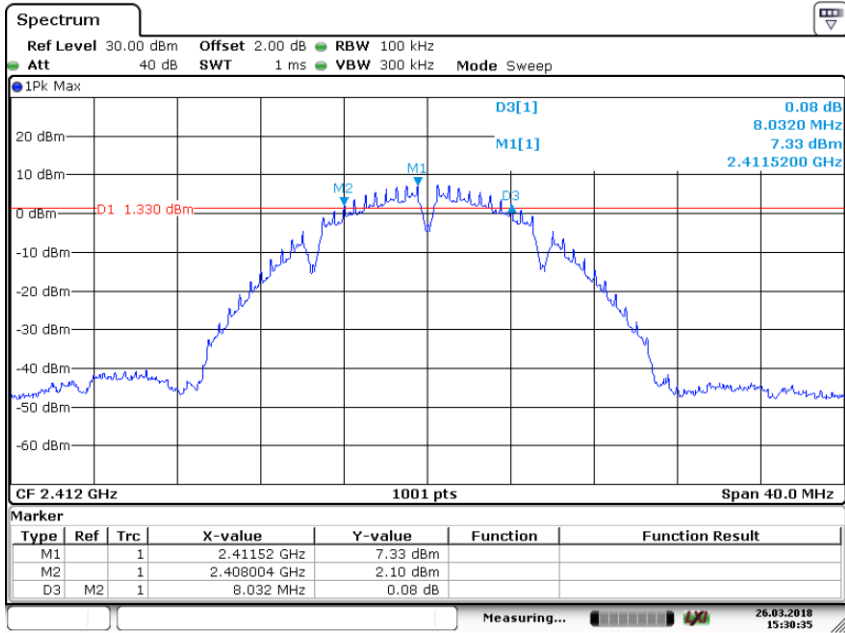


Date: 26.MAR.2018 15:30:34

Test Model DTS (6dB) Bandwidth
802.11b
Channel 6: 2437MHz

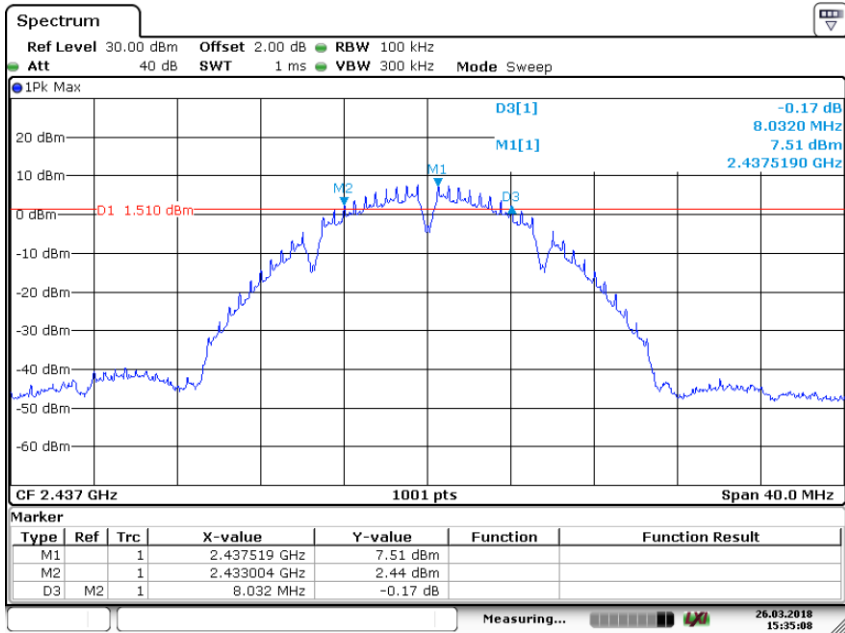


Date: 26.MAR.2018 15:35:08

Test Model DTS (6dB) Bandwidth
802.11b
Channel 11: 2462MHz

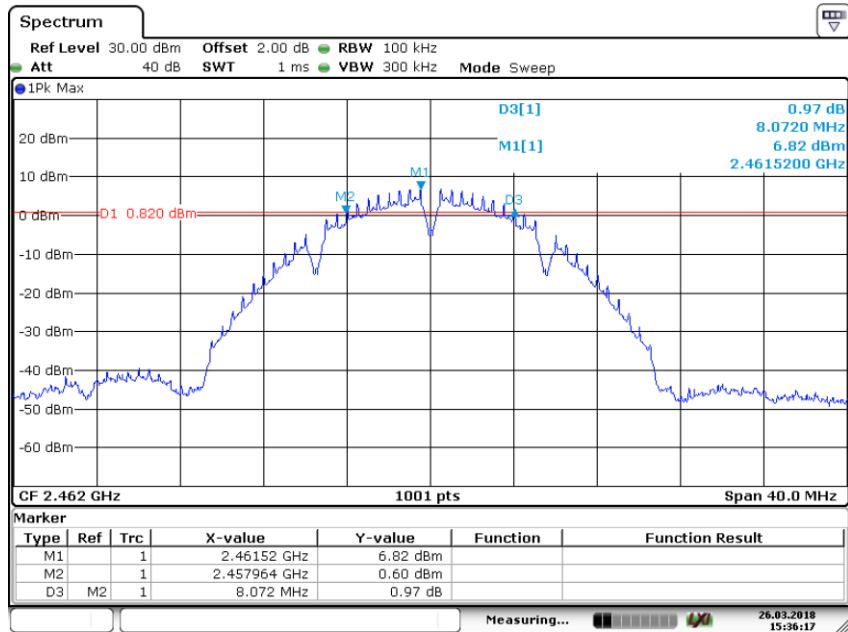


Date: 26.MAR.2018 15:36:17

Test Model DTS (6dB) Bandwidth
802.11g
Channel 1: 2412MHz

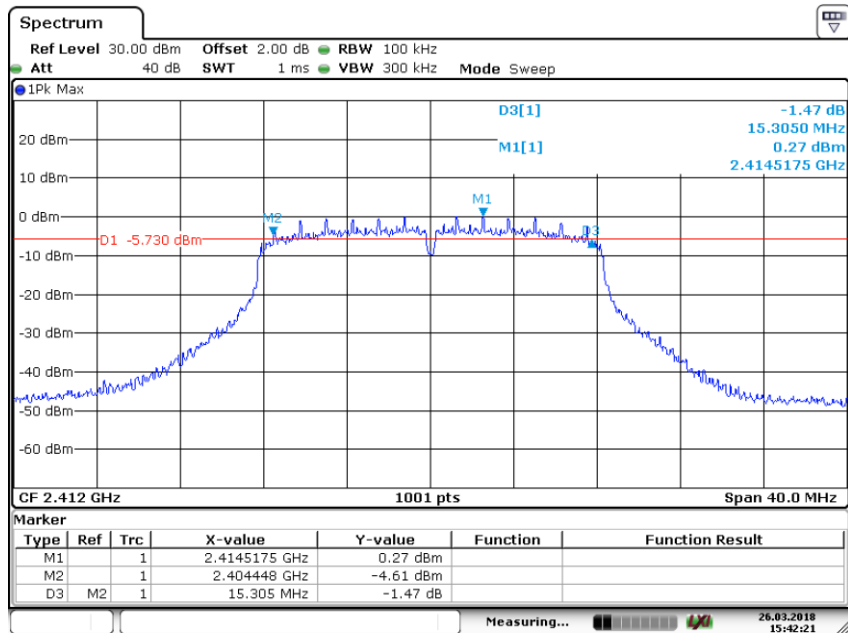


Date: 26.MAR.2018 15:42:21

Test Model DTS (6dB) Bandwidth
802.11g
Channel 6: 2437MHz

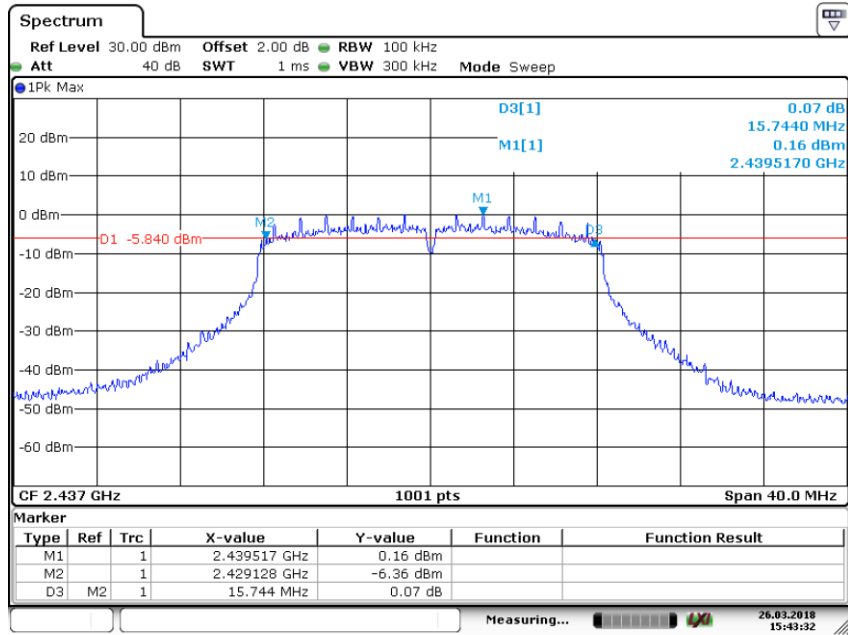


Date: 26.MAR.2018 15:43:32

Test Model DTS (6dB) Bandwidth
802.11g
Channel 11: 2462MHz

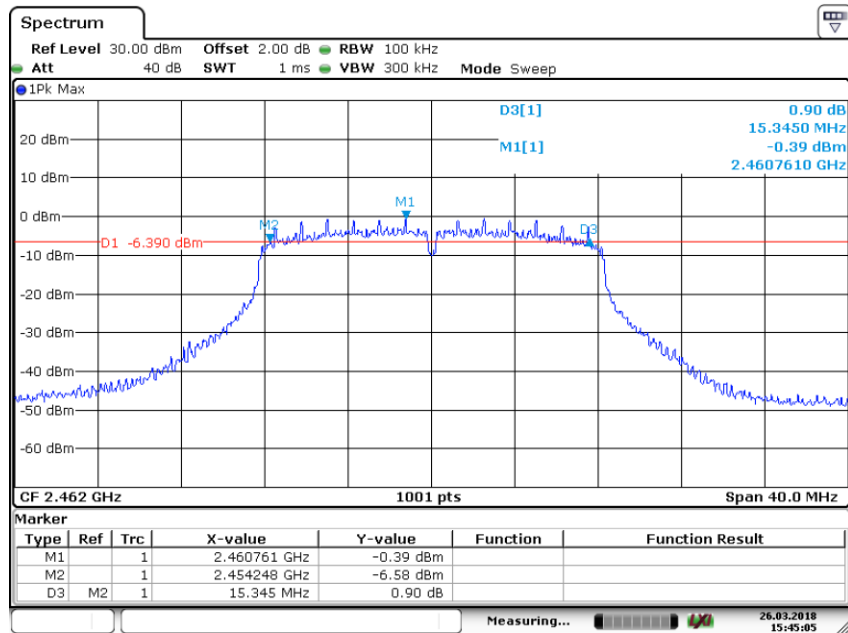


Date: 26.MAR.2018 15:45:05

Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

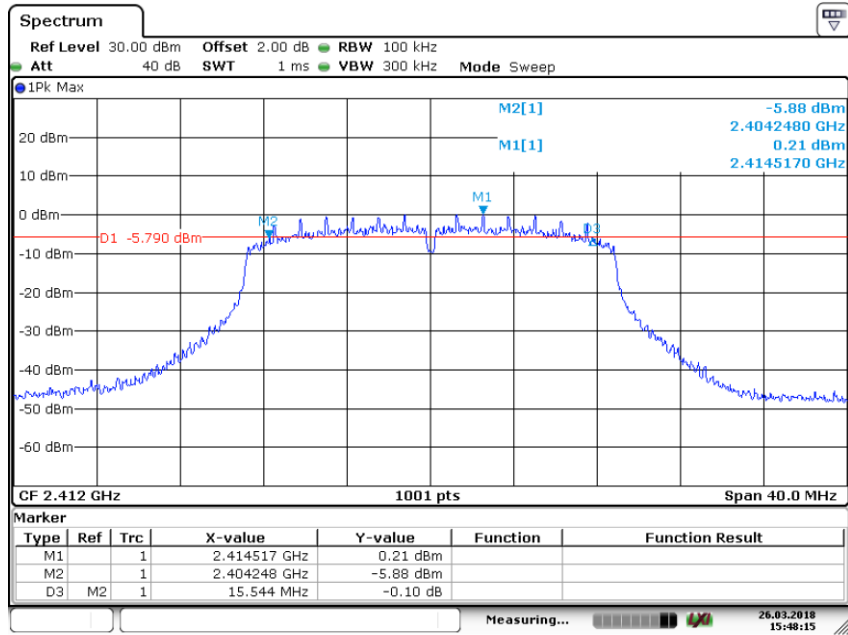


Date: 26.MAR.2018 15:48:15

Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

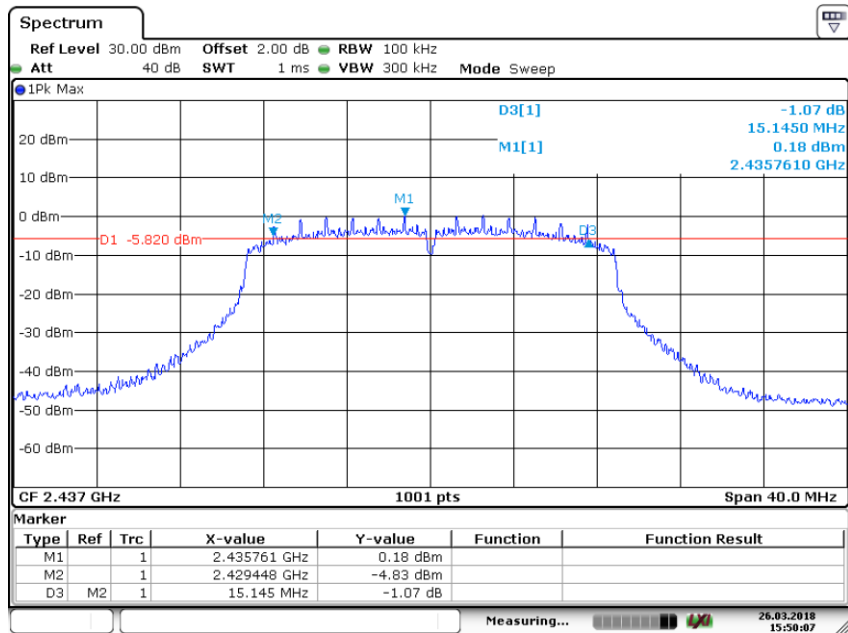


Date: 26.MAR.2018 15:50:07

Test Model DTS (6dB) Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

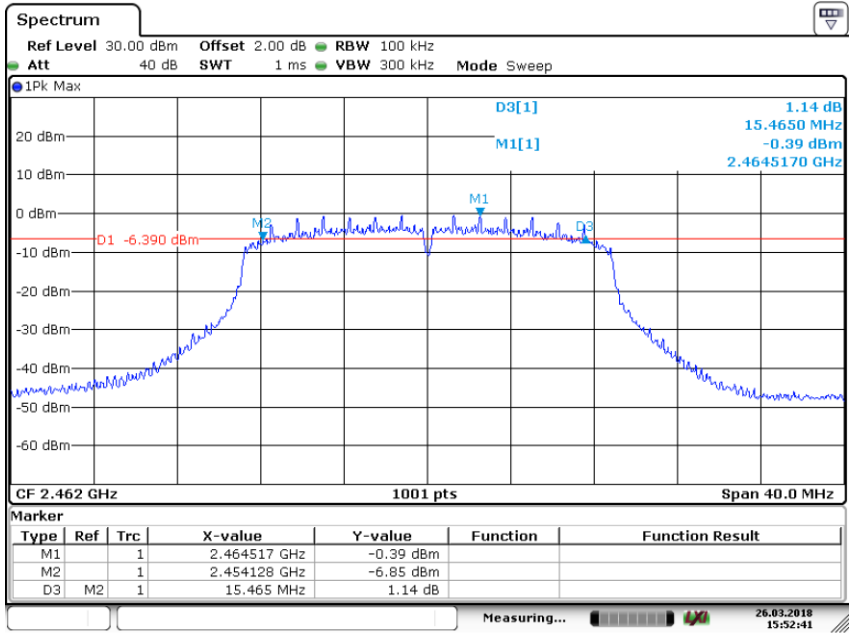

Date: 26.MAR.2018 15:52:41


Test Model DTS (6dB) Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

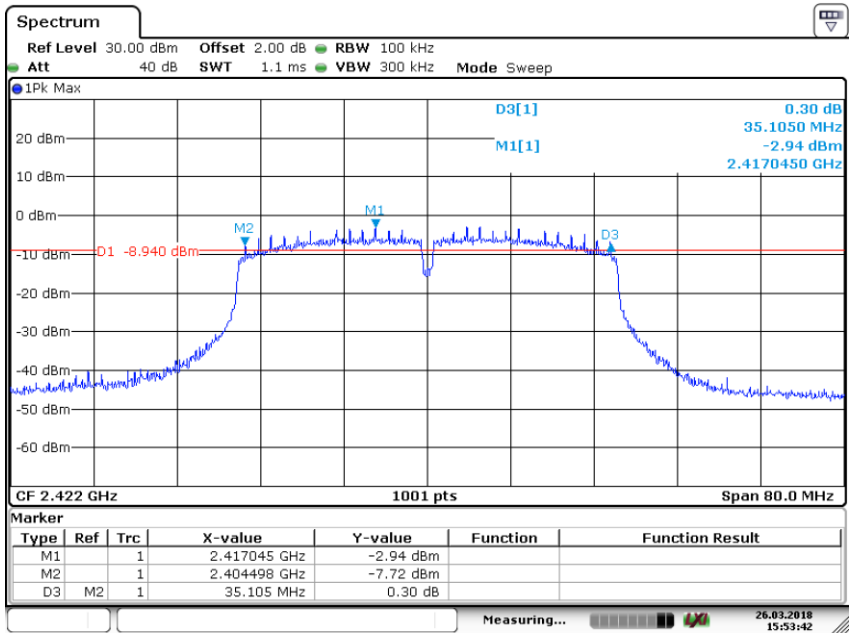

Date: 26.MAR.2018 15:53:42

Test Model


DTS (6dB) Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

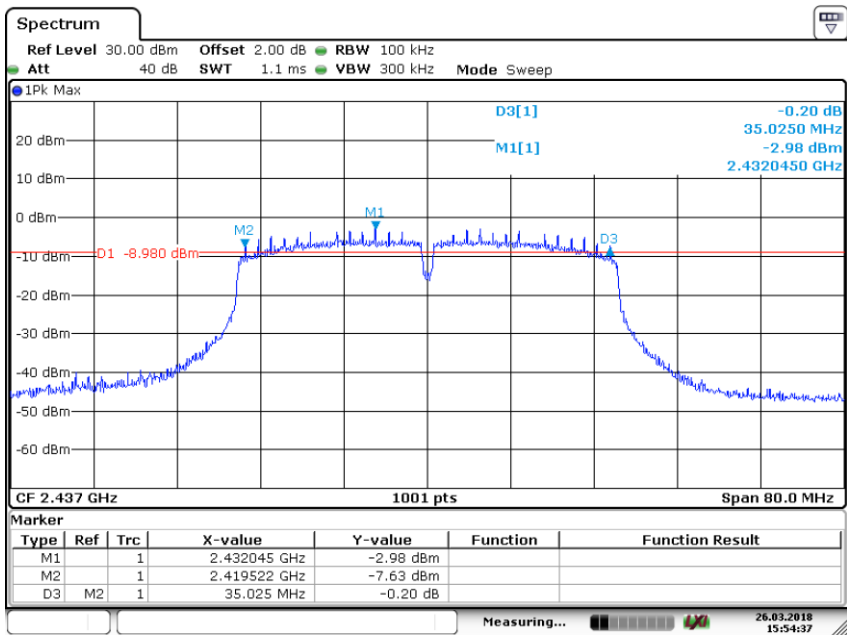

Date: 26.MAR.2018 15:54:37

Test Model

DTS (6dB) Bandwidth
802.11n (HT40)
Channel 9: 2452MHz

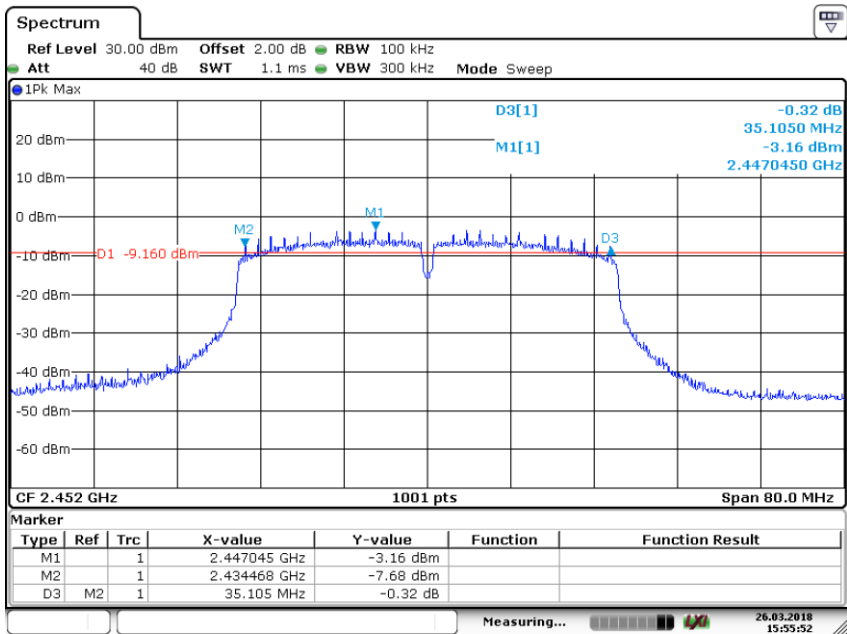

Date: 26.MAR.2018 15:55:52

8.2 99% OCCUPIED BANDWIDTH

8.2.1 Applicable Standard

According to IC RSS-Gen 6.6

8.2.2 Conformance Limit

No limit requirement.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The EUT was operating in Bluetooth transmitter mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1-5% of 99% occupied bandwidth.

Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

Set Span= approximately 2 to 3 times the 20 dB bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.


Measure and record the results in the test report.

8.2.5 Test Results

Temperature :	28°C	Test Date:	April 04, 2018
Humidity :	65 %	Test By:	King Kong


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Verdict
☒802.11b	1	2412	13.027	PASS
	6	2437	13.067	PASS
	11	2462	13.069	PASS
☒802.11g	1	2412	16.344	PASS
	6	2437	16.344	PASS
	11	2462	16.304	PASS
☒802.11n (HT20)	1	2412	17.423	PASS
	6	2437	17.423	PASS
	11	2462	17.423	PASS
☒802.11n (HT40)	3	2422	36.044	PASS
	6	2437	36.964	PASS
	9	2452	36.044	PASS

Test Model 99% Occupied Bandwidth
802.11b
Channel 1: 2412MHz

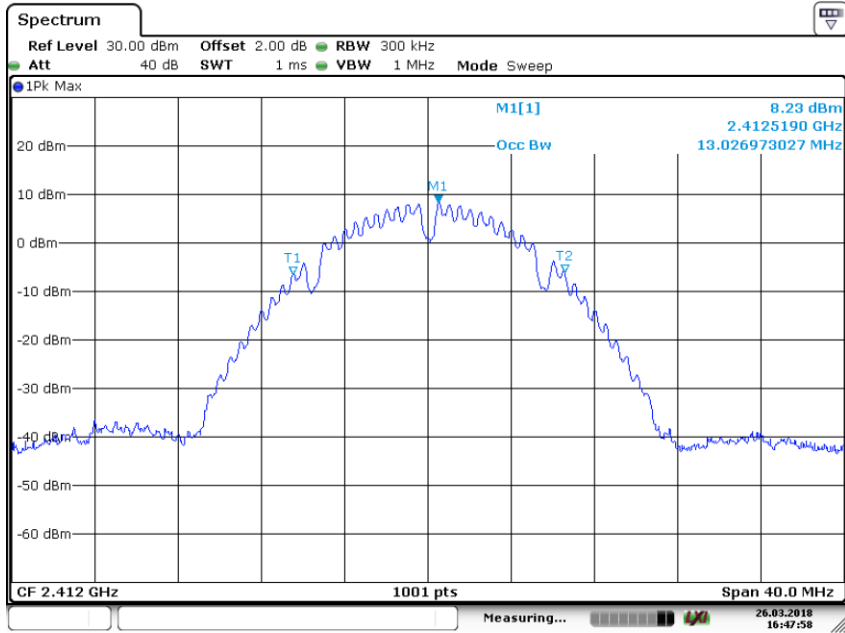


Date: 26.MAR.2018 16:47:57

Test Model 99% Occupied Bandwidth
802.11b
Channel 6: 2437MHz

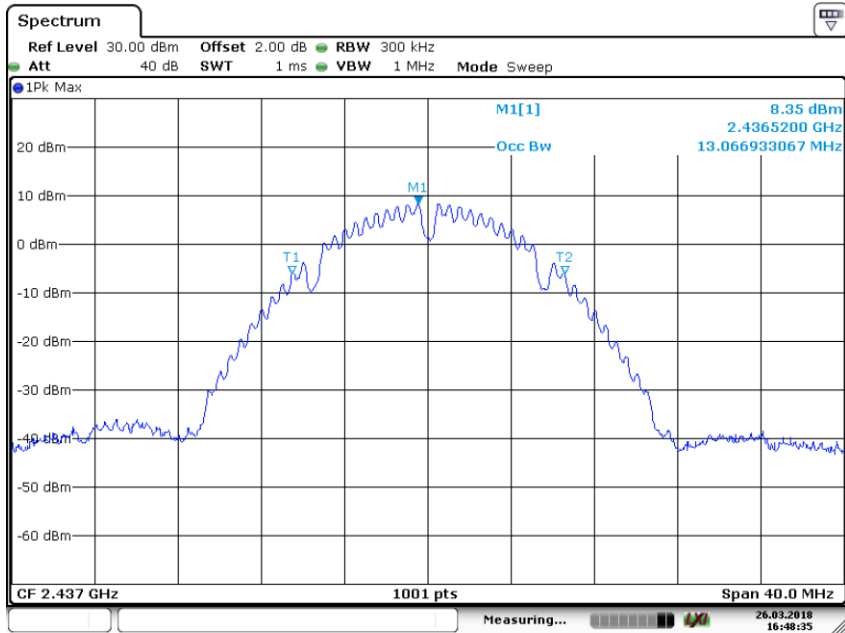


Date: 26.MAR.2018 16:48:34

Test Model 99% Occupied Bandwidth
802.11b
Channel 11: 2462MHz

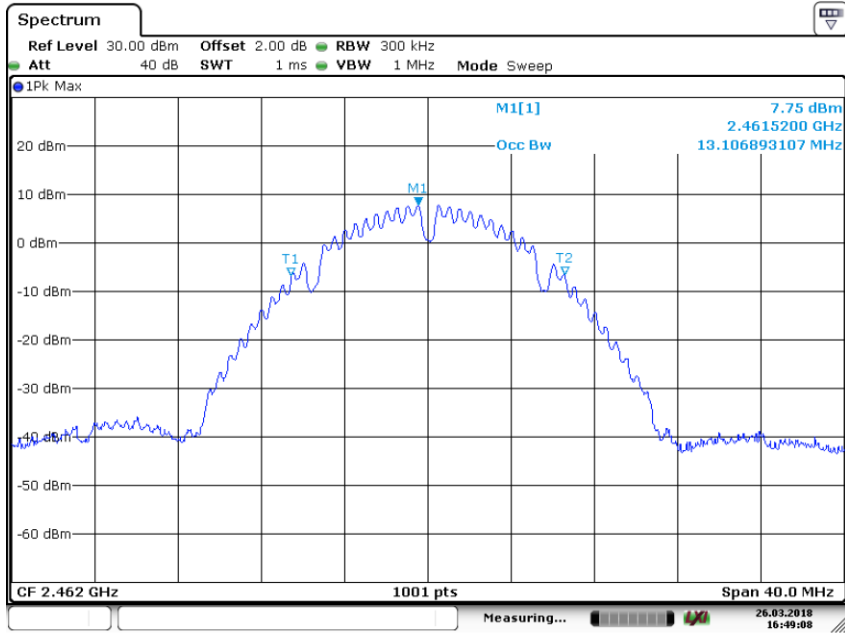


Date: 26.MAR.2018 16:49:08

Test Model 99% Occupied Bandwidth
802.11g
Channel 1: 2412MHz

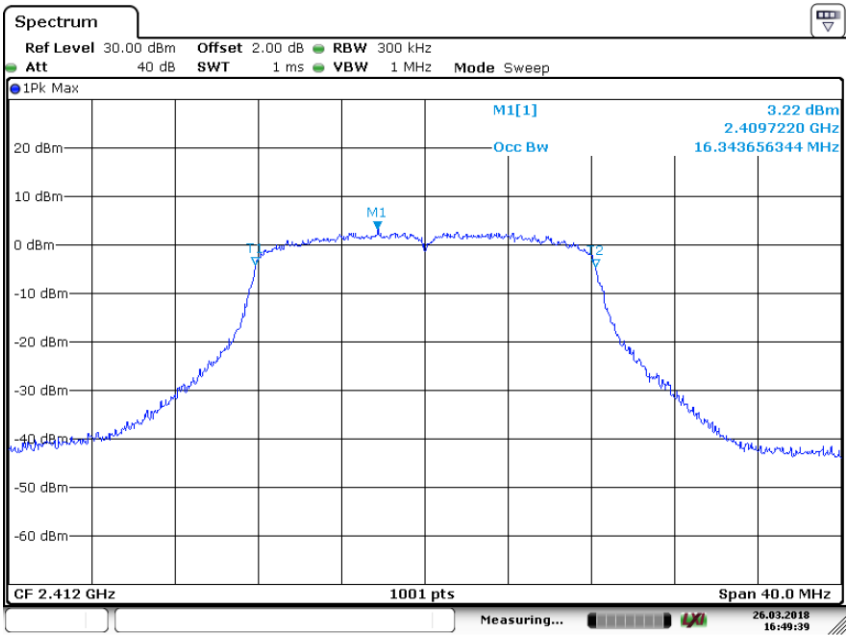

Date: 26.MAR.2018 16:49:40


Test Model 99% Occupied Bandwidth
802.11g
Channel 6: 2437MHz

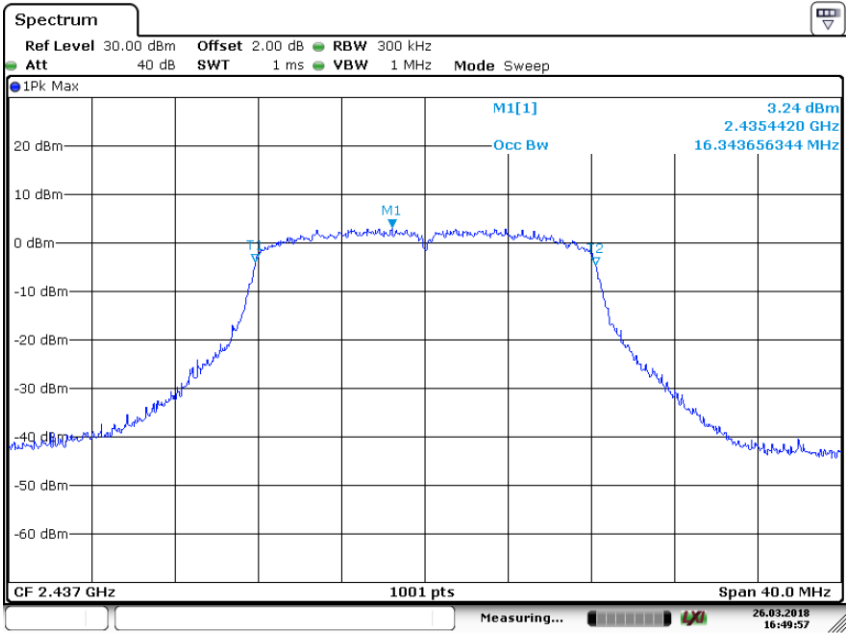

Date: 26.MAR.2018 16:49:57


Test Model

99% Occupied Bandwidth
802.11g
Channel 11: 2462MHz

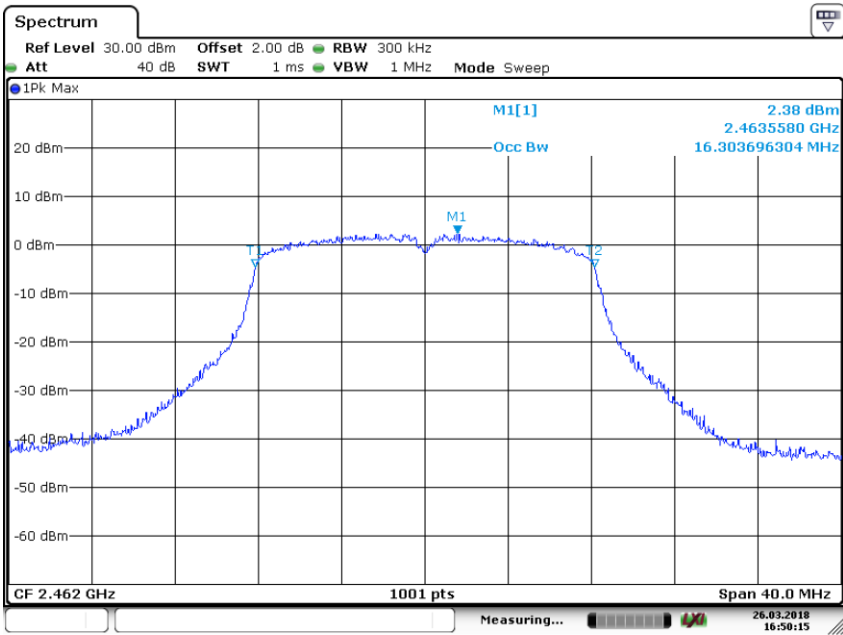


Date: 26.MAR.2018 16:50:14

Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 1: 2412MHz

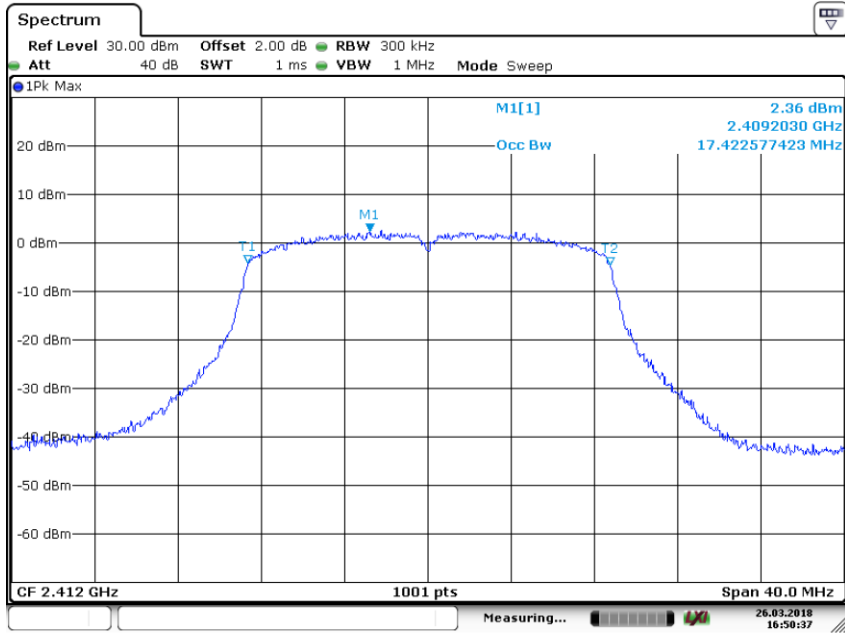


Date: 26.MAR.2018 16:50:37

Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 6: 2437MHz

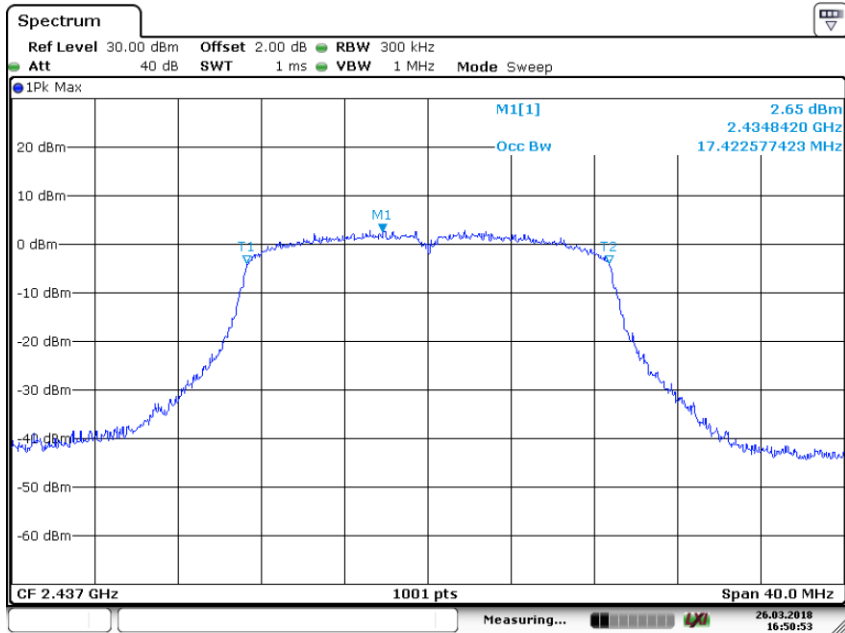


Date: 26.MAR.2018 16:50:54

Test Model 99% Occupied Bandwidth
802.11n (HT20)
Channel 11: 2462MHz

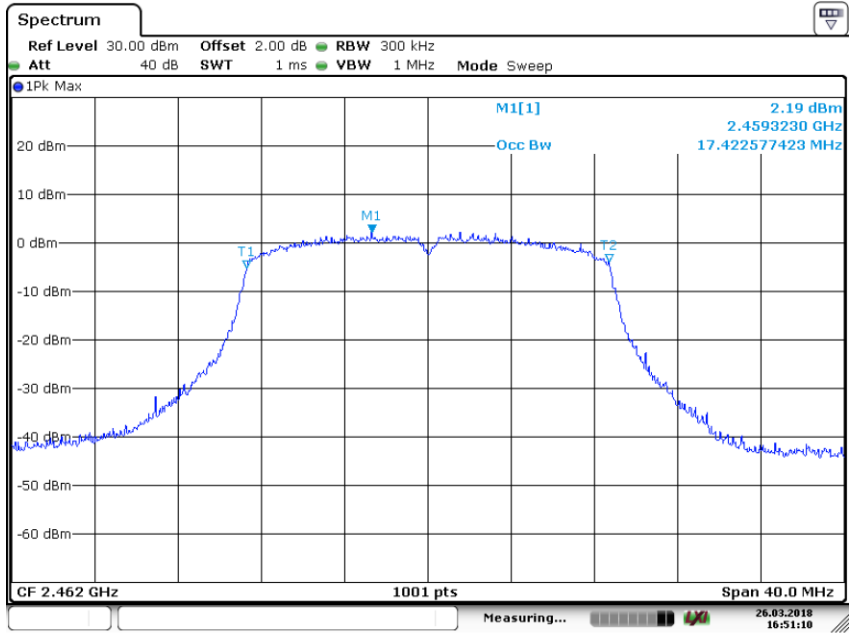


Date: 26.MAR.2018 16:51:09

Test Model 99% Occupied Bandwidth
802.11n (HT40)
Channel 3: 2422MHz

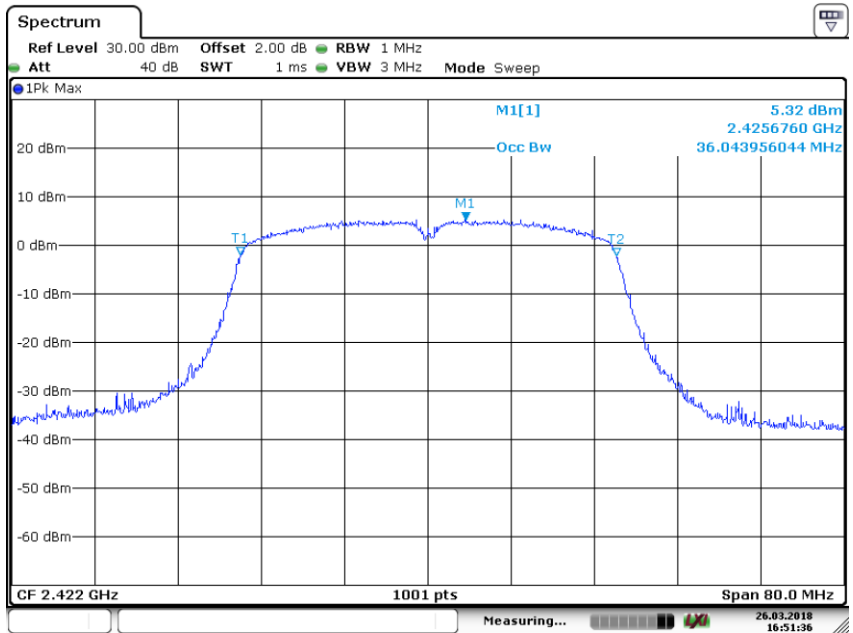


Date: 26.MAR.2018 16:51:36

Test Model 99% Occupied Bandwidth
802.11n (HT40)
Channel 6: 2437MHz

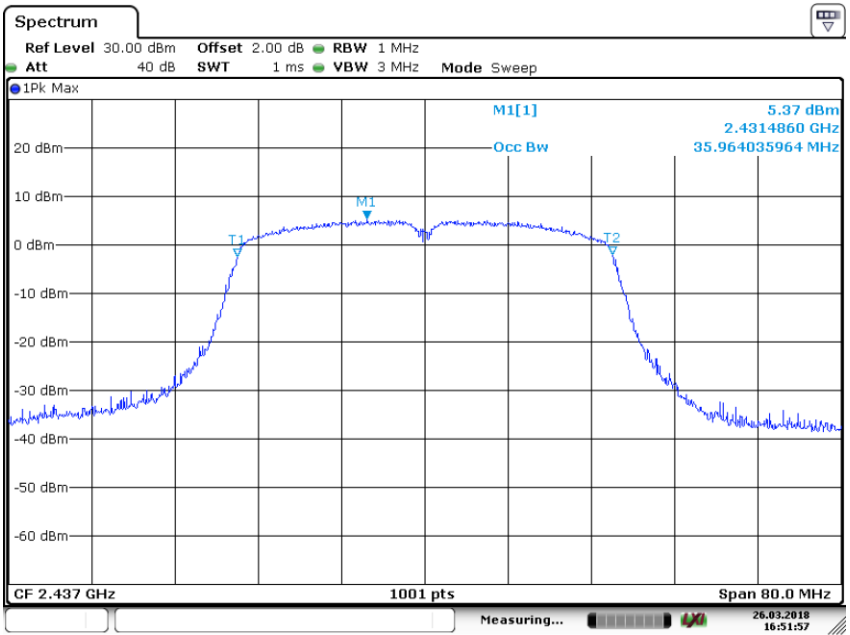

Date: 26.MAR.2018 16:51:58

Test Model 99% Occupied Bandwidth
802.11n (HT40)
Channel 9: 2452MHz

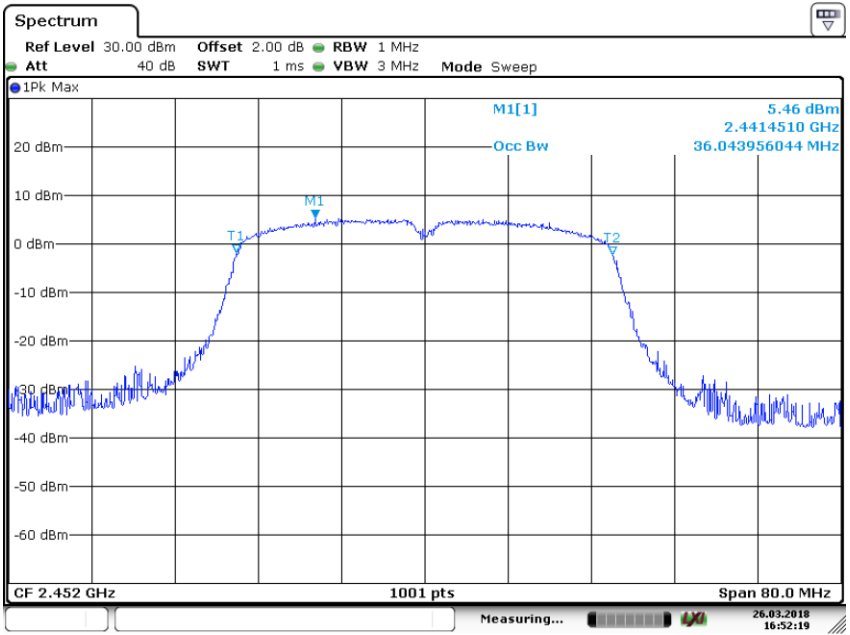

Date: 26.MAR.2018 16:52:18

8.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.3.1 Applicable Standard

According to FCC Part15.247(b)(3) and KDB558074 DTS 01 Meas. Guidance v04

According to IC RSS-Gen 6.12, IC RSS-247.5.4(d)

8.3.2 Conformance Limit

FCC:

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

IC:

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

8.3.5 Test Results

Temperature : 26°C Test Date : March 26, 2018
 Humidity : 60 % Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	EIRP (dBm)	Limit for peak conducted output power (dBm)	Limit for EIRP (dBm)	Verdict
802.11b	1	2412	17.79	21.10	30	36	PASS
	6	2437	18.02	21.33	30	36	PASS
	11	2462	17.42	20.73	30	36	PASS
802.11g	1	2412	19.09	22.40	30	36	PASS
	6	2437	19.03	22.34	30	36	PASS
	11	2462	18.44	21.75	30	36	PASS
802.11n (HT20)	1	2412	18.70	22.01	30	36	PASS
	6	2437	18.83	22.14	30	36	PASS
	11	2462	18.30	21.61	30	36	PASS
802.11n (HT40)	3	2422	18.97	22.28	30	36	PASS
	6	2437	18.94	22.25	30	36	PASS
	9	2452	18.57	21.88	30	36	PASS

Note: The antenna gain is 3.31dBi.

8.4 MAXIMUM POWER SPECTRAL DENSITY

8.4.1 Applicable Standard

According to FCC Part15.247(e) and KDB558074 DTS 01 Meas. Guidance v04
 According to IC RSS- Gen 6.12, IC RSS-247 5.2(b)

8.4.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.


Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.4.5 Test Results

Temperature :	26°C	Test Date :	March 26, 2018
Humidity :	60 %	Test By:	King Kong


Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
802.11b	1	2412	-7.43	8	PASS
	6	2437	-6.43	8	PASS
	11	2462	-7.01	8	PASS
802.11g	1	2412	-13.04	8	PASS
	6	2437	-13.11	8	PASS
	11	2462	-13.53	8	PASS
802.11n (HT20)	1	2412	-13.63	8	PASS
	6	2437	-14.18	8	PASS
	11	2462	-14.25	8	PASS
802.11n (HT40)	3	2422	-17.48	8	PASS
	6	2437	-17.24	8	PASS
	9	2452	-18.08	8	PASS

Test Model Power Spectral Density
802.11b
Channel 1: 2412MHz

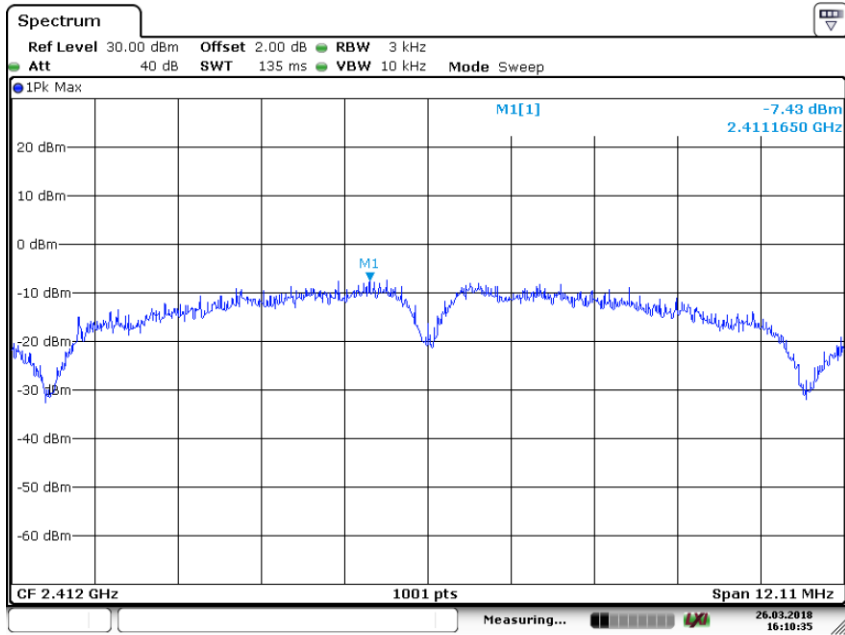


Date: 26.MAR.2018 16:10:35

Test Model Power Spectral Density
802.11b
Channel 6: 2437MHz

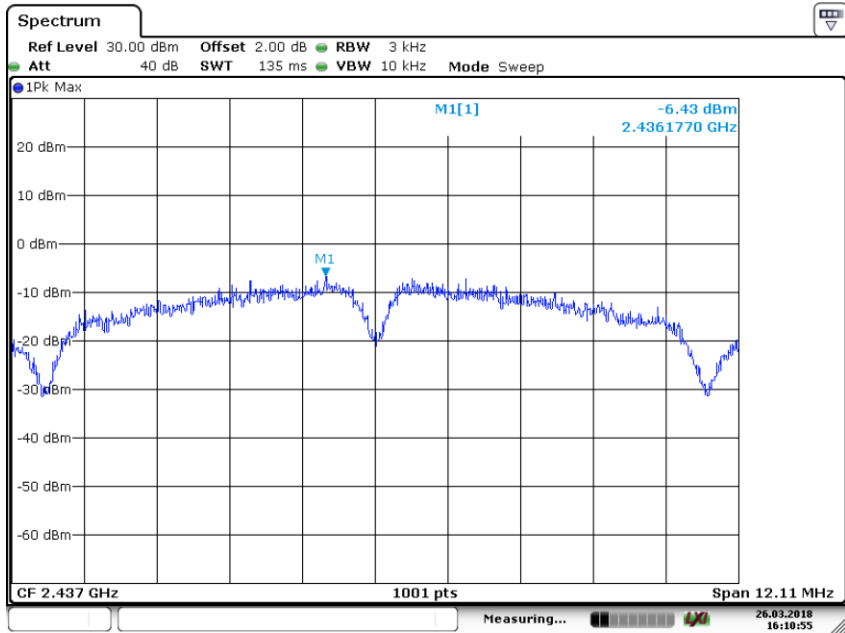


Date: 26.MAR.2018 16:10:56

Test Model Power Spectral Density
802.11b
Channel 11: 2462MHz

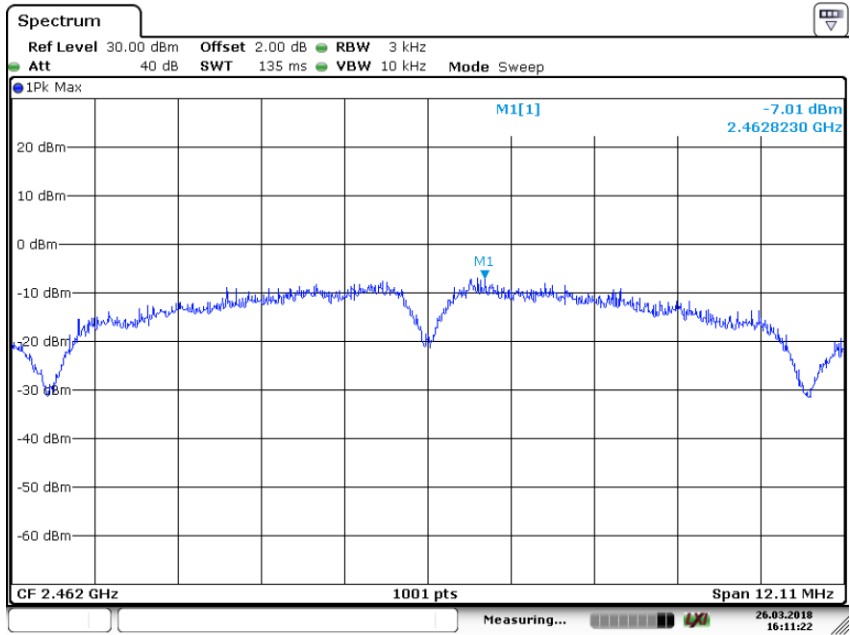


Date: 26.MAR.2018 16:11:22

Test Model Power Spectral Density
802.11g
Channel 1: 2412MHz

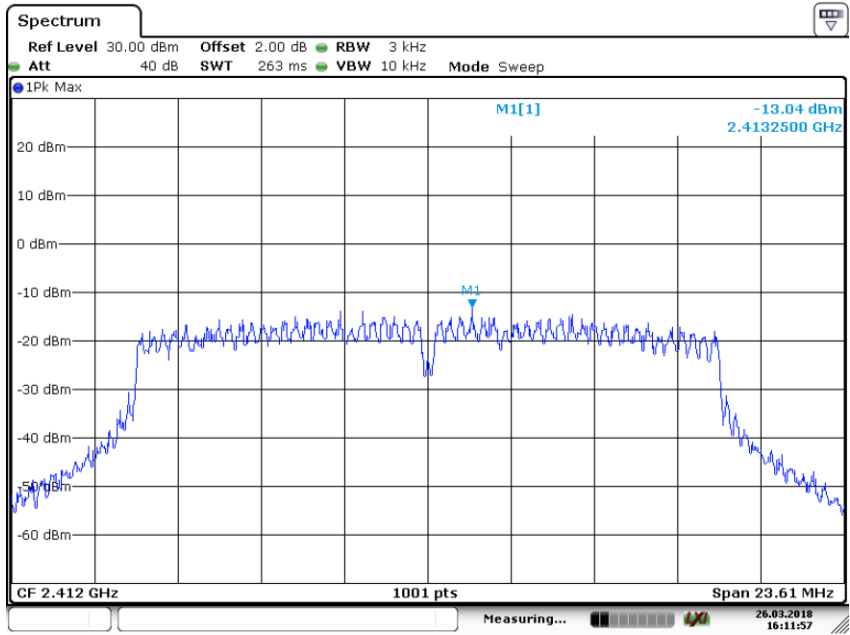


Date: 26.MAR.2018 16:11:57

Test Model Power Spectral Density
802.11g
Channel 6: 2437MHz

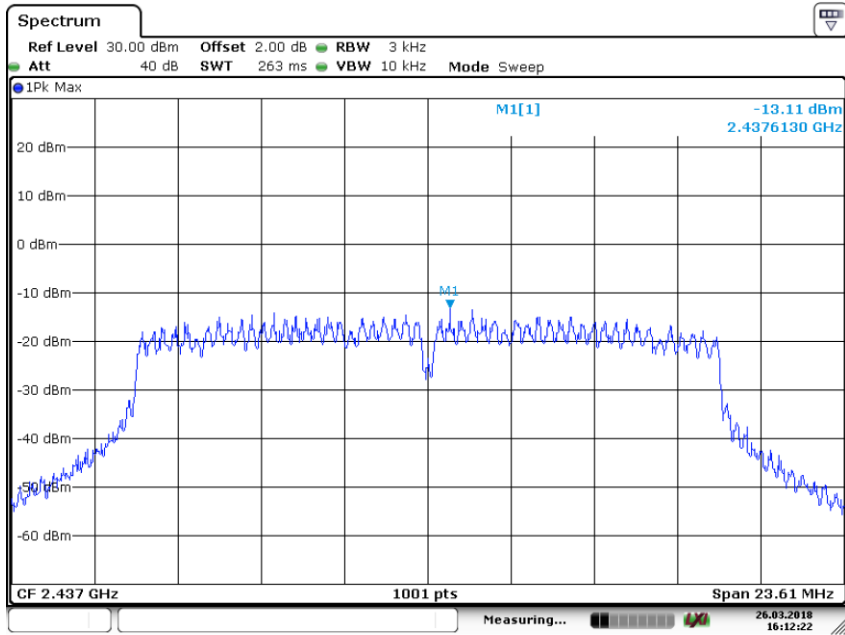


Date: 26.MAR.2018 16:12:22

Test Model Power Spectral Density
802.11g
Channel 11: 2462MHz

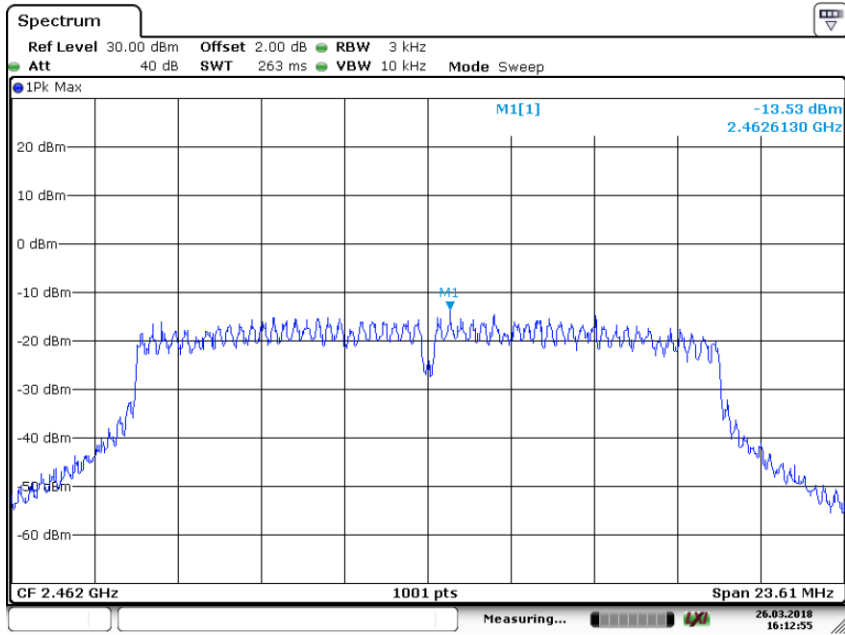


Date: 26.MAR.2018 16:12:55

Test Model Power Spectral Density
802.11n (HT20)
Channel 1: 2412MHz

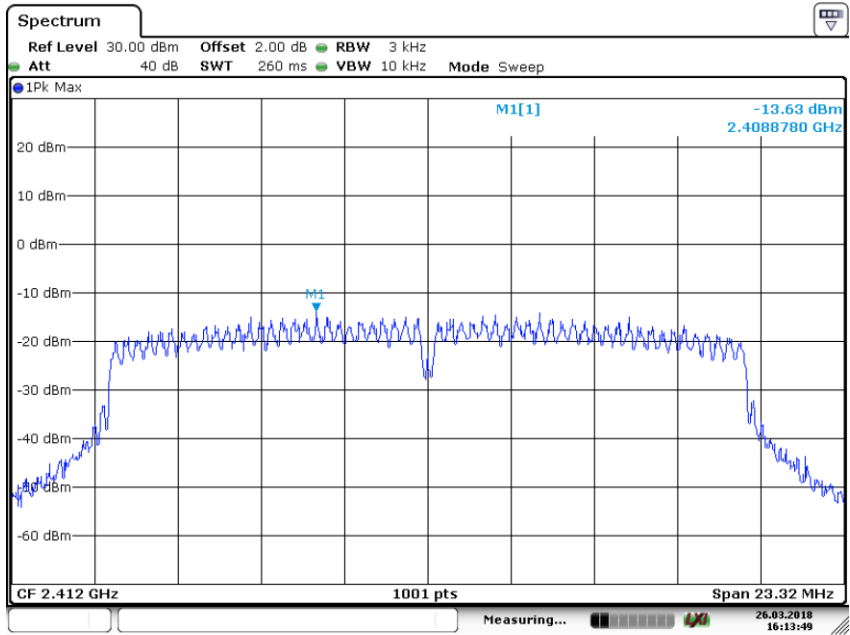


Date: 26.MAR.2018 16:13:48

Test Model Power Spectral Density
802.11n (HT20)
Channel 6: 2437MHz

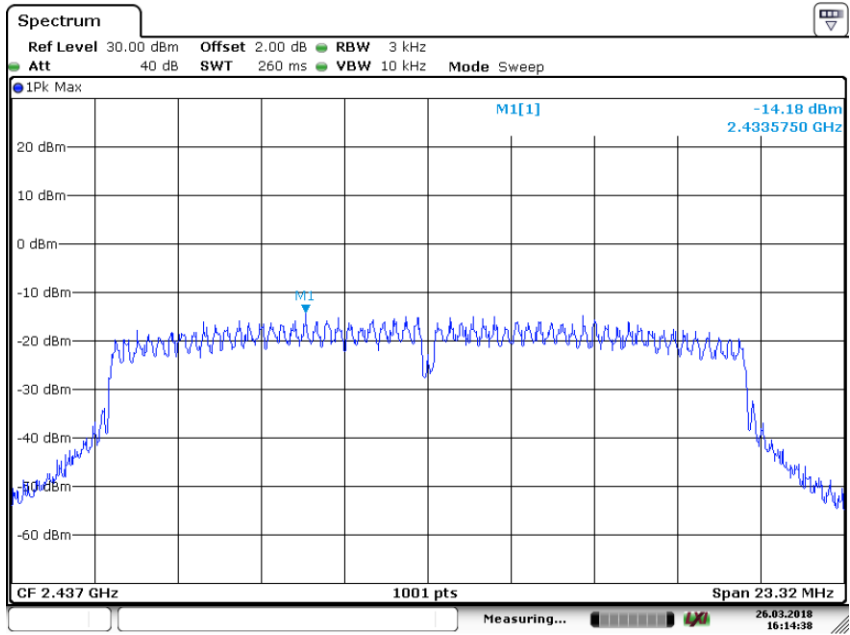


Date: 26.MAR.2018 16:14:38

Test Model Power Spectral Density
802.11n (HT20)
Channel 11: 2462MHz

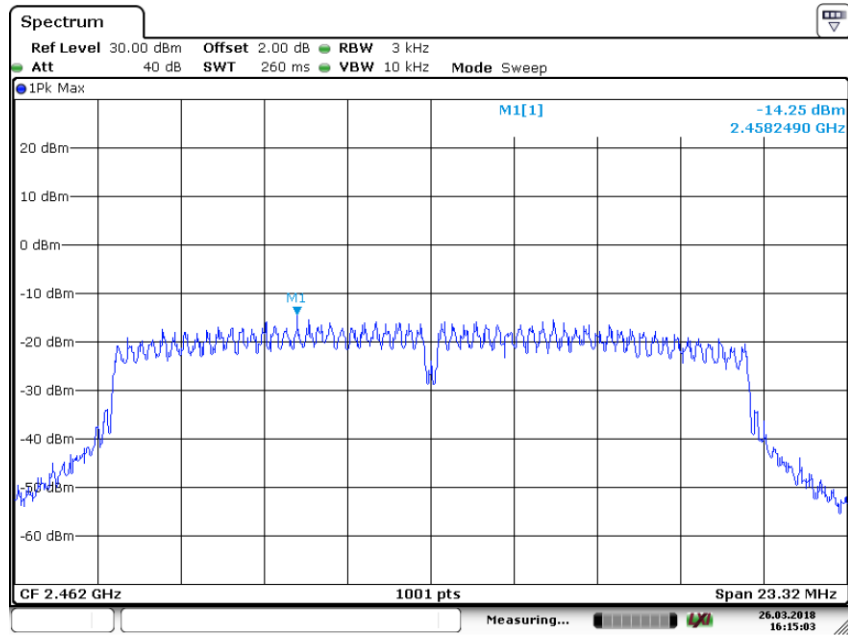

Date: 26.MAR.2018 16:15:03


Test Model Power Spectral Density
802.11n (HT40)
Channel 3: 2422MHz

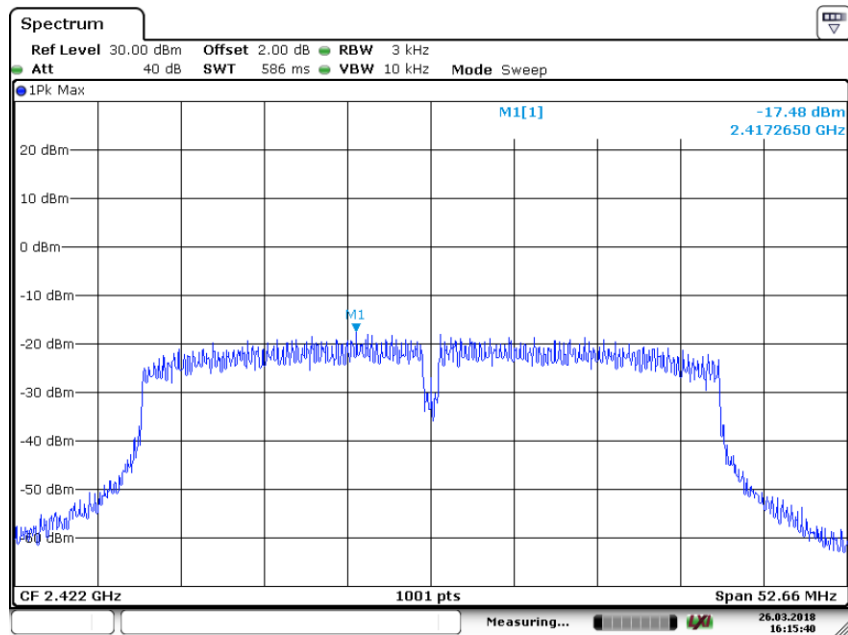

Date: 26.MAR.2018 16:15:40

Test Model


Power Spectral Density
802.11n (HT40)
Channel 6: 2437MHz

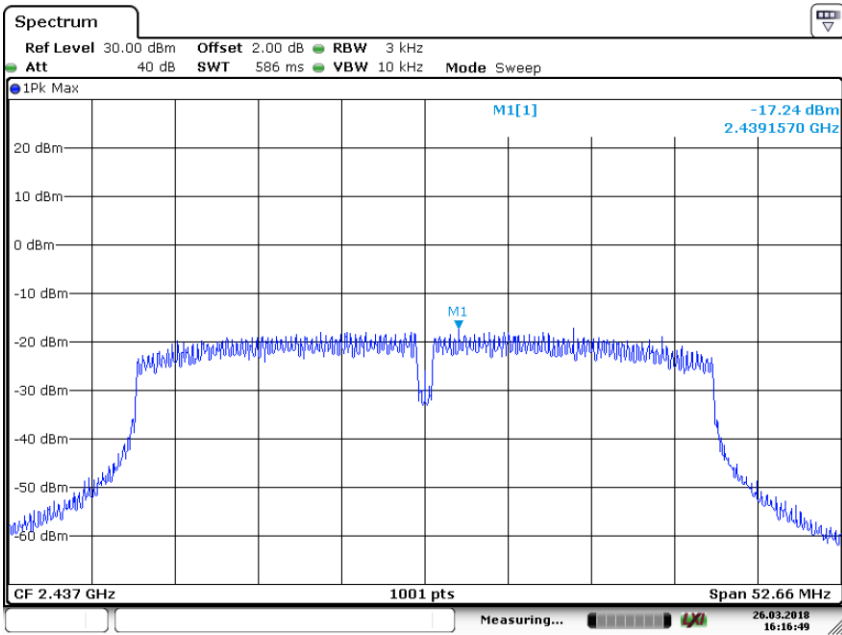

Date: 26.MAR.2018 16:16:50

Test Model

Power Spectral Density
802.11n (HT40)
Channel 9: 2452MHz

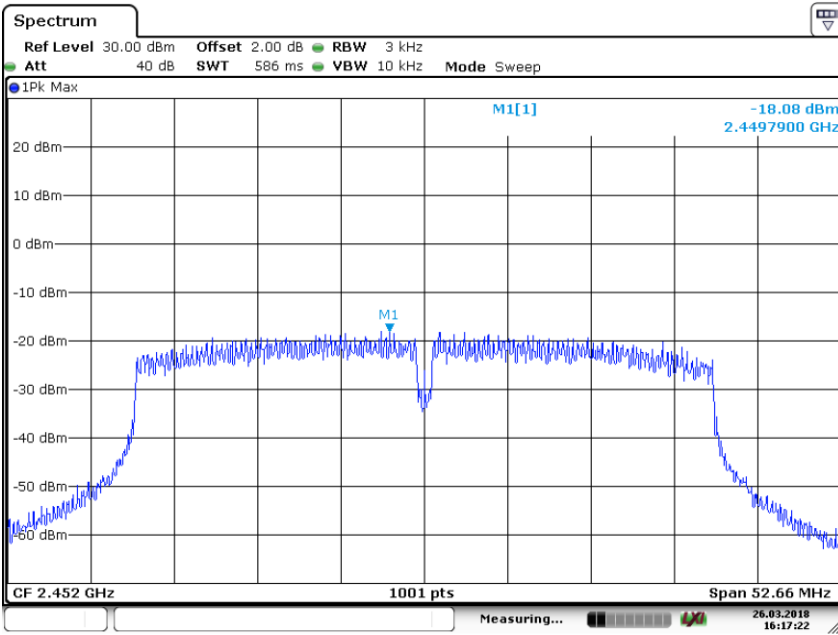

Date: 26.MAR.2018 16:17:21

8.5 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and KDB558074 DTS 01 Meas. Guidance v04
According to IC RSS- Gen 6.13, IC RSS-247 5.5

8.5.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.5.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.


8.5.5 Test Results

All modes 2.4G 802.11b/g/n(HT20)/n(HT40) have been tested, and the worst result recorded was report as below:

PSD(Power Spectral Density) RBW=100kHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 1: 2412MHz Channel 3: 2422MHz

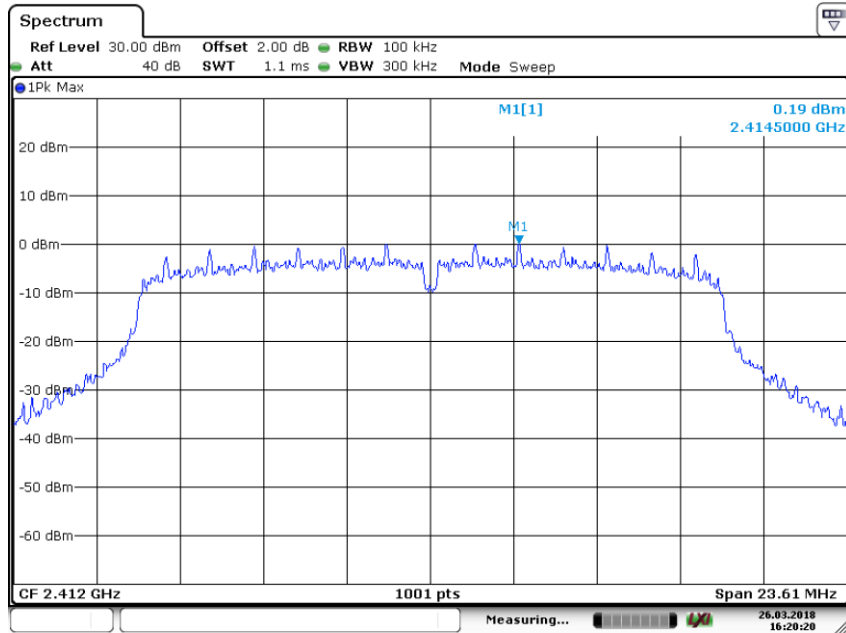


Date: 26.MAR.2018 16:20:20

Unwanted Emissions in non-restricted frequency bands


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 1: 2412MHz Channel 3: 2422MHz

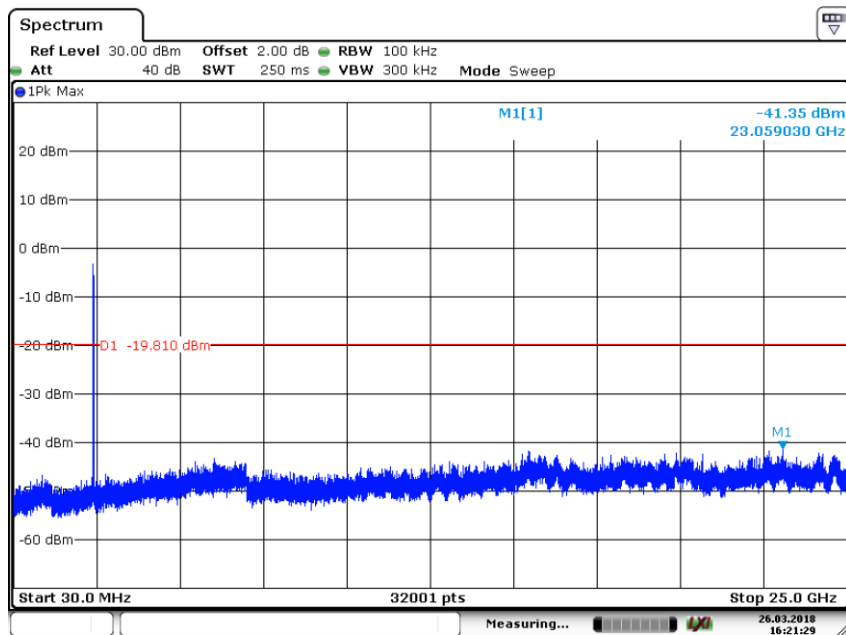


Date: 26.MAR.2018 16:21:30

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 1: 2412MHz Channel 3: 2422MHz

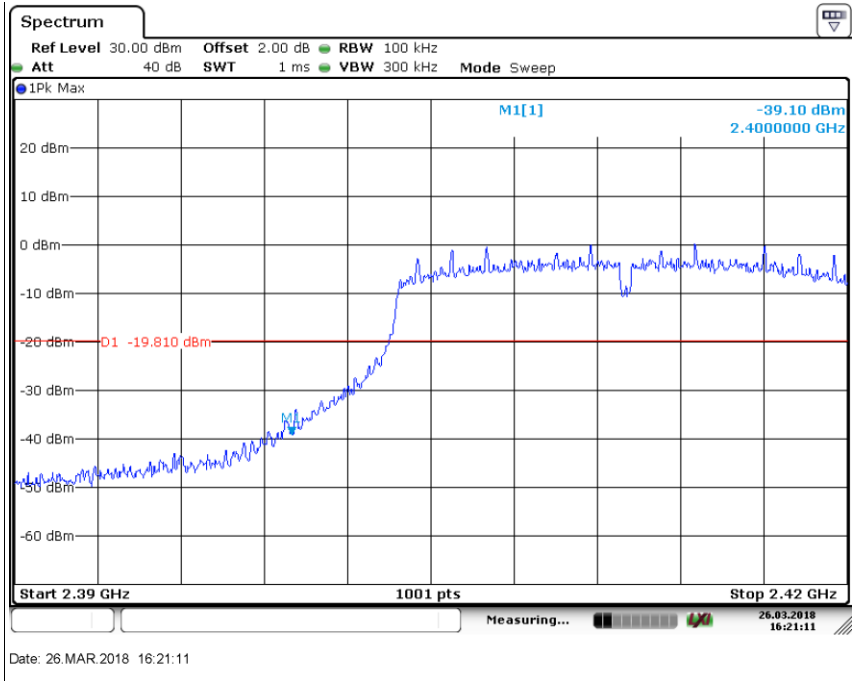


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 PSD(Power Spectral Density) RBW=100kHz
 Channel 6: 2437MHz

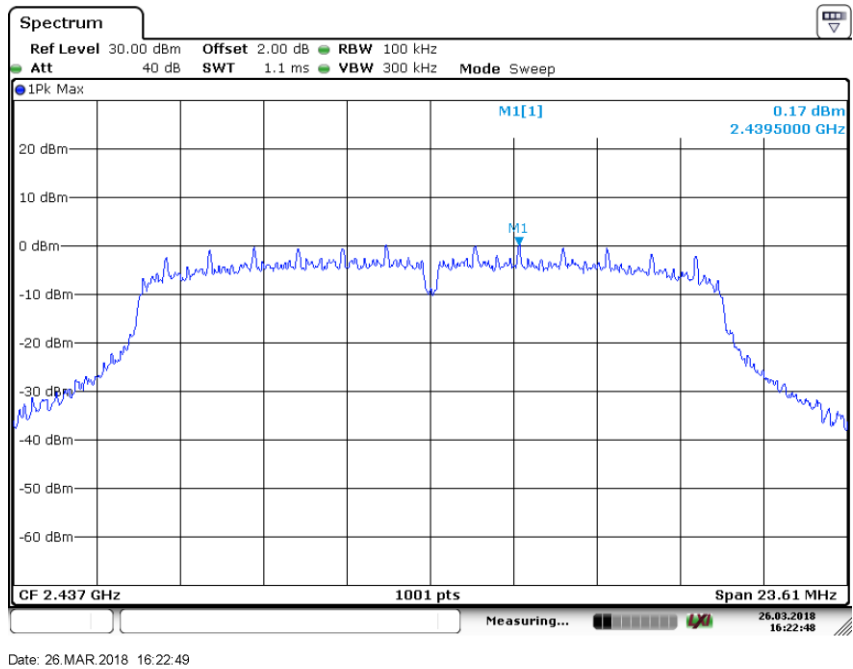

Unwanted Emissions In Non-Restricted Frequency Bands

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)

Channel 6: 2437MHz

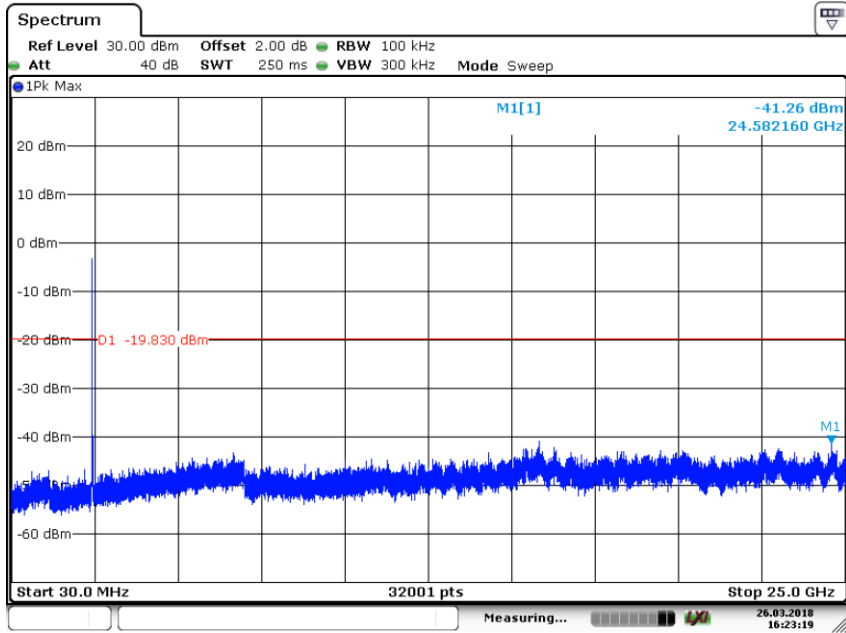


Date: 26.MAR.2018 16:23:18

PSD(Power Spectral Density) RBW=100kHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)


Channel 11: 2462MHz Channel 9: 2452MHz

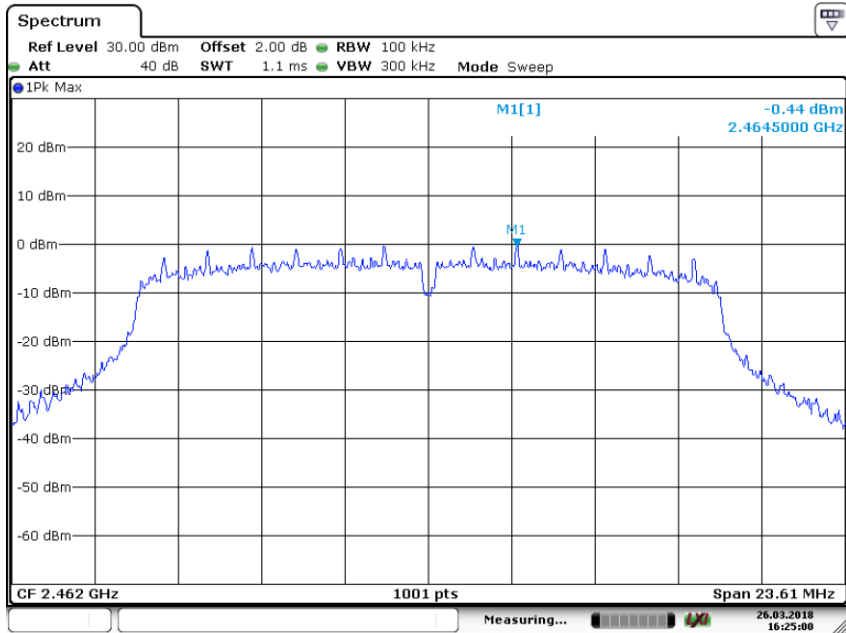

Date: 26.MAR.2018 16:25:00

Unwanted Emissions In Non-Restricted Frequency Bands


Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

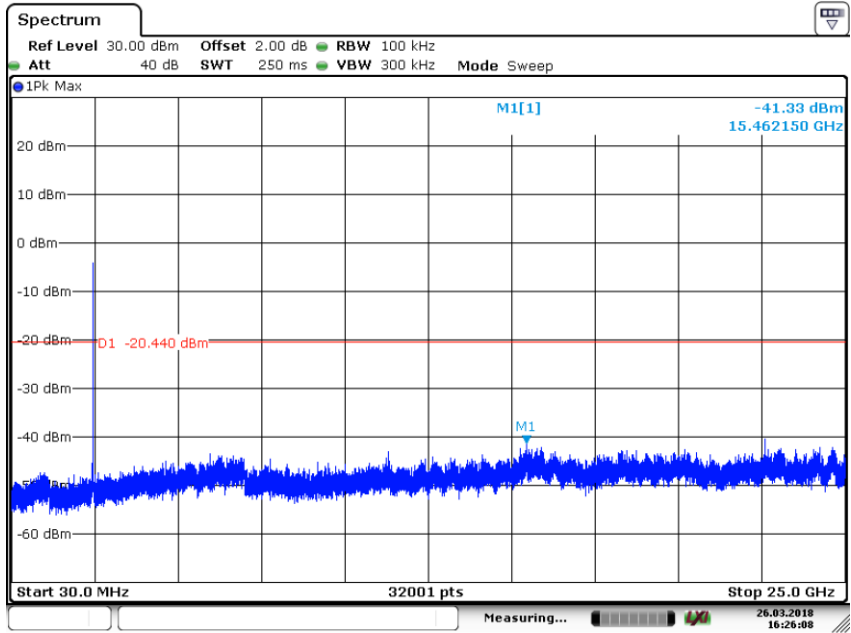

Date: 26.MAR.2018 16:26:08

Band edge

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz

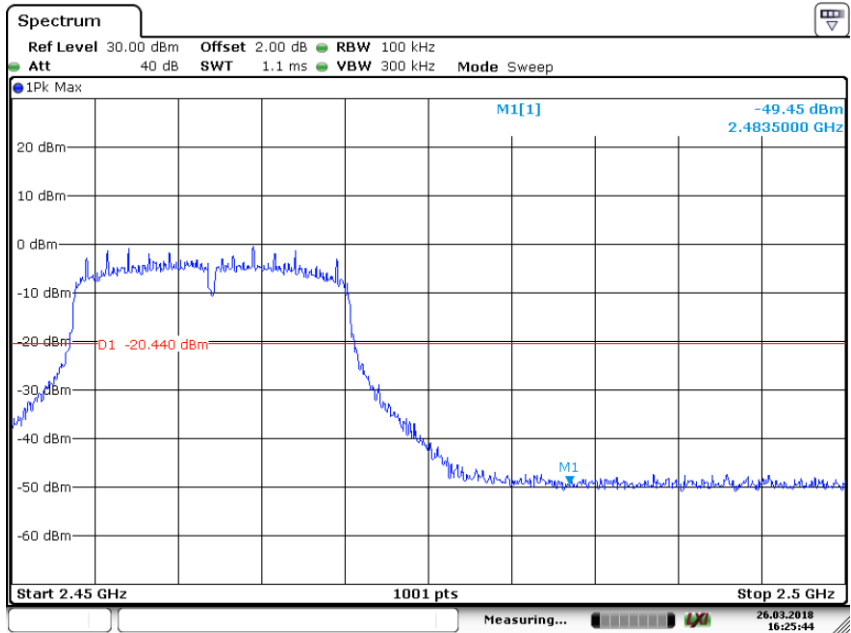

Date: 26.MAR.2018 16:25:44

8.6 RADIATED SPURIOUS EMISSION

8.6.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB558074 DTS 01 Meas. Guidance v04

8.6.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	300
0.490-1.705	2400/F(KHz)	20 log ($\mu\text{V}/\text{m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.6.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.6.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz (1GHz to 25GHz), 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW \geq RBW

Sweep = auto

Detector function = peak


Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the

■ Spurious Emission Above 1GHz(1GHz to 25GHz)


All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b&11n20 recorded was report as below:

Temperature : 26°C Test Date : April 19, 2018
 Humidity : 60 % Test By: King Kong
 Test mode: 802.11b&11n20 Frequency: Channel 1: 2412MHz

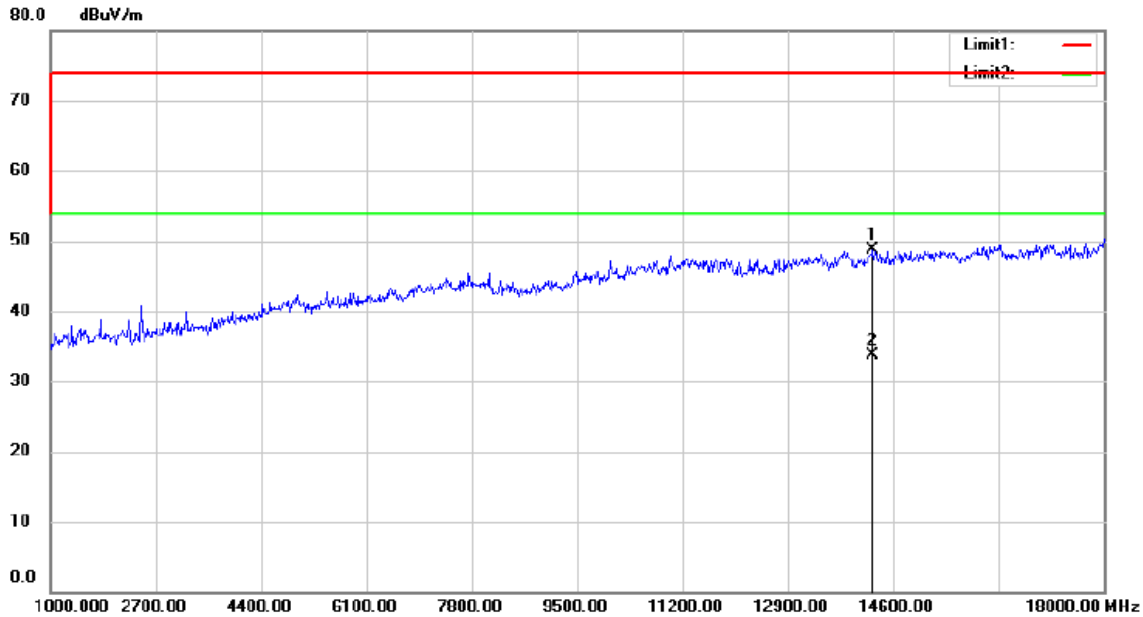

Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpiont
 M/N: VC200
 Mode:11b 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		14277.00	54.49	-5.73	48.76	74.00	-25.24	peak	0
2	*	14277.00	39.35	-5.73	33.62	54.00	-20.38	AVG	0

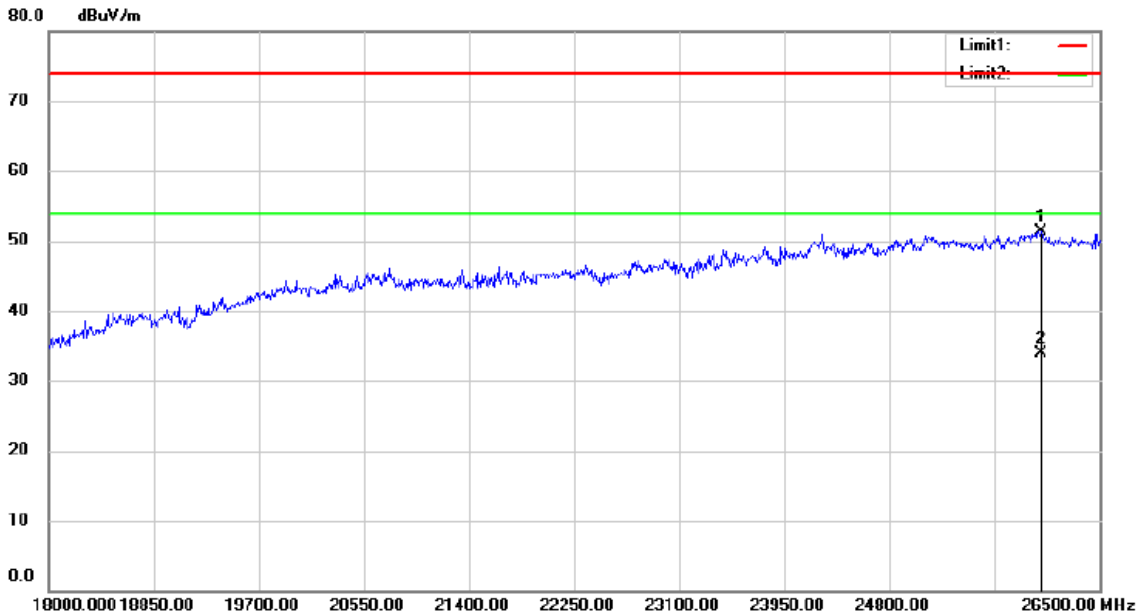


Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:11n(20MHz) 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		26024.00	87.16	-35.76	51.40	74.00	-22.60	peak	0	
2	*	26024.00	69.66	-35.76	33.90	54.00	-20.10	AVG	0	


Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11b&11n20

Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 6: 2437MHz

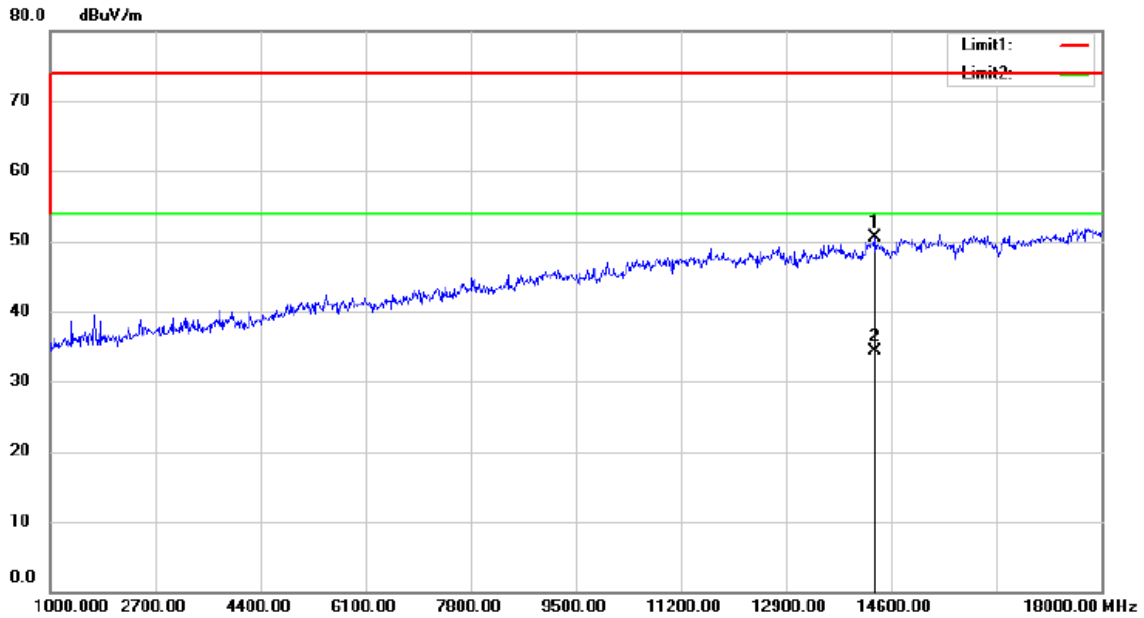

Site 3m Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: 11b 2437
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14328.00	56.25	-5.81	50.44	74.00	-23.56	peak	0	
2	*	14328.00	40.04	-5.81	34.23	54.00	-19.77	AVG	0	

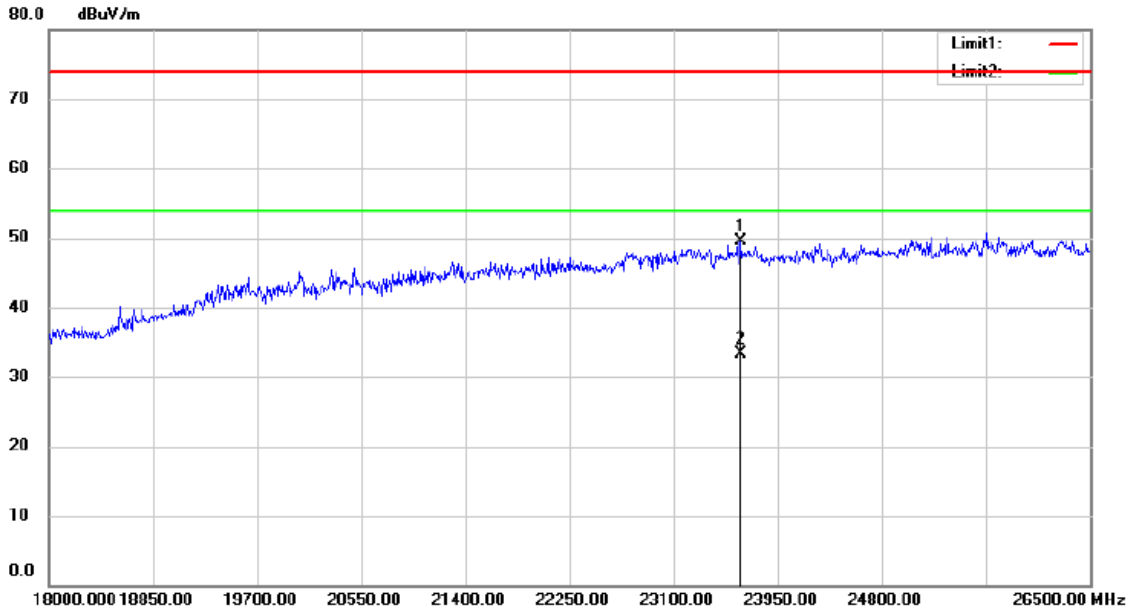

Site 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: 11n(20MHz) 2437
 Note:

Polarization: *Horizontal*
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		23652.50	87.07	-37.49	49.58	74.00	-24.42	peak	0	
2	*	23652.50	70.89	-37.49	33.40	54.00	-20.60	AVG	0	

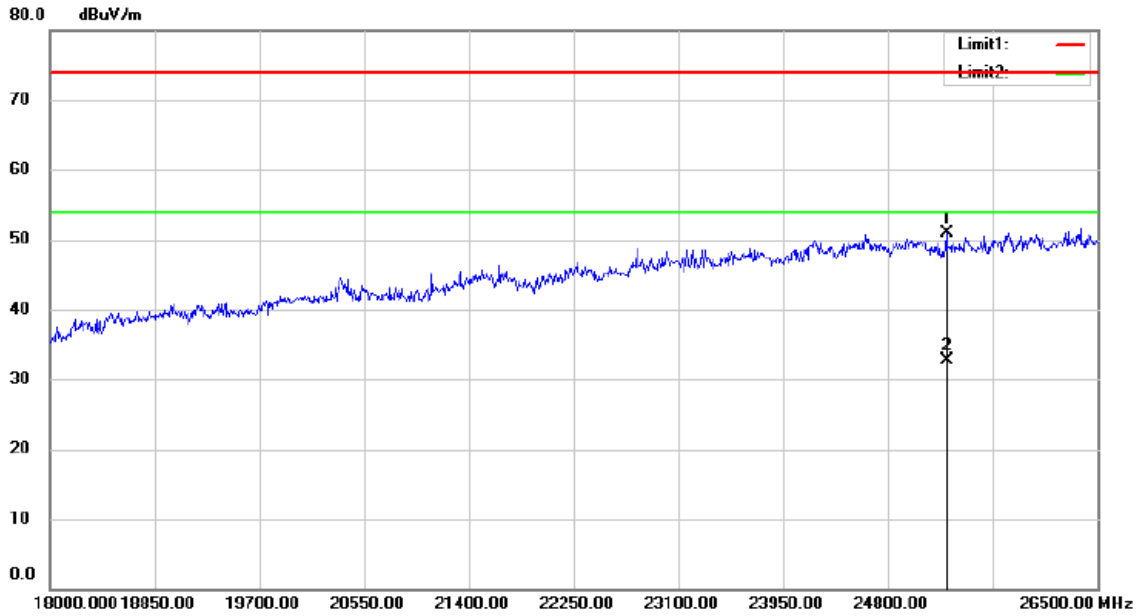


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:11n(20MHz) 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		25276.00	87.58	-36.67	50.91	74.00	-23.09	peak	0	
2	*	25276.00	69.37	-36.67	32.70	54.00	-21.30	AVG	0	

Temperature : 26°C
 Humidity : 60 %
 Test mode: 802.11b&11n20


Test Date : April 19, 2018
 Test By: King Kong
 Frequency: Channel 11: 2462MHz

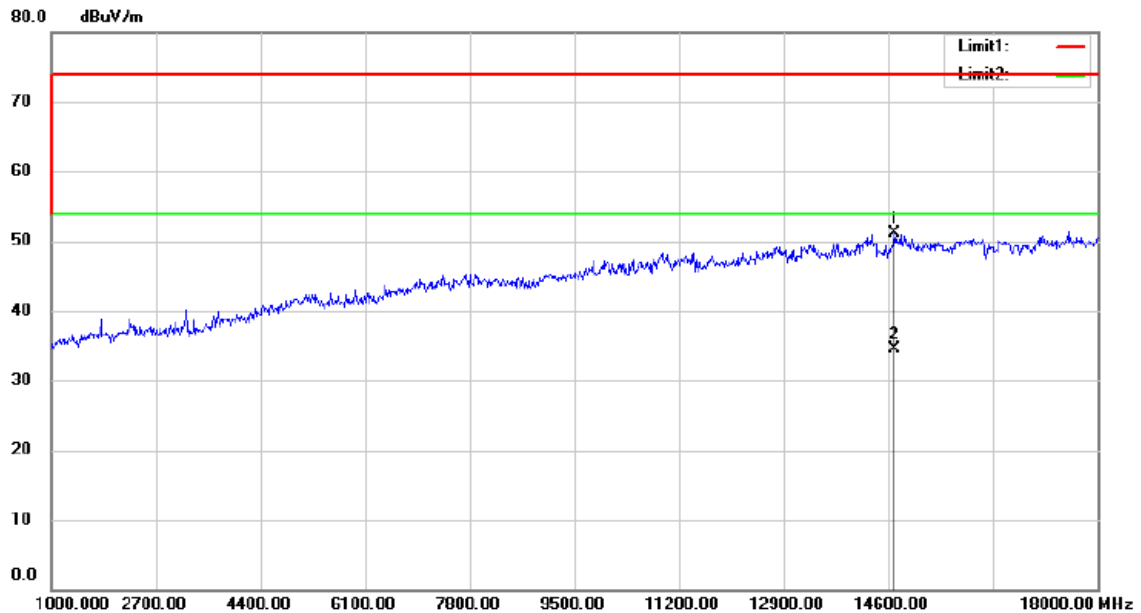

Site 3m Chamber #3
 Limit: (RE)FCC PART 15 C
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:11b 2462
 Note:

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		14702.00	57.59	-6.39	51.20	74.00	-22.80	peak	0	
2	*	14702.00	40.91	-6.39	34.52	54.00	-19.48	AVG	0	

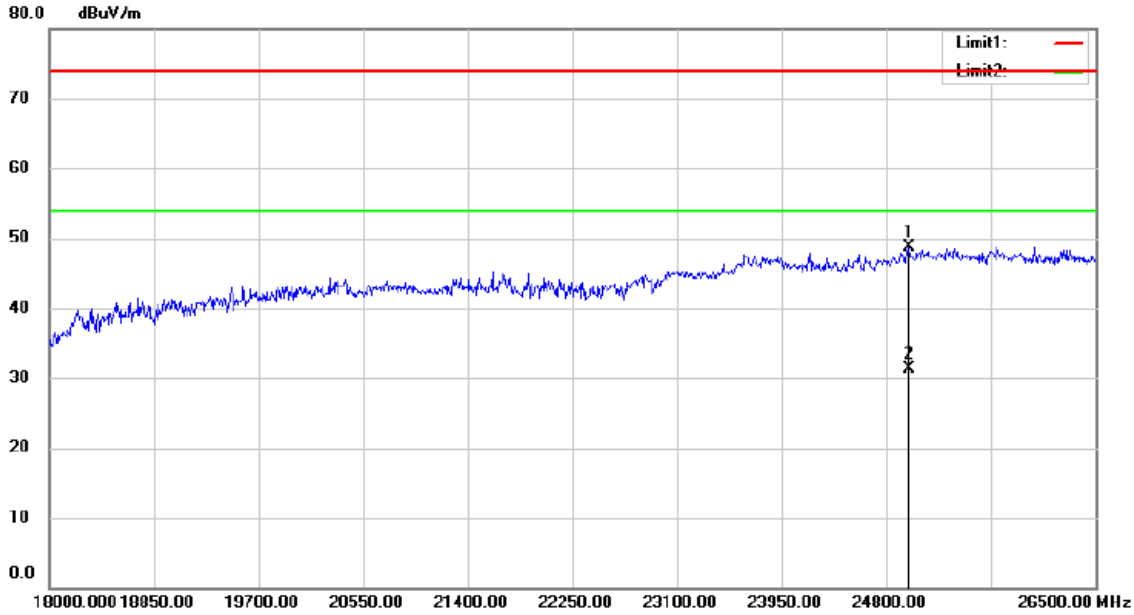

Site 3m Chamber #3 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:11n(20MHz) 2462
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		24987.00	85.79	-37.01	48.78	74.00	-25.22	peak		0	
2	*	24987.00	68.31	-37.01	31.30	54.00	-22.70	AVG		0	

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 1: 2412MHz Channel 3: 2422MHz Polarity: H
 VBW=3MHz Test By: King Kong

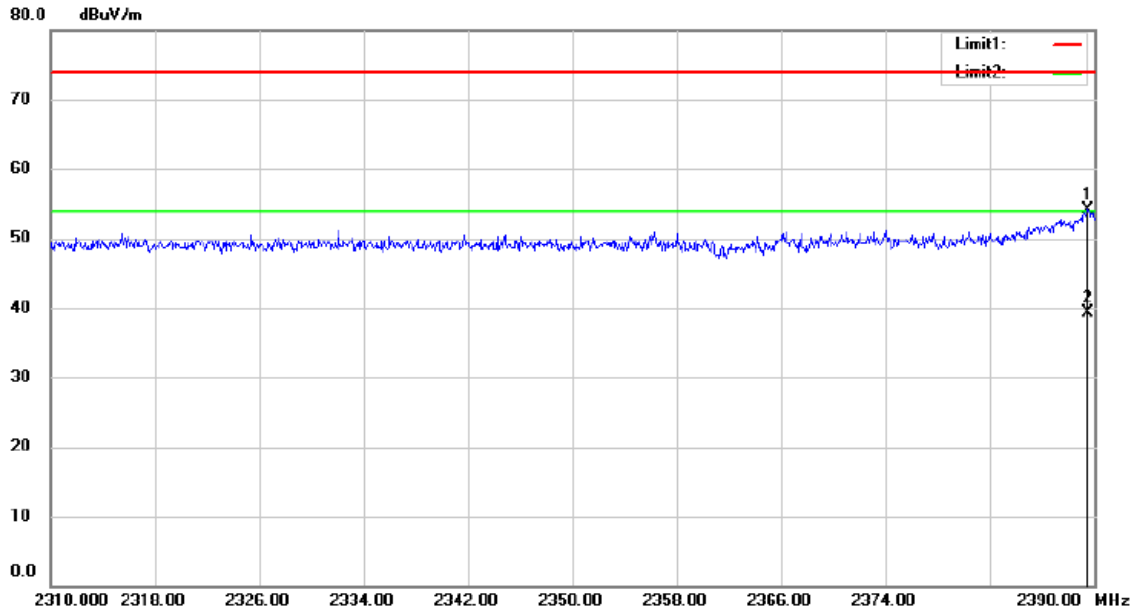


Site RE 3M Chamber #3 Polarization: **Horizontal** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: WIFI2.4G b20(2412)
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2389.520	23.55	30.65	54.20	74.00	-19.80	peak			
2	*	2389.520	8.60	30.65	39.25	54.00	-14.75	AVG			

Spurious Emission in Restricted Band 2310-2390MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
Channel 1: 2412MHz Channel 3: 2422MHz Polarity:V
 VBW=3MHz Test By: King Kong

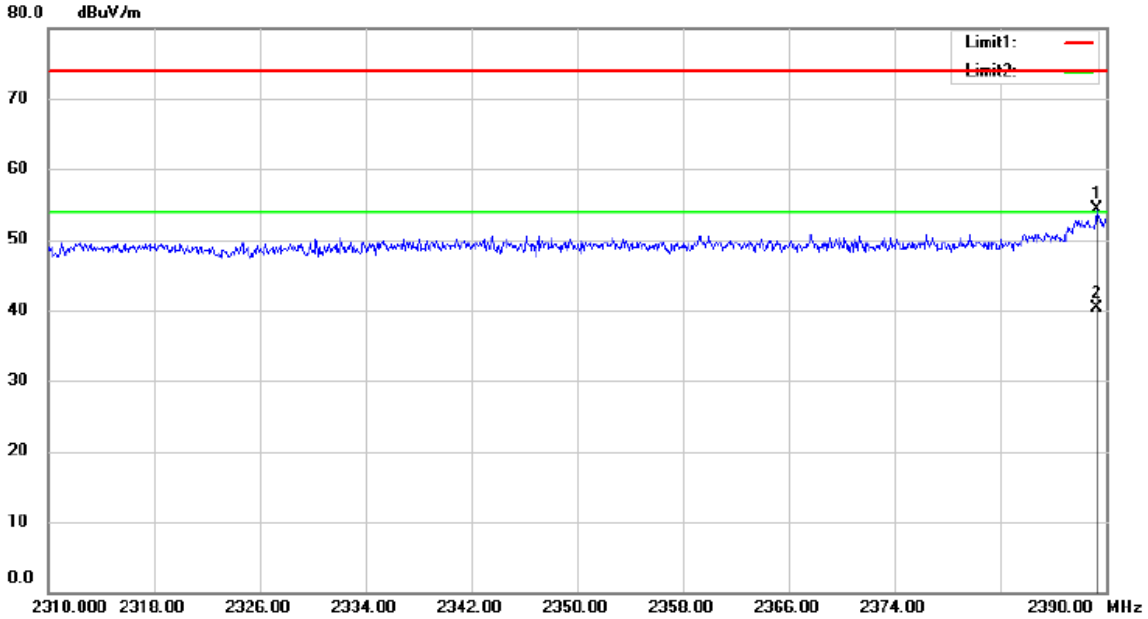


Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G b20(2412)
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure-ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	2389.280	23.59	30.65	54.24	74.00	-19.76	peak			
2 *	2389.280	9.73	30.65	40.38	54.00	-13.62	AVG			

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: H
 VBW=3MHz Test By: King Kong

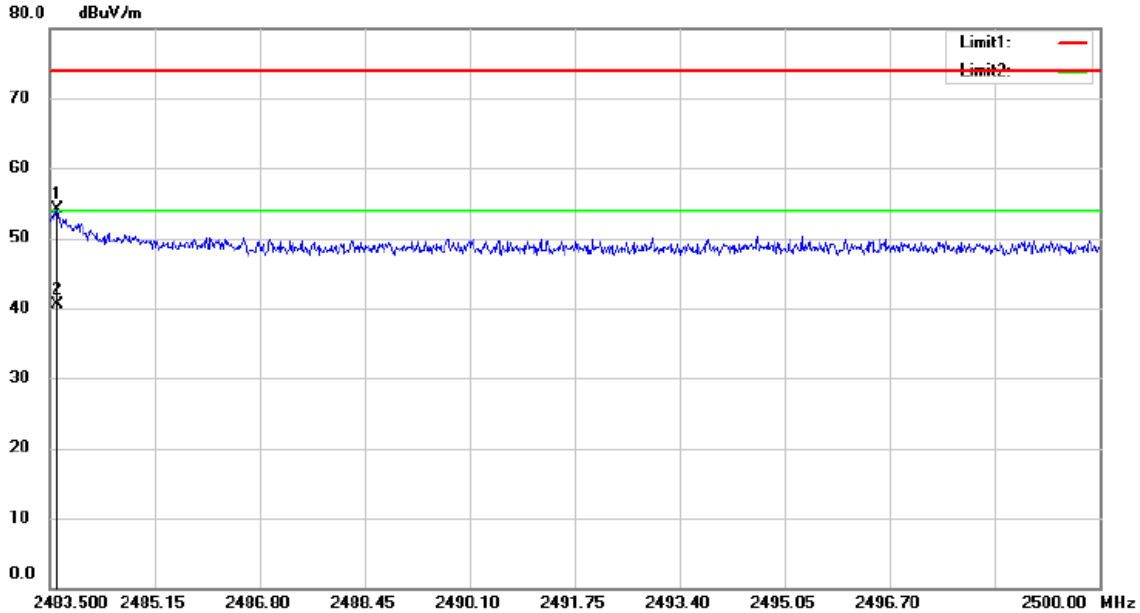


Site RE 3M Chamber #3 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G b20(2462)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.615	23.04	30.97	54.01	74.00	-19.99	peak			
2	*	2483.615	9.60	30.97	40.57	54.00	-13.43	AVG			

Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model 802.11b 802.11g 802.11n(HT20) 802.11n(HT40)
 Channel 11: 2462MHz Channel 9: 2452MHz Polarity: V
 VBW=3MHz Test By: King Kong

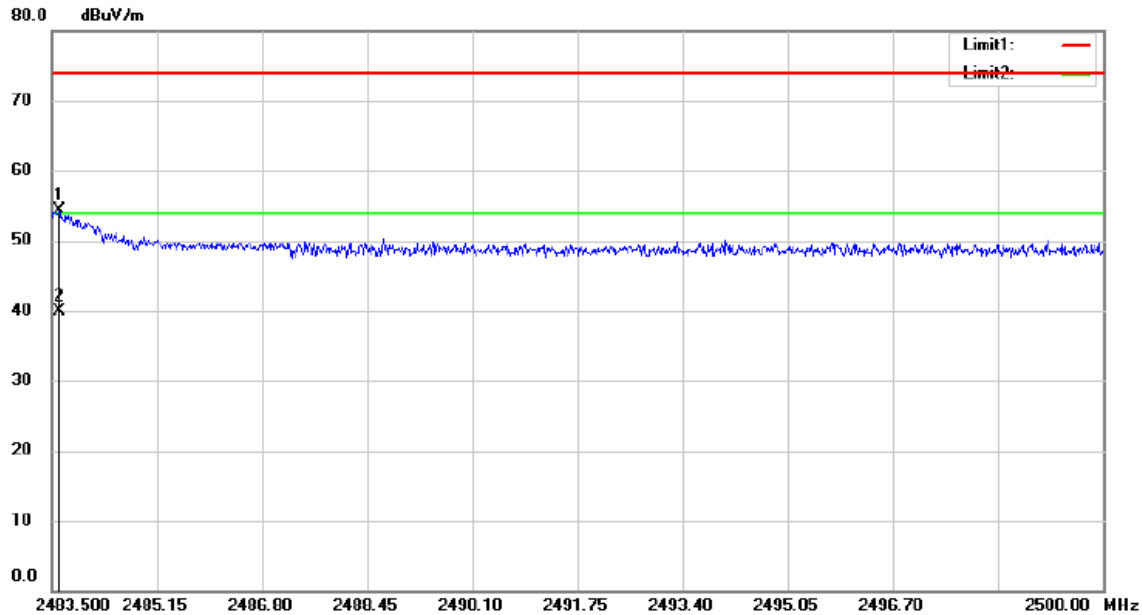

Site RE 3M Chamber #3 Polarization: **Vertical** Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: WIFI2.4G b20(2462)
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2483.615	23.24	30.97	54.21	74.00	-19.79			peak
2	*	2483.615	8.88	30.97	39.85	54.00	-14.15			AVG


■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n(HT20)/n(HT40) have been tested, and the worst result 802.11b recorded was report as below:




Site RE 10M Chamber #1 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G TX B20 2412
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		43.5800	34.90	-14.25	20.65	40.00	-19.35	QP		
2		151.2500	45.47	-19.07	26.40	43.50	-17.10	QP		
3		183.2600	37.66	-16.87	20.79	43.50	-22.71	QP		
4		265.7100	41.09	-13.26	27.83	46.00	-18.17	QP		
5	*	333.6100	43.33	-11.17	32.16	46.00	-13.84	QP		
6		390.8400	40.48	-9.87	30.61	46.00	-15.39	QP		

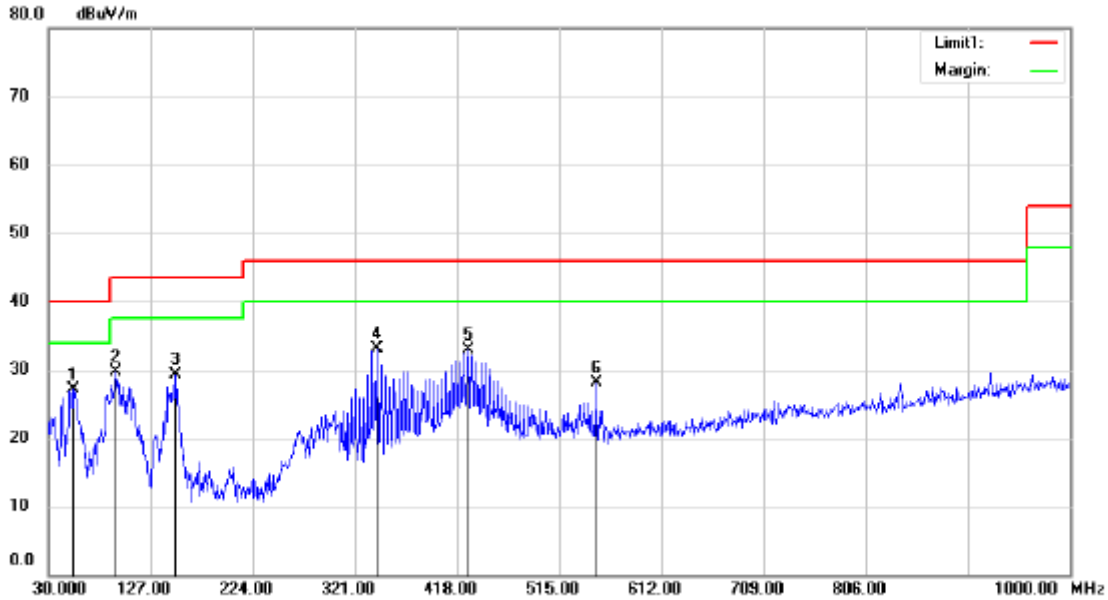


Site RE 10M Chamber #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: WIFI2.4G TX B20 2412
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	54.2500	41.43	-14.28	27.15	40.00	-12.85			QP	
2		94.0200	46.55	-16.84	29.71	43.50	-13.79			QP	
3		151.2500	48.42	-19.07	29.35	43.50	-14.15			QP	
4		342.3400	43.81	-10.72	33.09	46.00	-12.91			QP	
5		428.6700	41.72	-8.90	32.82	46.00	-13.18			QP	
6		549.9200	34.81	-6.66	28.15	46.00	-17.85			QP	

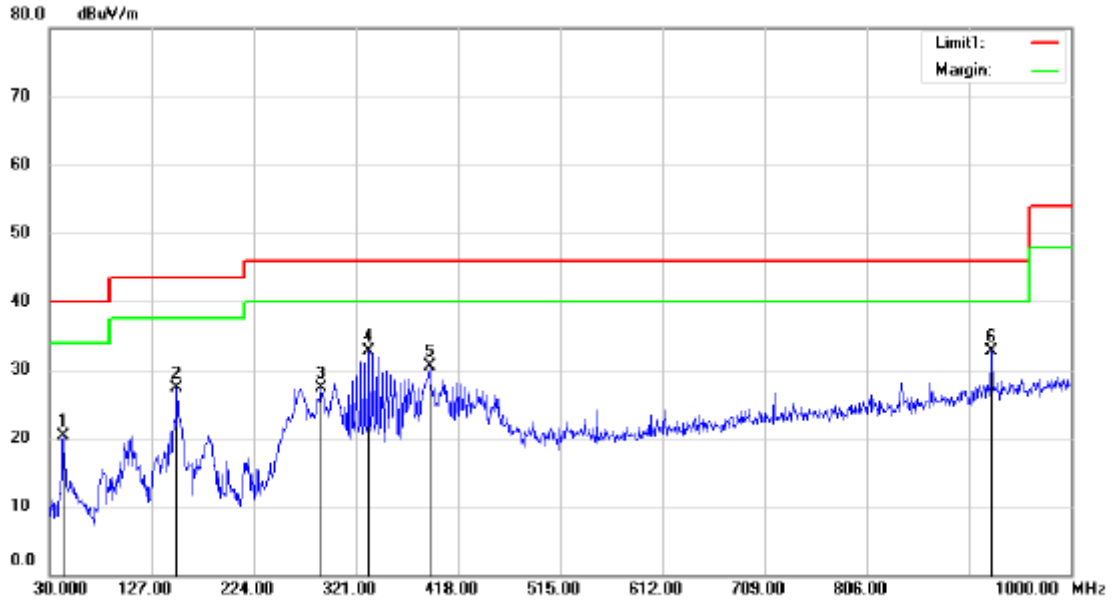

Site RE 10M Chamber #1 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G TX B20 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1		43.5800	34.51	-14.25	20.26	40.00	-19.74	QP	
2		151.2500	46.34	-19.07	27.27	43.50	-16.23	QP	
3		288.0200	39.96	-12.71	27.25	46.00	-18.75	QP	
4		333.6100	43.82	-11.17	32.65	46.00	-13.35	QP	
5		390.8400	40.34	-9.87	30.47	46.00	-15.53	QP	
6	*	924.3400	32.54	0.17	32.71	46.00	-13.29	QP	

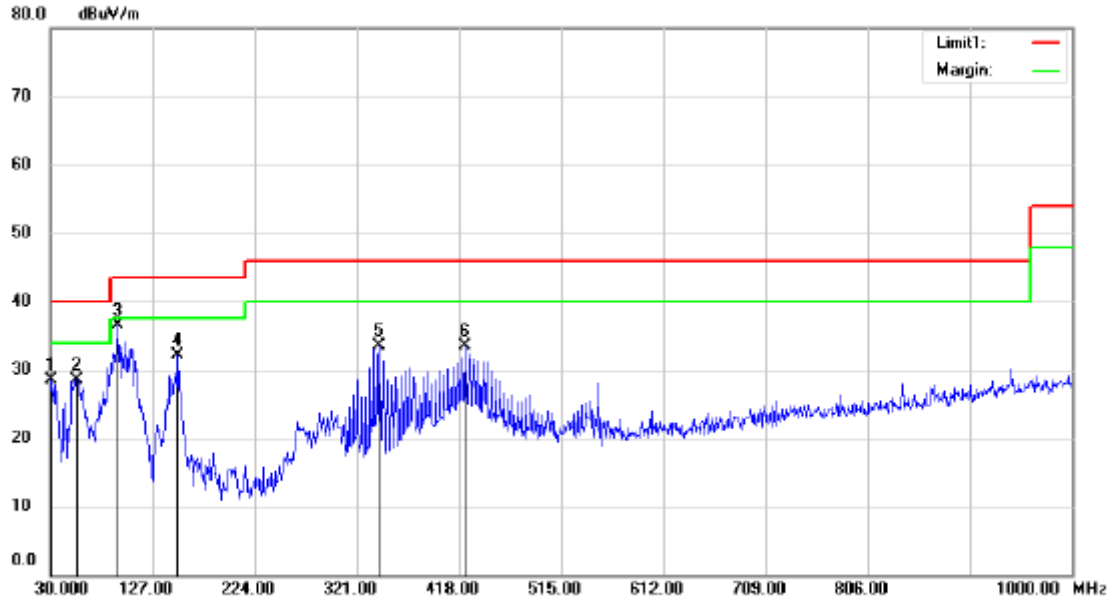


Site RE 10M Chamber #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G TX B20 2437
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		30.9700	45.47	-16.95	28.52	40.00	-11.48	QP		
2		55.2200	43.01	-14.50	28.51	40.00	-11.49	QP		
3	*	94.0200	53.32	-16.84	36.48	43.50	-7.02	QP		
4		151.2500	51.08	-19.07	32.01	43.50	-11.49	QP		
5		342.3400	44.28	-10.72	33.56	46.00	-12.44	QP		
6		423.8200	42.39	-8.88	33.51	46.00	-12.49	QP		



Site: RE 10M Chamber #1 Polarization: *Horizontal* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode: WIFI2.4G TX B20 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		52.3100	28.60	-14.07	14.53	40.00	-25.47			QP	
2		104.6900	35.67	-15.56	20.11	43.50	-23.39			QP	
3		151.2500	46.15	-19.07	27.08	43.50	-16.42			QP	
4		266.6800	40.79	-13.28	27.51	46.00	-18.49			QP	
5	*	333.6100	43.45	-11.17	32.28	46.00	-13.72			QP	
6		838.9800	30.46	-1.42	29.04	46.00	-16.96			QP	

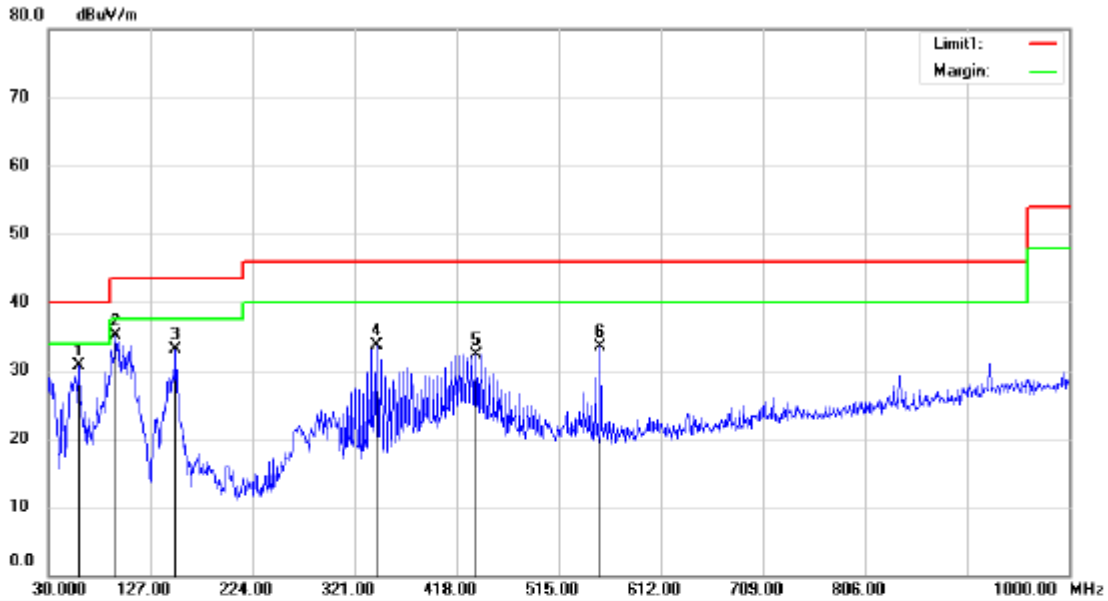

Site RE 10M Chamber #1 Polarization: *Vertical* Temperature: 24 C
 Limit: (RE)FCC PART 15C Power: AC 120V/60Hz Humidity: 53 %
 EUT: Video Conferencing Endpoint
 M/N: VC200
 Mode:WIFI2.4G TX B20 2462
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		59.1000	46.25	-15.53	30.72	40.00	-9.28	QP		
2	*	94.0200	51.87	-16.84	35.03	43.50	-8.47	QP		
3		151.2500	52.20	-19.07	33.13	43.50	-10.37	QP		
4		342.3400	44.46	-10.72	33.74	46.00	-12.26	QP		
5		436.4300	41.08	-8.81	32.27	46.00	-13.73	QP		
6		554.7700	40.05	-6.54	33.51	46.00	-12.49	QP		

8.7 CONDUCTED EMISSIONS TEST

8.7.1 Applicable Standard

According to FCC Part 15.207(a)

8.7.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.7.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.7.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.7.5 Test Results


Pass

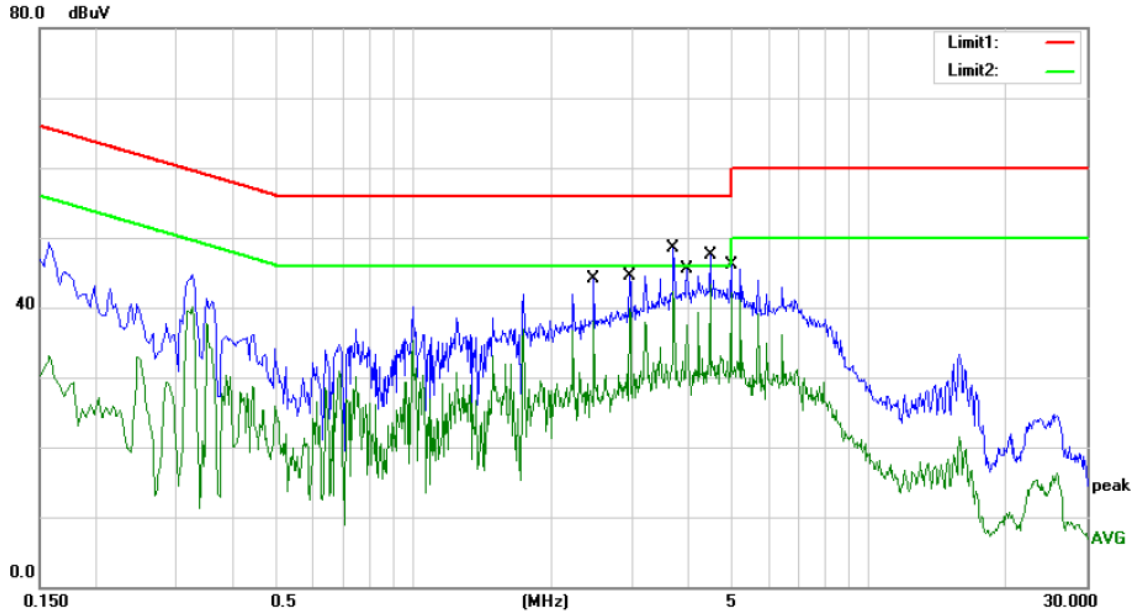

Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: BT mode
 Note:


Phase: **L1**
 Power: AC 120V/60Hz
 Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2.4820	34.26	9.80	44.06	56.00	-11.94	QP	
2		2.4820	28.30	9.80	38.10	46.00	-7.90	AVG	
3		2.9740	34.74	9.80	44.54	56.00	-11.46	QP	
4		2.9740	30.15	9.80	39.95	46.00	-6.05	AVG	
5		3.7180	38.75	9.80	48.55	56.00	-7.45	QP	
6		3.7180	32.47	9.80	42.27	46.00	-3.73	AVG	
7		3.9660	35.79	9.80	45.59	56.00	-10.41	QP	
8		3.9660	29.54	9.80	39.34	46.00	-6.66	AVG	
9		4.4620	37.67	9.80	47.47	56.00	-8.53	QP	
10	*	4.4620	33.47	9.80	43.27	46.00	-2.73	AVG	
11		4.9580	36.38	9.80	46.18	56.00	-9.82	QP	
12		4.9580	32.37	9.80	42.17	46.00	-3.83	AVG	

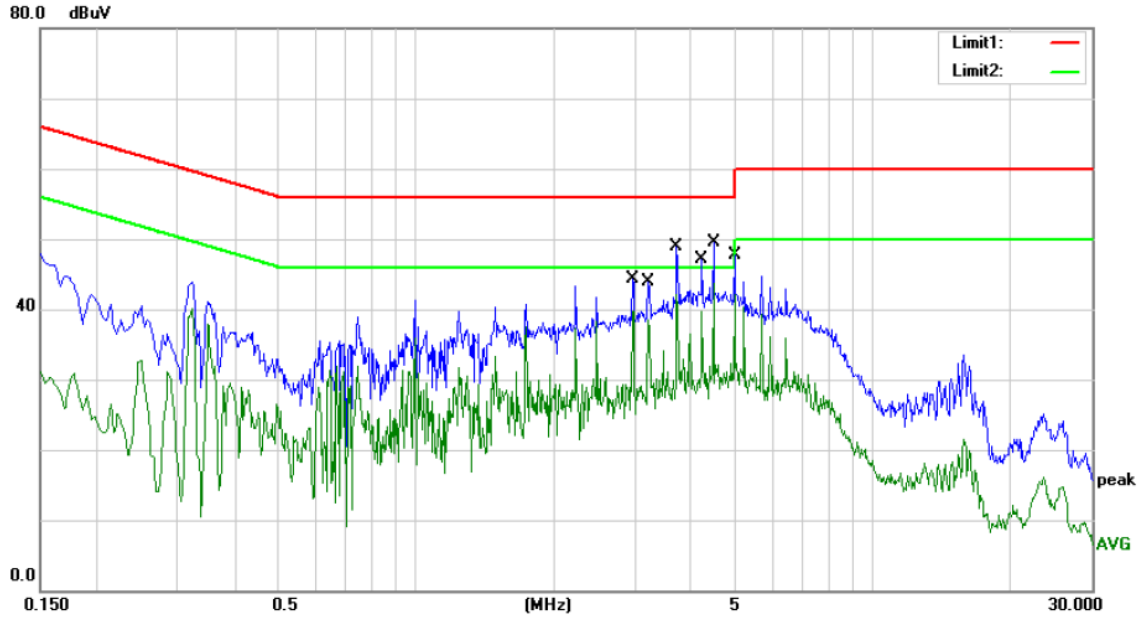

Site Conduction #1 Phase: **N** Temperature: 24.9
 Limit: (CE)FCC PART 15 C Power: AC 120V/60Hz Humidity: 54 %
 Mode: BT mode
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		2.9740	34.47	9.80	44.27	56.00	-11.73	QP	
2		2.9740	29.92	9.80	39.72	46.00	-6.28	AVG	
3		3.2220	34.05	9.80	43.85	56.00	-12.15	QP	
4		3.2220	28.65	9.80	38.45	46.00	-7.55	AVG	
5		3.7180	39.20	9.80	49.00	56.00	-7.00	QP	
6		3.7180	32.39	9.80	42.19	46.00	-3.81	AVG	
7		4.2140	37.38	9.80	47.18	56.00	-8.82	QP	
8		4.2140	29.83	9.80	39.63	46.00	-6.37	AVG	
9		4.4620	39.67	9.80	49.47	56.00	-6.53	QP	
10	*	4.4620	33.96	9.80	43.76	46.00	-2.24	AVG	
11		4.9580	37.90	9.80	47.70	56.00	-8.30	QP	
12		4.9580	32.30	9.80	42.10	46.00	-3.90	AVG	

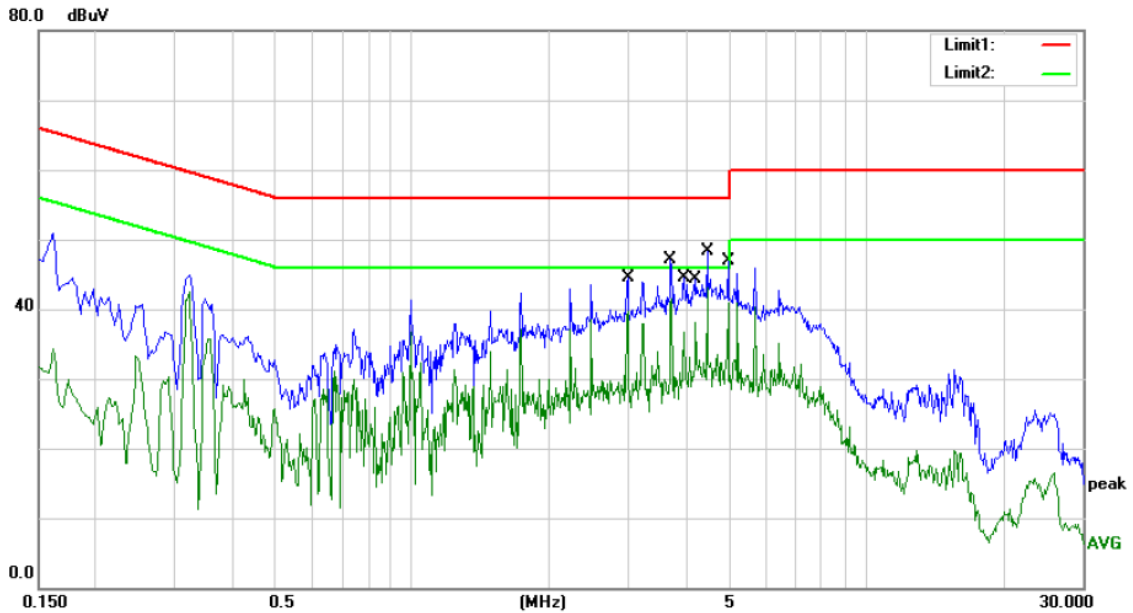


Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: AP mode
 Note:

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2.9780	34.71	9.80	44.51	56.00	-11.49	QP	
2		2.9780	29.83	9.80	39.63	46.00	-6.37	AVG	
3		3.7180	37.24	9.80	47.04	56.00	-8.96	QP	
4		3.7180	31.63	9.80	41.43	46.00	-4.57	AVG	
5		3.9700	34.70	9.80	44.50	56.00	-11.50	QP	
6		3.9700	26.88	9.80	36.68	46.00	-9.32	AVG	
7		4.2140	34.58	9.80	44.38	56.00	-11.62	QP	
8		4.2140	28.31	9.80	38.11	46.00	-7.89	AVG	
9		4.4620	38.51	9.80	48.31	56.00	-7.69	QP	
10	*	4.4620	33.31	9.80	43.11	46.00	-2.89	AVG	
11		4.9580	37.09	9.80	46.89	56.00	-9.11	QP	
12		4.9580	31.05	9.80	40.85	46.00	-5.15	AVG	

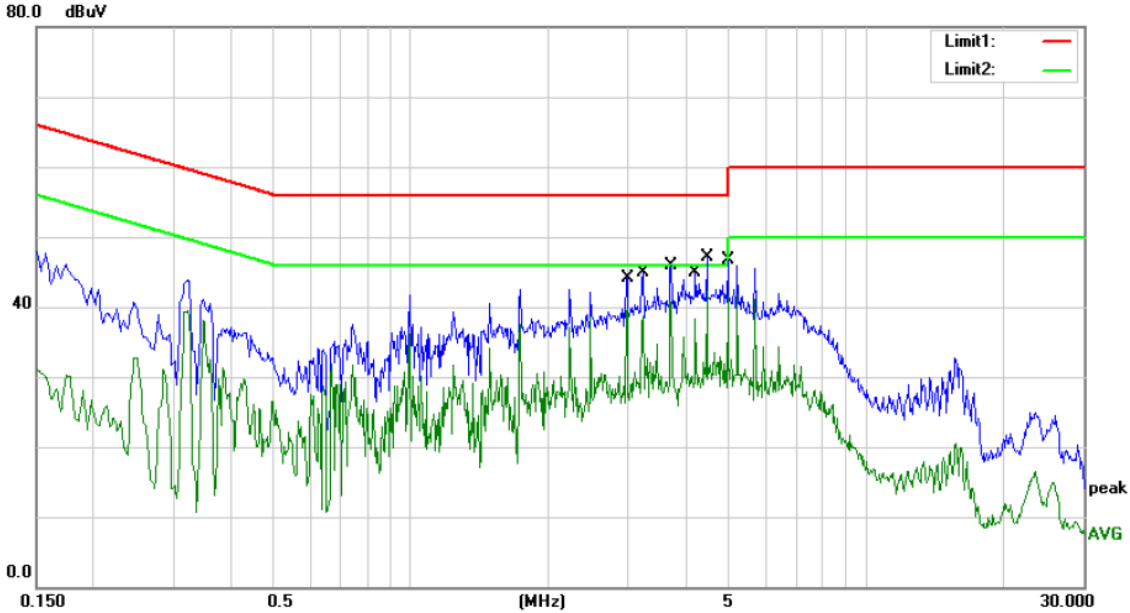


Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: AP mode
 Note:

Phase: **N**
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2.9780	34.28	9.80	44.08	56.00	-11.92	QP	
2		2.9780	30.00	9.80	39.80	46.00	-6.20	AVG	
3		3.2260	35.03	9.80	44.83	56.00	-11.17	QP	
4		3.2260	28.97	9.80	38.77	46.00	-7.23	AVG	
5		3.7220	36.13	9.80	45.93	56.00	-10.07	QP	
6		3.7220	30.98	9.80	40.78	46.00	-5.22	AVG	
7		4.2180	35.10	9.80	44.90	56.00	-11.10	QP	
8		4.2180	28.42	9.80	38.22	46.00	-7.78	AVG	
9		4.4620	37.37	9.80	47.17	56.00	-8.83	QP	
10	*	4.4620	32.45	9.80	42.25	46.00	-3.75	AVG	
11		4.9580	36.82	9.80	46.62	56.00	-9.38	QP	
12		4.9580	31.76	9.80	41.56	46.00	-4.44	AVG	

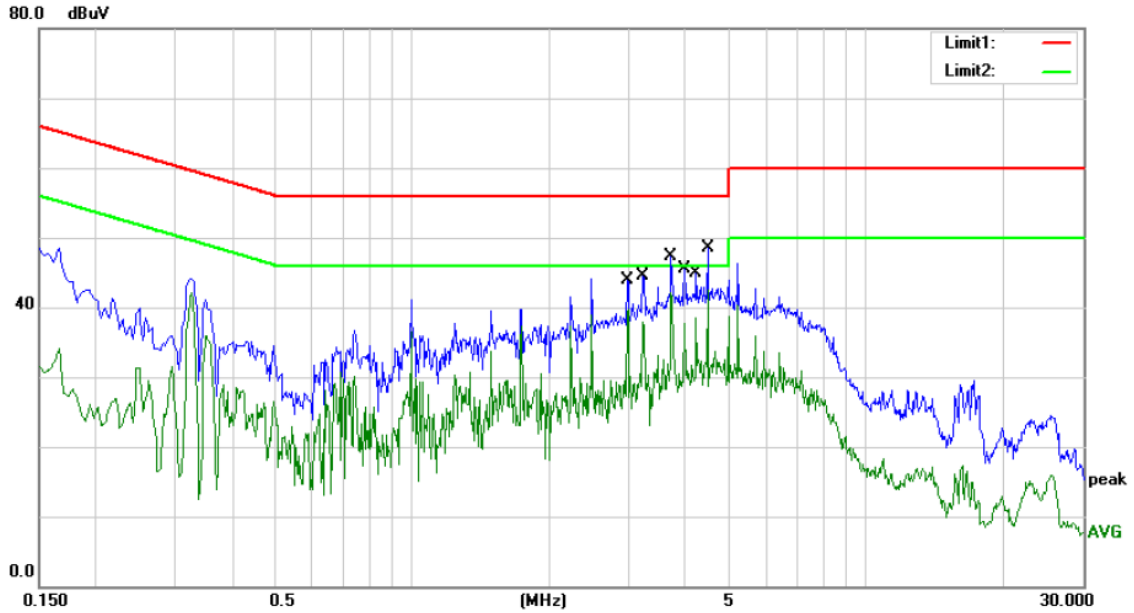


Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: WIFI Connecting mode
 Note:

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		2.9740	34.14	9.80	43.94	56.00	-12.06	QP	
2		2.9740	29.87	9.80	39.67	46.00	-6.33	AVG	
3		3.2220	34.78	9.80	44.58	56.00	-11.42	QP	
4		3.2220	28.08	9.80	37.88	46.00	-8.12	AVG	
5		3.7180	37.52	9.80	47.32	56.00	-8.68	QP	
6		3.7180	32.30	9.80	42.10	46.00	-3.90	AVG	
7		3.9660	35.69	9.80	45.49	56.00	-10.51	QP	
8		3.9660	27.90	9.80	37.70	46.00	-8.30	AVG	
9		4.2140	35.05	9.80	44.85	56.00	-11.15	QP	
10		4.2140	28.71	9.80	38.51	46.00	-7.49	AVG	
11		4.4620	38.63	9.80	48.43	56.00	-7.57	QP	
12	*	4.4620	32.66	9.80	42.46	46.00	-3.54	AVG	

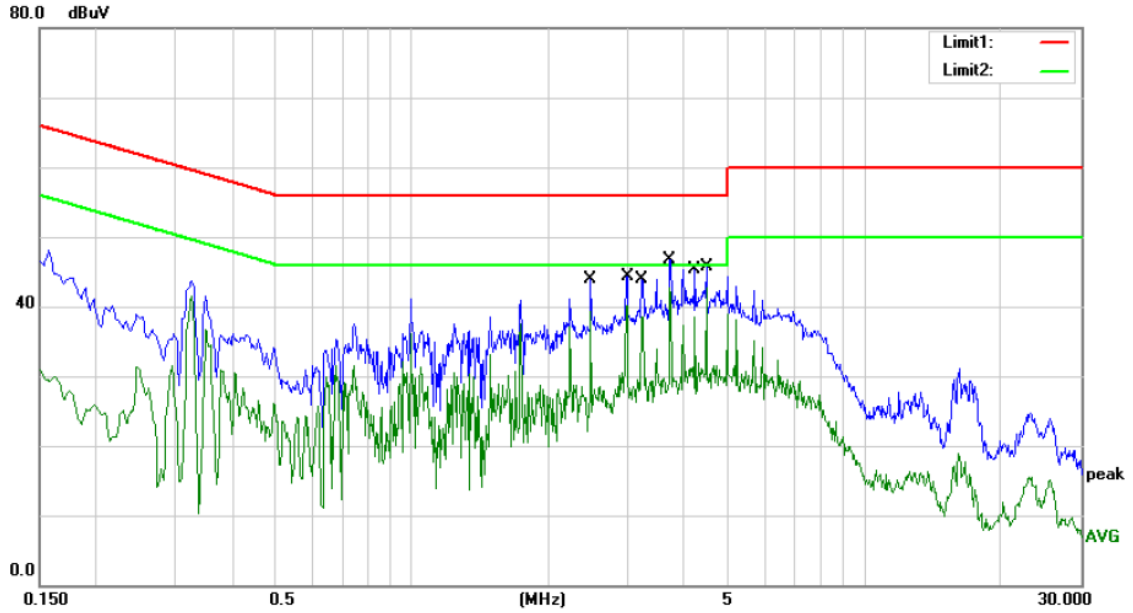

Site Conduction #1
 Limit: (CE)FCC PART 15 C
 Mode: WIFI Connecting mode
 Note:

Phase: **N**
 Power: AC 120V/60Hz

Temperature: 24.9
 Humidity: 54 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		2.4820	34.19	9.80	43.99	56.00	-12.01	QP	
2		2.4820	29.50	9.80	39.30	46.00	-6.70	AVG	
3		2.9780	34.43	9.80	44.23	56.00	-11.77	QP	
4		2.9780	30.36	9.80	40.16	46.00	-5.84	AVG	
5		3.2220	34.12	9.80	43.92	56.00	-12.08	QP	
6		3.2220	28.78	9.80	38.58	46.00	-7.42	AVG	
7		3.7180	36.96	9.80	46.76	56.00	-9.24	QP	
8		3.7180	32.87	9.80	42.67	46.00	-3.33	AVG	
9		4.2140	35.48	9.80	45.28	56.00	-10.72	QP	
10		4.2140	28.68	9.80	38.48	46.00	-7.52	AVG	
11		4.4620	36.00	9.80	45.80	56.00	-10.20	QP	
12	*	4.4620	32.93	9.80	42.73	46.00	-3.27	AVG	

8.8 ANTENNA APPLICATION

8.8.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

For intentional device, according to RSS-Gen Issue 4 Section 8.3:

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for licence-exempt apparatus.

RSS-247 Section 5.4

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

8.8.2 Result

The EUT'S antenna is PCB antenna. The antenna's gain is 3.31 dBi, and the antenna can't be replaced by the user which in accordance to section 15.203, please refer to the photos.