



中认信通
CHINA CERTIFICATION ICT CO.,LTD (DONGGUAN)



TEST REPORT

Applicant: YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

Address: 309, 3rd Floor, No.16, Yun Ding North Road, Huli District, Xiamen City, Fujian, P.R. China

FCC ID: T2C-YL43455

IC: 10741A-YL43455

HVIN: YL43455

Product Name: Wi-Fi+BT Module

**Standard(s): 47 CFR Part 15, Subpart E(15.407)
RSS-247 Issue 2, February 2017
RSS-Gen, Issue 5, February 2021 Amendment 2
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01**

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21100090-00C

Date Of Issue: 2021-11-03

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,

Guangdong, China

Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

TEST FACILITY	2
DECLARATIONS.....	2
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	14
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH:	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER:.....	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	22
3.4.3 Test Procedure	22
3.5 MAXIMUM POWER SPECTRAL DENSITY:	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	24
3.5.3 Test Procedure	24
3.7 DUTY CYCLE:.....	25
3.7.1 EUT Setup.....	25
3.7.2 Test Procedure	25
3.8 ANTENNA REQUIREMENT.....	26
3.8.1 Applicable Standard.....	26
3.8.2 Judgment.....	26

3.9 ADDITIONAL REQUIREMENT27
 3.9.1 Applicable Standard.....27
 3.9.2 JUDGMENT.....28

4. Test DATA AND RESULTS 29
 4.1 AC LINE CONDUCTED EMISSIONS.....29
 4.2 RADIATION SPURIOUS EMISSIONS.....32
 4.3 EMISSION BANDWIDTH:51
 4.4 MAXIMUM CONDUCTED OUTPUT POWER:82
 4.5 MAXIMUM POWER SPECTRAL DENSITY:85
 4.6 DUTY CYCLE:.....102

5. RF EXPOSURE EVALUATION 104
 5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)104
 5.1.1 APPLICABLE STANDARD.....104
 5.1.2 PROCEDURE.....104
 5.1.3 CALCULATED RESULT104
 5.2 EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION105
 5.2.1 APPLICABLE STANDARD.....105
 5.2.2 CALCULATED RESULT105

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	Wi-Fi+BT Module
EUT Model:	YL43455
Operation Frequency:	5180-5240 MHz (802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) 5500-5700 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690 MHz(802.11ac vht80) 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Peak Output Power (Conducted):	14.12 dBm (5150-5250 MHz) 14.38 dBm (5250-5350 MHz) 12.04 dBm (5470-5725 MHz) 13.37 dBm (5725-5850 MHz)
Modulation Type:	OFDM
Rated Input Voltage:	DC 3.3V
Serial Number:	CR21100090-RF-S1
EUT Received Date:	2021.10.11
EUT Received Status:	Good

Operation Frequency Detail:

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/

Note: For Canada, the channels 120-128 were disabled by software.

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5180	5260	5500	5745
Middle	5200	5280	5580	5785
Highest	5240	5320	5700	5825

Note:
Channel 144 crossed the band U-NII 2C to U-NII 3 is not support by the system.

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710	/	/

Note: For Canada, the channels 118-126 were disabled by software.

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	5190	5270	5510	5755
Middle	/	/	5550	/
Highest	5230	5310	5670	5795
Additional	/	/	5710	/

Note:
Channel 142 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690	/	/

Note: For Canada, the channel 122 was disabled by software.

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

Test Channel	Test Frequency (MHz)			
	5150-5250MHz Band	5250-5350 MHz Band	5470-5725 MHz Band	5725-5850MHz Band
Lowest	/	/	5530	/
Middle	5210	5290	5610	5775
Highest	/	/	/	/
Additional	/	/	5690	/

Note:
Channel 138 crossed the band U-NII 2C to U-NII 3, were choose to test for compliance requirement.

1.1.3 Antenna Information Detail▲:

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range	§15.203& RSS-Gen Requirement
YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.	PCB	50	3 dBi/ 5.15~5.85GHz	Compliance

The Method of §15.203 Compliance:

- Antenna must be permanently attached to the unit.
- Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information:

No.

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.					
Equipment Modifications:	No					
EUT Exercise Software:	Testmode					
The software " Testmode "was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:						
Frequency Band	Test Modes	Data Rate	Power Level Setting			
			Lowest Channel	Middle Channel	Highest Channel	Additional channel
5150-5250 MHz	802.11a	6Mbps	16	16	16	/
	802.11n ht20	MCS0	16	16	16	/
	802.11n ht40	MCS0	16	/	16	/
	802.11ac vht80	MCS0	/	16	/	/
5250-5350 MHz	802.11a	6Mbps	16	16	16	/
	802.11n ht20	MCS0	16	16	16	/
	802.11n ht40	MCS0	16	/	16	/
	802.11ac vht80	MCS0	/	16	/	/
5470-5725 MHz:	802.11a	6Mbps	16	16	16	/
	802.11n ht20	MCS0	16	16	16	/
	802.11n ht40	MCS0	16	16	16	16
	802.11ac vht80	MCS0	16	16	/	16
5725-5850 MHz	802.11a	6Mbps	16	16	16	/
	802.11n ht20	MCS0	16	16	16	/
	802.11n ht40	MCS0	16	/	16	/
	802.11ac vht80	MCS0	/	16	/	/
Note: The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.						


1.2.2 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.	Test Fixer	Unknown	CR21100090-RF-S2
YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.	Adapter	TEKA-TD120200US	CR21100090-RF-S3

1.2.3 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	No	No	1.2	Adapter	Test Fixer

1.2.4 Block Diagram of Test Setup

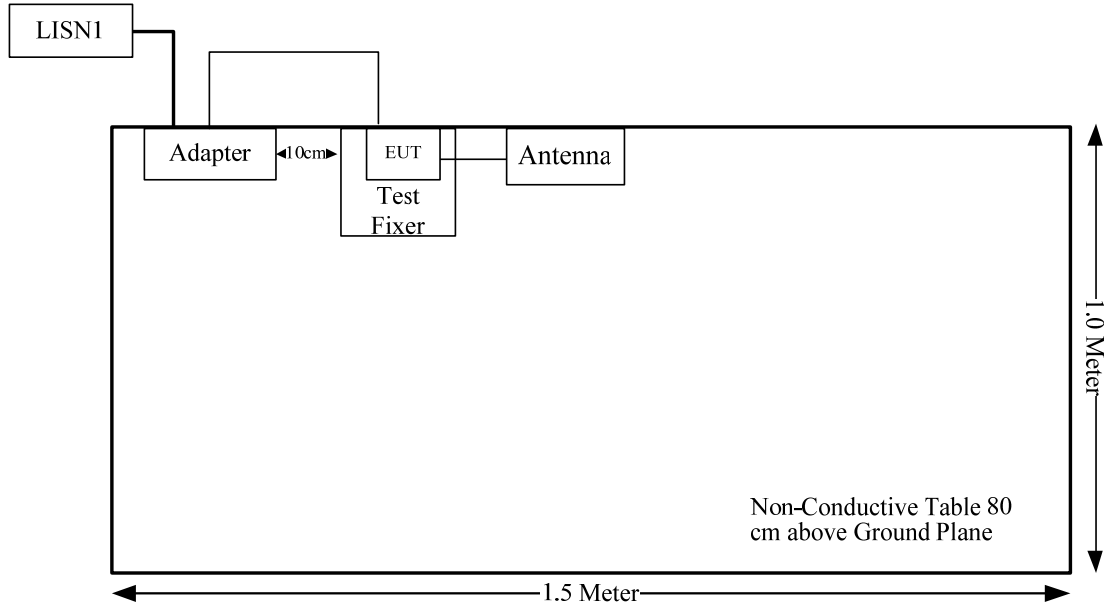

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result	Note
§15.207(a) RSS-Gen Clause 8.8	AC line conducted emissions	Compliance	/
FCC§15.205& §15.209 &§15.407(b) RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliance	/
FCC§15.407(a) (e) RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliance	/
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliance	/
FCC§15.407 (a) RSS-247 Clause 6.2	Power Spectral Density	Compliance	/
FCC§15.407 (h) RSS-247 Clause 6.3	Dynamic Frequency Selection (DFS)	Compliance	Please refer to the DFS report: CR21100090-00E
§15.203 RSS-GEN Clause 6.8	Antenna Requirement	Compliance	/
RSS-247 Clause 6.4	Additional requirements	Compliance	/
§15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance	/
RSS-102 Clause 2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliance	/

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:

(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

RSS-Gen Clause 8.8

Unless stated otherwise in the applicable RSS, for radio apparatus that are designed to be connected to the public utility AC power network, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz to 30 MHz shall not exceed the limits in table 4, as measured using a 50 μ H / 50 Ω line impedance stabilization network. This requirement applies for the radio frequency voltage measured between each power line and the ground terminal of each AC power-line mains cable of the EUT.

For an EUT that connects to the AC power lines indirectly, through another device, the requirement for compliance with the limits in table 4 shall apply at the terminals of the AC power-line mains cable of a representative support device, while it provides power to the EUT. The lower limit applies at the

boundary between the frequency ranges. The device used to power the EUT shall be representative of typical applications.

Table 4 – AC power-line conducted emissions limits

Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ¹	56 to 46 ¹
0.5 – 5	56	46
5 – 30	60	50


Note 1: The level decreases linearly with the logarithm of the frequency.

For an EUT with a permanent or detachable antenna operating between 150 kHz and 30 MHz, the AC power-line conducted emissions must be measured using the following configurations:

(a) Perform the AC power-line conducted emissions test with the antenna connected to determine compliance with the limits of table 4 outside the transmitter's fundamental emission band.

(b) Retest with a dummy load instead of the antenna to determine compliance with the limits of table 4 within the transmitter's fundamental emission band. For a detachable antenna, remove the antenna and connect a suitable dummy load to the antenna connector. For a permanent antenna, remove the antenna and terminate the RF output with a dummy load or network that simulates the antenna in the fundamental frequency band.

3.1.2 EUT Setup

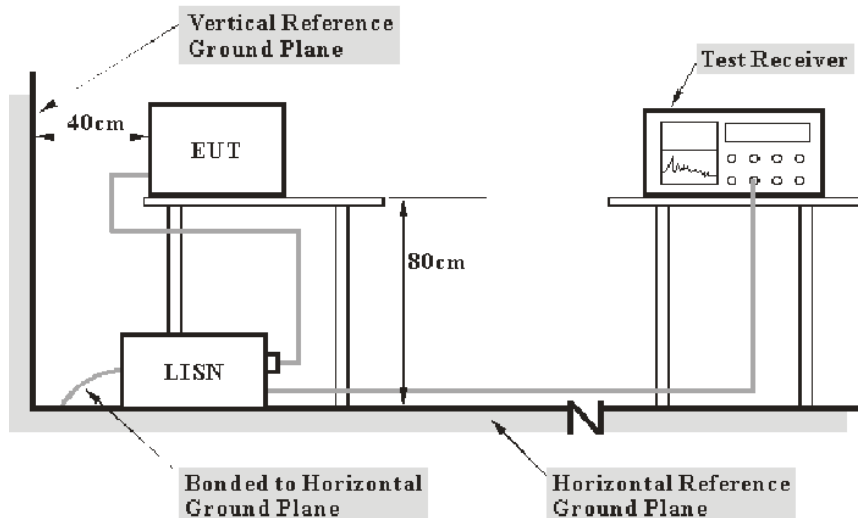

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207,RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard

FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.

(4) For transmitters operating solely in the 5.725-5.850 GHz band:

(i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

(10) The provisions of § 15.205 apply to intentional radiators operating under this section.

(11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

(c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

3.2.2 EUT Setup

Below 1GHz:

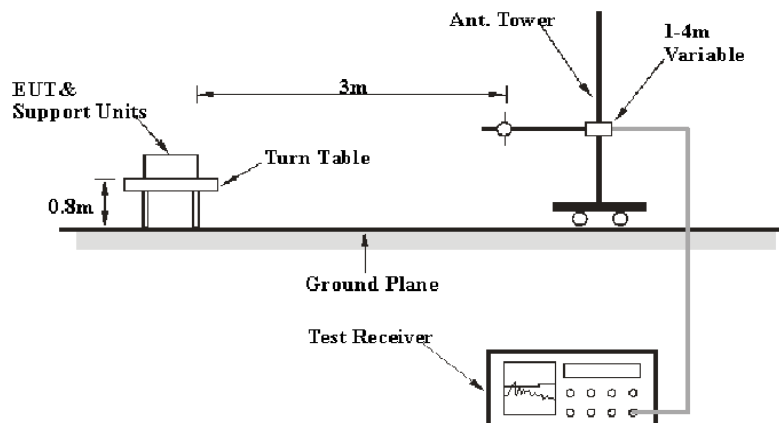

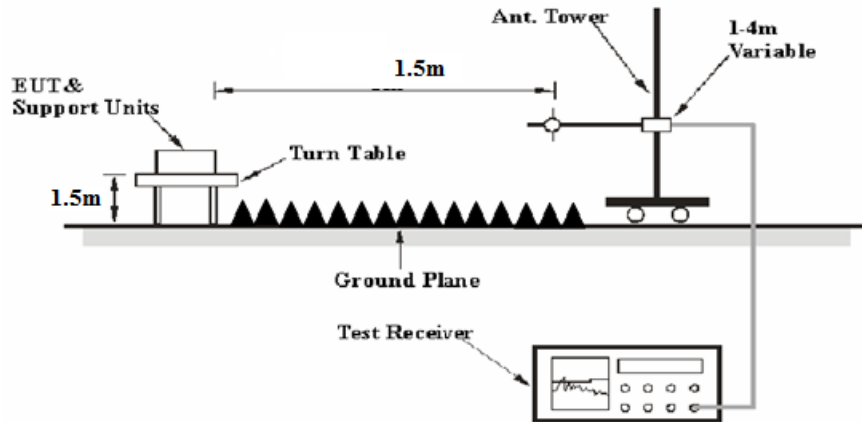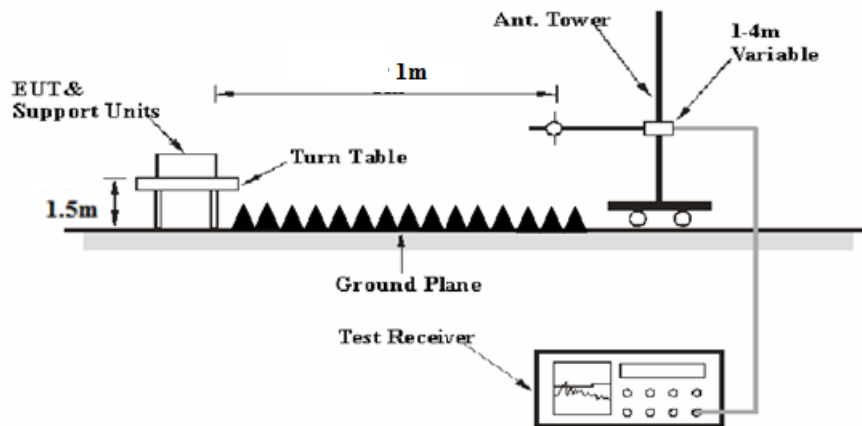1-26.5 GHz:**26.5-40 GHz:**

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407, RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 30MHz-1GHz:

Result = Reading + Factor

For 1GHz-40GHz

Result = Reading + Factor+ Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth:

3.3.1 Applicable Standard

FCC §15.407 (a),(h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

RSS-247 Clause 6.2.1.2

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

RSS-247 Clause 6.2.4.1

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup



3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2013 Section 12.4.1

- Set RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max hold
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

99% Occupied Bandwidth:

According to ANSI C63.10-2013 Section 12.4.2&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6 dB emission bandwidth:

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) ≥ 3 RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described in this section. For devices that use channel aggregation refer to III.A and III.C for determining emission bandwidth.

3.4 Maximum conducted output power:

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log 10B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log 10B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:


a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log 10B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log 10B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.4.2 EUT Setup



3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum power spectral density:

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

RSS-247 Clause 6.2.1.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

RSS-247 Clause 6.2.2.1

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10} B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;

b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

RSS-247 Clause 6.2.4.1

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

3.5.2 EUT Setup



3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Method SA-3 (power averaging (rms) detection with max hold):

(i) Set span to encompass the entire EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set sweep trigger to “free run.”

(iii) Set RBW = 1 MHz.

(iv) Set VBW \geq 3 MHz

(v) Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time $\leq (\text{number of points in sweep}) \times T$, where T is defined in II.B.1.a).

Note: If this results in a sweep time less than the auto sweep time of the analyzer, Method SA-3 Alternative shall not be used. (The purpose of this step is to ensure that averaging time in each bin is less than or equal to the minimum time of a transmission.)

(vii) Detector = power averaging (rms).


(viii) Trace mode = max hold.

(ix) Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.

For devices operating in the band 5.725–5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used.

3.7 Duty Cycle:

3.7.1 EUT Setup



3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.8 Antenna Requirement

3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

RSS-GEN Clause 6.8

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

3.8.2 Judgment

Please refer to the Antenna Information detail in Section 1.

3.9 Additional requirement

3.9.1 Applicable Standard

According to RSS-247 Clause 6.4 Additional requirement

The following requirements shall apply:

- a) The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. A description on how this is done shall accompany the application for equipment certification. Note that this is not intended to prohibit transmission of control or signalling information or the use of repetitive codes where required by the technology.
- b) All LE-LAN devices must contain security features to protect against modification of software by unauthorized parties.

Manufacturers must implement security features in any digitally modulated devices capable of operating in any of the frequency ranges within the 5 GHz band, so that third parties are not able to reprogram the device to operate outside the parameters for which the device was certified. The software must prevent the user from operating the transmitter with operating frequencies, output power, modulation types or other radio frequency parameters outside those that were approved for the device. Manufacturers may use various means, including the use of a private network that allows only authenticated users to download software, electronic signatures in software or coding in hardware that is decoded by software to verify that new software can be legally loaded into a device to meet these requirements and must describe the methods in their application for equipment certification.

Manufacturers must take steps to ensure that DFS functionality cannot be disabled by the operator of the LE-LAN device.

- c) The user manual for LE-LAN devices shall contain instructions related to the restrictions mentioned in the above sections, namely that:
 - i. the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;⁴
 - ii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250-5350 MHz and 5470-5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
 - iii. for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725-5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits as appropriate; and
 - iv. where applicable, antenna type(s), antenna models(s), and worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in section 6.2.2.3 shall be clearly indicated.

3.9.2 Judgment

RSS-247 Clause 6.4 a):

The device shall automatically discontinue transmission in cases of absence of information to transmit, or operational failure. Please refer to the declaration

RSS-247 Clause 6.4 b):

The devices must contain security features to protect against modification of software by unauthorized parties. Please refer to the declaration

RSS-247 Clause 6.4 c):

The device was only for indoor use, please refer to the user manual.

The device operates on 5150-5250MHz,5250-5350MHz, 5470-5600MHz&5650-5725MHz and 5725-5850MHz, all the EIPR compliance with RSS-247 requirement. Please refer to the conducted output power test result.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-21
Test Site:	CE	Test Mode:	Transmitting (802.11a 5785MHz was the worst)
Tester:	Nick Tang	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	24.9	Relative Humidity: (%)	71	ATM Pressure: (kPa)	100.8
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101132	2021-04-25	2022-04-24
R&S	EMI Test Receiver	ESR3	102726	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2021-08-08	2022-08-07
Audix	Test Software	E3	190306 (V9)	N/A	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Line:

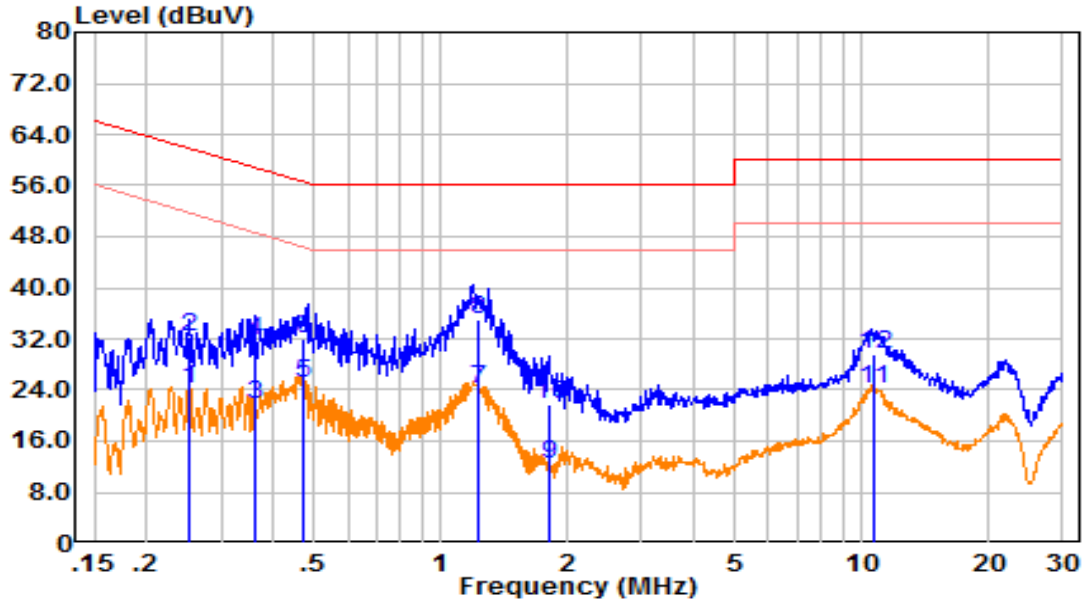

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.252	14.44	9.61	24.05	51.70	27.65	Average
2	0.252	22.73	9.61	32.34	61.70	29.36	QP
3	0.361	12.04	9.61	21.65	48.70	27.06	Average
4	0.361	22.05	9.61	31.66	58.70	27.05	QP
5	0.469	15.50	9.61	25.11	46.54	21.43	Average
6	0.469	22.41	9.61	32.02	56.54	24.52	QP
7	1.218	14.68	9.62	24.30	46.00	21.70	Average
8	1.218	25.51	9.62	35.13	56.00	20.87	QP
9	1.805	2.89	9.63	12.52	46.00	33.48	Average
10	1.805	12.08	9.63	21.71	56.00	34.29	QP
11	10.633	14.35	9.67	24.02	50.00	25.98	Average
12	10.633	19.91	9.67	29.58	60.00	30.42	QP

Neutral:

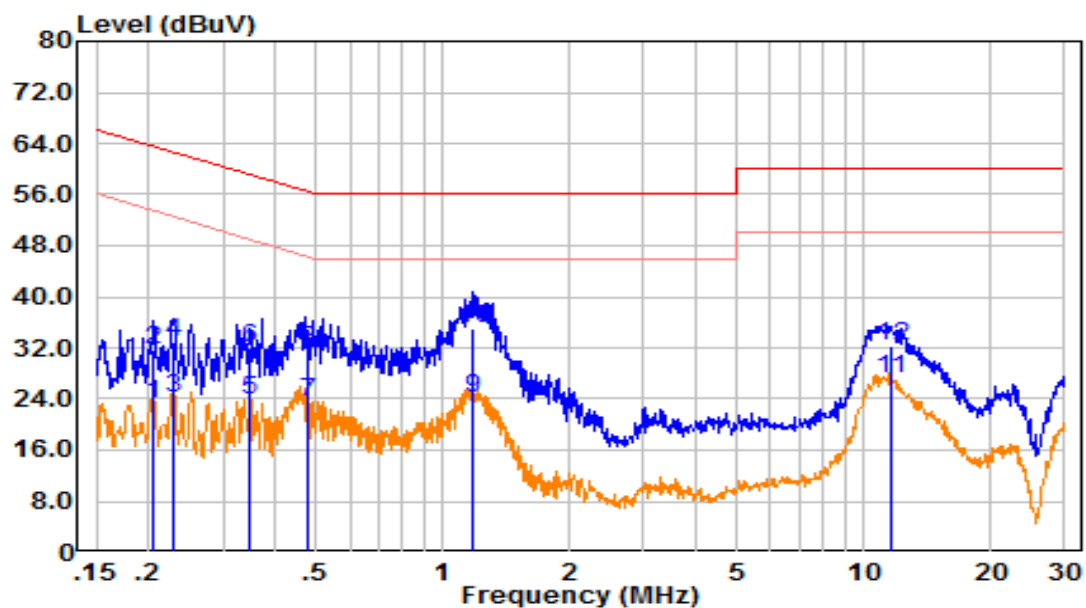

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Detector
1	0.205	13.70	9.61	23.31	53.42	30.11	Average
2	0.205	22.09	9.61	31.70	63.42	31.72	QP
3	0.228	14.59	9.61	24.20	52.53	28.33	Average
4	0.228	23.43	9.61	33.04	62.53	29.49	QP
5	0.348	14.38	9.61	23.99	49.01	25.02	Average
6	0.348	22.25	9.61	31.86	59.01	27.15	QP
7	0.480	13.98	9.61	23.59	46.33	22.74	Average
8	0.480	22.13	9.61	31.74	56.33	24.59	QP
9	1.171	14.48	9.62	24.10	46.00	21.90	Average
10	1.171	25.32	9.62	34.94	56.00	21.06	QP
11	11.570	17.44	9.67	27.11	50.00	22.89	Average
12	11.570	22.56	9.67	32.23	60.00	27.77	QP

4.2 Radiation Spurious Emissions

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-27~2021-10-28
Test Site:	966-1,966-2	Test Mode:	Transmitting
Tester:	Great Qiao, Carl Liang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.4~24.5	Relative Humidity: (%)	60~63	ATM Pressure: (kPa)	101.4
----------------------	-----------	------------------------------	-------	------------------------	-------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2020-10-19	2023-10-18
R&S	EMI Test Receiver	ESR3	102724	2021-07-22	2022-07-21
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2021-07-18	2022-07-17
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2021-07-18	2022-07-17
Sonoma	Amplifier	310N	186165	2021-07-18	2022-07-17
Audix	Test Software	E3	201021 (V9)	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020-10-13	2023-10-12
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021-02-05	2023-02-04
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2021-02-05	2023-02-04
R&S	Spectrum Analyzer	FSV40	101591	2021-07-22	2022-07-21
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2021-08-08	2022-08-07
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2021-08-08	2022-08-07
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2021-08-08	2022-08-07
AH	Preamplifier	PAM-1840VH	190	2020-11-20	2021-11-19
Mini Circuits	High Pass Filter	VHF-6010+	31119	2021-08-08	2022-08-07
E-Microwave	Band Rejection Filter	5150-5850MHz	OE01902423	2021-08-08	2022-08-07

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


1) 30MHz-1GHz(802.11a 5785 MHz was the worst)

Horizontal:

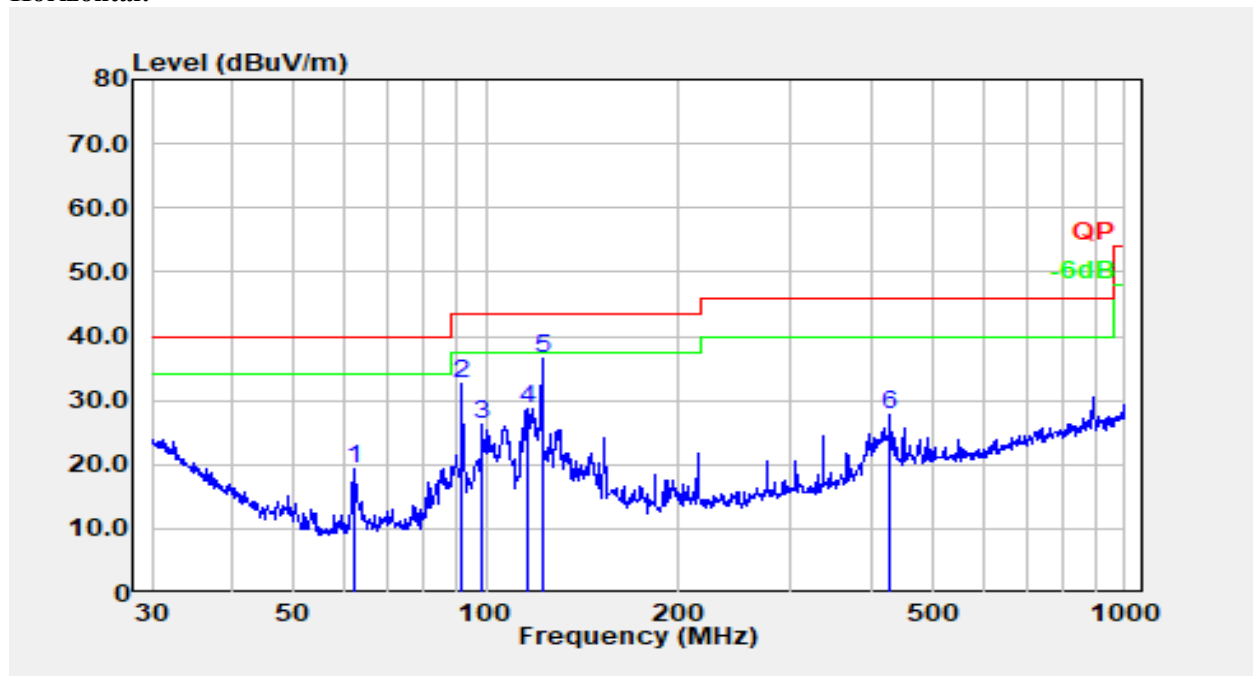

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	61.995	36.80	-17.49	19.31	40.00	20.69	Peak
2	91.816	49.24	-16.74	32.50	43.50	11.00	Peak
3	98.833	41.01	-14.85	26.16	43.50	17.34	Peak
4	116.540	40.65	-12.03	28.62	43.50	14.88	Peak
5	122.404	48.21	-11.67	36.55	43.50	6.95	Peak
6	429.523	35.54	-7.73	27.81	46.00	18.19	Peak

Vertical:

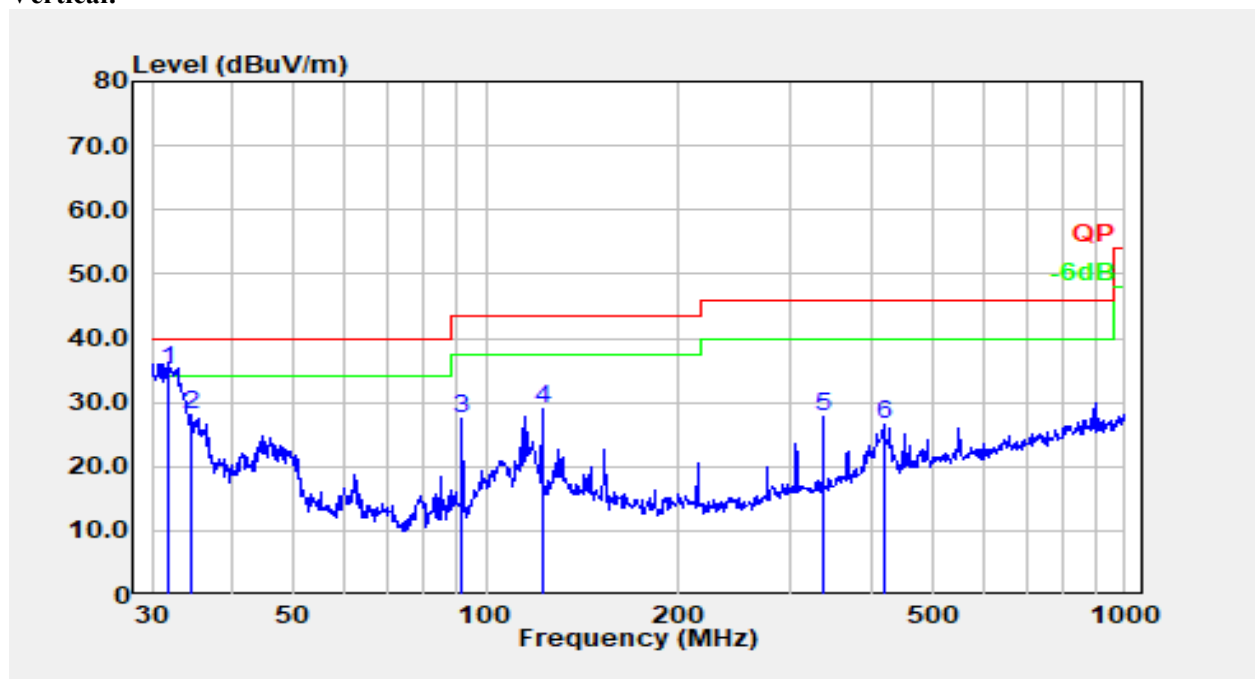

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	31.843	40.10	-5.20	34.90	40.00	5.10	QP
2	34.639	35.42	-7.38	28.04	40.00	11.96	Peak
3	91.816	44.15	-16.74	27.41	43.50	16.09	Peak
4	122.404	40.59	-11.67	28.92	43.50	14.58	Peak
5	337.216	38.09	-10.30	27.79	46.00	18.21	Peak
6	419.108	34.82	-8.18	26.64	46.00	19.36	Peak

2) 1GHz-40GHz:
5150-5250MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5180.00	70.05	PK	H	38.67	102.70	N/A	N/A
5180.00	62.71	AV	H	38.67	95.36	N/A	N/A
5180.00	69.07	PK	V	38.67	101.72	N/A	N/A
5180.00	61.68	AV	V	38.67	94.33	N/A	N/A
5150.00	33.65	PK	H	38.64	66.27	74.00	7.73
5150.00	17.50	AV	H	38.64	50.12	54.00	3.88
10360.00	35.49	PK	H	18.43	47.90	68.20	20.30
15540.00	34.16	PK	H	21.33	49.47	74.00	24.53
15540.00	22.15	AV	H	21.33	37.46	54.00	16.54
Middle Channel: 5200 MHz							
5200.00	71.80	PK	H	38.70	104.48	N/A	N/A
5200.00	63.85	AV	H	38.70	96.53	N/A	N/A
5200.00	70.72	PK	V	38.70	103.40	N/A	N/A
5200.00	62.35	AV	V	38.70	95.03	N/A	N/A
10400.00	34.76	PK	H	18.47	47.21	68.20	20.99
15600.00	34.61	PK	H	20.98	49.57	74.00	24.43
15600.00	22.58	AV	H	20.98	37.54	54.00	16.46
High Channel: 5240 MHz							
5240.00	71.34	PK	H	38.85	104.17	N/A	N/A
5240.00	63.78	AV	H	38.85	96.61	N/A	N/A
5240.00	70.54	PK	V	38.85	103.37	N/A	N/A
5240.00	62.03	AV	V	38.85	94.86	N/A	N/A
5350.00	29.27	PK	H	39.03	62.28	74.00	11.72
5350.00	16.38	AV	H	39.03	49.39	54.00	4.61
10480.00	34.75	PK	H	18.17	46.90	68.20	21.30
15720.00	35.62	PK	H	21.25	50.85	74.00	23.15
15720.00	22.14	AV	H	21.25	37.37	54.00	16.63

802.11n20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5180 MHz							
5180.00	69.46	PK	H	38.67	102.11	N/A	N/A
5180.00	62.07	AV	H	38.67	94.72	N/A	N/A
5180.00	69.11	PK	V	38.67	101.76	N/A	N/A
5180.00	61.37	AV	V	38.67	94.02	N/A	N/A
5150.00	33.62	PK	H	38.64	66.24	74.00	7.76
5150.00	17.52	AV	H	38.64	50.14	54.00	3.86
10360.00	35.48	PK	H	18.43	47.89	68.20	20.31
15540.00	34.65	PK	H	21.33	49.96	74.00	24.04
15540.00	22.69	AV	H	21.33	38.00	54.00	16.00
Middle Channel: 5200 MHz							
5200.00	71.58	PK	H	38.70	104.26	N/A	N/A
5200.00	62.43	AV	H	38.70	95.11	N/A	N/A
5200.00	71.21	PK	V	38.70	103.89	N/A	N/A
5200.00	62.38	AV	V	38.70	95.06	N/A	N/A
10400.00	35.87	PK	H	18.47	48.32	68.20	19.88
15600.00	35.94	PK	H	20.98	50.90	74.00	23.10
15600.00	22.61	AV	H	20.98	37.57	54.00	16.43
High Channel: 5240 MHz							
5240.00	71.14	PK	H	38.85	103.97	N/A	N/A
5240.00	62.49	AV	H	38.85	95.32	N/A	N/A
5240.00	70.86	PK	V	38.85	103.69	N/A	N/A
5240.00	62.35	AV	V	38.85	95.18	N/A	N/A
5350.00	29.48	PK	H	39.03	62.49	74.00	11.51
5350.00	16.53	AV	H	39.03	49.54	54.00	4.46
10480.00	35.62	PK	H	18.17	47.77	68.20	20.43
15720.00	34.15	PK	H	21.25	49.38	74.00	24.62
15720.00	22.03	AV	H	21.25	37.26	54.00	16.74

802.11n40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5190 MHz							
5190.00	67.13	PK	H	38.69	99.80	N/A	N/A
5190.00	59.12	AV	H	38.69	91.79	N/A	N/A
5190.00	66.91	PK	V	38.69	99.58	N/A	N/A
5190.00	59.01	AV	V	38.69	91.68	N/A	N/A
5150.00	32.96	PK	H	38.64	65.58	74.00	8.42
5150.00	17.99	AV	H	38.64	50.61	54.00	3.39
10380.00	35.87	PK	H	18.45	48.30	68.20	19.90
15570.00	34.62	PK	H	21.15	49.75	74.00	24.25
15570.00	22.59	AV	H	21.15	37.72	54.00	16.28
High Channel: 5230 MHz							
5230.00	69.07	PK	H	38.81	101.86	N/A	N/A
5230.00	61.08	AV	H	38.81	93.87	N/A	N/A
5230.00	68.47	PK	V	38.81	101.26	N/A	N/A
5230.00	60.39	AV	V	38.81	93.18	N/A	N/A
5350.00	29.74	PK	H	39.03	62.75	74.00	11.25
5350.00	16.84	AV	H	39.03	49.85	54.00	4.15
10460.00	35.69	PK	H	18.25	47.92	68.20	20.28
15690.00	34.78	PK	H	21.21	49.97	74.00	24.03
15690.00	22.65	AV	H	21.21	37.84	54.00	16.16

802.11ac80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5210 MHz							
5210.00	65.69	PK	H	38.74	98.41	N/A	N/A
5210.00	57.98	AV	H	38.74	90.70	N/A	N/A
5210.00	65.27	PK	V	38.74	97.99	N/A	N/A
5210.00	57.14	AV	V	38.74	89.86	N/A	N/A
5150.00	32.51	PK	H	38.64	65.13	74.00	8.87
5150.00	18.34	AV	H	38.64	50.96	54.00	3.04
5350.00	29.34	PK	H	39.03	62.35	74.00	11.65
5350.00	16.25	AV	H	39.03	49.26	54.00	4.74
10420.00	35.62	PK	H	18.40	48.00	68.20	20.20
15630.00	34.26	PK	H	21.06	49.30	74.00	24.70
15630.00	22.58	AV	H	21.06	37.62	54.00	16.38

5250-5350 MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5260 MHz							
5260.00	69.86	PK	H	38.90	102.74	N/A	N/A
5260.00	62.53	AV	H	38.90	95.41	N/A	N/A
5260.00	69.72	PK	V	38.90	102.60	N/A	N/A
5260.00	61.86	AV	V	38.90	94.74	N/A	N/A
5150.00	29.48	PK	H	38.64	62.10	74.00	11.90
5150.00	16.37	AV	H	38.64	48.99	54.00	5.01
10520.00	34.62	PK	H	18.18	46.78	68.20	21.42
15780.00	34.26	PK	H	21.25	49.49	74.00	24.51
15780.00	22.84	AV	H	21.25	38.07	54.00	15.93
Middle Channel: 5280 MHz							
5280.00	70.37	PK	H	38.91	103.26	N/A	N/A
5280.00	63.35	AV	H	38.91	96.24	N/A	N/A
5280.00	70.11	PK	V	38.91	103.00	N/A	N/A
5280.00	63.15	AV	V	38.91	96.04	N/A	N/A
10560.00	34.58	PK	H	18.33	46.89	68.20	21.31
15840.00	34.15	PK	H	21.24	49.37	74.00	24.63
15840.00	22.17	AV	H	21.24	37.39	54.00	16.61
High Channel: 5320 MHz							
5320.00	70.28	PK	H	38.97	103.23	N/A	N/A
5320.00	62.95	AV	H	38.97	95.90	N/A	N/A
5320.00	69.87	PK	V	38.97	102.82	N/A	N/A
5320.00	63.02	AV	V	38.97	95.97	N/A	N/A
5350.00	30.21	PK	H	39.03	63.22	74.00	10.78
5350.00	16.94	AV	H	39.03	49.95	54.00	4.05
10640.00	34.72	PK	H	18.59	47.29	74.00	26.71
10640.00	22.59	AV	H	18.59	35.16	54.00	18.84
15960.00	34.74	PK	H	21.11	49.83	74.00	24.17
15960.00	22.34	AV	H	21.11	37.43	54.00	16.57

802.11n20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5260 MHz							
5260.00	70.62	PK	H	38.90	103.50	N/A	N/A
5260.00	62.34	AV	H	38.90	95.22	N/A	N/A
5260.00	70.24	PK	V	38.90	103.12	N/A	N/A
5260.00	62.14	AV	V	38.90	95.02	N/A	N/A
5150.00	30.45	PK	H	38.64	63.07	74.00	10.93
5150.00	16.78	AV	H	38.64	49.40	54.00	4.60
10520.00	36.54	PK	H	18.18	48.70	68.20	19.50
15780.00	34.87	PK	H	21.25	50.10	74.00	23.90
15780.00	22.82	AV	H	21.25	38.05	54.00	15.95
Middle Channel: 5280 MHz							
5280.00	70.26	PK	H	38.91	103.15	N/A	N/A
5280.00	62.15	AV	H	38.91	95.04	N/A	N/A
5280.00	69.88	PK	V	38.91	102.77	N/A	N/A
5280.00	61.79	AV	V	38.91	94.68	N/A	N/A
10560.00	35.28	PK	H	18.33	47.59	68.20	20.61
15840.00	34.16	PK	H	21.24	49.38	74.00	24.62
15840.00	22.94	AV	H	21.24	38.16	54.00	15.84
High Channel: 5320 MHz							
5320.00	71.32	PK	H	38.97	104.27	N/A	N/A
5320.00	62.31	AV	H	38.97	95.26	N/A	N/A
5320.00	71.30	PK	V	38.97	104.25	N/A	N/A
5320.00	62.35	AV	V	38.97	95.30	N/A	N/A
5350.00	29.79	PK	H	39.03	62.80	74.00	11.20
5350.00	16.84	AV	H	39.03	49.85	54.00	4.15
10640.00	37.54	PK	H	18.59	50.11	74.00	23.89
10640.00	26.33	AV	H	18.59	38.90	54.00	15.10
15960.00	34.15	PK	H	21.11	49.24	74.00	24.76
15960.00	22.81	AV	H	21.11	37.90	54.00	16.10

802.11n40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5270 MHz							
5270.00	68.15	PK	H	38.91	101.04	N/A	N/A
5270.00	60.28	AV	H	38.91	93.17	N/A	N/A
5270.00	67.79	PK	V	38.91	100.68	N/A	N/A
5270.00	60.12	AV	V	38.91	93.01	N/A	N/A
5150.00	30.14	PK	H	38.64	62.76	74.00	11.24
5150.00	16.77	AV	H	38.64	49.39	54.00	4.61
10540.00	34.78	PK	H	18.25	47.01	68.20	21.19
15810.00	34.15	PK	H	21.25	49.38	74.00	24.62
15810.00	22.16	AV	H	21.25	37.39	54.00	16.61
High Channel: 5310 MHz							
5310.00	68.32	PK	H	38.95	101.25	N/A	N/A
5310.00	60.35	AV	H	38.95	93.28	N/A	N/A
5310.00	68.11	PK	V	38.95	101.04	N/A	N/A
5310.00	58.91	AV	V	38.95	91.84	N/A	N/A
5350.00	33.24	PK	H	39.03	66.25	74.00	7.75
5350.00	17.65	AV	H	39.03	50.66	54.00	3.34
10620.00	35.78	PK	H	18.54	48.30	74.00	25.70
10620.00	23.54	AV	H	18.54	36.06	54.00	17.94
15930.00	34.91	PK	H	21.16	50.05	74.00	23.95
15930.00	22.58	AV	H	21.16	37.72	54.00	16.28

802.11ac80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5290 MHz							
5290.00	61.89	PK	H	38.92	94.79	N/A	N/A
5290.00	54.23	AV	H	38.92	87.13	N/A	N/A
5290.00	61.53	PK	V	38.92	94.43	N/A	N/A
5290.00	54.11	AV	V	38.92	87.01	N/A	N/A
5150.00	29.45	PK	H	38.64	62.07	74.00	11.93
5150.00	16.83	AV	H	38.64	49.45	54.00	4.55
5350.00	32.19	PK	H	39.03	65.20	74.00	8.80
5350.00	17.83	AV	H	39.03	50.84	54.00	3.16
10580.00	35.62	PK	H	18.40	48.00	68.20	20.20
15870.00	34.22	PK	H	21.22	49.42	74.00	24.58
15870.00	22.61	AV	H	21.22	37.81	54.00	16.19

5470-5725 MHz

802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5500 MHz							
5500.00	70.32	PK	H	39.32	103.62	N/A	N/A
5500.00	62.95	AV	H	39.32	96.25	N/A	N/A
5500.00	66.35	PK	V	39.32	99.65	N/A	N/A
5500.00	59.28	AV	V	39.32	92.58	N/A	N/A
5470.00	30.42	PK	H	39.27	63.67	68.20	4.53
11000.00	42.85	PK	H	19.38	56.21	74.00	17.79
11000.00	25.75	AV	H	19.38	39.11	54.00	14.89
16500.00	34.35	PK	H	21.95	50.28	68.20	17.92
Middle Channel: 5580 MHz							
5580.00	69.02	PK	H	39.43	102.43	N/A	N/A
5580.00	61.48	AV	H	39.43	94.89	N/A	N/A
5580.00	68.67	PK	V	39.43	102.08	N/A	N/A
5580.00	60.75	AV	V	39.43	94.16	N/A	N/A
11160.00	45.15	PK	H	19.30	58.43	74.00	15.57
11160.00	28.32	AV	H	19.30	41.6	54.00	12.40
16740.00	34.52	PK	H	22.81	51.31	68.20	16.89
High Channel: 5700 MHz							
5700.00	70.30	PK	H	39.51	103.79	N/A	N/A
5700.00	63.42	AV	H	39.51	96.91	N/A	N/A
5700.00	69.08	PK	V	39.51	102.57	N/A	N/A
5700.00	61.55	AV	V	39.51	95.04	N/A	N/A
5725.00	30.35	PK	H	39.48	63.81	68.20	4.39
11400.00	43.46	PK	H	19.52	56.96	74.00	17.04
11400.00	26.46	AV	H	19.52	39.96	54.00	14.04
17100.00	34.62	PK	H	25.87	54.47	68.20	13.73

802.11n20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5500 MHz							
5500.00	71.85	PK	H	39.32	105.15	N/A	N/A
5500.00	63.27	AV	H	39.32	96.57	N/A	N/A
5500.00	67.28	PK	V	39.32	100.58	N/A	N/A
5500.00	58.96	AV	V	39.32	92.26	N/A	N/A
5470.00	30.58	PK	H	39.27	63.83	68.20	4.37
11000.00	40.25	PK	H	19.38	53.61	74.00	20.39
11000.00	23.59	AV	H	19.38	36.95	54.00	17.05
16500.00	34.34	PK	H	21.95	50.27	68.20	17.93
Middle Channel: 5580 MHz							
5580.00	70.90	PK	H	39.43	104.31	N/A	N/A
5580.00	62.19	AV	H	39.43	95.6	N/A	N/A
5580.00	68.88	PK	V	39.43	102.29	N/A	N/A
5580.00	60.61	AV	V	39.43	94.02	N/A	N/A
11160.00	38.50	PK	H	19.30	51.78	74.00	22.22
11160.00	21.68	AV	H	19.30	34.96	54.00	19.04
16740.00	34.26	PK	H	22.81	51.05	68.20	17.15
High Channel: 5700 MHz							
5700.00	70.48	PK	H	39.51	103.97	N/A	N/A
5700.00	62.37	AV	H	39.51	95.86	N/A	N/A
5700.00	67.89	PK	V	39.51	101.38	N/A	N/A
5700.00	59.37	AV	V	39.51	92.86	N/A	N/A
5725.00	31.45	PK	H	39.48	64.91	68.20	3.29
11400.00	39.41	PK	H	19.52	52.91	74.00	21.09
11400.00	21.87	AV	H	19.52	35.37	54.00	18.63
17100.00	34.37	PK	H	25.87	54.22	68.20	13.98

802.11n40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5510 MHz							
5510.00	68.81	PK	H	39.34	102.13	N/A	N/A
5510.00	59.30	AV	H	39.34	92.62	N/A	N/A
5510.00	64.53	PK	V	39.34	97.85	N/A	N/A
5510.00	56.54	AV	V	39.34	89.86	N/A	N/A
5470.00	31.52	PK	H	39.27	64.77	68.20	3.43
11020.00	38.46	PK	H	19.34	51.78	74.00	22.22
11020.00	21.52	AV	H	19.34	34.84	54.00	19.16
16530.00	34.43	PK	H	22.00	50.41	68.20	17.79
Middle Channel: 5550 MHz							
5550.00	68.65	PK	H	39.46	102.09	N/A	N/A
5550.00	59.93	AV	H	39.46	93.37	N/A	N/A
5550.00	65.42	PK	V	39.46	98.86	N/A	N/A
5550.00	57.18	AV	V	39.46	90.62	N/A	N/A
11100.00	39.43	PK	H	19.21	52.62	74.00	21.38
11100.00	24.09	AV	H	19.21	37.28	54.00	16.72
16650.00	34.42	PK	H	22.56	50.96	68.20	17.24
High Channel: 5670 MHz							
5670.00	66.49	PK	H	39.50	99.97	N/A	N/A
5670.00	58.15	AV	H	39.50	91.63	N/A	N/A
5670.00	64.86	PK	V	39.50	98.34	N/A	N/A
5670.00	56.74	AV	V	39.50	90.22	N/A	N/A
5725.00	31.59	PK	H	39.48	65.05	68.20	3.15
11340.00	38.56	PK	H	19.68	52.22	74.00	21.78
11340.00	22.77	AV	H	19.68	36.43	54.00	17.57
17010.00	34.61	PK	H	24.27	52.86	68.20	15.34

802.11ac80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5530 MHz							
5530.00	62.95	PK	H	39.40	96.33	N/A	N/A
5530.00	54.32	AV	H	39.40	87.70	N/A	N/A
5530.00	59.95	PK	V	39.40	93.33	N/A	N/A
5530.00	51.19	AV	V	39.40	84.57	N/A	N/A
5470.00	31.58	PK	H	39.27	64.83	68.20	3.37
11060.00	35.77	PK	H	19.28	49.03	74.00	24.97
11060.00	20.52	AV	H	19.28	33.78	54.00	20.22
16590.00	34.37	PK	H	22.12	50.47	68.20	17.73
High Channel: 5610 MHz							
5610.00	64.08	PK	H	39.42	97.48	N/A	N/A
5610.00	55.38	AV	H	39.42	88.78	N/A	N/A
5610.00	62.98	PK	V	39.42	96.38	N/A	N/A
5610.00	54.38	AV	V	39.42	87.78	N/A	N/A
5725.00	31.05	PK	H	39.48	64.51	68.20	3.69
11220.00	36.11	PK	H	19.45	49.54	74.00	24.46
11220.00	21.06	AV	H	19.45	34.49	54.00	19.51
16830.00	34.19	PK	H	23.04	51.21	68.20	16.99

5725-5850 MHz
802.11a Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
5745.00	74.56	PK	H	39.46	108.00	N/A	N/A
5745.00	67.23	AV	H	39.46	100.67	N/A	N/A
5745.00	69.90	PK	V	39.46	103.34	N/A	N/A
5745.00	61.83	AV	V	39.46	95.27	N/A	N/A
5725.00	38.51	PK	H	39.48	71.97	122.20	50.23
5720.00	32.41	PK	H	39.49	65.88	110.80	44.92
5700.00	30.84	PK	H	39.51	64.33	105.20	40.87
5650.00	31.68	PK	H	39.49	65.15	68.20	3.05
11490.00	34.59	PK	H	19.99	48.56	74.00	25.44
11490.00	21.68	AV	H	19.99	35.65	54.00	18.35
17235.00	34.33	PK	H	25.85	54.16	68.20	14.04
Middle Channel: 5785 MHz							
5785.00	72.59	PK	H	39.43	106.00	N/A	N/A
5785.00	64.88	AV	H	39.43	98.29	N/A	N/A
5785.00	67.13	PK	V	39.43	100.54	N/A	N/A
5785.00	59.36	AV	V	39.43	92.77	N/A	N/A
11570.00	33.18	PK	H	19.66	46.82	74.00	27.18
11570.00	21.05	AV	H	19.66	34.69	54.00	19.31
17355.00	34.67	PK	H	26.67	55.32	68.20	12.88
High Channel: 5825 MHz							
5825.00	72.03	PK	H	39.46	105.47	N/A	N/A
5825.00	64.52	AV	H	39.46	97.96	N/A	N/A
5825.00	66.80	PK	V	39.46	100.24	N/A	N/A
5825.00	59.33	AV	V	39.46	92.77	N/A	N/A
5850.00	35.88	PK	H	39.49	69.35	122.20	52.85
5855.00	31.68	PK	H	39.51	65.17	110.80	45.63
5875.00	31.56	PK	H	39.60	65.14	105.20	40.06
5925.00	31.35	PK	H	39.68	65.01	68.20	3.19
11650.00	34.51	PK	H	20.04	48.53	74.00	25.47
11650.00	22.36	AV	H	20.04	36.38	54.00	17.62
17475.00	34.38	PK	H	27.93	56.29	68.20	11.91

802.11n20 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5745 MHz							
5745.00	72.43	PK	H	39.46	105.87	N/A	N/A
5745.00	63.08	AV	H	39.46	96.52	N/A	N/A
5745.00	68.49	PK	V	39.46	101.93	N/A	N/A
5745.00	60.20	AV	V	39.46	93.64	N/A	N/A
5725.00	34.37	PK	H	39.48	67.83	122.20	54.37
5720.00	33.55	PK	H	39.49	67.02	110.80	43.78
5700.00	30.08	PK	H	39.51	63.57	105.20	41.63
5650.00	30.33	PK	H	39.49	63.80	68.20	4.40
11490.00	33.92	PK	H	19.99	47.89	74.00	26.11
11490.00	21.57	AV	H	19.99	35.54	54.00	18.46
17235.00	34.49	PK	H	25.85	54.32	68.20	13.88
Middle Channel: 5785 MHz							
5785.00	72.38	PK	H	39.43	105.79	N/A	N/A
5785.00	63.94	AV	H	39.43	97.35	N/A	N/A
5785.00	71.56	PK	V	39.43	104.97	N/A	N/A
5785.00	63.18	AV	V	39.43	96.59	N/A	N/A
11570.00	33.75	PK	H	19.66	47.39	74.00	26.61
11570.00	21.86	AV	H	19.66	35.50	54.00	18.50
17355.00	34.28	PK	H	26.67	54.93	68.20	13.27
High Channel: 5825 MHz							
5825.00	69.96	PK	H	39.46	103.40	N/A	N/A
5825.00	61.17	AV	H	39.46	94.61	N/A	N/A
5825.00	68.87	PK	V	39.46	102.31	N/A	N/A
5825.00	59.90	AV	V	39.46	93.34	N/A	N/A
5850.00	32.33	PK	H	39.49	65.80	122.20	56.40
5855.00	32.56	PK	H	39.51	66.05	110.80	44.75
5875.00	32.65	PK	H	39.60	66.23	105.20	38.97
5925.00	31.52	PK	H	39.68	65.18	68.20	3.02
11650.00	34.00	PK	H	20.04	48.02	74.00	25.98
11650.00	21.89	AV	H	20.04	35.91	54.00	18.09
17475.00	34.37	PK	H	27.93	56.28	68.20	11.92

802.11n40 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 5755 MHz							
5755.00	69.91	PK	H	39.45	103.34	N/A	N/A
5755.00	61.28	AV	H	39.45	94.71	N/A	N/A
5755.00	66.25	PK	V	39.45	99.68	N/A	N/A
5755.00	57.28	AV	V	39.45	90.71	N/A	N/A
5725.00	38.00	PK	H	39.48	71.46	122.20	50.74
5720.00	38.94	PK	H	39.49	72.41	110.80	38.39
5700.00	31.96	PK	H	39.51	65.45	105.20	39.75
5650.00	31.20	PK	H	39.49	64.67	68.20	3.53
11510.00	32.81	PK	H	19.99	46.78	74.00	27.22
11510.00	20.46	AV	H	19.99	34.43	54.00	19.57
17265.00	34.53	PK	H	26.34	54.85	68.20	13.35
High Channel: 5795 MHz							
5795.00	67.07	PK	H	39.43	100.48	N/A	N/A
5795.00	58.79	AV	H	39.43	92.20	N/A	N/A
5795.00	66.10	PK	V	39.43	99.51	N/A	N/A
5795.00	57.35	AV	V	39.43	90.76	N/A	N/A
5850.00	32.45	PK	H	39.49	65.92	122.20	56.28
5855.00	32.80	PK	H	39.51	66.29	110.80	44.51
5875.00	33.48	PK	H	39.60	67.06	105.20	38.14
5925.00	31.48	PK	H	39.68	65.14	68.20	3.06
11590.00	33.52	PK	H	19.55	47.05	74.00	26.95
11590.00	21.81	AV	H	19.55	35.34	54.00	18.66
17385.00	34.61	PK	H	26.53	55.12	68.20	13.08

802.11ac80 Mode

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
High Channel: 5775							
5775.00	65.75	PK	H	39.44	99.17	N/A	N/A
5775.00	56.54	AV	H	39.44	89.96	N/A	N/A
5775.00	64.53	PK	V	39.44	97.95	N/A	N/A
5775.00	56.84	AV	V	39.44	90.26	N/A	N/A
5725.00	37.42	PK	H	39.48	70.88	122.20	51.32
5720.00	35.66	PK	H	39.49	69.13	110.80	41.67
5700.00	33.43	PK	H	39.51	66.92	105.20	38.28
5650.00	30.50	PK	H	39.49	63.97	68.20	4.23
5850.00	33.34	PK	H	39.49	66.81	122.20	55.39
5855.00	33.56	PK	H	39.51	67.05	110.80	43.75
5875.00	33.04	PK	H	39.60	66.62	105.20	38.58
5925.00	31.49	PK	H	39.68	65.15	68.20	3.05
11550.00	34.01	PK	H	19.77	47.76	74.00	26.24
11550.00	21.68	AV	H	19.77	35.43	54.00	18.57
17325.00	34.66	PK	H	26.83	55.47	68.20	12.73

Note:

Result = Reading + Factor - Distance extrapolation Factor

For 1-26.5GHz:




Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB = 6.02 dB


For 26.5-40GHz:

Distance extrapolation Factor = $20 \log(\text{specific distance [3m]}/\text{test distance [1m]})$ dB = 9.54 dB

**Worst Test plots(802.11a 5825MHz Mode High channel was the worst)
Horizontal:**



Fundamental Test with Band Rejection Filter

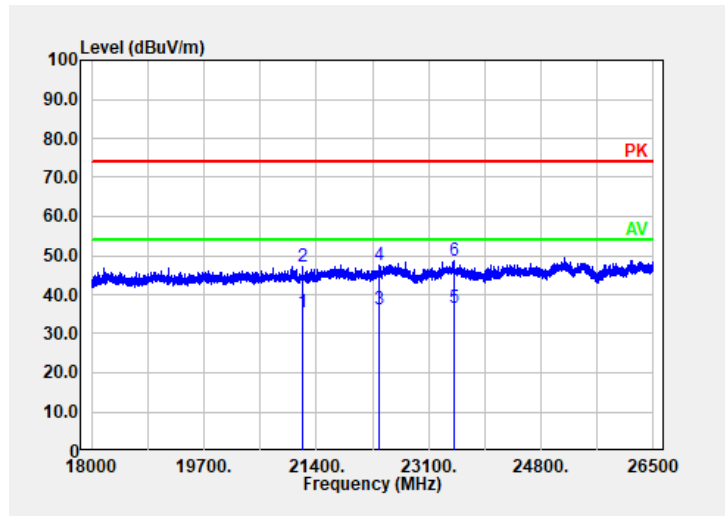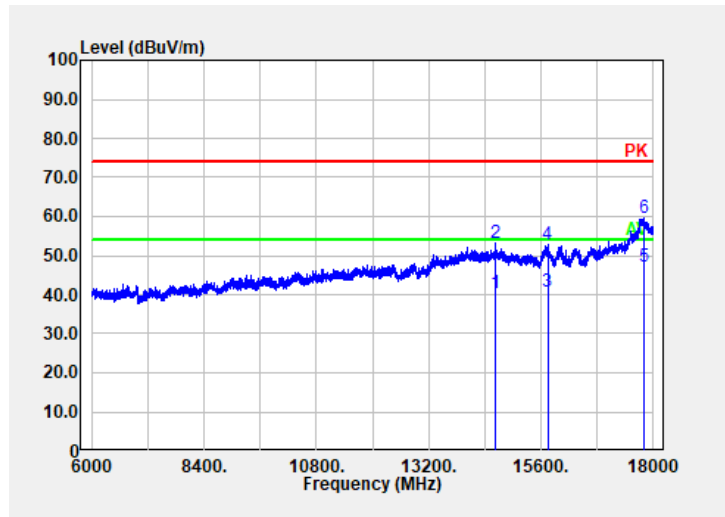
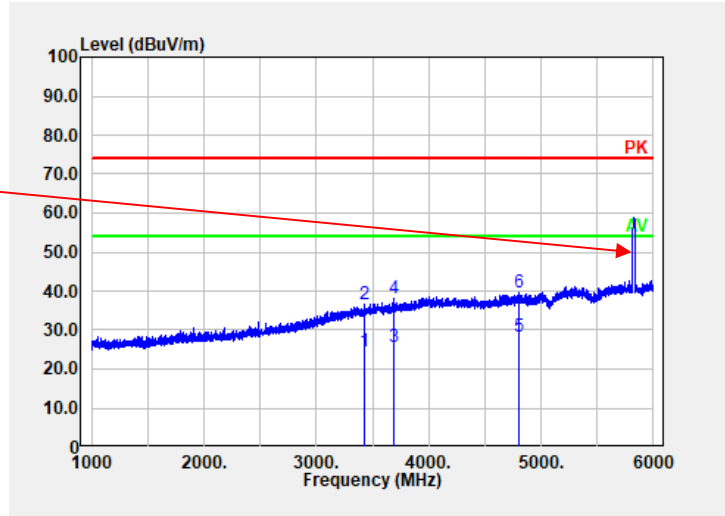


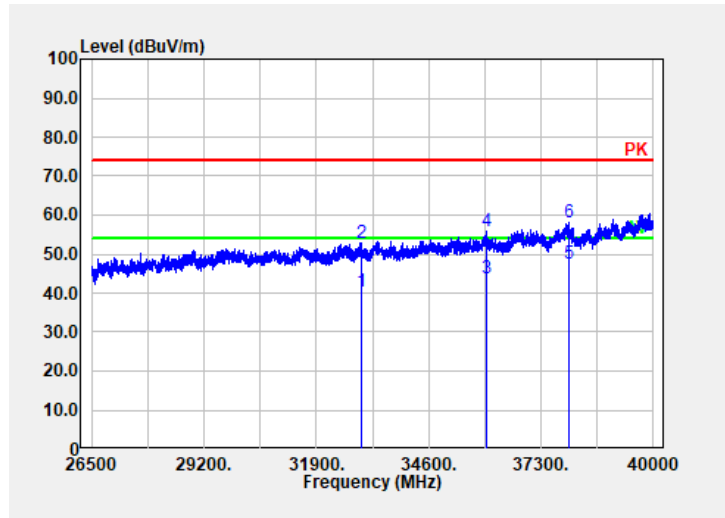

Vertical:

Fundamental Test with Band Rejection Filter

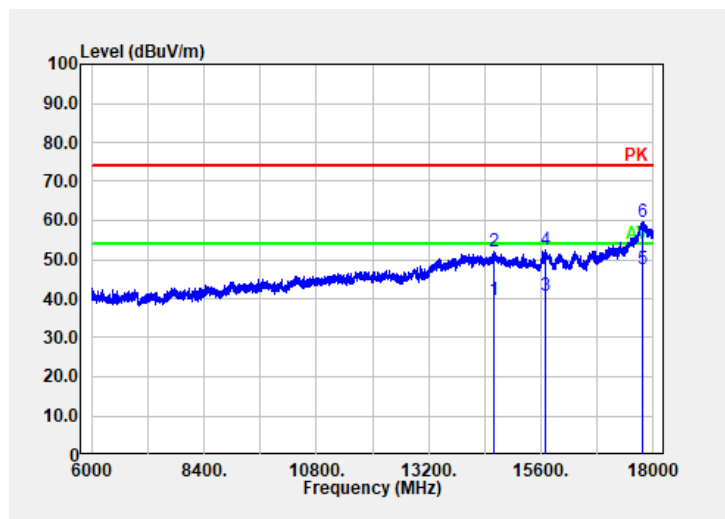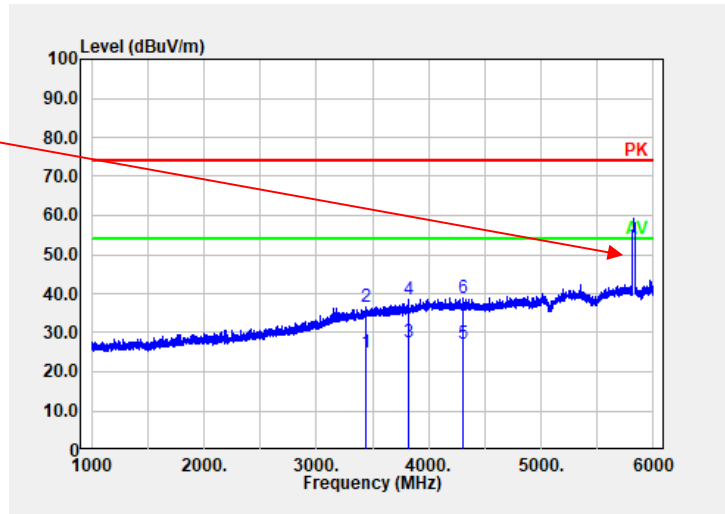

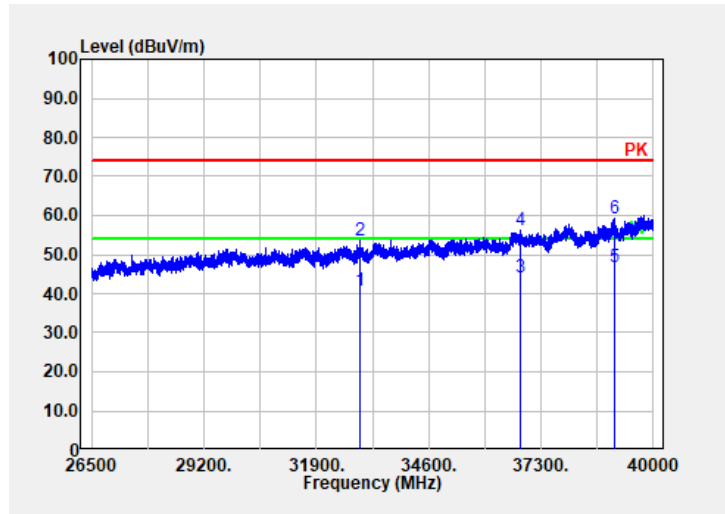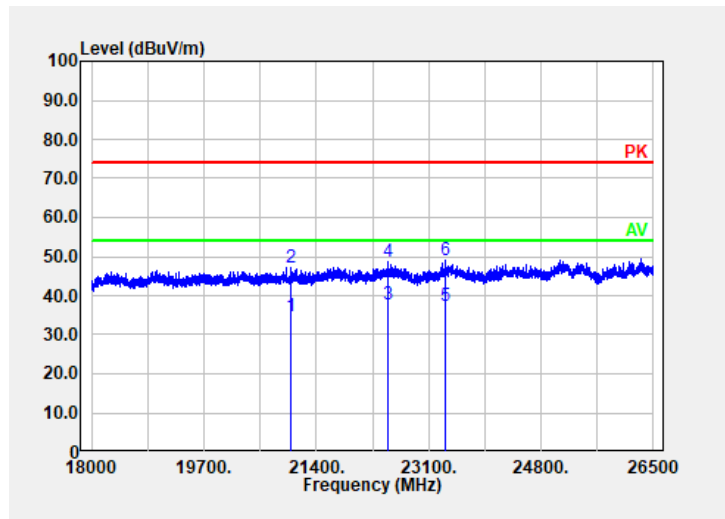

4.3 Emission Bandwidth:

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-27~2021-11-03
Test Site:	RF	Test Mode:	Transmitting
Tester:	Wolf Mo	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	25.9~28.4	Relative Humidity: (%)	52~60	ATM Pressure: (kPa)	100.6~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021-07-22	2022-07-21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5180	21.520	17.2
	5200	21.520	17.2
	5240	21.520	17.2
802.11n ht20	5180	26.400	18.4
	5200	26.400	18.32
	5240	24.320	18.32
802.11n ht40	5190	44.960	36.8
	5230	44.320	36.8
802.11ac vht80	5210	102.720	76.16

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5260	21.440	17.2
	5280	21.520	17.12
	5320	21.600	17.12
802.11n ht20	5260	23.600	18.32
	5280	22.160	18.32
	5320	22.800	18.32
802.11n ht40	5270	48.000	36.64
	5310	48.800	36.64
802.11ac vht80	5290	88.960	76.16


5470-5725 MHz:

Test Modes	Test Frequency (MHz)	26 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5500	21.520	17.2
	5580	21.440	17.2
	5700	21.520	17.28
802.11n ht20	5500	22.960	18.4
	5580	22.080	18.32
	5700	23.120	18.32
802.11n ht40	5510	47.200	36.64
	5550	46.080	36.64
	5670	45.120	36.48
	5710	51.462	36.64
802.11ac vht80	5530	104.320	75.84
	5610	95.744	76.16
	5690	82.560	76.16

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11a	5745	16.160	17.2
	5785	16.160	17.28
	5825	16.240	17.28
802.11n ht20	5745	17.280	18.32
	5785	17.520	18.4
	5825	17.280	18.4
802.11n ht40	5755	35.520	36.8
	5795	36.480	36.8
802.11ac vht80	5775	76.160	76.16
Note:6dB Emission Bandwidth Limit: ≥ 0.5 MHz			

5150-5250MHz:

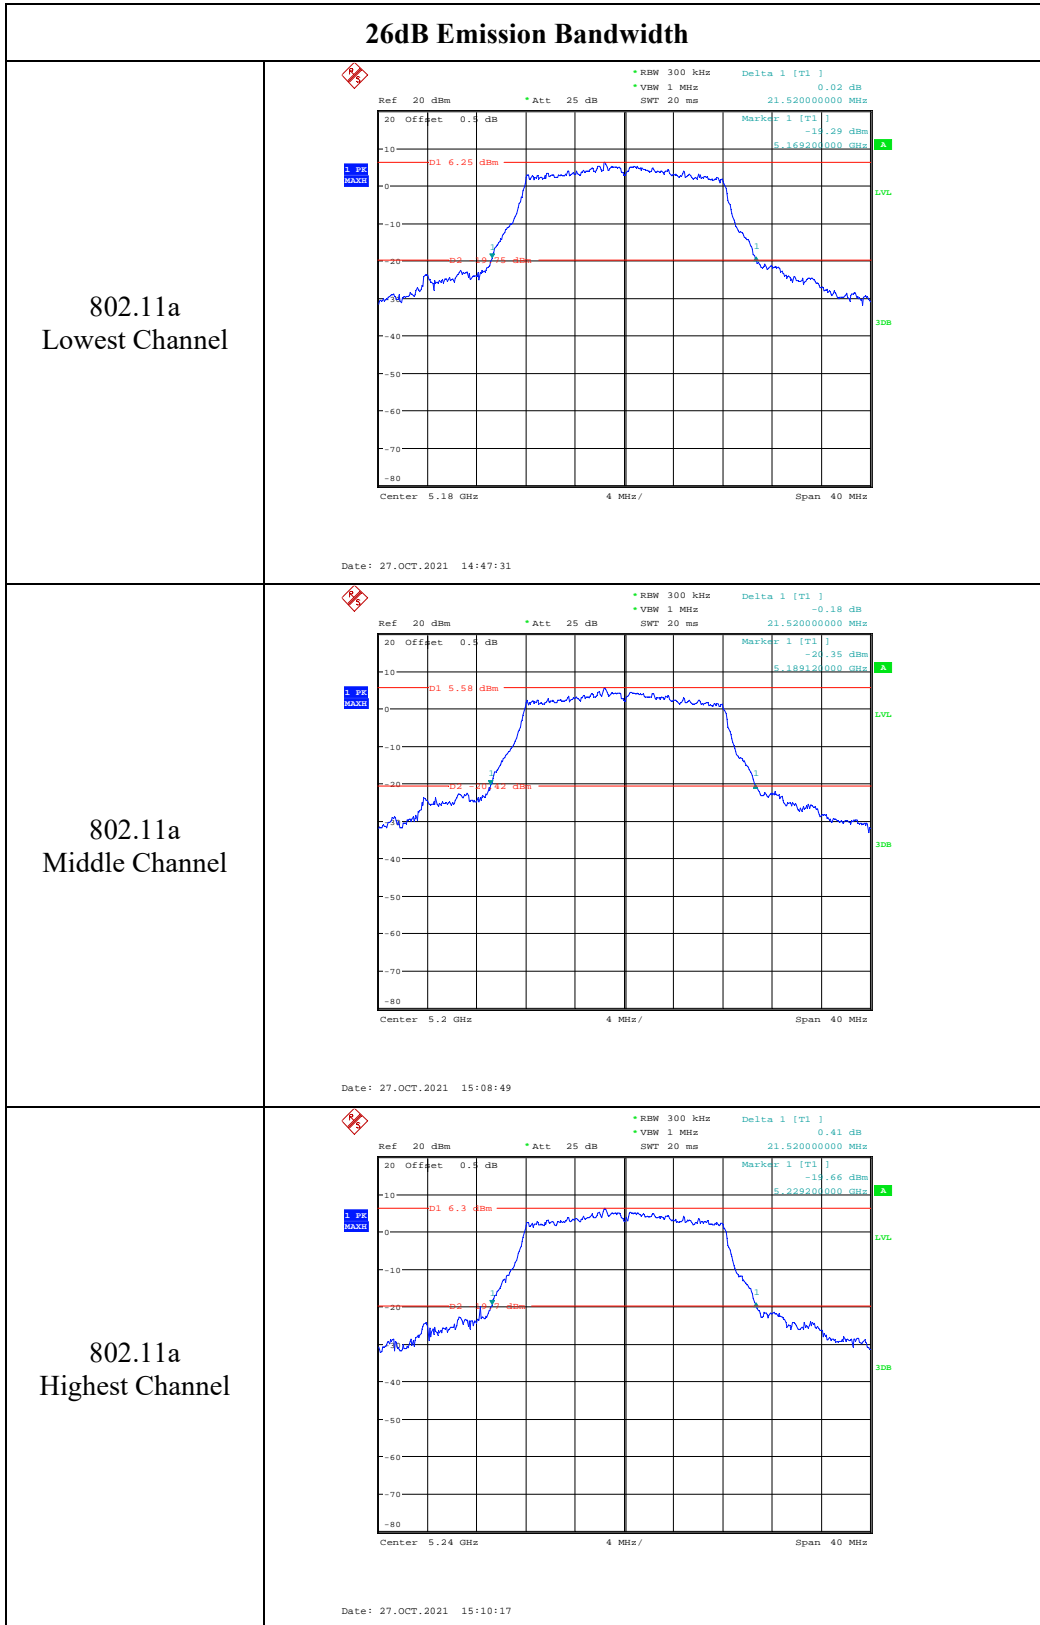

26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Date: 28.OCT.2021 14:16:53</p>
<p>802.11n ht20 Middle Channel</p>	<p>Date: 27.OCT.2021 15:31:57</p>
<p>802.11n ht20 Highest Channel</p>	<p>Date: 27.OCT.2021 15:33:10</p>

26dB Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Date: 28.OCT.2021 09:18:02</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 28.OCT.2021 09:20:20</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 28.OCT.2021 14:18:54</p>

99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] 6.00 dBm * VBW 1 MHz 5.179400000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>OSW 7.200000000 MHz Temp 1 [T1 OSW] -1.33 dBm 5.171360000 GHz Temp 2 [T1 OSW] -5.56 dBm 5.188560000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 14:47:48</p>
<p>802.11a Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] 5.63 dBm * VBW 1 MHz 5.198400000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>OSW 7.200000000 MHz Temp 1 [T1 OSW] -1.97 dBm 5.191280000 GHz Temp 2 [T1 OSW] -4.44 dBm 5.208480000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:09:03</p>
<p>802.11a Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Marker 1 [T1] 6.25 dBm * VBW 1 MHz 5.238400000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>OSW 7.200000000 MHz Temp 1 [T1 OSW] -1.25 dBm 5.231360000 GHz Temp 2 [T1 OSW] -4.28 dBm 5.248560000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:10:31</p>


99% Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 5.47 dBm *VBW 1 MHz 5.179880000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>OSW 8.400000000 MHz Temp 1 [T1 OSW] -73 dBm 5.170800000 GHz Temp 2 [T1 OSW] -80 dBm 5.189200000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:30:56</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 4.99 dBm *VBW 1 MHz 5.200880000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>OSW 8.320000000 MHz Temp 1 [T1 OSW] -73.36 dBm 5.190800000 GHz Temp 2 [T1 OSW] -80 dBm 5.209120000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:32:14</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 5.91 dBm *VBW 1 MHz 5.239040000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>OSW 8.320000000 MHz Temp 1 [T1 OSW] -73.86 dBm 5.230880000 GHz Temp 2 [T1 OSW] -80 dBm 5.249200000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:33:28</p>

99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Date: 28.OCT.2021 09:18:26</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 28.OCT.2021 09:20:39</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 28.OCT.2021 09:22:01</p>

5250-5350 MHz:

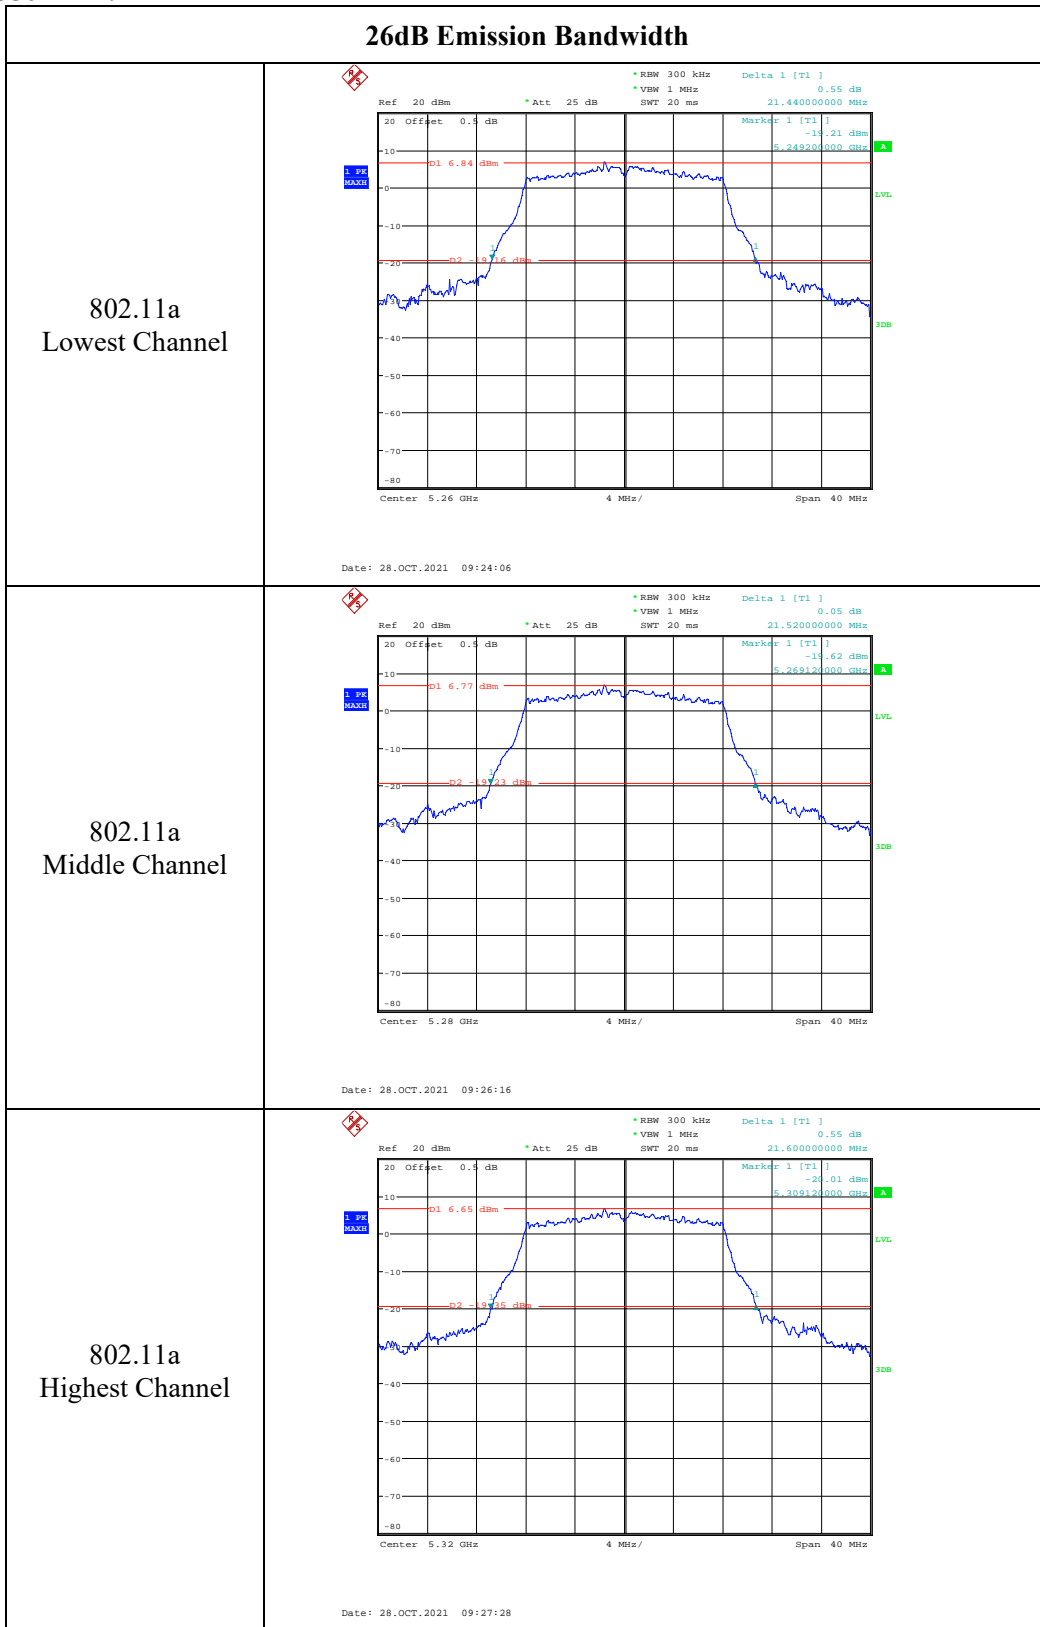

26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 300 kHz Delta 1 [T1]: 0.66 dB *VBW: 1 MHz *SWT: 20 ms 23.600000000 MHz</p> <p>Marker 1 [T1]: -24.87 dBm 5.24888000 GHz</p> <p>Center: 5.26 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 28.OCT.2021 14:21:27</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 300 kHz Delta 1 [T1]: 0.53 dB *VBW: 1 MHz *SWT: 20 ms 22.160000000 MHz</p> <p>Marker 1 [T1]: -20.32 dBm 5.26904000 GHz</p> <p>Center: 5.28 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 28.OCT.2021 14:22:37</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 300 kHz Delta 1 [T1]: -0.20 dB *VBW: 1 MHz *SWT: 20 ms 22.800000000 MHz</p> <p>Marker 1 [T1]: -19.96 dBm 5.30904000 GHz</p> <p>Center: 5.32 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 28.OCT.2021 14:23:23</p>

26dB Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] 0.43 dB *VBW 1 MHz 48.00000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB</p> <p>D1 3.86 dBm</p> <p>D2 -22.34 dBm</p> <p>Marker 1 [T1] 5.25000000 GHz -22.34 dBm</p> <p>Center 5.27 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 14:27:00</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Delta 1 [T1] 0.97 dB *VBW 1 MHz 48.80000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB</p> <p>D1 3.89 dBm</p> <p>D2 -22.84 dBm</p> <p>Marker 1 [T1] 5.28984000 GHz -22.84 dBm</p> <p>Center 5.31 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 14:28:44</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 1 MHz Delta 1 [T1] 0.19 dB *VBW 3 MHz 88.96000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB</p> <p>D1 6.04 dBm</p> <p>D2 -11.98 dBm</p> <p>Marker 1 [T1] 5.24680000 GHz -11.98 dBm</p> <p>Center 5.29 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 28.OCT.2021 14:32:30</p>

99% Emission Bandwidth

<p>802.11a Lowest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.259320000 GHz, 6.80 dBm</p> <p>OSW: 7.200000000 MHz, Temp 1 [T1] OSW: -26.26 dBm</p> <p>OSW: 5.251360000 GHz, Temp 2 [T1] OSW: -44.38 dBm</p> <p>OSW: 5.268560000 GHz, LVL: -44.38 dBm</p> <p>Center: 5.26 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:24:25</p>
<p>802.11a Middle Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.278400000 GHz, 6.73 dBm</p> <p>OSW: 7.120000000 MHz, Temp 1 [T1] OSW: -22.22 dBm</p> <p>OSW: 5.271360000 GHz, Temp 2 [T1] OSW: -44.38 dBm</p> <p>OSW: 5.288480000 GHz, LVL: -44.38 dBm</p> <p>Center: 5.28 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:26:35</p>
<p>802.11a Highest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 5.318320000 GHz, 6.87 dBm</p> <p>OSW: 7.120000000 MHz, Temp 1 [T1] OSW: -42.42 dBm</p> <p>OSW: 5.311440000 GHz, Temp 2 [T1] OSW: -44.38 dBm</p> <p>OSW: 5.328560000 GHz, LVL: -44.38 dBm</p> <p>Center: 5.32 GHz, 4 MHz/, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:27:46</p>


99% Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Date: 28.OCT.2021 09:29:47</p>
<p>802.11n ht20 Middle Channel</p>	<p>Date: 28.OCT.2021 09:33:09</p>
<p>802.11n ht20 Highest Channel</p>	<p>Date: 28.OCT.2021 09:34:33</p>

99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 500 kHz, VBW: 2 MHz, SWT: 20 ms, Marker 1 [T1]: 5.54 dBm, 5.26980000 GHz</p> <p>OSW: 6.64000000 MHz, Temp 1 [T1] OSW: -1.11 dBm, 5.25176000 GHz, Temp 2 [T1] OSW: -1.79 dBm, 5.28840000 GHz</p> <p>Center: 5.27 GHz, Span: 80 MHz</p> <p>Date: 28.OCT.2021 09:38:14</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 500 kHz, VBW: 2 MHz, SWT: 20 ms, Marker 1 [T1]: 5.51 dBm, 5.31288000 GHz</p> <p>OSW: 6.64000000 MHz, Temp 1 [T1] OSW: -1.30 dBm, 5.29176000 GHz, Temp 2 [T1] OSW: -1.79 dBm, 5.32840000 GHz</p> <p>Center: 5.31 GHz, Span: 80 MHz</p> <p>Date: 28.OCT.2021 09:40:03</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.65 dBm, 5.28168000 GHz</p> <p>OSW: 6.16000000 MHz, Temp 1 [T1] OSW: -1.83 dBm, 5.25192000 GHz, Temp 2 [T1] OSW: -1.15 dBm, 5.32808000 GHz</p> <p>Center: 5.29 GHz, Span: 160 MHz</p> <p>Date: 28.OCT.2021 09:42:46</p>

5470-5725 MHz:

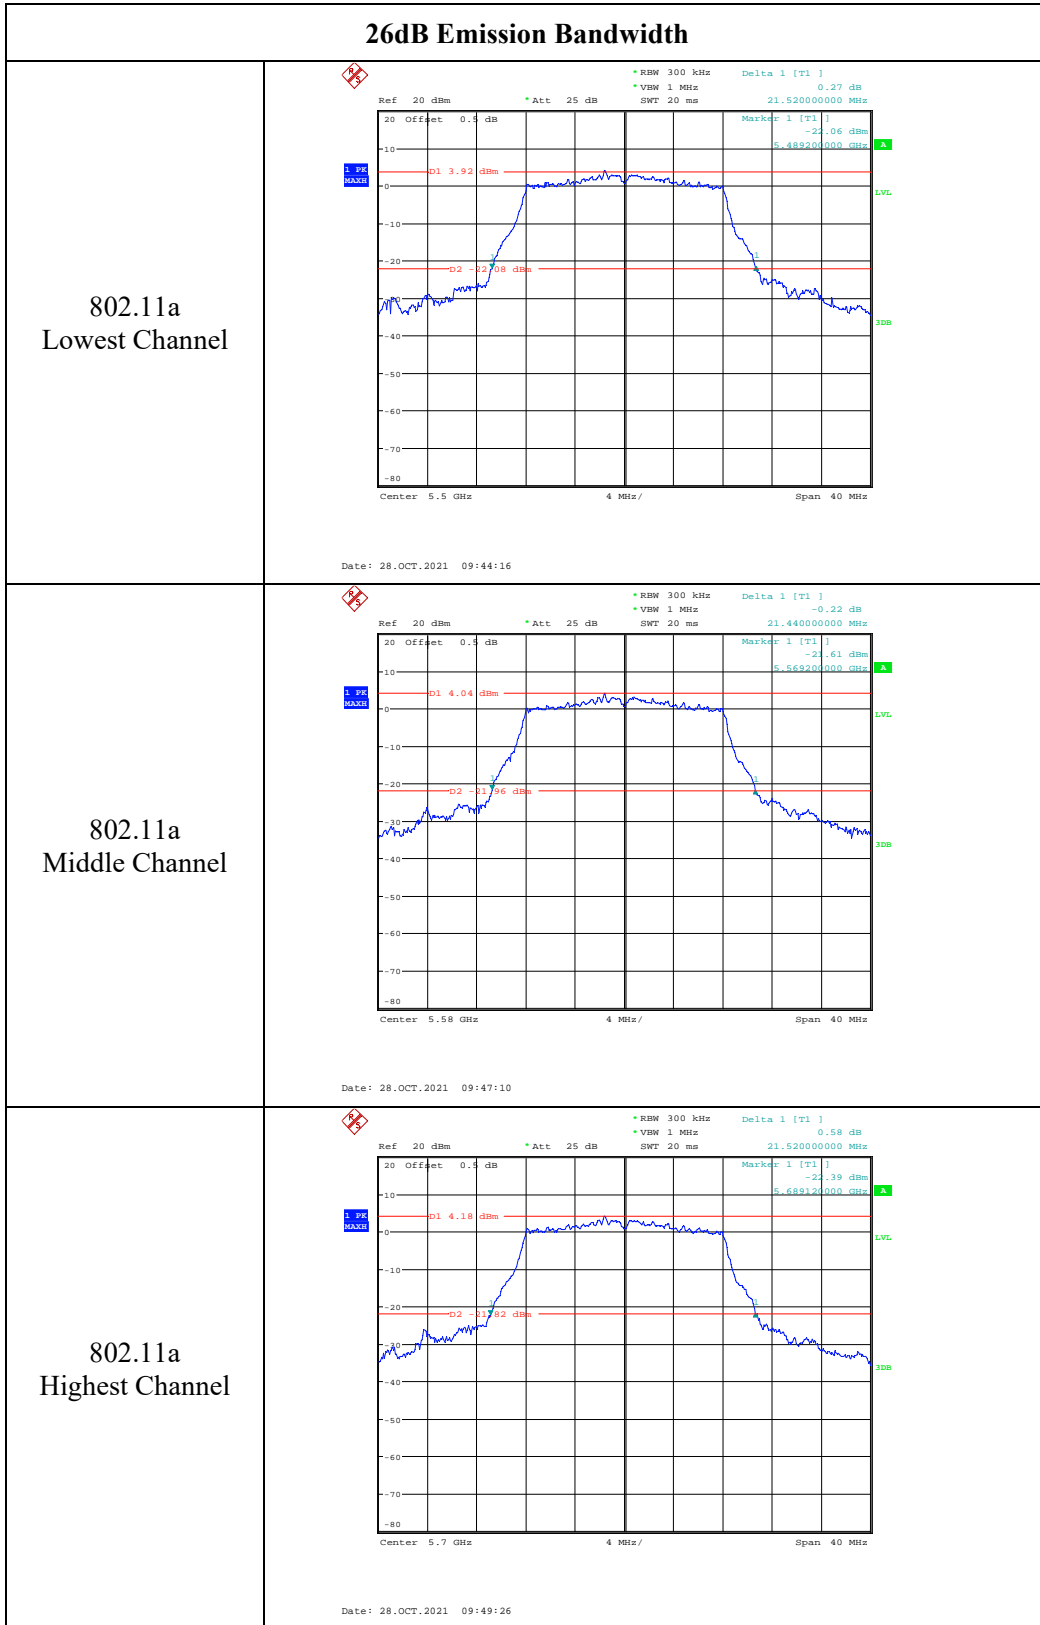


26dB Emission Bandwidth

<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Delta 1 [T1] 0.35 dB * VBW 1 MHz 22.960000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.30 dBm 5.489040000 GHz</p> <p>D1 2.98 dBm D2 -21.30 dBm</p> <p>Center 5.5 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 14:35:28</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Delta 1 [T1] 0.60 dB * VBW 1 MHz 22.080000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.18 dBm 5.569040000 GHz</p> <p>D1 3.42 dBm D2 -21.18 dBm</p> <p>Center 5.58 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 09:56:55</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 300 kHz Delta 1 [T1] -0.26 dB * VBW 1 MHz 23.120000000 MHz SWT 20 ms</p> <p>Offset 0.4 dB Marker 1 [T1] -21.17 dBm 5.687840000 GHz</p> <p>D1 3.61 dBm D2 -21.17 dBm</p> <p>Center 5.7 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 09:58:58</p>

26dB Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Date: 28.OCT.2021 14:36:05</p>
<p>802.11n ht40 Middle Channel</p>	<p>Date: 28.OCT.2021 14:36:41</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 28.OCT.2021 10:07:17</p>

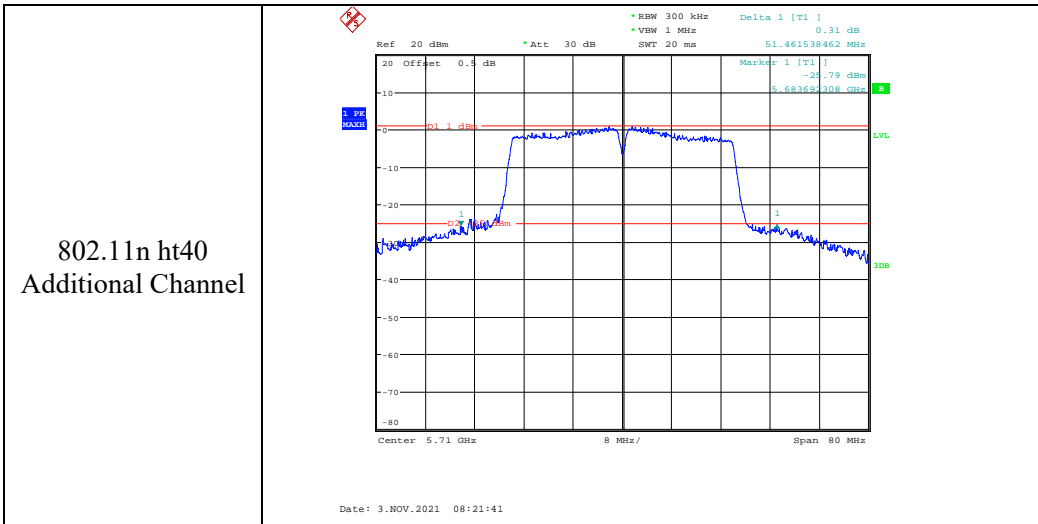




26dB Emission Bandwidth

<p>802.11ac vht80 Lowest Channel</p>	<p>Date: 28.OCT.2021 14:38:22</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 3.NOV.2021 08:31:49</p>
<p>802.11ac vht80 Additional Channel</p>	<p>Date: 28.OCT.2021 14:39:06</p>

99% Emission Bandwidth


<p>802.11a Lowest Channel</p>	<p>Ref: 20 dBm, Offset: 0.4 dB, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 4.00 dBm, 5.498320000 GHz</p> <p>Center: 5.5 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:44:35</p>
<p>802.11a Middle Channel</p>	<p>Ref: 20 dBm, Offset: 0.4 dB, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 4.02 dBm, 5.578320000 GHz</p> <p>Center: 5.58 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:47:29</p>
<p>802.11a Highest Channel</p>	<p>Ref: 20 dBm, Offset: 0.4 dB, Att: 25 dB, RBW: 300 kHz, VBW: 1 MHz, SWT: 20 ms, Marker 1 [T1]: 4.22 dBm, 5.698400000 GHz</p> <p>Center: 5.7 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:49:47</p>

99% Emission Bandwidth
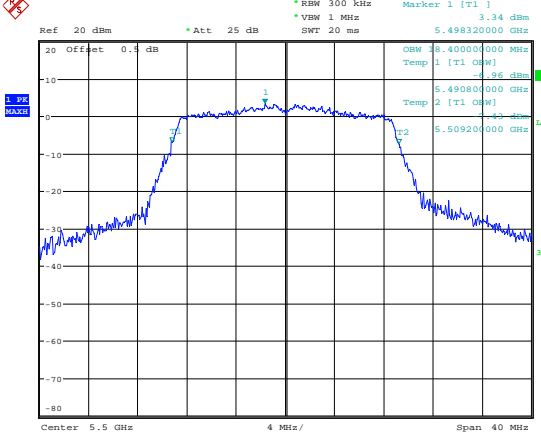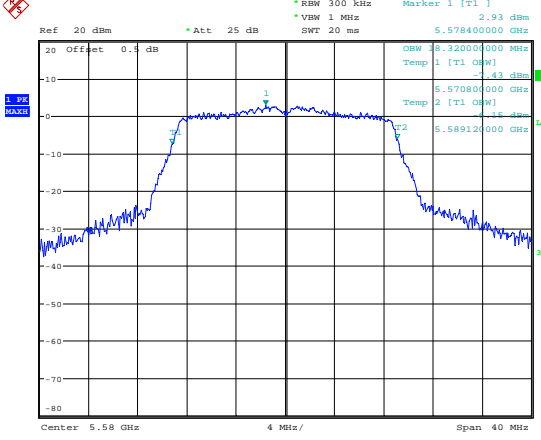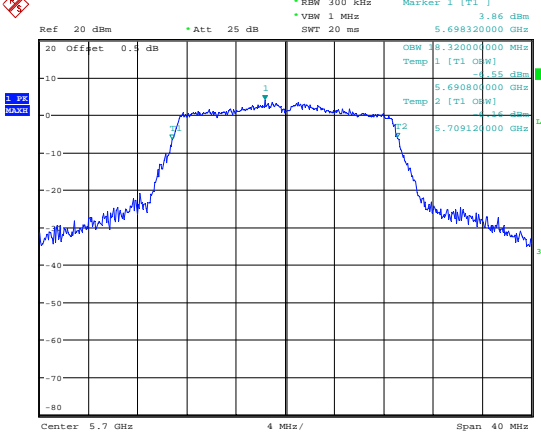
<p>802.11n ht20 Lowest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 3.34 dBm *VBW 1 MHz 5.498320000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 8.40000000 MHz Temp 1 [T1 OSW] -1.96 dBm 5.490800000 GHz Temp 2 [T1 OSW] -4.43 dBm 5.509200000 GHz</p> <p>Center 5.5 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 09:55:59</p>
<p>802.11n ht20 Middle Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 2.93 dBm *VBW 1 MHz 5.578400000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 8.32000000 MHz Temp 1 [T1 OSW] -1.43 dBm 5.570800000 GHz Temp 2 [T1 OSW] -4.43 dBm 5.589120000 GHz</p> <p>Center 5.58 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 09:57:16</p>
<p>802.11n ht20 Highest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 3.86 dBm *VBW 1 MHz 5.698320000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 8.32000000 MHz Temp 1 [T1 OSW] -1.55 dBm 5.690800000 GHz Temp 2 [T1 OSW] -4.16 dBm 5.709120000 GHz</p> <p>Center 5.7 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 09:59:20</p>

99% Emission Bandwidth


<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 500 kHz Marker 1 [T1] 2.74 dBm * VBW 2 MHz 5.505360000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 6.640000000 MHz Temp 1 [T1 OSW] -1.62 dBm 10 5.491760000 GHz Temp 2 [T1 OSW] -1.88 dBm 0 5.528400000 GHz -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.51 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 10:01:48</p>
<p>802.11n ht40 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 500 kHz Marker 1 [T1] 2.01 dBm * VBW 2 MHz 5.546000000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 6.640000000 MHz Temp 1 [T1 OSW] -1.96 dBm 10 5.531760000 GHz Temp 2 [T1 OSW] -1.45 dBm 0 5.568400000 GHz -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.55 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 10:04:08</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 500 kHz Marker 1 [T1] 3.69 dBm * VBW 2 MHz 5.666800000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB OSW 6.480000000 MHz Temp 1 [T1 OSW] -1.54 dBm 10 5.651760000 GHz Temp 2 [T1 OSW] -1.70 dBm 0 5.688240000 GHz -10 -20 -30 -40 -50 -60 -70 -80</p> <p>Center 5.67 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 10:07:36</p>

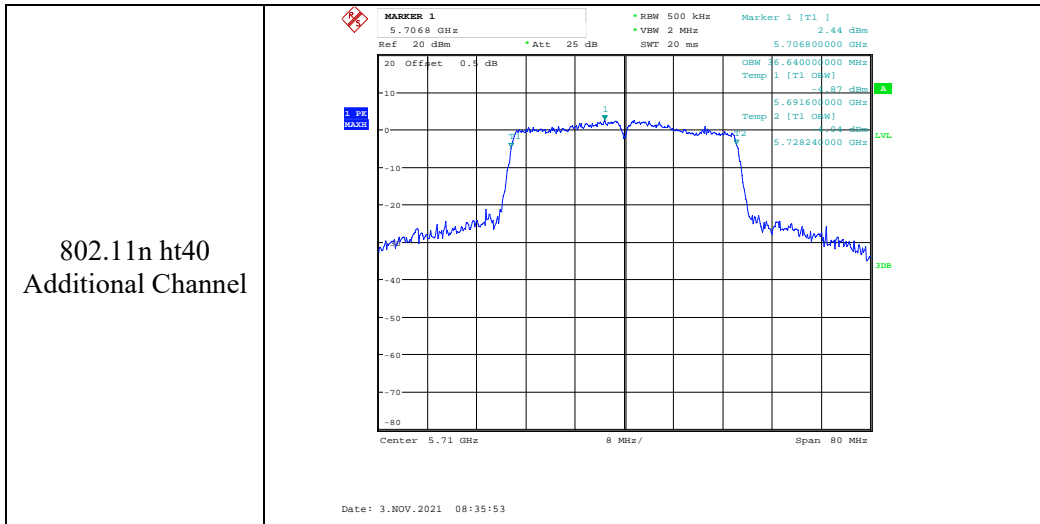

99% Emission Bandwidth


<p>802.11ac vht80 Lowest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.531380000 GHz, 2.31 dBm</p> <p>OSW: 5.840000000 MHz, Temp 1 [T1 OSW]: -0.09 dBm</p> <p>OSW: 5.492240000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>OSW: 5.568080000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>Center: 5.53 GHz, 16 MHz/, Span: 160 MHz</p> <p>Date: 28.OCT.2021 10:09:08</p>
<p>802.11ac vht80 Middle Channel</p>	<p>MARKER 1: 5.61288 GHz, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.612880000 GHz, 2.56 dBm</p> <p>Ref: 20 dBm, Att: 25 dB</p> <p>OSW: 6.160000000 MHz, Temp 1 [T1 OSW]: -0.02 dBm</p> <p>OSW: 5.571920000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>OSW: 5.648080000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>Center: 5.61 GHz, 16 MHz/, Span: 160 MHz</p> <p>Date: 3.NOV.2021 08:32:59</p>
<p>802.11ac vht80 Highest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 5.693200000 GHz, 3.20 dBm</p> <p>OSW: 6.160000000 MHz, Temp 1 [T1 OSW]: -0.84 dBm</p> <p>OSW: 5.651920000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>OSW: 5.728080000 GHz, Temp 2 [T1 OSW]: -3.36 dBm</p> <p>Center: 5.69 GHz, 16 MHz/, Span: 160 MHz</p> <p>Date: 28.OCT.2021 10:10:29</p>

5725-5850MHz:

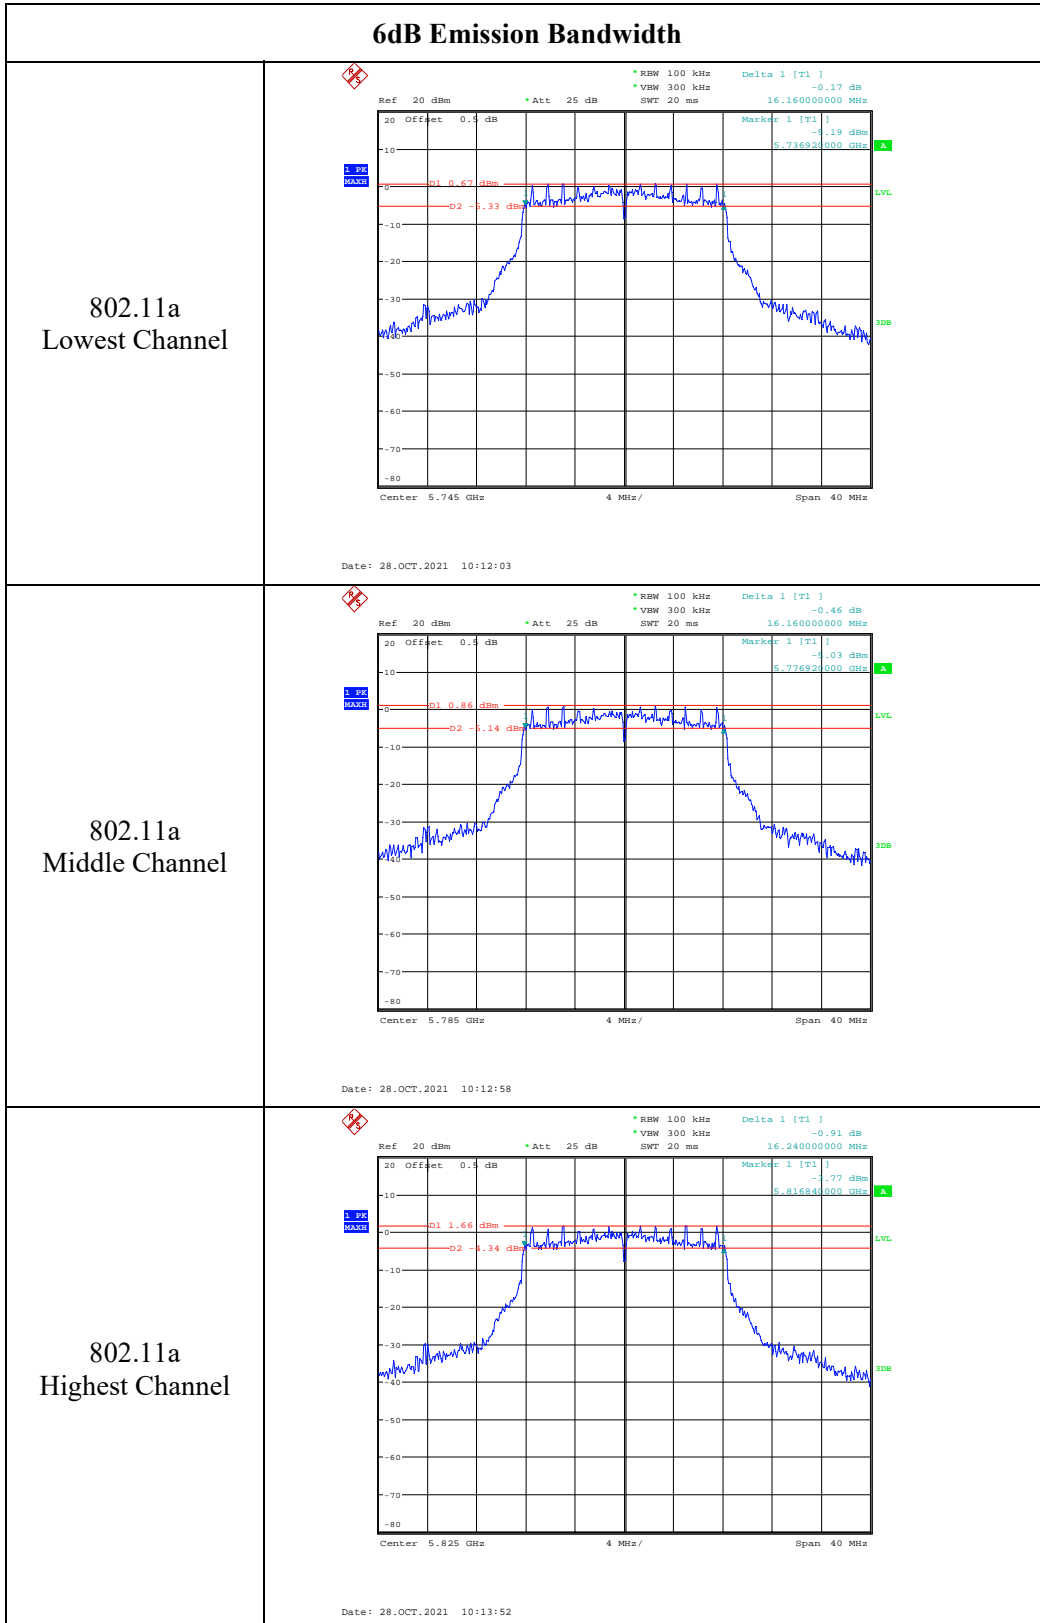


6dB Emission Bandwidth

802.11n ht20
Lowest Channel

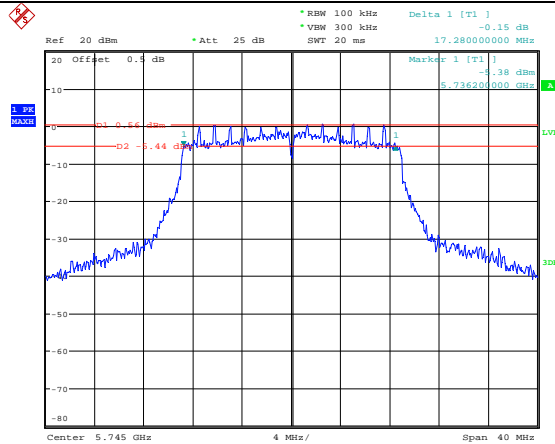


Date: 28.OCT.2021 10:14:53

802.11n ht20
Middle Channel

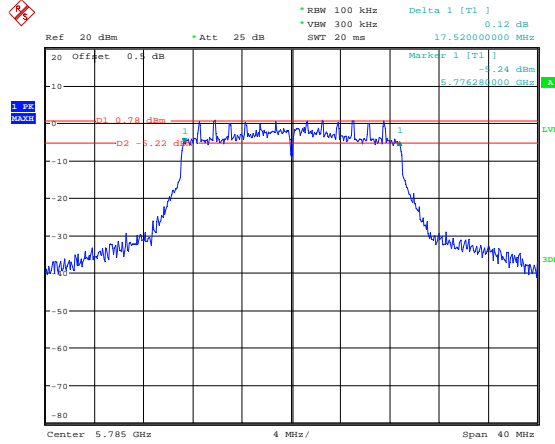

Date: 28.OCT.2021 10:15:52

802.11n ht20
Highest Channel

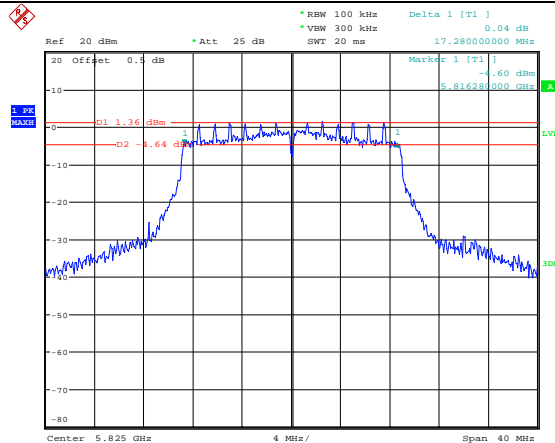


Date: 28.OCT.2021 10:16:51

6dB Emission Bandwidth	
802.11n ht40 Lowest Channel	<p style="font-size: small;">Ref: 20 dBm *Att: 25 dB *RBW: 100 kHz Delta 1 [T1]: -0.36 dB *VBW: 300 kHz *SWT: 20 ms Marker 1 [T1]: -1.31 dBm 35.520000000 MHz 5.737240000 GHz</p> <p style="font-size: small;">Center: 5.755 GHz 8 MHz/ Span: 80 MHz</p> <p style="font-size: x-small;">Date: 28.OCT.2021 10:28:27</p>
802.11n ht40 Highest Channel	<p style="font-size: small;">Ref: 20 dBm *Att: 25 dB *RBW: 100 kHz Delta 1 [T1]: -0.19 dB *VBW: 300 kHz *SWT: 20 ms Marker 1 [T1]: -1.54 dBm 36.480000000 MHz 5.776760000 GHz</p> <p style="font-size: small;">Center: 5.795 GHz 8 MHz/ Span: 80 MHz</p> <p style="font-size: x-small;">Date: 28.OCT.2021 10:29:53</p>
802.11ac vht80 Middle Channel	<p style="font-size: small;">Ref: 20 dBm *Att: 25 dB *RBW: 100 kHz Delta 1 [T1]: -0.43 dB *VBW: 300 kHz *SWT: 20 ms Marker 1 [T1]: -1.54 dBm 76.160000000 MHz 5.726520000 GHz</p> <p style="font-size: small;">Center: 5.775 GHz 16 MHz/ Span: 160 MHz</p> <p style="font-size: x-small;">Date: 28.OCT.2021 14:04:33</p>


99% Emission Bandwidth

802.11a
Lowest Channel

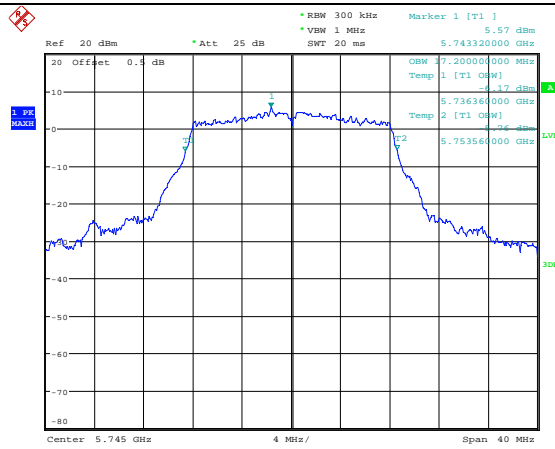


Date: 28.OCT.2021 10:12:23

802.11a
Middle Channel

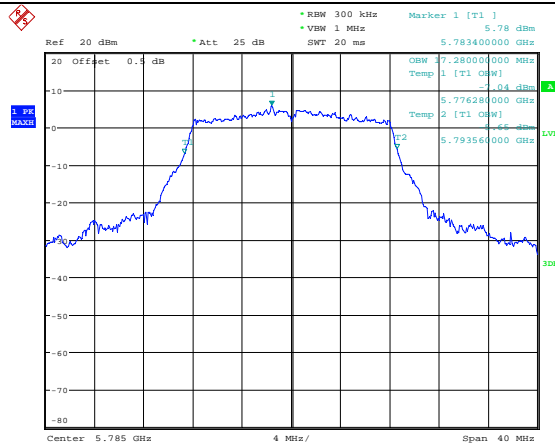




Date: 28.OCT.2021 10:13:17

802.11a
Highest Channel

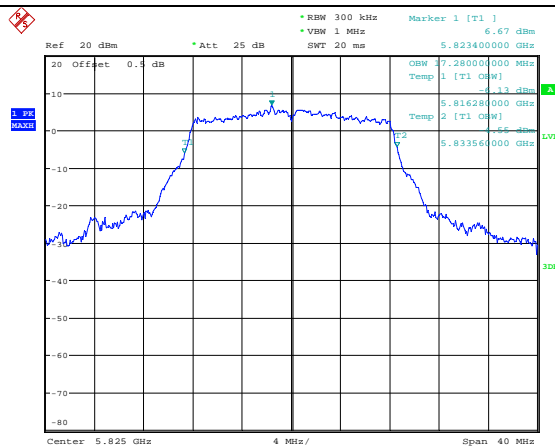

Date: 28.OCT.2021 10:14:14

99% Emission Bandwidth
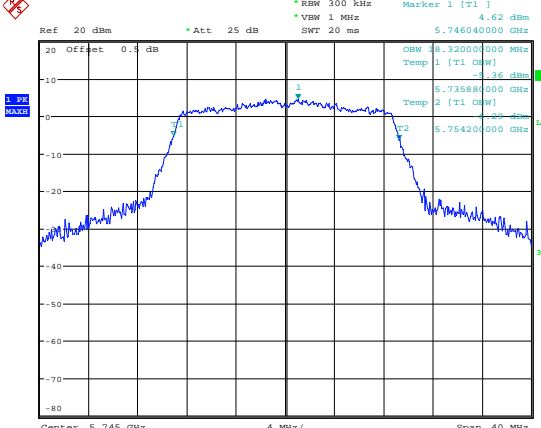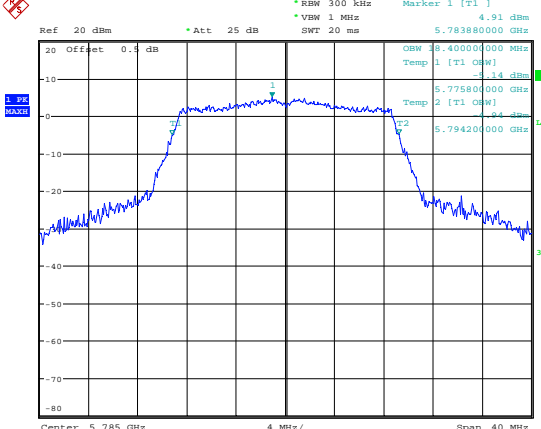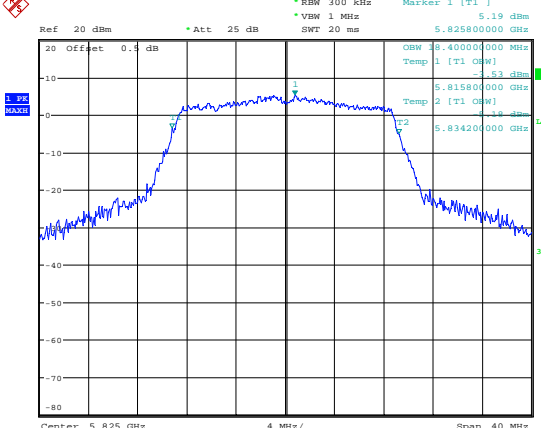
<p>802.11n ht20 Lowest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 4.62 dBm *VBW 1 MHz 5.746040000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>Temp 1 [T1] 0MHz -36 dBm 5.735880000 GHz Temp 2 [T1] 0MHz -30 dBm 5.754200000 GHz</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:15:15</p>
<p>802.11n ht20 Middle Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 4.91 dBm *VBW 1 MHz 5.783880000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>Temp 1 [T1] 0MHz -34 dBm 5.775800000 GHz Temp 2 [T1] 0MHz -34 dBm 5.794200000 GHz</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:16:14</p>
<p>802.11n ht20 Highest Channel</p>	 <p>Ref 20 dBm *Att 25 dB *RBW 300 kHz Marker 1 [T1] 5.19 dBm *VBW 1 MHz 5.825800000 GHz SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>1 P1 MAX</p> <p>Temp 1 [T1] 0MHz -33 dBm 5.815800000 GHz Temp 2 [T1] 0MHz -33 dBm 5.834200000 GHz</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:17:13</p>

99% Emission Bandwidth

<p>802.11n ht40 Lowest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 500 kHz Marker 1 [T1] 4.45 dBm * VBW 2 MHz 5.75220000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>10</p> <p>0</p> <p>-10</p> <p>-20</p> <p>-30</p> <p>-40</p> <p>-50</p> <p>-60</p> <p>-70</p> <p>-80</p> <p>Center 5.755 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 10:28:49</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 500 kHz Marker 1 [T1] 5.05 dBm * VBW 2 MHz 5.79628000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>10</p> <p>0</p> <p>-10</p> <p>-20</p> <p>-30</p> <p>-40</p> <p>-50</p> <p>-60</p> <p>-70</p> <p>-80</p> <p>Center 5.795 GHz 8 MHz/ Span 80 MHz</p> <p>Date: 28.OCT.2021 10:30:15</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref 20 dBm * Att 25 dB * RBW 1 MHz Marker 1 [T1] 4.67 dBm * VBW 3 MHz 5.77308000 GHz * SWT 20 ms</p> <p>20 Offset 0.4 dB</p> <p>10</p> <p>0</p> <p>-10</p> <p>-20</p> <p>-30</p> <p>-40</p> <p>-50</p> <p>-60</p> <p>-70</p> <p>-80</p> <p>Center 5.775 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 28.OCT.2021 10:33:31</p>

4.4 Maximum Conducted Output Power:

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-27~2021-11-03
Test Site:	RF	Test Mode:	Transmitting
Tester:	Wolf Mo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~28.4	Relative Humidity: (%)	52~60	ATM Pressure: (kPa)	100.6~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY54080015	2021-07-22	2022-07-21

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power (dBm)		EIRP (dBm)	
		Result	FCC Limit	Result	RSS-247 Limit
802.11a	5180	13.62	24	16.62	22.36
	5200	13.37	24	16.37	22.36
	5240	14.12	24	17.12	22.36
802.11n ht20	5180	13.02	24	16.02	22.65
	5200	13.25	24	16.25	22.63
	5240	13.82	24	16.82	22.63
802.11n ht40	5190	13.33	24	16.33	23.00
	5230	13.39	24	16.39	23.00
802.11ac vht80	5210	13.07	24	16.07	23.00

Note:
The device is a client device.
The duty cycle factor has been calculated into the test data.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)			EIRP (dBm)	
		Result	FCC Limit	RSS-247 Limit	Result	RSS-247 Limit
802.11a	5260	13.92	24	23.36	16.92	29.36
	5280	14.09	24	23.34	17.09	29.34
	5320	13.91	24	23.34	16.91	29.34
802.11n ht20	5260	13.6	24	23.63	16.6	29.63
	5280	13.7	24	23.63	16.7	29.63
	5320	13.78	24	23.63	16.78	29.63
802.11n ht40	5270	14.14	24	24.00	17.14	30
	5310	14.38	24	24.00	17.38	30
802.11ac vht80	5290	13.47	24	24.00	16.47	30

Note:
The device is a client device.
The duty cycle factor has been calculated into the test data.

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)			EIRP (dBm)	
		Result	FCC Limit	RSS-247 Limit	Result	RSS-247 Limit
802.11a	5500	11.63	24	23.36	14.63	29.36
	5580	10.85	24	23.36	13.85	29.36
	5700	11.82	24	23.38	14.82	29.38
802.11n ht20	5500	11.12	24	23.65	14.12	29.65
	5580	10.58	24	23.63	13.58	29.63
	5700	11.47	24	23.63	14.47	29.63
802.11n ht40	5510	11.44	24	24.00	14.44	30
	5550	11.16	24	24.00	14.16	30
	5670	12.04	24	24.00	15.04	30
	5710	11.56	24	24.00	14.56	30
802.11ac vht80	5530	11.09	24	24.00	14.09	30
	5610	11.34	24	24.00	14.34	30
	5690	11.43	24	24.00	14.43	30

Note:
The device is a client device.
The duty cycle factor has been calculated into the test data.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	12.76	30
	5785	13.36	30
	5825	13.37	30
802.11n ht20	5745	12.26	30
	5785	12.92	30
	5825	13.33	30
802.11n ht40	5755	12.84	30
	5795	13.22	30
802.11ac vht80	5775	12.65	30

Note:
The duty cycle factor has been calculated into the test data.

4.5 Maximum power spectral density:

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-27~2021-11-03
Test Site:	RF	Test Mode:	Transmitting
Tester:	Wolf Mo	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.9~28.4	Relative Humidity: (%)	52~60	ATM Pressure: (kPa)	100.6~101.5
----------------------	-----------	------------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/MHz)		Maximum EIRP Power Spectral Density (dBm/MHz)	
		Result	Limit	Result	Limit
802.11a	5180	3.20	11	6.2	10
	5200	2.61	11	5.61	10
	5240	3.30	11	6.3	10
802.11n ht20	5180	2.78	11	5.78	10
	5200	2.83	11	5.83	10
	5240	3.15	11	6.15	10
802.11n ht40	5190	0.05	11	3.05	10
	5230	0.24	11	3.24	10
802.11ac vht80	5210	-3.51	11	-0.51	10

Note:

The device is a client device.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/MHz)	
		Result	Limit
802.11a	5260	3.90	11
	5280	3.77	11
	5320	3.93	11
802.11n ht20	5260	3.14	11
	5280	3.14	11
	5320	3.18	11
802.11n ht40	5270	0.75	11
	5310	0.97	11
802.11ac vht80	5290	-2.88	11

Note: Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5470-525 MHz:

Test Modes	Test Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/MHz)	
		Result	Limit
802.11a	5500	1.15	11
	5580	1.14	11
	5700	1.25	11
802.11n ht20	5500	0.81	11
	5580	0.24	11
	5700	0.67	11
802.11n ht40	5510	-1.81	11
	5550	-2.76	11
	5670	-1.27	11
	5710	-1.74	11
802.11ac vht80	5530	-5.66	11
	5610	-5.61	11
	5690	-5.18	11

Note: Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/500kHz)	
		Result	Limit
802.11a	5745	0.27	30
	5785	0.55	30
	5825	0.91	30
802.11n ht20	5745	-0.18	30
	5785	0.11	30
	5825	0.40	30
802.11n ht40	5755	-2.84	30
	5795	-2.40	30
802.11ac vht80	5775	-5.99	30

Note: Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

5150-5250MHz:

Maximum power spectral density	
<p>802.11a Lowest Channel</p>	<p style="text-align: center;">Date: 27.OCT.2021 14:47:58</p>
<p>802.11a Middle Channel</p>	<p style="text-align: center;">Date: 27.OCT.2021 15:09:13</p>
<p>802.11a Highest Channel</p>	<p style="text-align: center;">Date: 27.OCT.2021 15:10:41</p>

Maximum power spectral density




<p>802.11n ht20 Lowest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 1 MHz *VBW 3 MHz *Marker 1 [T1] 2.78 dBm SWT 20 ms 5.180000000 GHz</p> <p>Center 5.18 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:31:06</p>
<p>802.11n ht20 Middle Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 1 MHz *VBW 3 MHz *Marker 1 [T1] 2.83 dBm SWT 20 ms 5.199200000 GHz</p> <p>Center 5.2 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:32:24</p>
<p>802.11n ht20 Highest Channel</p>	<p>Ref 20 dBm *Att 25 dB *RBW 1 MHz *VBW 3 MHz *Marker 1 [T1] 3.15 dBm SWT 20 ms 5.239200000 GHz</p> <p>Center 5.24 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 27.OCT.2021 15:33:41</p>

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] 0.05 dBm *VBW: 3 MHz 5.198400000 GHz *SWT: 20 ms</p> <p>Center: 5.19 GHz 8 MHz/ Span: 80 MHz</p> <p>Date: 28.OCT.2021 09:18:41</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] 0.24 dBm *VBW: 3 MHz 5.228240000 GHz *SWT: 20 ms</p> <p>Center: 5.23 GHz 8 MHz/ Span: 80 MHz</p> <p>Date: 28.OCT.2021 09:20:54</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] -3.51 dBm *VBW: 3 MHz 5.208400000 GHz *SWT: 20 ms</p> <p>Center: 5.21 GHz 16 MHz/ Span: 160 MHz</p> <p>Date: 28.OCT.2021 09:22:16</p>

5250-5350 MHz:

Maximum power spectral density
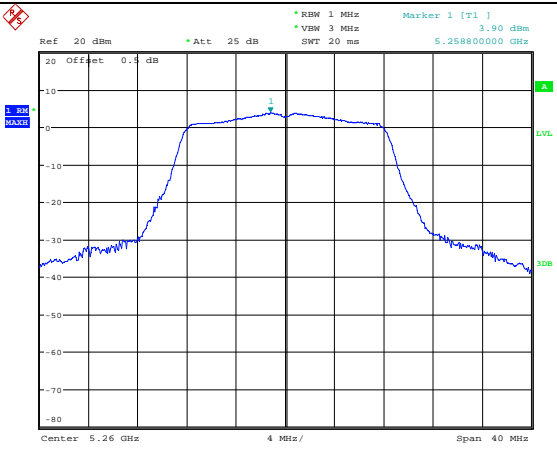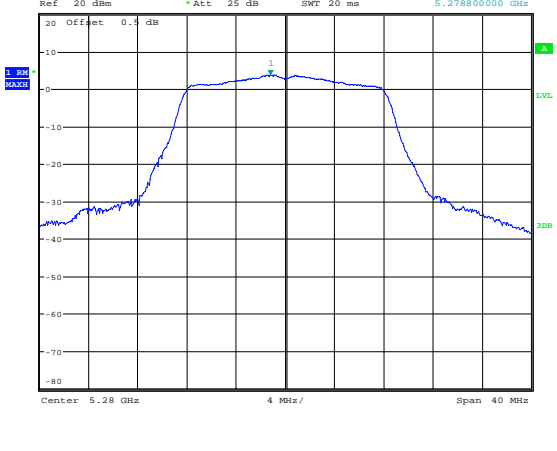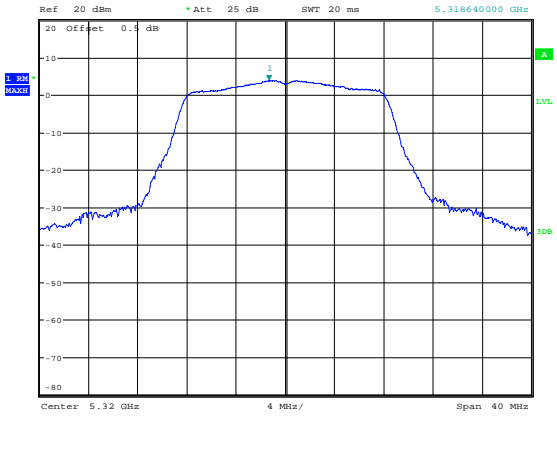
<p>802.11a Lowest Channel</p>	 <p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 3.90 dBm, 5.258900000 GHz</p> <p>Center: 5.26 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:24:39</p>
<p>802.11a Middle Channel</p>	 <p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 3.77 dBm, 5.278800000 GHz</p> <p>Center: 5.28 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:26:53</p>
<p>802.11a Highest Channel</p>	 <p>Ref: 20 dBm, Att: 25 dB, RBW: 1 MHz, VBW: 3 MHz, SWT: 20 ms, Marker 1 [T1]: 3.93 dBm, 5.318640000 GHz</p> <p>Center: 5.32 GHz, Span: 40 MHz</p> <p>Date: 28.OCT.2021 09:28:03</p>


Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Date: 28.OCT.2021 09:30:05</p>
<p>802.11n ht20 Middle Channel</p>	<p>Date: 28.OCT.2021 09:33:26</p>
<p>802.11n ht20 Highest Channel</p>	<p>Date: 28.OCT.2021 09:34:48</p>

Maximum power spectral density


<p>802.11n ht40 Lowest Channel</p>	<p>Date: 28.OCT.2021 09:38:29</p>
<p>802.11n ht40 Highest Channel</p>	<p>Date: 28.OCT.2021 09:40:21</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Date: 28.OCT.2021 09:43:02</p>

5470-5725 MHz:

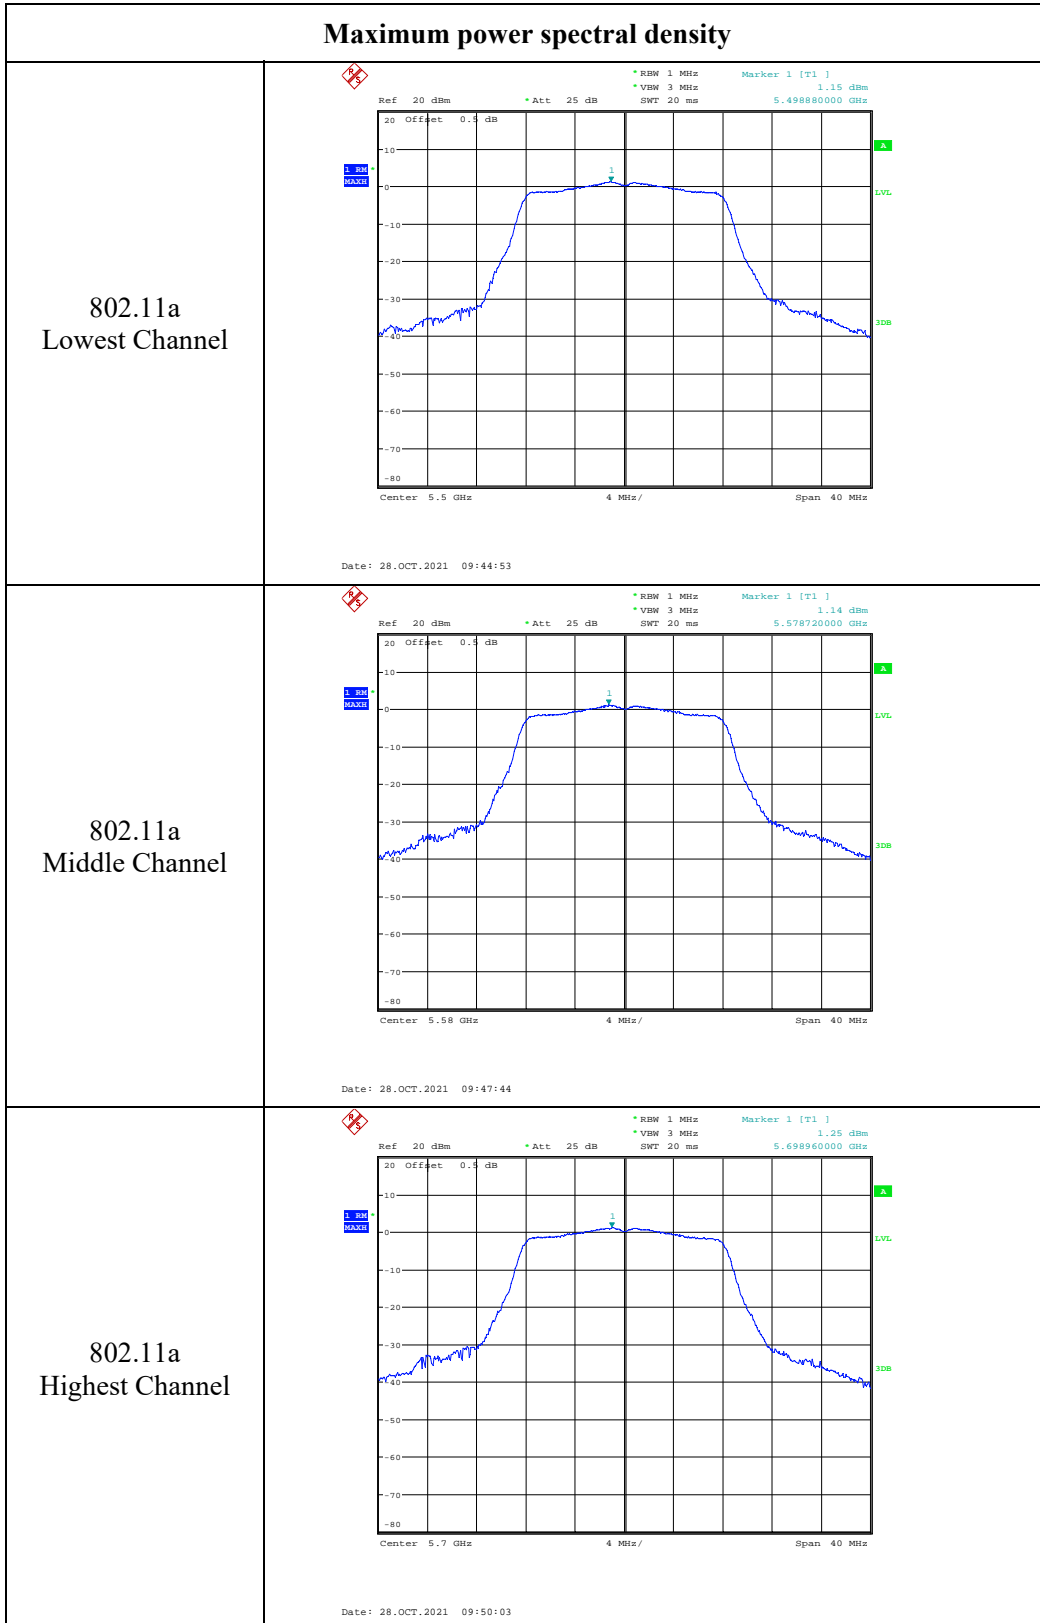


Maximum power spectral density

802.11n ht20
Lowest Channel

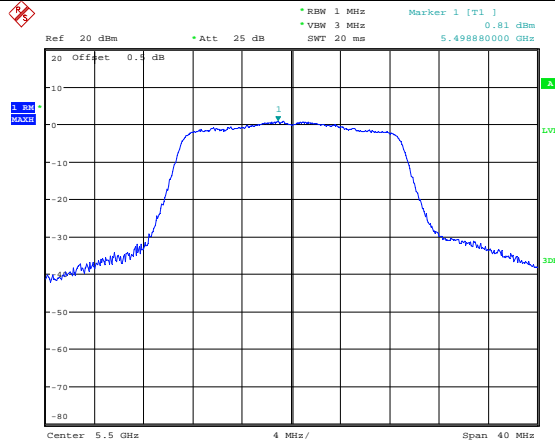


Date: 28.OCT.2021 09:56:17

802.11n ht20
Middle Channel

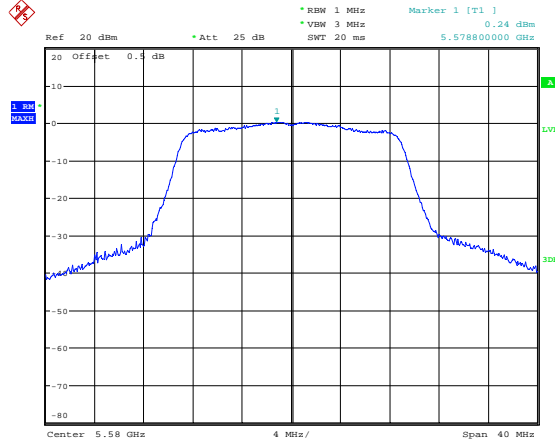

Date: 28.OCT.2021 09:57:34


802.11n ht20
Highest Channel

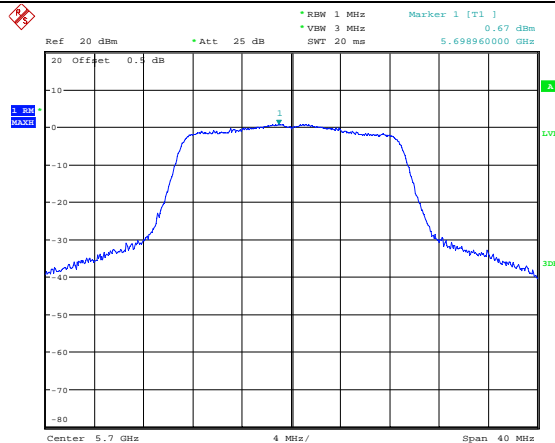




Date: 28.OCT.2021 09:59:35

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] -1.81 dBm *VBW: 3 MHz SWT: 20 ms 5.507920000 GHz</p> <p>Center: 5.51 GHz 8 MHz/ Span: 80 MHz</p> <p>Date: 28.OCT.2021 10:02:06</p>
<p>802.11n ht40 Middle Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] -2.76 dBm *VBW: 3 MHz SWT: 20 ms 5.548400000 GHz</p> <p>Center: 5.55 GHz 8 MHz/ Span: 80 MHz</p> <p>Date: 28.OCT.2021 10:04:27</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref: 20 dBm *Att: 25 dB *RBW: 1 MHz Marker 1 [T1] -1.27 dBm *VBW: 3 MHz SWT: 20 ms 5.668240000 GHz</p> <p>Center: 5.67 GHz 8 MHz/ Span: 80 MHz</p> <p>Date: 28.OCT.2021 10:07:54</p>



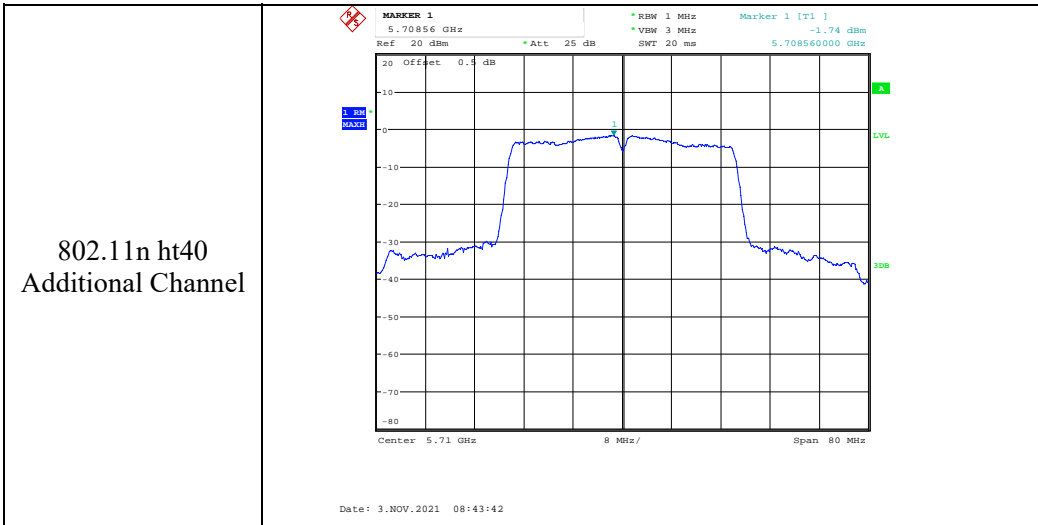


Maximum power spectral density
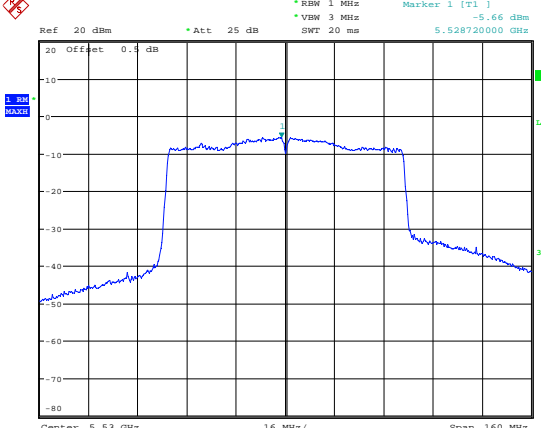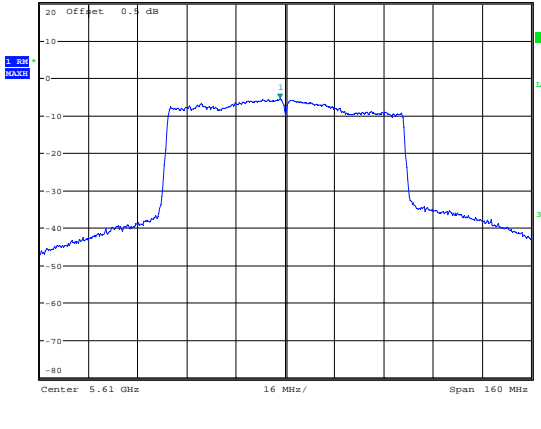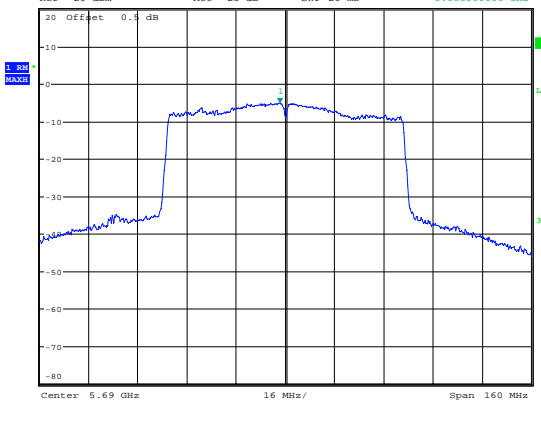
<p>802.11ac vht80 Lowest Channel</p>	 <p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * VBW 3 MHz * Marker 1 [T1] -5.66 dBm SWT 20 ms 5.528720000 GHz</p> <p>Center 5.53 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 28.OCT.2021 10:09:23</p>
<p>802.11ac vht80 Middle Channel</p>	 <p>MARKER 1 5.60808 GHz * RBW 1 MHz * Marker 1 [T1] -5.61 dBm Ref 20 dBm * Att 25 dB * VBW 3 MHz * SWT 20 ms 5.608080000 GHz</p> <p>Center 5.61 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 3.NOV.2021 08:45:23</p>
<p>802.11ac vht80 Additional Channel</p>	 <p>Ref 20 dBm * Att 25 dB * RBW 1 MHz * Marker 1 [T1] -5.18 dBm SWT 20 ms 5.688080000 GHz</p> <p>Center 5.69 GHz 16 MHz/ Span 160 MHz</p> <p>Date: 28.OCT.2021 10:10:45</p>

5725-5850MHz

Maximum power spectral density
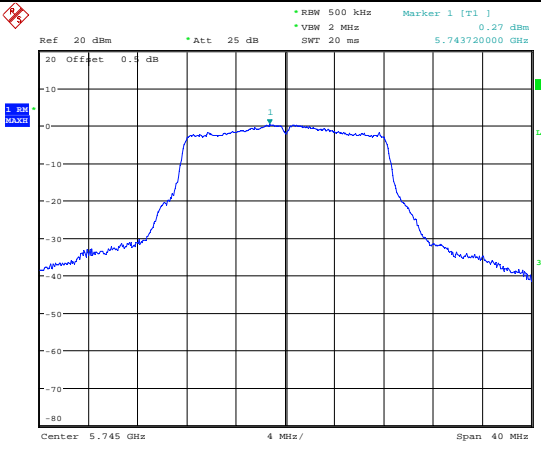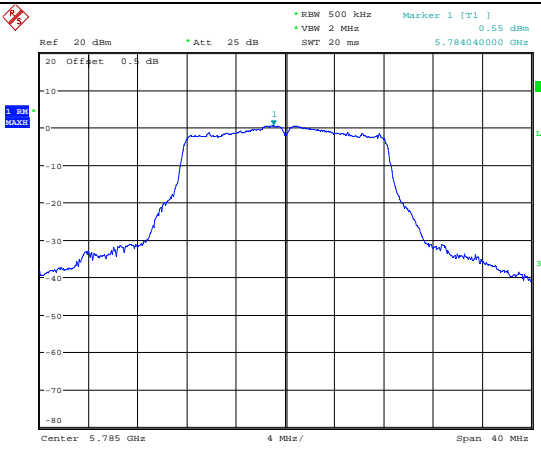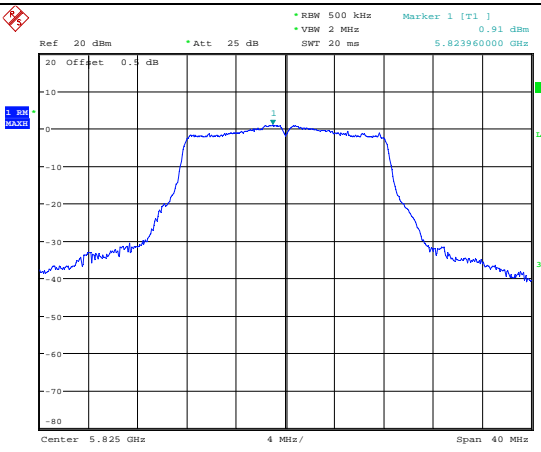
<p>802.11a Lowest Channel</p>	 <p>Ref 20 dBm * Att 25 dB RBW 500 kHz Marker 1 [T1] 0.27 dBm * VSW 2 MHz SWT 20 ms 5.743720000 GHz</p> <p>20 Offset 0.4 dB</p> <p>Center 5.745 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:48:55</p>
<p>802.11a Middle Channel</p>	 <p>Ref 20 dBm * Att 25 dB RBW 500 kHz Marker 1 [T1] 0.55 dBm * VSW 2 MHz SWT 20 ms 5.784040000 GHz</p> <p>20 Offset 0.4 dB</p> <p>Center 5.785 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:49:34</p>
<p>802.11a Highest Channel</p>	 <p>Ref 20 dBm * Att 25 dB RBW 500 kHz Marker 1 [T1] 0.91 dBm * VSW 2 MHz SWT 20 ms 5.823960000 GHz</p> <p>20 Offset 0.4 dB</p> <p>Center 5.825 GHz 4 MHz/ Span 40 MHz</p> <p>Date: 28.OCT.2021 10:50:04</p>

Maximum power spectral density

<p>802.11n ht20 Lowest Channel</p>	<p>Date: 28.OCT.2021 10:51:19</p>
<p>802.11n ht20 Middle Channel</p>	<p>Date: 28.OCT.2021 10:52:34</p>
<p>802.11n ht20 Highest Channel</p>	<p>Date: 28.OCT.2021 10:53:16</p>

Maximum power spectral density

<p>802.11n ht40 Lowest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 500 kHz, VBW: 2 MHz, SWT: 20 ms, Marker 1 [T1]: -2.84 dBm, 5.752440000 GHz</p> <p>Center: 5.755 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 28.OCT.2021 10:54:54</p>
<p>802.11n ht40 Highest Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 500 kHz, VBW: 2 MHz, SWT: 20 ms, Marker 1 [T1]: -2.40 dBm, 5.793720000 GHz</p> <p>Center: 5.795 GHz, 8 MHz/, Span: 80 MHz</p> <p>Date: 28.OCT.2021 10:55:42</p>
<p>802.11ac vht80 Middle Channel</p>	<p>Ref: 20 dBm, Att: 25 dB, RBW: 500 kHz, VBW: 2 MHz, SWT: 20 ms, Marker 1 [T1]: -5.99 dBm, 5.767640000 GHz</p> <p>Center: 5.775 GHz, 16 MHz/, Span: 160 MHz</p> <p>Date: 28.OCT.2021 10:56:35</p>

4.6 Duty Cycle:

Serial Number:	CR21100090-RF-S1	Test Date:	2021-10-28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Wolf Mo	Test Result:	N/A

Environmental Conditions:

Temperature: (°C)	28.4	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.6~101.5
----------------------	------	------------------------------	----	------------------------	-------------


Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200256	2021/7/22	2022/7/21
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)
802.11a	1.412	1.498	94.26
802.11n ht20	1.369	1.437	95.27
802.11n ht40	0.672	0.756	88.89
802.11ac vht80	0.346	0.43	80.47

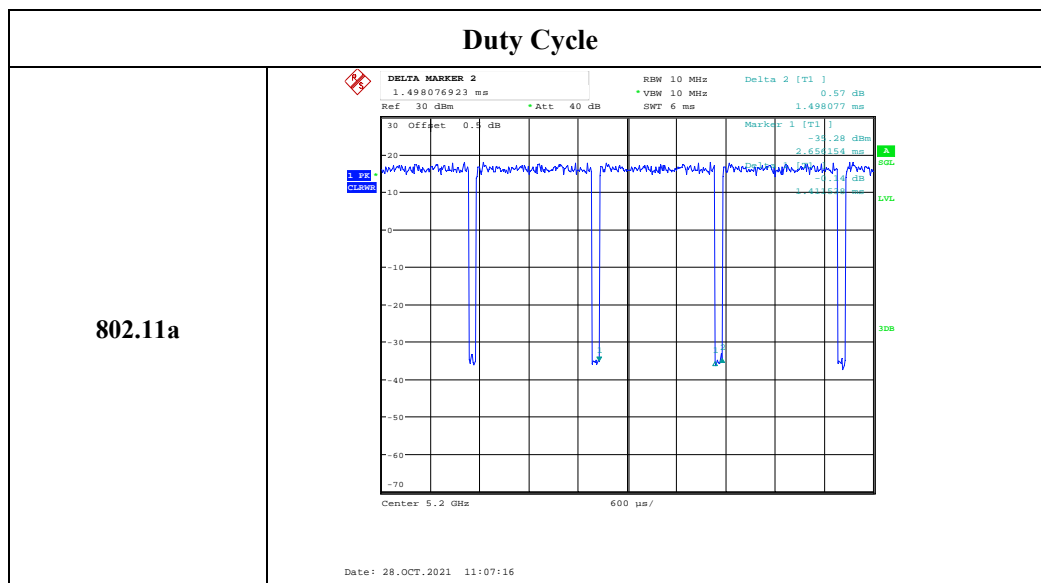


Duty Cycle

802.11n ht20

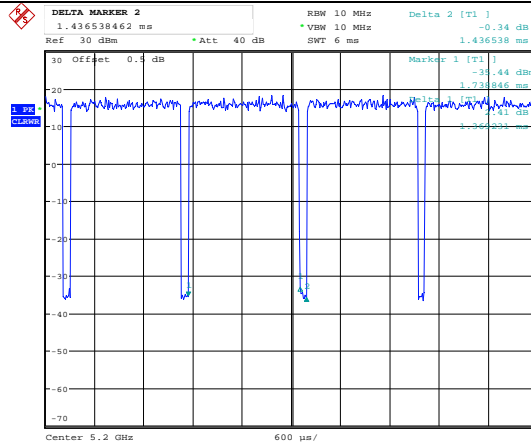


Date: 28.OCT.2021 11:08:34

802.11n ht40

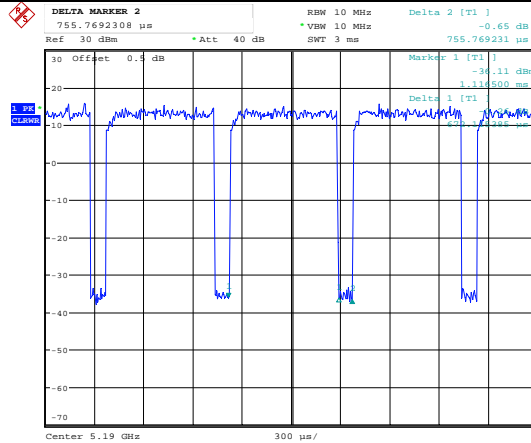

Date: 28.OCT.2021 11:10:53

**802.11ac vht80
Middle Channel**

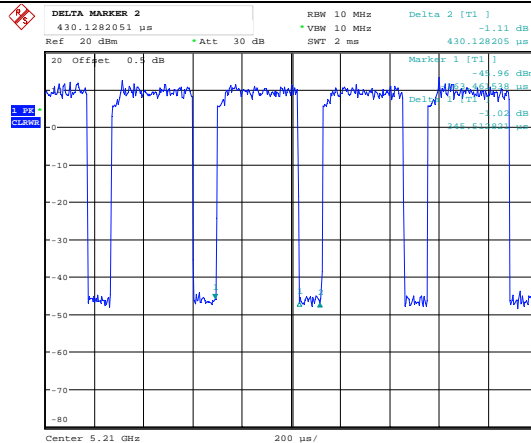

Date: 28.OCT.2021 11:46:13

5. RF EXPOSURE EVALUATION

5.1 MAXIMUM PERMISSIBLE EXPOSURE (MPE)

5.1.1 Applicable Standard

FCC §15.407 (f) & §1.1310 & §2.1091

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

5.1.2 Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

5.1.3 Calculated Result

Operation Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
2.4G Wi-Fi	2412-2462	3	2.00	16	39.81	20.00	0.0158	1.0
5G Wi-Fi	5150-5850	3	2.00	15	31.62	20.00	0.0126	1.0
Bluetooth	2402-2480	3	2.00	8	6.31	20.00	0.0025	1.0

Note: The Wi-Fi and Bluetooth can't transmit simultaneously.

Result: The device meet FCC MPE at 20 cm distance

5.2 EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION

5.2.1 Applicable Standard

RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2.2 Calculated Result

Mode	Frequency (MHz)	Antenna Gain	Conducted output power including Tune-up Tolerance	EIRP		Exemption limits (mW)	Exemption
		(dBi)	(dBm)	(dBm)	(mW)		
2.4G Wi-Fi	2412-2462	3	16	19	79.43	2684	Yes
5G Wi-Fi	5150-5850	3	15	18	63.10	4525	Yes
Bluetooth	2402-2480	3	8	11	12.59	2676	Yes

Note: The Wi-Fi and Bluetooth can't transmit simultaneously.

Result: Compliance. The device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

******* END OF REPORT *******