

FCC ID: T4509140

# EMI - TEST REPORT

- FCC Part 15.209 -



<b>Test Report No. :</b> T35532-00-03HU	30. November 2011 Date of issue
---	------------------------------------

**Type / Model Name** : 09 140

**Product Description** : Immobilizer Receive Control Unit

**Applicant** : LDL Technology

Address : Parc Technologique du Canal, 3 rue Hermès

31520 Ramonville St-Agne, France

**Manufacturer** : LDL Technology

Address : Parc Technologique du Canal, 3 rue Hermès

31520 Ramonville St-Agne, France

**Licence holder** : LDL Technology

Address : Parc Technologique du Canal, 3 rue Hermès

31520 Ramonville St-Agne, France

<b>Test Result</b> according to the standards listed in clause 1 test standards:	<b>POSITIVE</b>
--	-----------------



The test report merely corresponds to the test sample.  
It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

FCC ID: T4509140

## Contents

<b>1</b>	<b><u>TEST STANDARDS</u></b>	<b>3</b>
<b>2</b>	<b><u>SUMMARY</u></b>	<b>4</b>
<b>3</b>	<b><u>EQUIPMENT UNDER TEST</u></b>	<b>5</b>
3.1	Photo documentation of the EUT – Detailed photos see Attachment A	5
3.2	Power supply system utilised	5
3.3	Short description of the Equipment under Test (EUT)	5
<b>4</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>6</b>
4.1	Address of the test laboratory	6
4.2	Environmental conditions	6
4.3	Statement of the measurement uncertainty	6
4.4	Measurement Protocol for FCC, VCCI and AUSTEL	7
<b>5</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>8</b>
5.1	Conducted emissions	8
5.2	Field strength of the fundamental wave	9
5.3	Spurious emissions (magnetic field) 9 kHz – 30 MHz	11
5.4	Emission Bandwidth	13
<b>6</b>	<b><u>USED TEST EQUIPMENT AND ACCESSORIES</u></b>	<b>15</b>
	<b><u>ATTACHMENT</u></b>	<b>A</b>

## **1 TEST STANDARDS**

The tests were performed according to following standards:

### **FCC Rules and Regulations Part 15, Subpart A - General (October, 2010)**

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

### **FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2010)**

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements

ANSI C63.4: 2003	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
------------------	---

ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
-----------------	--

CISPR 16-4-2: 2003	Uncertainty in EMC measurement
--------------------	--------------------------------

## 2 SUMMARY

### GENERAL REMARKS:

Up-streaming data (RCU → Key)

Carrier frequency : 125kHz  
Up-streaming modulation type : OOK (On Off Keying)  
Up-streaming data coding : BPLM (Binary Pulse Length Modulation)  
Up-streaming average data-rate : 5,2kbits/s

Down-streaming data (Key → RCU)

Down-streaming modulation type : Load modulation  
Down-streaming data coding : Manchester  
Down-streaming typical data-rate : 3,9kbits/s

### FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 06. October 2011

Testing concluded on : 13. October 2011

Checked by:

Tested by:

\_\_\_\_\_  
Klaus Gegenfurtner  
Dipl.-Ing.(FH)  
Manager: Radio Group

\_\_\_\_\_  
Huber Markus

FCC ID: T4509140

### **3 EQUIPMENT UNDER TEST**

#### **3.1 Photo documentation of the EUT – Detailed photos see Attachment A**

#### **3.2 Power supply system utilised**

Power supply voltage:       :                               12.0 V / DC

#### **3.3 Short description of the Equipment under Test (EUT)**

The EUT is an Immobilizer Receive Control Unit. The system contains an immobilizer for a keyless entry system for vehicles.

Number of tested samples:    1  
Serial number:                 Pre-series

#### **EUT operation mode:**

The equipment under test was operated during the measurement under the following conditions:

- Tx mode at 125 kHz
- \_\_\_\_\_
- \_\_\_\_\_
- \_\_\_\_\_

#### **EUT configuration:**

(The CDF filled by the applicant can be viewed at the test laboratory.)

#### **The following peripheral devices and interface cables were connected during the measurements:**

- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_
- \_\_\_\_\_ Model : \_\_\_\_\_

- customer specific cables
- unscreened power cables

## **4 TEST ENVIRONMENT**

### **4.1 Address of the test laboratory**

**mikes-testingpartners gmbh  
Ohmstrasse 2-4  
94342 STRASSKIRCHEN  
GERMANY**

### **4.2 Environmental conditions**

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

### **4.3 Statement of the measurement uncertainty**

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

## 4.4 Measurement Protocol for FCC, VCCI and AUSTEL

### 4.4.1 GENERAL INFORMATION

#### 4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

#### 4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

## **5 TEST CONDITIONS AND RESULTS**

### **5.1 Conducted emissions**

For test instruments and accessories used see section 6 Part A 4.

#### **5.1.1 Description of the test location**

#### **5.1.2 Photo documentation of the test set-up**

#### **5.1.3 Applicable standard**

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency

#### **5.1.4 Test result**

Frequency range:

Min. limit margin

**Remarks:** The measurement is not applicable. The EuT is battery powered.

---



---



---



---



FCC ID: T4509140

## 5.2 Field strength of the fundamental wave


For test instruments and accessories used see section 6 Part CPR 1.

### 5.2.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

### 5.2.2 Photo documentation of the test set-up

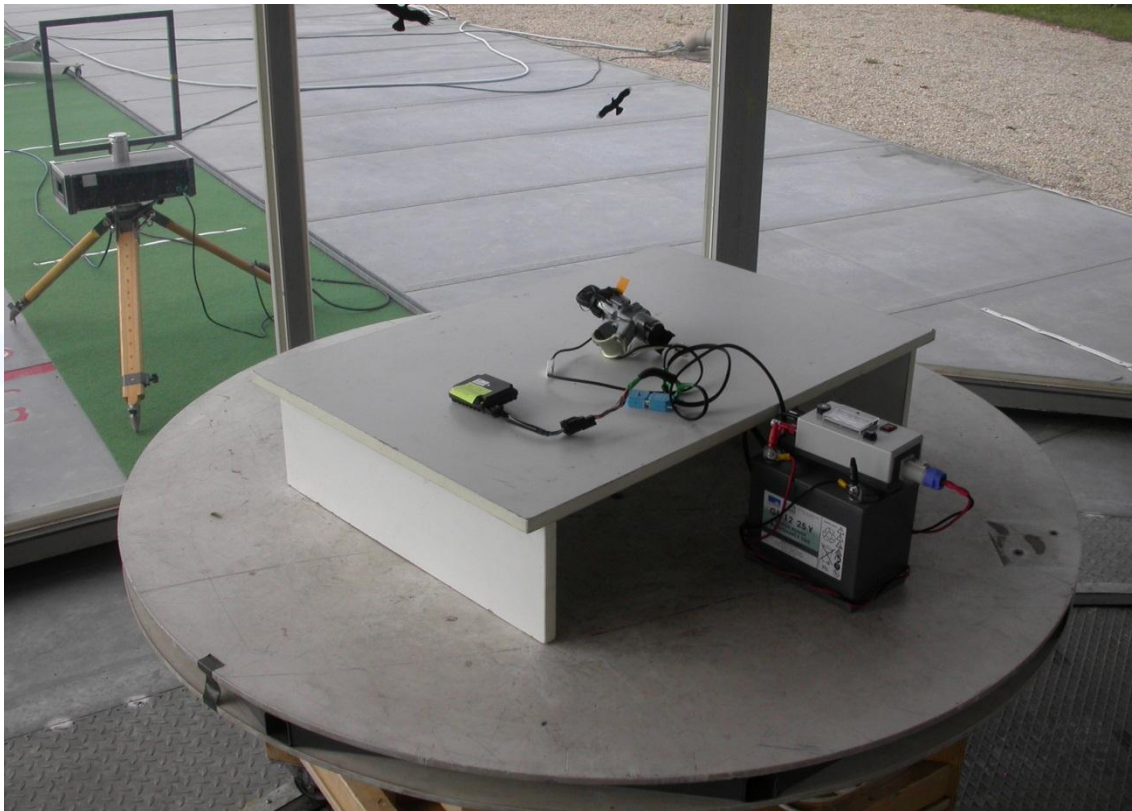

### 5.2.1 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

### 5.2.2 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

**FCC ID: T4509140**

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: RBW: 200 Hz  
150 kHz – 30 MHz: RBW: 9 kHz

Example:

Frequency (MHz)	Level (dB $\mu$ V)	+	Factor (dB)	=	Level dB( $\mu$ V/m)	-	Limit dB( $\mu$ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

**5.2.3 Test result**

Measurement distance: 3 m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.125	61.3	61.3	61.1	0.2	20	81.3	81.3	81.1	105.0	-23.7

Calculated value at distance: 300 m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.125	-18.7	-18.7	-18.9	0.2	20	1.3	1.3	1.1	25.0	-23.7

Limit according to FCC Part 15C, Section 15.209(a):

Frequency (MHz)	Field strength of fundamental wave ( $\mu$ V/m)	dB( $\mu$ V/m)	Measurement distance (metres)
<b>0.009-0.490</b>	<b>2400/F(kHz)</b>	--	<b>300</b>
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

Remarks:

---



---



---



---

FCC ID: T4509140

### 5.3 Spurious emissions (magnetic field) 9 kHz – 30 MHz


For test instruments and accessories used see section 6 Part SER 1.

#### 5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

#### 5.3.2 Photo documentation of the test set-up

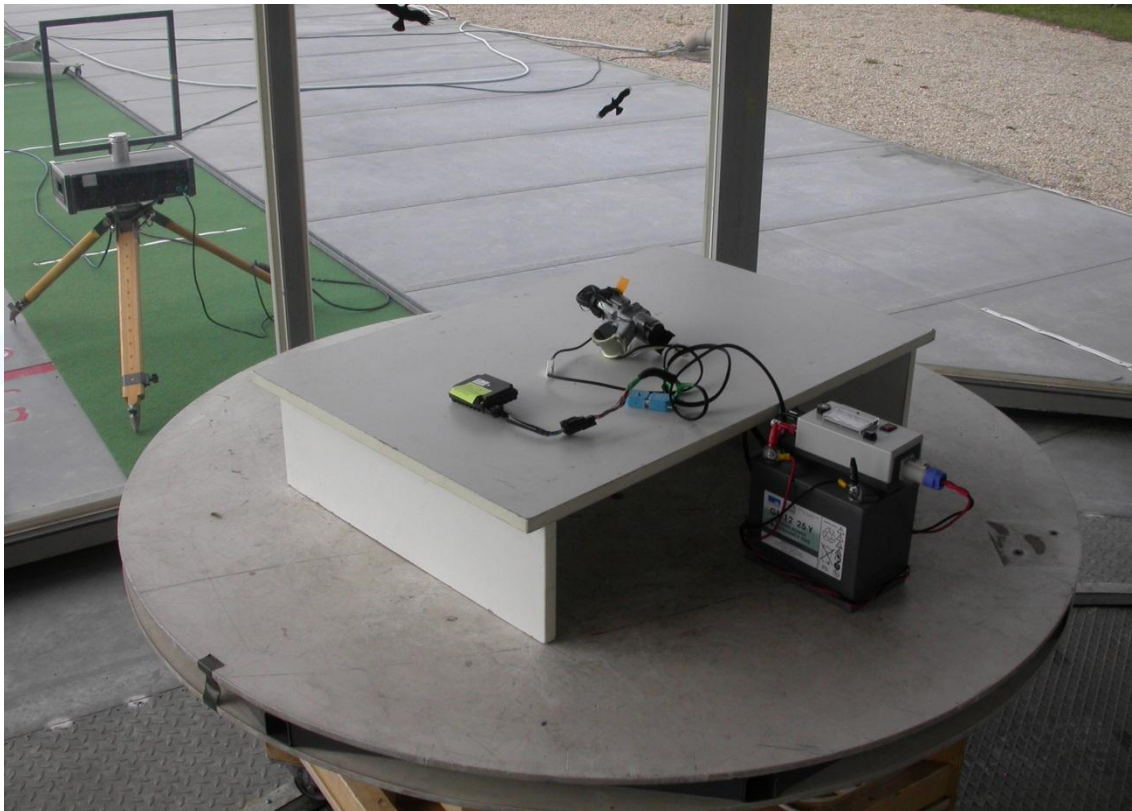

#### 5.3.3 Applicable standard

According to FCC Part 15C, Section 15.209:

The emissions from intentional radiators shall not exceed the effective field strength limits.

#### 5.3.4 Description of Measurement

The spurious emissions of the EUT have to be measured at an open area test site in the frequency range from 9 kHz to 1000 MHz using a tuned EMI receiver. The set up of the equipment under test will be in accordance with ANSI C63.4. The measurement has been performed at 3 m. The results have been compared to the limits defined at 30 m or 300 m distances according to FCC Part 15C, Section 15.31(f)(2) using an inverse linear distance extrapolation factor of 40 dB/decade. The final measurement has been performed with the EMI receiver using Quasi peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used, according to Section 15.209(d).

**FCC ID: T4509140**

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz:                   RBW:   200 Hz  
 150 kHz – 30 MHz:                RBW:   9 kHz

Example:

Frequency (MHz)	Level (dB $\mu$ V)	+	Factor (dB)	=	Level dB( $\mu$ V/m)	-	Limit dB( $\mu$ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	-	30	=	-5

**5.3.5 Test result**

Measurement distance: 3 m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.375	37.38	10.85	28.51	9	20	57.38	30.85	48.51	96.1	-65.25

Calculated value at distance: 300m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit AV dB( $\mu$ V/m)	Delta (dB)
0.375	-42.62	-69.15	-51.49	9	20	-22.62	-49.15	-31.49	16.1	-65.25

Values at distance: 30m

Frequency (MHz)	Level PK (dB $\mu$ V)	Level AV (dB $\mu$ V)	Level QP (dB $\mu$ V)	Band- width (kHz)	Correct. factor (dB)	Corrected Level PK dB( $\mu$ V/m)	Corrected Level AV dB( $\mu$ V/m)	Corrected Level QP dB( $\mu$ V/m)	Limit dB( $\mu$ V/m)	Delta (dB)
0.49 – 30.0				9	20				29.5	> 40

Limit according to FCC Part 15 Subpart 15.209(a):

Frequency (MHz)	Field strength of spurious emissions ( $\mu$ V/m)	dB( $\mu$ V/m)	Measurement distance (metres)
<b>0.009-0.490</b>	<b>2400/F(kHz)</b>	--	<b>300</b>
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

**Remarks:**    All other unwanted emissions in the frequency range from 9 kHz to 30 MHz were  
 below < -10.5 dB $\mu$ V/m.

---



---



---

FCC ID: T4509140


## 5.4 Emission Bandwidth

For test instruments and accessories used see section 6 Part MB.

### 5.4.1 Description of the test location

Test location: AREA4

### 5.4.2 Photo documentation of the test set-up

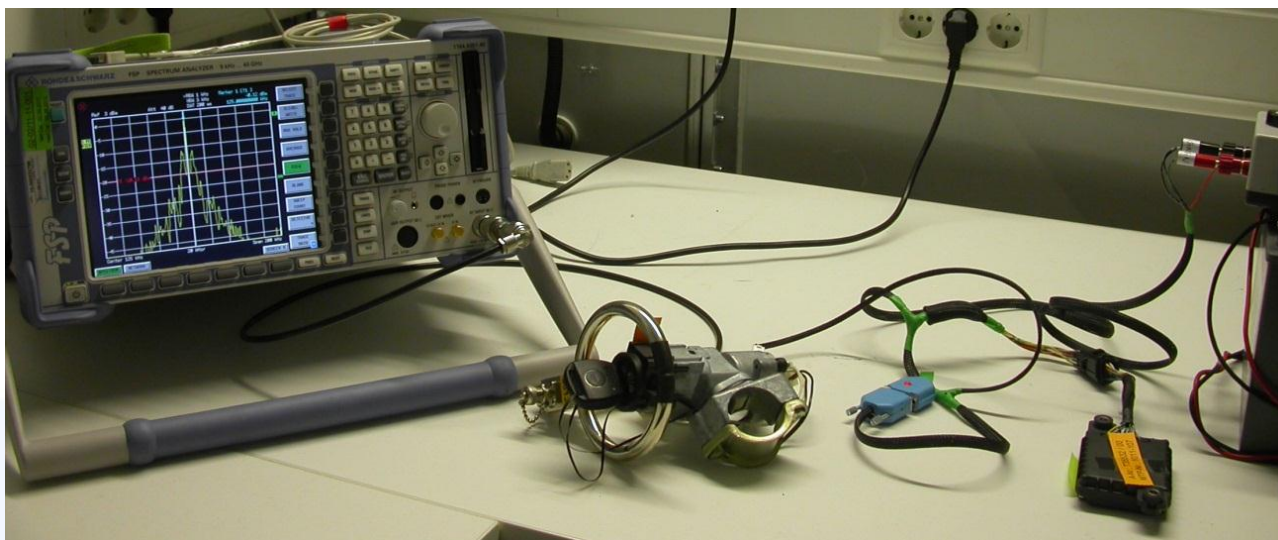

Fundamental [kHz] See Plot 1	20dB Bandwidth F1	20dB Bandwidth F2	Measured Bandwidth [kHz]
125.00	116.0	134.0	18.0

FCC ID: T4509140


5.4.3 Test protocol

Emission Bandwidth plots



\*RBW 1 kHz      Marker 1 [T1 ]  
 VBW 3 kHz      -20.21 dBm  
 Ref 3 dBm      Att 40 dB      SWT 50 ms      116.000000000 kHz

1 PK  
VIEW

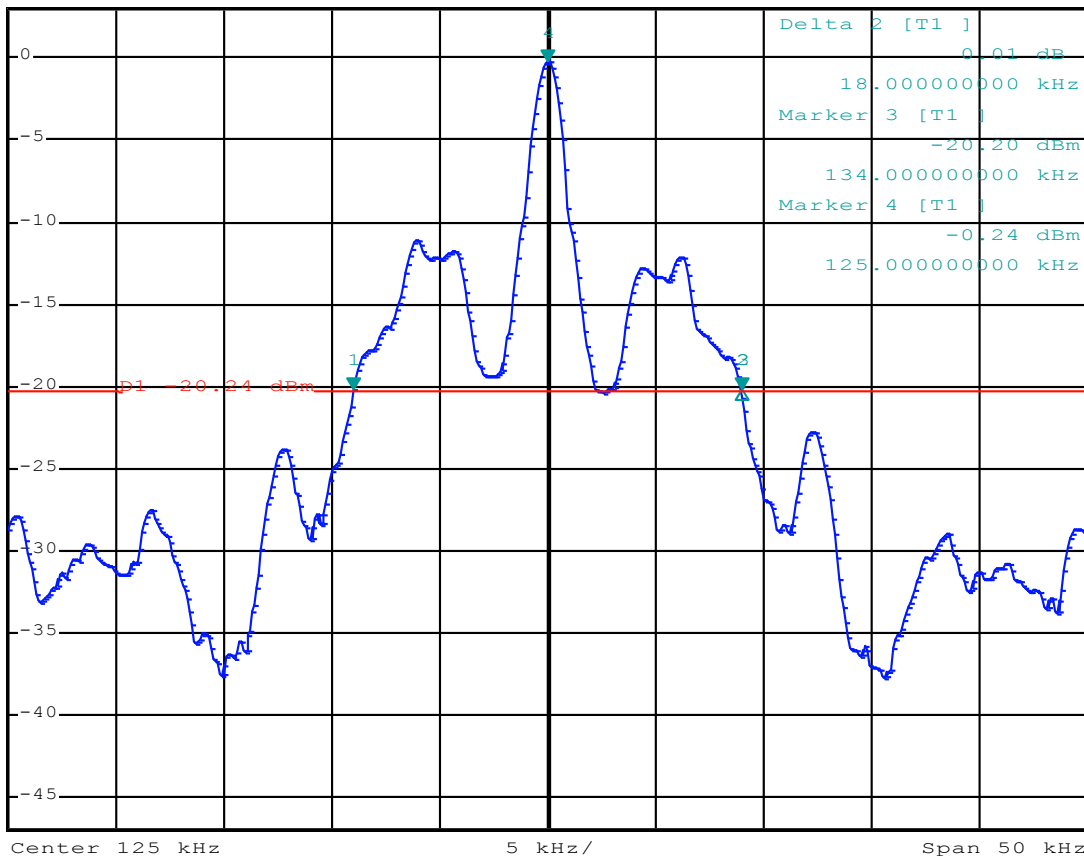

FCC ID: T4509140

## 6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 1	FMZB 1516	01-02/24-01-018			16/02/2012	16/02/2011
	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
MB	FSP40	02-02/11-11-001	02/09/2012	02/09/2011		
	HFRAE 5161 _ 50kHz-120M	02-02/24-11-004				
SER 1	FMZB 1516	01-02/24-01-018			16/02/2012	16/02/2011
	ESCI	02-02/03-05-005	19/11/2011	19/11/2010		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				

mikes