

---

# FCC Part 90 Test Report

---

Report No.: AGC02X121101-1F2

**TEST NAME** : FCC Part 90

**FCC ID** : T4K-5888UV

**PRODUCT DESIGNATION** : Land Mobile Radio

**BRAND NAME** : Anytone

**MODEL NAME** : 5888UV,5889UV,5888UV1, 5888UV2, 5888UV3,5888UV4,  
5888UV5, 5888UV6, 5888UV7, 5888UV8, 5888UV9,588UV,  
DB-750X, HR-2040,DB-50M

**CLIENT** : Qixiang Electron Science & Technology Co., Ltd

**DATE OF ISSUE** : Nov. 17, 2012

**STANDARD(S)** : FCC Part 90 Rules

**Attestation of Global Compliance (Shenzhen) Co., Ltd.**

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

## VERIFICATION OF COMPLIANCE

Applicant:	Qixiang Electron Science & Technology Co., Ltd
	Qixiang Building, Tangxi Industrial Zone, Luojiang District, Quanzhou, Fujian, China
Manufacturer:	Qixiang Electron Science & Technology Co., Ltd
	Qixiang Building, Tangxi Industrial Zone, Luojiang District, Quanzhou, Fujian, China
Product Description:	Land Mobile Radio
Brand Name:	Anytone
Model Name:	5888UV,5889UV,5888UV1,5888UV2,5888UV3,5888UV4,5888UV5,5888UV6, 5888UV7,5888UV8,5888UV9,588UV,DB-750X,HR-2040,DB-50M
Model Difference:	All the same except for appearance. test model is 5888UV.
File Number:	AGC02X121101-1F2
Date of Test:	Nov.12,2012~Nov.17,2012


### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90 requirements.


The test results of this report relate only to the tested sample identified in this report.

Tested By 

Bart Xie Nov. 17, 2012

Reviewed By 

Forrest Lei Nov. 17, 2012

Approved By 

Solger Zhang Nov. 17, 2012

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.3 TEST METHODOLOGY .....	5
1.4 TEST FACILITY .....	5
1.5 SPECIAL ACCESSORIES .....	5
1.6 EQUIPMENT MODIFICATIONS .....	5
<b>2. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE.....	6
2.3 GENERAL TECHNICAL REQUIREMENTS.....	6
2.4 CONFIGURATION OF TESTED SYSTEM .....	6
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>8</b>
<b>5. CONDUCTED LIMITS.....</b>	<b>9</b>
5.1 PROVISIONS APPLICABLE.....	9
5.2 MEASUREMENT PROCEDURE.....	9
5.3 TEST SETUP BLOCK DIAGRAM.....	10
5.4 TEST EQUIPMENT USED .....	10
5.5 TEST RESULT .....	11
<b>6. FREQUENCY TOLERANCE.....</b>	<b>12</b>
6.1 PROVISIONS APPLICABLE.....	12
6.2 MEASUREMENT PROCEDURE.....	12
6.3 TEST SETUP BLOCK DIAGRAM .....	13
6.4 TEST EQUIPMENT USED: .....	13
6.5 TEST RESULT .....	14
<b>7. EMISSION BANDWIDTH.....</b>	<b>18</b>
7.1 PROVISIONS APPLICABLE.....	20
7.2 MEASUREMENT PROCEDURE.....	20
7.3 TEST SETUP BLOCK DIAGRAM.....	20
7.4 MEASUREMENT EQUIPMENT USED: .....	20
7.5 MEASUREMENT RESULT: .....	21
<b>8. UNWANTED RADIATION .....</b>	<b>22</b>
8.1 PROVISIONS APPLICABLE.....	23
8.2 MEASUREMENT PROCEDURE.....	23

8.3 TEST SETUP BLOCK DIAGRAM.....	24
8.4 MEASUREMENT EQUIPMENT USED: .....	26
8.5 MEASUREMENT RESULTS: .....	26
8.6 EMISSION MASK PLOT .....	29
<b>9. MODULATION CHARACTERISTICS .....</b>	<b>31</b>
9.1 PROVISIONS APPLICABLE.....	31
9.2 MEASUREMENT METHOD .....	31
9.3 MEASUREMENT INSTRUMENTS.....	31
9.4 MEASUREMENT RESULT .....	32
10.1 PROVISIONS APPLICABLE.....	38
10.2 TEST PROCEDURE.....	38
10.3 TEST INSTRUMENTS.....	38
10.4 TEST RESULT .....	39
10.4 CONDUCT SPURIOUS PLOT .....	40
<b>11. TRANSMITTER FREQUENCY BEHAVIOR .....</b>	<b>42</b>
11.1 PROVISIONS APPLICABLE .....	42
11.2 TEST METHOD .....	42
11.3 TEST INSTRUMENTS .....	42
<b>12. RADIATED EMISSION ON RECEIVING MODE .....</b>	<b>47</b>
12.1 PROVISIONS APPLICABLE .....	47
12.2 TEST METHOD.....	47
12.3 TEST INSTRUMENTS .....	47
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS).....	48
<b>13. AUDIO LOW PASS FILTER RESPONSE .....</b>	<b>50</b>
13.1 LIMITS .....	50
13.2. METHOD OF MEASUREMENTS.....	50
13.3 TEST DATA .....	50
<b>APPENDIX I .....</b>	<b>53</b>
<b>PHOTOGRAPHS OF SETUP .....</b>	<b>53</b>
<b>APPENDIX II .....</b>	<b>55</b>
<b>EXTERNAL VIEW OF EUT.....</b>	<b>55</b>

## 1. GENERAL INFORMATION

### 1.1 PRODUCT DESCRIPTION

The EUT is a single channel Two-way Radio designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	F3E
Channel Separation:	12.5KHz
Emission Bandwidth	10.633KHz
Peak Frequency Deviation	1.82KHz
Audio Frequency Response	10.71dB
Maximum Transmitter Power	46.87dBm
Antenna Designation	Detachable
Power Supply	DC13.8V/10A
Limiting Voltage	DC 12.4V
Operation Frequency Range and Channel	Frequency Range: 136~174MHz and 400~ 520MHz Channel Separation: 12.5KHz
	136 to 174MHz, Bottom Channel:136.025MHz Centre Channel:155.225 Top Channel:173.975  400MHz to 520MHz Bottom Channel: 400.025MHz, Centre Channel: 435.325MHz, Top Channel: 519.975MHz,
Frequency Tolerance	1.862ppm

## **1.2 RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID: T4K-5888UV**, filing to comply with the FCC Part 90 requirements.

## **1.3 TEST METHODOLOGY**

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

## **1.4 TEST FACILITY**

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance (Shenzhen) Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 .

FCC register No.: 259865

## **1.5 SPECIAL ACCESSORIES**

Not available for this EUT intended for grant.

## **1.6 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior
- (8). Section 15.109: Radiated Emission

### 2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Land Mobile Radio	5888UV	FCC ID: T4K-5888UV	EUT
2	DC Source	BX35	N/A	A.E.

### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.107	Conducted Emission	N/A
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant
§15.109	Radiated Emission	Compliant

**Note:** Owing to the EUT power supply by DC source, so conducted emission is not applicable.



## 4. DESCRIPTION OF TEST MODES

### RF TEST MODES

The EUT (Handheld two way radio) has been tested under normal operating condition.

(The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation (12.5 KHz).

No.	TEST MODES	CHANNEL SEPARATION
1	Low Channel	12.5 KHz
2	Middle Channel	12.5 KHz
3	High Channel	12.5 KHz

**Note:** Above modes have been tested in two frequency range.

### EMC TEST MODES

No.	TEST MODES
1	Standby Mode + (Charging)

**Note:** only the result of the worst case was recorded in the report.

## 5. CONDUCTED LIMITS

### 5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency.

### 5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.  
During the above scans, the emissions were maximized by cable manipulation.

### 5.3 TEST SETUP BLOCK DIAGRAM

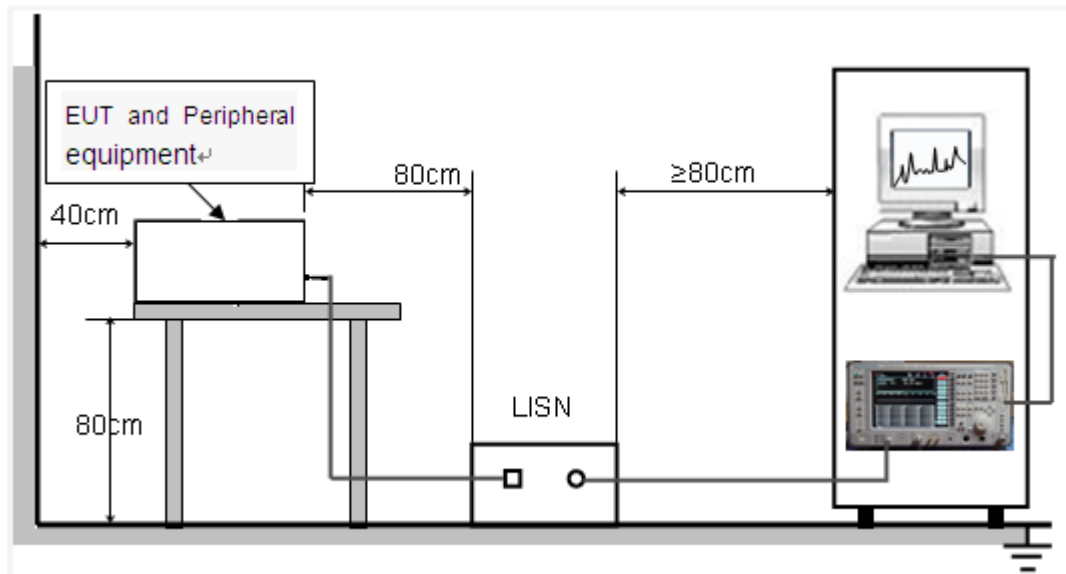

### 5.4 TEST EQUIPMENT USED

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LISN	R&S	ESH3-Z5	N/A	2013.07.17

## 5.5 TEST RESULT

N/A

## **6. FREQUENCY TOLERANCE**

### **6.1 PROVISIONS APPLICABLE**

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 2.5 ppm in the 421–512 MHz band.

### **6.2 MEASUREMENT PROCEDURE**

#### **6.2.1 Frequency stability versus environmental temperature**

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### **6.2.2 Frequency stability versus input voltage**

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environment chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. The EUT shall be powered by DC 12V
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1 KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 6.3 TEST SETUP BLOCK DIAGRAM

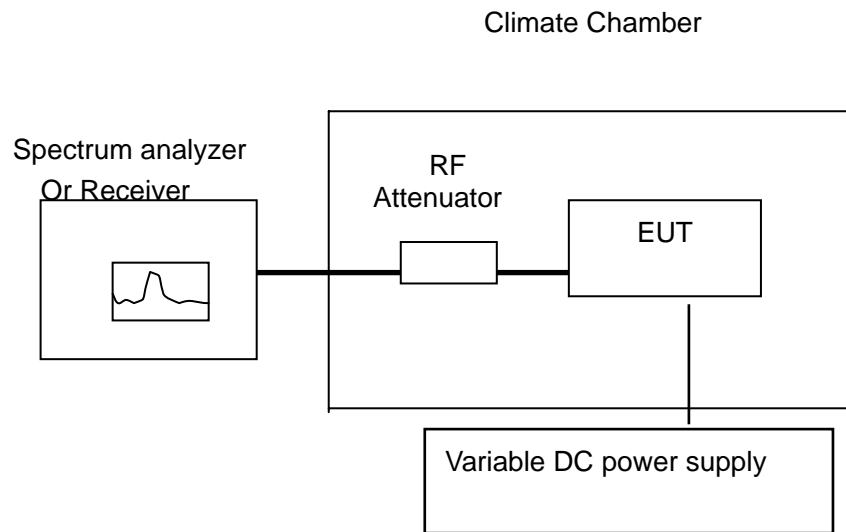


Figure 1

### 6.4 TEST EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Receiver	R&S	ESCI	N/A	2013.07.17
Climate Chamber	EXPERY	TN-400	N/A	2013.07.17

**6.5 TEST RESULT**

(1) Frequency stability versus input voltage (Supply nominal voltage is DC 12V)

**For VHF BAND TEST RESULT****Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	136.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	136.025133	0.978
40	DC 13.8V	136.025152	1.117
30	DC 13.8V	136.025216	1.588
20	DC 13.8V	136.025163	1.198
10	DC 13.8V	136.025239	1.757
0	DC 13.8V	136.025225	1.654
-10	DC 13.8V	136.025174	1.279
-20	DC 13.8V	136.025159	1.169
-30	DC 13.8V	136.025233	1.713

**Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	152.225 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	152.225214	1.406
40	DC 13.8V	152.225217	1.426
30	DC 13.8V	152.225224	1.472
20	DC 13.8V	152.225019	0.125
10	DC 13.8V	152.225119	0.782
0	DC 13.8V	152.225173	1.136
-10	DC 13.8V	152.225172	1.130
-20	DC 13.8V	152.225164	1.077
-30	DC 13.8V	152.225113	0.742

**Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	173.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	173.975133	0.764
40	DC 13.8V	173.975214	1.230
30	DC 13.8V	173.975153	0.879
20	DC 13.8V	173.975257	1.477
10	DC 13.8V	173.975233	1.339
0	DC 13.8V	173.975205	1.178
-10	DC 13.8V	173.975205	1.178
-20	DC 13.8V	173.975197	1.132
-30	DC 13.8V	173.975147	0.845

### **FOR UHF BAND TEST RESULT**

#### **Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	400.025473	1.182
40	DC 13.8V	400.025252	0.630
30	DC 13.8V	400.025317	0.792
20	DC 13.8V	400.025264	0.660
10	DC 13.8V	400.025231	0.577
0	DC 13.8V	400.025253	0.632
-10	DC 13.8V	400.025261	0.652
-20	DC 13.8V	400.025335	0.837
-30	DC 13.8V	400.025474	1.185

#### **Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	435.325502	1.153
40	DC 13.8V	435.325452	1.038
30	DC 13.8V	435.325278	0.639
20	DC 13.8V	435.325293	0.673
10	DC 13.8V	435.325341	0.783
0	DC 13.8V	435.325356	0.818
-10	DC 13.8V	435.325371	0.852
-20	DC 13.8V	435.325266	0.611
-30	DC 13.8V	435.325353	0.811

#### **Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	519.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 13.8V	519.975453	0.871
40	DC 13.8V	519.975328	0.631
30	DC 13.8V	519.975357	0.687
20	DC 13.8V	519.975409	0.787
10	DC 13.8V	519.975374	0.719
0	DC 13.8V	519.975425	0.817
-10	DC 13.8V	519.975507	0.975
-20	DC 13.8V	519.975433	0.833
-30	DC 13.8V	519.975449	0.864



(2) Frequency stability versus input voltage (Battery limiting voltage is DC 12.4V)

**FOR VHF BAND TEST RESULT****Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	136.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	136.025137	1.007
40	DC 12.4V	136.025152	1.117
30	DC 12.4V	136.025113	0.831
20	DC 12.4V	136.025127	0.934
10	DC 12.4V	136.025169	1.242
0	DC 12.4V	136.025183	1.345
-10	DC 12.4V	136.025175	1.287
-20	DC 12.4V	136.025156	1.147
-30	DC 12.4V	136.025189	1.389

**Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	152.225 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	152.225207	1.360
40	DC 12.4V	152.225183	1.202
30	DC 12.4V	152.225212	1.393
20	DC 12.4V	152.225234	1.537
10	DC 12.4V	152.225212	1.393
0	DC 12.4V	152.225251	1.649
-10	DC 12.4V	152.225197	1.294
-20	DC 12.4V	152.225227	1.491
-30	DC 12.4V	152.225254	1.669

**Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	173.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	173.975234	1.345
40	DC 12.4V	173.975208	1.196
30	DC 12.4V	173.975217	1.247
20	DC 12.4V	173.975236	1.357
10	DC 12.4V	173.975257	1.477
0	DC 12.4V	173.975242	1.391
-10	DC 12.4V	173.975277	1.592
-20	DC 12.4V	173.975307	1.765
-30	DC 12.4V	173.975324	1.862

**FOR UHF BAND TEST RESULT****Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	400.025375	0.937
40	DC 12.4V	400.025385	0.962
30	DC 12.4V	400.025407	1.017
20	DC 12.4V	400.025393	0.982
10	DC 12.4V	400.025374	0.935
0	DC 12.4V	400.025356	0.890
-10	DC 12.4V	400.025477	1.192
-20	DC 12.4V	400.025352	0.880
-30	DC 12.4V	400.025383	0.957

**Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	435.325174	0.400
40	DC 12.4V	435.325279	0.641
30	DC 12.4V	435.325252	0.579
20	DC 12.4V	435.325263	0.604
10	DC 12.4V	435.325322	0.740
0	DC 12.4V	435.325318	0.730
-10	DC 12.4V	435.325356	0.818
-20	DC 10.2V	435.325387	0.889
-30	DC 12.4V	435.325423	0.972

**Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	519.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 12.4V	519.975457	0.879
40	DC 12.4V	519.975482	0.927
30	DC 12.4V	519.975474	0.912
20	DC 12.4V	519.975396	0.762
10	DC 12.4V	519.975457	0.879
0	DC 12.4V	519.975343	0.660
-10	DC 12.4V	519.975457	0.879
-20	DC 12.4V	519.975439	0.844
-30	DC 12.4V	519.975376	0.723

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is DC 17.9V)

**FOR VHF BAND TEST RESULT**

**Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	136.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	136.025122	0.897
40	DC 17.9V	136.025114	0.838
30	DC 17.9V	136.025208	1.529
20	DC 17.9V	136.025173	1.272
10	DC 17.9V	136.025109	0.801
0	DC 17.9V	136.025135	0.992
-10	DC 17.9V	136.025128	0.941
-20	DC 17.9V	136.025144	1.059
-30	DC 17.9V	136.025149	1.095

**Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	152.225 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	152.225144	0.946
40	DC 17.9V	152.225137	0.900
30	DC 17.9V	152.225134	0.880
20	DC 17.9V	152.225146	0.959
10	DC 17.9V	152.225152	0.999
0	DC 17.9V	152.225121	0.795
-10	DC 17.9V	152.225148	0.972
-20	DC 17.9V	152.225163	1.071
-30	DC 17.9V	152.225109	0.716

**Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	173.975MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	173.975227	1.305
40	DC 17.9V	173.975246	1.414
30	DC 17.9V	173.975228	1.311
20	DC 17.9V	173.975252	1.448
10	DC 17.9V	173.975217	1.247
0	DC 17.9V	173.975209	1.201
-10	DC 17.9V	173.975178	1.023
-20	DC 17.9V	173.975169	0.971
-30	DC 17.9V	173.975154	0.885

**FOR UHF BAND TEST RESULT****Bottom Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	400.025 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	400.025425	1.062
40	DC 17.9V	400.025446	1.115
30	DC 17.9V	400.025425	1.062
20	DC 17.9V	400.025379	0.947
10	DC 17.9V	400.025335	0.837
0	DC 17.9V	400.025358	0.895
-10	DC 17.9V	400.025415	1.037
-20	DC 17.9V	400.025427	1.067
-30	DC 17.9V	400.025433	1.082

**Middle Channel @ 12.5 KHz Channel Separation**

Reference Frequency:	435.325 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	435.325367	0.843
40	DC 17.9V	435.325315	0.724
30	DC 17.9V	435.325274	0.629
20	DC 17.9V	435.325358	0.822
10	DC 17.9V	435.325364	0.836
0	DC 17.9V	435.325322	0.740
-10	DC 17.9V	435.325317	0.728
-20	DC 17.9V	435.325347	0.797
-30	DC 17.9V	435.325362	0.832

**Top Channel @ 12.5KHz Channel Separation**

Reference Frequency:	519.975 MHz	Limit:	2.5ppm
Environment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	DC 17.9V	519.975447	0.860
40	DC 17.9V	519.975453	0.871
30	DC 17.9V	519.975472	0.908
20	DC 17.9V	519.975397	0.763
10	DC 17.9V	519.975386	0.742
0	DC 17.9V	519.975375	0.721
-10	DC 17.9V	519.975417	0.802
-20	DC 17.9V	519.975433	0.833
-30	DC 17.9V	519.975439	0.844

## 7. EMISSION BANDWIDTH


### 7.1 PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz.

### 7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 3.0 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) .
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -26 dB.

### 7.3 TEST SETUP BLOCK DIAGRAM

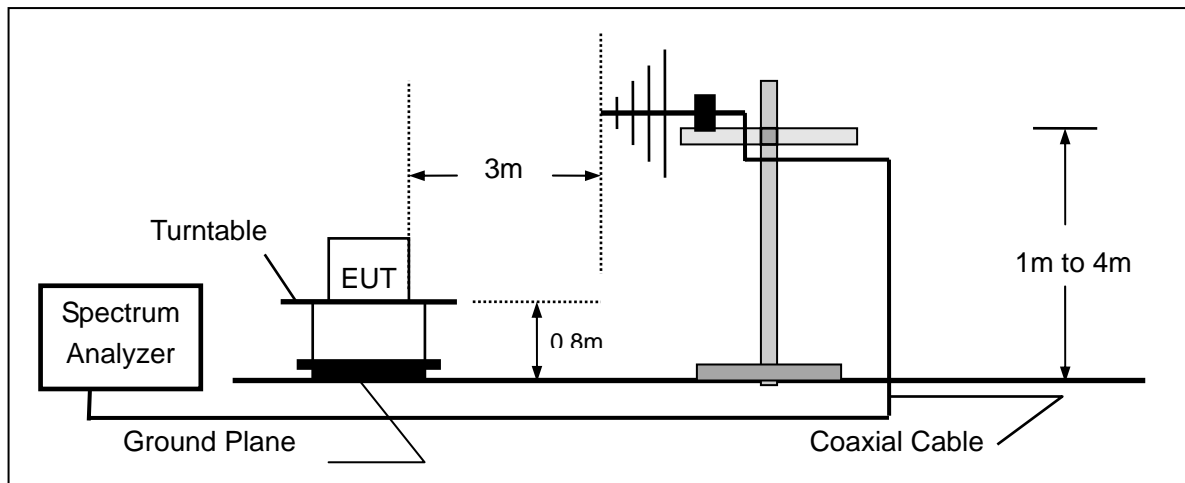


### 7.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2013.07.17
MODULATION ANALYZER	HP	8920B	3104A03367	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	9163-194	2013.07.17

## 7.5 MEASUREMENT RESULT:


26 dB Bandwidth Measurement Result For VHF Band			
Operating Frequency	12.5 KHz Channel Separation		
	Test Data	Limits	Result
136.025MHz	10.627KHz	11.25 KHz	Pass
152.225MHz	10.633KHz	11.25 KHz	Pass
173.975MHz	10.631 KHz	11.25 KHz	Pass

### Occupied bandwidth of Middle Channel (Maximum)

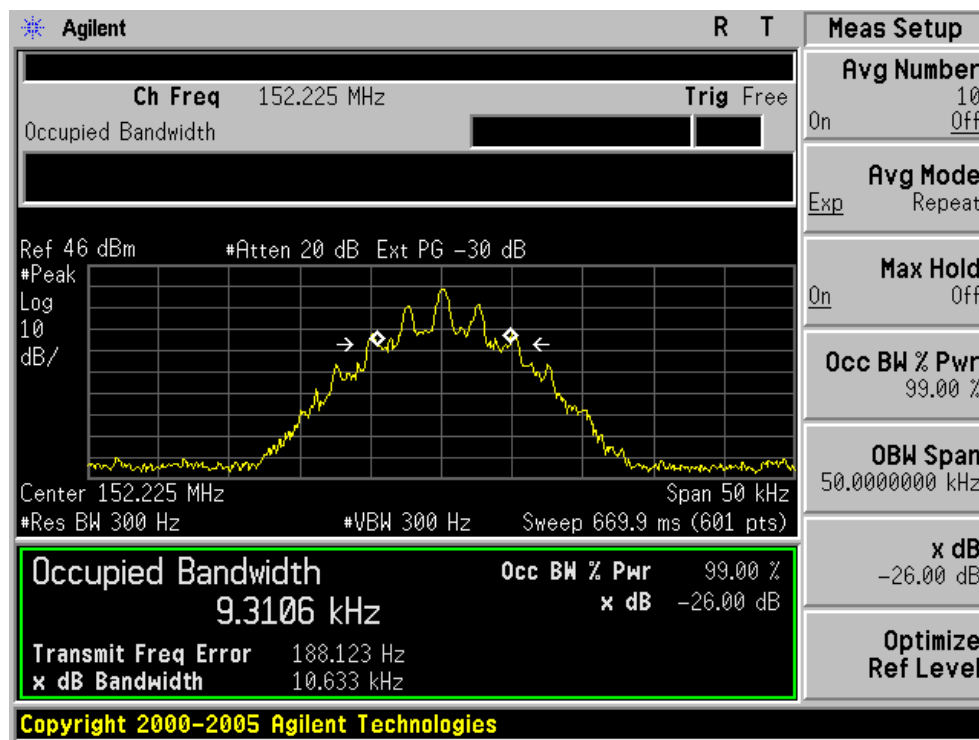

26 dB Bandwidth Measurement Result For UHF Band			
Operating Frequency	12.5 KHz Channel Separation for UHF Band		
	Test Data	Limits	Result
400.025MHz	10.569 KHz	11.25 KHz	Pass
435.325MHz	10.575KHz	11.25 KHz	Pass
519.975MHz	10.574 KHz	11.25 KHz	Pass

### Occupied bandwidth of Middle Channel (Maximum)

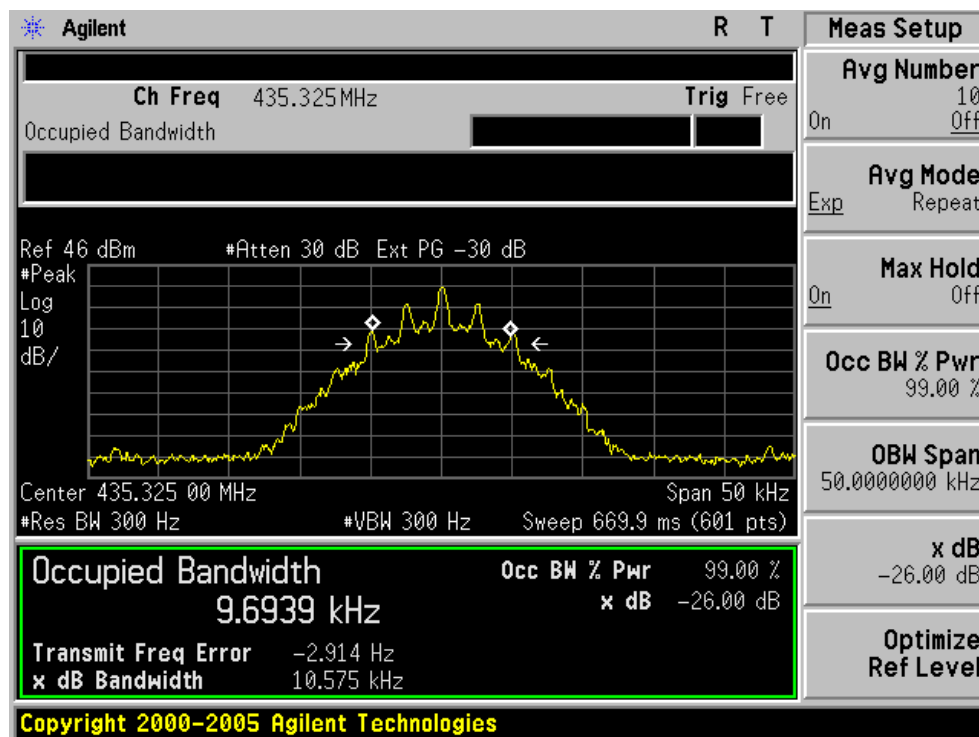

## 8. UNWANTED RADIATION

### 8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1). On any frequency removed from the center of the authorized bandwidth  $f_0$  to 5.625 KHz removed from  $f_0$ : Zero dB
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 5.625 KHz but no more than 12.5 KHz: At least  $7.27(f_d - 2.88 \text{ KHz})$  dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency ( $f_d$  in KHz)  $f_0$  of more than 12.5 KHz: At least  $50 + 10 \log(P)$  dB or 70 dB, whichever is lesser attenuation.

### 8.2 MEASUREMENT PROCEDURE

- (1) On a test site, the EUT shall be placed on a turntable and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3) The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6) The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7) The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11) The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13) If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14) The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.




(15) The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.

(16) The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.


(17) The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

### 8.3 TEST SETUP BLOCK DIAGRAM

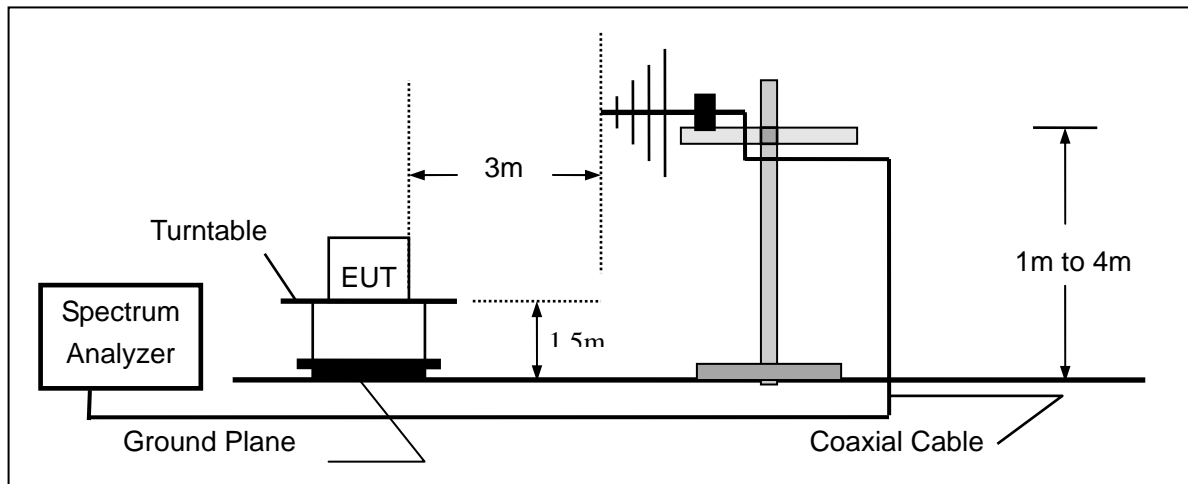


## SUBSTITUTION METHOD: (Radiated Emissions)

### Radiated Below 1GHz

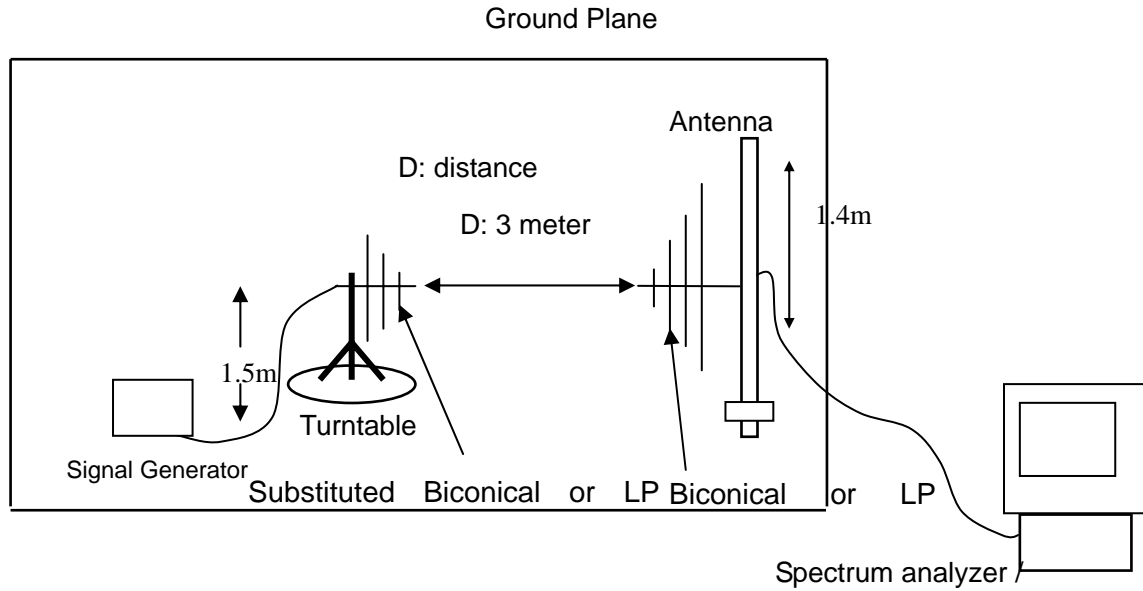

### Radiated Above 1 GHz

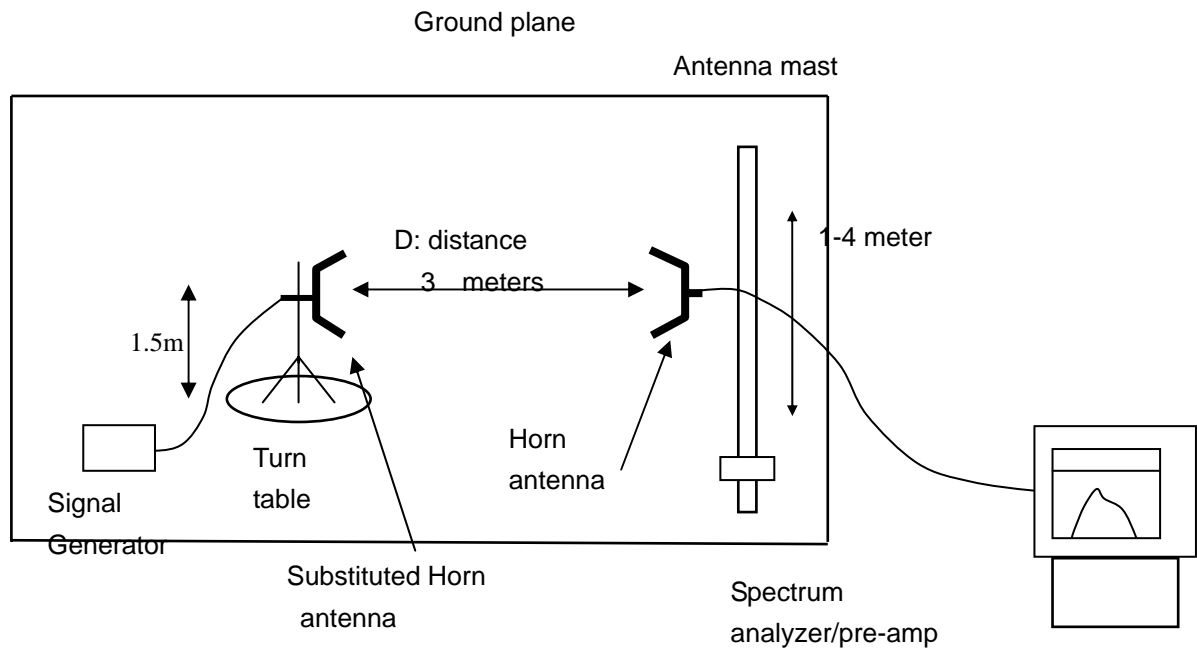

**8.4 MEASUREMENT EQUIPMENT USED:**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2013.07.17
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LOOP ANTENNA	A.H.	SAS-562B	N/A	2013.07.17
HORN ANTENNA	EM	EM-AH-10180	N/A	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	N/A	2013.07.17

**8.5 MEASUREMENT RESULTS:****Measurement Result for 12.5 KHz Channel Separation**

On any frequency removed from the center of the authorized bandwidth by a displacement  
Frequency ( $f_d$  in KHz)  $f_o$  of more than 12.5 KHz: At least  $50+10 \log(P)$  dB or 70 dB, which ever is lesser  
attenuation.

**Limit: At least  $50+10 \log(P) = 50+10\log(50)=67(\text{dBc})$**  (For VHF)

**At least  $50+10 \log(P) = 50+10\log(35)=65(\text{dBc})$**  (For UHF)

**Measurement Result for 12.5 KHz Channel Separation @ 136.025MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit	Result(P/F)
136.025	v	0		pass
272.050	v	77.6(-42.88dBm)	67	pass
408.08	v	76.2	67	pass
544.100	v	75.8	67	pass
680.125	v	83.4	67	pass
816.150	v	80.5	67	pass
952.175	v	93.7	67	pass
1088.200	v	91.5	67	pass
1224.225	v	92.6	67	pass
1360.250	v	95.3	67	pass

**Measurement Result for 12.5 KHz Channel Separation @ 152.225MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit	Result(P/F)
152.225	v	0		pass
304.450	v	75.44(-38.44dBm)	67	pass
456.675	v	77.5	67	pass
608.900	v	80.5	67	pass
761.125	v	83.4	67	pass
913.350	v	91.7	67	pass
1065.575	v	92.6	67	pass
1217.800	v	95.8	67	pass
1370.025	v	96.9	67	pass
1522.250	v	94.2	67	pass

**Measurement Result for 12.5 KHz Channel Separation @ 173.975MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit	Result(P/F)
173.975	v	0		pass
347.950	v	76.43(-39.43dBm)	67	pass
521.925	v	82.4	67	pass
695.900	v	81.3	67	pass
869.875	v	85.4	67	pass
1043.850	v	90.3	67	pass
1217.825	v	91.4	67	pass
1391.800	v	95.2	67	pass
1565.775	v	96.3	67	pass
1739.750	v	97.4	67	pass

**Measurement Result for 12.5 KHz Channel Separation @ 400.025MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
400.025	v	0		pass
800.050	v	70.5	65	pass
1200.08	v	76.3	65	pass
1600.100	v	79.5	65	pass
2000.125	v	80.5	65	pass
2400.150	v	83.6	65	pass
2800.175	v	85.4	65	pass
3200.200	v	88.7	65	pass
3600.225	v	91.2	65	pass
4000.250	v	90.5	65	pass

**Measurement Result for 12.5 KHz Channel Separation @ 435.325MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
435.325	v	0		pass
870.650	v	73.5	65	pass
1305.975	v	78.5	65	pass
1741.300	v	79.4	65	pass
2176.625	v	82.7	65	pass
2611.950	v	84.2	65	pass
3047.275	v	89.6	65	pass
3482.600	v	88.7	65	pass
3917.925	v	92.3	65	pass
4353.250	v	91.5	65	pass

**Measurement Result for 12.5 KHz Channel Separation @ 469.975MHz**

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit below carrier(dBc)	Result(P/F)
469.975	v	0		pass
939.950	v	71.7	65	pass
1409.925	v	75.3	65	pass
1879.900	v	80.4	65	pass
2349.875	v	82.7	65	pass
2819.850	v	89.5	65	pass
3289.825	v	91.6	65	pass
3759.800	v	92.7	65	pass
4229.775	v	93.5	65	pass
4699.750	v	92.8	65	pass


**Notes:** The emissions were scanned from 30 MHz to 10th harmonics;

## 8.6 EMISSION MASK PLOT


The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 KHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 KHz (12.5 KHz channel spacing) .

### The Worst Emission Mask for 12.5 KHz channel Separation (50W)

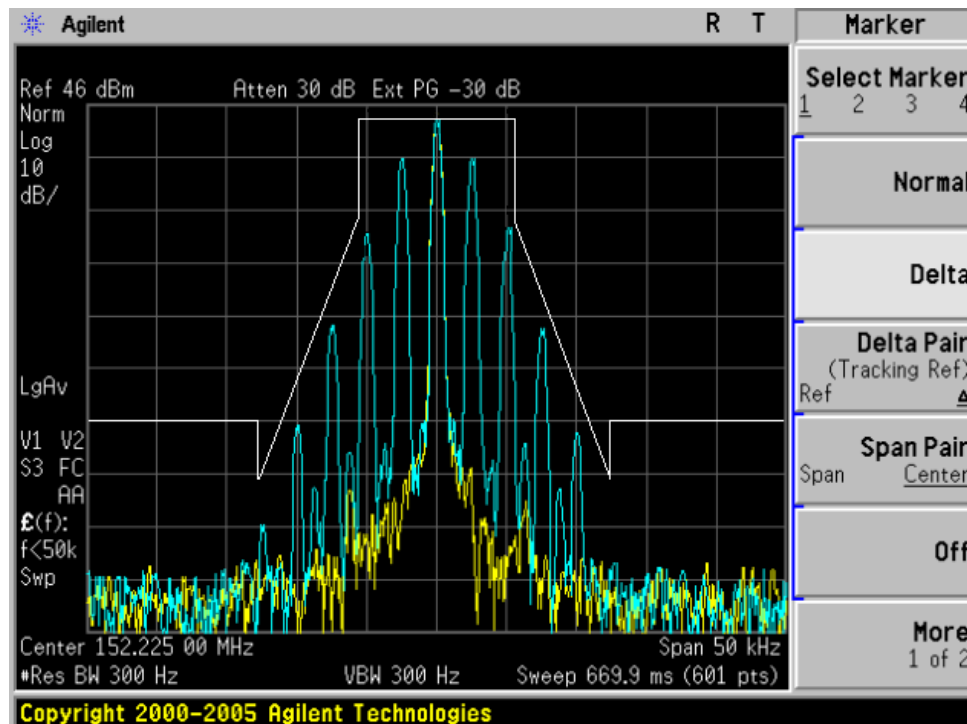

**The Worst Emission Mask for 12.5 KHz channel Separation (35W)**

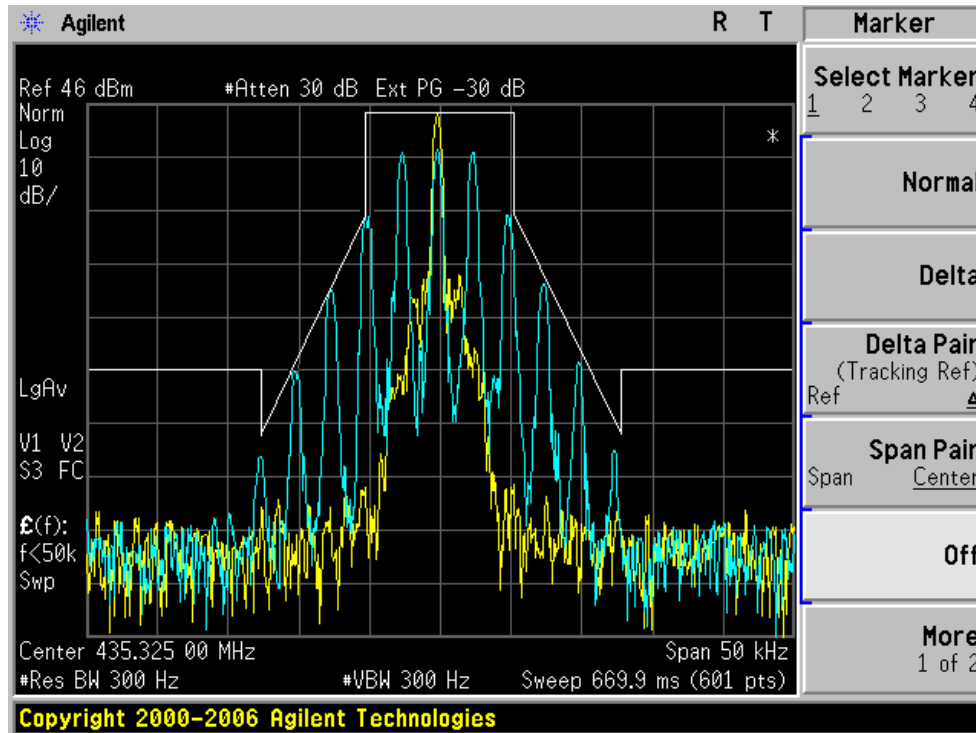

## 9. MODULATION CHARACTERISTICS

### 9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.


### 9.2 MEASUREMENT METHOD

#### 9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

#### 9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response =  $20\log_{10} (\text{Deviation of test frequency} / \text{Deviation of 1 KHz reference})$ .

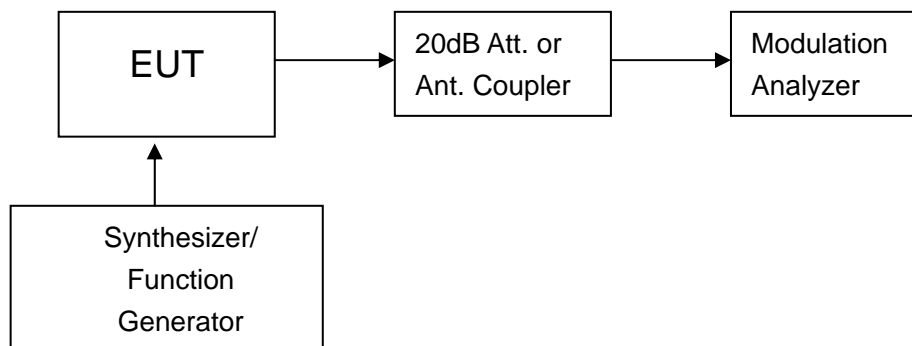

**Figure 1: Modulation characteristic measurement configuration**

### 9.3 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Modulation Analyzer	HP	8920B	N/A	2013-07-17

NOTE: 8920B can generate audio modulation frequency.




## 9.4 MEASUREMENT RESULT

### (a). Modulation Limit:


#### Middle Channel @ 12.5 KHz Channel Separations for VHF Band

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.26	0.76	0.84	0.88
-15	0.35	0.87	0.92	0.95
-10	0.47	1.23	1.25	1.37
-5	0.65	1.44	1.46	1.49
0	0.72	1.50	1.55	1.58
+5	0.84	1.72	1.74	1.82
+10	0.92	1.74	1.72	1.78
+15	0.85	1.66	1.73	1.76
+20	0.79	1.59	1.68	1.65

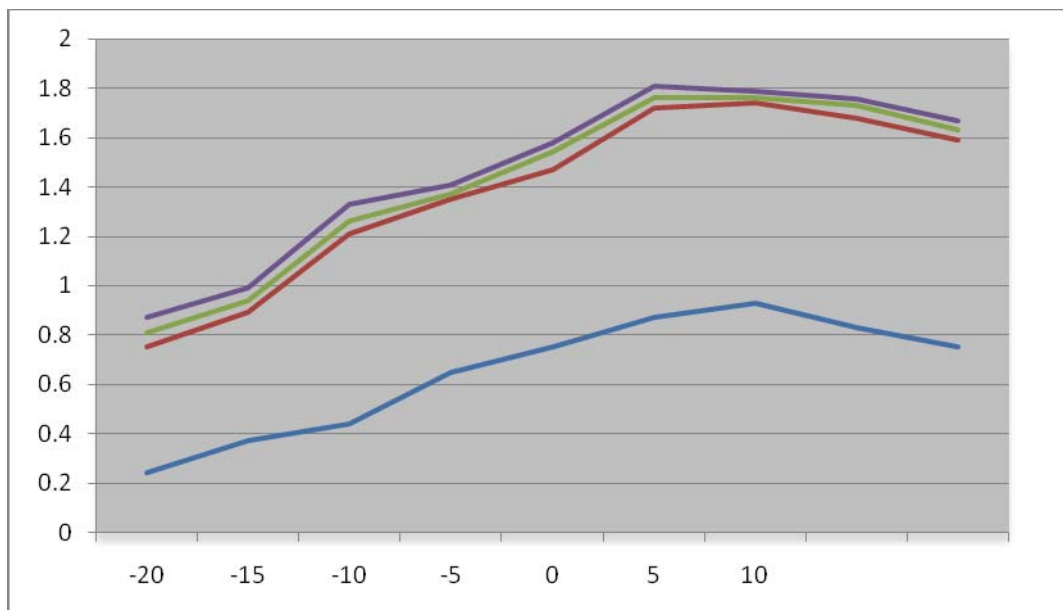

**Middle Channel @ 12.5 KHz Channel Separations for UHF Band**

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 1500 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)
-20	0.15	0.84	0.93	0.97
-15	0.17	0.93	0.95	0.96
-10	0.25	1.27	1.28	1.35
-5	0.34	1.37	1.39	1.47
0	0.37	1.51	1.56	1.61
5	0.48	1.77	1.79	1.82
10	0.43	1.73	1.77	1.80
15	0.37	1.69	1.71	1.77
20	0.27	1.62	1.65	1.67

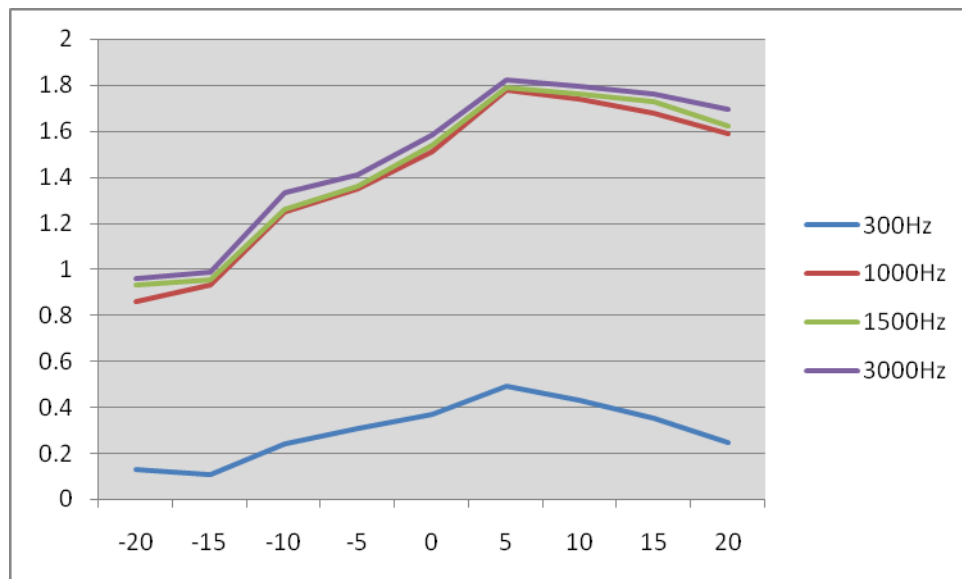


**(b). Audio Frequency Response:**

**12.5 KHz Middle Channel Separations for VHF Band**

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.14	-11.228843
400	0.21	-7.7070176
500	0.27	-5.5241282
600	0.29	-4.9034436
700	0.32	-4.048404
800	0.43	-1.4820344
900	0.47	-0.7094464
1000	0.51	0
1200	0.52	0.16866335
1400	0.62	1.69643027
1600	0.67	2.37009253
1800	0.69	2.62557829
2000	0.74	3.23323087
2400	0.77	3.57841098
2500	0.80	3.91039622
2800	0.85	4.43697499
3000	0.88	4.73824992
3200	0.91	5.02942432
3600	0.94	5.31115355
4000	0.99	5.76130037
4500	0.77	3.57841098
5000	0.64	1.97219596
5500	0.58	1.11715635
6000	0.55	0.65585027
6500	0.03	-24.608978
7000	0.02	-28.130804
7500	0.01	-34.151404
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--


**Frequency Response of Middle Channel**

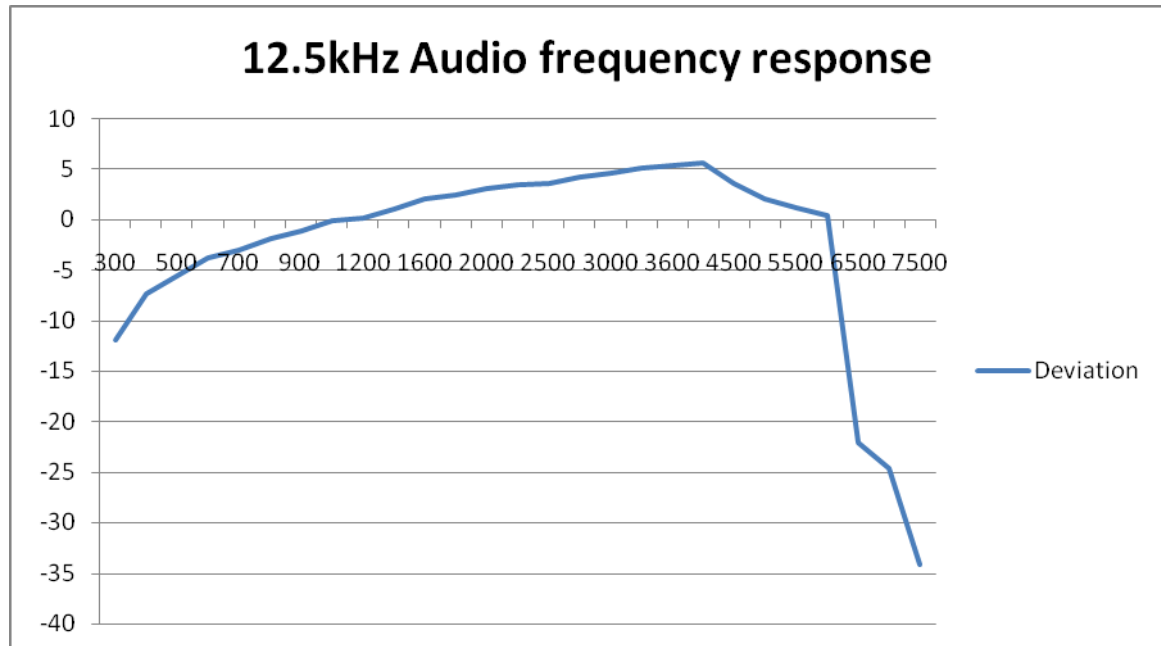

**12.5 KHz Middle Channel Separations (Worst) for UHF band**

Frequency (Hz)	Deviation (KHz)	Audio Frequency Response(dB)
100	--	--
200	--	--
300	0.13	-11.872536
400	0.18	-9.0459534
500	0.21	-7.7070176
600	0.23	-6.9168468
700	0.25	-6.1926033
800	0.35	-3.2700426
900	0.44	-1.28235
1000	0.5	-0.1720034
1200	0.55	0.65585027
1400	0.67	2.37009253
1600	0.79	3.8011383
1800	0.87	4.63898153
2000	0.97	5.58403116
2400	1.35	8.45527185
2500	1.46	9.13565359
2800	1.67	10.3029259
3000	1.75	10.7093575
3200	1.69	10.4063306
3600	1.52	9.48546824
4000	1.04	6.18926326
4500	0.87	4.63898153
5000	0.74	3.23323087
5500	0.42	-1.6864177
6000	0.11	-13.32355
6500	0.04	-22.110204
7000	0.02	-28.130804
7500	0.01	-34.151404
9000	--	--
10000	--	--
14000	--	--
18000	--	--
20000	--	--
30000	--	--

**Frequency Response of Middle Channel**

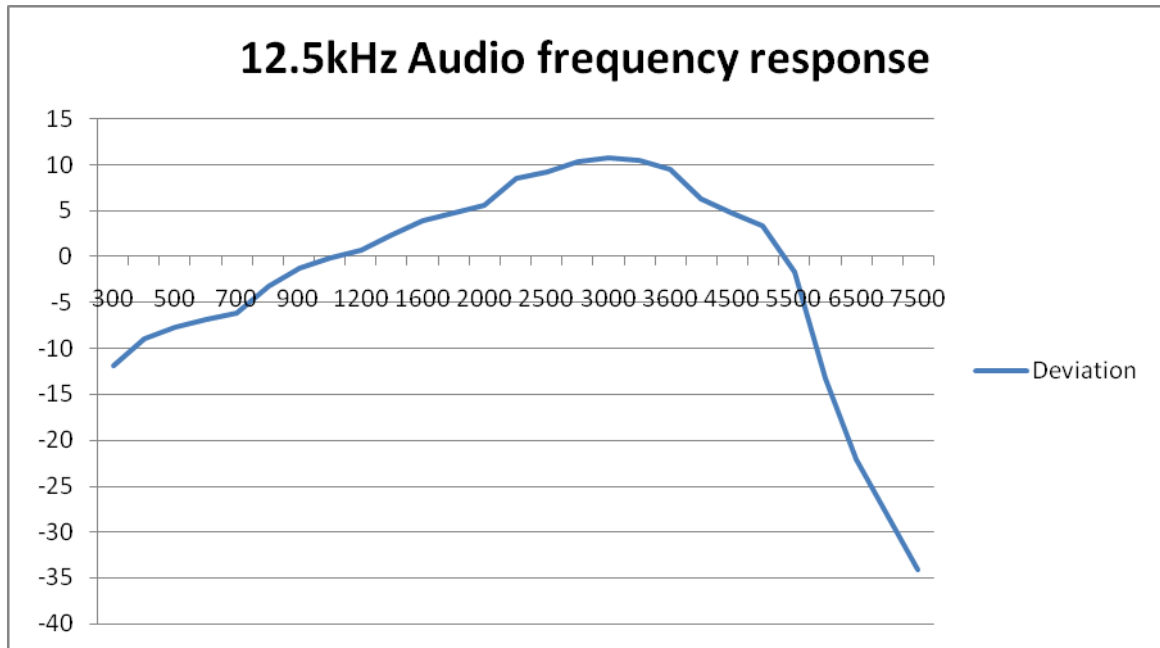

## 10. MAXIMUM TRANSMITTER POWER (CONDUCTED OUTPUT POWER) AND CONDUCTED SPURIOUS EMISSION

### 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

### 10.2 TEST PROCEDURE

The RF output of Two-way Radio was connected to a spectrum analyzer through an appropriate attenuator.

The transmitter shall be modulated by a 2.5 KHz audio signal,


The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 KHz (12.5 KHz channel spacing)

Measure and record the transmitter output power, using a measurement (resolution) bandwidth at least two to three times the occupied bandwidth for transmitters equipped to capture the true peak emission of the equipment under test.

### 10.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	N/A	2013.07.17

### 10.4 TEST CONFIGURATION

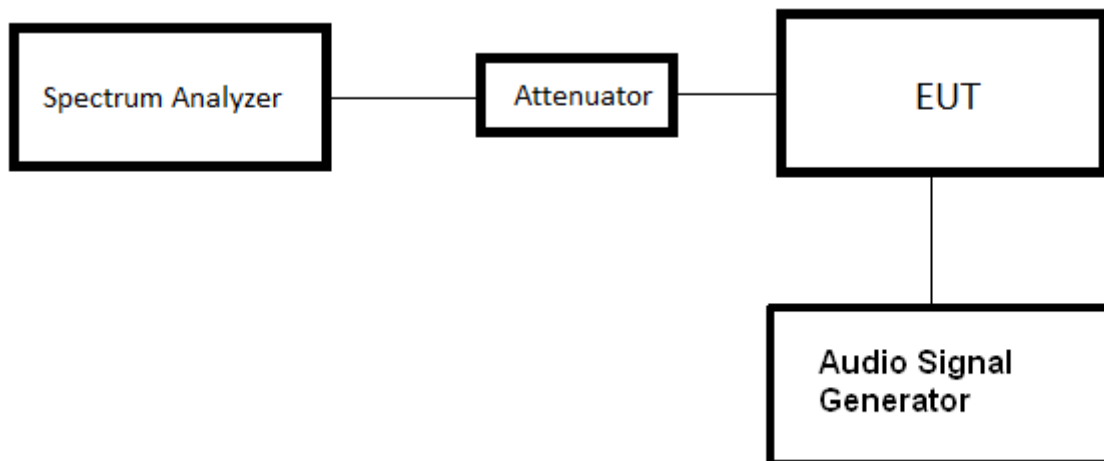

## 10.5 TEST RESULT

The maximum Conducted Power (CP) is

50W for 12.5 KHz Channel Separation for VHF

35W for 12.5 KHz Channel Separation for UHF


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 46.98dBm(50W)
12.5 KHz	Bottom(136.025MHz)	46.63
	Middle(152.225MHz)	46.59
	Top (173.975MHz)	46.87

Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result (dBm)
		For 45.44dBm(40W)
12.5 KHz	Bottom(400.025MHz)	45.27
	Middle(435.325MHz)	45.39
	Top (519.975MHz)	45.19






## 10.7 CONDUCT SPURIOUS PLOT

### Conducted Spurious Emission(worst) @ 152.225MHz (30MHz-1GHz)

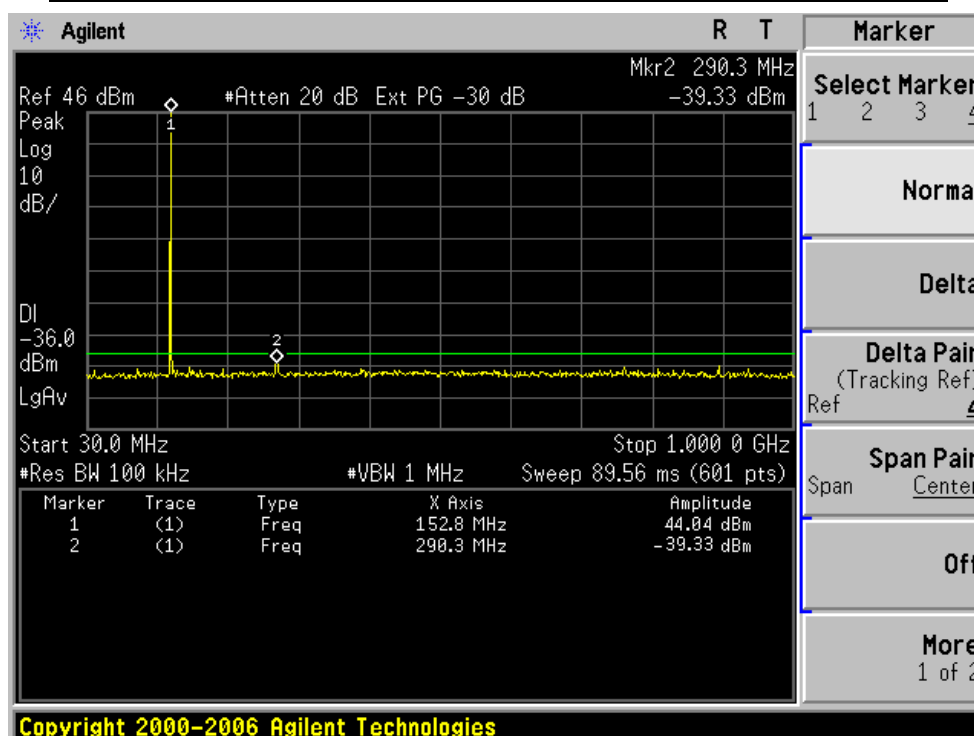

### Conduct Spurious Emission(worst) @ 152.225MHz (1GHz-12.75GHz)

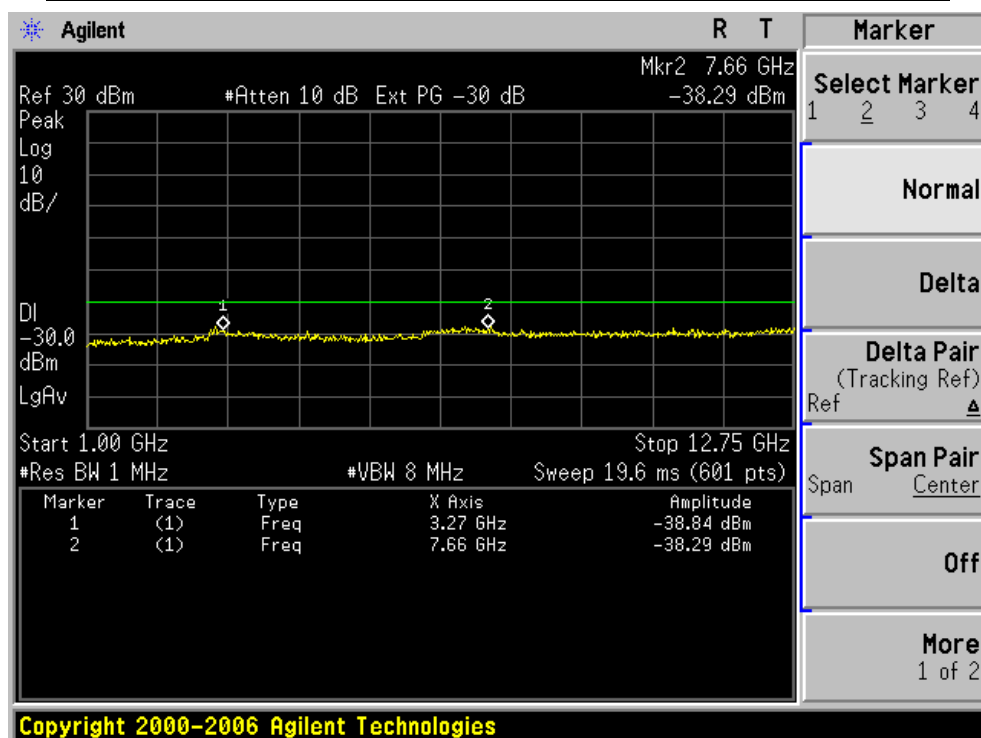

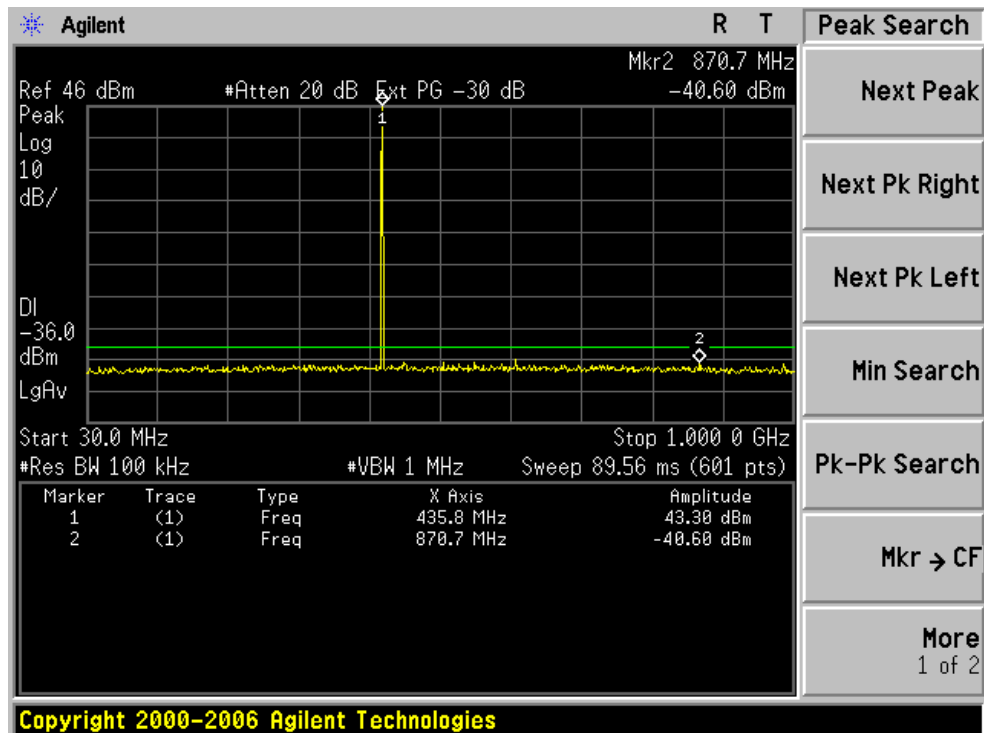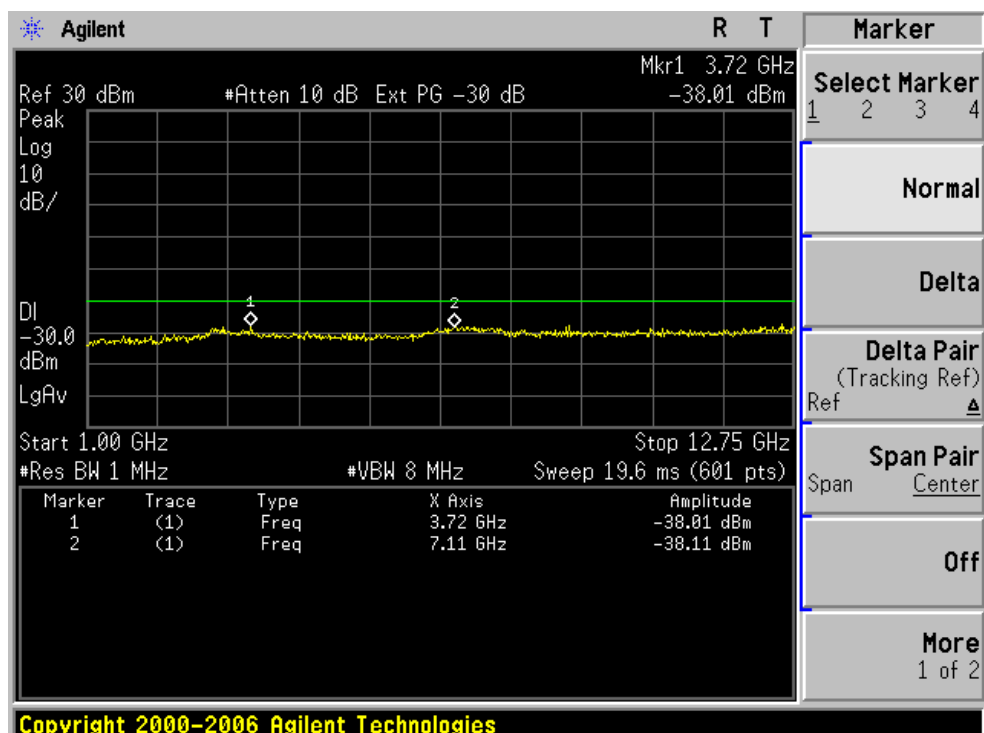**Conducted Spurious Emission(worst) @ 435.325MHz (30MHz-1GHz)****Conduct Spurious Emission(worst) @ 435.325MHz (1GHz-12.75GHz)**

## 11. TRANSMITTER FREQUENCY BEHAVIOR

### 11.1 PROVISIONS APPLICABLE

Section 90.214

Time intervals <sup>1, 2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 25.0 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 12.5 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 25.0 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 12.5 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 6.25 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 12.5 kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
t <sub>1</sub> <sup>4</sup> .....	± 6.25 kHz	5.0 ms	10.0 ms
t <sub>2</sub> .....	± 3.125 kHz	20.0 ms	25.0 ms
t <sub>3</sub> <sup>4</sup> .....	± 6.25 kHz	5.0 ms	10.0 ms

<sup>1</sup>  $t_{\text{off}}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{\text{off}}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{\text{off}}$ .

$t_{\text{off}}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

### 11.2 TEST METHOD

TIA/EIA-603 2.2.19

### 11.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Signal Generator	R&S	SMT02	A0304261	2013.07.17
Storage Oscilloscope	Tektronix	TDS3052	B017447	2013.07.17

#### 11.4 DESCRIBE LIMIT LINE OF TRANSMITTER FREQUENCY BEHAVIOR


**ton:** The switch-on instant  $t_{on}$  of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).


**t1:** period of time starting at  $t_{on}$  and finishing according to above 11.1

**t2:** period of time starting at the end of  $t_1$  and finishing according to above 11.1

**toff:** switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

**t3:** period of time that finishing at  $t_{off}$  and starting according to above 11.1

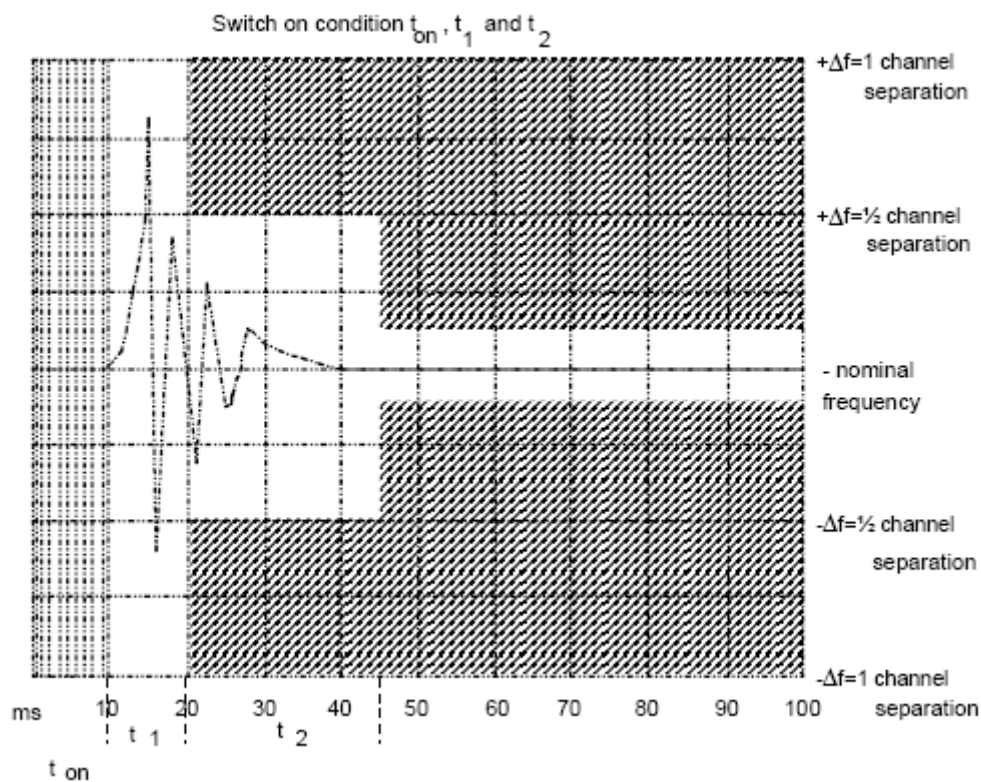


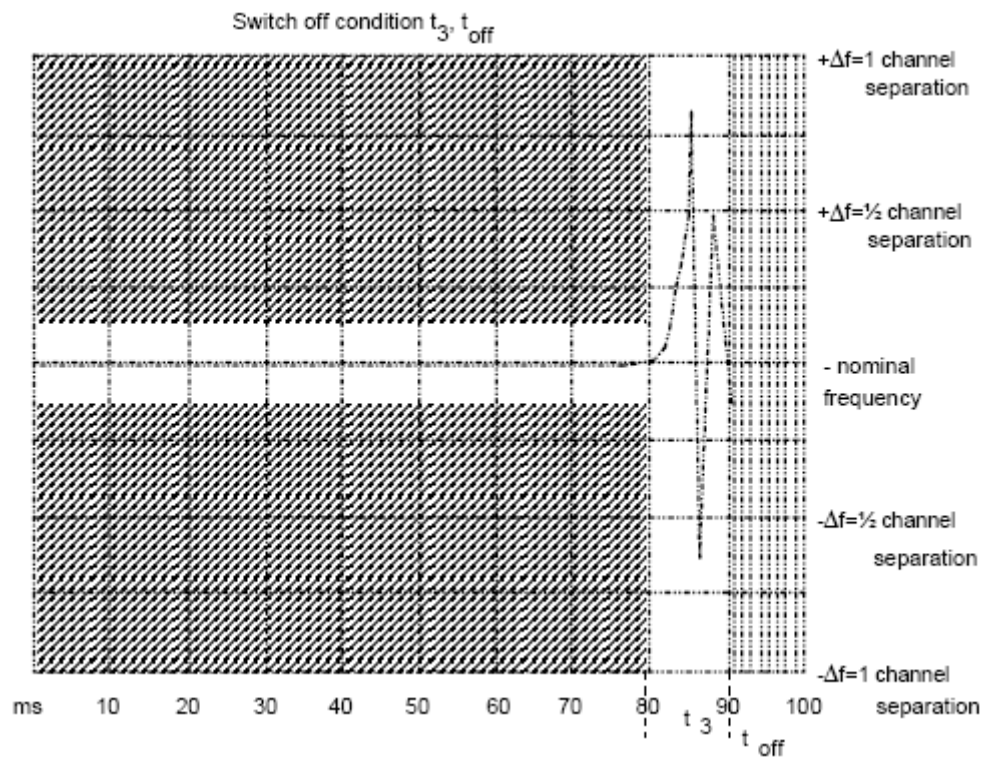


## 11.5 MEASURE RESULT

### FOR VHF BAND

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

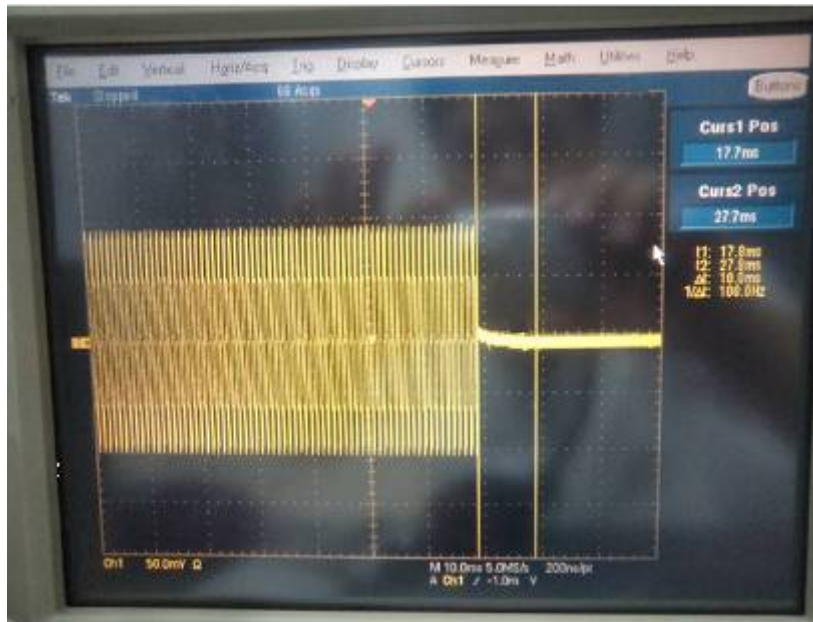


Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

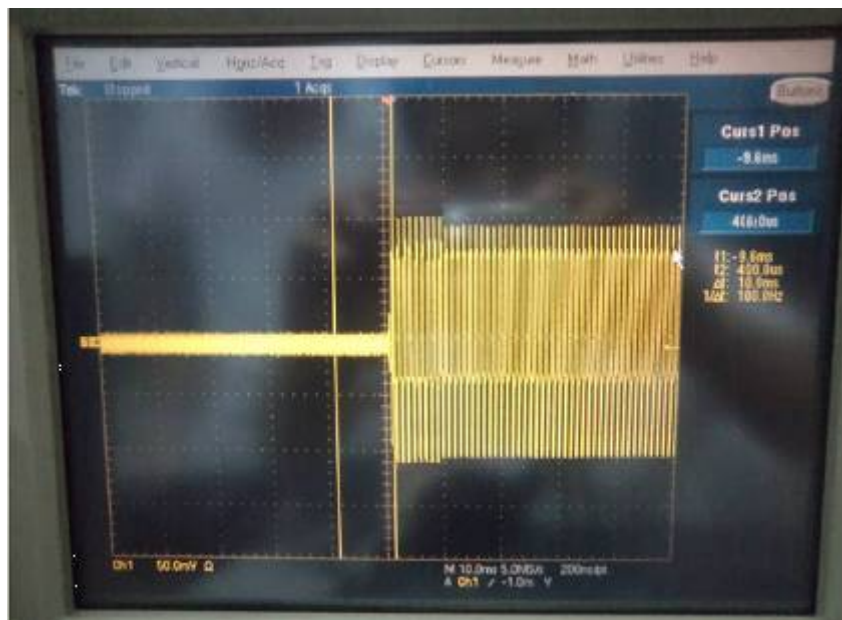


### FOR UHF BAND

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

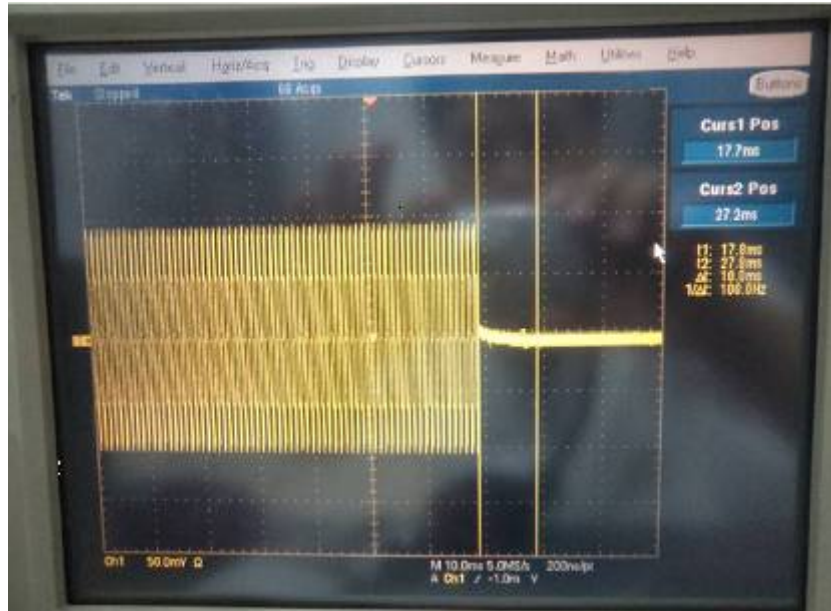

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

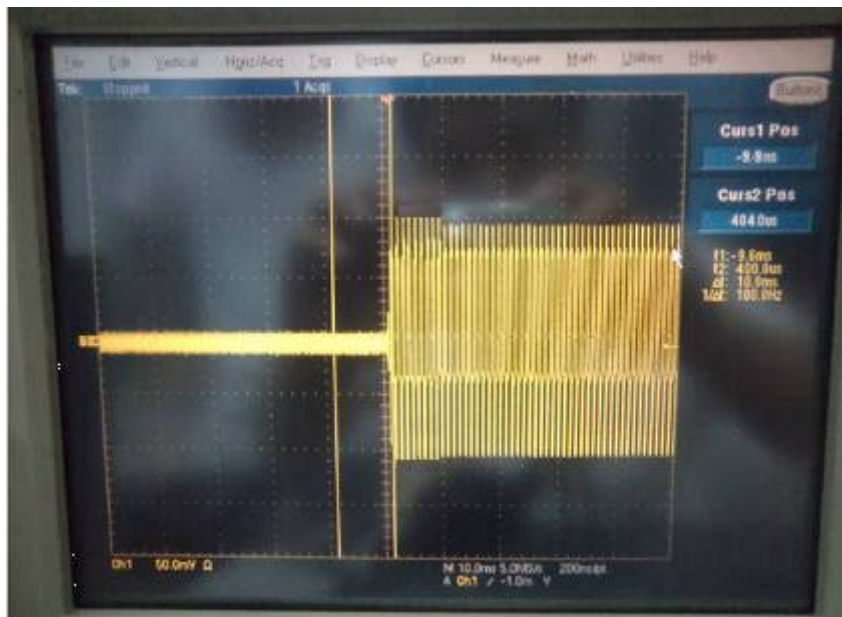

## 12. RADIATED EMISSION ON RECEIVING MODE

### 12.1 PROVISIONS APPLICABLE

FCC Part 15 Subpart B Section 15.109

### 12.2 TEST METHOD

ANSI C 63.4: 2003

### 12.3 TEST INSTRUMENTS


NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	N/A	2013.07.17
TEST RECEIVER	R&S	ESCI	N/A	2013.07.17
LOOP ANTENNA	A.H.	SAS-562B	A0304220	2013.07.17
HORN ANT.	EM	EM-AH-10180	N/A	2013.07.17
BROADBAND ANT.	A.H.	SAS-521-4	A0304224	2013.07.17



## 12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

### RADIATED EMISSION TEST RESULTS – HORIZONTAL

#### Radiated Emission Measurement

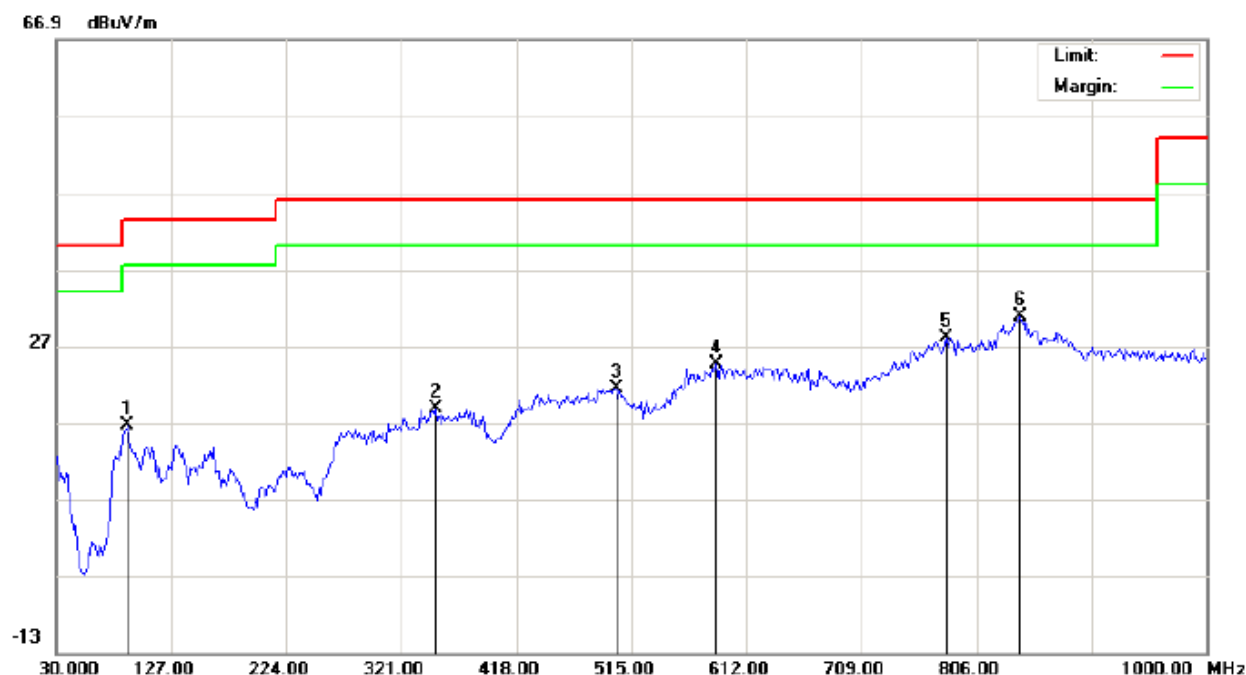

Site: site #1  
Limit: FCC Class B 3M Radiation  
EUT: Land Mobile Radio  
M/N: 5888UV  
Mode: Charging  
Note:


Polarization: **Horizontal**  
Power:  
Distance: 3m

Temperature: 26  
Humidity: 60 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		89.8167	-0.50	17.11	16.61	43.50	-26.89	peak			
2		350.1000	-0.27	19.05	18.78	46.00	-27.22	peak			
3		502.0667	-1.29	22.68	21.39	46.00	-24.61	peak			
4		586.1333	-0.14	24.74	24.60	46.00	-21.40	peak			
5		780.1333	-0.12	28.13	28.01	46.00	-17.99	peak			
6	*	843.1833	-0.17	30.99	30.82	46.00	-15.18	peak			

## RADIATED EMISSION TEST RESULTS – VERTICAL

### Radiated Emission Measurement

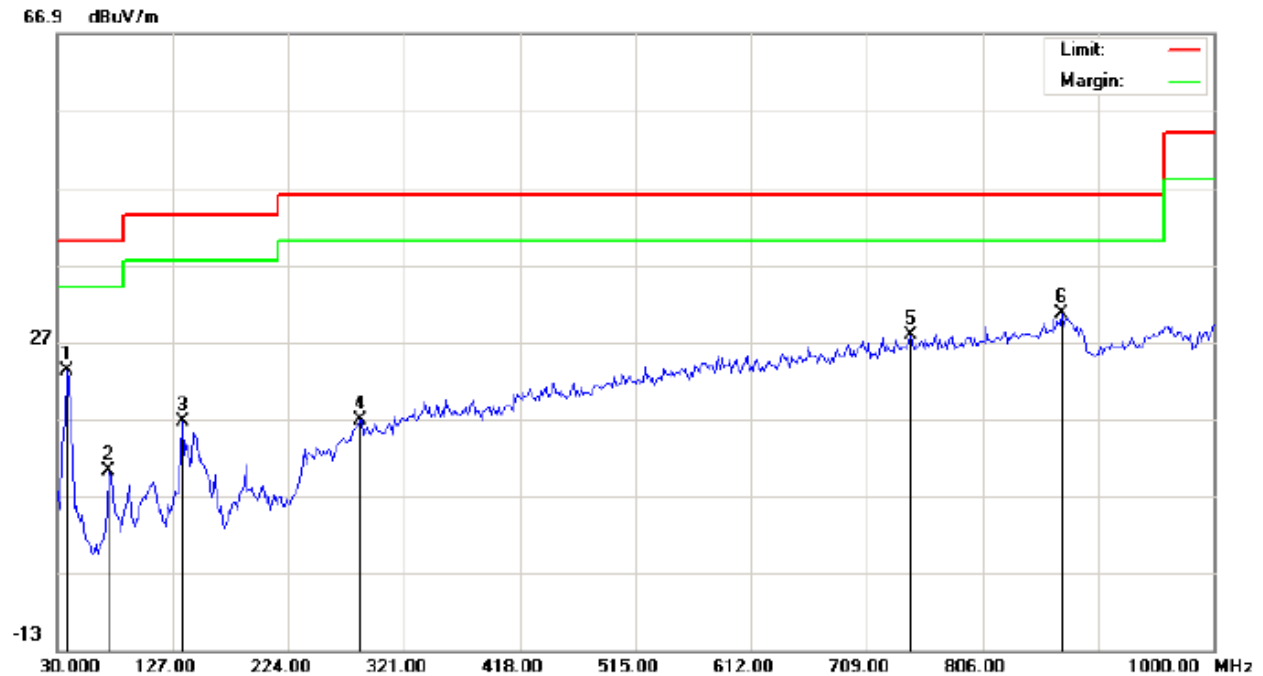

Site: site #1	Polarization: <b>Vertical</b>	Temperature: 26
Limit: FCC Class B 3M Radiation	Power:	Humidity: 60 %
EUT: Land Mobile Radio	Distance: 3m	
M/N: 5888UV		
Mode: Charging		
Note:		

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		38.0833	15.51	7.60	23.11	40.00	-16.89	peak			
2		73.6500	4.91	5.35	10.26	40.00	-29.74	peak			
3		135.0833	6.01	10.58	16.59	43.50	-26.91	peak			
4		283.8167	-0.28	17.16	16.88	46.00	-29.12	peak			
5		746.1833	0.36	27.49	27.85	46.00	-18.15	peak			
6	*	872.2833	0.75	29.93	30.68	46.00	-15.32	peak			

## 13. Audio Low Pass Filter Response

### 13.1 LIMITS

**2.1047(a):** Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

**90.242(b)(8):** Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation
3 –20 KHz 20 – 30 KHz	$60 \log_{10}(f/3)$ dB where f is in KHz 50dB

### 13.2. METHOD OF MEASUREMENTS


The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.

### 13.3 TEST DATA

**12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States**

Frequency (KHz)	Audio In (dBV)	Audio out (dBV)	Attenuation (Out_In) dB	Attenuation Rel. to 3 KHz (dB)	Recommended Attenuation (dB)
0.1	-75.79	-30.27	45.7	-36.7	
0.2	-75.79	-18.84	57.2	-25.5	
0.4	-75.79	-5.31	70.4	-12.0	
0.6	-75.79	0.25	76.1	-6.4	
0.8	-75.79	4.11	79.8	-2.6	
1.0	-75.79	6.73	82.6	0.0	
1.5	-75.79	8.59	84.3	2.1	
2.0	-75.79	8.62	84.4	1.9	
2.5	-75.79	7.33	82.9	0.5	
3.0	-75.79	5.42	81.2	-1.4	0
3.5	-75.79	2.11	78.3	-4.3	-4
4.0	-75.79	-2.62	73.2	-9.7	-7
4.5	-75.79	-8.41	67.6	-15.3	-11
5.0	-75.79	-14.05	61.7	-21.5	-13
6.0	-75.79	-22.68	53.5	-29.4	-18
7.0	-75.79	-30.62	45.4	-37.5	-22
8.0	-75.79	-38.95	36.7	-45.5	-26
9.0	-75.79	-60.00	15.5	-64.6	-29
10.0	-75.79	-60.00	15.5	-64.6	-31
12.0	-75.79	-60.00	15.5	-64.6	-36
14.0	-75.79	-60.00	15.5	-64.6	-40
16.0	-75.79	-60.00	15.5	-64.6	-44
18.0	-75.79	-60.00	15.5	-64.6	-47
20.0	-75.79	-60.00	15.5	-64.6	-50
25.0	-75.79	-60.00	15.5	-64.6	-50
30.0	-75.79	-60.00	15.5	-64.6	-50
35.0	-75.79	-60.00	15.5	-64.6	-50
40.0	-75.79	-60.00	15.5	-64.6	-50
45.0	-75.79	-60.00	15.5	-64.6	-50
50.0	-75.79	-60.00	15.5	-64.6	-50


**Note:** Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

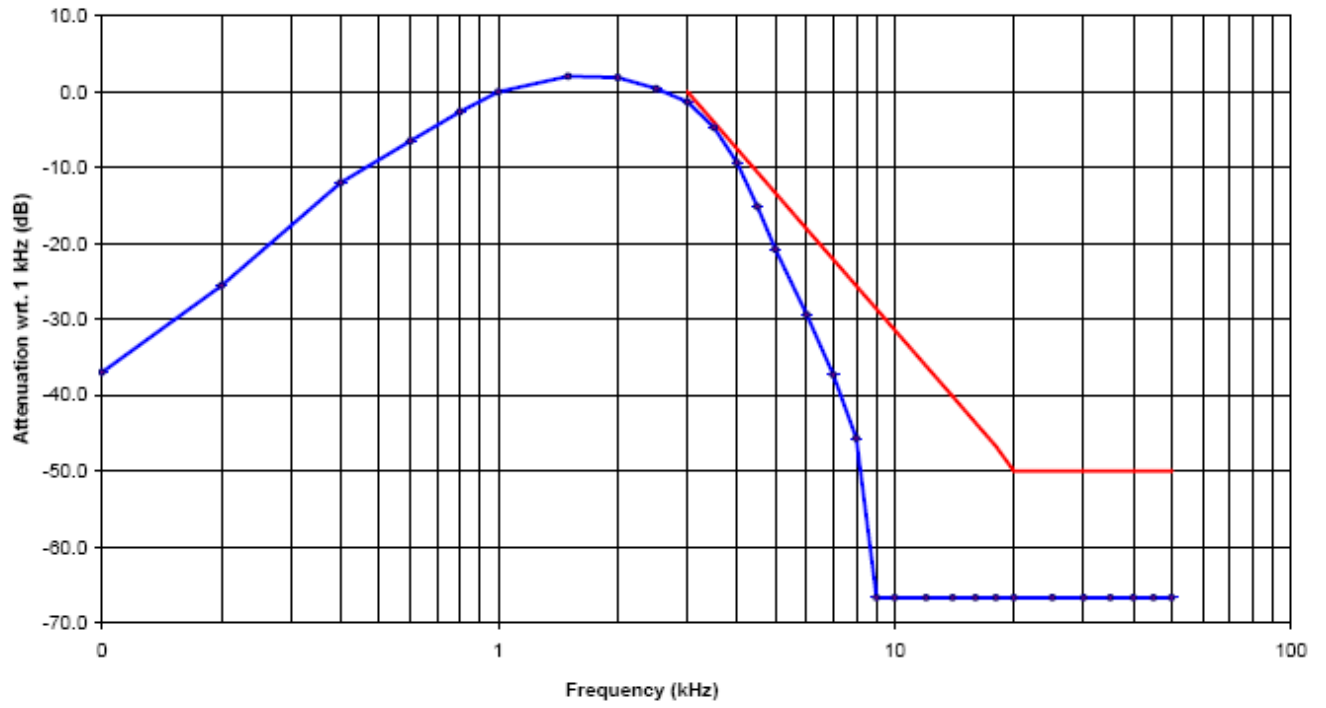

## **APPENDIX I**

### **PHOTOGRAPHS OF SETUP**

## RADIATED TEST SETUP

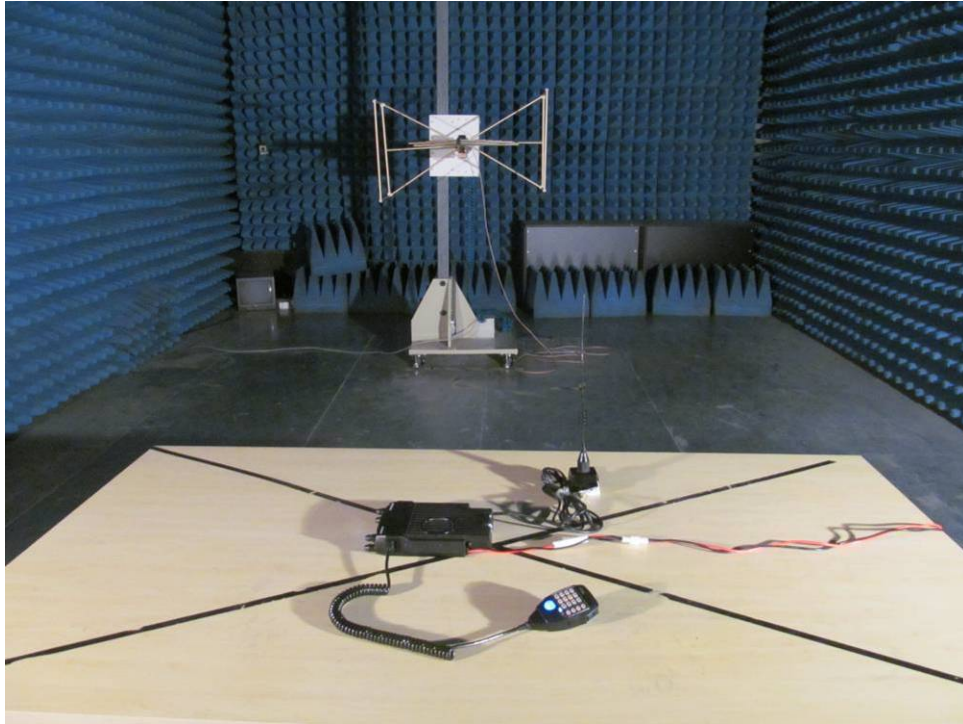

## **APPENDIX II**


### **EXTERNAL VIEW OF EUT**



TOTAL VIEW OF EUT



TOP VIEW OF EUT

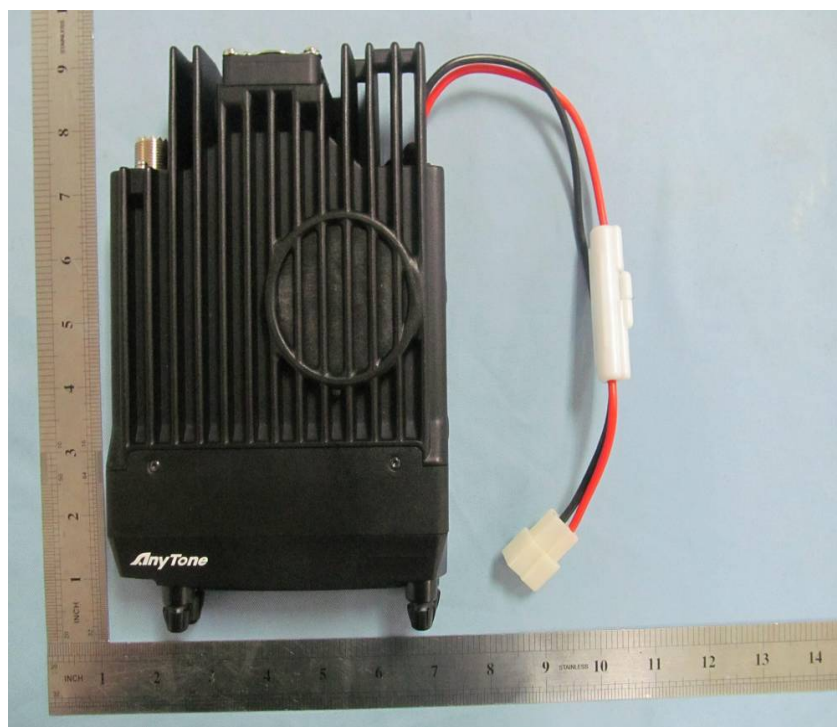

BOTTOM VIEW OF EUT




FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT

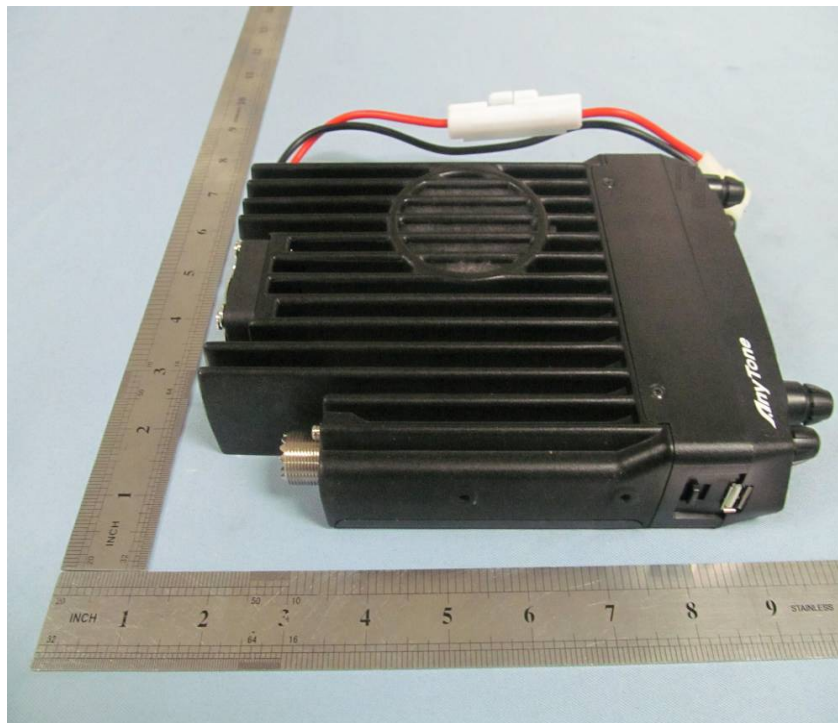





RIGHT VIEW OF EUT




OPEN VIEW1 OF EUT

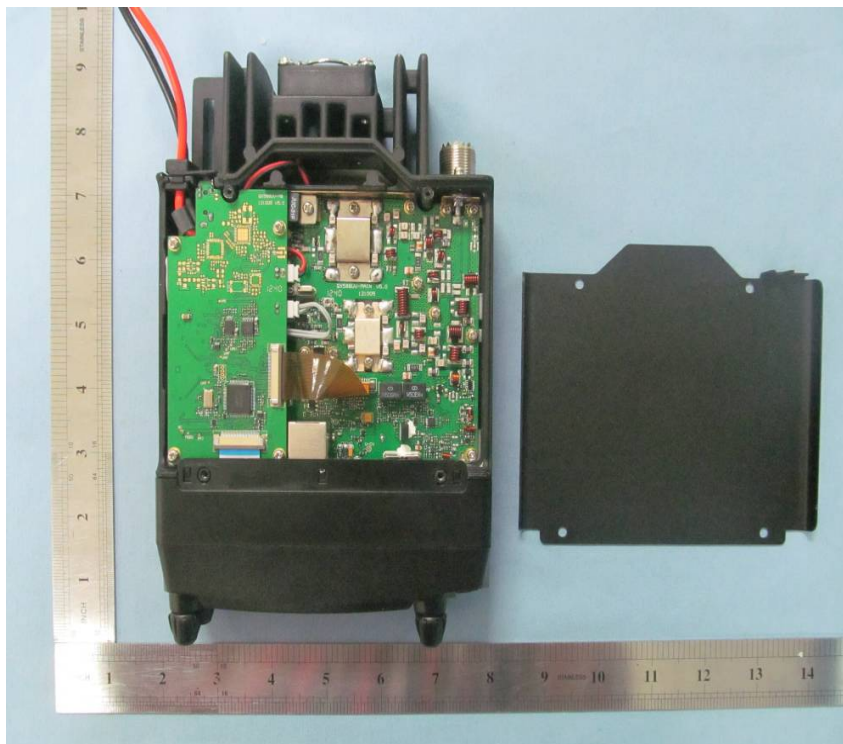


OPEN VIEW2 OF EUT

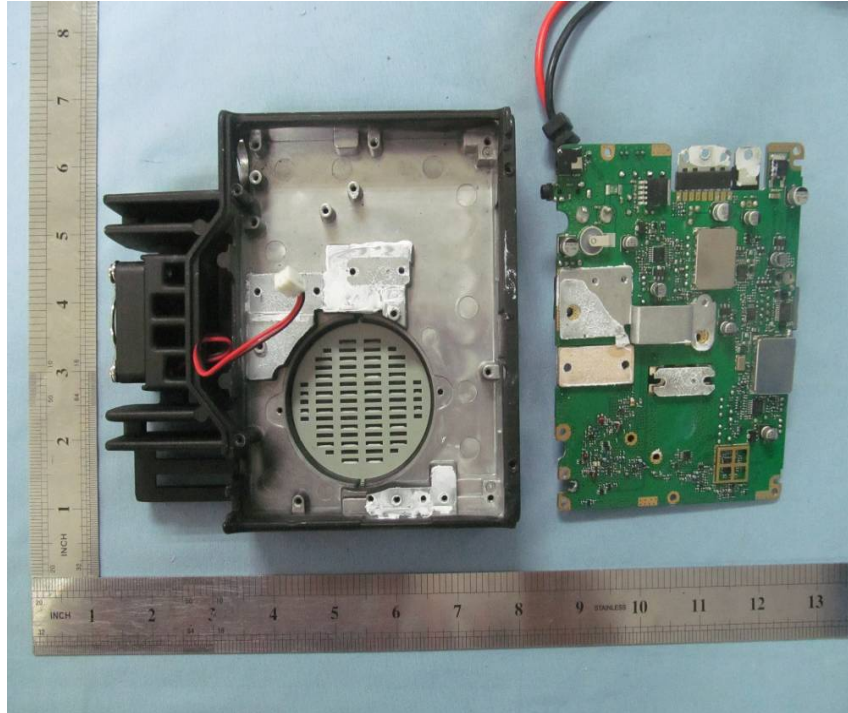


OPEN VIEW3 OF EUT

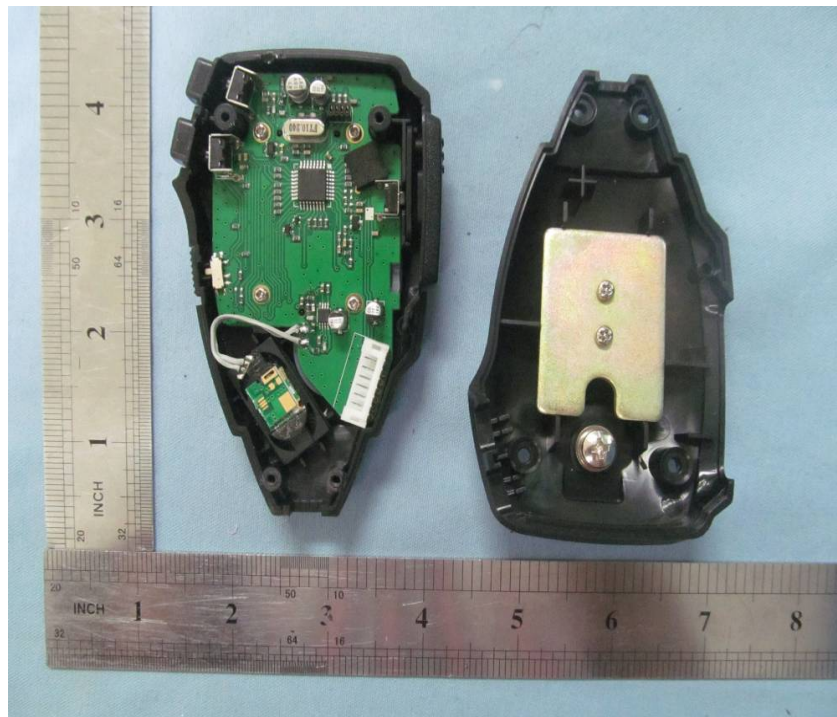

INTERNAL VIEW OF EUT - 1

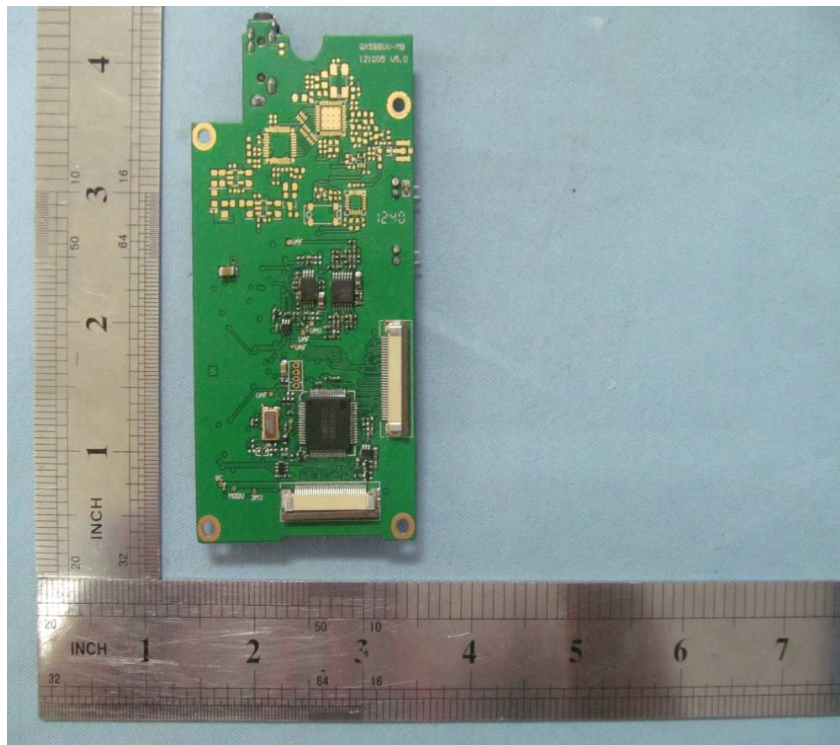


INTERNAL VIEW OF EUT - 2

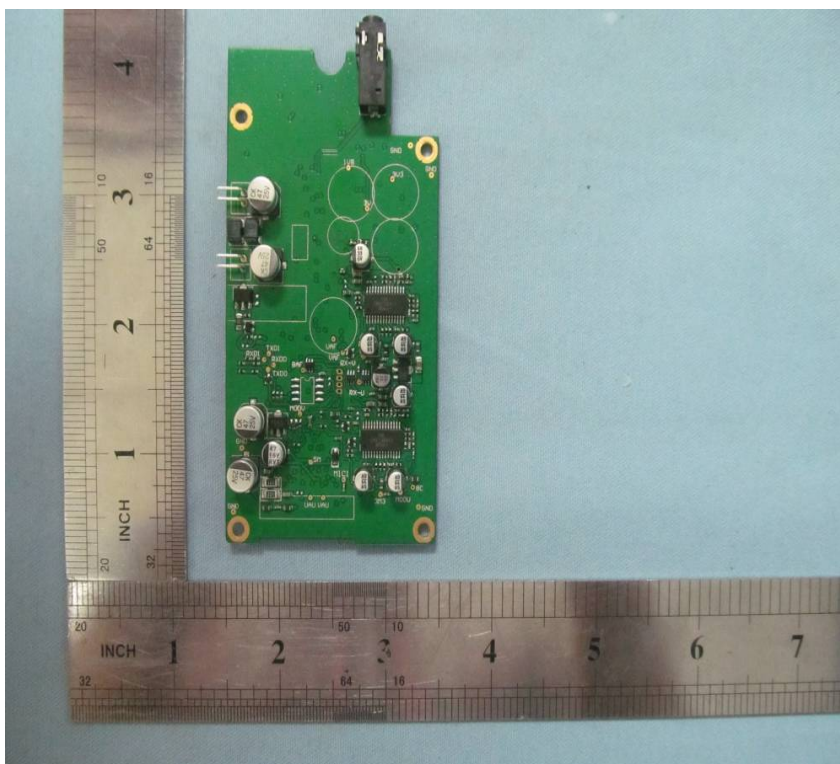





INTERNAL VIEW OF EUT - 3

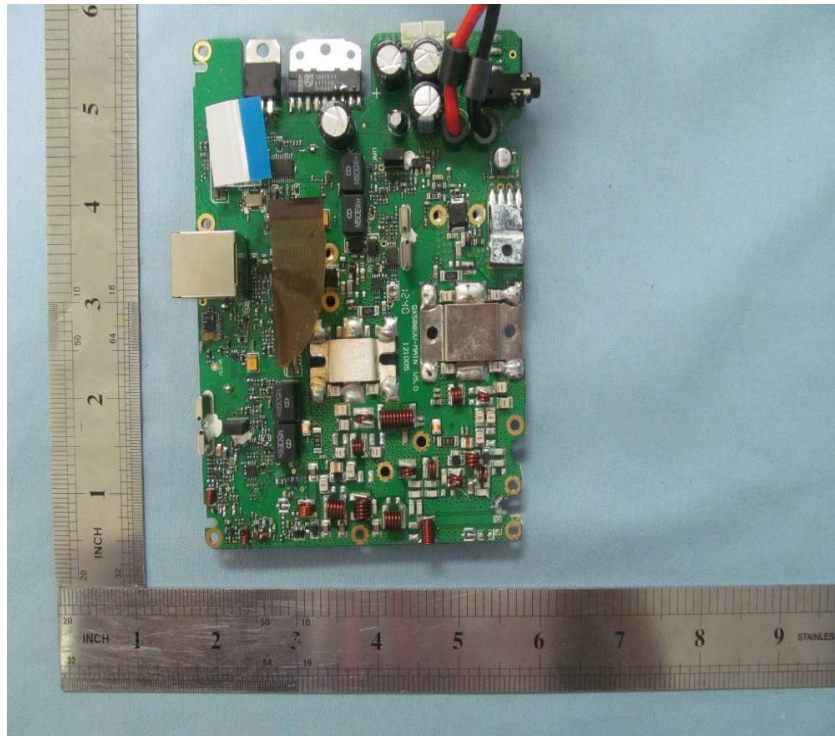


INTERNAL VIEW OF EUT - 4

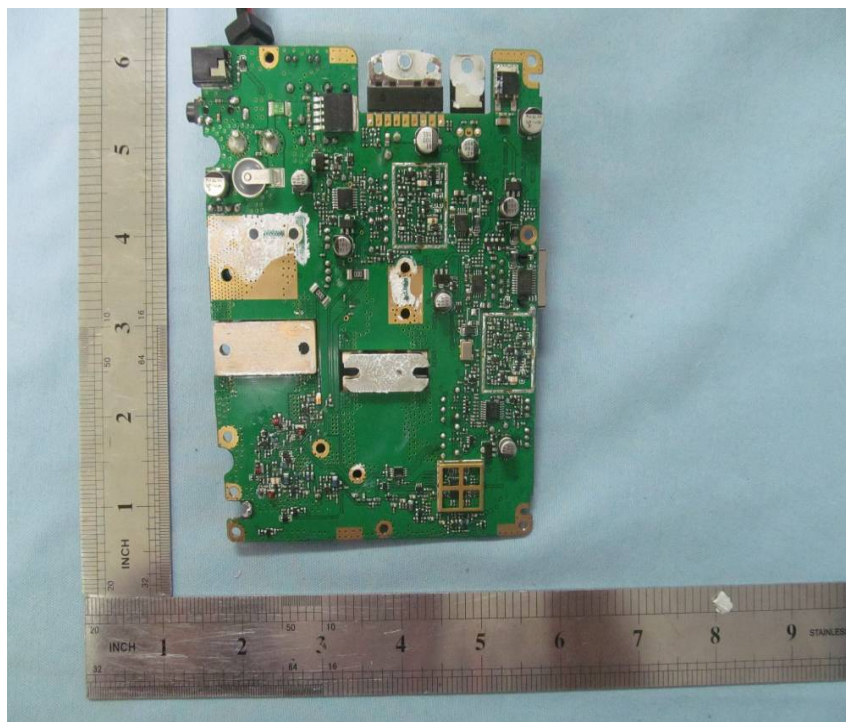

**INTERNAL VIEW OF EUT - 5**

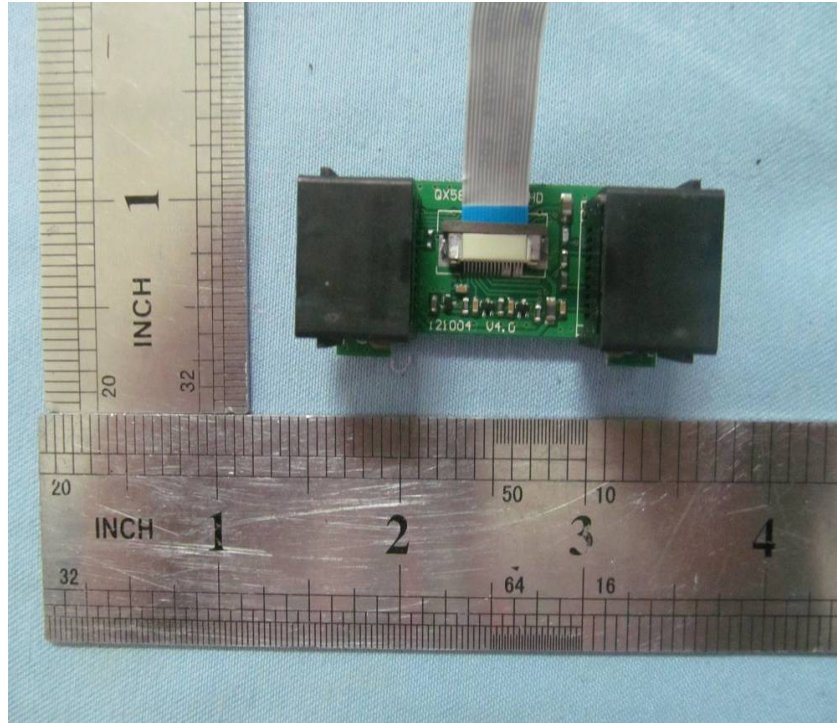


**INTERNAL VIEW OF EUT - 6**

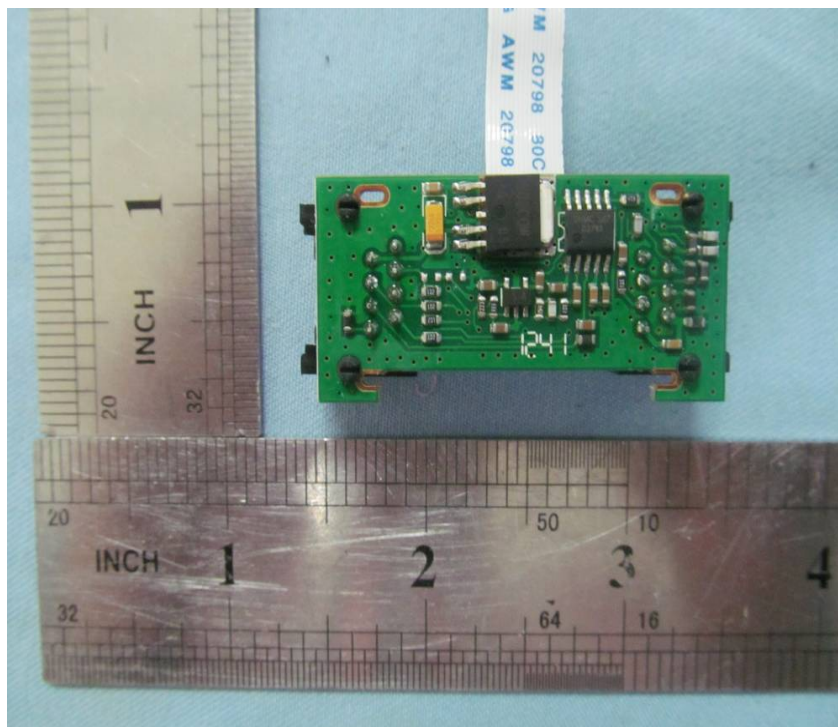




INTERNAL VIEW OF EUT - 7

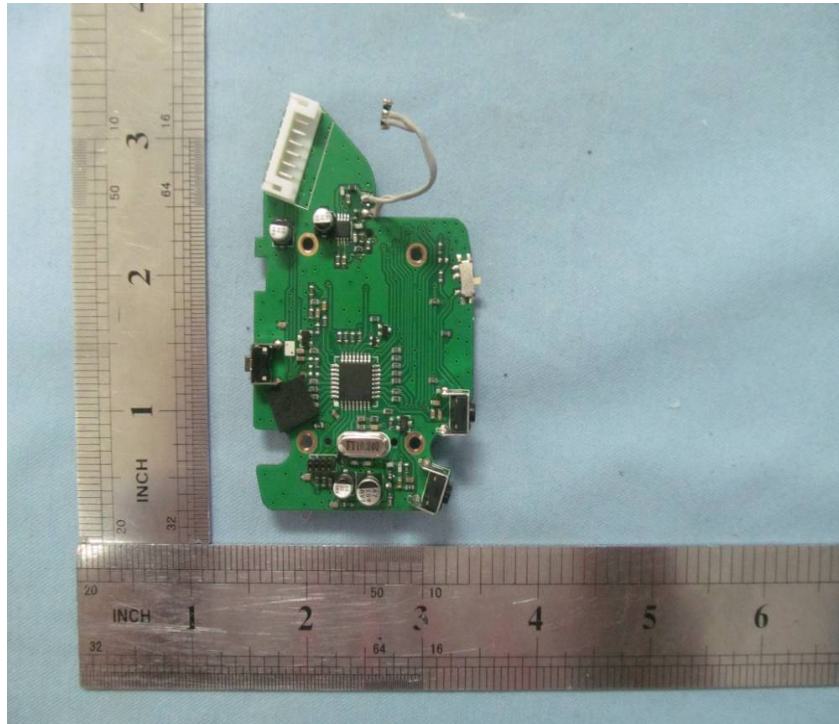

INTERNAL VIEW OF EUT - 8

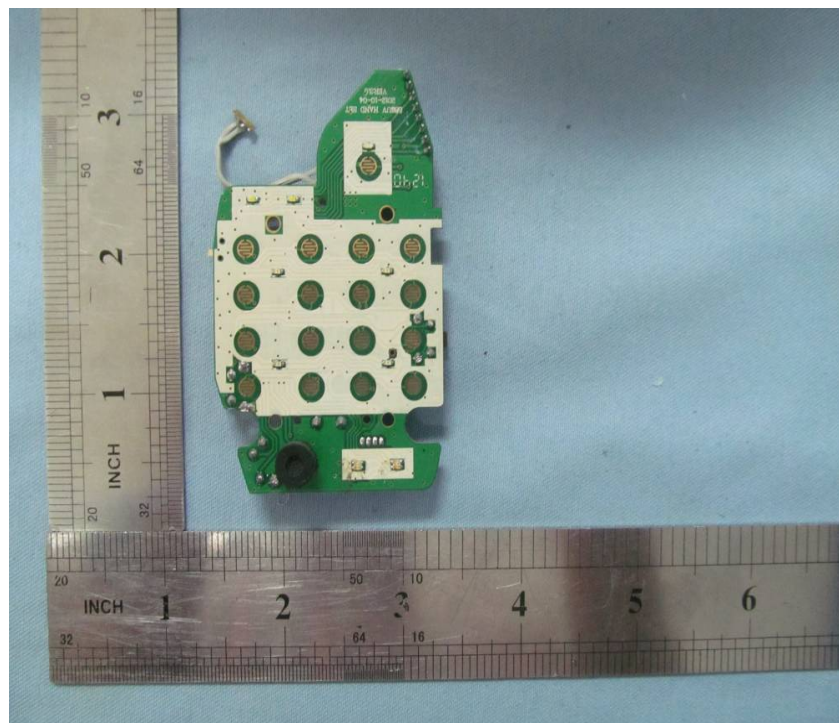

----END OF REPORT----