

# **FCC Test Report**

Report No.: AGC01284240708FE01

**FCC ID** : T4K-D168U

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Digital DMR and Analog Radio

**BRAND NAME** : AnyTone

MODEL NAME : AT-D168, AT-D168I, AT-D168A, AT-D168B, AT-D169,

AT-D169II

**APPLICANT**: Qixiang Electron Science & Technology Co., Ltd.

**DATE OF ISSUE** : Aug. 05, 2024

**STANDARD(S)** : FCC Part 15 Subpart B

**REPORT VERSION**: V1.0


Attestation of Global Co., Ltd



Page 2 of 21

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 05, 2024	Valid	Initial Release





# **Table of Contents**

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Auxiliary Surrounding Description	5
2.2 Test Methodology	6
2.3 Definition of Device Classification	6
2.3 Description of Test Modes	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	g
4. Summary of Test Results	10
5. Radiated Emission Measurements	11
5.1 Provisions Applicable	11
5.2 Measurement Setup	11
5.3 Measurement Procedure	12
5.4 Measurement Result	13
6. Conducted Emission Measurements	17
6.1 Provisions Applicable	17
6.2 Measurement Setup	17
6.3 Measurement Procedure	18
6.4 Measurement Result	19
Appendix I: Photographs of Test Setup	21
Appendix II: Photographs of Test EUT	21





1. General Information

A college of	O' to a Floring O to a A To Lorley On 141	
Applicant	Qixiang Electron Science & Technology Co., Ltd.	
Address	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011	
	China	
Manufacturer	Qixiang Electron Science & Technology Co., Ltd.	
Address	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011	
Addiess	China	
Factory	Qixiang Electron Science & Technology Co., Ltd.	
Address	Qixiang Building, Tangxi Industrial Zone, Luojiang, Quanzhou, Fujian, 362011	
Address	China	
Product Designation	Digital DMR and Analog Radio	
Brand Name	AnyTone	
Test Model	AT-D168	
Series Model(s)	AT-D168II, AT-D168A, AT-D168B, AT-D169, AT-D169II	
Difference Description	Only the model name is different	
Date of receipt of test item	Jul. 15, 2024	
Date of Test	Jul. 15, 2024~Aug. 05, 2024	
Deviation from Standard	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Test Report Form No	AGCTR-ER-FCC-SDOC V1.0	

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Bibo Zhang	
	Bibo Zhang (Project Engineer)	Aug. 05, 2024
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 05, 2024
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Aug. 05, 2024



Page 5 of 21

# 2. Product Information

# 2.1 Product Technical Description

Housing Type	Plastic and metal
Highest Operating Frequency	⊠Greater than 108MHz  □Less than 108MHz
Equipment Type	Table-Top
Receiving Frequency	From 400MHz to 480MHzUHF
Hardware Version	V3.1
Software Version	V1.0
Power Supply	DC 7.4V 1800mAh by battery
Adapter Information	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 2A

# I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT			
I/O Port Type Q'TY Cable Tested with			
Antenna Port	1	0	1
Earphone Port	1	1.0m unshielded	1
Type-C Port	1	1.0m unshielded	1

# 2.2 Auxiliary Surrounding Description

The Following Peripheral Devices and Interface Cables Were Connected During the Measurement:

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	NA010050020	N/A	Input: AC 100-240V 50/60Hz, 0.5A Output: DC 5V 2A	1.0m unshielded
2	Charger	QBC-56L	Qixiang Electron Science & Technology Co., Ltd.	Input: DC 5V 2A Output: DC 8.4V 1A	N/A
3	Battery	QB-56L	Qixiang Electron Science & Technology Co., Ltd.	DC 7.4V 1800mAh	N/A
4	Antenna	N/A	N/A	N/A	N/A
5	USB Cable	N/A	N/A	N/A	N/A
6	Back Clip	N/A	N/A	N/A	N/A



Page 6 of 21

#### 2.2 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

#### 2.3 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

#### Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

#### 2.3 Description of Test Modes

No.	Test Mode	Remark
1	Receiving at low channel of 400 MHz to 470 MHz	Worst
2	Receiving at middle channel of 400 MHz to 470 MHz	-
3	Receiving at high channel of 400 MHz to 470 MHz	

Note: Only the result of the worst case was recorded in the report.



Page 7 of 21

# 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 21

#### 3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

### 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$



Report No.: AGC01284240708FE01 Page 9 of 21

3.5 List of Equipment Used

•	Radiated Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
$\boxtimes$	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31		
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23		
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10		
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2025-03-22		
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03		
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23		

•	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		

• Te	Test Software									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information					
$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0					
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A					
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS36-RSE)	4.0.0.0					
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71					



Page 10 of 21

# 4. Summary of Test Results

Item	FCC Rules	Description Of Test	Class/Severity	Result
1	Section 15.107	Radiated Emission	Class B	Pass
2	Section 15.109	Conducted Emission	Class B	Pass




#### 5. Radiated Emission Measurements

# 5.1 Provisions Applicable


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

Frequency Range	Class B Limit (dBuV/m @3m)	Class A Limit (dBuV/m @3m)	Value
30MHz-88MHz	30MHz-88MHz 40.00		Quasi-peak
88MHz-216MHz	43.50	53.50	Quasi-peak
216MHz-960MHz	46.00	56.00	Quasi-peak
960MHz-1GHz	54.00	64.00	Quasi-peak
Above 1GHz	54.00	60.00	Average
Above IGHZ	74.00	80.00	Peak

# 5.2 Measurement Setup

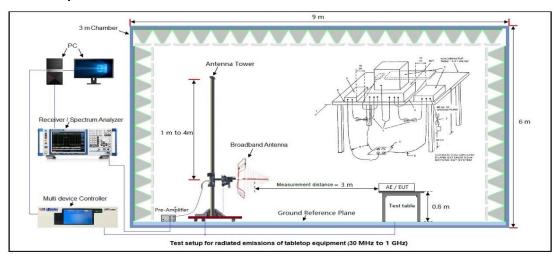

# Radiated Emission Measurements Test Setup for 30MHz to 1GHz

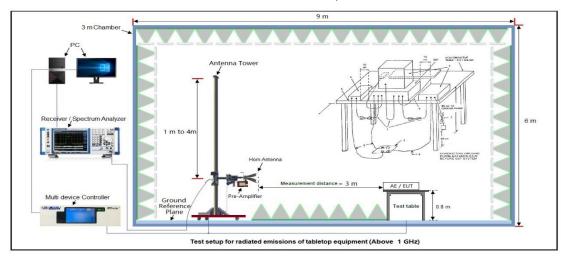

#### Radiated Emission Measurements Test Setup for above 1GHz



Page 12 of 21

#### **5.3 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 9. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the guasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.

#### **EMI Test Receiver Setup:**


During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.




Page 13 of 21

#### 5.4 Measurement Result

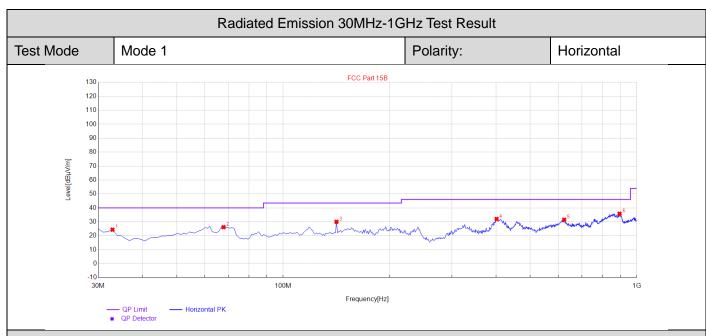


Final I	Final Data List_Peak									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	32.91	24.38	12.41	40.00	15.62	100	160	Horizontal		
2	67.83	26.19	15.36	40.00	13.81	100	170	Horizontal		
3	141.55	30.04	16.13	43.50	13.46	100	90	Horizontal		
4	401.51	32.05	16.48	46.00	13.95	100	220	Horizontal		
5	623.64	31.53	25.40	46.00	14.47	100	160	Horizontal		
6	894.27	35.85	30.02	46.00	10.15	100	140	Horizontal		


# **RESULT: PASS**






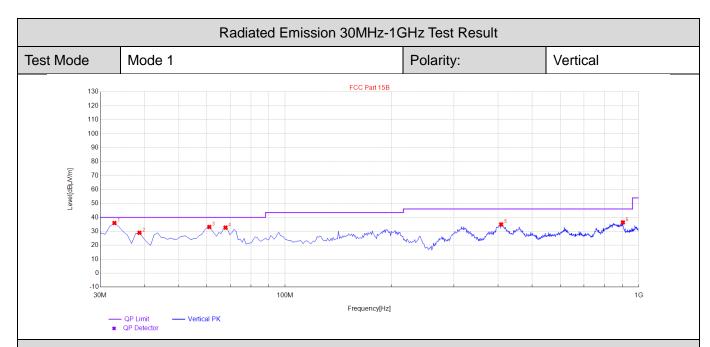


Final	Final Data List_Peak								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	32.91	35.97	12.41	40.00	4.03	100	180	Vertical	
2	38.73	28.99	10.64	40.00	11.01	100	100	Vertical	
3	61.04	33.14	17.54	40.00	6.86	100	80	Vertical	
4	67.83	32.69	15.36	40.00	7.31	100	240	Vertical	
5	408.3	34.98	17.41	46.00	11.02	100	170	Vertical	
6	902.03	36.41	29.72	46.00	9.59	100	150	Vertical	






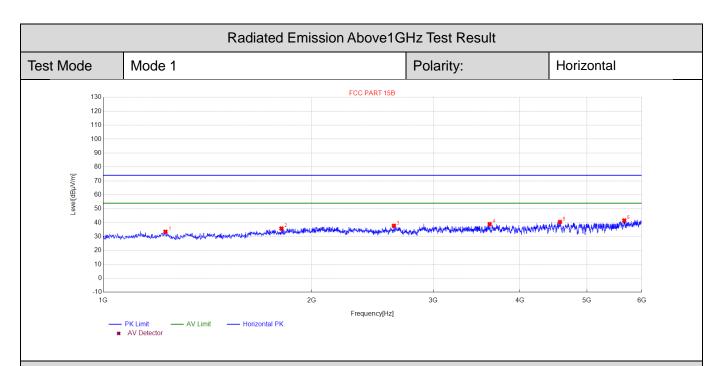

Final	Final Data List_Peak								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	1230.046	33.46	-17.97	74.00	40.54	100	190	Horizontal	
2	1809.1618	35.78	-14.99	74.00	38.22	100	260	Horizontal	
3	2630.3261	37.72	-12.14	74.00	36.28	100	70	Horizontal	
4	3617.5235	38.95	-10.48	74.00	35.05	100	280	Horizontal	
5	4570.7141	40.45	-7.86	74.00	33.55	100	170	Horizontal	
6	5661.9324	41.52	-6.40	74.00	32.48	100	110	Horizontal	





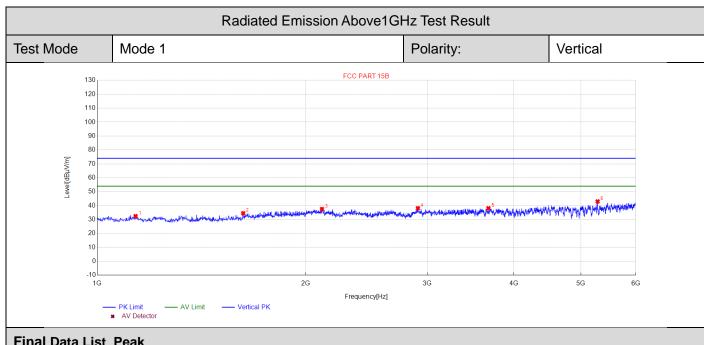

Final I	Final Data List_Peak								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	1136.0272	32.46	-18.12	74.00	41.54	100	180	Vertical	
2	1625.125	34.55	-16.51	74.00	39.45	100	120	Vertical	
3	2112.2224	37.58	-13.14	74.00	36.42	100	80	Vertical	
4	2906.3813	38.17	-12.01	74.00	35.83	100	70	Vertical	
5	3675.5351	38.13	-10.40	74.00	35.87	100	260	Vertical	
6	5285.8572	43.01	-7.26	74.00	30.99	100	280	Vertical	

#### Note:

- 1. Factor=Antenna Factor + Cable loss Amplifier gain, Margin= Limit-Measurement-.
- 2. The "Factor" value can be calculated automatically by software of measurement system.



Page 17 of 21

# 6. Conducted Emission Measurements

# 6.1 Provisions Applicable

FCC CFR Title 47 Part 15 Subpart B Section 15.107:


For Class B Limits:

Fraguenay	Maximum RF Line Voltage				
Frequency	Q.P. (dBμV)	Average (dBµV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

#### For Class A Limits:

Fraguenay	Maximum RF Line Voltage				
Frequency	Q.P. (dBµV)	Average (dBµV)			
150kHz~500kHz	79	66			
500kHz~30MHz	73	60			

#### 6.2 Measurement Setup

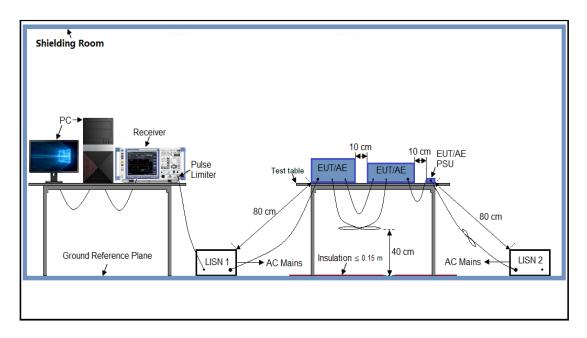



Report No.: AGC01284240708FE01 Page 18 of 21

#### **6.3 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipment received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (Mode 1) was reported on the following Data page.



#### **6.4 Measurement Result**

Mode 1					LISN Line						Hot Side									
Lev	el [dBµ\	<b>ν</b> 1									•									
80 r		·,																		
70 -	¦-	. – – – ¦		<u></u>		¦-	-				4		-¦ :	-¦	¦ 	¦- ¦-	ļ.;			
60 -				∟	<u> </u>	<u>¦</u> -	-						.  -  ·	-	<u> </u>	<u> </u>	1.1		-	
50 -	<del>-</del> -			<u>.</u>									-¦ ·	_	<u> </u>		<del>   </del>		i	
40 -	<del> </del> -	i 		ļ 	  -		-						- 	-	i +	i i !! -	+ - -			
30 =			- k	<u> </u>	<u> </u>	¦-	*								¦	¦- ¦-	¦ -¦-			
20 ~	<u></u>		_X		 	<b>^</b> å;w	<u></u> †⊢¥	<b>****</b>	X		-		-	i Hay	i der	برأروا	إما	X III	بالطباب	
10 -	¦-			, 	L!.			<u> </u> -	A STANLAND OF THE STANLAND	-	<u></u>	-	-	1	1		المسا			ЩЩ
0-	<del> </del> -	i		<u></u>	i i	<del> </del> -	-	- <u>i</u> -			i		-i	- <del> -</del> -	ļ	  -   -	i i			
-10							1	1					<u> </u>		<u> </u>		11			
18	50k	30	0k 4	00k	600	JK (	800k	1M	l 2 Frequ	M ency l	3ľ 'H≂1	VI 4	1M	5M 6	iΜ	8M	101	1	20M	30M

# MEASUREMENT RESULT: "agc\_fin"

2024/7/17 10:54

024/1/11 10.	J 4					
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.322000	21.80	6.1	60	37.9	QP	L1
0.774000	27.70	6.2	56	28.3	QP	L1
0.882000	22.10	6.2	56	33.9	QP	L1
1.822000	19.20	6.2	56	36.8	QP	L1
2.514000	18.20	6.3	56	37.8	QP	L1
13.422000	23.70	6.8	60	36.3	OP	L1

# MEASUREMENT RESULT: "agc fin2"

2024/7/17 10:54


	1, ,, 1, 10.						
Ι	requency	Level	Transd	Limit	Margin	Detector	Line
	MHz	dΒμV	dB	dΒμV	dB		
	0.774000	21.00	6.2	46	25.0	AV	L1
	1.318000	16.30	6.2	46	29.7	AV	L1
2	24.038000	20.30	7.8	50	29.7	AV	L1
2	26.038000	16.20	8.1	50	33.8	AV	L1
2	27.042000	20.10	8.1	50	29.9	AV	L1
2	29.042000	21.00	8.3	50	29.0	AV	L1

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



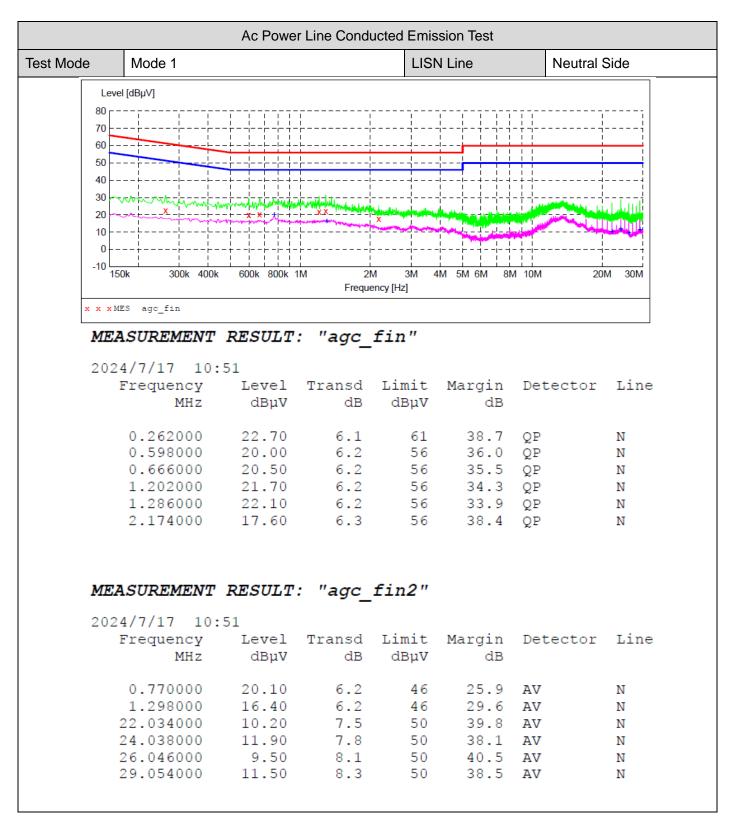

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 21 of 21

**Appendix I: Photographs of Test Setup** 

Refer to the Report No.: AGC01284240708AP03

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC01284240708AP02

----End of Report----



# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.