



<b>EMC TEST REPORT</b> <b>FCC 47 CFR Part 15B</b> <b>Industry Canada ICES-003</b> <b>Electromagnetic compatibility - Unintentional radiators</b>	
<b>Report Reference No.</b> .....	G0M-1506-4874-EF0115B-V01
<b>Testing Laboratory</b> .....	Eurofins Product Service GmbH
Address .....	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation .....	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01                      FCC Filed Test Laboratory, Reg.-No.: 96970                      IC OATS Filing assigned code: 3470A</p>
<b>Applicant's name</b> .....	Panasonic Industrial Devices Europe GmbH
Address .....	Zeppelinstr. 19 21337 Lüneburg GERMANY
<b>Test specification:</b>	
Standard.....	47 CFR Part 15 Subpart B ICES-003, Issue 5:2012 ANSI C63.4:2014
<b>Equipment under test (EUT):</b>	
Product description	Bluetooth Module
Model No.	ENW89829A3KF
Additional Models	See list at additional comments on page 2
Hardware version	45
Firmware / Software version	03
Contains	FCC-ID: T7V1315                      IC: 216Q-1315
<b>Test result</b>	<b>Passed</b>

**Possible test case verdicts:**

- not applicable to test object .....: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

**Testing:**

Date of receipt of test item .....: 2015-07-28

Date (s) of performance of tests .....: 2015-09-14

Compiled by .....: Marcus Klein

Tested by (+ signature).....: Yu Yu / Marcus Klein



 Approved by (+ signature) .....: Jens Marquardt  
 Deputy Head of Lab



Date of issue.....: 2015-09-29

Total number of pages.....: 28

**General remarks:**
**The test results presented in this report relate only to the object tested.**
**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

PAN-Number	ENW-Number	IC	Antenna	Difference	HW	SW
PAN1315	ENW89829C2JF	CC2560A	No	old desgin	4x	02
PAN1325	ENW89829A2JF	CC2560A	Yes	old desgin	4x	02
PAN1315	ENW89829C2KF	CC2560A	No	New Design (refer to Description of Change)	4x	02
PAN1325	ENW89829A2KF	CC2560A	Yes	New Design (refer to Description of Change)	4x	02
PAN1315	ENW89829C3KF	CC2560B	No	New FW only (CC2560A to CC2560B)	4x	03
PAN1325	ENW89829A3KF	CC2560B	Yes	New FW only (CC2560A to CC2560B)	4x	03

The models (ENW89823A2K, ENW89823A3KF, ) use electrically and mechanically identical radio circuits with slightly different software (firmware versions) that are not related to the essential rf parameters of the radio according costumer document TILAW#291292.

---

## Version History

Version	Issue Date	Remarks	Revised by
V01	2015-09-29	Initial Release	

---



**REPORT INDEX**

<b>1</b>	<b>EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1	Photos – Equipment	6
1.2	Photos – Test setup	7
1.3	Supporting Equipment Used During Testing	8
1.4	Input / Output Ports	8
1.5	Operating Modes and Configurations	9
1.6	Test Equipment Used During Testing	10
1.7	Sample emission level calculation	11
<b>2</b>	<b>RESULT SUMMARY</b>	<b>12</b>
<b>3</b>	<b>TEST CONDITIONS AND RESULTS</b>	<b>13</b>
3.1	Test Conditions and Results – Radiated emissions	13
3.2	Test Conditions and Results – AC power line conducted emissions	25



## 1 Equipment (Test item) Description

<b>Description</b>	Bluetooth Module	
<b>Model</b>	ENW89829A3KF	
<b>Additional Models</b>	See list on page 2	
<b>Serial number</b>	None	
<b>Hardware version</b>	45	
<b>Software / Firmware version</b>	03	
<b>FCC-ID</b>	T7V1315	
<b>IC</b>	216Q-1315	
<b>Power supply</b>	3.3 VDC	
<b>Radio module</b>	Type	Bluetooth module
<b>Manufacturer</b>	Panasonic Industrial Devices Europe GmbH Zeppelinstr. 19 21337 Lüneburg GERMANY	
<b>Highest emission frequency</b>	Fmax [MHz] = 2400	
<b>Device classification</b>	Class B	
<b>Equipment type</b>	Tabletop	
<b>Number of tested samples</b>	1	

1.1 Photos – Equipment

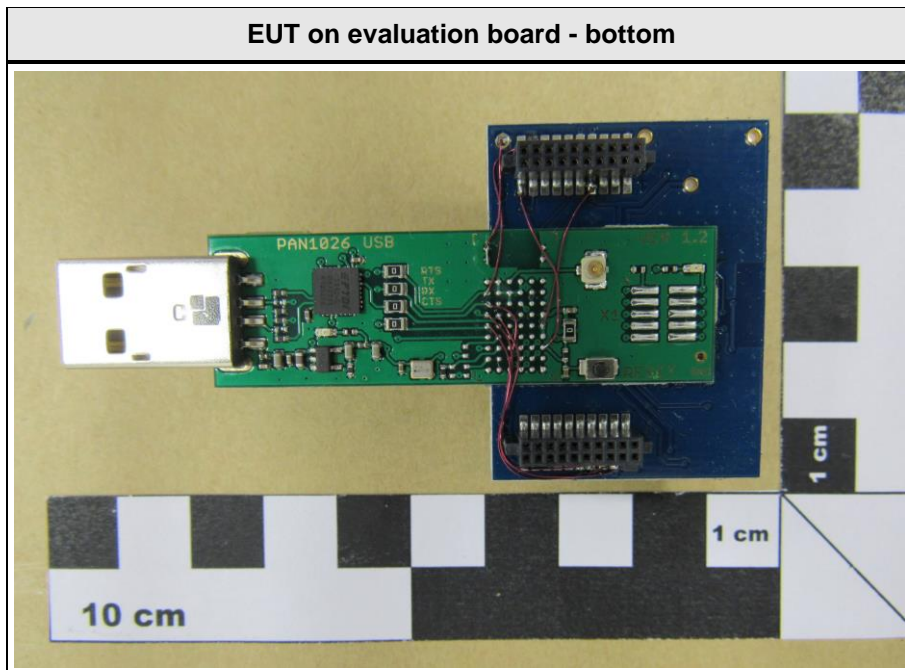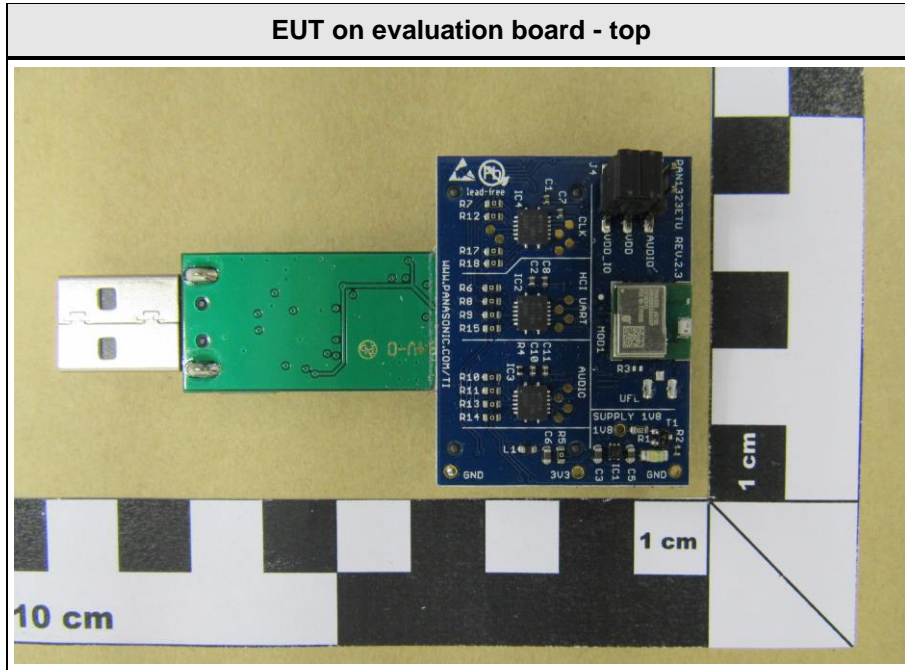

1.2 Photos – Test setup

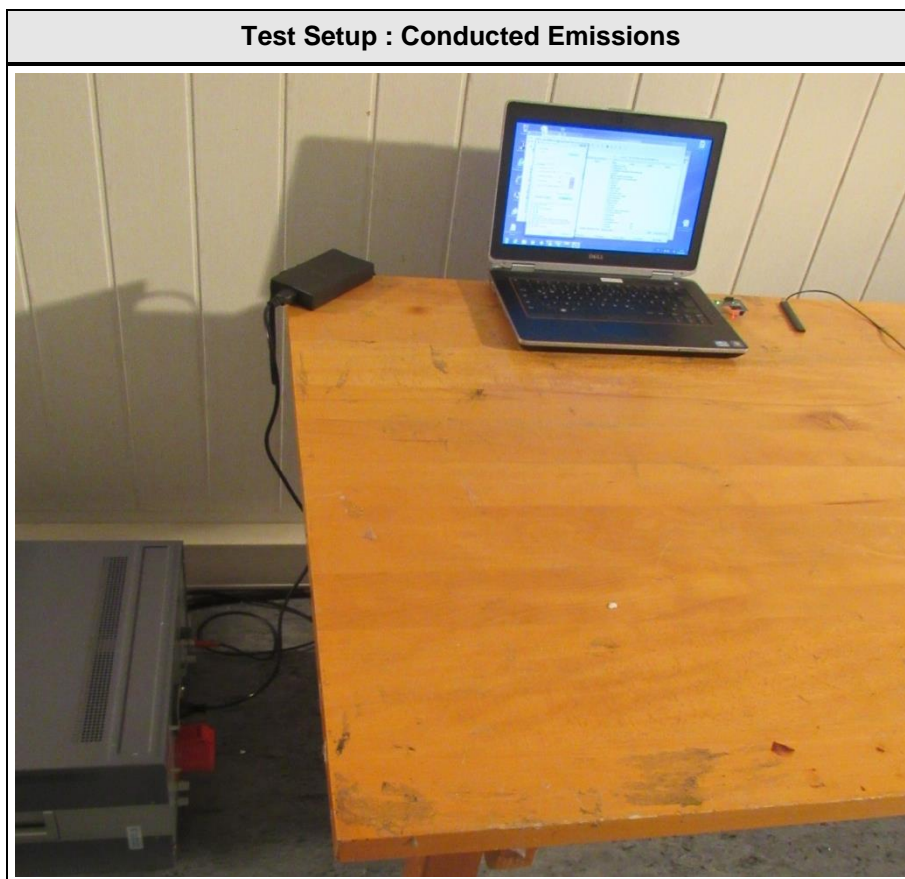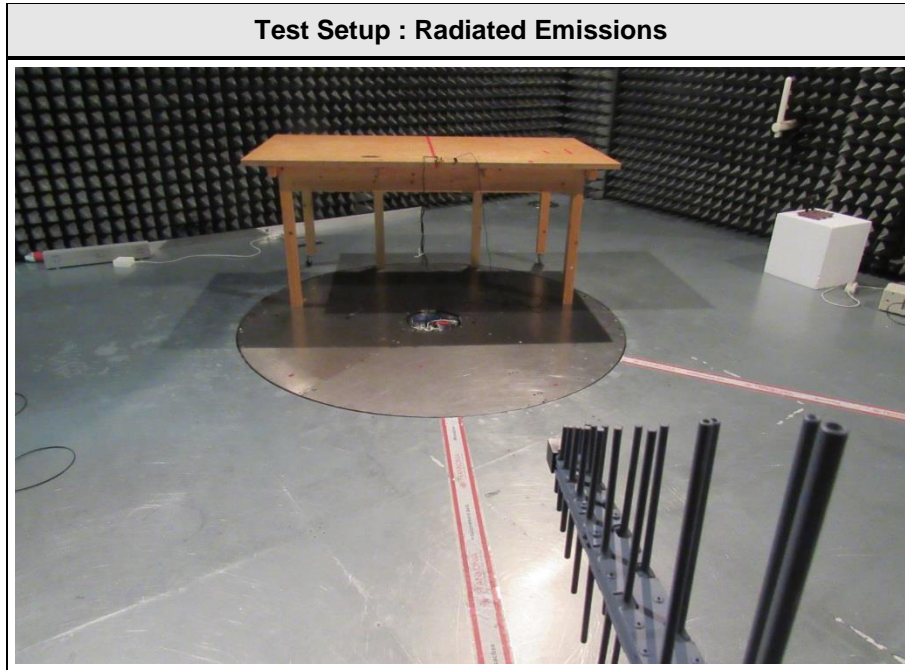

### 1.3 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
AE	Laptop	Dell	Latitude D430	
SIM	Bluetooth Tester	R&S	CBT	-

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

### 1.4 Input / Output Ports

Port #	Name	Type*	Max. Cable Length	Cable Shielded	Comments
1	USB	I/O	-	-	Port at evaluation board

**\*Note:** Use the following abbreviations:

AC : AC power port

DC : DC power port

N/E : Non electrical

I/O : Signal input or output port

TP : Telecommunication port



### 1.5 Operating Modes and Configurations

Mode #	Description
1	Bluetooth test mode to CBT

Configuration #	EUT Configuration
1	ENW89829A3KF with antenna pad.

**1.6 Test Equipment Used During Testing**

<b>Measurement Software</b>			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

<b>Radiated emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2014-03	2017-03
Horn antenna	Schwarzbeck	BBHA 9120D	EF00018	2013-09	2016-09
EMI Test Receiver	R&S	ESU26	EF00887	2015-01	2016-01

<b>Conducted emissions</b>					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
AMN	R&S	ESH2-Z5	EF00182	2014-11	2016-11
AMN	R&S	ESH3-Z5	EF00036	2014-12	2016-12
EMI Test Receiver	R&S	ESCS 30	EF00295	2014-10	2015-10

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

## 2 Result Summary

FCC 47 CFR Part 15B, Industry Canada ICES-003				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 ICES-003 Item 6.2	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 ICES-003 Item 6.1	AC power line conducted emissions	ANSI C63.4	PASS	
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Radiated emissions

Radiated emissions acc. FCC 47 CFR 15.109 / ICES-003				Verdict: PASS		
Laboratory Parameters:		Required prior to the test		During the test		
Ambient Temperature		15 to 35 °C		23°C		
Relative Humidity		30 to 60 %		35%		
Test according referenced standards		Reference Method				
		ANSI C63.4				
Sample is tested with respect to the requirements of the equipment class		Equipment class				
		Class B				
Test frequency range determined from highest emission frequency		Highest emission frequency				
		Fmax [MHz] = 2400				
Fully configured sample scanned over the following frequency range		Frequency range				
		30 MHz to 18 GHz				
Operating mode		1				
Configuration		1				
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

**Test Procedure:**

The test site is in accordance with ANSI C63-4:2009 requirements and is listed by FCC.

The measurement procedure is as follows:


- 1) The EUT was placed on a 0.8 m non conductive table at a 3 m distance from the receive antenna (ANSI C63.4: 2009 item 6.2)
- 2) The antenna output was connected to the measurement receiver
- 3) A biconical antenna was used for the frequency range 30 – 200 MHz, a logarithmic periodical antenna was used for the frequency range from 200 – 1000 MHz. Above one 1 GHz a Double Ridged Broadband Horn antenna was used. The antenna was placed on an adjustable height antenna mast
- 4) Emissions were maximized at each frequency by rotating the EUT and adjusting the receive antenna height and polarization. The maximum values were recorded.

**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 6

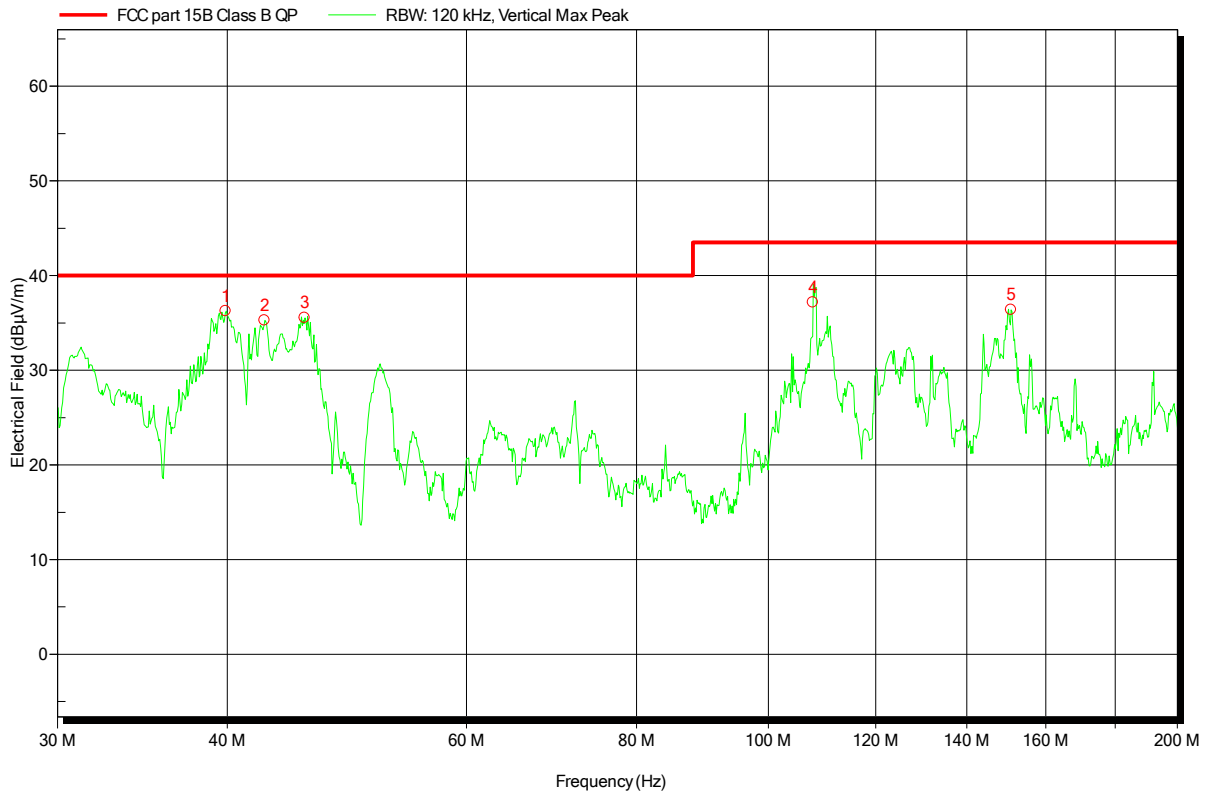


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 7

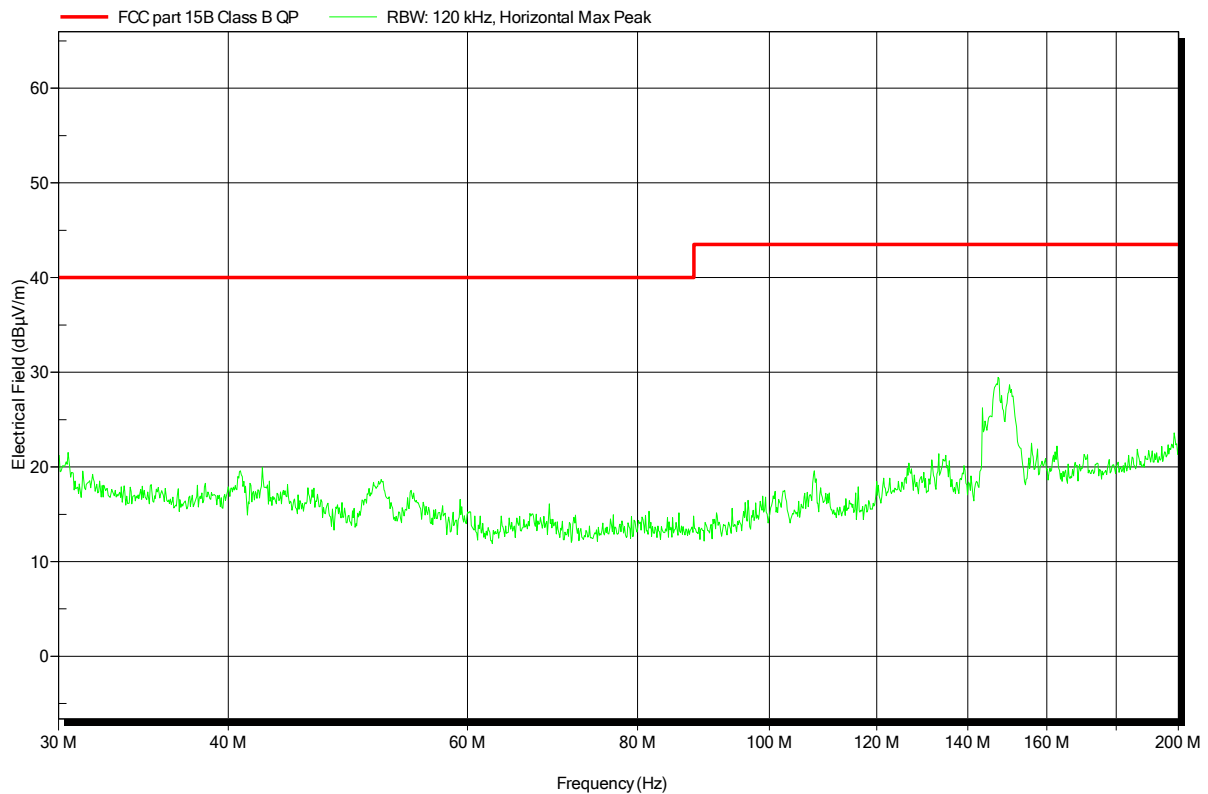




**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Rohde & Schwarz HL 223, Vertical
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 4

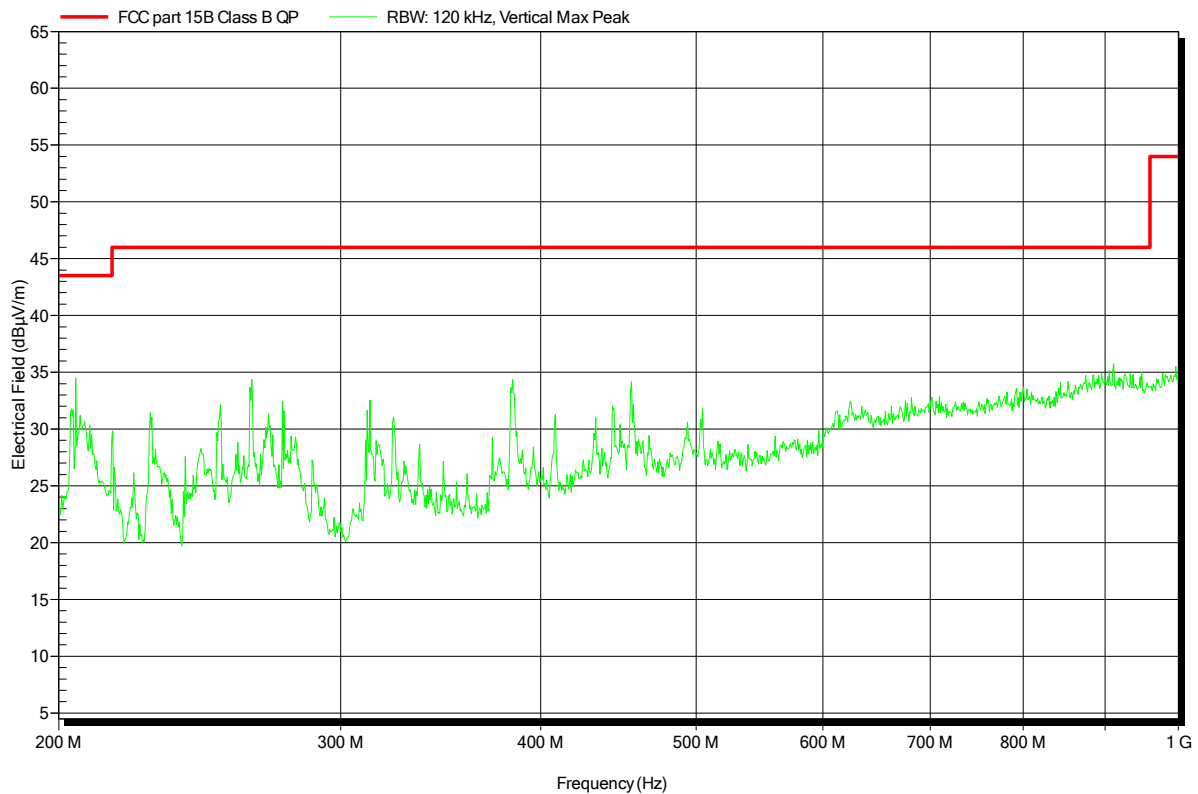


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Rohde & Schwarz HL 223, Horizontal
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 5

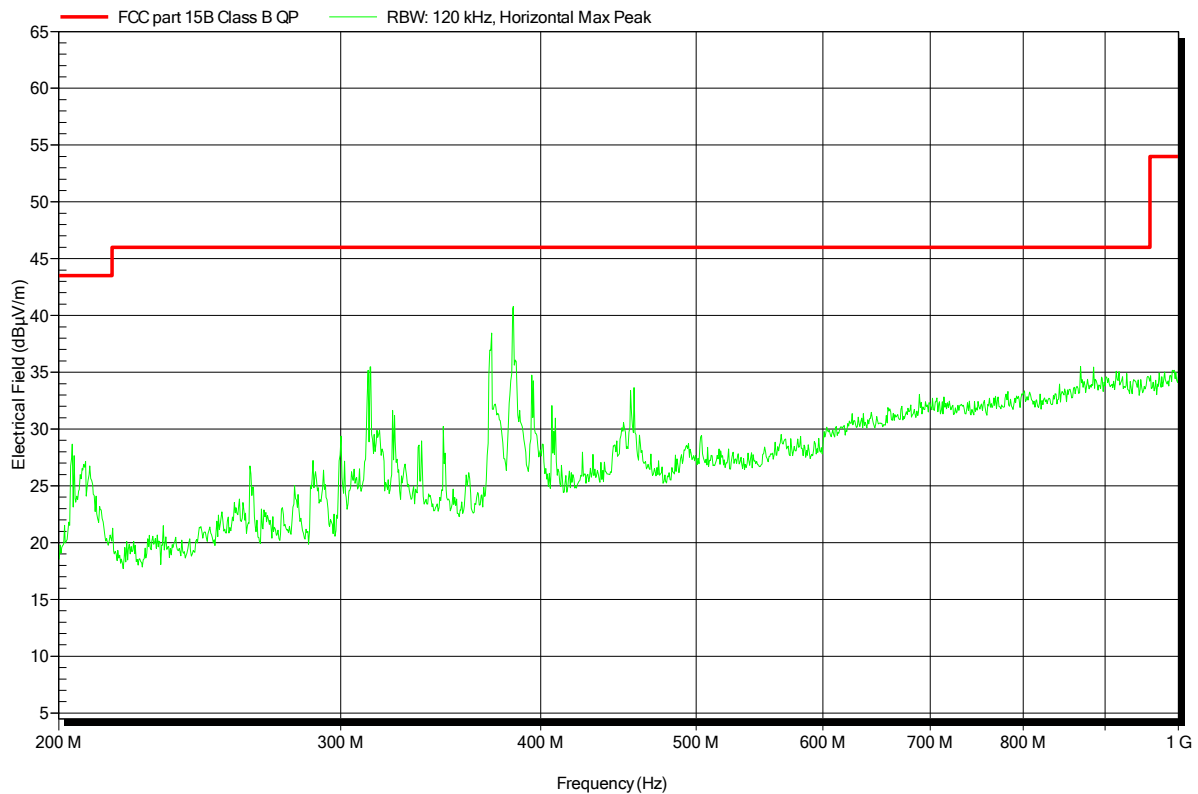


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 9

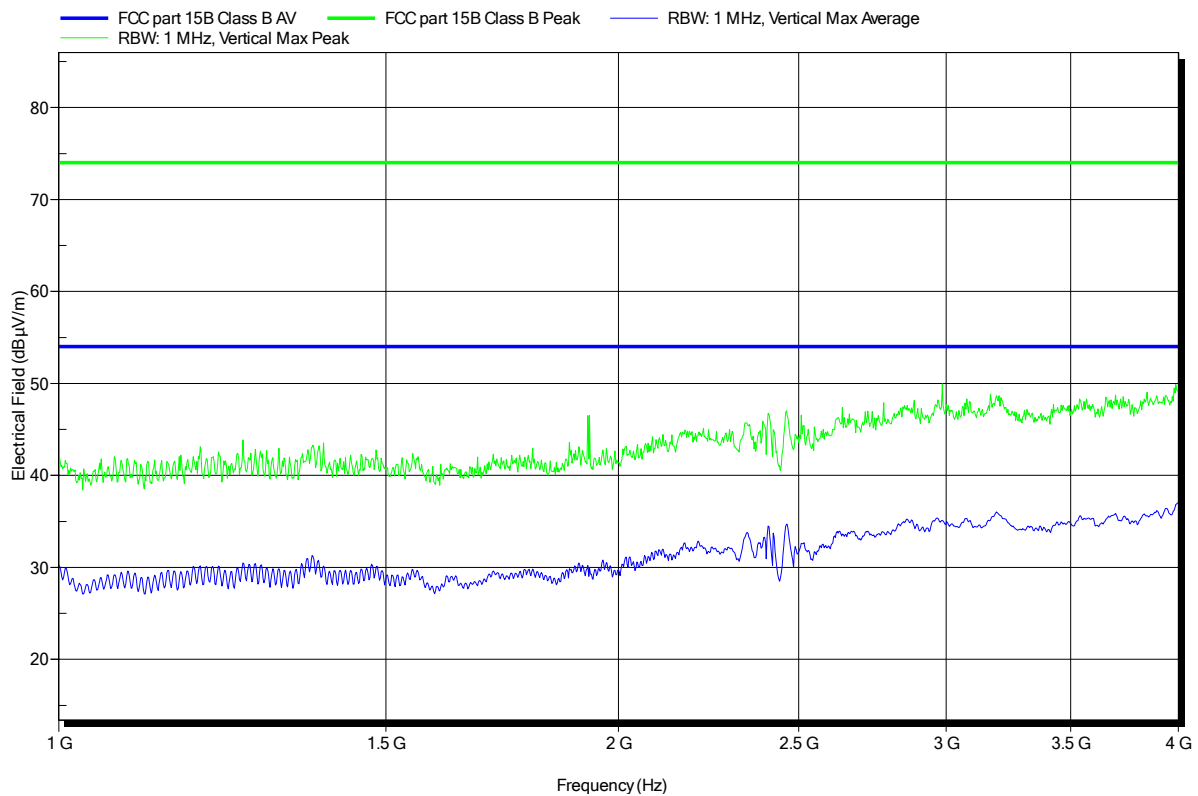


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 8

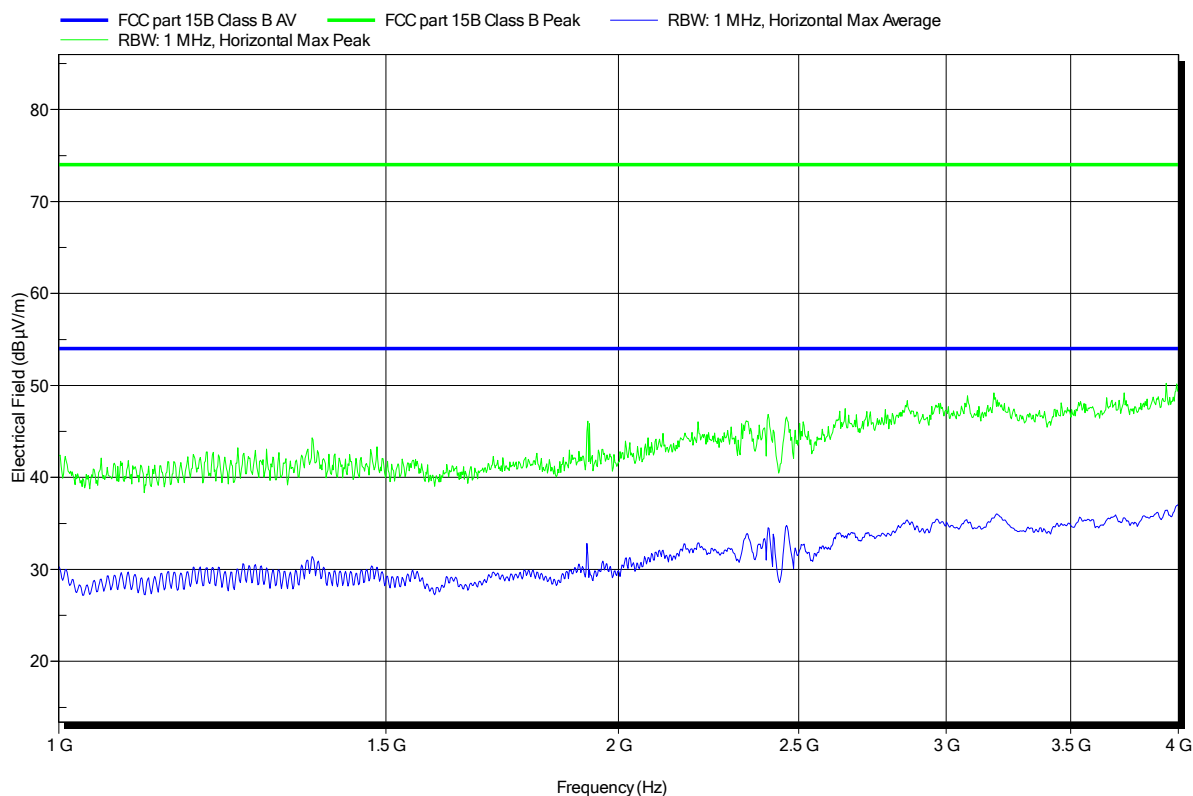


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 10

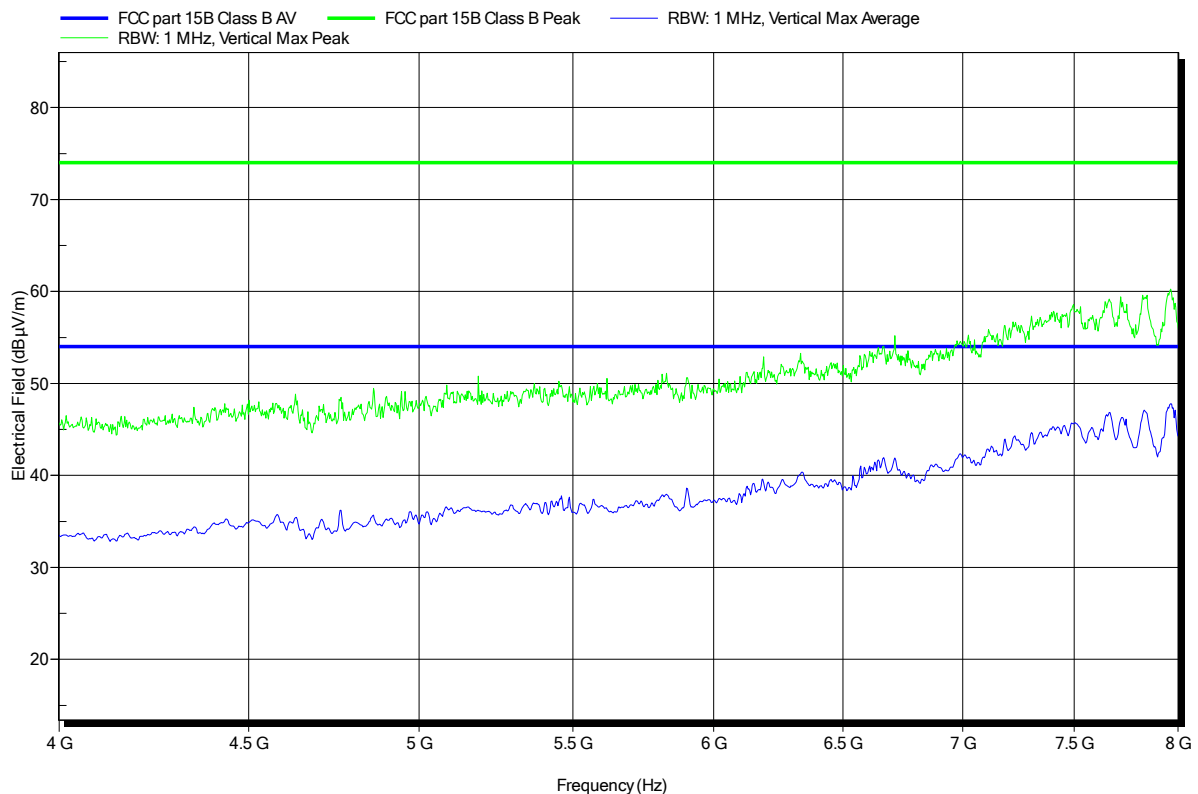


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 11

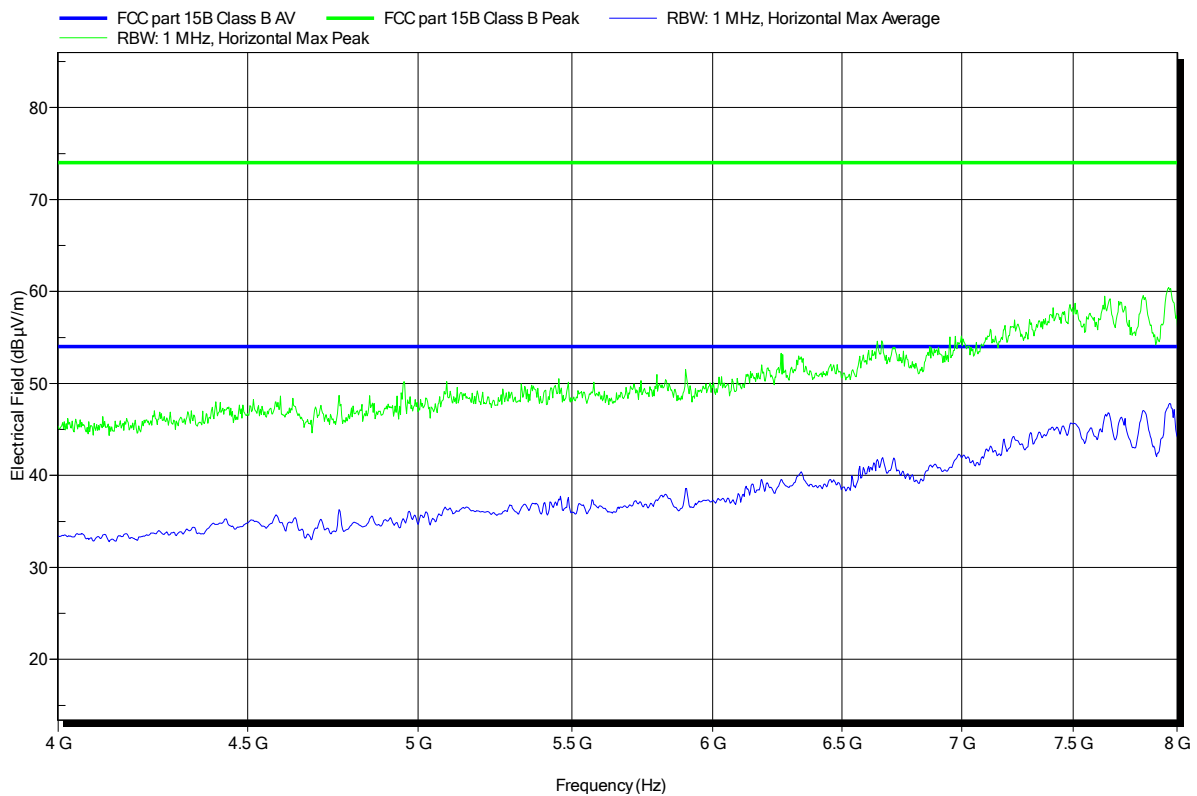


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Vertical
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 13

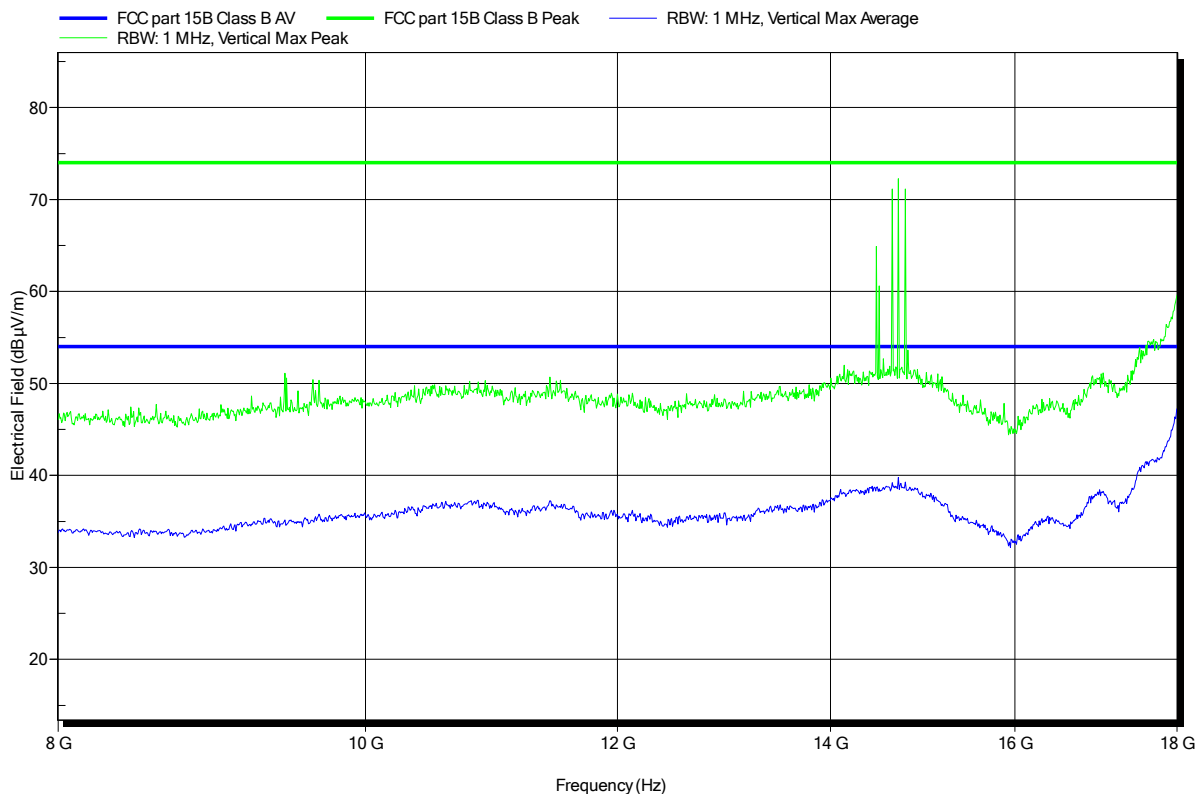


**Spurious emissions under normal conditions according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 3.3VDC
Antenna:	Schwarzbeck BBHA 9120D, Horizontal
Measurement distance:	3m
Mode:	1
Test Date:	2015-09-14
Note:	

Index 12

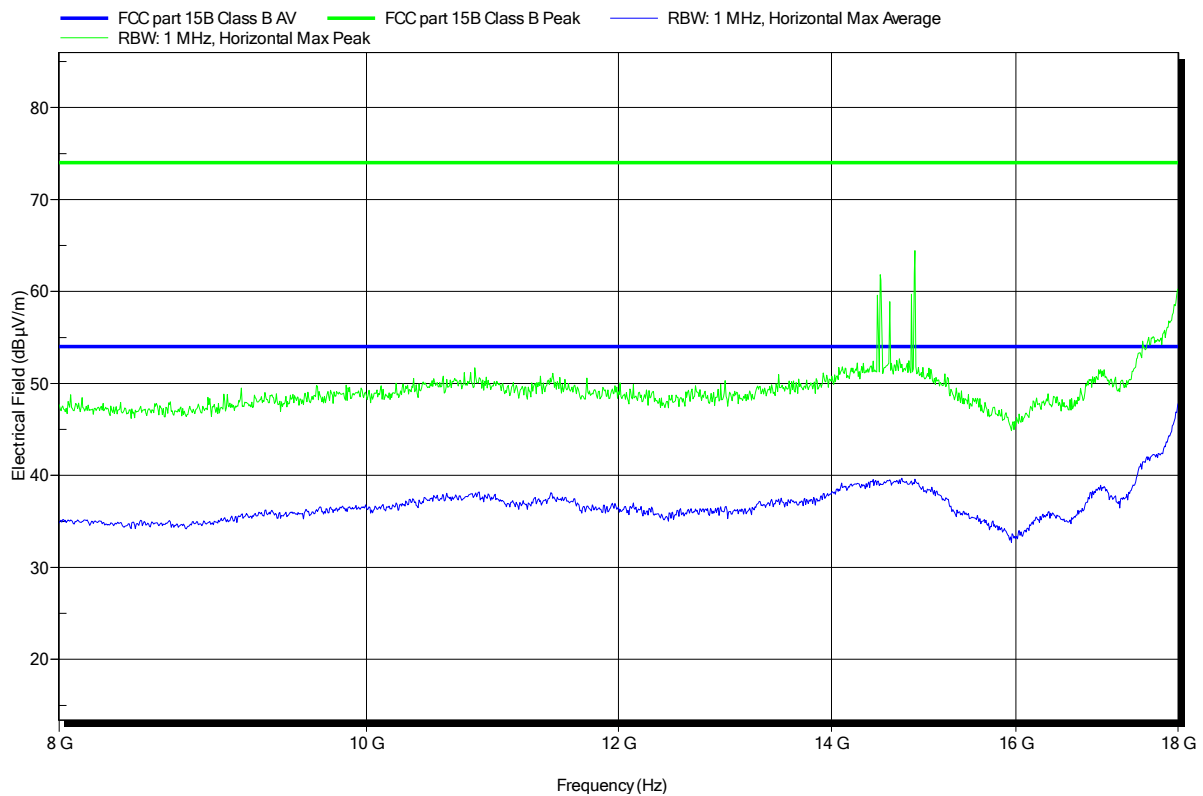



**3.2 Test Conditions and Results – AC power line conducted emissions**

<b>Conducted emissions acc. FCC 47 CFR 15.107 / ICES-003</b>		<b>Verdict: PASS</b>		
Laboratory Parameters:		Required prior to the test		During the test
Ambient Temperature		15 to 35 °C		23°C
Relative Humidity		30 to 60 %		35%
Test according referenced standards		Reference Method		
		ANSI C63.4		
Fully configured sample scanned over the following frequency range		Frequency range		
		0.15 MHz to 30 MHz		
Sample is tested with respect to the requirements of the equipment class		Equipment class		
		Class B		
Points of Application		Application Interface		
AC Mains		LISN		
Operating mode		1		
Configuration		1		
<b>Limits and results Class B</b>				
Frequency [MHz]	Quasi-Peak [dBµV]	Result	Average [dBµV]	Result
0.15 to 5	66 to 56*	PASS	56 to 46*	PASS
0.5 to 5	56	PASS	46	PASS
5 to 30	60	PASS	50	PASS
Comments: * Limit decreases linearly with the logarithm of the frequency.				

**Test Procedure:**


- 1) The EUT was placed on a non conductive table 0.8 m above the reference ground plane and 0.4 m away from the vertical conducting plane (ANSI C63.4: 2009 item 7.3.1)
- 2) The power cord that is normally supplied or recommended by the manufacturer was connected to the LISN.
- 3) The distance between the outer edge of the EUT and the LISN shall be set to 0.8 m. A longer power cord shall be bundled to this length (bundling shall not exceed 40 cm in length).
- 4) The LISN measurement port was connected to a measurement receiver
- 5) I/O cables were bundled not longer than 0.4 m
- 6) Measurement was performed in the frequency range 0.15 – 30MHz on each current-carrying conductor

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 120VAC at AC/DC Adapter from Notebook
LISN:	ESH2-Z5 L
Mode:	1
Test Date:	2015-09-14
Note:	

Index 1

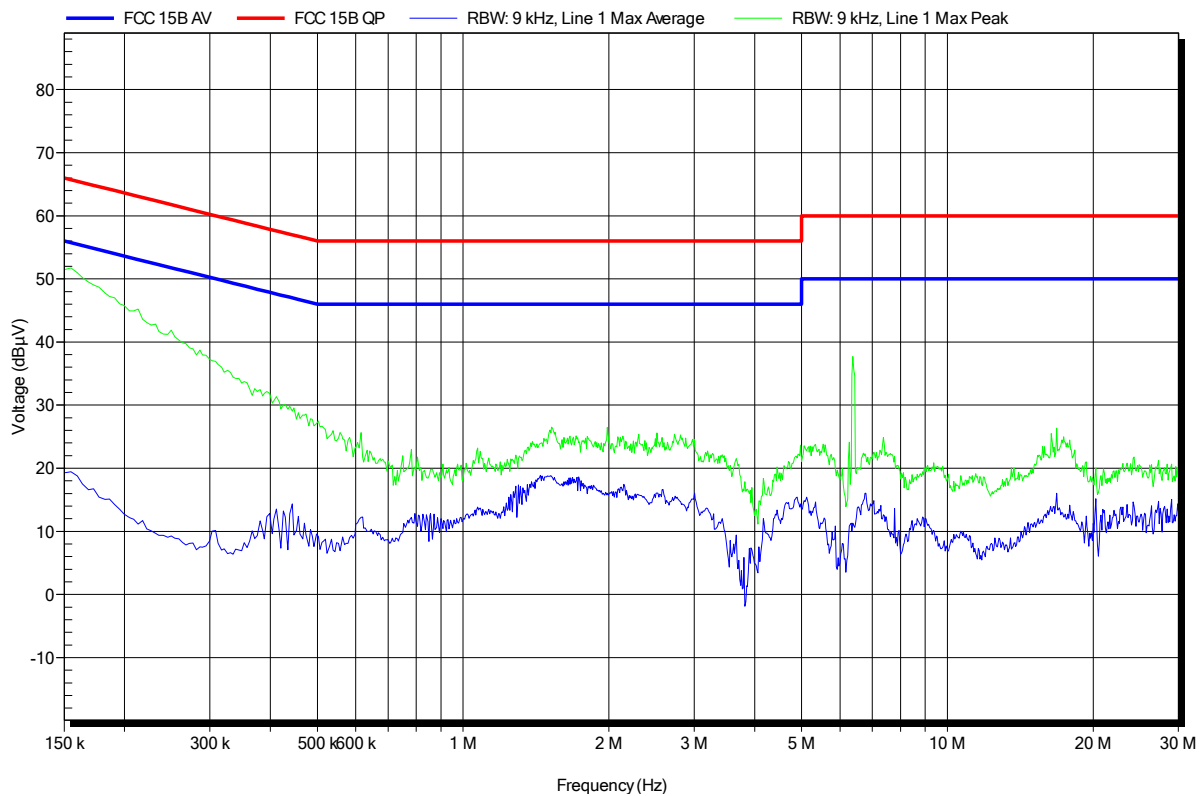

**EMI voltage test in the ac-mains according to FCC 15B**

Project number: G0M-1506-4874

Applicant:	Panasonic Industrial Devices Europe GmbH
EUT Name:	Bluetooth Module
Model:	ENW89829A3KF
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Yu
Test Conditions:	Tnom: 23°C, Unom: 120VAC at AC/DC Adapter from Notebook
LISN:	ESH2-Z5 N
Mode:	1
Test Date:	2015-09-14
Note:	

Index 2

