



## TEST REPORT

Test report no.: 1-0450/20-01-07-A

BNetzA-CAB-02/21-102

### Testing laboratory

**CTC advanced GmbH**  
Untertuerkheimer Strasse 6 – 10  
66117 Saarbruecken / Germany  
Phone: + 49 681 5 98 - 0  
Fax: + 49 681 5 98 - 9075  
Internet: <https://www.ctcadvanced.com>  
e-mail: [mail@ctcadvanced.com](mailto:mail@ctcadvanced.com)

#### Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2018-03) by the Deutsche Akkreditierungsstelle GmbH (DAkkS)  
The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate starting with the registration number: D-PL-12076-01.

### Applicant

**Panasonic Industrial Devices Europe GmbH**  
Zeppelinstrasse 19  
21337 Lüneburg / GERMANY  
Phone: +49-4131-899-0  
Contact: Marcus Nottorf  
e-mail: [marcus.nottorf@eu.panasonic.com](mailto:marcus.nottorf@eu.panasonic.com)

### Manufacturer

**Panasonic Industrial Devices Slovakia s.r.o**  
Tovarenska 13  
06401 Stara Lubovna / SLOVAK REPUBLIC

### Test standard/s

FCC - Title 47 CFR Part 15      FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices  
RSS - 247 Issue 2              Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

For further applied test standards please refer to section 3 of this test report.

### Test Item

**Kind of test item:**              **Embedded Wi-Fi Module**  
**Model name:**                  **PAN9520 (ENW49D01A1KF, ENW49D02A1KF)**  
**FCC ID:**                          **T7V9520**  
**IC:**                                  **216Q-9520**  
**Frequency:**                      2400 MHz to 2483.5 MHz  
**Technology tested:**            IEEE 802.11 (W-LAN)  
**Antenna:**                        On-board chip antenna  
**Power supply:**                 3.0 V to 3.6 V DC by external power supply  
**Temperature range:**           -40°C to +85°C

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

### Test report authorized:

Marco Bertolino  
Lab Manager  
Radio Communications

### Test performed:

David Lang  
Lab Manager  
Radio Communications

**1 Table of contents**

1 Table of contents .....2

2 General information .....4

    2.1 Notes and disclaimer .....4

    2.2 Application details .....4

    2.3 Test laboratories sub-contracted .....4

3 Test standard/s, references and accreditations .....5

4 Reporting statements of conformity – decision rule .....6

5 Test environment .....7

6 Test item.....7

    6.1 General description .....7

    6.2 Additional information .....7

7 Description of the test setup.....8

    7.1 Shielded semi anechoic chamber .....9

    7.2 Shielded fully anechoic chamber .....11

    7.3 Radiated measurements > 18 GHz.....12

    7.4 Conducted measurements with peak power meter & spectrum analyzer .....13

    7.5 AC conducted .....14

8 Sequence of testing .....15

    8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz .....15

    8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz .....16

    8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz .....17

    8.4 Sequence of testing radiated spurious above 18 GHz .....18

9 Measurement uncertainty .....19

10 Summary of measurement results .....20

11 Additional information and comments .....21

12 Additional EUT parameter .....23

13 Measurement results.....24

    13.1 Antenna gain.....24

    13.2 Identify worst case data rate .....25

    13.3 Maximum output power.....26

    13.4 Duty cycle .....27

    13.5 Peak power spectral density .....28

    13.6 6 dB DTS bandwidth .....29

    13.7 Occupied bandwidth – 99% emission bandwidth .....30

    13.8 Occupied bandwidth – 20 dB bandwidth .....31

    13.9 Band edge compliance radiated .....32

    13.10 Spurious emissions conducted .....37

    13.11 Spurious emissions radiated below 30 MHz .....40

    13.12 Spurious emissions radiated 30 MHz to 1 GHz .....47

    13.13 Spurious emissions radiated above 1 GHz .....57

13.14	Spurious emissions conducted below 30 MHz (AC conducted).....	68
14	Observations.....	71
15	Glossary .....	71
16	Document history .....	72
17	Accreditation Certificate – D-PL-12076-01-04 .....	72
18	Accreditation Certificate – D-PL-12076-01-05 .....	73

## 2 General information

### 2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CTC advanced GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CTC advanced GmbH.

The testing service provided by CTC advanced GmbH has been rendered under the current "General Terms and Conditions for CTC advanced GmbH".

CTC advanced GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CTC advanced GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CTC advanced GmbH test report include or imply any product or service warranties from CTC advanced GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CTC advanced GmbH.

All rights and remedies regarding vendor's products and services for which CTC advanced GmbH has prepared this test report shall be provided by the party offering such products or services and not by CTC advanced GmbH. In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

**This test report replaces the test report with the number 1-0450/20-01-07 and dated 2021-05-19.**

### 2.2 Application details

Date of receipt of order: 2021-03-10

Date of receipt of test item: 2021-04-13

Start of test:\* 2021-04-19

End of test:\* 2021-05-17

Person(s) present during the test: -/-

\*Date of each measurement, if not shown in the plot, can be requested. Dates are stored in the measurement software.

### 2.3 Test laboratories sub-contracted

None

### 3 Test standard/s, references and accreditations

Test standard	Date	Description
FCC - Title 47 CFR Part 15	--	FCC - Title 47 of the Code of Federal Regulations; Chapter I; Part 15 - Radio frequency devices
RSS - 247 Issue 2	February 2017	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence - Exempt Local Area Network (LE-LAN) Devices

Guidance	Version	Description
KDB 558074 D01	v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
ANSI C63.4-2014	-/-	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10-2013	-/-	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 662911 D01	v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band


Accreditation	Description	
D-PL-12076-01-04	Telecommunication and EMC Canada <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf</a>	  <p>Deutsche Akkreditierungsstelle D-PL-12076-01-04</p>
D-PL-12076-01-05	Telecommunication FCC requirements <a href="https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf">https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf</a>	  <p>Deutsche Akkreditierungsstelle D-PL-12076-01-05</p>

#### 4 Reporting statements of conformity – decision rule

Only the measured values related to their corresponding limits will be used to decide whether the equipment under test meets the requirements of the test standards listed in chapter 3.

The measurement uncertainty is mentioned in this test report, see chapter 9, but is not taken into account - neither to the limits nor to the measurement results. Measurement results with a smaller margin to the corresponding limits than the measurement uncertainty have a potential risk of more than 5% that the decision might be wrong."

measured value, measurement uncertainty, verdict

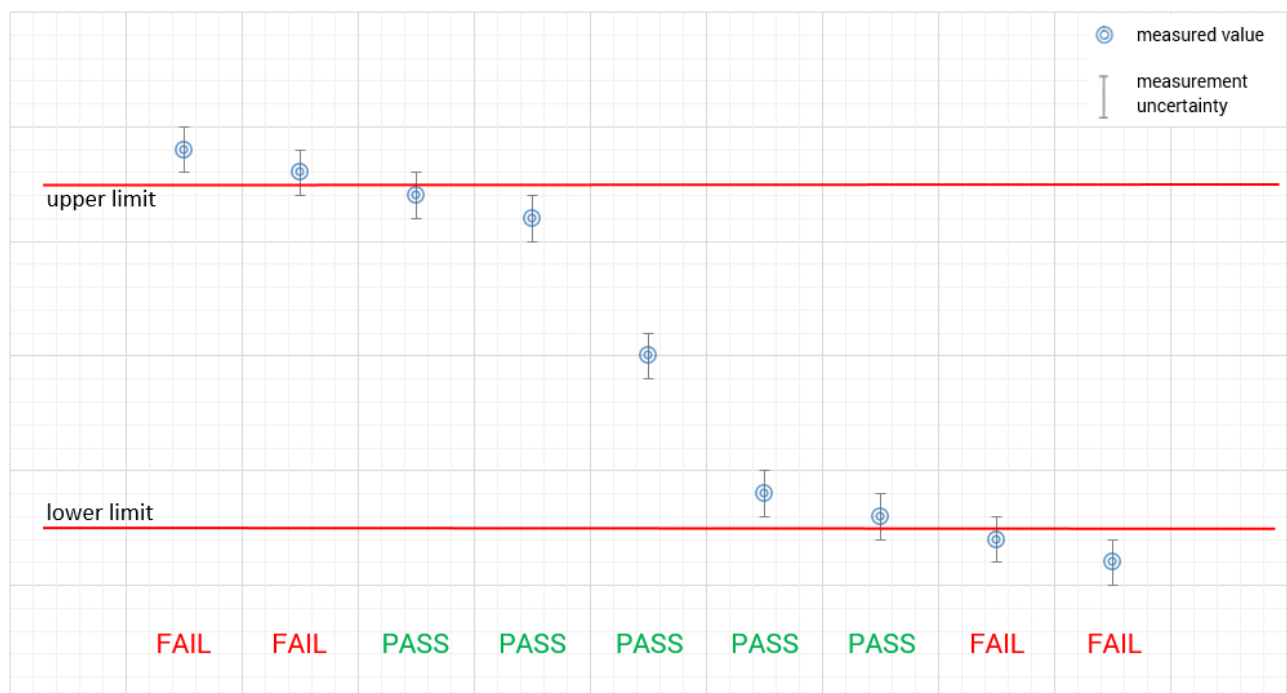

## 5 Test environment

Temperature	:	$T_{nom}$ +20 °C during room temperature tests $T_{max}$ No testing under extreme temperature conditions required! $T_{min}$ No testing under extreme temperature conditions required!
Relative humidity content	:	42 %
Barometric pressure	:	1021 hpa
Power supply	:	$V_{nom}$ 3.3 V DC by external power supply $V_{max}$ No testing under extreme voltage conditions required! $V_{min}$ No testing under extreme voltage conditions required!

## 6 Test item

### 6.1 General description

Kind of test item	:	Embedded Wi-Fi Module
Model name	:	PAN9520 (ENW49D01A1KF, ENW49D02A1KF)
HMN	:	-/-
PMN	:	PAN9520
HVIN	:	ENW49D01A1KF, ENW49D02A1KF
FVIN	:	-/-
S/N serial number	:	Rad. 113 Cond. 113
Hardware status	:	02
Software status	:	Test mode: ESP32-S2_RF_TEST_V200_40M_20200714.bin
Frequency band	:	2400 MHz to 2483.5 MHz
Type of radio transmission	:	DSSS, OFDM
Use of frequency spectrum	:	
Type of modulation	:	CCK, (D)BPSK, (D)QPSK, 16 – QAM, 64 – QAM
Number of channels	:	11 (20 MHz), 9 (40 MHz)
Antenna	:	On-board chip antenna; TDK Multilayer Antenna: ANT016008LCS2442MA1 Determined Peak Gain 2.28 dBi (section 13.1)
Power supply	:	3.0 V to 3.6 V DC by external power supply
Temperature range	:	-40°C to +85°C

### 6.2 Additional information

The content of the following annexes is defined in the QA. It may be that not all of the listed annexes are necessary for this report, thus some values in between may be missing.

Test setup and EUT photos are included in test report:

- 1-0450/20-01-01\_AnnexA
- 1-0450/20-01-01\_AnnexB
- 1-0450/20-01-01\_AnnexC

## 7 Description of the test setup

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, RF generating and signaling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Lab/Item).

Each block diagram listed can contain several test setup configurations. All devices belonging to a test setup are identified with the same letter syntax. For example: Column Setup and all devices with an A.


### **Agenda:** Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress



## 7.1 Shielded semi anechoic chamber

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 30 MHz to 1 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are conform to specifications ANSI C63. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analyzers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63.

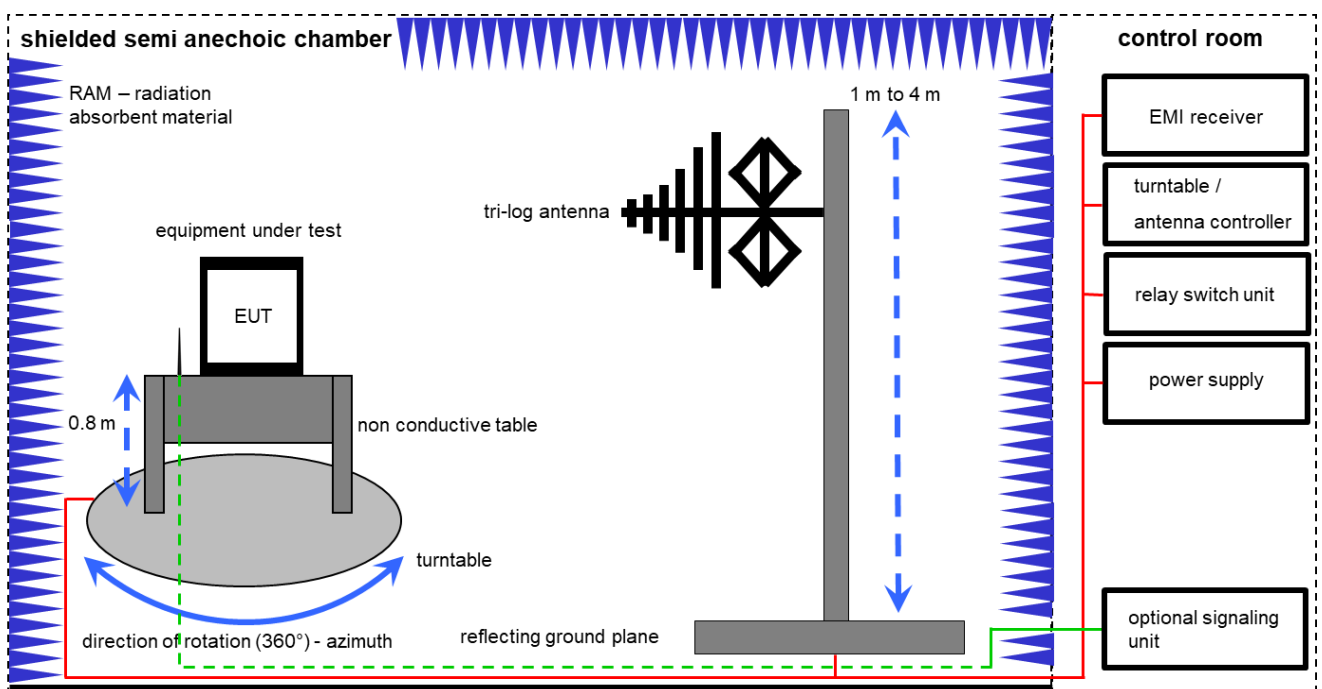

Measurement distance: tri-log antenna 10 meter

EMC32 software version: 10.59.00

$$FS = UR + CL + AF$$

(FS-field strength; UR-voltage at the receiver; CL-loss of the cable; AF-antenna factor)

Example calculation:


$$FS \text{ [dB}\mu\text{V/m]} = 12.35 \text{ [dB}\mu\text{V/m]} + 1.90 \text{ [dB]} + 16.80 \text{ [dB/m]} = 31.05 \text{ [dB}\mu\text{V/m]} \text{ (35.69 } \mu\text{V/m)}$$

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Switch-Unit	3488A	HP	2719A14505	300000368	ev	-/-	-/-
2	A	DC power supply, 60Vdc, 50A, 1200 W	6032A	HP	2920A04466	300000580	ne	-/-	-/-
3	A	Semi anechoic chamber	3000023	MWB AG		300000551	ne	-/-	-/-

4	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	17.01.2020	16.01.2022
5	A	Antenna Tower	Model 2175	ETS-Lindgren	64762	300003745	izw	-/-	-/-
6	A	Positioning Controller	Model 2090	ETS-Lindgren	64672	300003746	izw	-/-	-/-
7	A	Turntable Interface-Box	Model 105637	ETS-Lindgren	44583	300003747	izw	-/-	-/-
8	A	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck Mess - Elektronik	318	300003696	vIKI!	04.09.2019	03.09.2021
9	A	Turntable	2089-4.0	EMCO		300004394	ne	-/-	-/-
10	A	PC	TecLine	F+W		300004388	ne	-/-	-/-
11	A	EMI Test Receiver	ESR3	Rohde & Schwarz	102587	300005771	k	10.12.2020	09.06.2022

## 7.2 Shielded fully anechoic chamber

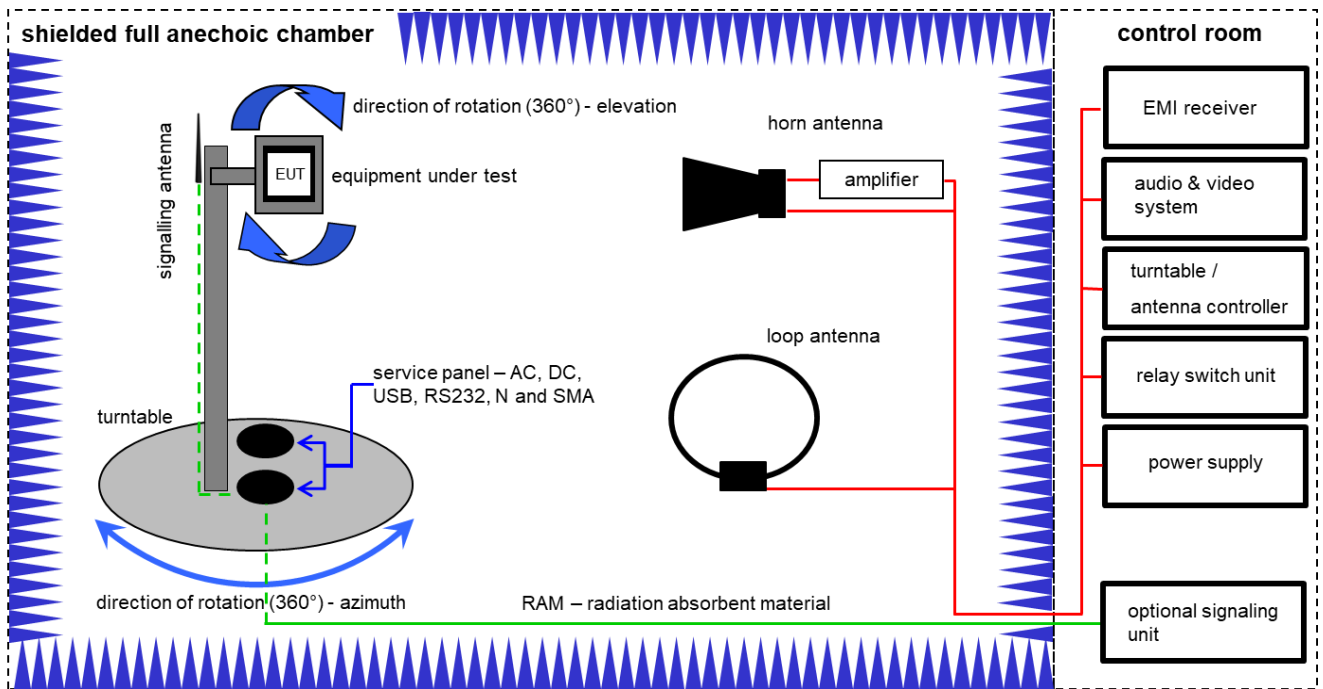

Measurement distance: horn antenna 3 meter; loop antenna 3 meter

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss of the signal path; AF-antenna factor)


Example calculation:

$$FS \text{ [dB}\mu\text{V/m]} = 40.0 \text{ [dB}\mu\text{V/m]} + (-35.8) \text{ [dB]} + 32.9 \text{ [dB/m]} = 37.1 \text{ [dB}\mu\text{V/m]} \text{ (71.61 } \mu\text{V/m)}$$

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Active Loop Antenna 9 kHz to 30 MHz	6502	EMCO	2210	300001015	vIKI!	13.06.2019	12.06.2021
2	A, B	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev	-/-	-/-
3	B	Double-Ridged Waveguide Horn Antenna 1-18.0GHz	3115	EMCO	9107-3697	300001605	vIKI!	12.03.2021	11.03.2023
4	A, B	Switch / Control Unit	3488A	HP	*	300000199	ne	-/-	-/-
5	B	Band Reject filter	WRCG2400/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev	-/-	-/-
6	A, B	EMI Test Receiver 20Hz- 26,5GHz	ESU26	R&S	100037	300003555	k	11.12.2020	10.12.2021
7	B	Highpass Filter	WHK1.1/15G-10SS	Wainwright	3	300003255	ev	-/-	-/-
8	B	Highpass Filter	WHKX7.0/18G-8SS	Wainwright	19	300003790	ne	-/-	-/-
9	A, B	4U RF Switch Platform	L4491A	Agilent Technologies	MY50000037	300004509	ne	-/-	-/-
10	A, B	NEXIO EMV-Software	BAT EMC V3.20.0.17	EMCO		300004682	ne	-/-	-/-
11	B	RF-Amplifier	AMF-6F06001 800-30-10P-R	NARDA-MITEQ Inc	2011572	300005241	ev	-/-	-/-

### 7.3 Radiated measurements > 18 GHz

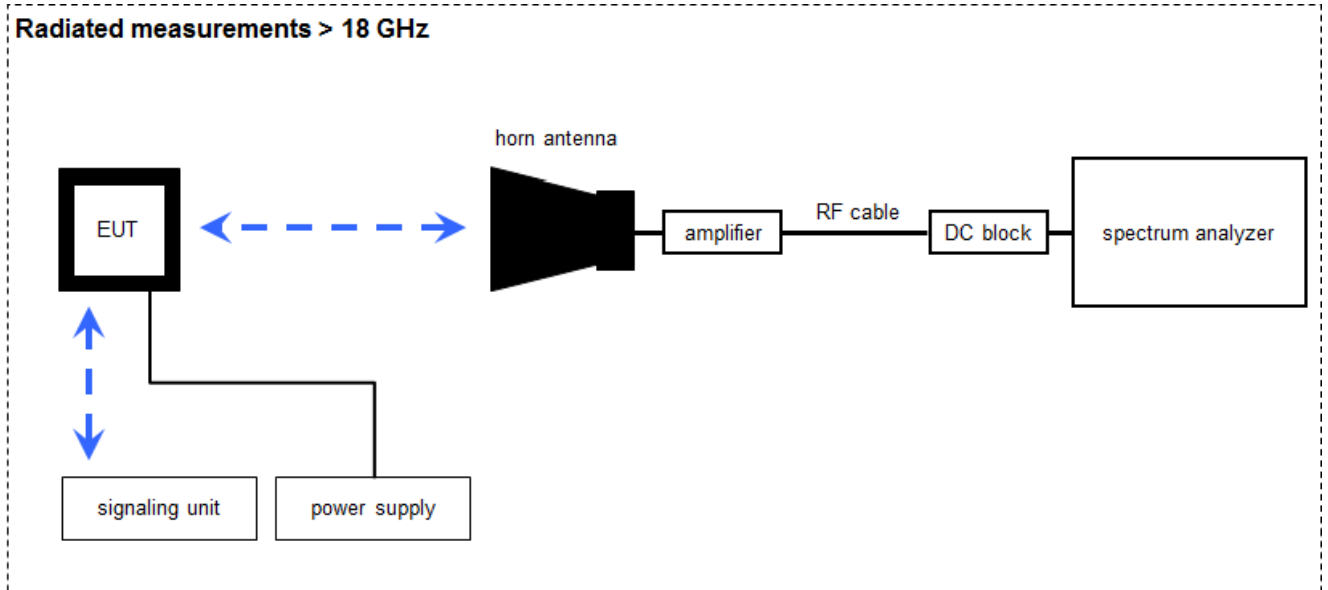

Measurement distance: horn antenna 50 cm

$$FS = UR + CA + AF$$

(FS-field strength; UR-voltage at the receiver; CA-loss signal path & distance correction; AF-antenna factor)


Example calculation:

$$FS [dB\mu V/m] = 40.0 [dB\mu V/m] + (-60.1) [dB] + 36.74 [dB/m] = 16.64 [dB\mu V/m] (6.79 \mu V/m)$$

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Microwave System Amplifier, 0.5-26.5 GHz	83017A	HP	00419	300002268	ev	-/-	-/-
2	A	Std. Gain Horn Antenna 18.0-26.5 GHz	638	Narda	01096	300000486	vIKI!	21.01.2020	20.01.2022
3	A	Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101042	300004517	k	07.12.2020	06.12.2021
4	A	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A4523	300004589	ne	-/-	-/-
5	A	RF-Cable	ST18/SMAm/SMAm /60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
6	A	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-

## 7.4 Conducted measurements with peak power meter & spectrum analyzer

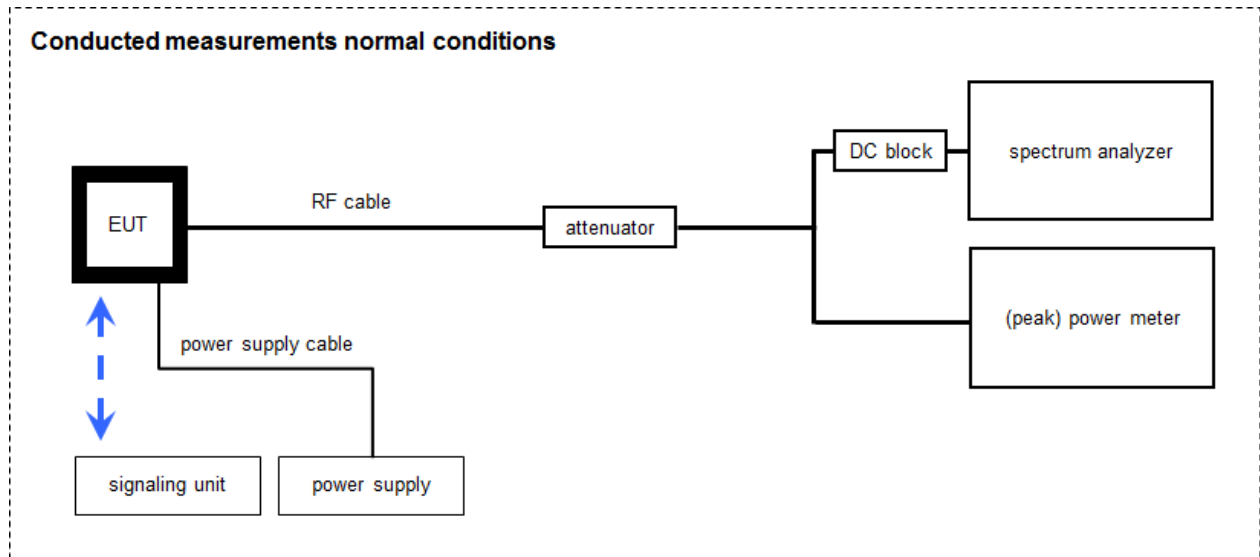

WLAN tester version: 1.1.13; LabView2015

OP = AV + CA  
(OP-output power; AV-analyzer value; CA-loss signal path)


Example calculation:

OP [dBm] = 6.0 [dBm] + 11.7 [dB] = 17.7 [dBm] (58.88 mW)

**Equipment table:**

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A, B, C	Hygro-Thermometer	-/, 5-45°C, 20-100%rF	Thies Clima	-/-	400000108	ev	13.08.2020	12.08.2022
2	A	Signal Analyzer 40 GHz	FSV40	Rohde & Schwarz	101042	300004517	k	07.12.2020	06.12.2021
3	A, B, C	PC Tester R005	Intel Core i3 3220/3,3 GHz, Prozessor		2V2403033A45 23	300004589	ne	-/-	-/-
4	A, B	RF-Cable	ST18/SMAm/SMAm /60	Huber & Suhner	Batch no. 606844	400001181	ev	-/-	-/-
5	A, B,	DC-Blocker 0.1-40 GHz	8141A	Inmet		400001185	ev	-/-	-/-
6	A, B	Coax Attenuator 10 dB 2W 0-40 GHz	MCL BW-K10-2W44+	Mini Circuits		400001186	ev	-/-	-/-
7	A, B	DC-Blocker	WA7046	Weinschel Associates		400001310	ev	-/-	-/-
8	A, B	Tester Software RadioStar (C.BER2 for BT Conformance)	Version 1.0.0.X	CTC advanced GmbH	0001	400001380	ne	-/-	-/-
9	B	USB Wideband Power Sensor (50MHz - 18GHz)	U2021XA	Keysight	MY591900010	300005802	k	11.12.2020	10.12.2021
10	C	Control-PC of OSP	exone Variety		060931P1302P 00109	300004869	ne	-/-	-/-
11	C	RF-Cable WLAN-Tester Port 1	ST18/SMAm/SMAm /36	Huber & Suhner	Batch no. 601494	400001216	g	-/-	-/-
12	C	OSP Power Sensors	OSP-B157W8	Rohde & Schwarz	100948	300005566	k	16.12.2020	15.12.2021

## 7.5 AC conducted

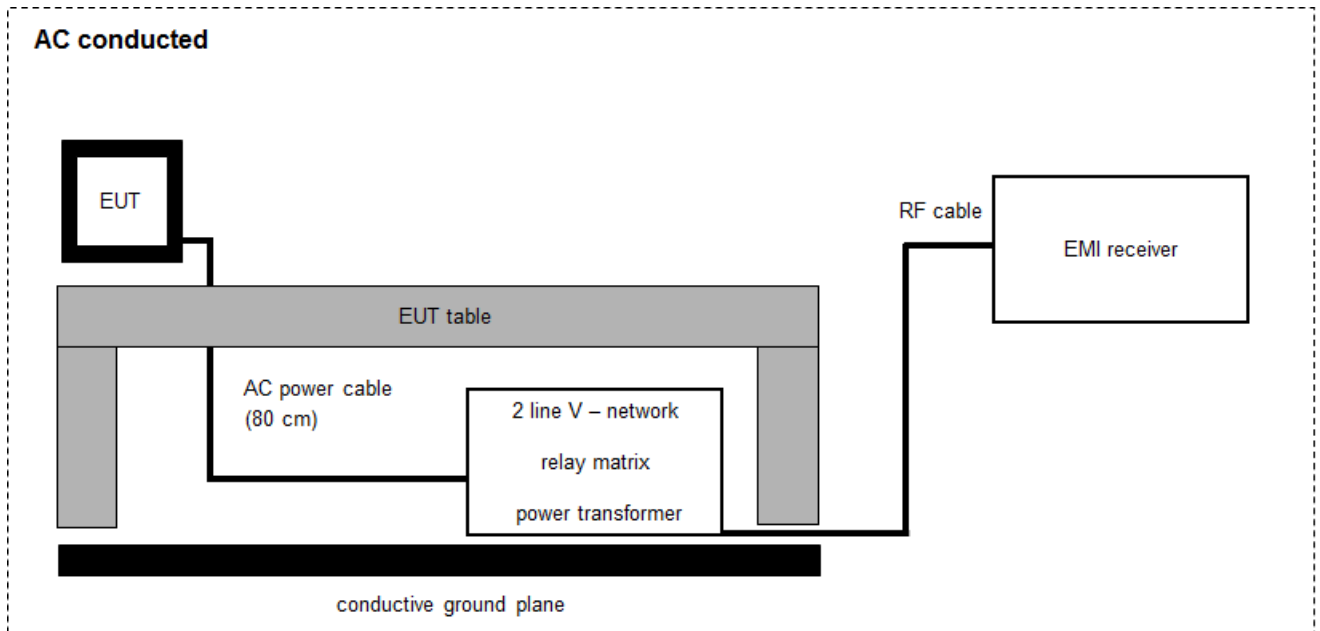

$$FS = UR + CF + VC$$

(FS-field strength; UR-voltage at the receiver; CR-loss of the cable and filter; VC-correction factor of the ISN)

Example calculation:

$$FS [dB\mu V/m] = 37.62 [dB\mu V/m] + 9.90 [dB] + 0.23 [dB] = 47.75 [dB\mu V/m] (244.06 \mu V/m)$$

Equipment table:

No.	Setup	Equipment	Type	Manufacturer	Serial No.	INV. No.	Kind of Calibration	Last Calibration	Next Calibration
1	A	Two-line V-Network (LISN) 9 kHz to 30 MHz	ESH3-Z5	Rohde & Schwarz	892475/017	300002209	vIKI!	11.12.2019	10.12.2021
2	A	RF-Filter-section	85420E	HP	3427A00162	300002214	NK!	-/-	-/-
3	A	EMI Test Receiver	ESCI 3	R&S	100083	300003312	k	09.12.2020	08.12.2021
4	A	Hochpass 150 kHz	EZ-25	R&S	100010	300003798	ev	-/-	-/-
5	A	PC	TeLine	F+W		300003532	ne	-/-	-/-
6	A	Analyzer-Reference-System (Harmonics and Flicker)	ARS 16/1	SPS	A3509 07/0 0205	300003314	vIKI!	17.01.2020	16.01.2022

## 8 Sequence of testing

### 8.1 Sequence of testing radiated spurious 9 kHz to 30 MHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, it is placed on a table with 0.8 m height.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement\*

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 1 m.
- At each turntable position the analyzer sweeps with positive-peak detector to find the maximum of all emissions.

#### Final measurement

- Identified emissions during the pre-measurement are maximized by the software by rotating the turntable from 0° to 360°.
- Loop antenna is rotated about its vertical axis for maximum response at each azimuth about the EUT. (For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT)
- The final measurement is done in the position (turntable and elevation) causing the highest emissions with quasi-peak (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. A plot with the graph of the premeasurement and the limit is stored.

\*Note: The sequence will be repeated three times with different EUT orientations.

## 8.2 Sequence of testing radiated spurious 30 MHz to 1 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 10 m or 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 m to 3 m.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximize the peaks by changing turntable position  $\pm 45^\circ$  and antenna height between 1 and 4 m.
- The final measurement is done with quasi-peak detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.



### 8.3 Sequence of testing radiated spurious 1 GHz to 18 GHz

#### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- If the EUT is a tabletop system, a 2-axis positioner with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed directly on the turn table.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- Measurement distance is 3 m (see ANSI C 63.4) – see test details.
- EUT is set into operation.

#### Premeasurement

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height is 1.5 m.
- At each turntable position and antenna polarization the analyzer sweeps with positive peak detector to find the maximum of all emissions.

#### Final measurement

- The final measurement is performed for at least six highest peaks according to the requirements of the ANSI C63.4.
- Based on antenna and turntable positions at which the peak values are measured the software maximizes the peaks by rotating the turntable from 0° to 360°. This measurement is repeated for different EUT-table positions (0° to 150° in 30°-steps) and for both antenna polarizations.
- The final measurement is done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement with marked maximum final results and the limit is stored.

## 8.4 Sequence of testing radiated spurious above 18 GHz

### Setup

- The equipment is set up to simulate normal operation mode as described in the user manual or defined by the manufacturer.
- Auxiliary equipment and cables are positioned to simulate normal operation conditions as described in ANSI C 63.4.
- The AC power port of the EUT (if available) is connected to a power outlet.
- The measurement distance is as appropriate (e.g. 0.5 m).
- The EUT is set into operation.

### Premeasurement

- The test antenna is handheld and moved carefully over the EUT to cover the EUT's whole sphere and different polarizations of the antenna.

### Final measurement

- The final measurement is performed at the position and antenna orientation causing the highest emissions with Peak and RMS detector (as described in ANSI C 63.4).
- Final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit are recorded. A plot with the graph of the premeasurement and the limit is stored.

## 9 Measurement uncertainty

Measurement uncertainty		
Test case	Uncertainty	
Antenna gain	± 3 dB	
Power spectral density	± 1.56 dB	
DTS bandwidth	± 100 kHz (depends on the used RBW)	
Occupied bandwidth	± 100 kHz (depends on the used RBW)	
Maximum output power conducted	± 1.56 dB	
Detailed spurious emissions @ the band edge - conducted	± 1.56 dB	
Band edge compliance radiated	± 3 dB	
Spurious emissions conducted	> 3.6 GHz	± 1.56 dB
	> 7 GHz	± 1.56 dB
	> 18 GHz	± 2.31 dB
	≥ 40 GHz	± 2.97 dB
Spurious emissions radiated below 30 MHz	± 3 dB	
Spurious emissions radiated 30 MHz to 1 GHz	± 3 dB	
Spurious emissions radiated 1 GHz to 12.75 GHz	± 3.7 dB	
Spurious emissions radiated above 12.75 GHz	± 4.5 dB	
Spurious emissions conducted below 30 MHz (AC conducted)	± 2.6 dB	

## 10 Summary of measurement results

<input checked="" type="checkbox"/>	No deviations from the technical specifications were ascertained
<input type="checkbox"/>	There were deviations from the technical specifications ascertained
<input type="checkbox"/>	This test report is only a partial test report. The content and verdict of the performed test cases are listed below.

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS - 247, Issue 2	See table!	2021-05-21	-/-

Test specification clause	Test case	Guideline	Temperature conditions	Power source voltages	Mode	C	NC	NA	NP	Remark
§15.247(b)(4) RSS - 247 / 5.4 (f)(ii)	Antenna gain	-/-	Nominal	Nominal	DSSS		-/-			-/-
§15.35	Duty cycle	-/-	Nominal	Nominal	DSSS OFDM		-/-			-/-
§15.247(e) RSS - 247 / 5.2 (b)	Power spectral density	KDB 558074 DTS clause: 8.4	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(a)(2) RSS - 247 / 5.2 (a)	DTS bandwidth	KDB 558074 DTS clause: 8.2	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
RSS Gen clause 4.6.1	Occupied bandwidth	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(b)(3) RSS - 247 / 5.4 (d)	Maximum output power	KDB 558074 DTS clause: 8.3.1.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.205 RSS - 247 / 5.5 RSS - Gen	Band edge compliance rad.	KDB 558074 DTS clause: 8.7.3	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5	TX spurious emissions cond.	KDB 558074 DTS clause: 8.5	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.209(a) RSS-Gen	TX spurious emissions rad. below 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. 30 MHz to 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.247(d) RSS - 247 / 5.5 RSS-Gen	TX spurious emissions rad. above 1 GHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-
§15.107(a) §15.207	Conducted emissions < 30 MHz	-/-	Nominal	Nominal	DSSS OFDM	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-/-

**Notes:**

<b>C</b>	Compliant	<b>NC</b>	Not compliant	<b>NA</b>	Not applicable	<b>NP</b>	Not performed
----------	-----------	-----------	---------------	-----------	----------------	-----------	---------------

## 11 Additional information and comments

Reference documents: CustomerQuestionnairePAN9520.pdf,  
PAN9520\_CertificationGuide.pdf

Co-applicable documents: 1-0450/20-01-07\_log1\_conducted.pdf

Configuration descriptions: Transmitter test mode was enabled using manufacturers test software ESP\_RF\_test\_tool\_v2.5.  
The Firmware ESP32-S2\_RF\_TEST\_V200\_40M\_20200714.bin was uploaded before testing. Test parameters such as Frequency, WiFi Rate and Attenuation were set according customers specification. The Output Power is controlled via the Attenuation setting.

Affected "WiFi Rate" Setting	Attenuation		
	Lowest channel	Middle channel	Highest channel
11b 1MBit/s	6 x 0.25 dB	6 x 0.25 dB	6 x 0.25 dB
11g 6MBit/s	16 x 0.25 dB	8 x 0.25 dB	16 x 0.25 dB
11n MCS1 (20 MHz)	20 x 0.25 dB	8 x 0.25 dB	20 x 0.25 dB
11n MCS0 (40 MHz)	24 x 0.25 dB	8 x 0.25 dB	28 x 0.25 dB

Other than in all other measurements reported hereafter, measurements for antenna gain determination have been performed using a Continuous Wave signal (CW) with the Attenuation parameter set to 0.

Conducted Emissions on Mains performed using an AC/DC Adapter provided by the test lab. Model: Samsung / Tianjin Electronics Inc. ETA-P11JBE 5V/2A.

Special test descriptions: An additional cable loss of 2.1 dB is considered for all conducted measurements accounting for the attenuation between radio and SMA connector of the DUT.

EUT selection:

- Only one device available
- Devices selected by the customer
- Devices selected by the laboratory (Randomly)

Provided channels:

Channels with 20 MHz channel bandwidth:

channel number & center frequency													
<b>channel</b>	<b>1</b>	2	3	4	5	<b>6</b>	7	8	9	10	<b>11</b>	12	13
<b>f<sub>c</sub> / MHz</b>	<b>2412</b>	2417	2422	2427	2432	<b>2437</b>	2442	2447	2452	2457	<b>2462</b>	2467	2472

Channels with 40 MHz channel bandwidth:

channel number & center frequency													
<b>channel</b>	-/-	-/-	<b>3</b>	4	5	<b>6</b>	7	8	<b>9</b>	10	11	-/-	-/-
<b>f<sub>c</sub> / MHz</b>	-/-	-/-	<b>2422</b>	2427	2432	<b>2437</b>	2442	2447	<b>2452</b>	2457	2462	-/-	-/-

Note: The channels used for the tests are marked in bold in the list.

## 12 Additional EUT parameter

- Test mode:
- No test mode available  
lperf was used to ping another device with the largest support packet size
  - Test mode available  
Special software is used.  
EUT is transmitting pseudo random data by itself
- Modulation types:
- Wide Band Modulation (None Hopping – e.g. DSSS, OFDM)
  - Frequency Hopping Spread Spectrum (FHSS)
- Antennas and transmit operating modes:
- Operating mode 1 (single antenna)
    - Equipment with 1 antenna,
    - Equipment with 2 diversity antennas operating in switched diversity mode by which at any moment in time only 1 antenna is used,
    - Smart antenna system with 2 or more transmit/receive chains, but operating in a mode where only 1 transmit/receive chain is used)
  - Operating mode 2 (multiple antennas, no beamforming)
    - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously but without beamforming.
  - Operating mode 3 (multiple antennas, with beamforming)
    - Equipment operating in this mode contains a smart antenna system using two or more transmit/receive chains simultaneously with beamforming.  
In addition to the antenna assembly gain (G), the beamforming gain (Y) may have to be taken into account when performing the measurements.

## 13 Measurement results

### 13.1 Antenna gain

#### Description:

The antenna gain of the complete system is calculated by the difference of radiated power (@ 3 MHz) in EIRP and the conducted power (@ 3 MHz) of the module.

#### Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	3 MHz
Video bandwidth	3 MHz / 10 MHz
Trace mode	Max hold
Test setup	See chapter 7.2 – B (radiated)
Measurement uncertainty	See chapter 9

Measurement parameters (conducted)	
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

#### Limits:

FCC	ISED
6 dBi / > 6 dBi output power and power density reduction required	

#### Results:

	lowest channel	middle channel	highest channel
Conducted power / dBm Measured with DSSS modulation	17.87	20.72	19.17
Radiated power / dBm Measured with DSSS modulation	20.15	19.40	18.60
Gain [dBi] / Calculated	2.28	-1.32	-0.57

Note: Other than in all other measurements reported hereafter, measurements for antenna gain determination have been performed using a Continuous Wave signal (CW) with the Attenuation parameter set to 0.



## 13.2 Identify worst case data rate

### Description:

All modes of the module will be measured with an average power meter or spectrum analyzer to identify the maximum transmission power.

In further tests only the identified worst case modulation scheme or bandwidth will be measured and this mode is used as representative mode for all other modulation schemes.

### Measurement:

Measurement parameter	
RMS Power Meter	
Test setup	See chapter 7.4 – C
Measurement uncertainty	See chapter 9

### Results:

Modulation (Data rate) / Output Power @ 2437 MHz (dBm)							
b-mode		g-mode		nHT20-mode		nHT40-mode	
<b>1 MBit/s</b>	<b>19.99</b>	<b>6 MBit/s</b>	<b>18.34</b>	MCS0	17.92	<b>MCS0</b>	<b>18.12</b>
2 MBit/s	19.99	9 MBit/s	18.31	<b>MCS1</b>	<b>18.00</b>	MCS1	18.03
5.5 MBit/s	19.86	12 MBit/s	18.33	MCS2	17.99	MCS2	17.99
11 MBit/s	19.93	18 MBit/s	18.33	MCS3	17.80	MCS3	18.04
		24 MBit/s	17.82	MCS4	17.75	MCS4	18.01
		36 MBit/s	17.82	MCS5	17.50	MCS5	17.22
		48 MBit/s	16.94	MCS6	16.03	MCS6	16.27
		54 MBit/s	15.96	MCS7	15.23	MCS7	15.40

### Note:

Measurements performed using an RMS Power Meter with duty cycle correction. The stated values do not include correction factor for cable attenuation (relative measurements only). Output Power results can be found in section 13.5.

The data rate used for further tests are marked in bold in the list.

### 13.3 Maximum output power

**Description:**

Measurement of the maximum conducted peak output power. The measurements are performed using the data rate identified in the previous chapter.

**Measurement:**

Measurement parameter	
According to DTS clause: 8.3.1.3	
Peak power meter	
External result file(s)	1-0450/20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – B
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED
Conducted 1.0 W / 30 dBm with an antenna gain of max. 6 dBi	

**Results:**

	maximum output power / dBm		
	lowest channel	middle channel	highest channel
Output power conducted DSSS / b – mode	19.4	22.3	21.6
Output power conducted OFDM / g – mode	21.0	25.4	23.4
Output power conducted OFDM / n HT20 – mode	21.7	25.0	23.1
Output power conducted OFDM / n HT40 – mode	21.1	25.0	21.4

## 13.4 Duty cycle

### Description:

Measurement of the timing behavior.

### Measurement:

Measurement parameter	
Detector	Peak
Sweep time	Depends on the signal see plot
Resolution bandwidth	10 MHz
Video bandwidth	10 MHz
Trace mode	Max hold
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

### Limits:

FCC	ISED
No limitation!	

### Results:

T <sub>nom</sub>	V <sub>nom</sub>	lowest channel	middle channel	highest channel
DSSS / b – mode		81.5 % / 0.89 dB	81.5 % / 0.89 dB	81.5 % / 0.89 dB
OFDM / g – mode		81.5 % / 0.89 dB	81.5 % / 0.89 dB	81.5 % / 0.89 dB
OFDM / n HT20 – mode		81.5 % / 0.89 dB	81.5 % / 0.89 dB	81.5 % / 0.89 dB
OFDM / n HT40 – mode		71.4 % / 1.46 dB	71.4 % / 1.46 dB	71.4 % / 1.46 dB

### 13.5 Peak power spectral density

**Description:**

Measurement of the peak power spectral density of a digital modulated system. The PSD shows the strength of the variations as a function of the frequency. The measurement is repeated for both modulations at the lowest, middle and highest channel.

**Measurement:**

Measurement parameter	
According to DTS clause: 8.4	
Detector	Positive Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	300 kHz
Span	30 MHz
Trace mode	Max. hold (allow trace to fully stabilize)
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED
8 dBm / 3 kHz (conducted)	

**Results:**

measured	peak power spectral density / dBm @ 3 kHz		
	Lowest channel	Middle channel	Highest channel
DSSS / b – mode	-6.19	-3.57	-3.57
OFDM / g – mode	-12.06	-6.70	-11.13
OFDM / n HT20 – mode	-12.07	-7.87	-10.88
OFDM / n HT40 – mode	-16.63	-11.06	-17.03

### 13.6 6 dB DTS bandwidth

**Description:**

Measurement of the 6 dB bandwidth of the modulated signal.

**Measurement:**

Measurement parameter	
According to DTS clause: 8.2	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with 200 counts
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED
Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.	

**Results:**

	6 dB DTS bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	9520	10024	9504
OFDM / g – mode	16052	16324	16336
OFDM / n HT20 – mode	16980	17660	17660
OFDM / n HT40 – mode	36296	36320	36328

### 13.7 Occupied bandwidth – 99% emission bandwidth

**Description:**

Measurement of the 99% bandwidth of the modulated signal acc. RSS-GEN.

**Measurement:**

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	300 kHz
Video bandwidth	1 MHz
Span	30 MHz / 50 MHz
Measurement procedure	Measurement of the 99% bandwidth using the integration function of the analyzer
Trace mode	Single count with 200 counts
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

**Usage:**

-/-	ISED
OBW is necessary for Emission Designator	

**Results:**

	99% emission bandwidth / kHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	13250.7	13518.6	13254.7
OFDM / g – mode	17882.2	18326.2	17830.2
OFDM / n HT20 – mode	18386.2	18482.2	18330.2
OFDM / n HT40 – mode	37236.3	37860.2	37716.2

### 13.8 Occupied bandwidth – 20 dB bandwidth

**Description:**

Measurement of the 20 dB bandwidth of the modulated carrier.

**Measurement:**

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	30 MHz / 50 MHz
Trace mode	Single count with min. 200 counts
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

**Usage:**

-/-	ISED
Within the used band!	

**Results:**

	20 dB bandwidth / MHz		
	lowest channel	middle channel	highest channel
DSSS / b – mode	15.5	15.9	15.6
OFDM / g – mode	20.5	20.7	20.5
OFDM / n HT20 – mode	20.5	20.6	20.6
OFDM / n HT40 – mode	41.7	42.1	42.3

### 13.9 Band edge compliance radiated

**Description:**

Measurement of the radiated band edge compliance. The EUT is turned in the position that results in the maximum level at the band edge. Then a sweep over the corresponding restricted band is performed. The EUT is set to the lowest channel for the lower restricted band and to the highest channel for the upper restricted band. The measurement is repeated for all modulations. Measurement distance is 3 meter.

**Measurement:**

	Measurement parameter for peak measurements	Measurement parameter for average measurements
		According to DTS clause: 8.7.3
Detector	Peak	RMS
Sweep time	Auto	Auto
Resolution bandwidth	1 MHz	100 kHz
Video bandwidth	1 MHz	300 kHz
Span	See plot	2 MHz
Trace mode	Max. hold	RMS Average over 101 sweeps
Analyzer function	-/-	Band power function (Compute the power by integrating the spectrum over 1 MHz)
Test setup	See chapter 7.2 – B	
Measurement uncertainty	See chapter 9	

**Limits:**

FCC	ISED
74 dBµV/m @ 3 m (Peak) 54 dBµV/m @ 3 m (AVG)	


**Results:**

band edge compliance radiated / (dBµV / m) @ 3 m				
	DSSS	OFDM (g-Mode)	OFDM (nHT20-Mode)	OFDM (40 MHz nominal channel bandwidth)
Lower band edge	57.8 (Peak) 43.7 (AVG)	66.2 (Peak) 48.5 (AVG)	63.8 (Peak) 49.8 (AVG)	63.8 (Peak) 50.0 (AVG)
Upper band edge	63.0 (Peak) 44.7 (AVG)	66.8 (Peak) 48.8 (AVG)	65.4 (Peak) 49.7 (AVG)	62.2 (Peak) 46.9 (AVG)




**Plots:** DSSS - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

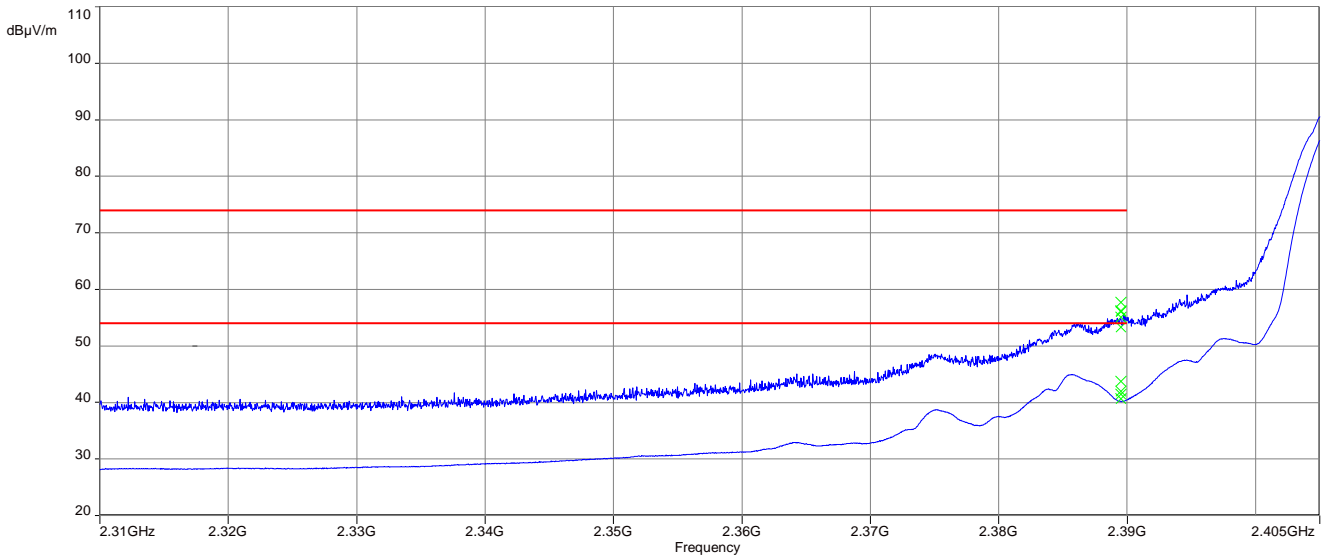


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

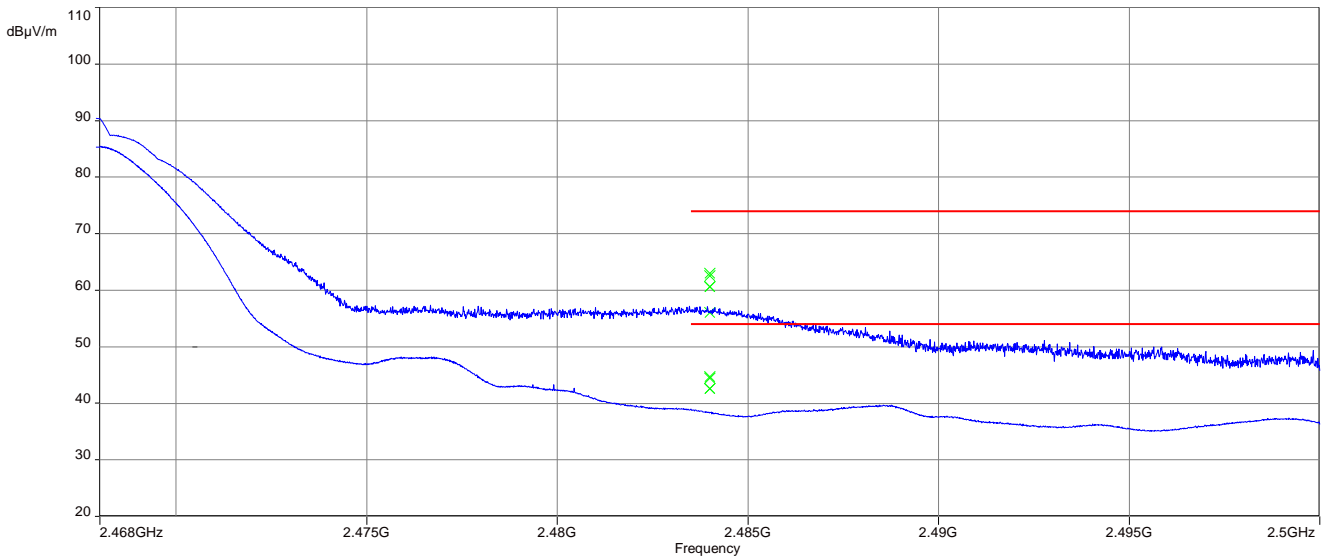


**Plots:** OFDM (g - Mode) - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

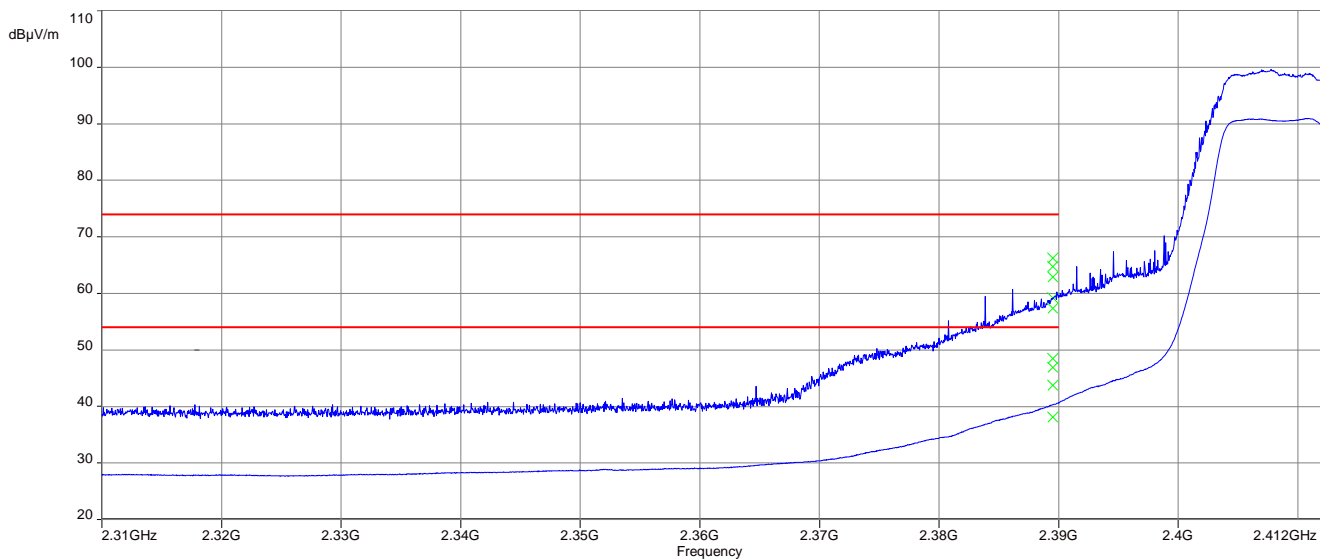


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

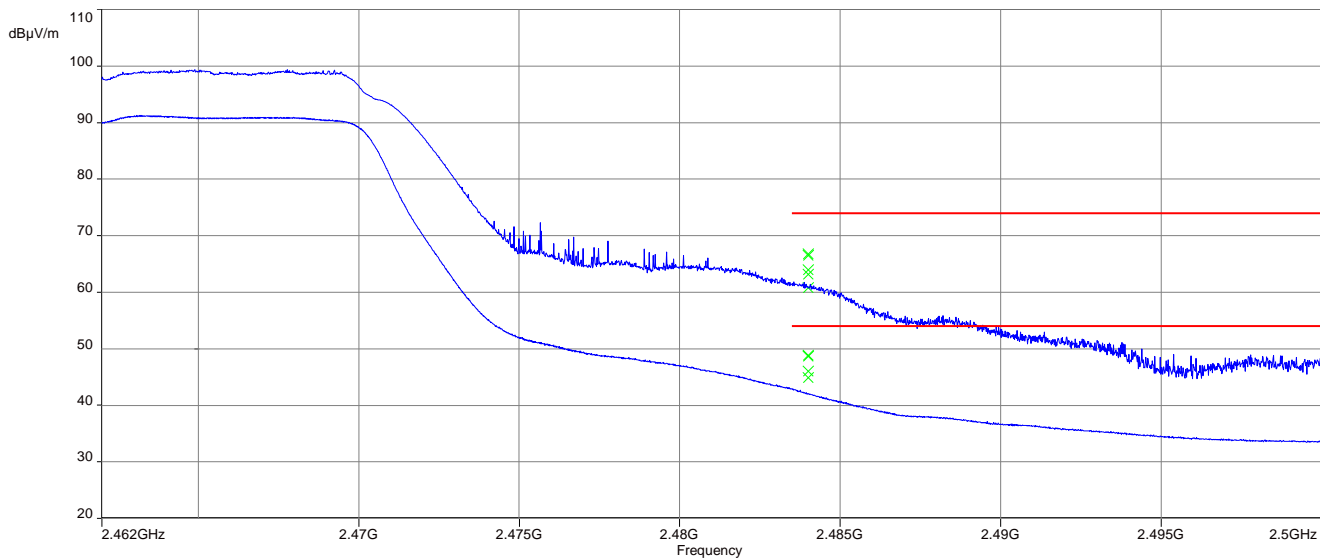


**Plots:** OFDM (nHT20 - Mode) - peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

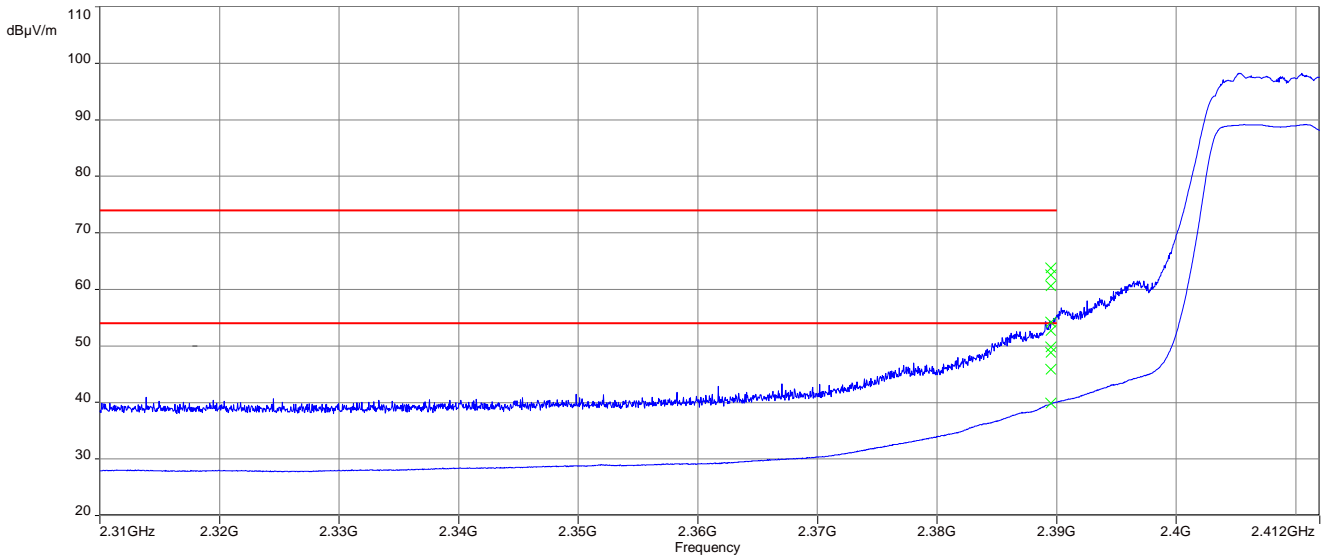


**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

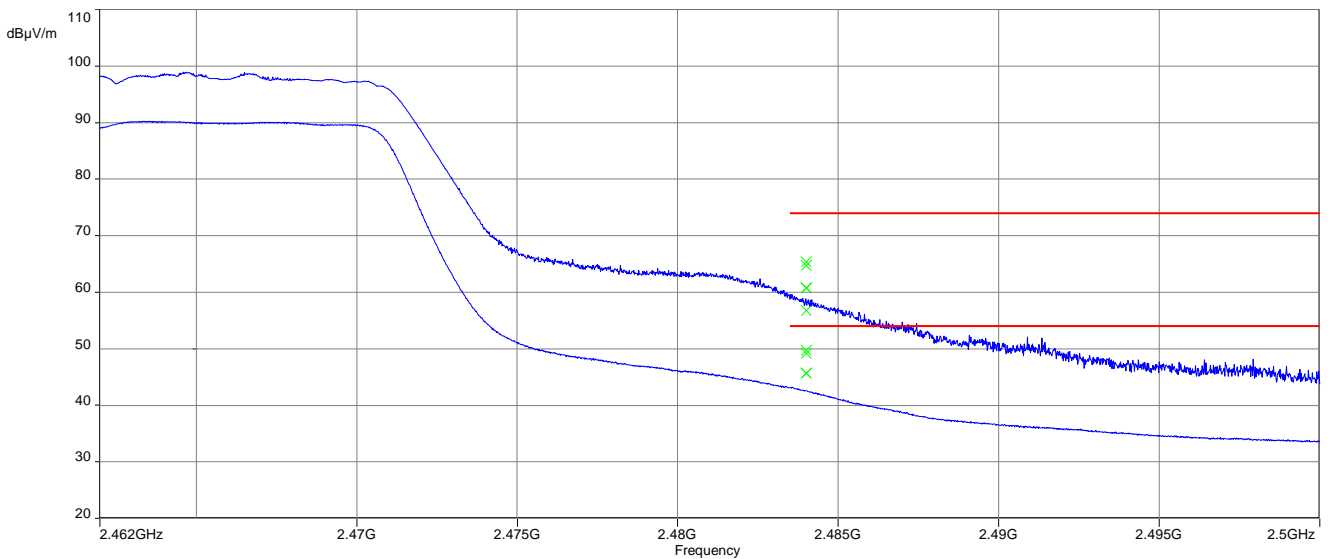


**Plots:** OFDM (40 MHz bandwidth) - mode peak / average

**Plot 1:** TX mode, lower band edge, vertical & horizontal polarization

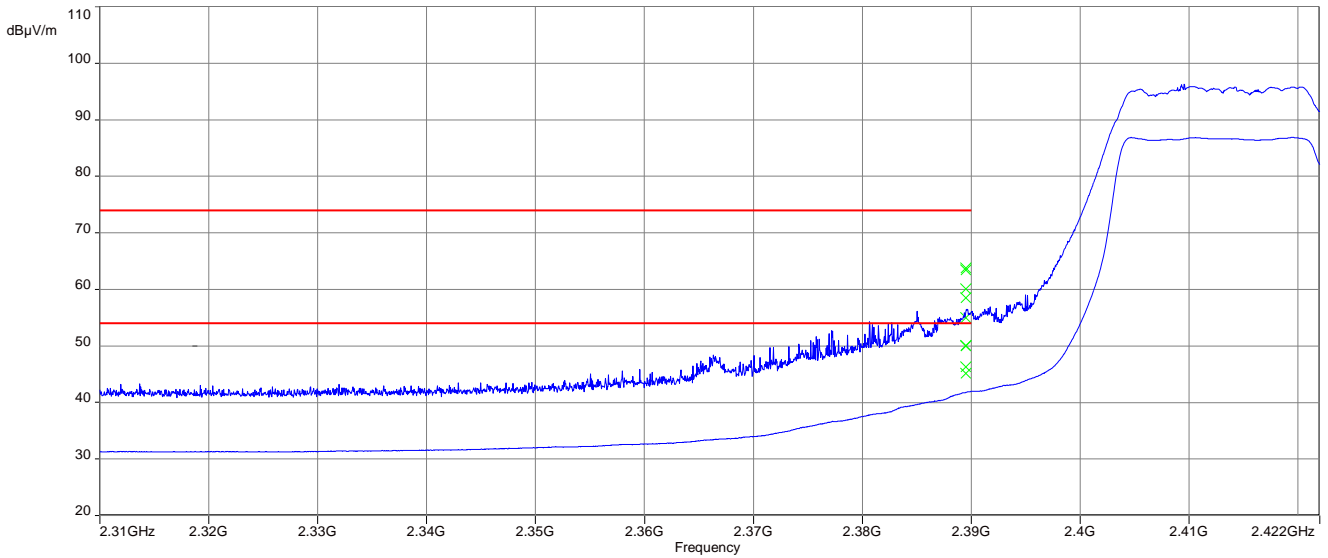

**Plot 2:** TX mode, upper band edge, vertical & horizontal polarization

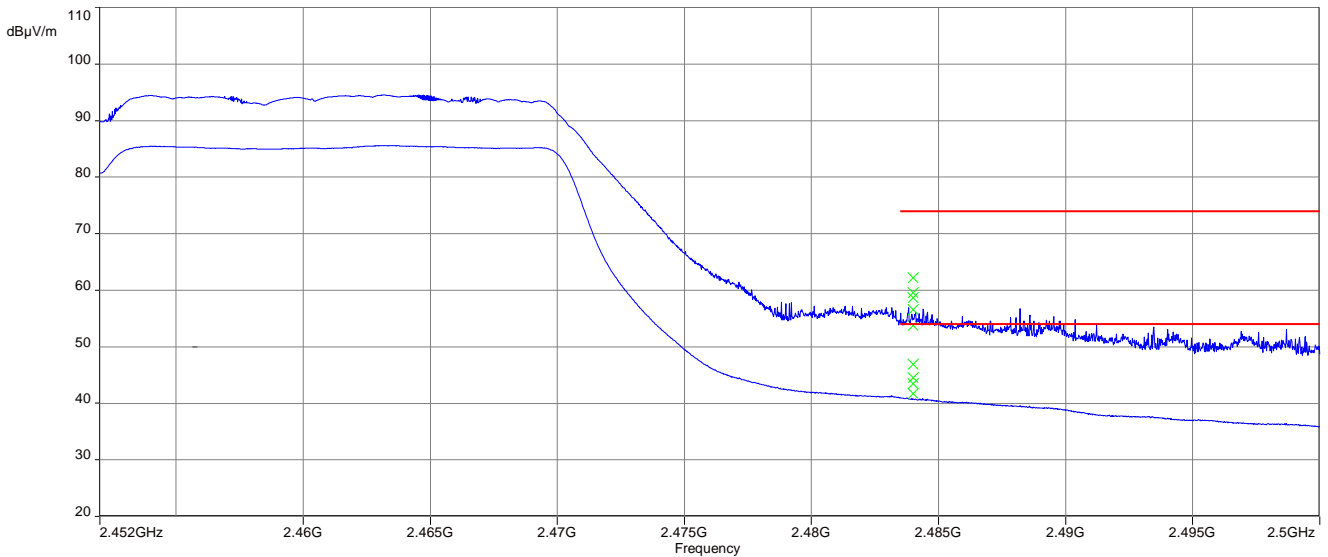

### 13.10 Spurious emissions conducted

**Description:**

Measurement of the conducted spurious emissions in transmit mode. The measurement is performed at the lowest; the middle and the highest channel. The measurement is repeated for all modulations.

**Measurement:**

Measurement parameter	
Detector	Peak
Sweep time	Auto
Resolution bandwidth	100 kHz
Video bandwidth	500 kHz
Span	9 kHz to 25 GHz
Trace mode	Max Hold
External result file(s)	1-0450_20-01-07_log1_conducted.pdf
Test setup	See chapter 7.4 – A
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required	

**Results:** DSSS / b – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		7.34	30 dBm		Operating frequency
No peaks detected			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		10.26	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		9.11	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

**Results:** OFDM / g – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		1.57	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		8.07	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		2.59	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

**Results:** OFDM / n HT20 – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		0.71	30 dBm		Operating frequency
No peaks detected..			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		6.71	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		2.20	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

**Results:** OFDM / n HT40 – mode

TX spurious emissions conducted					
f [MHz]		amplitude of emission [dBm]	limit max. allowed emission power	actual attenuation below frequency of operation [dB]	results
Lowest channel		-3.47	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Middle channel		3.23	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant
Highest channel		-2.45	30 dBm		Operating frequency
No peaks detected.			-20 dBc (peak) -30 dBc (average)		compliant

### 13.11 Spurious emissions radiated below 30 MHz

**Description:**

Measurement of the radiated spurious emissions in transmit mode below 30 MHz. The limits are recalculated to a measurement distance of 3 m with 40 dB/decade according CFR Part 2.

**Measurement:**

Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.2 – A
Measurement uncertainty	See chapter 9

**Limits:**

FCC		ISED	
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30.0	30	30	


**Results:**

TX spurious emissions radiated < 30 MHz / (dBµV / m) @ 3 m		
Frequency / MHz	Detector	Level / (dBµV / m)
All detected peaks are more than 20 dB below the limit.		




**Plots:** DSSS


**Plot 1:** 9 kHz to 30 MHz, lowest channel

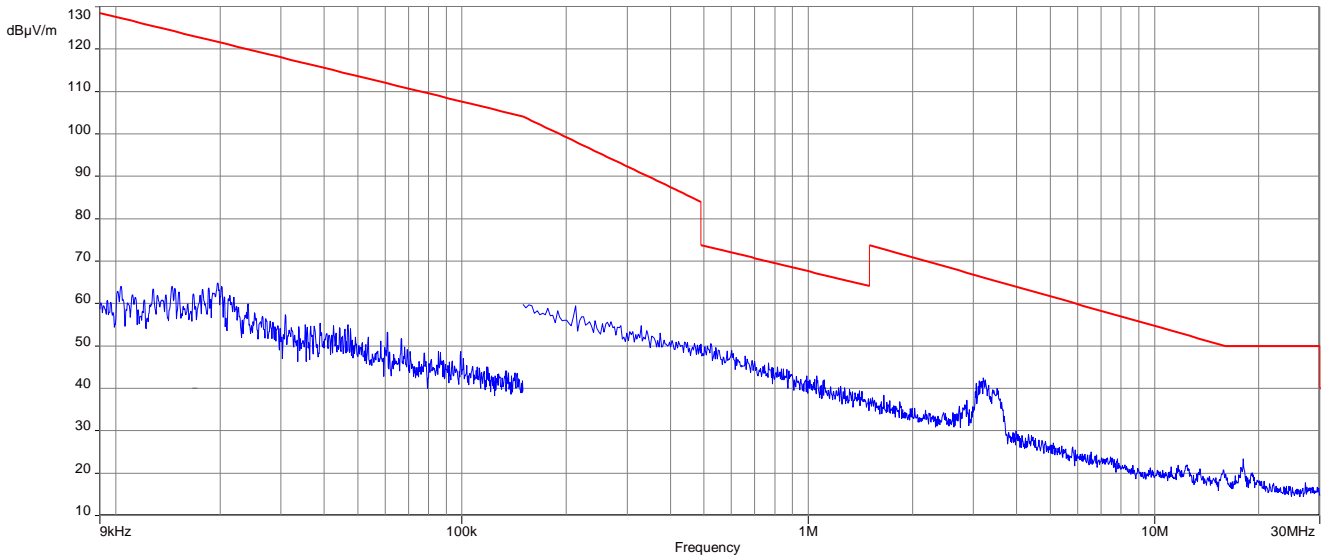

**Plot 2:** 9 kHz to 30 MHz, middle channel

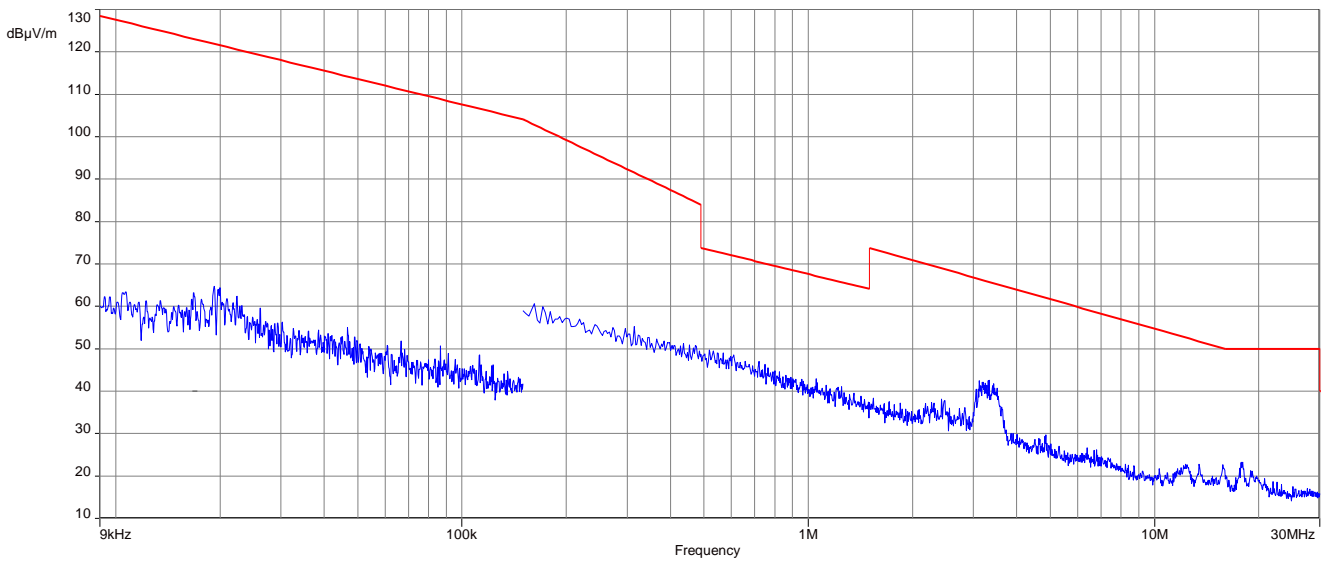


**Plot 3:** 9 kHz to 30 MHz, highest channel

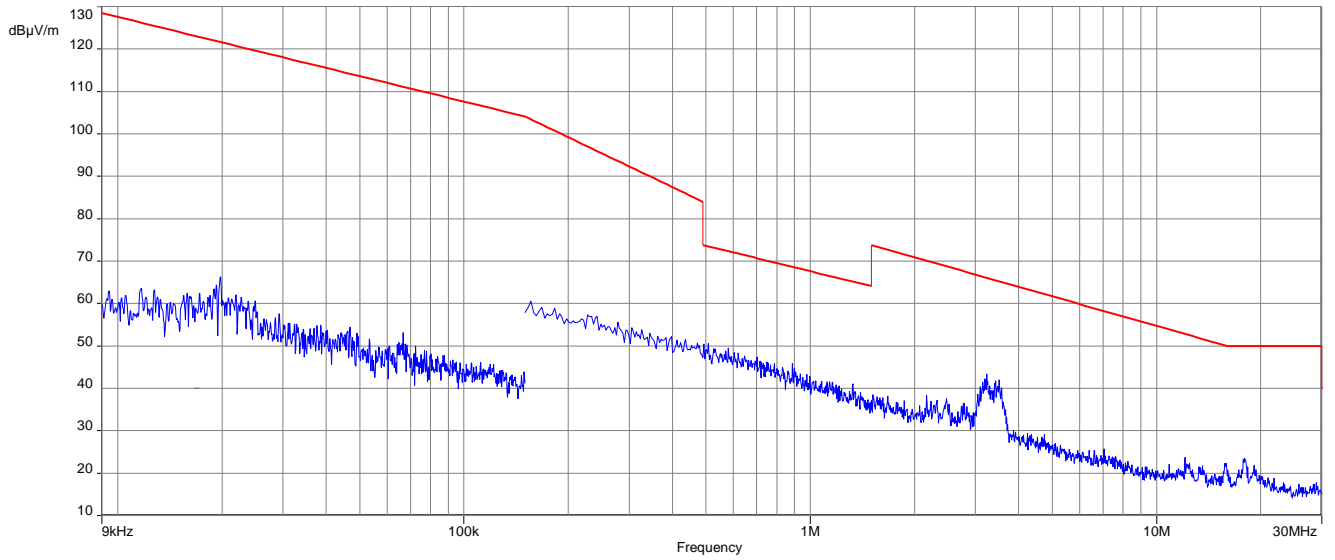


**Plots:** OFDM (20 MHz nominal channel bandwidth)


**Plot 1:** 9 kHz to 30 MHz, lowest channel

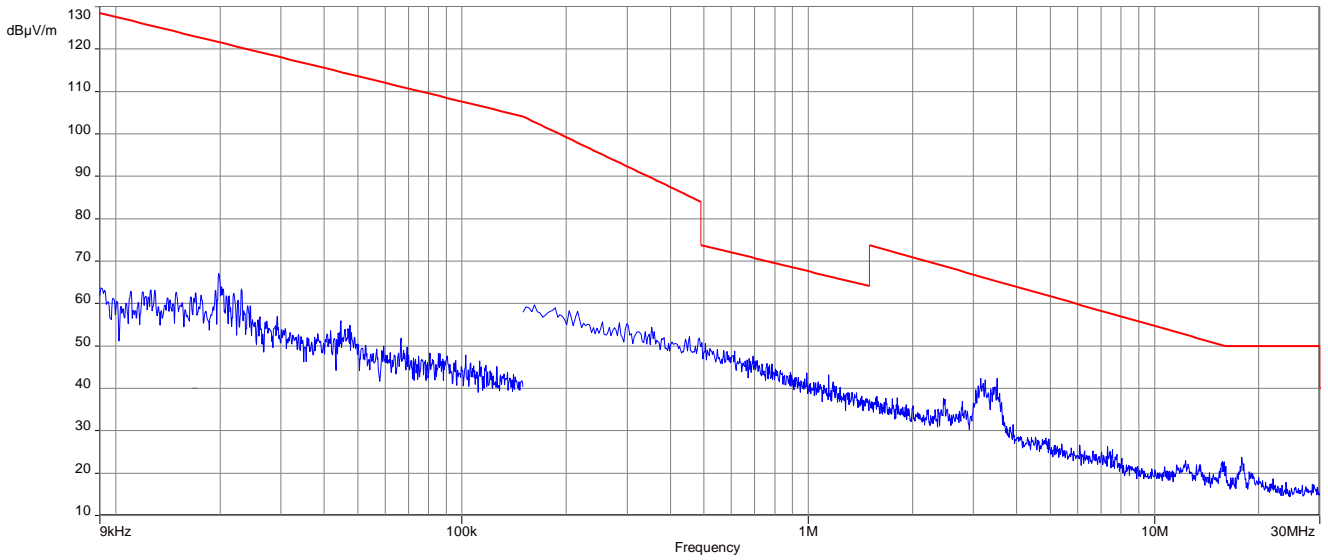

**Plot 2:** 9 kHz to 30 MHz, middle channel

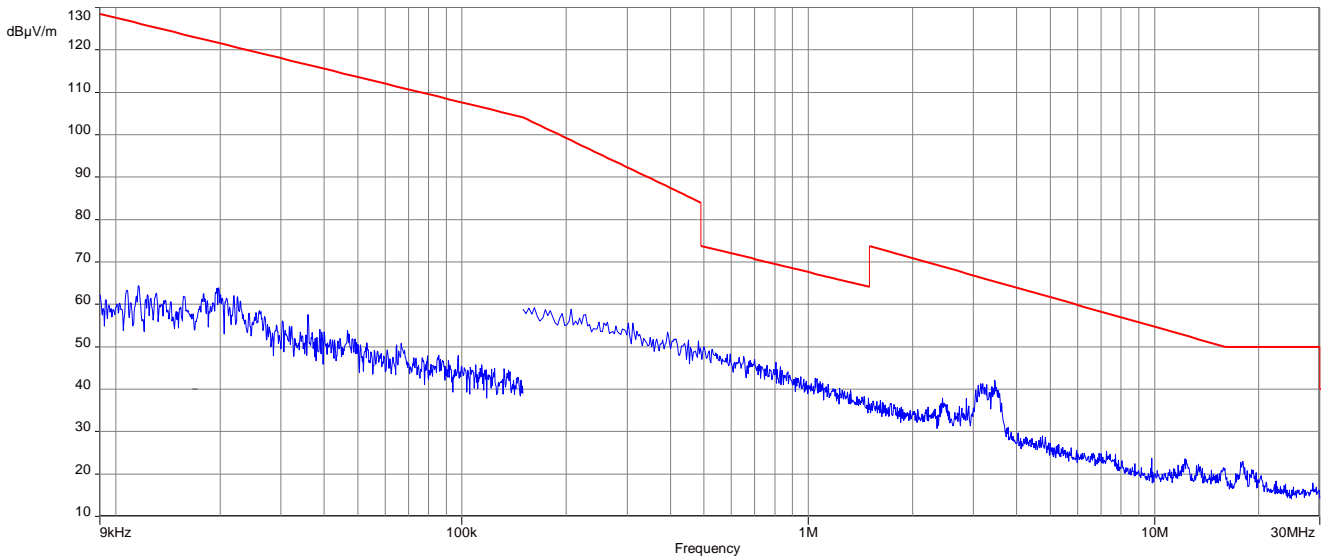


**Plot 3:** 9 kHz to 30 MHz, highest channel

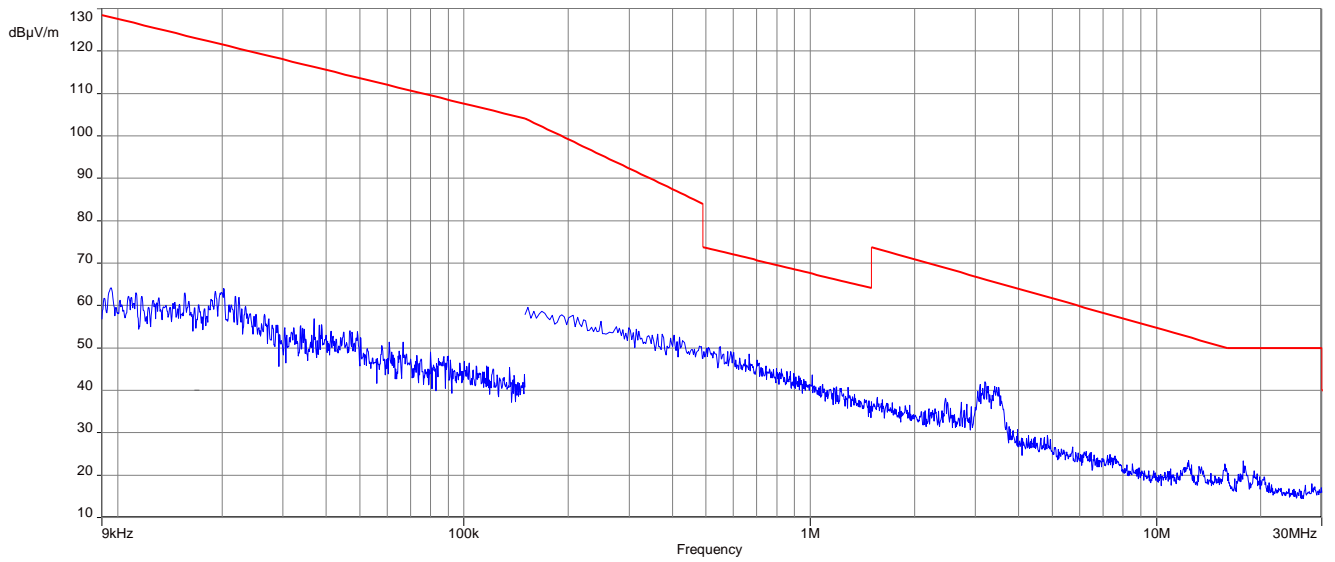


**Plots:** OFDM (40 MHz nominal channel bandwidth)


**Plot 1:** 9 kHz to 30 MHz, lowest channel

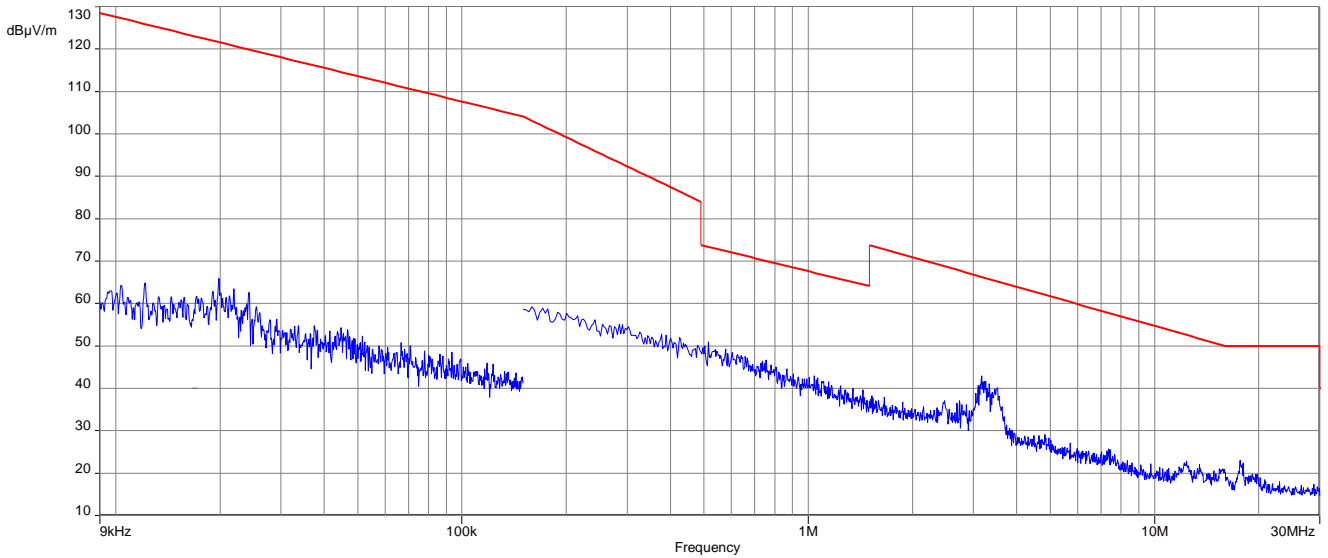

**Plot 2:** 9 kHz to 30 MHz, middle channel

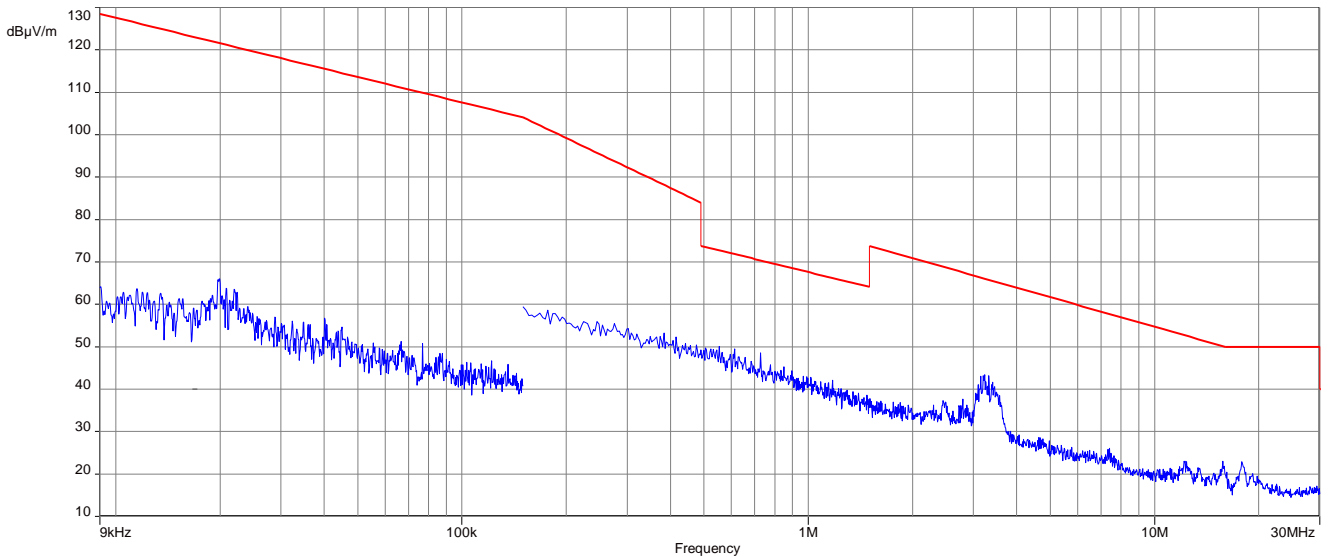

**Plot 3:** 9 kHz to 30 MHz, highest channel

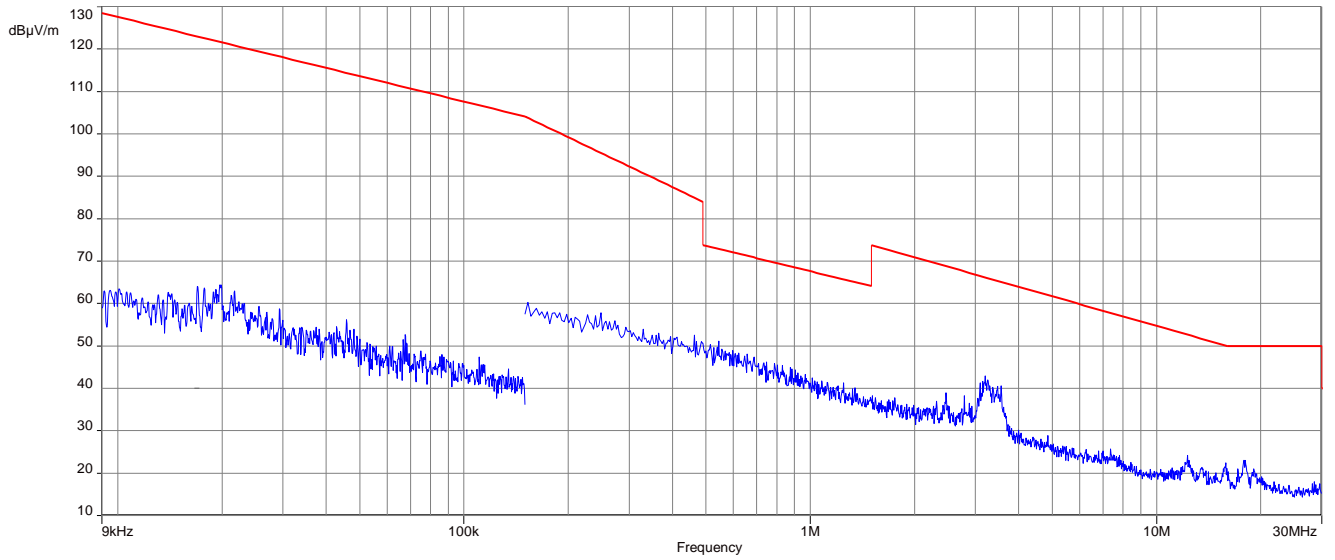

### 13.12 Spurious emissions radiated 30 MHz to 1 GHz

**Description:**

Measurement of the radiated spurious emissions and cabinet radiations below 1 GHz.

**Measurement:**


Measurement parameter	
Detector	Peak / Quasi Peak
Sweep time	Auto
Resolution bandwidth	120 kHz
Video bandwidth	3 x RBW
Span	30 MHz to 1 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.1 - A
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
30 – 88	30.0	10
88 – 216	33.5	10
216 – 960	36.0	10

**Plot:** DSSS

**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

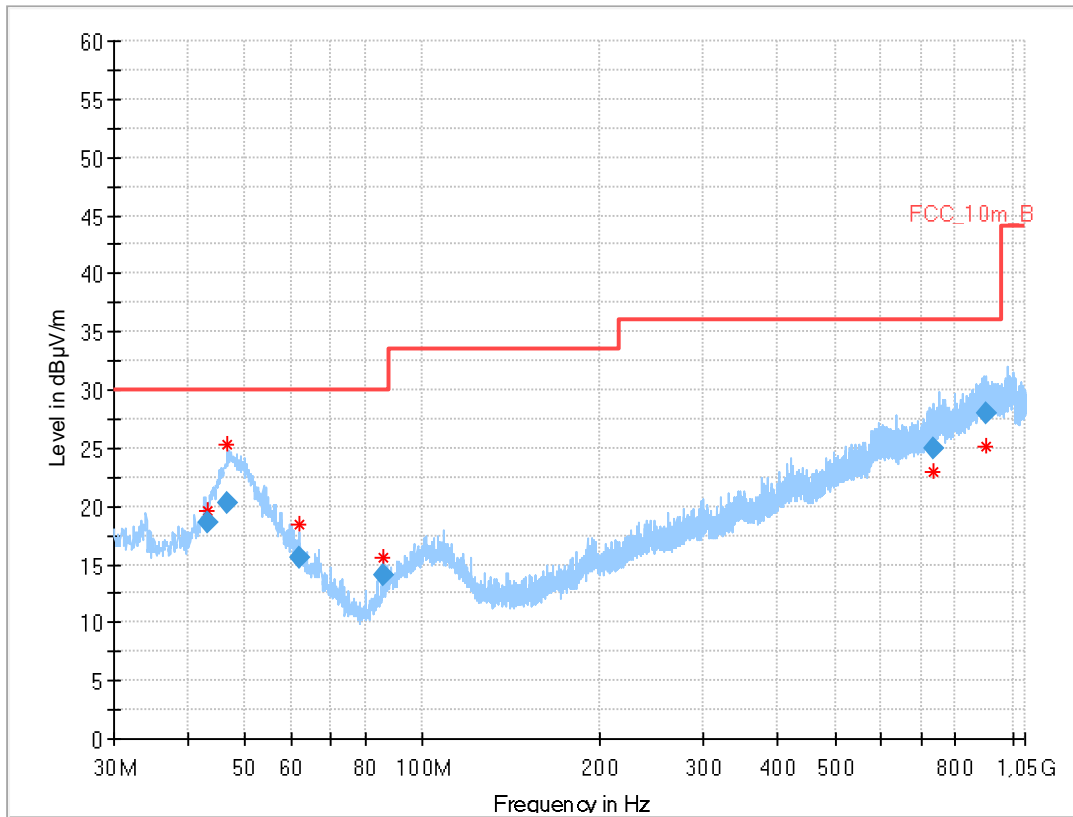


**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.285	18.61	30.0	11.4	1000	120.0	101.0	V	202	14
46.613	20.36	30.0	9.6	1000	120.0	110.0	V	-1	14
62.008	15.53	30.0	14.5	1000	120.0	110.0	V	67	12
85.975	14.11	30.0	15.9	1000	120.0	161.0	V	67	9
732.912	24.99	36.0	11.0	1000	120.0	113.0	V	-22	22
898.657	28.02	36.0	8.0	1000	120.0	98.0	V	67	24




**Plot 2:** 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

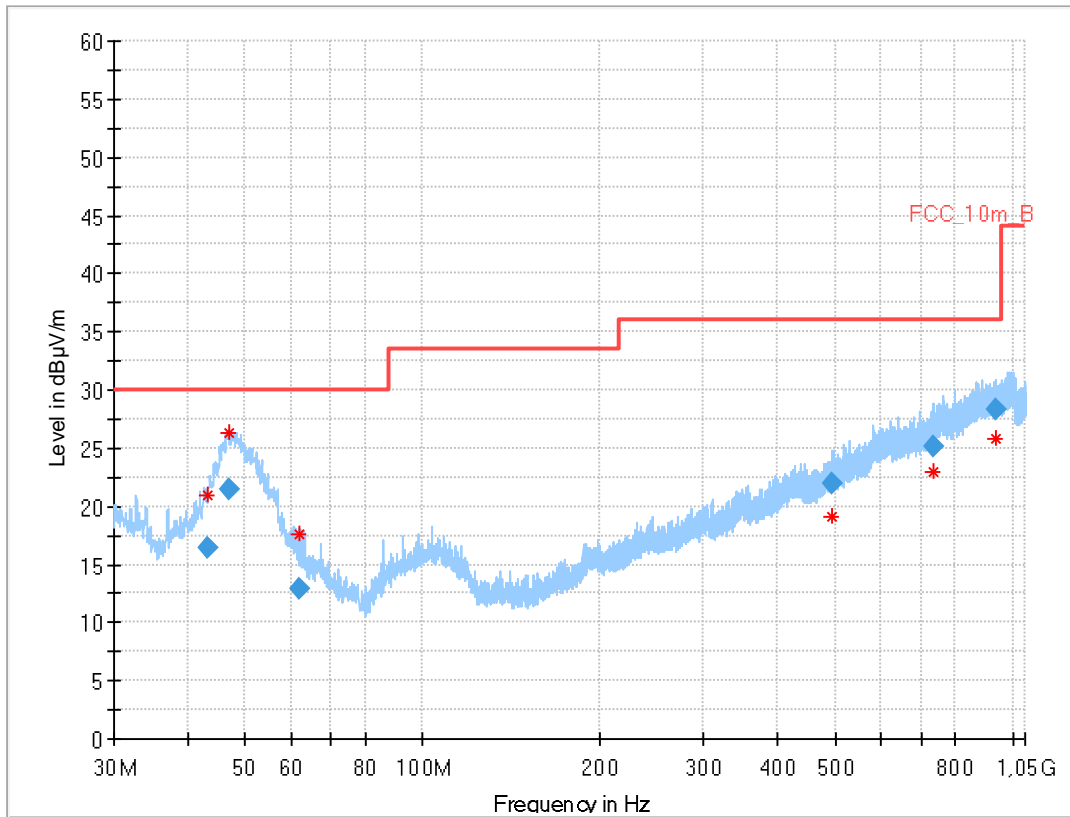

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.223	16.43	30.0	13.6	1000	120.0	170.0	V	67	14
47.011	21.37	30.0	8.6	1000	120.0	98.0	V	74	14
61.993	12.97	30.0	17.0	1000	120.0	104.0	V	285	12
495.352	21.92	36.0	14.1	1000	120.0	145.0	V	247	18
734.767	25.22	36.0	10.8	1000	120.0	135.0	V	183	22
934.568	28.34	36.0	7.7	1000	120.0	104.0	H	-3	24

**Plot 3:** 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

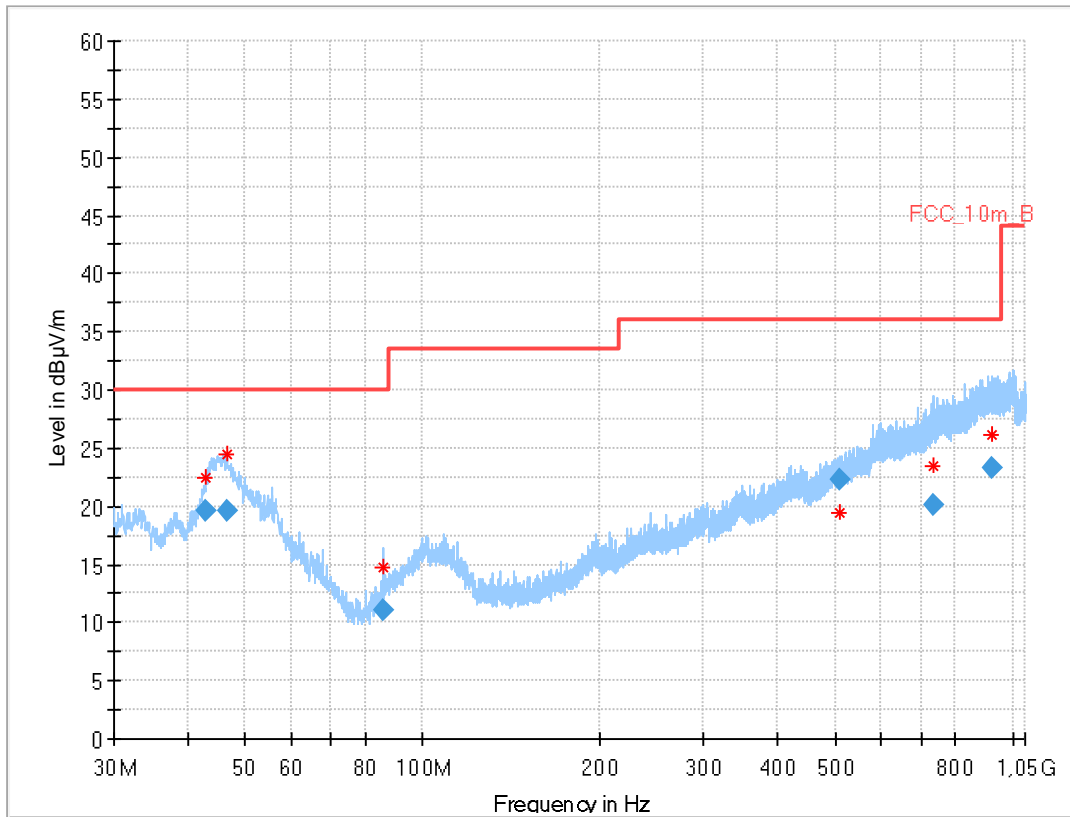


**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.988	19.66	30.0	10.3	1000	120.0	170.0	V	292	14
46.751	19.57	30.0	10.4	1000	120.0	108.0	V	157	14
85.991	11.14	30.0	18.9	1000	120.0	170.0	V	-22	9
510.979	22.24	36.0	13.8	1000	120.0	170.0	H	194	19
733.918	20.09	36.0	15.9	1000	120.0	170.0	V	202	22
923.236	23.24	36.0	12.8	1000	120.0	170.0	V	67	24

**Plot:** OFDM (20 MHz nominal channel bandwidth)


**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

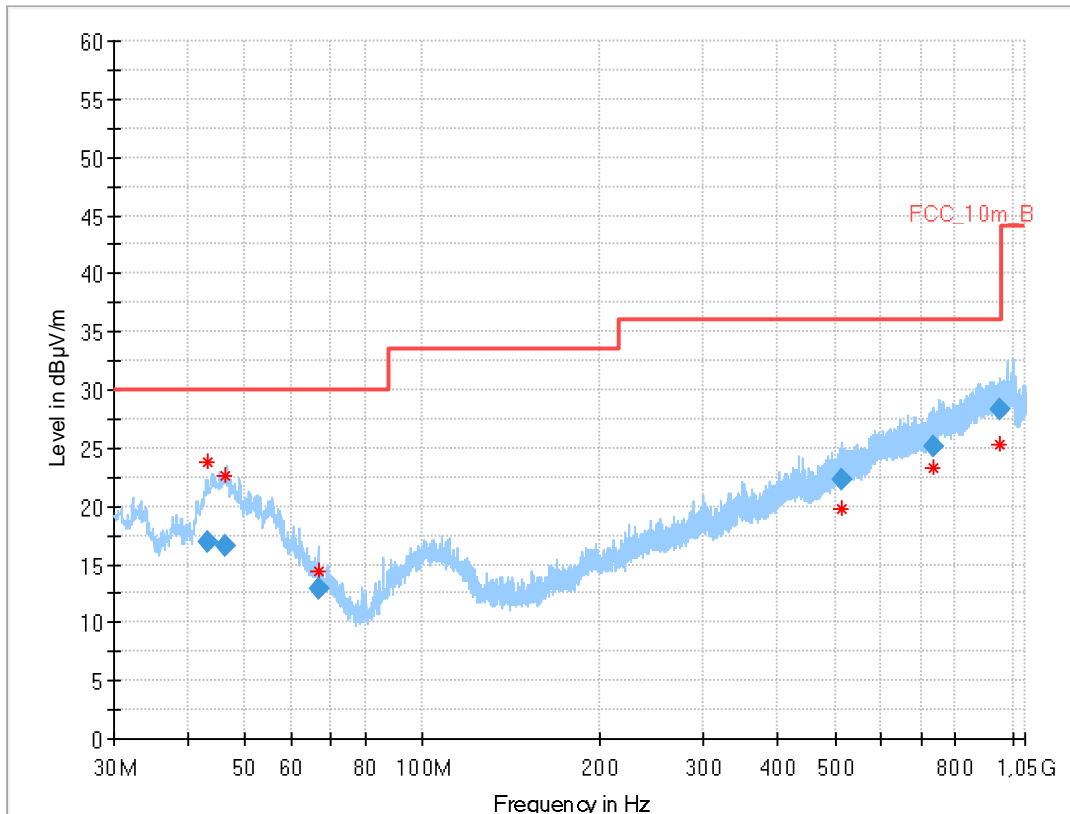

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.191	16.93	30.0	13.1	1000	120.0	170.0	V	253	14
46.239	16.67	30.0	13.3	1000	120.0	170.0	V	162	14
66.556	12.96	30.0	17.0	1000	120.0	101.0	V	276	11
512.012	22.24	36.0	13.8	1000	120.0	150.0	H	157	19
735.360	25.21	36.0	10.8	1000	120.0	119.0	H	157	22
954.143	28.32	36.0	7.7	1000	120.0	114.0	V	87	24


**Plot 2:** 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

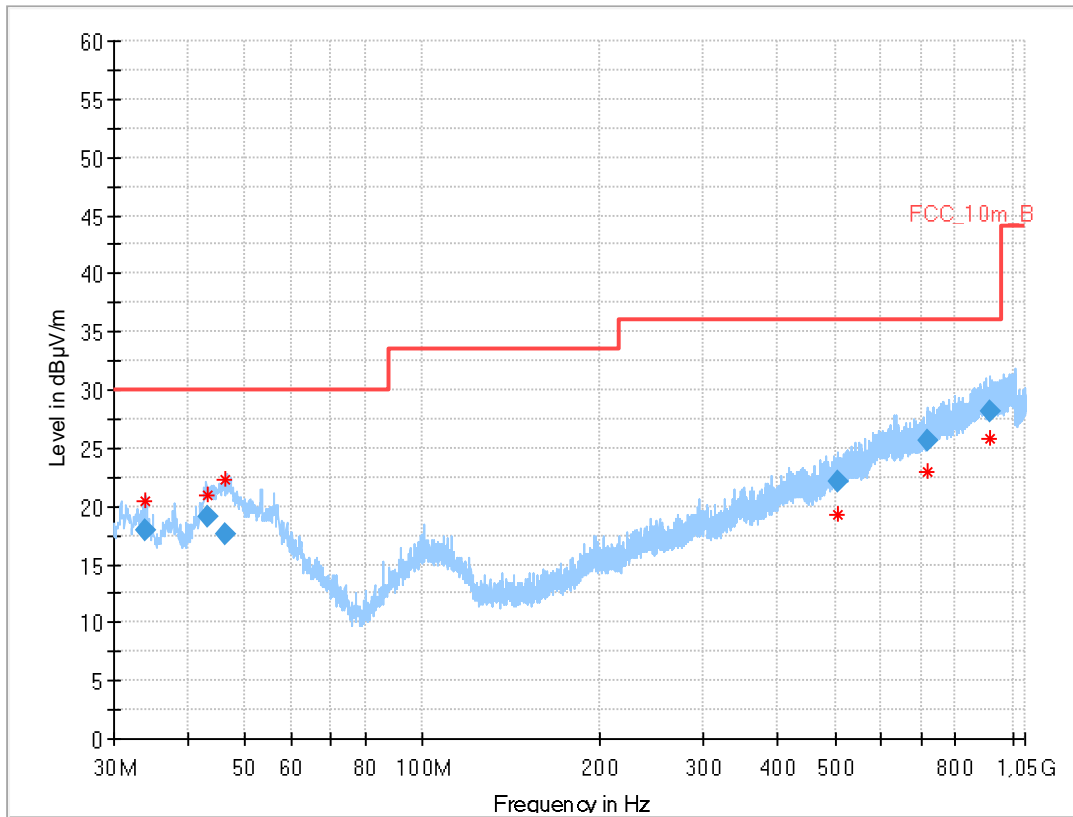

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.992	17.91	30.0	12.1	1000	120.0	106.0	V	190	12
43.081	19.09	30.0	10.9	1000	120.0	170.0	V	247	14
46.297	17.60	30.0	12.4	1000	120.0	114.0	V	67	14
504.580	22.06	36.0	13.9	1000	120.0	118.0	V	157	18
718.573	25.62	36.0	10.4	1000	120.0	170.0	H	-22	21
916.129	28.15	36.0	7.9	1000	120.0	135.0	H	157	24

**Plot 3:** 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

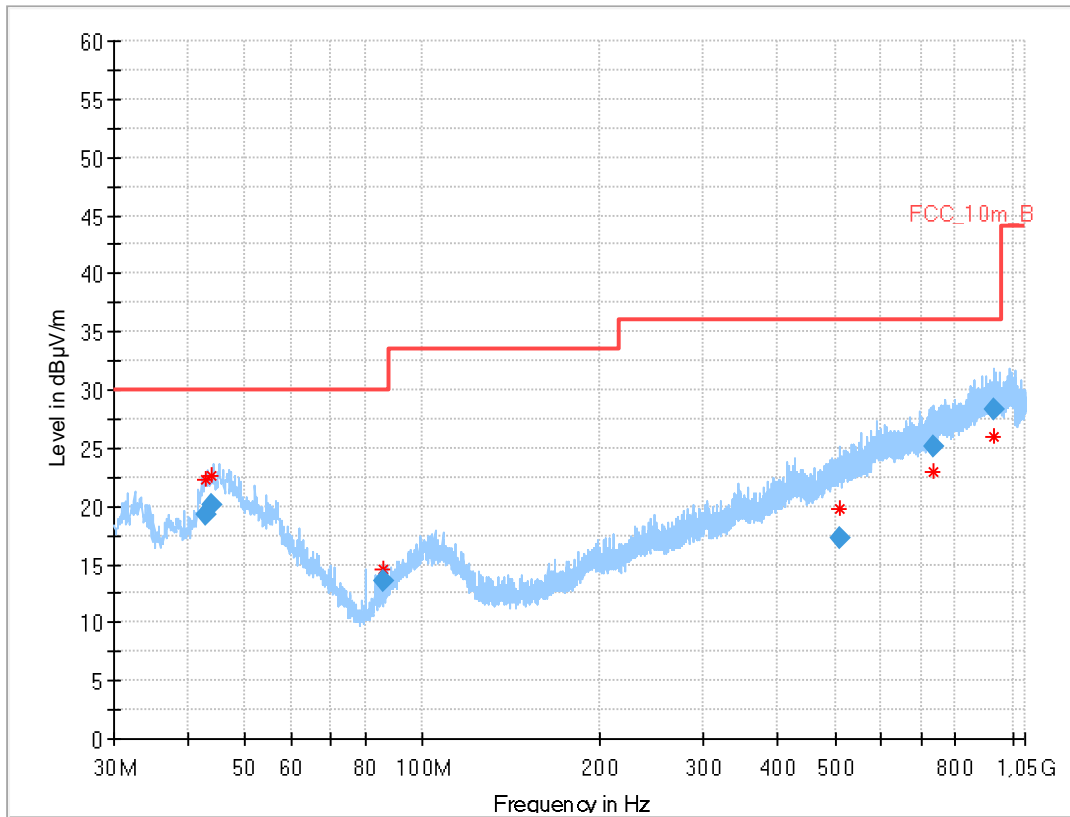


**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
42.812	19.32	30.0	10.7	1000	120.0	170.0	V	-18	14
44.001	20.14	30.0	9.9	1000	120.0	102.0	V	247	14
85.998	13.62	30.0	16.4	1000	120.0	127.0	V	67	9
510.683	17.29	36.0	18.7	1000	120.0	164.0	H	247	19
734.711	25.13	36.0	10.9	1000	120.0	98.0	V	-22	22
928.934	28.26	36.0	7.7	1000	120.0	111.0	V	-22	24

**Plot:** OFDM (40 MHz nominal channel bandwidth)


**Plot 1:** 30 MHz to 1 GHz, vertical & horizontal polarization, lowest channel

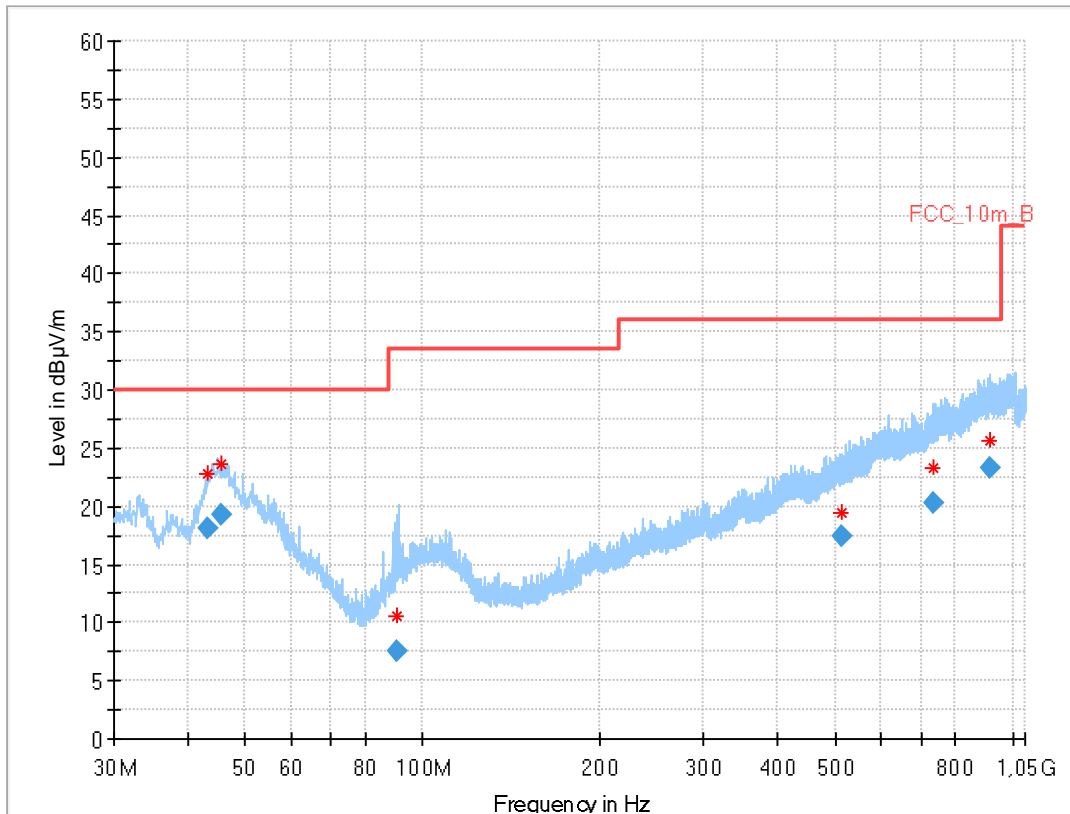

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
43.316	18.18	30.0	11.8	1000	120.0	107.0	V	250	14
45.477	19.35	30.0	10.7	1000	120.0	101.0	V	89	14
90.740	7.62	33.5	25.9	1000	120.0	170.0	H	-22	11
511.540	17.35	36.0	18.7	1000	120.0	166.0	H	-22	19
735.781	20.25	36.0	15.8	1000	120.0	144.0	H	67	22
916.741	23.27	36.0	12.7	1000	120.0	147.0	V	247	24


**Plot 2:** 30 MHz to 1 GHz, vertical & horizontal polarization, middle channel

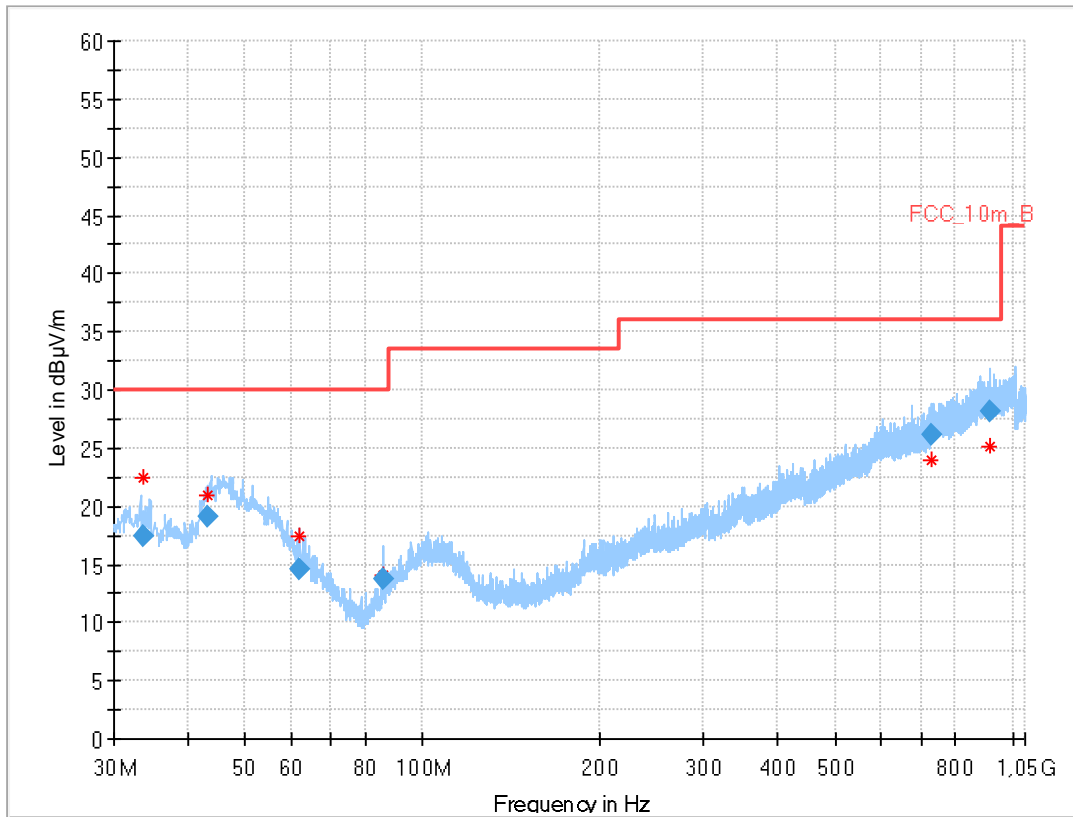

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
33.578	17.43	30.0	12.6	1000	120.0	157.0	V	-16	12
43.241	19.16	30.0	10.8	1000	120.0	170.0	V	269	14
61.948	14.56	30.0	15.4	1000	120.0	157.0	V	67	12
85.991	13.68	30.0	16.3	1000	120.0	126.0	V	247	9
726.425	26.11	36.0	9.9	1000	120.0	108.0	H	202	21
913.613	28.21	36.0	7.8	1000	120.0	142.0	V	157	24

**Plot 3:** 30 MHz to 1 GHz, vertical & horizontal polarization, highest channel

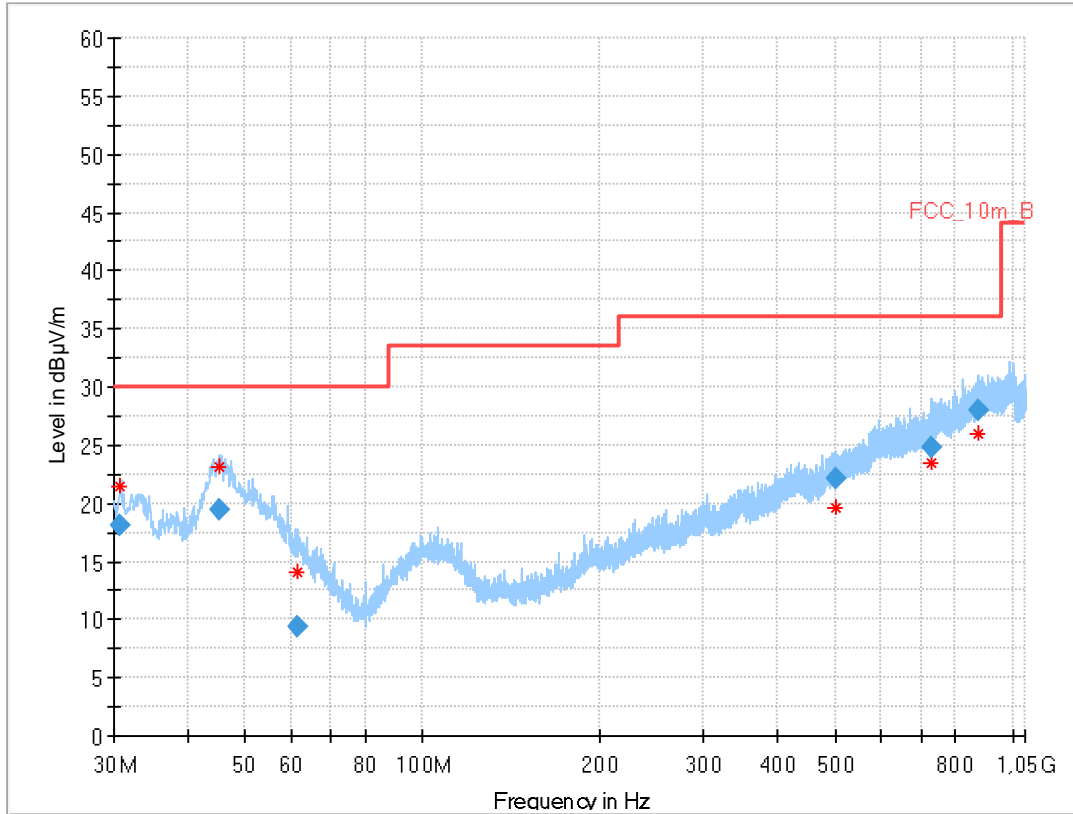

**Final results:**

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.674	18.05	30.0	12.0	1000	120.0	102.0	V	270	12
45.335	19.52	30.0	10.5	1000	120.0	102.0	V	248	14
61.217	9.31	30.0	20.7	1000	120.0	139.0	H	164	13
502.885	22.05	36.0	14.0	1000	120.0	101.0	V	-16	18
731.070	24.81	36.0	11.2	1000	120.0	109.0	H	67	21
875.573	28.05	36.0	8.0	1000	120.0	170.0	V	-22	23



### 13.13 Spurious emissions radiated above 1 GHz

**Description:**

Measurement of the radiated spurious emissions above 1 GHz in transmit mode and receiver / idle mode.

**Measurement:**

Measurement parameter	
Detector	Peak / RMS
Sweep time	Auto
Resolution bandwidth	1 MHz
Video bandwidth	3 x RBW
Span	1 GHz to 26 GHz
Trace mode	Max Hold
Measured modulation	<input checked="" type="checkbox"/> DSSS b – mode <input checked="" type="checkbox"/> OFDM g – mode <input type="checkbox"/> OFDM n HT20 – mode <input checked="" type="checkbox"/> OFDM n HT40 – mode
Test setup	See chapter 7.2 B & 7.3 - A
Measurement uncertainty	See chapter 9

**Limits:**

FCC	ISED	
In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).		
Frequency / MHz	Field Strength / (dBµV / m)	Measurement distance / m
Above 960	54.0 (AVG)	3
	74.0 (peak)	

**Results:** DSSS

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
4828	Peak	53.5	4874	Peak	55.4	4924	Peak	55.8
	AVG	47.9		AVG	51.0		AVG	51.7
-/-	Peak	-/-	-/-	Peak	-/-	-/-	Peak	-/-
	AVG	-/-		AVG	-/-		AVG	-/-

**Results:** OFDM (20 MHz nominal channel bandwidth)


TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		

**Results:** OFDM (40 MHz nominal channel bandwidth)

TX spurious emissions radiated / dBµV/m @ 3 m								
lowest channel			middle channel			highest channel		
f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m	f / MHz	Detector	Level / dBµV/m
All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.			All detected emissions are more than 20 dB below the limit.		


**Plots:** DSSS

**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

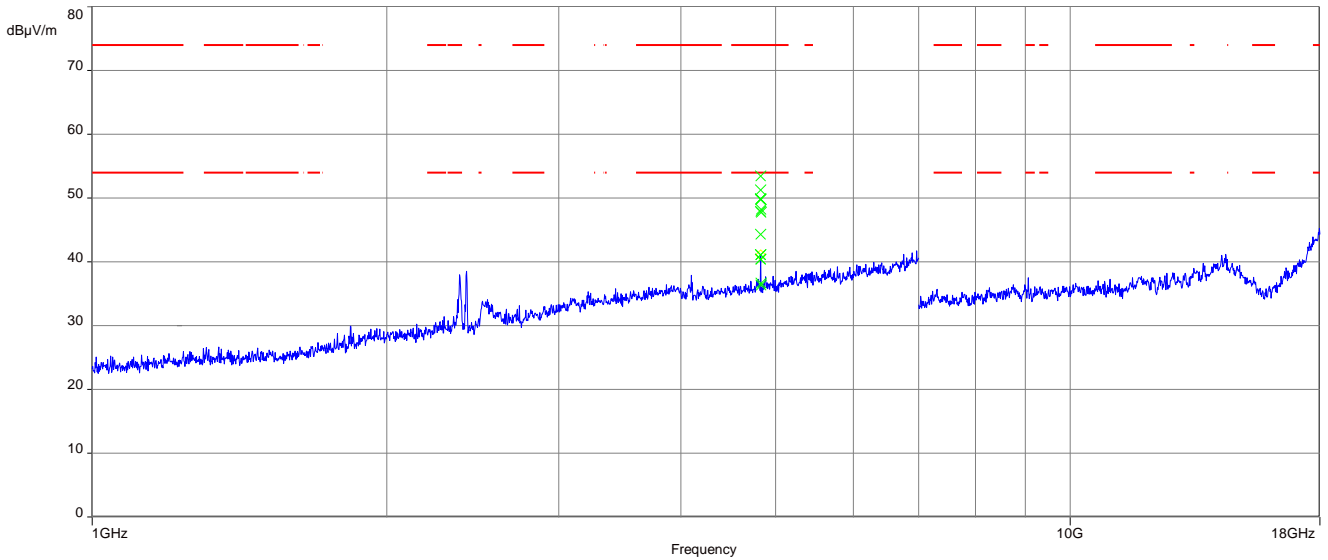


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

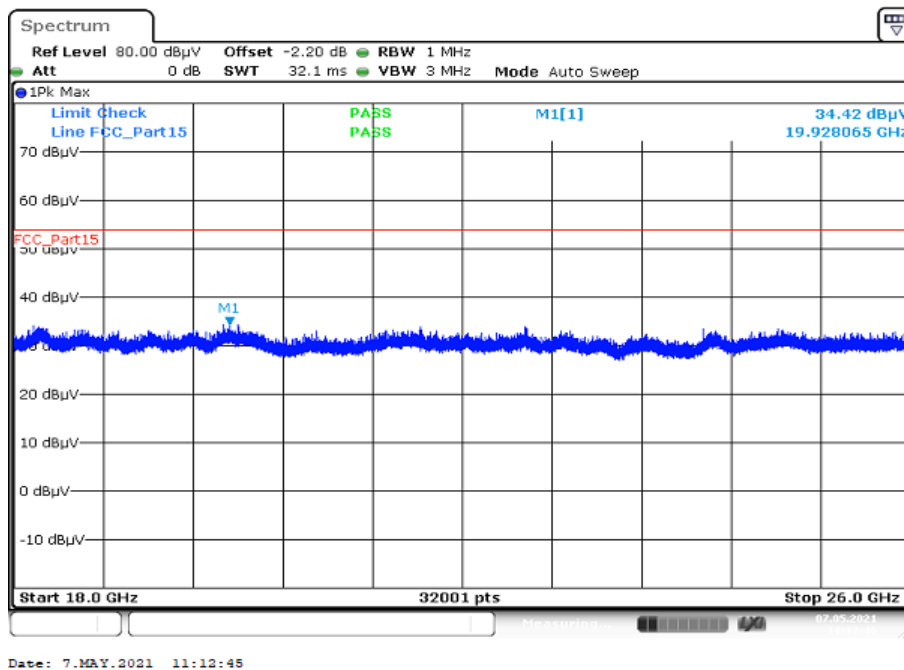


**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

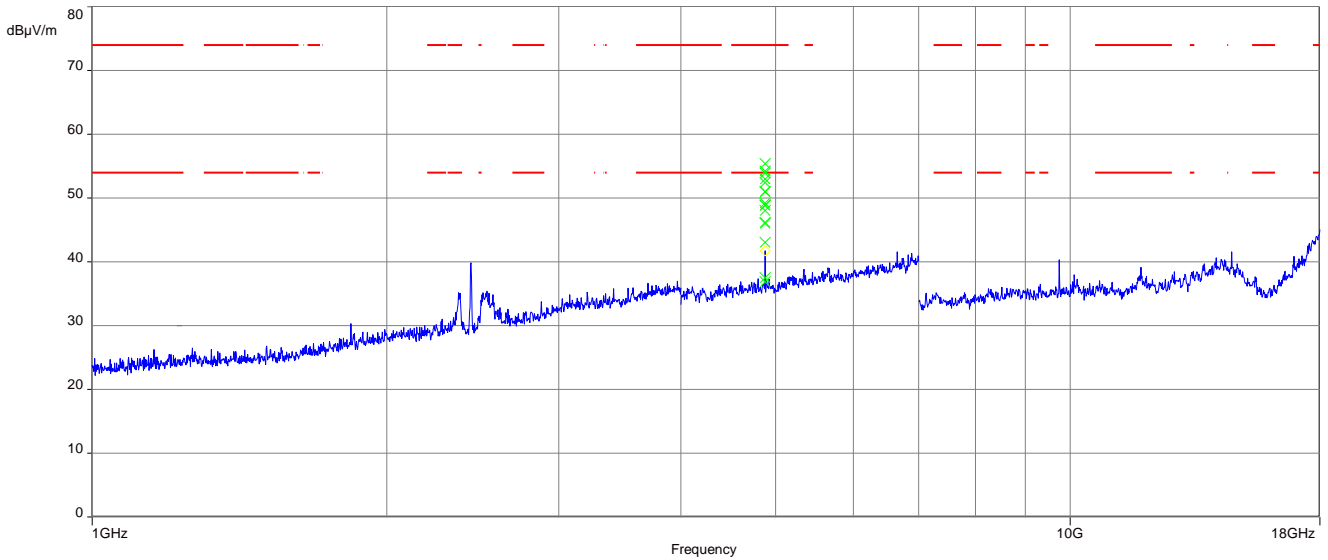


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

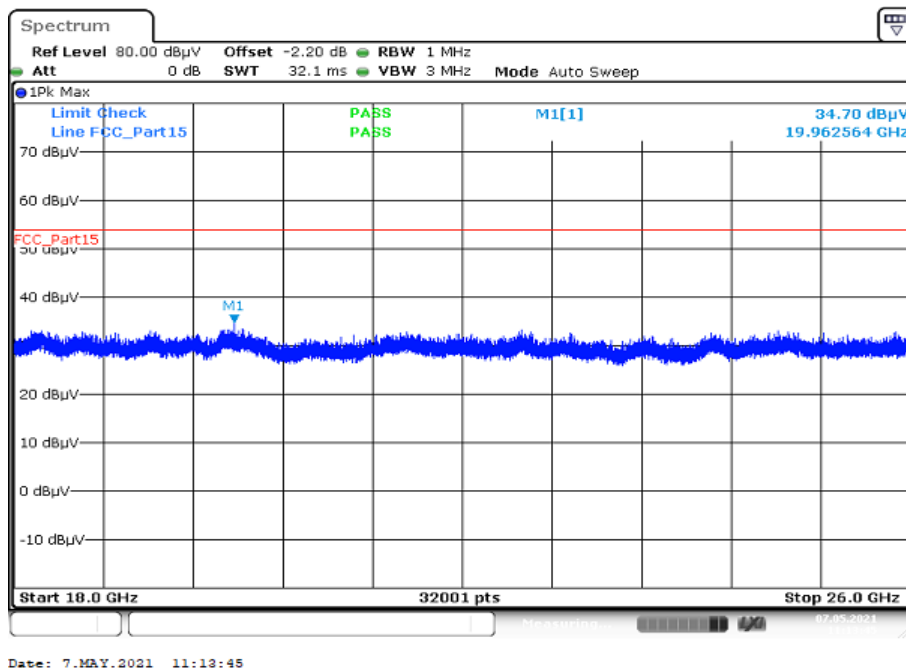


**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

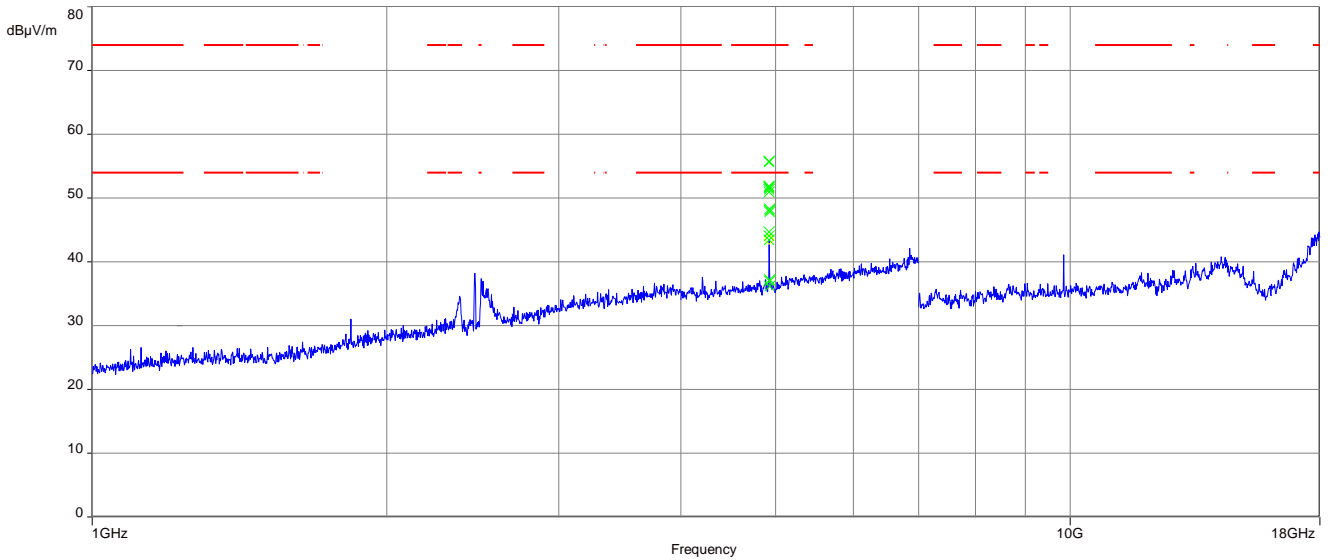


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

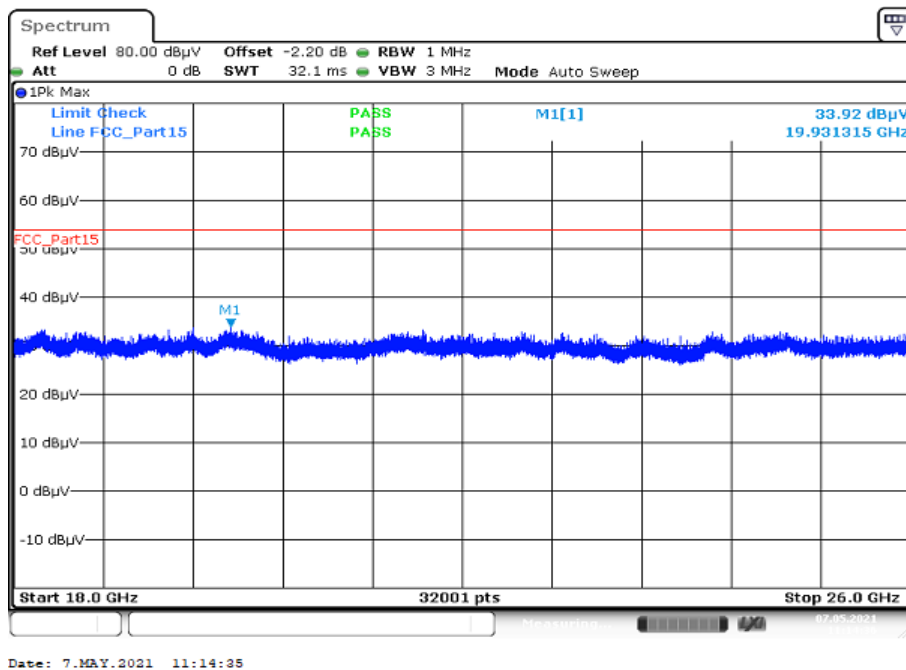


**Plots:** OFDM (20 MHz bandwidth)

**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

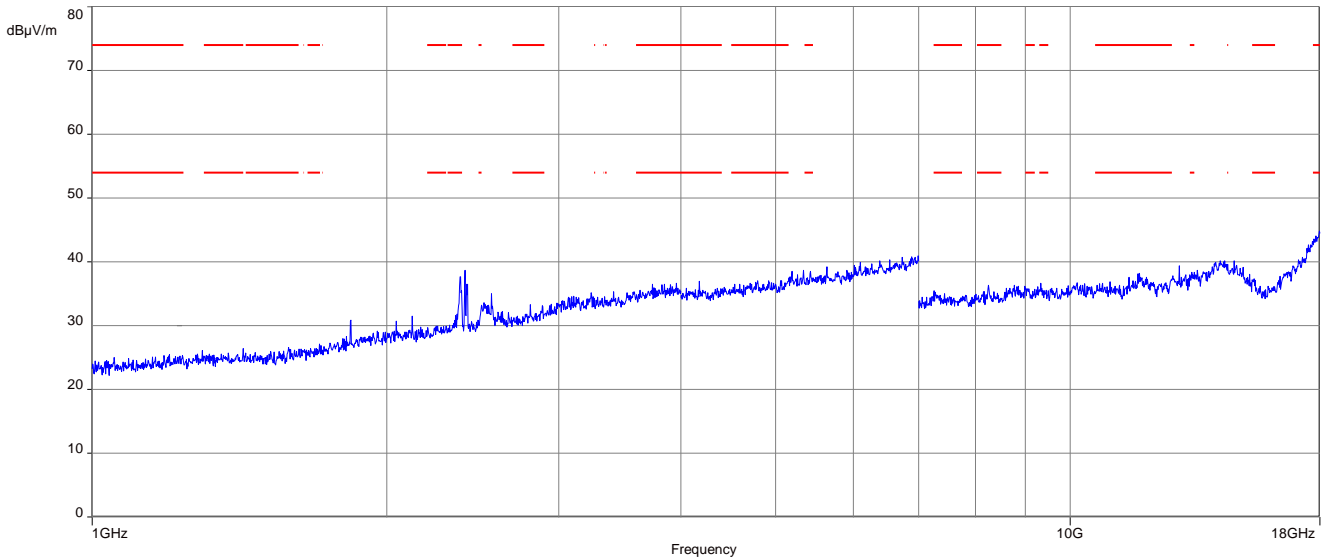


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

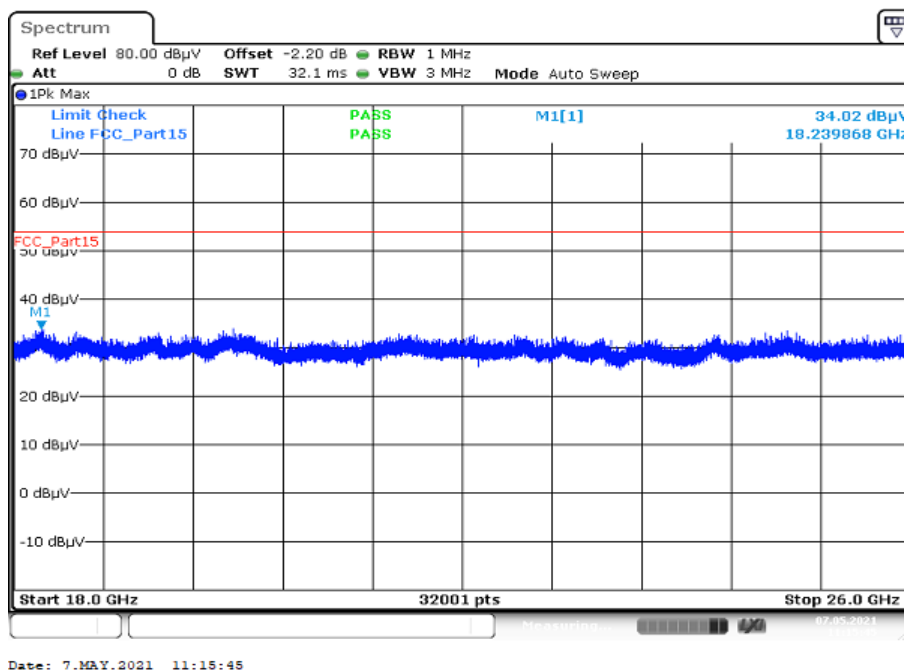


**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

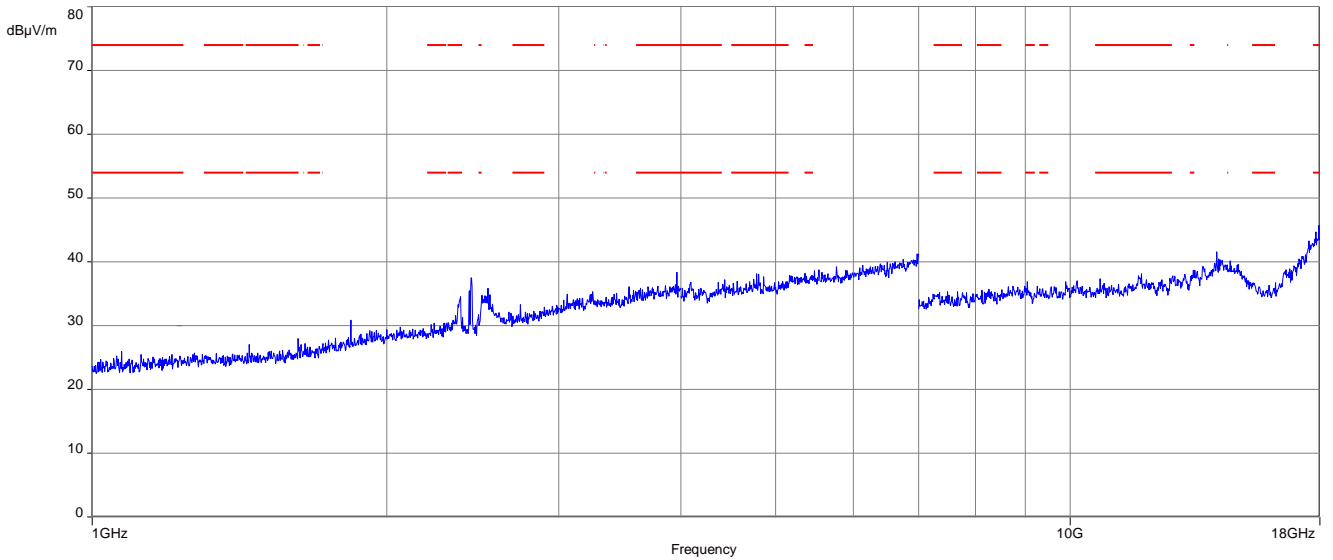


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

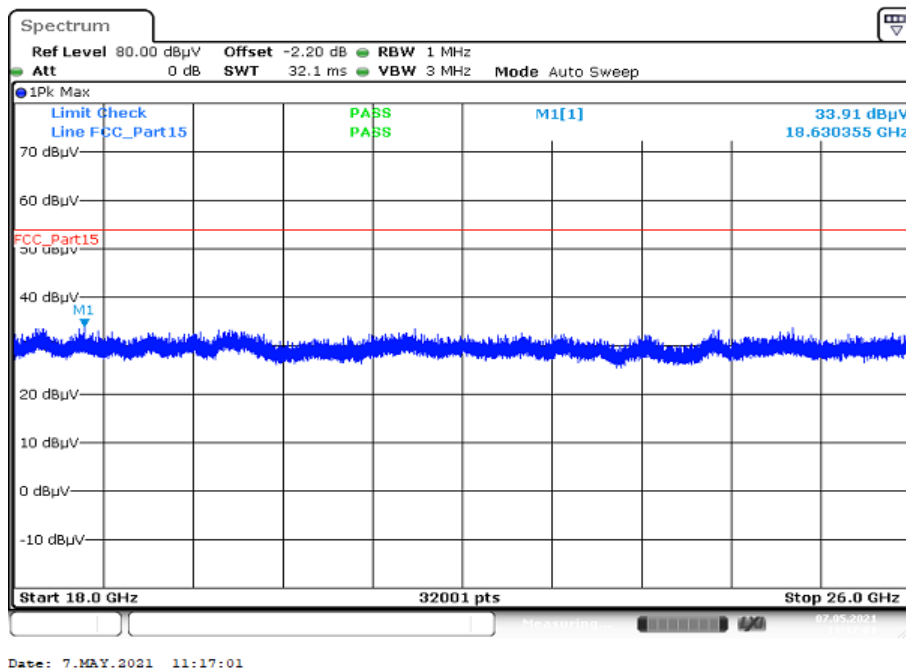


**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

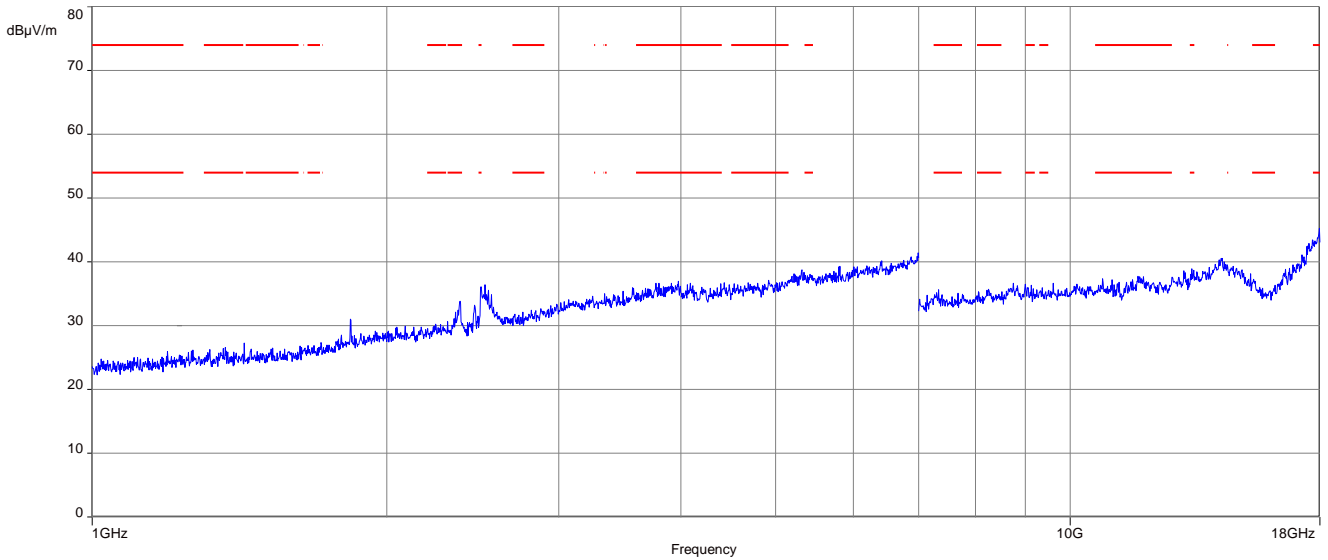

The carrier signal is notched with a 2.4 GHz band rejection filter.


**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

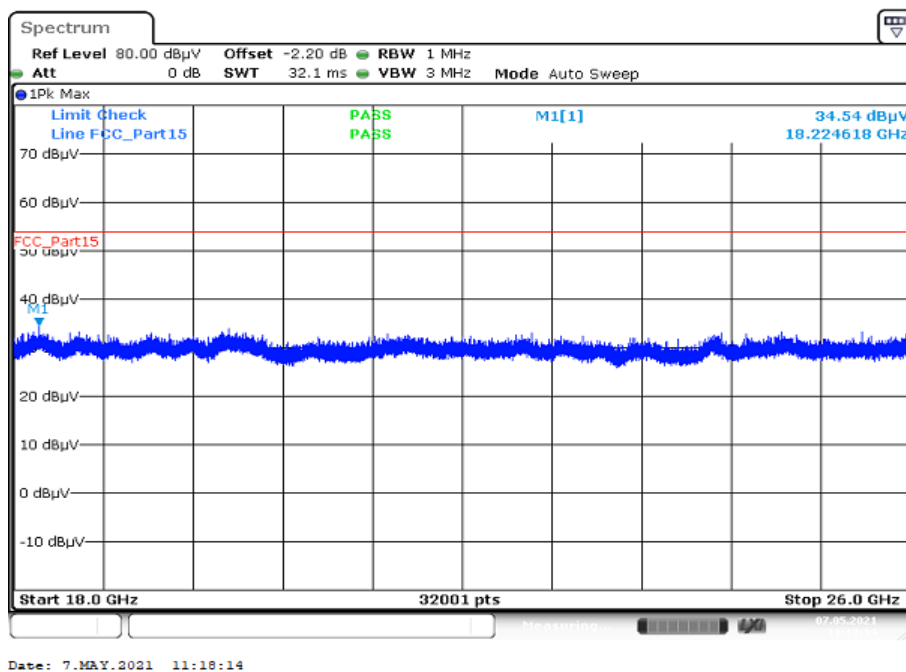




**Plots:** OFDM (40 MHz bandwidth)

**Plot 1:** Lowest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

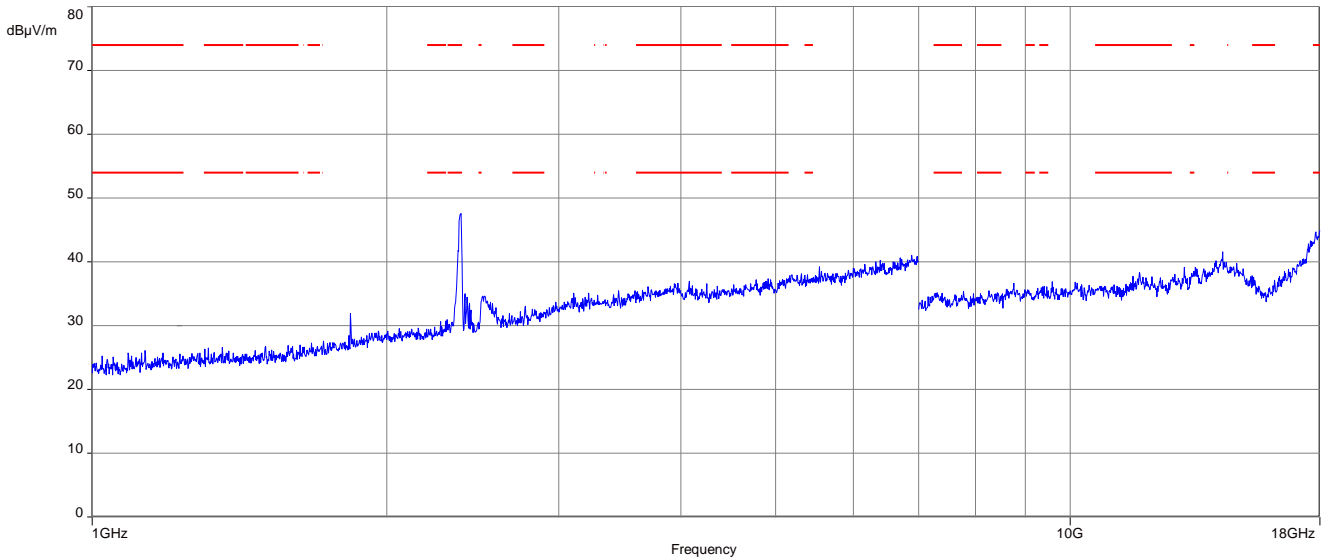


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 2:** Lowest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

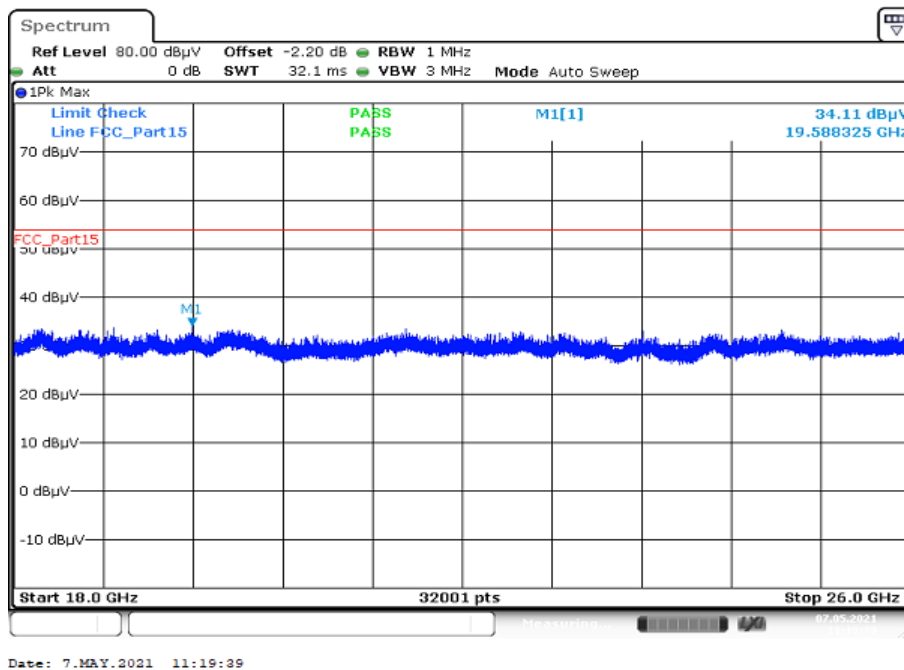


**Plot 3:** Middle channel, 1 GHz to 18 GHz, vertical & horizontal polarization

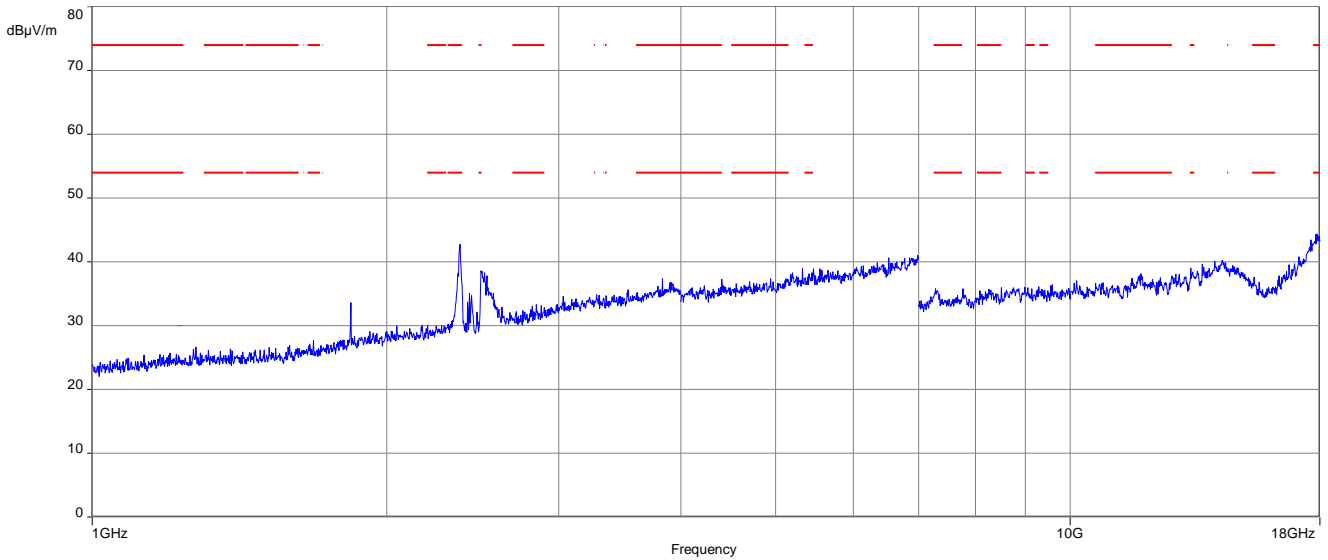


The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 4:** Middle channel, 18 GHz to 26 GHz, vertical & horizontal polarization

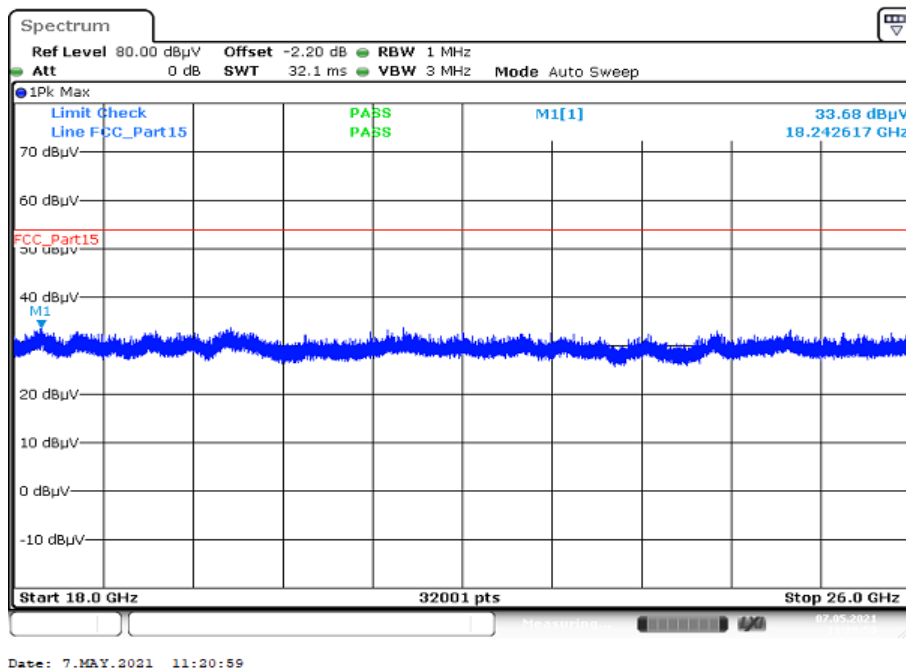


**Plot 5:** Highest channel, 1 GHz to 18 GHz, vertical & horizontal polarization

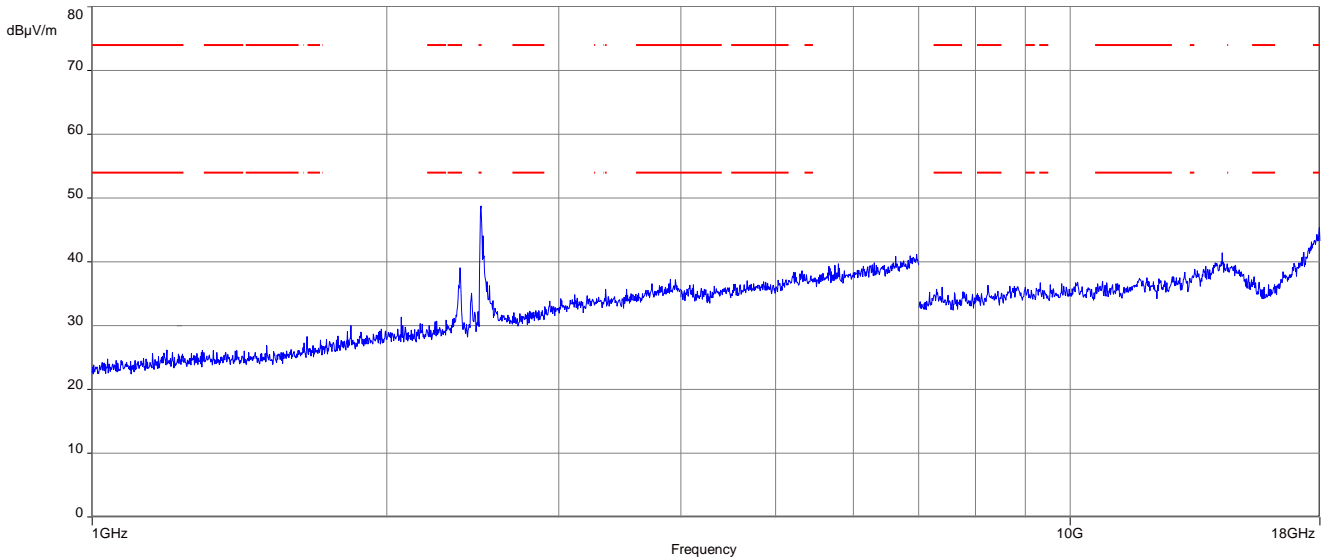

The carrier signal is notched with a 2.4 GHz band rejection filter.

**Plot 6:** Highest channel, 18 GHz to 26 GHz, vertical & horizontal polarization

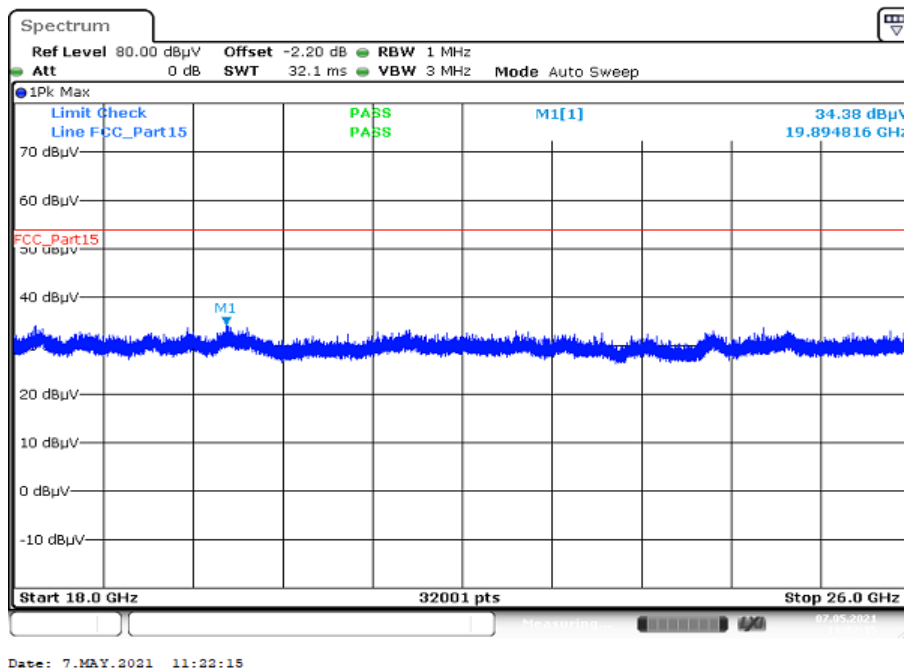

### 13.14 Spurious emissions conducted below 30 MHz (AC conducted)

**Description:**

Measurement of the conducted spurious emissions in transmit mode below 30 MHz. Both power lines, phase and neutral line, are measured. Found peaks are re-measured with average and quasi peak detection to show compliance to the limits.

**Measurement:**

Measurement parameter	
Detector	Peak - Quasi Peak / Average
Sweep time	Auto
Resolution bandwidth	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Video bandwidth	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span	9 kHz to 30 MHz
Trace mode	Max. hold
Test setup	See chapter 7.5 A
Measurement uncertainty	See chapter 9


**Limits:**

FCC		ISED	
Frequency / MHz	Quasi-Peak / (dBµV / m)	Average / (dBµV / m)	
0.15 – 0.5	66 to 56*	56 to 46*	
0.5 – 5	56	46	
5 – 30.0	60	50	

\*Decreases with the logarithm of the frequency

**Plots:**


**Plot 1:** 150 kHz to 30 MHz, phase line

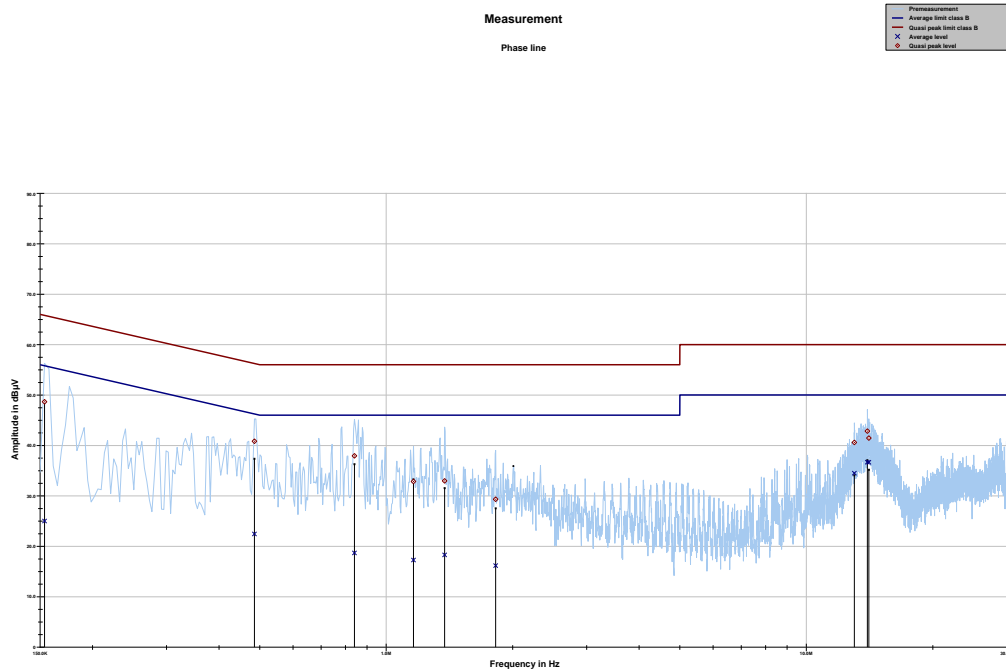

Project ID: 1-0450/20-01-07

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.153731	48.65	17.14	65.796	25.01	30.88	55.893
0.485812	40.82	15.41	56.239	22.43	23.97	46.405
0.840281	37.93	18.07	56.000	18.67	27.33	46.000
1.161169	32.84	23.16	56.000	17.26	28.74	46.000
1.377581	32.96	23.04	56.000	18.29	27.71	46.000
1.821600	29.33	26.67	56.000	16.17	29.83	46.000
13.015350	40.59	19.41	60.000	34.50	15.50	50.000
13.978013	42.83	17.17	60.000	36.68	13.32	50.000
14.086219	41.45	18.55	60.000	36.66	13.34	50.000

**Plot 2: 150 kHz to 30 MHz, neutral line**

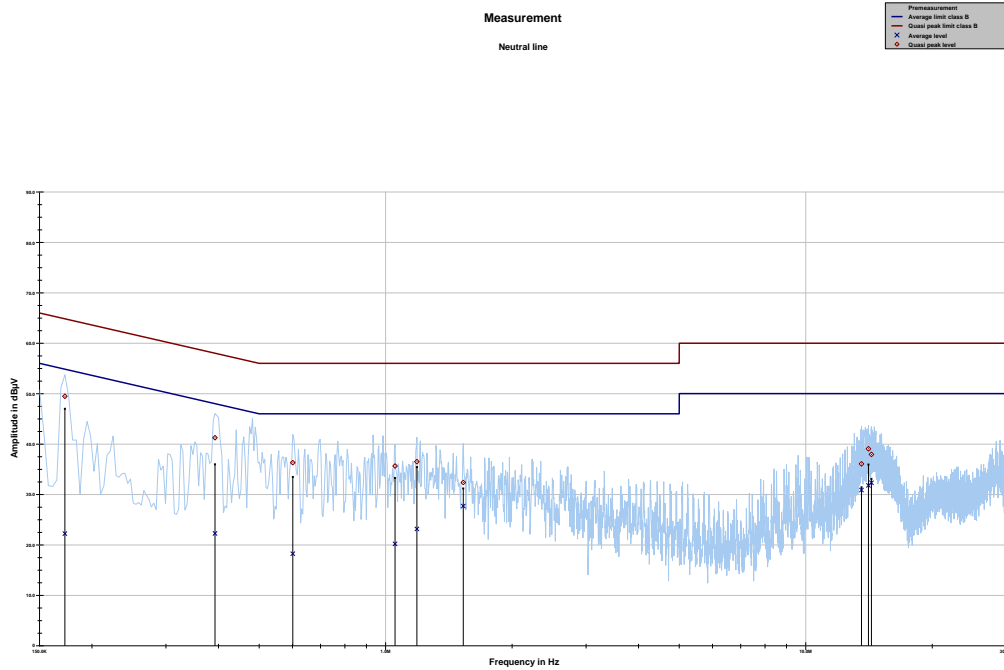

Project ID: 1-0450/20-01-07

Frequency	Quasi peak level	Margin quasi peak	Limit QP	Average level	Margin Average	Limit AV
MHz	dBµV	dB	dBµV	dBµV	dB	dBµV
0.172387	49.47	15.37	64.845	22.24	33.12	55.360
0.392531	41.25	16.76	58.010	22.27	26.80	49.071
0.601481	36.30	19.70	56.000	18.26	27.74	46.000
1.052963	35.65	20.35	56.000	20.21	25.79	46.000
1.187288	36.51	19.49	56.000	23.17	22.83	46.000
1.530563	32.38	23.62	56.000	27.71	18.29	46.000
13.575038	36.06	23.94	60.000	30.88	19.12	50.000
14.101144	39.06	20.94	60.000	31.81	18.19	50.000
14.332481	37.95	22.05	60.000	32.32	17.68	50.000

## 14 Observations

No observations except those reported with the single test cases have been made.

## 15 Glossary

<b>EUT</b>	Equipment under test
<b>DUT</b>	Device under test
<b>UUT</b>	Unit under test
<b>FCC</b>	Federal Communications Commission
<b>FCC ID</b>	Company Identifier at FCC
<b>IC</b>	Industry Canada
<b>PMN</b>	Product marketing name
<b>HMN</b>	Host marketing name
<b>HVIN</b>	Hardware version identification number
<b>FVIN</b>	Firmware version identification number
<b>EMC</b>	Electromagnetic Compatibility
<b>HW</b>	Hardware
<b>SW</b>	Software
<b>Inv. No.</b>	Inventory number
<b>S/N or SN</b>	Serial number
<b>C</b>	Compliant
<b>NC</b>	Not compliant
<b>NA</b>	Not applicable
<b>NP</b>	Not performed
<b>PP</b>	Positive peak
<b>QP</b>	Quasi peak
<b>AVG</b>	Average
<b>OC</b>	Operating channel
<b>OCW</b>	Operating channel bandwidth
<b>OBW</b>	Occupied bandwidth
<b>OOB</b>	Out of band
<b>DFS</b>	Dynamic frequency selection
<b>CAC</b>	Channel availability check
<b>OP</b>	Occupancy period
<b>NOP</b>	Non occupancy period
<b>DC</b>	Duty cycle
<b>PER</b>	Packet error rate
<b>CW</b>	Clean wave
<b>MC</b>	Modulated carrier
<b>WLAN</b>	Wireless local area network
<b>RLAN</b>	Radio local area network
<b>DSSS</b>	Dynamic sequence spread spectrum
<b>OFDM</b>	Orthogonal frequency division multiplexing
<b>FHSS</b>	Frequency hopping spread spectrum

## 16 Document history

Version	Applied changes	Date of release
-/-	Initial release	2021-05-19
A	Section 6.1: HVIN revised	2021-05-21

## 17 Accreditation Certificate – D-PL-12076-01-04

first page	last page
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields: <b>Telecommunication (TC) and Electromagnetic Compatibility (EMC) for Canadian Standards</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 07 pages.</p> <p>Registration number of the certificate: <b>D-PL-12076-01-04</b></p> <p>Frankfurt am Main, 09.06.2020</p> <p>by order:  <b>Frank Eggner</b> Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> See notes overleaf.</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <p>Office Berlin Spittelmarkt 10 10117 Berlin</p> <p>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</p> <p>Office Braunschweig Bundesallee 100 38116 Braunschweig</p> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>

**Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request**

<https://www.dakks.de/as/ast/d/D-PL-12076-01-04e.pdf>



18 Accreditation Certificate – D-PL-12076-01-05

first page	last page			
 <p>Deutsche Akkreditierungsstelle GmbH</p> <p>Entrusted according to Section 8 subsection 1 AkkStelleG in connection with Section 1 subsection 1 AkkStelleGBV Signatory to the Multilateral Agreements of EA, ILAC and IAF for Mutual Recognition</p> <p><b>Accreditation</b> </p> <p>The Deutsche Akkreditierungsstelle GmbH attests that the testing laboratory <b>CTC advanced GmbH</b> Untertürkheimer Straße 6-10, 66117 Saarbrücken is competent under the terms of DIN EN ISO/IEC 17025:2018 to carry out tests in the following fields:</p> <p><b>Telecommunication (FCC Requirements)</b></p> <p>The accreditation certificate shall only apply in connection with the notice of accreditation of 09.06.2020 with the accreditation number D-PL-12076-01. It comprises the cover sheet, the reverse side of the cover sheet and the following annex with a total of 05 pages.</p> <p>Registration number of the certificate: <b>D-PL-12076-01-05</b></p> <p>Frankfurt am Main, 09.06.2020</p> <p>by  Dipl.-Ing. (FH) Alf Egner Head of Division</p> <p><small>The certificate together with its annex reflects the status at the time of the date of issue. The current status of the scope of accreditation can be found in the database of accredited bodies of Deutsche Akkreditierungsstelle GmbH. <a href="https://www.dakks.de/en/content/accredited-bodies-dakks">https://www.dakks.de/en/content/accredited-bodies-dakks</a> See also: 09/2014</small></p>	<p>Deutsche Akkreditierungsstelle GmbH</p> <table border="0"> <tr> <td>Office Berlin Spittelmarkt 10 10117 Berlin</td> <td>Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main</td> <td>Office Braunschweig Bundesallee 100 38116 Braunschweig</td> </tr> </table> <p>The publication of extracts of the accreditation certificate is subject to the prior written approval by Deutsche Akkreditierungsstelle GmbH (DAkKS). Exempted is the unchanged form of separate disseminations of the cover sheet by the conformity assessment body mentioned overleaf.</p> <p>No impression shall be made that the accreditation also extends to fields beyond the scope of accreditation attested by DAkKS.</p> <p>The accreditation was granted pursuant to the Act on the Accreditation Body (AkkStelleG) of 31 July 2009 (Federal Law Gazette I p. 2625) and the Regulation (EC) No 765/2008 of the European Parliament and of the Council of 9 July 2008 setting out the requirements for accreditation and market surveillance relating to the marketing of products (Official Journal of the European Union L 218 of 9 July 2008, p. 30). DAkKS is a signatory to the Multilateral Agreements for Mutual Recognition of the European co-operation for Accreditation (EA), International Accreditation Forum (IAF) and International Laboratory Accreditation Cooperation (ILAC). The signatories to these agreements recognise each other's accreditations.</p> <p>The up-to-date state of membership can be retrieved from the following websites: EA: <a href="http://www.european-accreditation.org">www.european-accreditation.org</a> ILAC: <a href="http://www.ilac.org">www.ilac.org</a> IAF: <a href="http://www.iaf.nu">www.iaf.nu</a></p>	Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig
Office Berlin Spittelmarkt 10 10117 Berlin	Office Frankfurt am Main Europa-Allee 52 60327 Frankfurt am Main	Office Braunschweig Bundesallee 100 38116 Braunschweig		

Note: The current certificate annex is published on the website (link see below) of the Accreditation Body DAkKS or may be received by CTC advanced GmbH on request

<https://www.dakks.de/as/ast/d/D-PL-12076-01-05e.pdf>

##### END OF TEST REPORT #####