

FCC Test Report

| | |
|--------------|---|
| Product Name | Infotainment System with Headunit (with BT, WLAN, Klear technology) |
| Model No | NTG5 HU |
| FCC ID. | T8G9099 |

| | |
|-----------|--|
| Applicant | Harman Becker Automotive Systems GmbH |
| Address | Becker-Göring-Str. 16, 76307 Karlsbad, Germany |

| | |
|-----------------|--------------------|
| Date of Receipt | Mar, 11, 2013 |
| Issue Date | Mar, 15, 2013 |
| Report No. | 133230R-RFUSP28V01 |
| Report Version | V1.0 |



The test results relate only to the samples tested.
 The test report shall not be reproduced except in full without the written approval of Quietek Corporation.
 This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Test Report Certification

Issue Date: Mar, 15, 2013

Report No.: 133230R-RFUSP28V01



| | |
|---------------------|---|
| Product Name | Infotainment System with Headunit (with BT, WLAN, Klear technology) |
| Applicant | Harman Becker Automotive Systems GmbH |
| Address | Becker-Göring-Str. 16, 76307 Karlsbad, Germany |
| Manufacturer | Harman Becker Automotive Systems GmbH |
| Model No. | NTG5 HU |
| FCC ID. | T8G9099 |
| EUT Rated Voltage | DC 12V (Power by vehicle Battery) |
| EUT Test Voltage | DC 12V (Power by vehicle Battery) |
| Trade Name | Daimler |
| Applicable Standard | FCC CFR Title 47 Part 15 Subpart C: 2012 ANSI C63.4: 2003, ANSI C63.10: 2009 |
| Test Result | Complied |

The test results relate only to the samples tested.

The test report shall not be reproduced except in full without the written approval of Quietek Corporation.

This report must not be used to claim product endorsement by NVLAP any agency of the U.S. Government

Documented By : Leven Huang
(Senior Adm. Specialist / Leven Huang)

Tested By : Jack Hsu
(Engineer / Jack Hsu)

Approved By : Vincent Lin
(Manager / Vincent Lin)

TABLE OF CONTENTS

| Description | Page |
|--|-----------|
| 1. GENERAL INFORMATION | 5 |
| 1.1. EUT Description..... | 5 |
| 1.2. Operational Description | 7 |
| 1.3. Tested System Details..... | 8 |
| 1.4. Configuration of Tested System | 8 |
| 1.5. EUT Exercise Software | 8 |
| 1.6. Test Facility | 10 |
| 2. Conducted Emission..... | 11 |
| 2.1. Test Equipment..... | 11 |
| 2.2. Test Setup | 11 |
| 2.3. Limits | 12 |
| 2.4. Test Procedure | 12 |
| 2.5. Uncertainty | 12 |
| 2.6. Test Result of Conducted Emission..... | 13 |
| 3. Peak Power Output | 14 |
| 3.1. Test Equipment..... | 14 |
| 3.2. Test Setup | 14 |
| 3.3. Limits | 14 |
| 3.4. Test Procedure | 14 |
| 3.5. Uncertainty | 14 |
| 3.6. Test Result of Peak Power Output..... | 15 |
| 4. Radiated Emission..... | 17 |
| 4.1. Test Equipment..... | 17 |
| 4.2. Test Setup | 18 |
| 4.3. Limits | 19 |
| 4.4. Test Procedure | 20 |
| 4.5. Uncertainty | 20 |
| 4.6. Test Result of Radiated Emission..... | 21 |
| 5. RF antenna conducted test..... | 29 |
| 5.1. Test Equipment..... | 29 |
| 5.2. Test Setup | 29 |
| 5.3. Limits | 29 |
| 5.4. Test Procedure | 29 |
| 5.5. Uncertainty | 30 |
| 5.6. Test Result of RF antenna conducted test..... | 31 |
| 6. Band Edge | 43 |
| 6.1. Test Equipment..... | 43 |
| 6.2. Test Setup | 44 |
| 6.3. Limits | 44 |
| 6.4. Test Procedure | 45 |
| 6.5. Uncertainty | 45 |
| 6.6. Test Result of Band Edge | 46 |

| | | |
|-----------|---|-----------|
| 7. | Occupied Bandwidth..... | 54 |
| 7.1. | Test Equipment..... | 54 |
| 7.2. | Test Setup | 54 |
| 7.3. | Limits | 54 |
| 7.4. | Test Procedure | 54 |
| 7.5. | Uncertainty | 54 |
| 7.6. | Test Result of Occupied Bandwidth | 55 |
| 8. | Power Density | 61 |
| 8.1. | Test Equipment..... | 61 |
| 8.2. | Test Setup | 61 |
| 8.3. | Limits | 61 |
| 8.4. | Test Procedure | 61 |
| 8.5. | Uncertainty | 61 |
| 8.6. | Test Result of Power Density | 62 |
| 9. | EMI Reduction Method During Compliance Testing | 68 |

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

1. GENERAL INFORMATION

1.1. EUT Description

| | |
|---------------------|---|
| Product Name | Infotainment System with Headunit (with BT, WLAN, Klear technology) |
| Trade Name | Daimler |
| Model No. | NTG5 HU |
| FCC ID. | T8G9099 |
| Frequency Range | 2412-2462MHz for 802.11b/g |
| Number of Channels | 802.11b/g: 11 |
| Data Speed | 802.11b: 1-11Mbps, 802.11g: 6-54Mbps |
| Type of Modulation | 802.11b:DSSS (DBPSK, DQPSK, CCK) 802.11g:OFDM (BPSK, QPSK, 16QAM, 64QAM) |
| Antenna Type | Printed patch Antenna |
| Antenna Gain | Refer to the table "Antenna List" |
| Channel Control | Auto |
| FCC Equipment class | DTS |

Antenna List

| No. | Manufacturer | Part No. | Antenna Type | Peak Gain |
|-----|--------------|----------|-----------------------|---------------------|
| 1 | WISI | AG200 | Printed patch antenna | 2.4 dBi for 2.4 GHz |

Note: The antenna of EUT is conform to FCC 15.203.

802.11b/g Center Frequency of Each Channel:

| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
|-------------|-----------|-------------|-----------|-------------|-----------|-------------|-----------|
| Channel 01: | 2412 MHz | Channel 02: | 2417 MHz | Channel 03: | 2422 MHz | Channel 04: | 2427 MHz |
| Channel 05: | 2432 MHz | Channel 06: | 2437 MHz | Channel 07: | 2442 MHz | Channel 08: | 2447 MHz |
| Channel 09: | 2452 MHz | Channel 10: | 2457 MHz | Channel 11: | 2462 MHz | | |

Note:

1. The EUT is an Infotainment System with Headunit (with BT, WLAN, Kleer technology) with a built-in WLAN、Bluetooth and Kleer transceiver, this report for WLAN.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. Lowest and highest data rates are tested in each mode. Only worst case is shown in the report. (802.11b is 1Mbps、802.11g is 6Mbps)
4. These tests are conducted on a sample for the purpose of demonstrating compliance of 802.11b/g transmitter with Part 15 Subpart C Paragraph 15.247 of spread spectrum devices.
5. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.

| | |
|------------|----------------------------------|
| Test Mode: | Mode 1: Transmit (802.11b 1Mbps) |
| | Mode 2: Transmit (802.11g 6Mbps) |

1.2. Operational Description

The EUT is an Infotainment System with Headunit (with BT, WLAN, Klear technology), This device provided four kinds of transmitting speed 1, 2, 5.5 and 11Mbps and the device of RF carrier is DBPSK, DQPSK and CCK (IEEE 802.11b). The device provided of eight kinds of transmitting speed 6, 9, 12, 18, 24, 36, 48 and 54Mbps the device of RF carrier is BPSK, QPSK, 16QAM and 64QAM (IEEE 802.11g).

This Infotainment System with Headunit (with BT, WLAN, Klear technology), compliant with IEEE 802.11b and IEEE 802.11g, is a high-efficiency Wireless LAN adapter. It allows your computer to connect to a wireless network and to share resources, such as files or printers without being bound to the network wires. Operation in 2.4GHz Direct Sequence Spread Spectrum (DSSS) and Orthogonal Frequency Division Multiplexing (OFDM) radio transmission, the Infotainment System with Headunit (with BT, WLAN, Klear technology) Wired Equivalent Protection (WEP) algorithm is used. In addition, its standard compliance ensures that it can communicate with any IEEE 802.11b and IEEE 802.11g network.

The EUT “Infotainment System with Headunit (with BT, WLAN, Klear technology)” is based on new low power Intel e-Module technology for a high performance infotainment system, This system will be installed in the new S-Class (W222) of Mercedes Benz and one year later in the new C-Class (W205). It contains features like navigation, different Tuner technologies, CD/DVD-Drive, HDD-Drive, RSC (Rear-Seat-Communication), Bluetooth, WLAN and Klear wireless technology. It was designed for use within different car series for different target markets.


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

| | Product | Manufacturer | Model No. | Serial No. | Power Cord |
|---|----------------|---------------|-----------|------------|------------|
| 1 | Test Fixture | Harman Becker | N/A | N/A | N/A |
| 2 | Notebook PC | Lenovo | T400 | L3AZW4N | N/A |
| 3 | DC 12V Battery | TRANE | 12B50PE | N/A | N/A |

| Signal Cable Type | Signal cable Description |
|-------------------|--------------------------|
| A | Signal Cable |
| B | USB Cable |
| C | Power Cable |
| D | Power Cable |

1.4. Configuration of Tested System

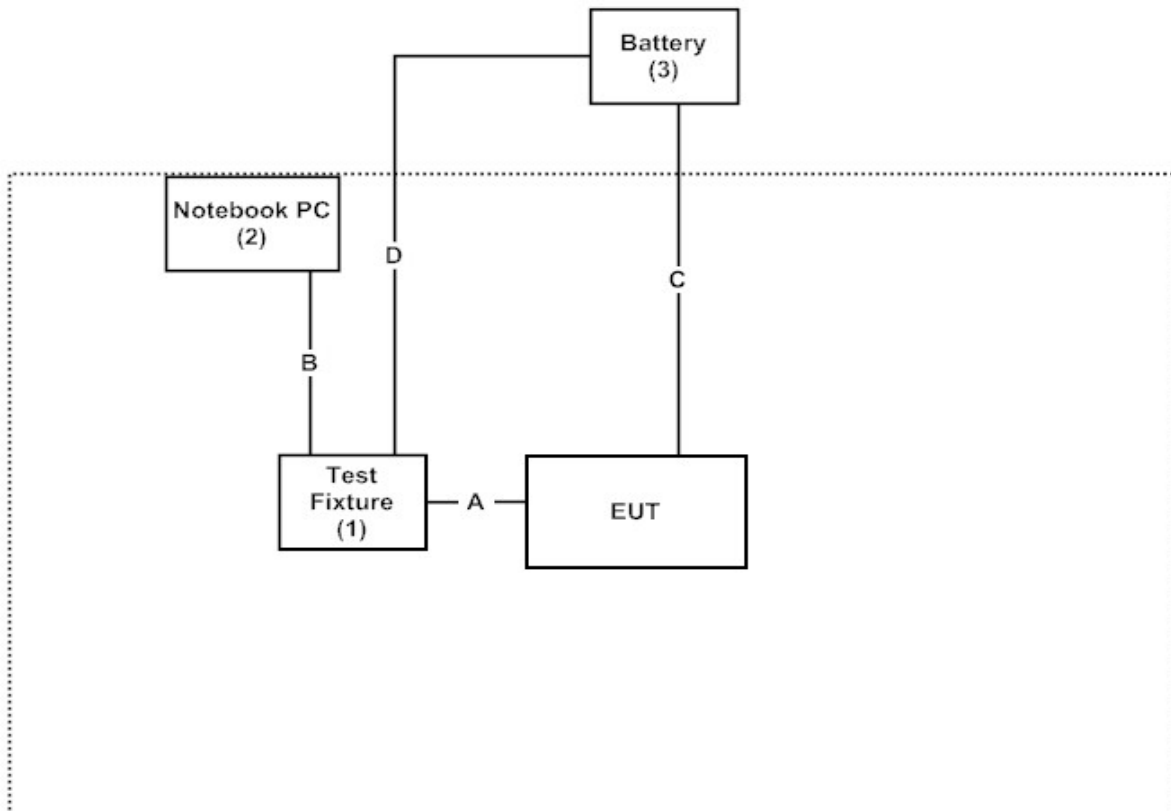

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in section 1.4
- (2) Execute Software “PWlan v1.0.1.0” on the notebook PC.
- (3) Configure the test mode, the test channel, and the data rate.
- (4) Start the continuous transmission.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

| Items | Required (IEC 68-1) | Actual |
|----------------------------|---------------------|----------|
| Temperature (°C) | 15-35 | 20-35 |
| Humidity (%RH) | 25-75 | 50-65 |
| Barometric pressure (mbar) | 860-1060 | 950-1000 |

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site: <http://www.quietek.com/>

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195

Accreditation on NVLAP
 NVLAP Lab Code: 200533-0

Site Name: Quietek Corporation
 Site Address: No.5-22, Ruishukeng,
 Linkou Dist. New Taipei City 24451,
 Taiwan, R.O.C.
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

The following test equipment are used during the conducted emission test:

| Item | Instrument | Manufacturer | Type No./Serial No | Last Cal. | Remark |
|------|--------------------|--------------|--------------------|-----------|-------------|
| 1 | Test Receiver | R & S | ESCS 30/825442/17 | May, 2012 | |
| 2 | L.I.S.N. | R & S | ESH3-Z5/825016/6 | May, 2012 | EUT |
| 3 | L.I.S.N. | Kyoritsu | KNW-407/8-1420-3 | May, 2012 | Peripherals |
| 4 | Pulse Limiter | R & S | ESH3-Z2 | May, 2012 | |
| 5 | No.1 Shielded Room | | | N/A | |

Note: All instruments are calibrated every one year.

2.2. Test Setup

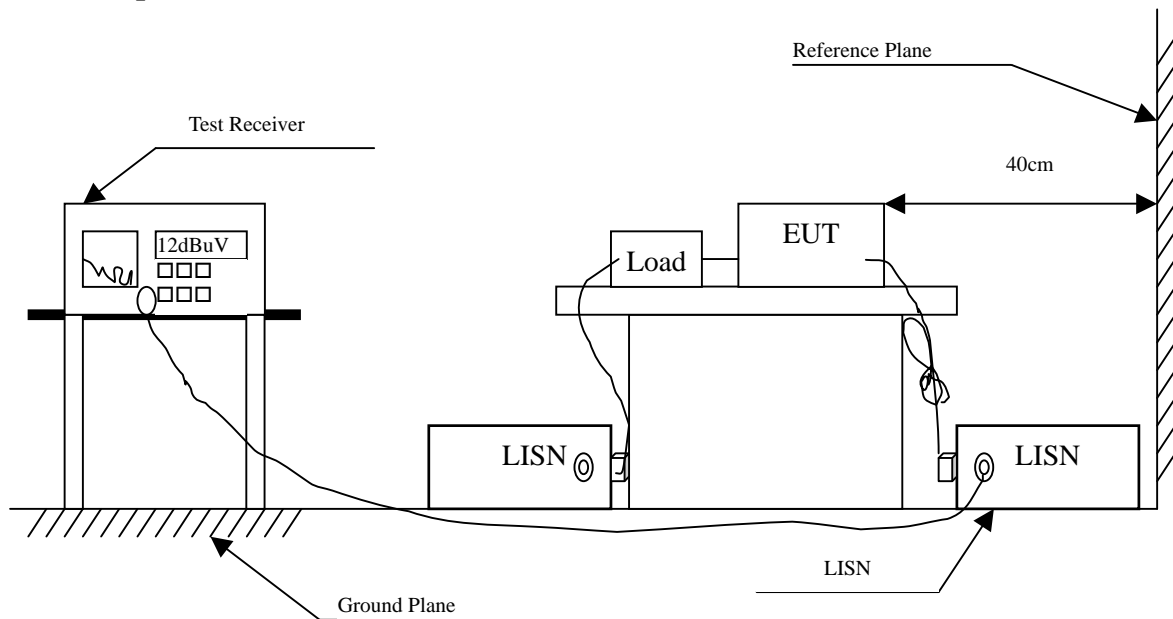

2.3. Limits

| FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit | | |
|--|--------|-------|
| Frequency MHz | Limits | |
| | QP | AVG |
| 0.15 - 0.50 | 66-56 | 56-46 |
| 0.50-5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Owing to the EUT use battery supply voltage, this test item is not performed.

3. Peak Power Output


3.1. Test Equipment

| | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|---|--------------|--------------|----------------------|-----------|
| X | Power Meter | Anritsu | ML2495A/6K00003357 | May, 2012 |
| X | Power Sensor | Anritsu | MA2411B/0738448 | Jun, 2012 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

3.2. Test Setup

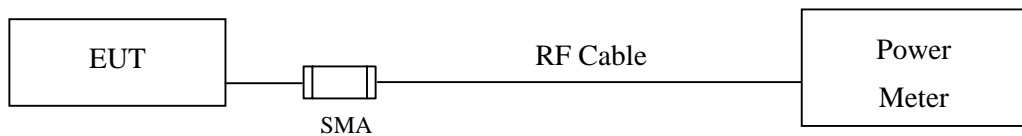

3.3. Limits

The maximum peak power shall be less 1 Watt.

3.4. Test Procedure

The EUT was tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

3.5. Uncertainty

± 1.27 dB

3.6. Test Result of Peak Power Output

Product : Infotainment System with Headunit (with BT, WLAN, Kler technology)
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

| Channel No | Frequency (MHz) | Average Power For different Data Rate (Mbps) | | | | Peak Power | Required Limit | Result |
|------------|-----------------|---|------|------|-----|------------|----------------|--------|
| | | 1 | 2 | 5.5 | 11 | 1 | | |
| | | Measurement Level (dBm) | | | | | | |
| 01 | 2412 | 6.69 | -- | -- | -- | 9.35 | <30dBm | Pass |
| 06 | 2437 | 6.07 | 5.99 | 5.94 | 5.9 | 8.71 | <30dBm | Pass |
| 11 | 2462 | 5.77 | -- | -- | -- | 8.44 | <30dBm | Pass |

Note: Peak Power Output Value = Reading value on power meter + cable loss

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Peak Power Output Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

| Channel No | Frequency (MHz) | Average Power For different Data Rate (Mbps) | | | | | | | | Peak Power | Required Limit | Result |
|------------|-----------------|---|------|------|------|------|------|------|------|------------|----------------|--------|
| | | 6 | 9 | 12 | 18 | 24 | 36 | 48 | 54 | 6 | | |
| | | Measurement Level (dBm) | | | | | | | | | | |
| 01 | 2412 | 5.8 | -- | -- | -- | -- | -- | -- | -- | 16.55 | <30dBm | Pass |
| 06 | 2437 | 5.76 | 5.71 | 5.64 | 5.61 | 5.56 | 5.52 | 5.47 | 5.44 | 15.94 | <30dBm | Pass |
| 11 | 2462 | 4.92 | -- | -- | -- | -- | -- | -- | -- | 15.18 | <30dBm | Pass |

Note: Peak Power Output Value = Reading value on power meter + cable loss

4. Radiated Emission

4.1. Test Equipment


The following test equipment are used during the radiated emission test:

| Test Site | | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|------------|---|-------------------|-----------------|-----------------------|------------|
| ☒ Site # 3 | X | Bilog Antenna | Schaffner Chase | CBL6112B/2673 | Sep., 2012 |
| | X | Horn Antenna | Schwarzbeck | BBHA9120D/D305 | Sep., 2012 |
| | X | Horn Antenna | Schwarzbeck | BBHA9170/208 | Jul., 2012 |
| | X | Pre-Amplifier | Agilent | 8447D/2944A09549 | Sep., 2012 |
| | X | Spectrum Analyzer | Agilent | E4407B / US39440758 | May, 202 |
| | X | Test Receiver | R & S | ESCS 30/ 825442/018 | Sep., 2012 |
| | X | Coaxial Cable | Quietek | QTK-CABLE/ CAB5 | Feb., 2013 |
| | X | Controller | Quietek | QTK-CONTROLLER/ CTRL3 | N/A |
| | X | Coaxial Switch | Anritsu | MP59B/6200265729 | N/A |


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

4.2. Test Setup

Radiated Emission Below 1GHz

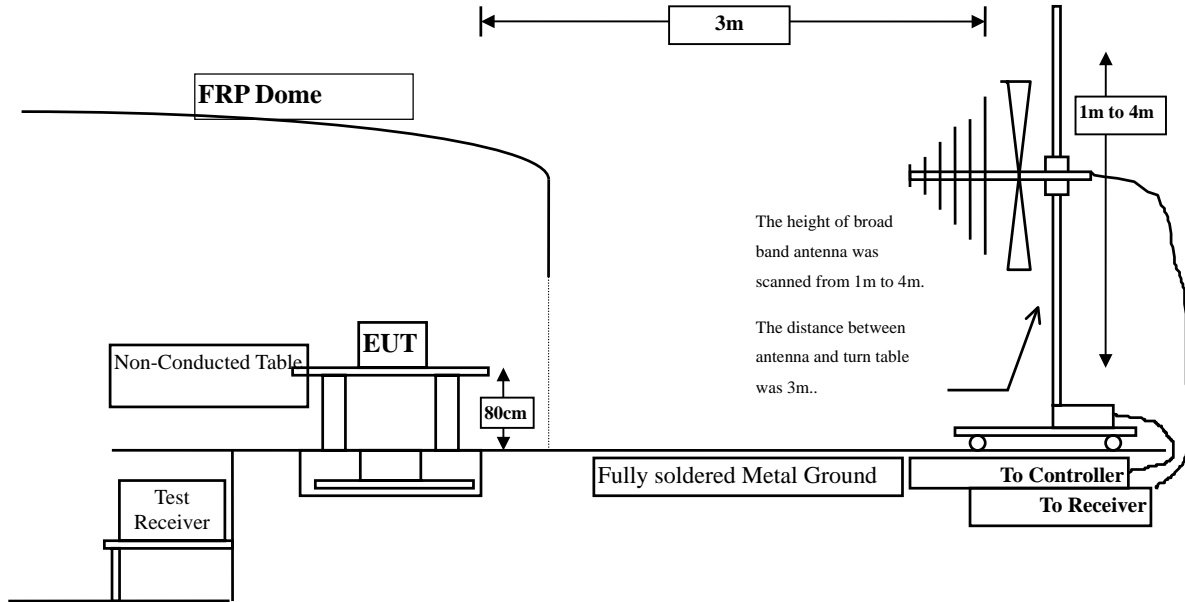

Radiated Emission Above 1GHz

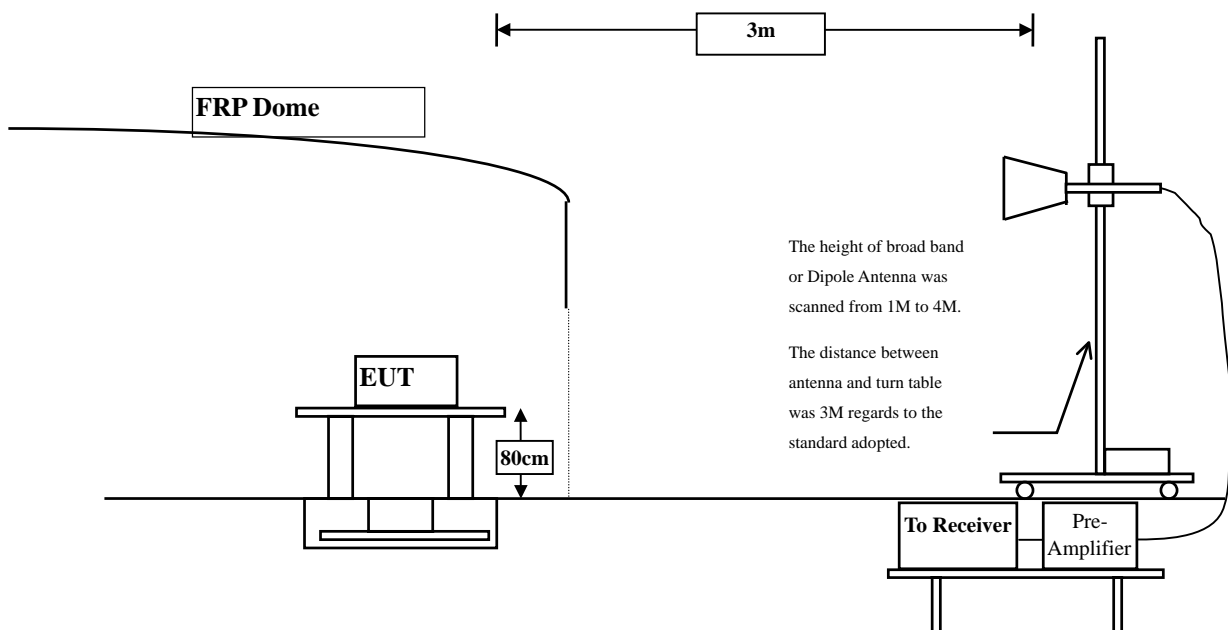

4.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

| FCC Part 15 Subpart C Paragraph 15.209(a) Limits | | |
|---|----------|-----------|
| Frequency MHz | uV/m @3m | dBuV/m@3m |
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

4.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2009 and tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10, 2009 on radiated measurement.

The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

Radiated emission measurements below 1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The frequency range from 30MHz to 10th harmonics is checked.

4.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

4.6. Test Result of Radiated Emission

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|--------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| Peak Detector: | | | | | |
| 4824.000 | 3.261 | 38.790 | 42.051 | -31.949 | 74.000 |
| 7236.000 | 10.650 | 37.540 | 48.190 | -25.810 | 74.000 |
| 9648.000 | 13.337 | 37.580 | 50.916 | -23.084 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |
| Vertical | | | | | |
| Peak Detector: | | | | | |
| 4824.000 | 6.421 | 38.950 | 45.371 | -28.629 | 74.000 |
| 7236.000 | 11.495 | 37.730 | 49.225 | -24.775 | 74.000 |
| 9648.000 | 13.807 | 37.030 | 50.836 | -23.164 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|--------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| Peak Detector: | | | | | |
| 4874.000 | 3.038 | 38.560 | 41.597 | -32.403 | 74.000 |
| 7311.000 | 11.795 | 37.400 | 49.194 | -24.806 | 74.000 |
| 9748.000 | 12.635 | 37.180 | 49.815 | -24.185 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |
| Vertical | | | | | |
| Peak Detector: | | | | | |
| 4874.000 | 5.812 | 39.970 | 45.781 | -28.219 | 74.000 |
| 7311.000 | 12.630 | 36.570 | 49.199 | -24.801 | 74.000 |
| 9748.000 | 13.126 | 37.880 | 51.006 | -22.994 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|--------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| Peak Detector: | | | | | |
| 4924.000 | 2.858 | 38.770 | 41.627 | -32.373 | 74.000 |
| 7386.000 | 12.127 | 36.570 | 48.698 | -25.302 | 74.000 |
| 9848.000 | 12.852 | 37.540 | 50.393 | -23.607 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |
| Vertical | | | | | |
| Peak Detector: | | | | | |
| 4924.000 | 5.521 | 41.530 | 47.050 | -26.950 | 74.000 |
| 7386.000 | 13.254 | 36.380 | 49.634 | -24.366 | 74.000 |
| 9848.000 | 13.367 | 37.560 | 50.927 | -23.073 | 74.000 |

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
|------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|

Horizontal
Peak Detector:

| | | | | | |
|----------|--------|--------|--------|---------|--------|
| 4824.000 | 3.261 | 38.490 | 41.751 | -32.249 | 74.000 |
| 7236.000 | 10.650 | 36.680 | 47.330 | -26.670 | 74.000 |
| 9648.000 | 13.337 | 37.560 | 50.896 | -23.104 | 74.000 |

Average Detector:

--

Vertical
Peak Detector:

| | | | | | |
|----------|--------|--------|--------|---------|--------|
| 4824.000 | 6.421 | 38.600 | 45.021 | -28.979 | 74.000 |
| 7236.000 | 11.495 | 37.560 | 49.055 | -24.945 | 74.000 |
| 9648.000 | 13.807 | 37.030 | 50.836 | -23.164 | 74.000 |

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Kleer technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
|------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|

Horizontal
Peak Detector:

| | | | | | |
|----------|--------|--------|--------|---------|--------|
| 4874.000 | 3.038 | 38.540 | 41.577 | -32.423 | 74.000 |
| 7311.000 | 11.795 | 36.960 | 48.754 | -25.246 | 74.000 |
| 9748.000 | 12.635 | 37.680 | 50.315 | -23.685 | 74.000 |

Average Detector:

--

Peak Detector:

| | | | | | |
|----------|--------|--------|--------|---------|--------|
| 4874.000 | 5.812 | 38.280 | 44.091 | -29.909 | 74.000 |
| 7311.000 | 12.630 | 36.280 | 48.909 | -25.091 | 74.000 |
| 9748.000 | 13.126 | 37.540 | 50.666 | -23.334 | 74.000 |

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|--------------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| Peak Detector: | | | | | |
| 4924.000 | 2.858 | 38.590 | 41.447 | -32.553 | 74.000 |
| 7386.000 | 12.127 | 36.020 | 48.148 | -25.852 | 74.000 |
| 9848.000 | 12.852 | 37.630 | 50.483 | -23.517 | 74.000 |
| Average Detector: | | | | | |
| -- | | | | | |
| Vertical | | | | | |
| Peak Detector: | | | | | |
| 4924.000 | 5.521 | 41.100 | 46.620 | -27.380 | 74.000 |
| 7386.000 | 13.254 | 36.080 | 49.334 | -24.666 | 74.000 |
| 9848.000 | 13.367 | 38.810 | 52.177 | -21.823 | 74.000 |

Average Detector:

--

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)(2437 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|-------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| 237.580 | -7.700 | 48.433 | 40.733 | -5.267 | 46.000 |
| 344.280 | -2.591 | 43.951 | 41.361 | -4.639 | 46.000 |
| 454.860 | -0.779 | 43.334 | 42.554 | -3.446 | 46.000 |
| 600.360 | 3.977 | 38.820 | 42.797 | -3.203 | 46.000 |
| 738.100 | 2.826 | 39.253 | 42.079 | -3.921 | 46.000 |
| 848.680 | 5.776 | 38.012 | 43.787 | -2.213 | 46.000 |
| Vertical | | | | | |
| 268.620 | -8.842 | 42.736 | 33.894 | -12.106 | 46.000 |
| 379.200 | -1.505 | 40.342 | 38.836 | -7.164 | 46.000 |
| 497.540 | -1.393 | 42.800 | 41.407 | -4.593 | 46.000 |
| 623.640 | -2.631 | 38.450 | 35.819 | -10.181 | 46.000 |
| 697.360 | 1.311 | 38.546 | 39.857 | -6.143 | 46.000 |
| 891.360 | 2.218 | 40.749 | 42.967 | -3.033 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)(2437 MHz)

| Frequency MHz | Correct Factor dB | Reading Level dBuV | Measurement Level dBuV/m | Margin dB | Limit dBuV/m |
|-------------------|-------------------------|--------------------------|--------------------------------|--------------|-----------------|
| Horizontal | | | | | |
| 243.400 | -6.441 | 45.714 | 39.273 | -6.727 | 46.000 |
| 460.680 | 1.589 | 39.440 | 41.029 | -4.971 | 46.000 |
| 588.720 | 3.528 | 39.003 | 42.531 | -3.469 | 46.000 |
| 709.000 | 3.458 | 38.567 | 42.025 | -3.975 | 46.000 |
| 825.400 | 6.250 | 35.212 | 41.462 | -4.538 | 46.000 |
| 928.220 | 6.893 | 34.585 | 41.478 | -4.522 | 46.000 |
| Vertical | | | | | |
| 103.720 | -0.151 | 34.255 | 34.103 | -9.397 | 43.500 |
| 379.200 | -1.505 | 41.599 | 40.093 | -5.907 | 46.000 |
| 460.680 | -3.221 | 45.892 | 42.671 | -3.329 | 46.000 |
| 538.280 | 0.020 | 40.289 | 40.309 | -5.691 | 46.000 |
| 685.720 | 2.319 | 39.319 | 41.637 | -4.363 | 46.000 |
| 825.400 | 3.430 | 38.613 | 42.043 | -3.957 | 46.000 |

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

5. RF antenna conducted test


5.1. Test Equipment

| | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|---|-------------------|--------------|----------------------|------------|
| | Spectrum Analyzer | R&S | FSP40 / 100170 | Jun, 2012 |
| | Spectrum Analyzer | Agilent | E4407B / US39440758 | Jun, 2012 |
| X | Spectrum Analyzer | Agilent | N9010A / MY48030495 | Apr., 2012 |

Note: 1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with “X” are used to measure the final test results.

5.2. Test Setup

RF antenna Conducted Measurement:

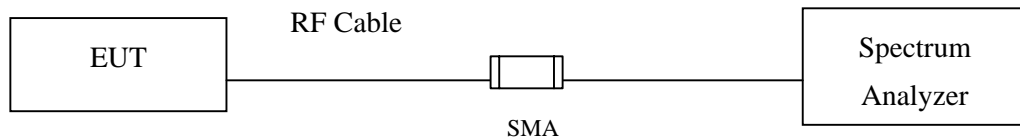

5.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

5.4. Test Procedure

The EUT was tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 100 kHz, Set VBW > RBW, scan up through 10th harmonic.

5.5. Uncertainty


The measurement uncertainty



Conducted is defined as $\pm 1.27\text{dB}$

5.6. Test Result of RF antenna conducted test



Product : Infotainment System with Headunit (with BT, WLAN, Kler technology)
 Test Item : RF antenna conducted test
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)


Channel 01 (2412MHz)

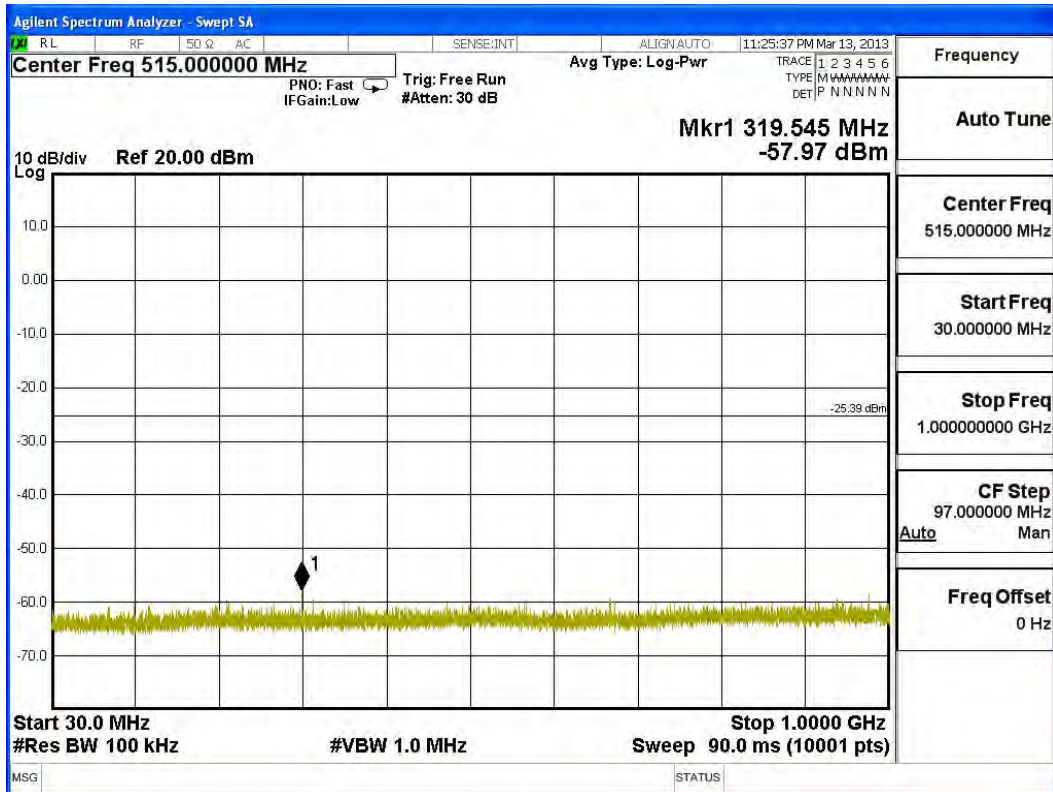

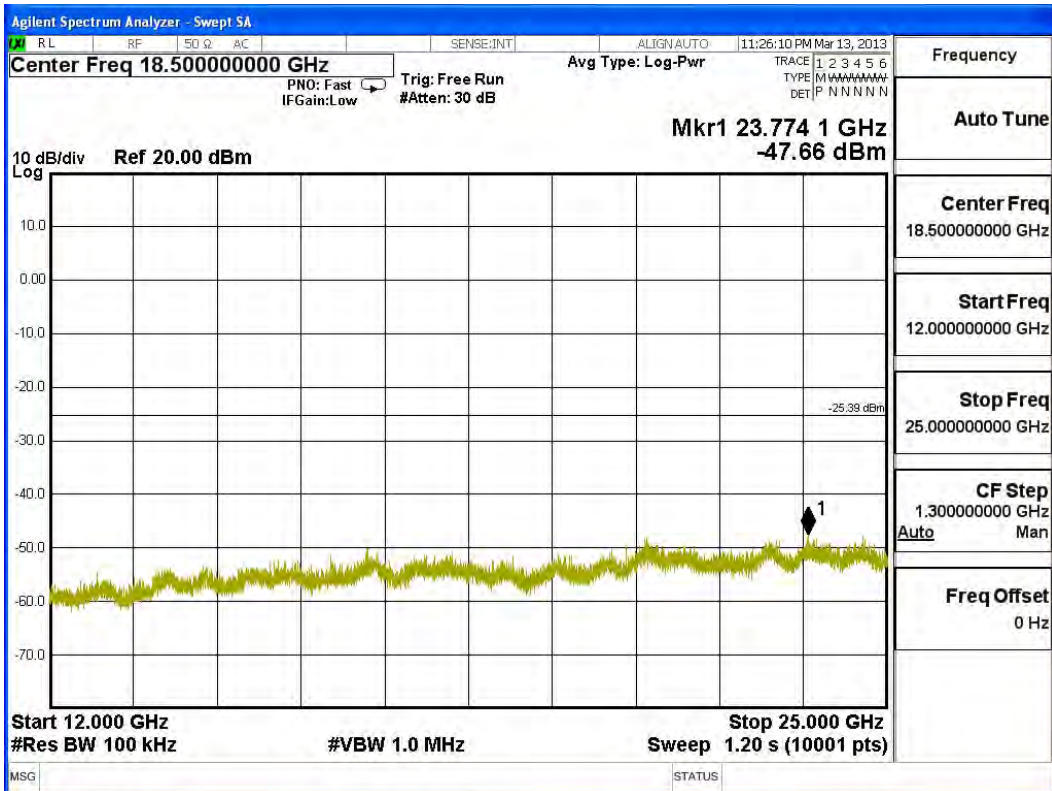
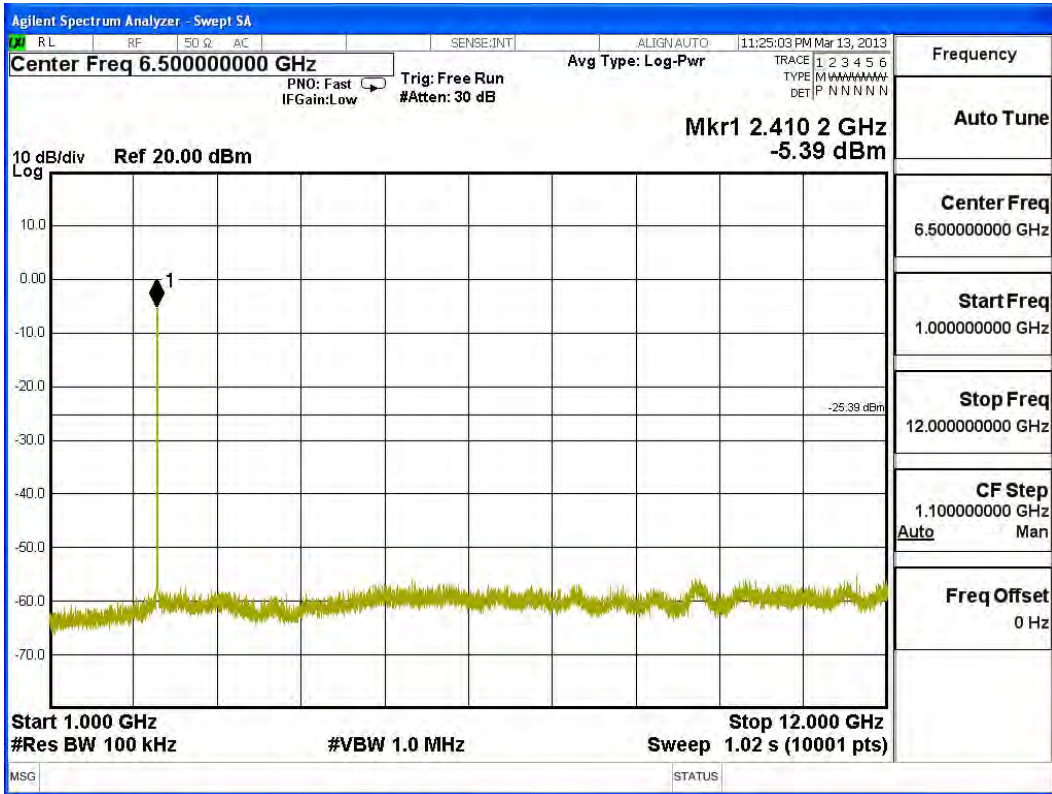



Channel 06 (2437MHz)

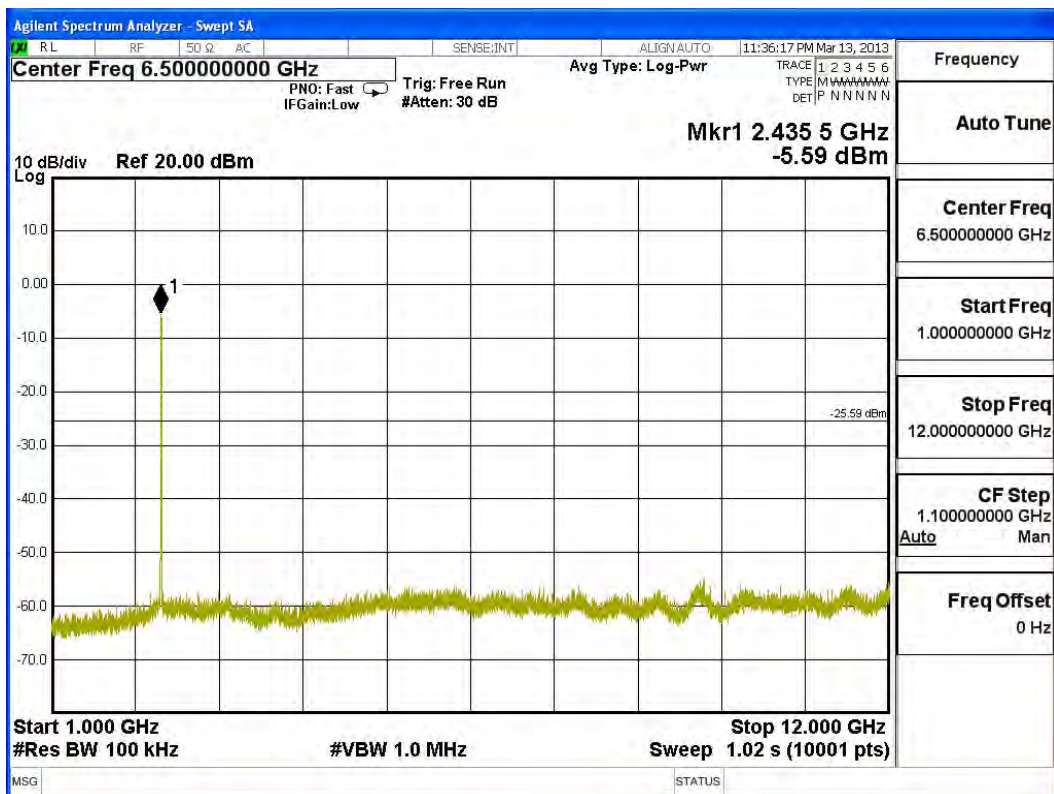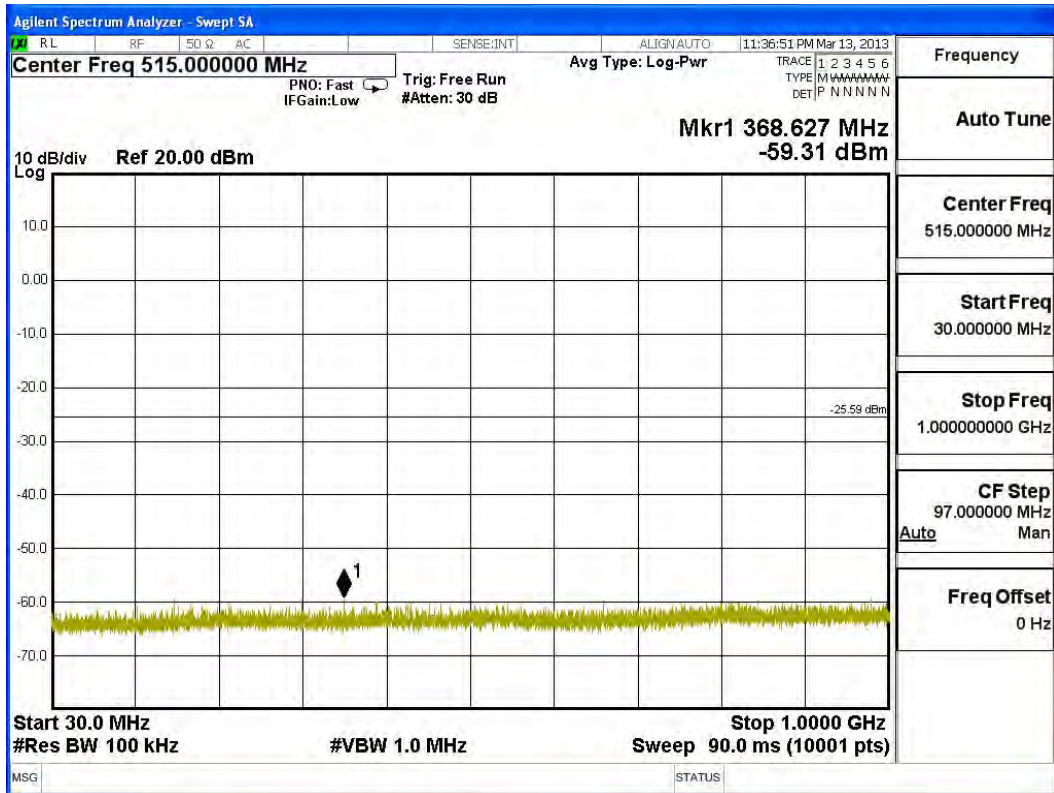

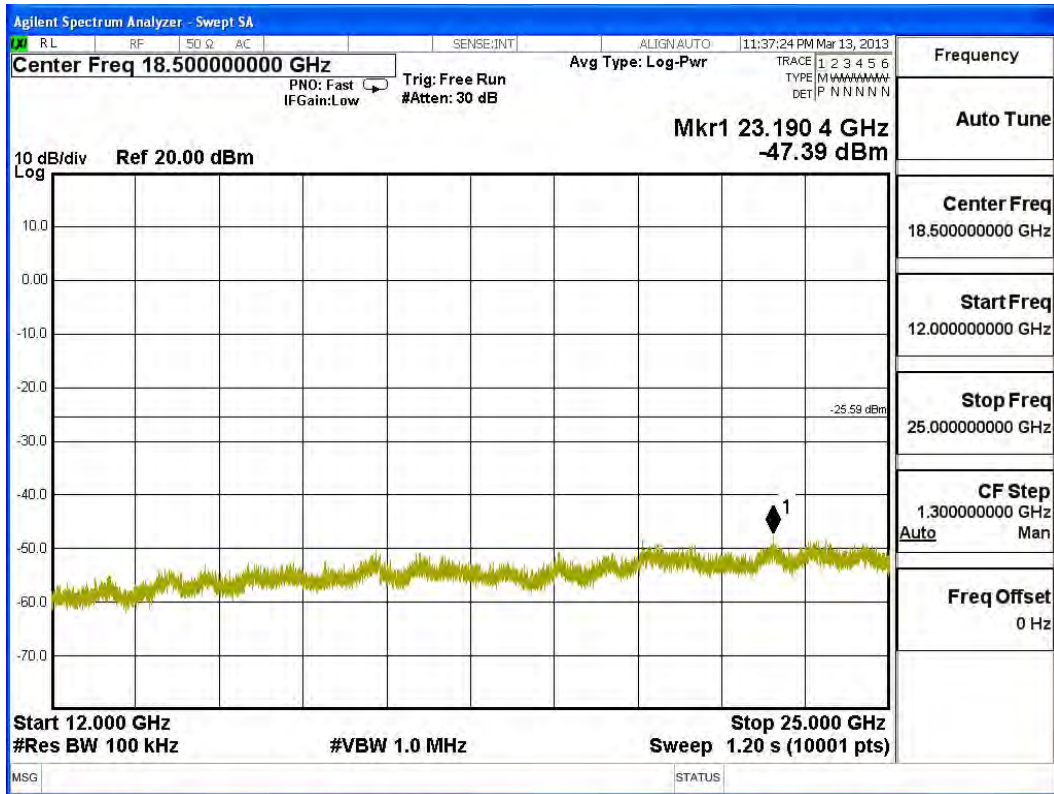


Channel 11 (2462MHz)

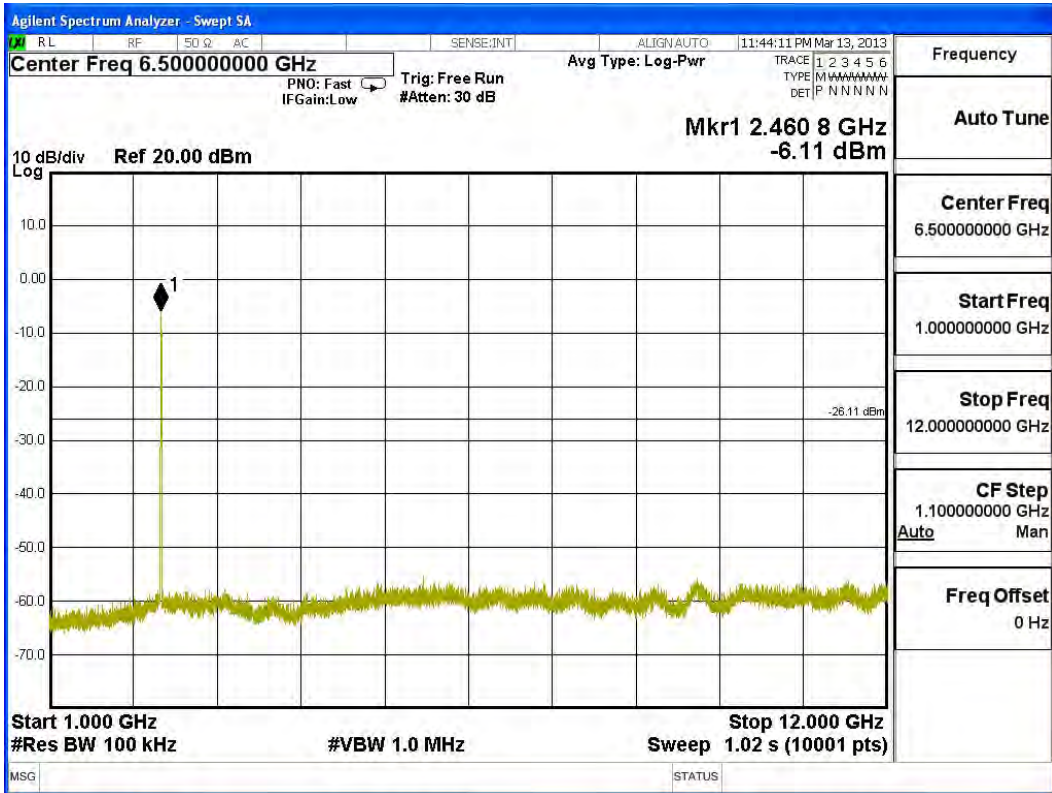
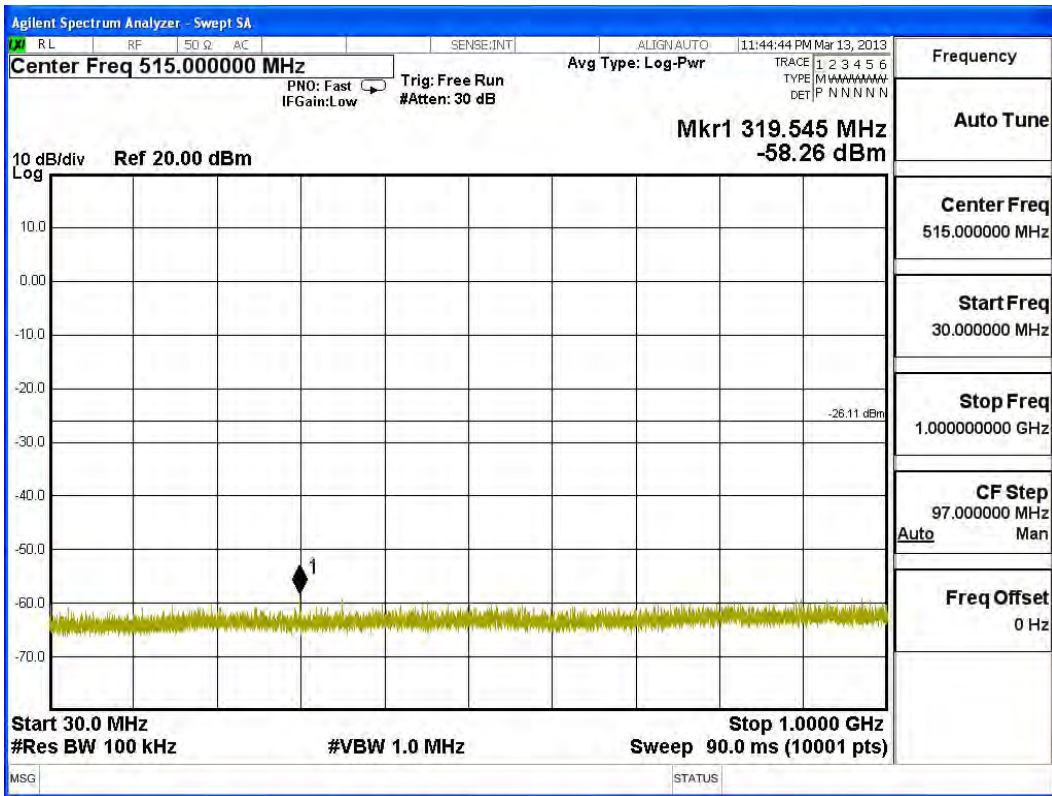


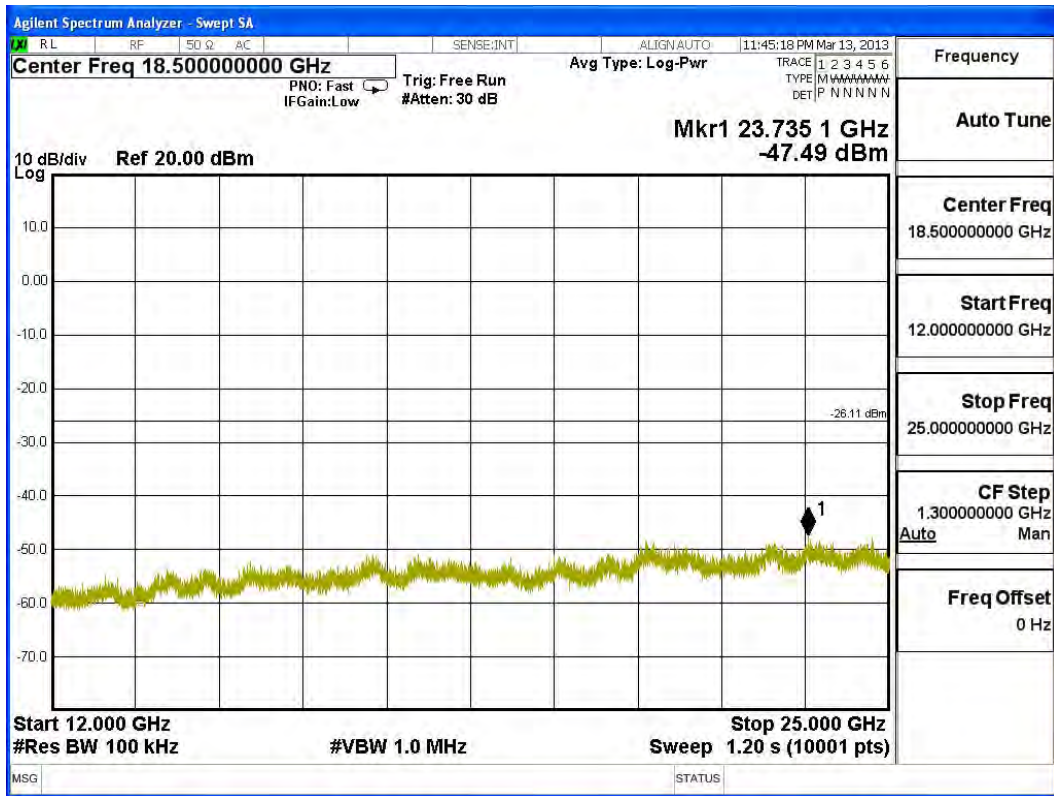



Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : RF Antenna Conducted Spurious
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)


Channel 01 (2412MHz)

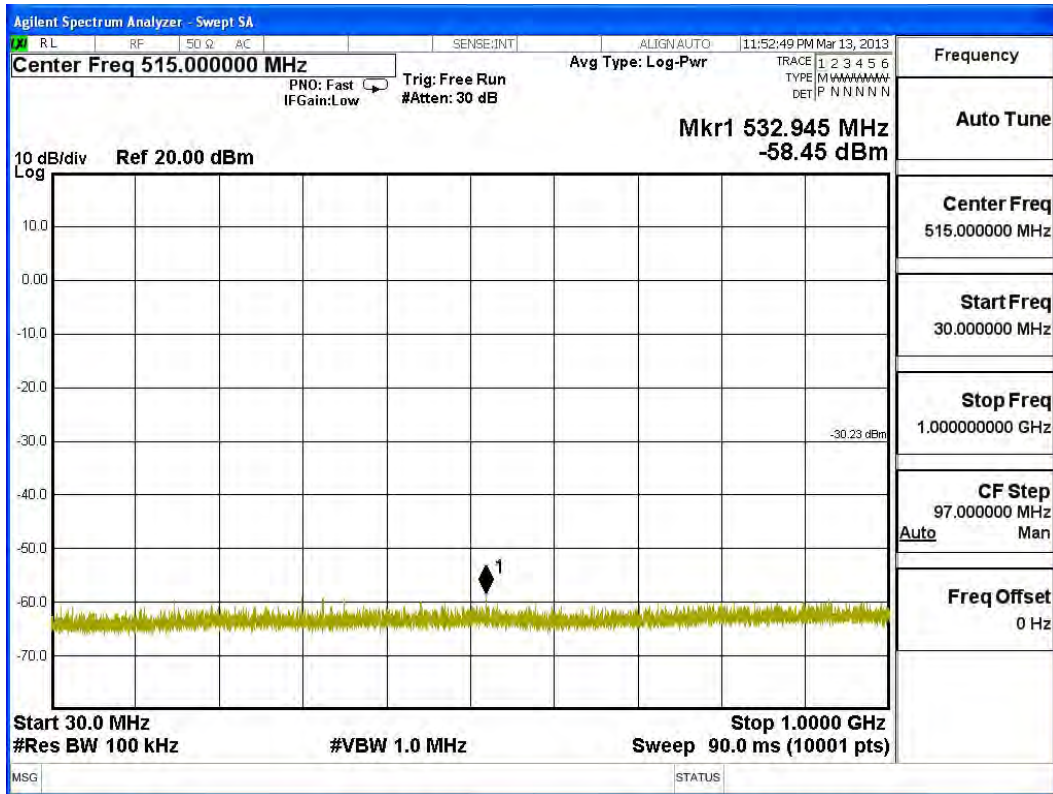

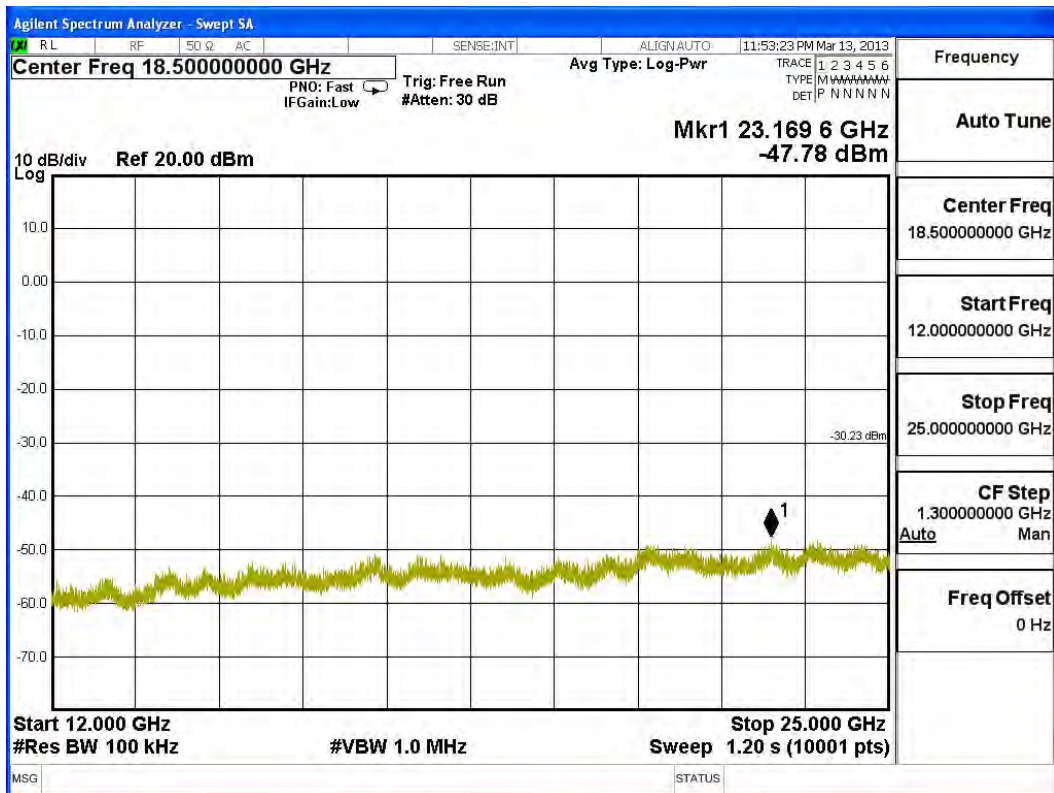
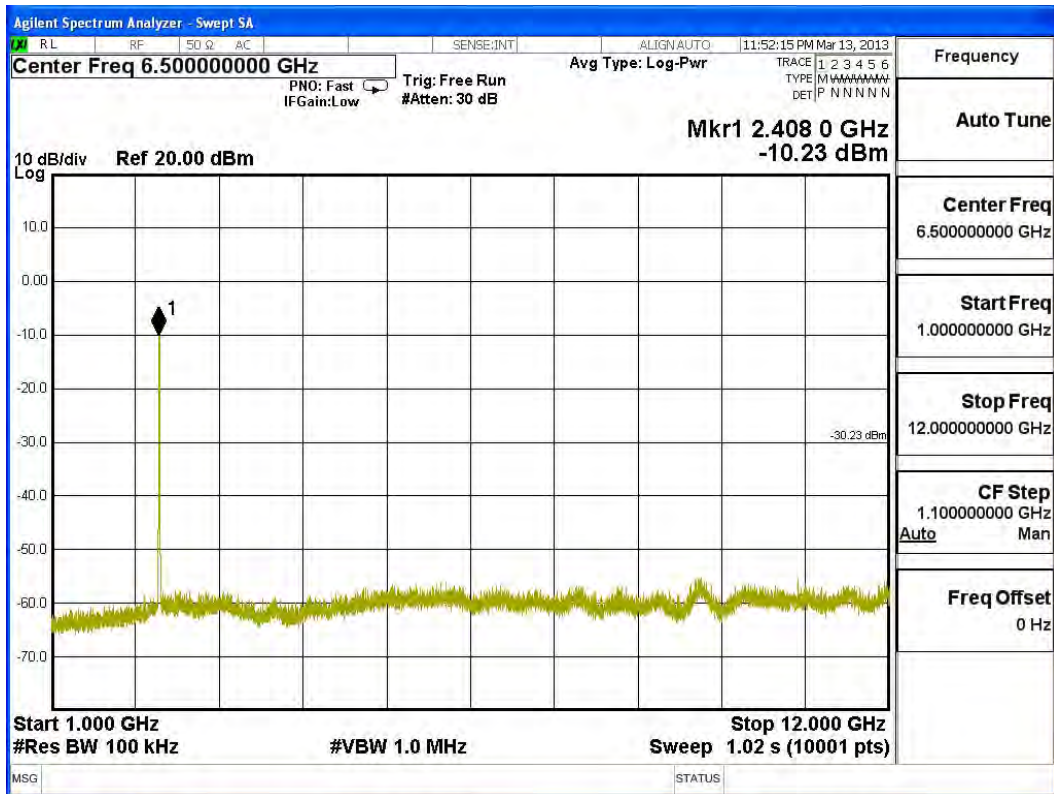



Channel 06 (2437MHz)

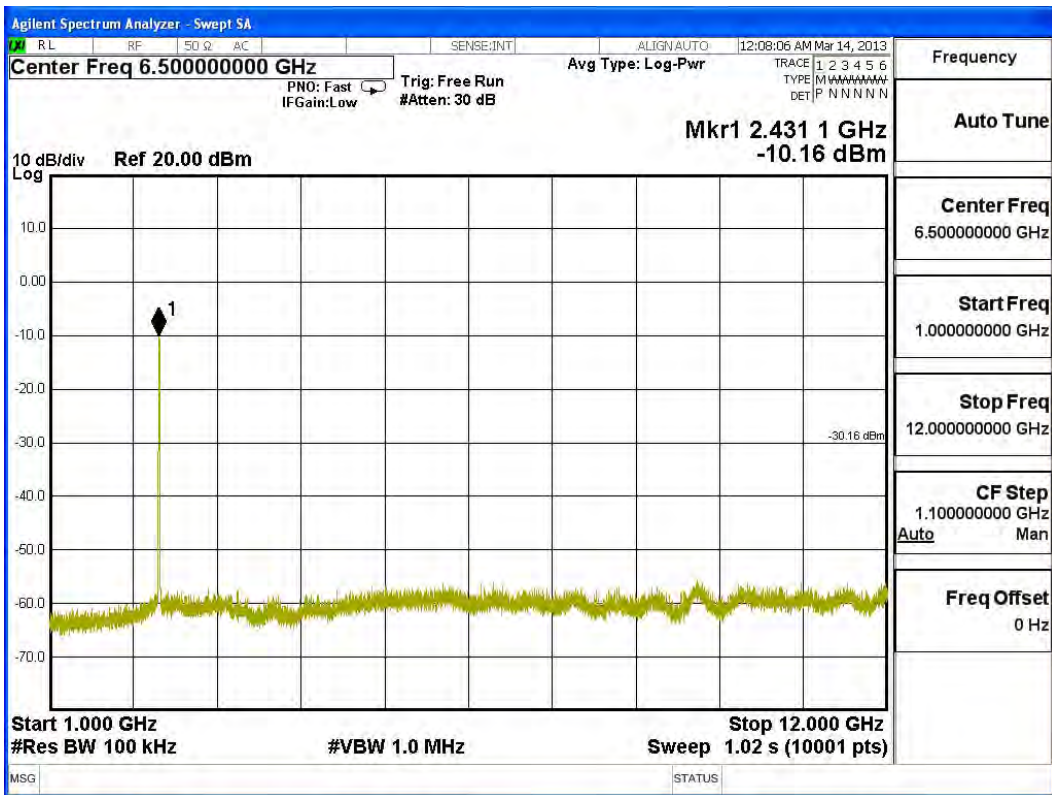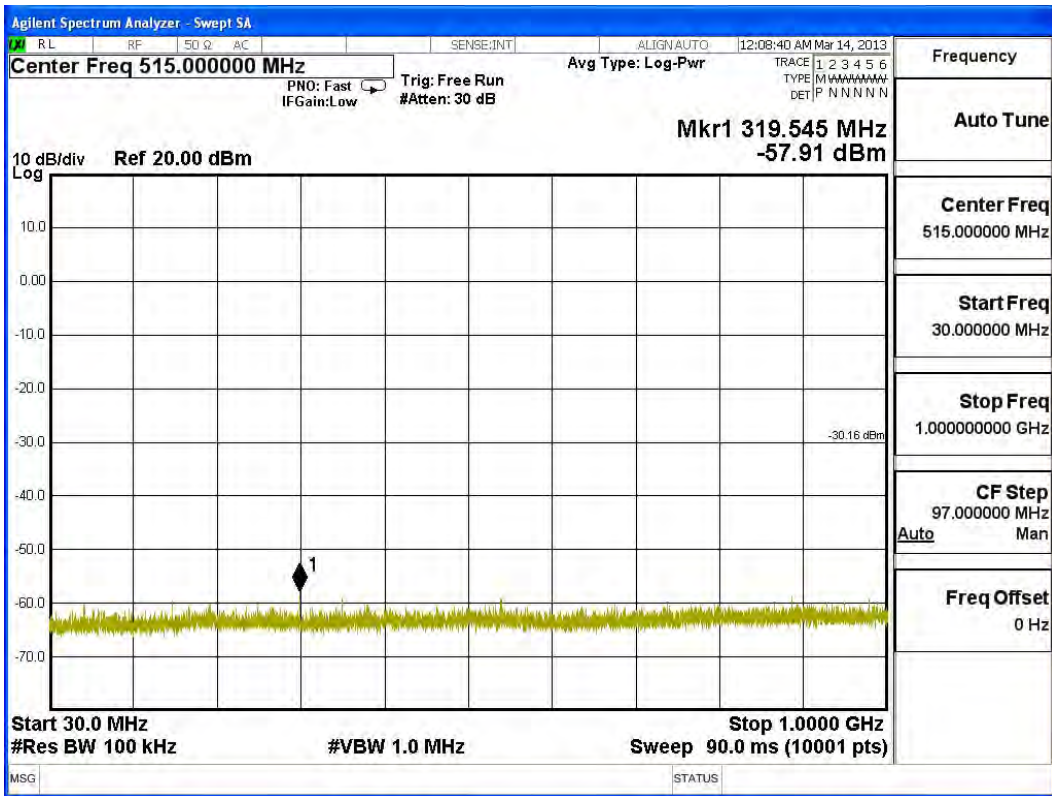

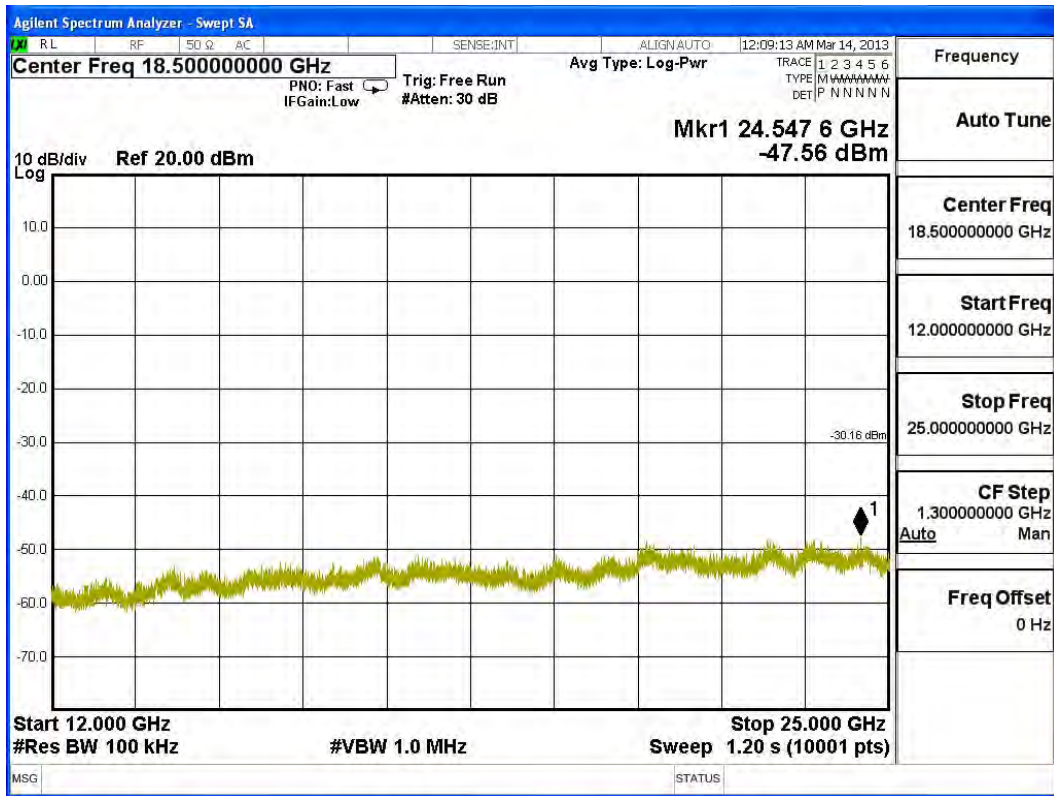

Channel 11 (2462MHz)

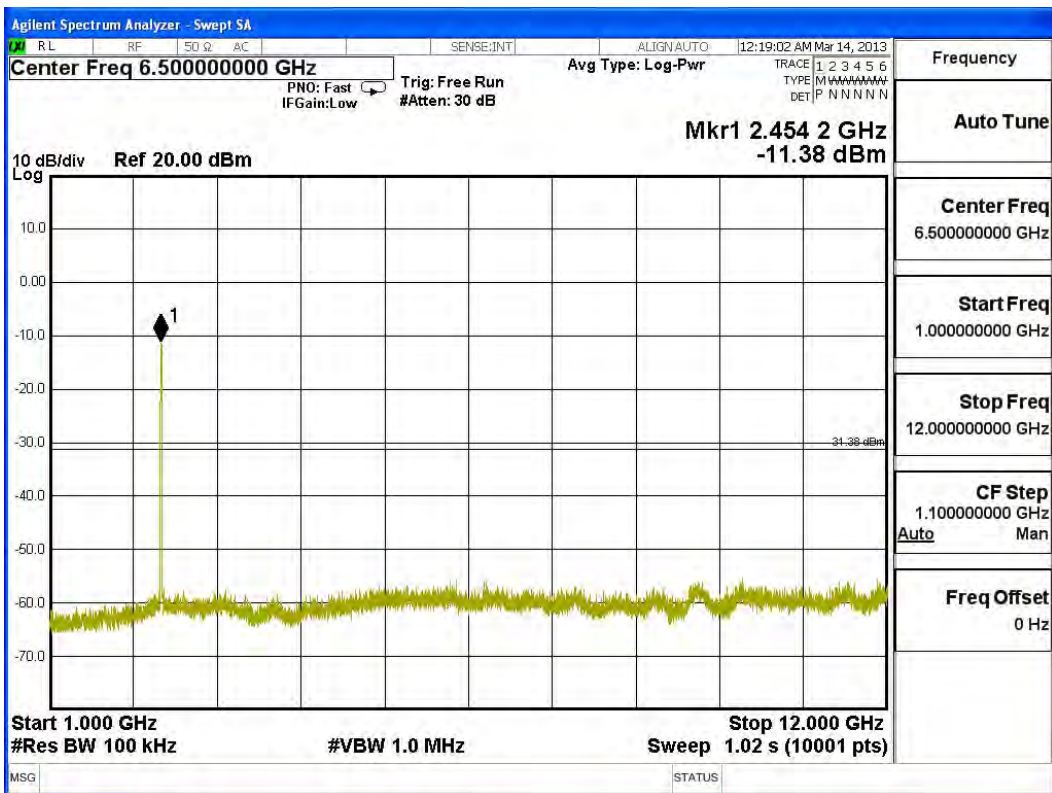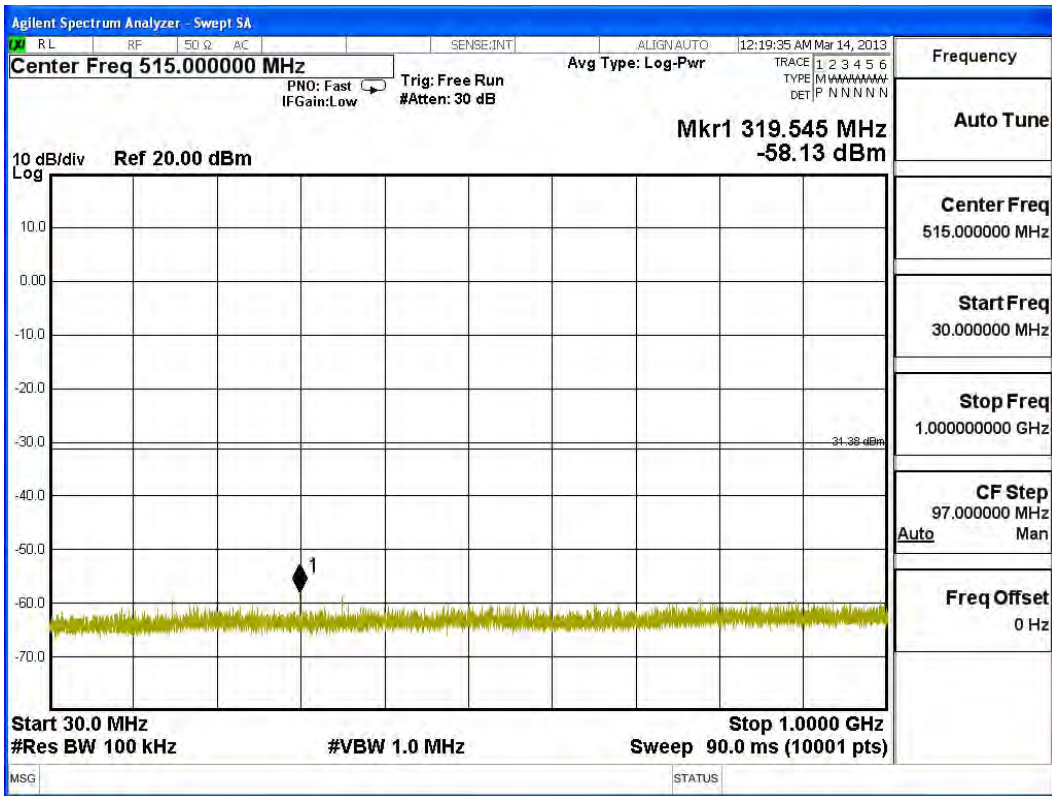

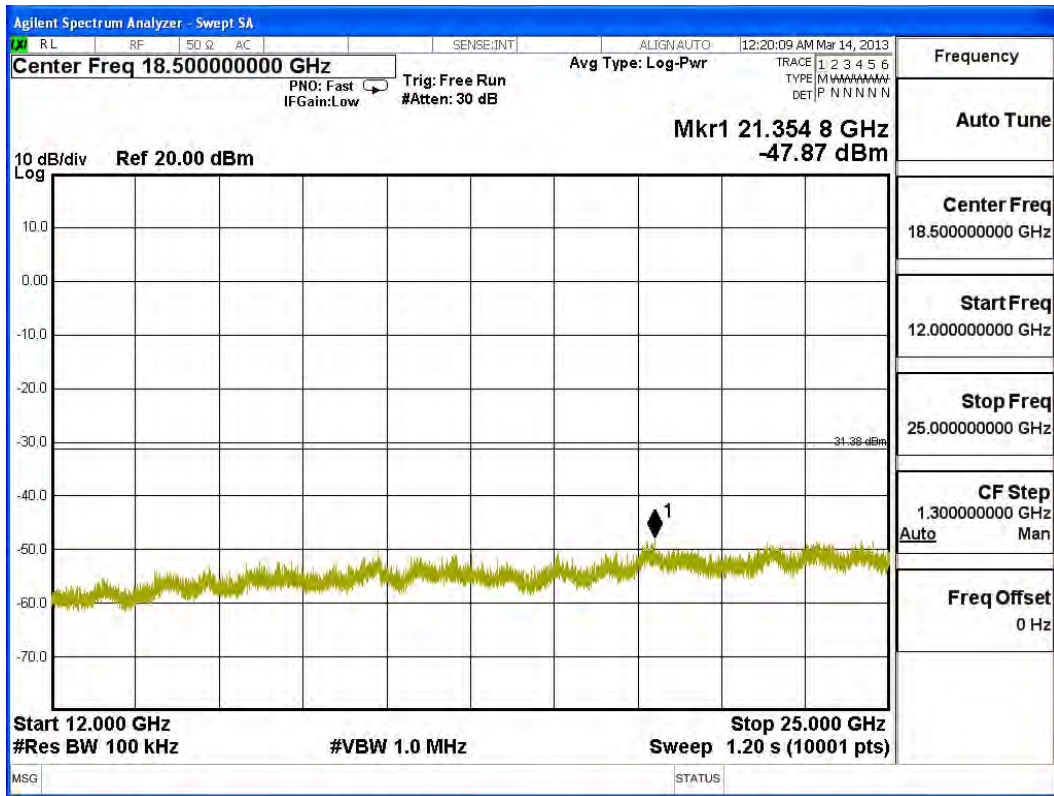

6. Band Edge

6.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

| | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|---|-------------------|--------------|----------------------|------------|
| | Spectrum Analyzer | R&S | FSP40 / 100170 | Jun, 2012 |
| | Spectrum Analyzer | Agilent | E4407B / US39440758 | Jun, 2012 |
| X | Spectrum Analyzer | Agilent | N9010A / MY48030495 | Apr., 2012 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with "X" are used to measure the final test results.

RF Radiated Measurement:


The following test equipments are used during the band edge tests:

| Test Site | Equipment | Manufacturer | Model No./Serial No. | Last Cal. | |
|------------|-----------|-------------------|----------------------|-----------------------|------------|
| ☒ Site # 3 | | Bilog Antenna | Schaffner Chase | CBL6112B/2673 | Sep., 2012 |
| | X | Horn Antenna | Schwarzbeck | BBHA9120D/D305 | Sep., 2012 |
| | | Horn Antenna | Schwarzbeck | BBHA9170/208 | Jul., 2012 |
| | X | Pre-Amplifier | Agilent | 8447D/2944A09549 | Sep., 2012 |
| | X | Spectrum Analyzer | Agilent | E4407B / US39440758 | May, 2012 |
| | | Test Receiver | R & S | ESCS 30/ 825442/018 | Sep., 2012 |
| | X | Coaxial Cable | Quietek | QTK-CABLE/ CAB5 | Feb., 2013 |
| | X | Controller | Quietek | QTK-CONTROLLER/ CTRL3 | N/A |
| | X | Coaxial Switch | Anritsu | MP59B/6200265729 | N/A |


- Note:
1. All instruments are calibrated every one year.
 2. The test instruments marked by "X" are used to measure the final test results.

6.2. Test Setup

RF Conducted Measurement:

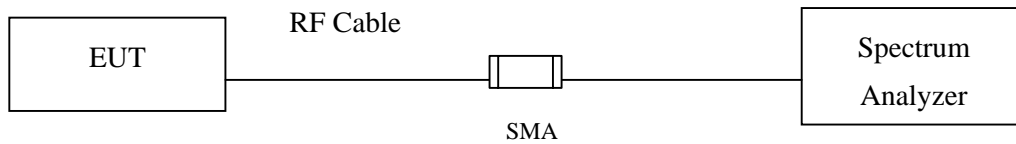

RF Radiated Measurement:

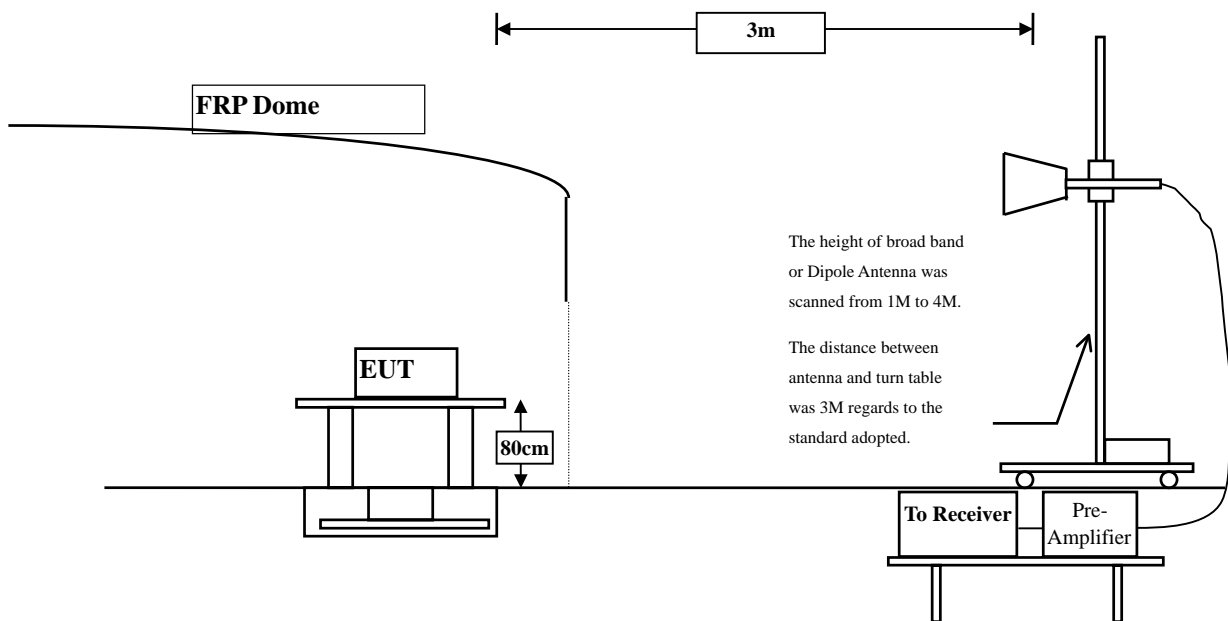

6.3. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009 and tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2009 on radiated measurement.

6.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

6.6. Test Result of Band Edge

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Fundamental Filed Strength

| Antenna Pole | Frequency [MHz] | Correction Factor [dB/m] | Reading Level [dBuV] | Emission Level [dBuV/m] | Detector |
|--------------|-----------------|--------------------------|----------------------|-------------------------|----------|
| Horizontal | 2412 | 31.639 | 63.13 | 94.768 | Peak |
| Horizontal | 2412 | 31.639 | 58.71 | 90.348 | Average |
| Vertical | 2412 | 30.95 | 53.57 | 84.519 | Peak |
| Vertical | 2412 | 30.95 | 49.47 | 80.419 | Average |

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

| Antenna Pole | Test Frequency (MHz) | Fundamental (dBuV/m) | Δ (dB) | Band Edge Field Strength (dBuV/m) | Limit (dBuV/m) | Detector |
|--------------|----------------------|----------------------|---------------|-----------------------------------|----------------|----------|
| Horizontal | 2387.8 | 94.768 | 46.9 | 47.868 | 74.000 | Peak |
| Horizontal | 2390 | 90.348 | 57.03 | 33.318 | 54.000 | Average |
| Vertical | 2387.8 | 84.519 | 46.9 | 37.619 | 74.000 | Peak |
| Vertical | 2390 | 80.419 | 57.03 | 23.389 | 54.000 | Average |

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

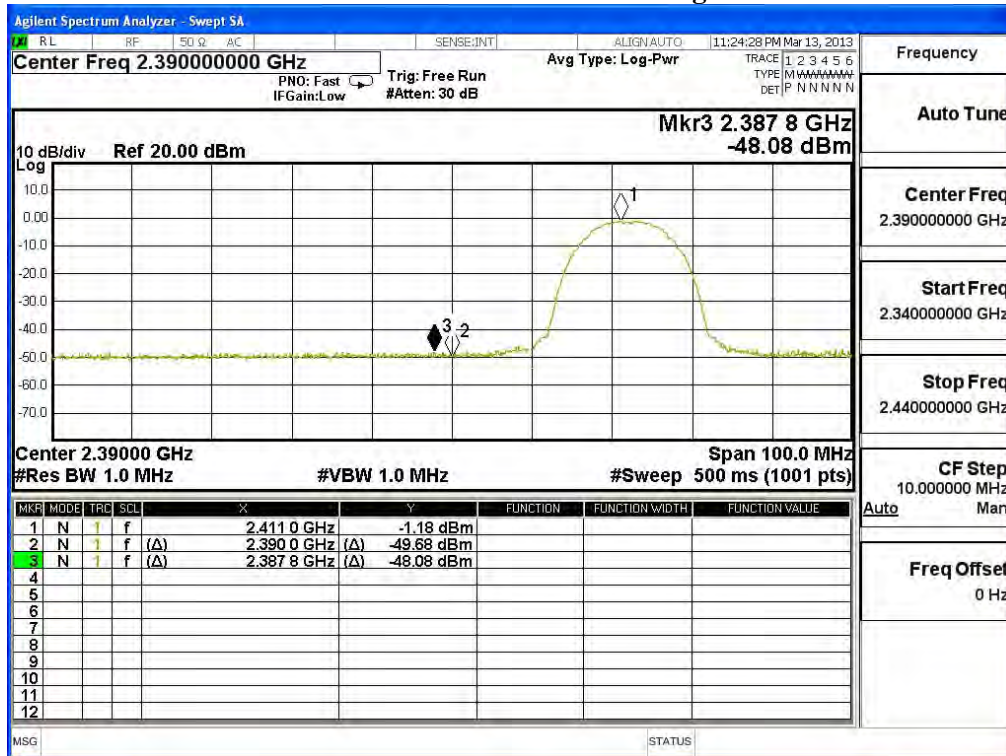

Average Detector of conducted Band Edge Delta

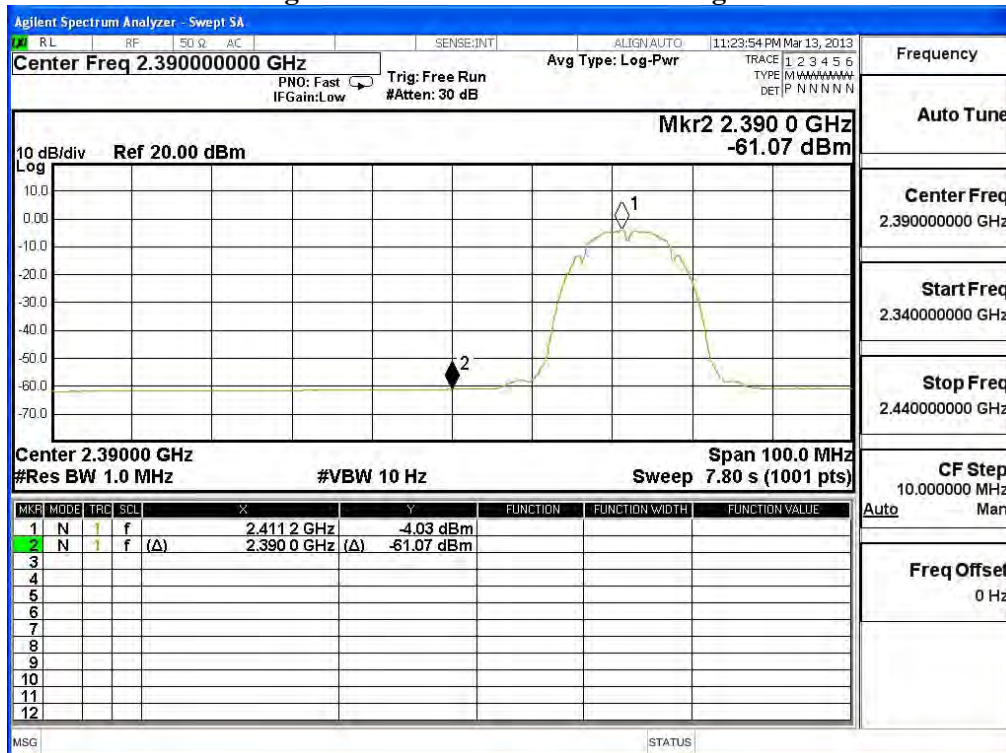

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps)

Fundamental Filed Strength

| Antenna Pole | Frequency [MHz] | Correction Factor [dB/m] | Reading Level [dBuV] | Emission Level [dBuV/m] | Detector |
|--------------|-----------------|--------------------------|----------------------|-------------------------|----------|
| Horizontal | 2462 | 32.019 | 61.55 | 93.569 | Peak |
| Horizontal | 2462 | 32.019 | 57.54 | 89.559 | Average |
| Vertical | 2462 | 31.29 | 55.33 | 86.62 | Peak |
| Vertical | 2462 | 31.29 | 51.23 | 82.52 | Average |

Note: 1:Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

| Antenna Pole | Test Frequency (MHz) | Fundamental (dBuV/m) | Δ (dB) | Band Edge Field Strength (dBuV/m) | Limit (dBuV/m) | Detector |
|--------------|----------------------|----------------------|---------------|-----------------------------------|----------------|----------|
| Horizontal | 2492 | 93.569 | 46.27 | 47.299 | 74.000 | Peak |
| Horizontal | 2483.8 | 89.559 | 56.61 | 32.949 | 54.000 | Average |
| Vertical | 2492 | 86.62 | 46.27 | 40.35 | 74.000 | Peak |
| Vertical | 2483.8 | 82.52 | 56.61 | 25.91 | 54.000 | Average |

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

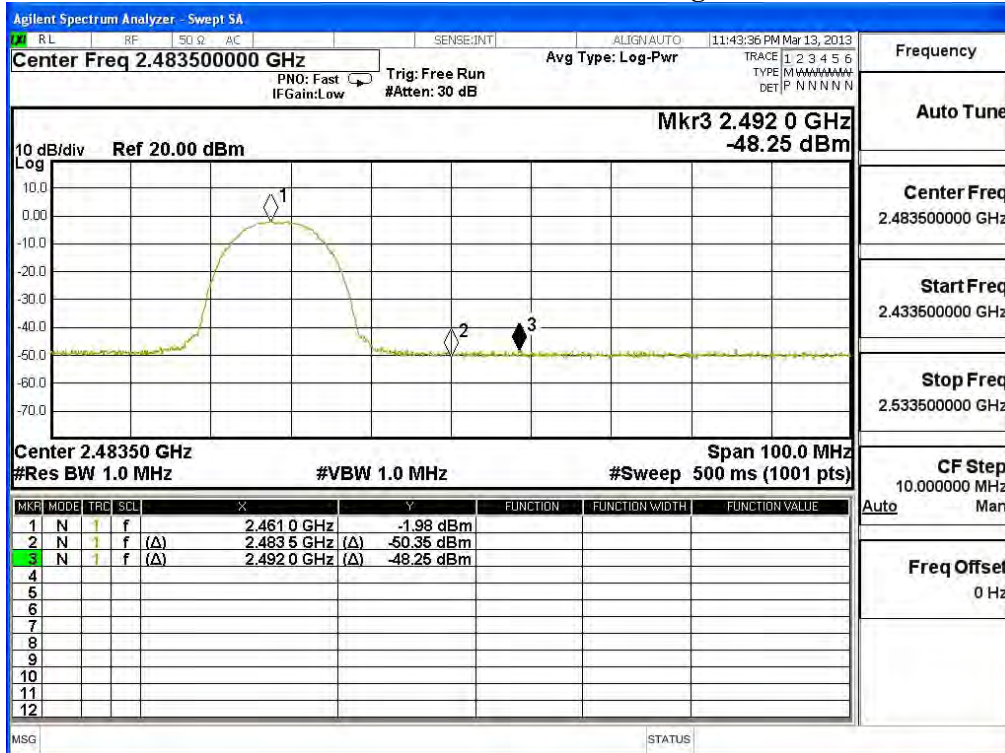

Average Detector of conducted Band Edge Delta

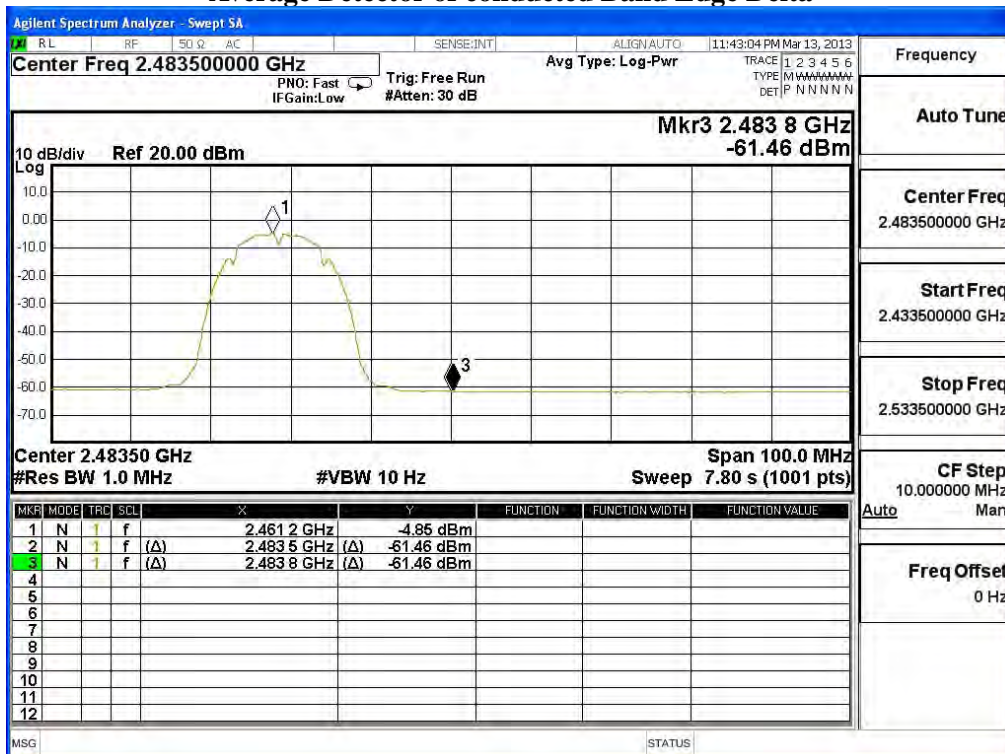

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Fundamental Filed Strength

| Antenna Pole | Frequency [MHz] | Correction Factor [dB/m] | Reading Level [dBuV] | Emission Level [dBuV/m] | Detector |
|--------------|-----------------|--------------------------|----------------------|-------------------------|----------|
| Horizontal | 2412 | 31.639 | 63.04 | 94.678 | Peak |
| Horizontal | 2412 | 31.639 | 53.21 | 84.848 | Average |
| Vertical | 2412 | 30.95 | 56.29 | 87.239 | Peak |
| Vertical | 2412 | 30.95 | 46.68 | 77.629 | Average |

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

| Antenna Pole | Test Frequency (MHz) | Fundamental (dBuV/m) | Δ (dB) | Band Edge Field Strength (dBuV/m) | Limit (dBuV/m) | Detector |
|--------------|----------------------|----------------------|---------------|-----------------------------------|----------------|----------|
| Horizontal | 2389.7 | 94.678 | 47.71 | 46.968 | 74.000 | Peak |
| Horizontal | 2390 | 84.848 | 51.36 | 33.488 | 54.000 | Average |
| Vertical | 2389.7 | 87.239 | 47.71 | 39.529 | 74.000 | Peak |
| Vertical | 2390 | 77.629 | 51.36 | 26.269 | 54.000 | Average |

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

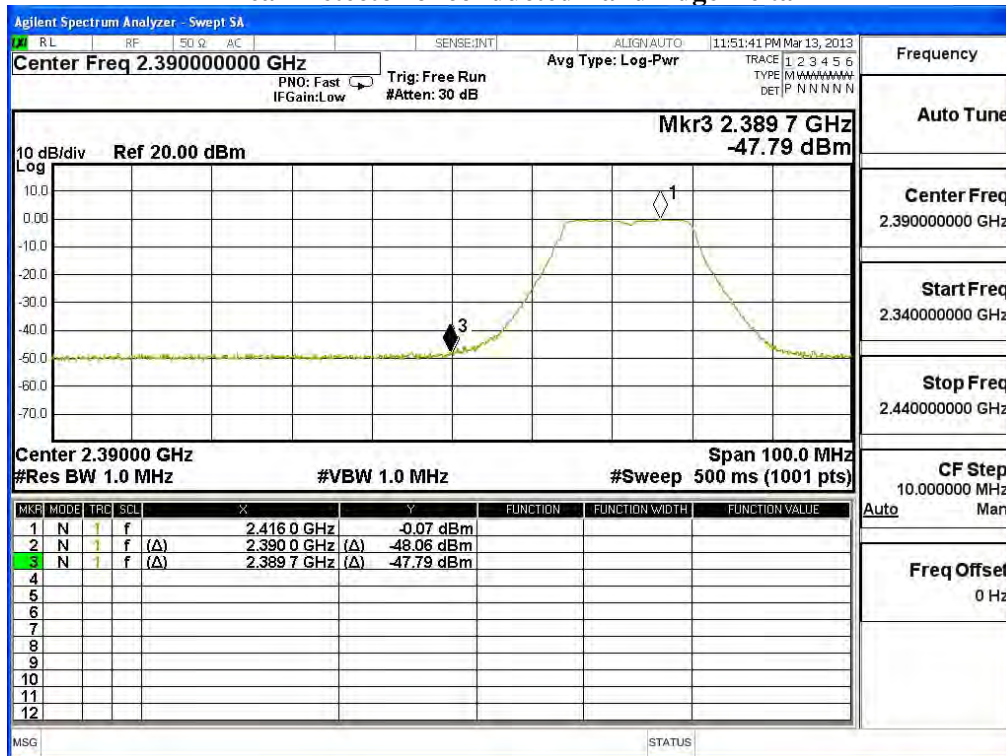

Average Detector of conducted Band Edge Delta

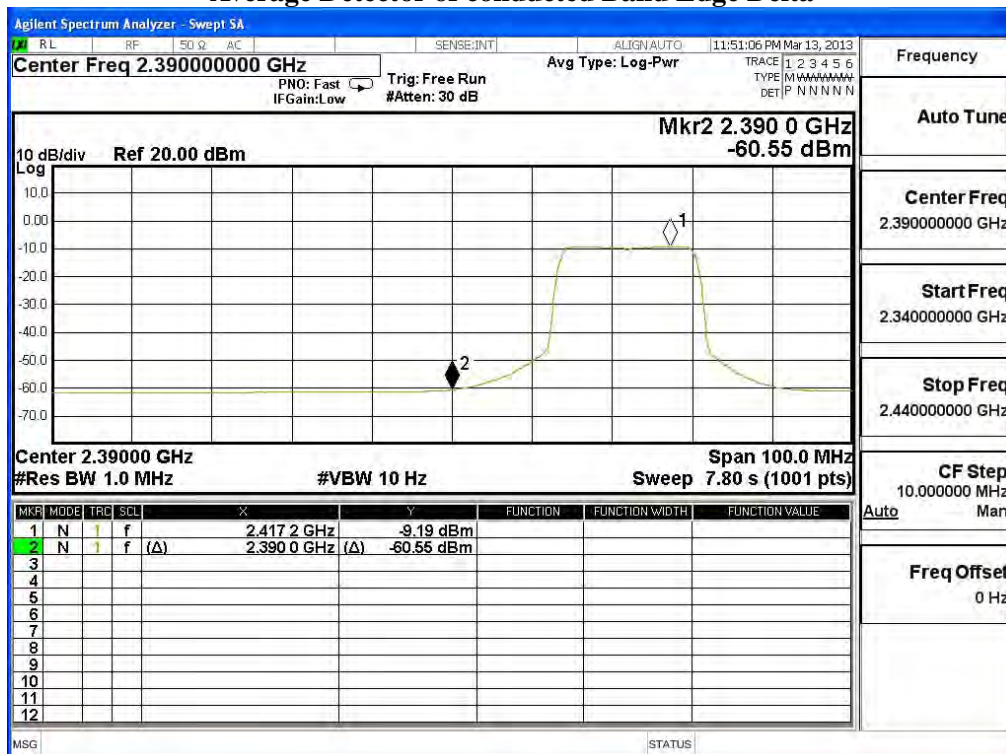

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps)

Fundamental Filed Strength

| Antenna Pole | Frequency [MHz] | Correction Factor [dB/m] | Reading Level [dBuV] | Emission Level [dBuV/m] | Detector |
|--------------|-----------------|--------------------------|----------------------|-------------------------|----------|
| Horizontal | 2462 | 32.019 | 62.77 | 94.789 | Peak |
| Horizontal | 2462 | 32.019 | 53.2 | 85.219 | Average |
| Vertical | 2462 | 31.29 | 56.17 | 87.46 | Peak |
| Vertical | 2462 | 31.29 | 45.65 | 76.94 | Average |

Note: 1: Spectrum Analyzer setting:

Peak detector: RBW=1MHz, VBW=1MHz

Average detector: RBW=1MHz, VBW=10Hz

Band Edge Test Data

| Antenna Pole | Test Frequency (MHz) | Fundamental (dBuV/m) | Δ (dB) | Band Edge Field Strength (dBuV/m) | Limit (dBuV/m) | Detector |
|--------------|----------------------|----------------------|---------------|-----------------------------------|----------------|----------|
| Horizontal | 2491.8 | 94.789 | 47.41 | 47.379 | 74.000 | Peak |
| Horizontal | 2483.5 | 85.219 | 51.58 | 33.639 | 54.000 | Average |
| Vertical | 2491.8 | 87.46 | 47.41 | 40.05 | 74.000 | Peak |
| Vertical | 2483.5 | 76.94 | 51.58 | 25.36 | 54.000 | Average |

Note:


The Band Edge Field Strength was calculated using the Fundamental and Conducted Band Edge measurements per the Marker-Delta Method with the following formula:

Band Edge field Strength = F - Δ


F = Fundamental field Strength (Peak or Average)

Δ = Conducted Band Edge Delta (Peak or Average)

Peak Detector of conducted Band Edge Delta

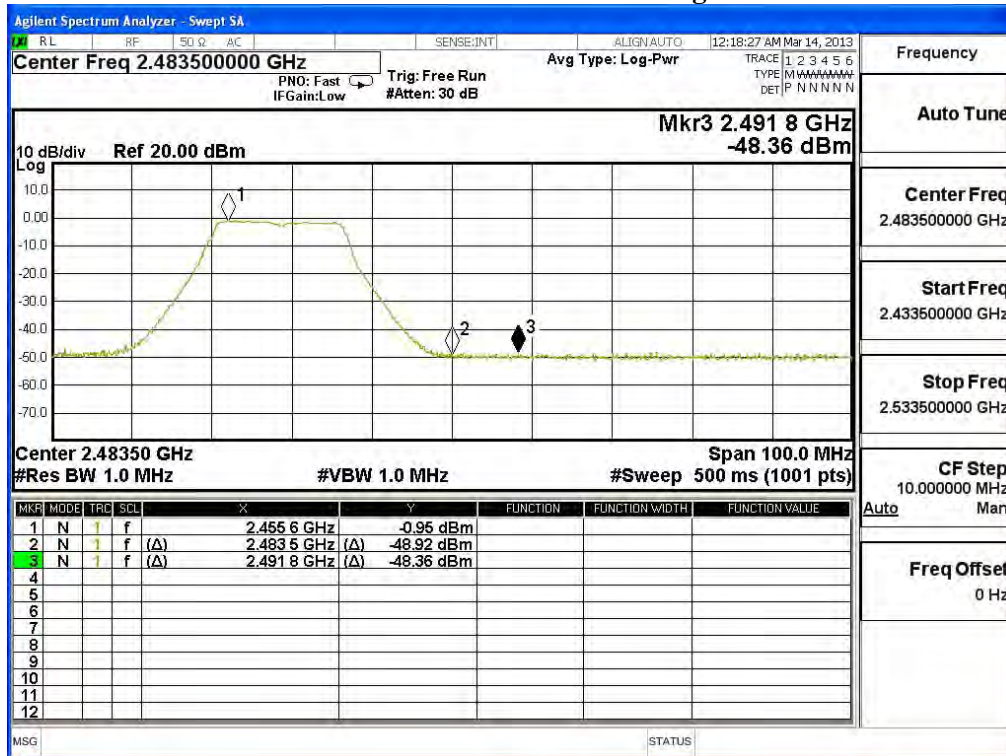

Average Detector of conducted Band Edge Delta

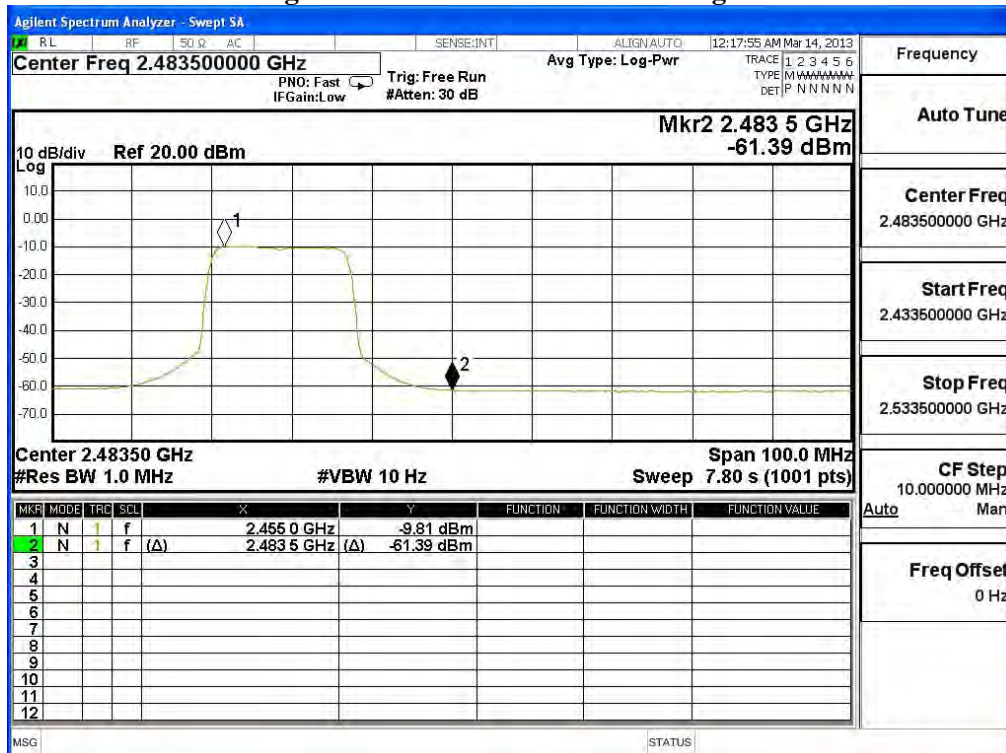

7. Occupied Bandwidth


7.1. Test Equipment

| | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|---|-------------------|--------------|----------------------|------------|
| | Spectrum Analyzer | R&S | FSP40 / 100170 | Jun, 2012 |
| | Spectrum Analyzer | Agilent | E4407B / US39440758 | Jun, 2012 |
| X | Spectrum Analyzer | Agilent | N9010A / MY48030495 | Apr., 2012 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

7.2. Test Setup

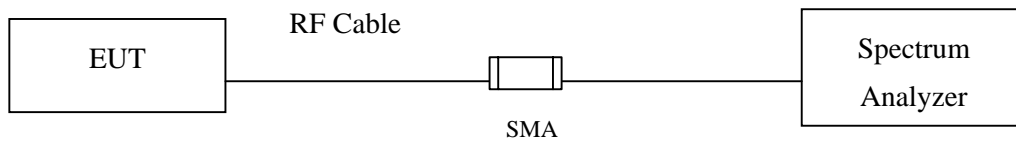

7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

7.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth, $VBW \geq 3 * RBW$

7.5. Uncertainty


$\pm 150\text{Hz}$

7.6. Test Result of Occupied Bandwidth

Product : Infotainment System with Headunit (with BT, WLAN, Kler technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1 | 2412 | 10300 | >500 | Pass |


Figure Channel 1:

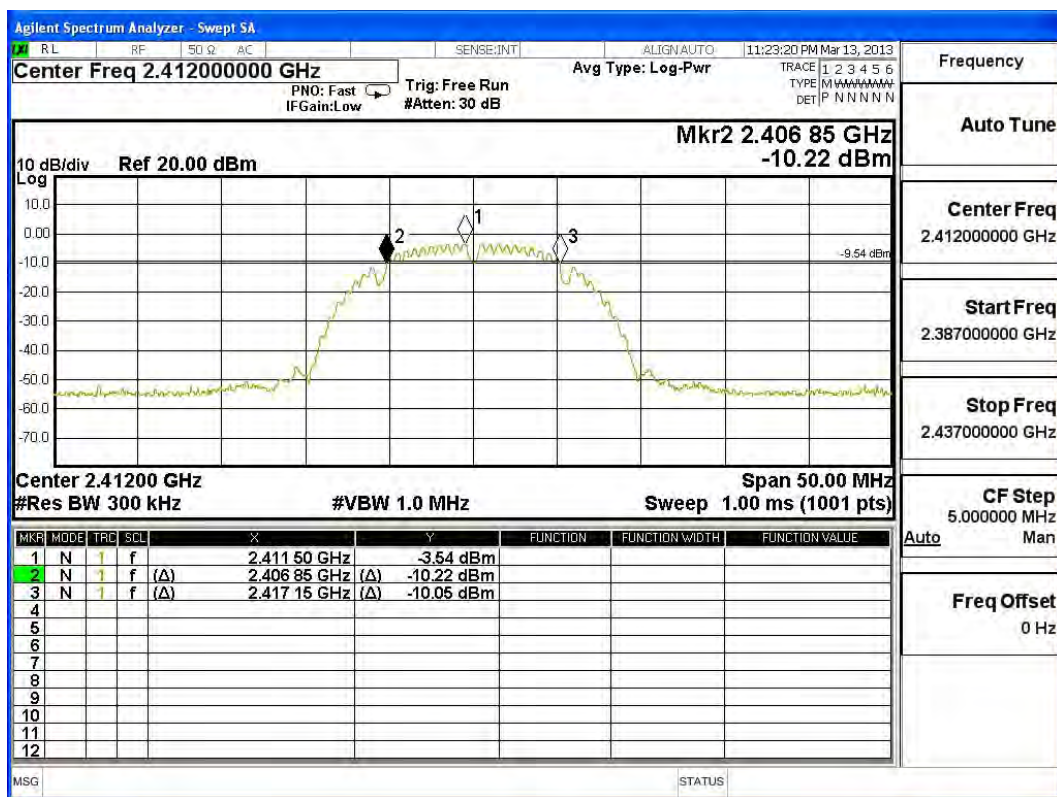

Product : Infotainment System with Headunit (with BT, WLAN, Kler technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6 | 2437 | 10300 | >500 | Pass |


Figure Channel 6:

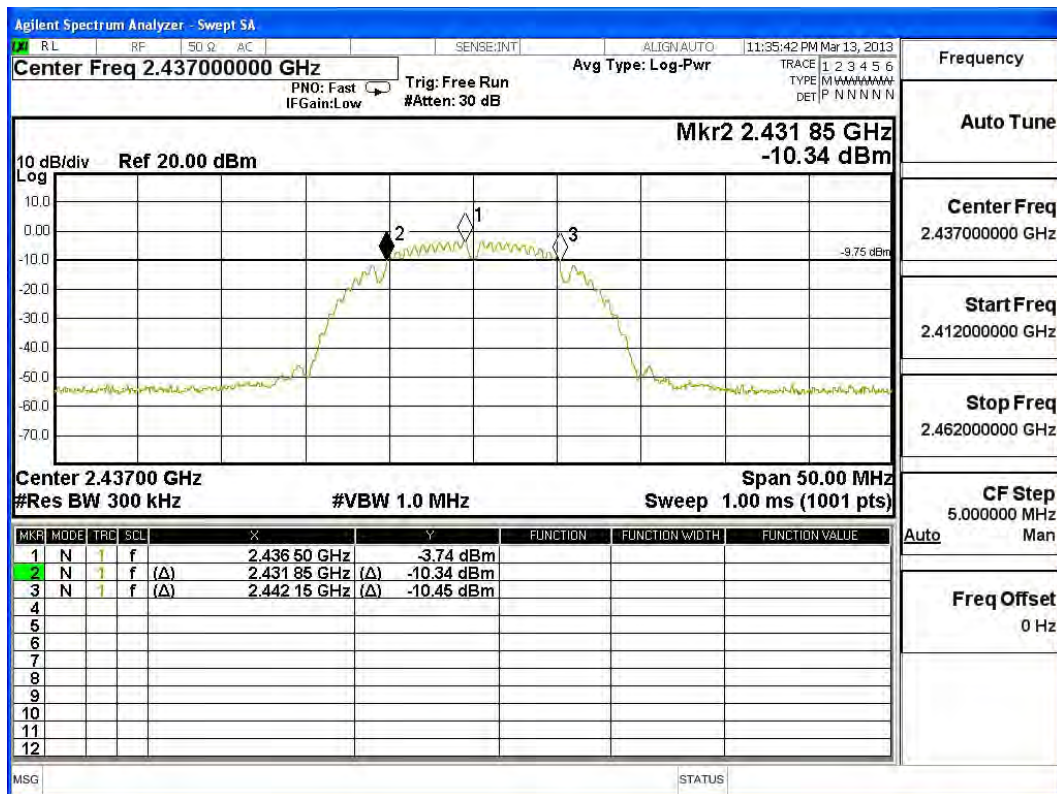

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11 | 2462 | 10300 | >500 | Pass |


Figure Channel 11:

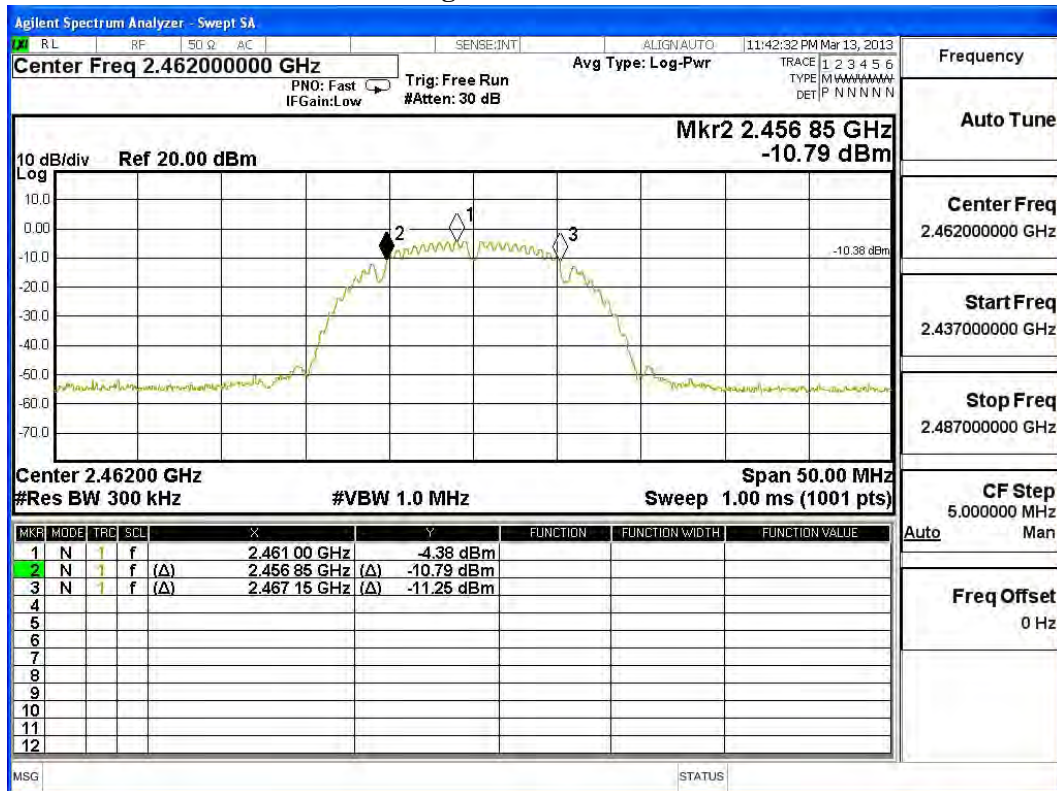

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 1 | 2412 | 16450 | >500 | Pass |


Figure Channel 1:

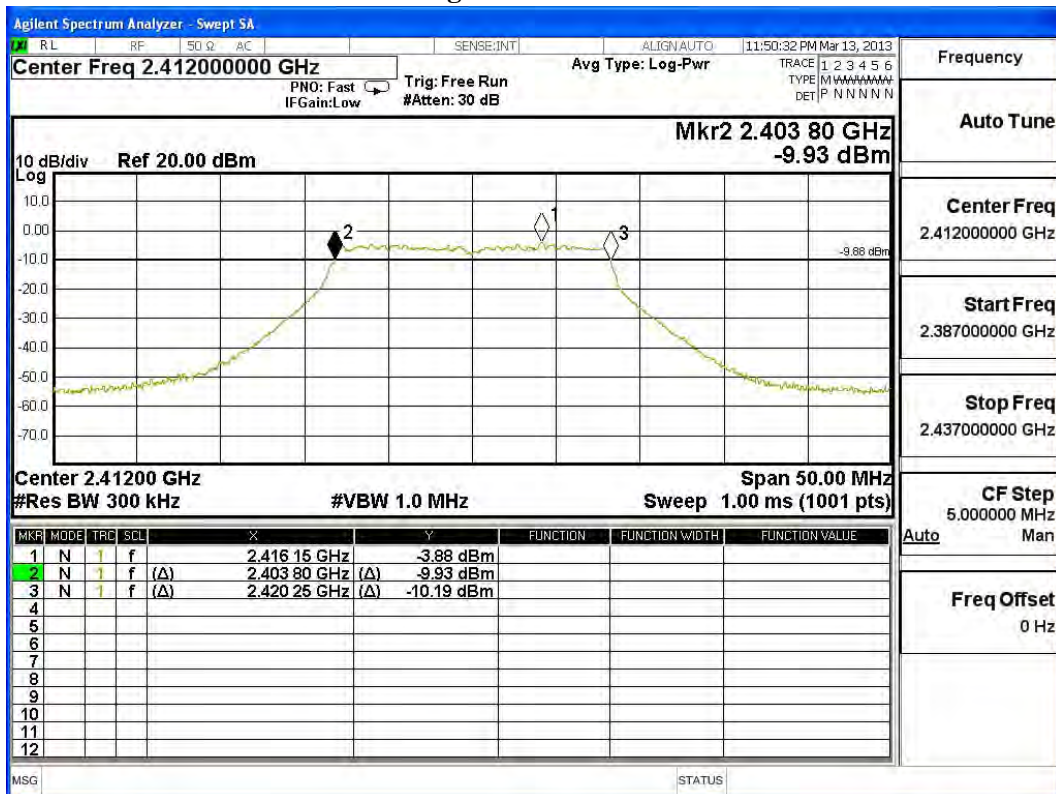

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6 | 2437 | 16500 | >500 | Pass |


Figure Channel 6:

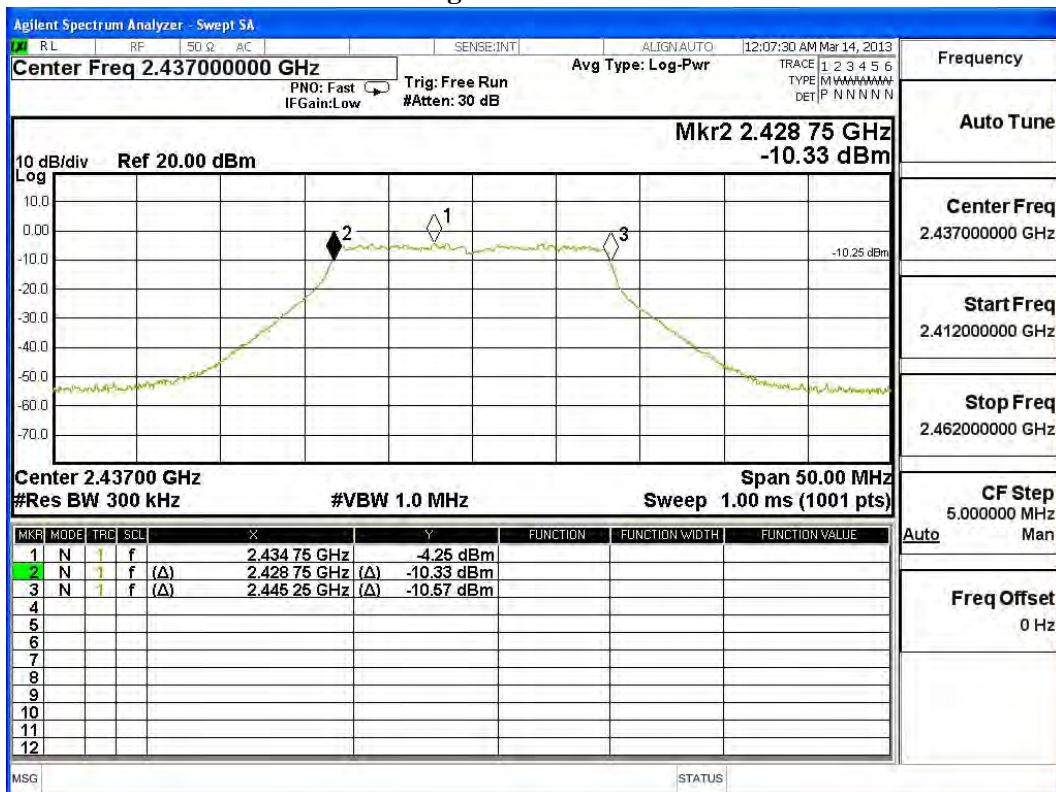

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Occupied Bandwidth Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (kHz) | Required Limit (kHz) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11 | 2462 | 16500 | >500 | Pass |

Figure Channel 11:

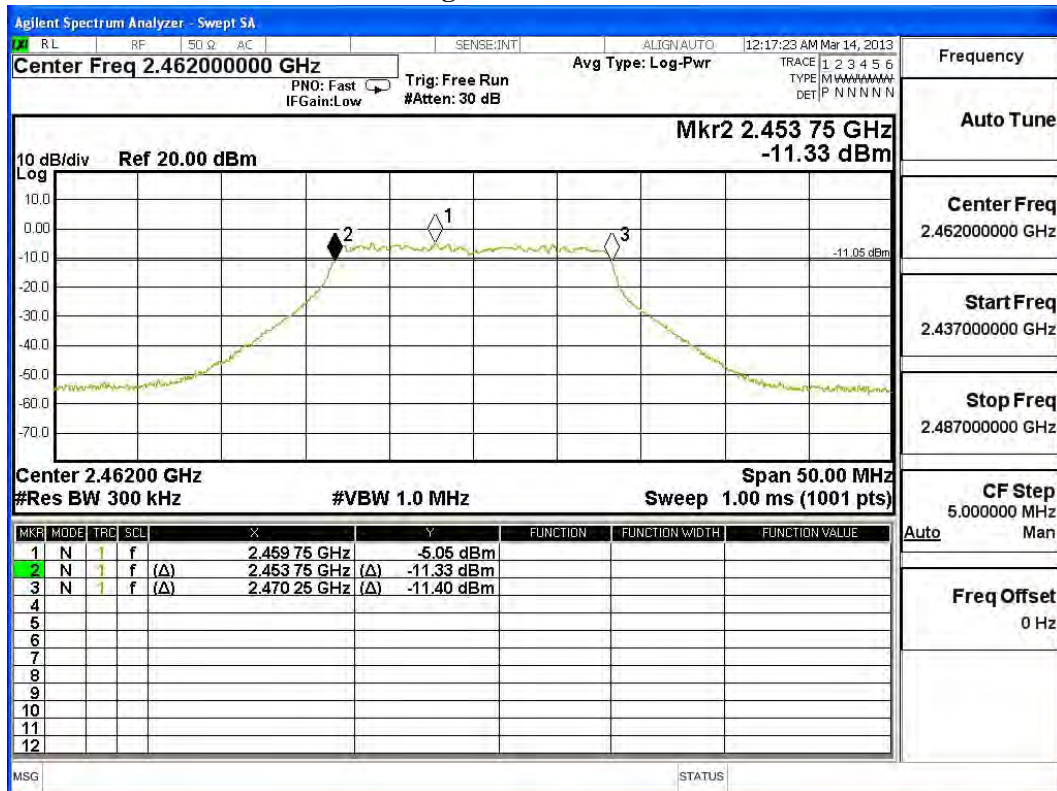

8. Power Density


8.1. Test Equipment

| | Equipment | Manufacturer | Model No./Serial No. | Last Cal. |
|---|-------------------|--------------|----------------------|------------|
| | Spectrum Analyzer | R&S | FSP40 / 100170 | Jun, 2012 |
| | Spectrum Analyzer | Agilent | E4407B / US39440758 | Jun, 2012 |
| X | Spectrum Analyzer | Agilent | N9010A / MY48030495 | Apr., 2012 |

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

8.2. Test Setup

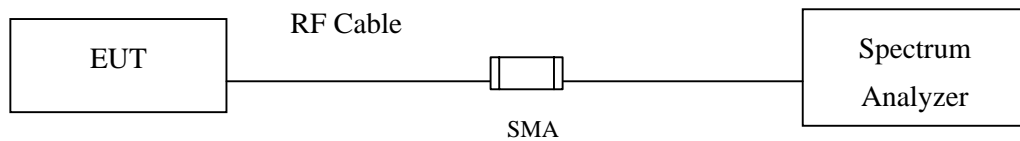

8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

8.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009; tested according to DTS test procedure of ANSI C63.10: 2009 for compliance to FCC 47CFR 15.247 requirements.

Set RBW= 100 kHz, VBW \geq 300KHz, SPAN to 5-30 % greater than the EBW,

Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{ kHz}) = -15.2\text{ dB}$.

8.5. Uncertainty


$\pm 1.27\text{ dB}$

8.6. Test Result of Power Density

Product : Infotainment System with Headunit (with BT, WLAN, Kler technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 1 | 2412 | -20.226 | < 8dBm | Pass |


Figure Channel 1:

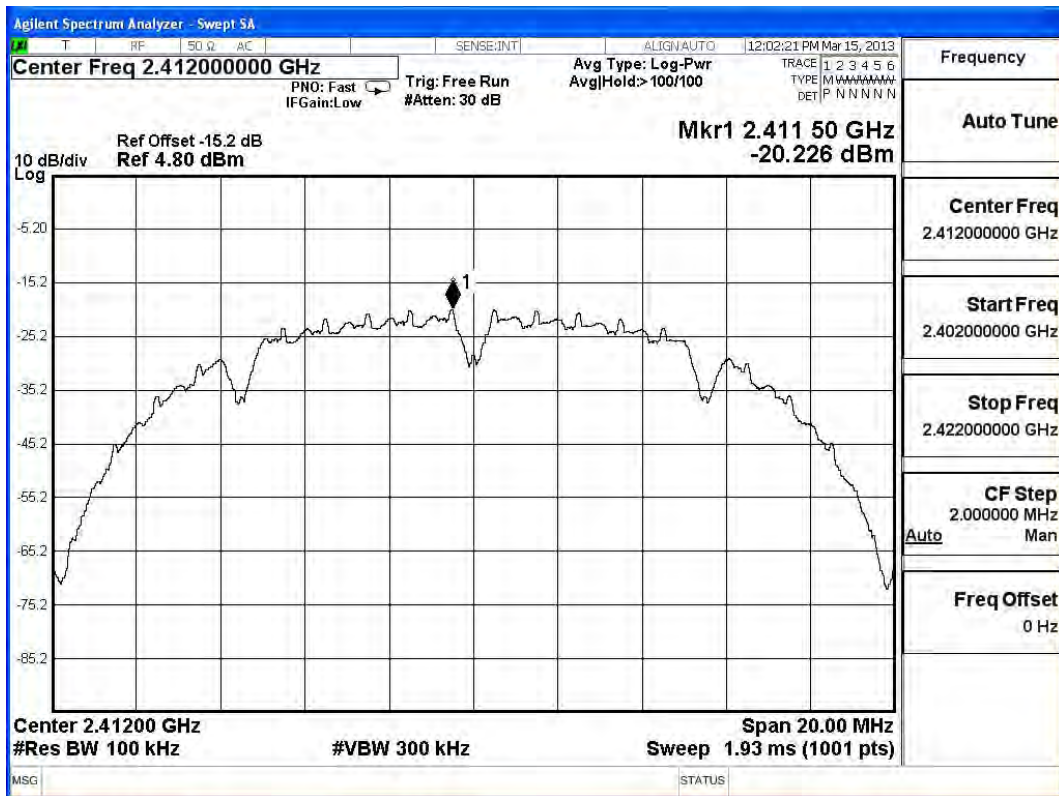

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (dBm) | Required Limit (dBm) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6 | 2437 | -20.877 | < 8dBm | Pass |


Figure Channel 6:

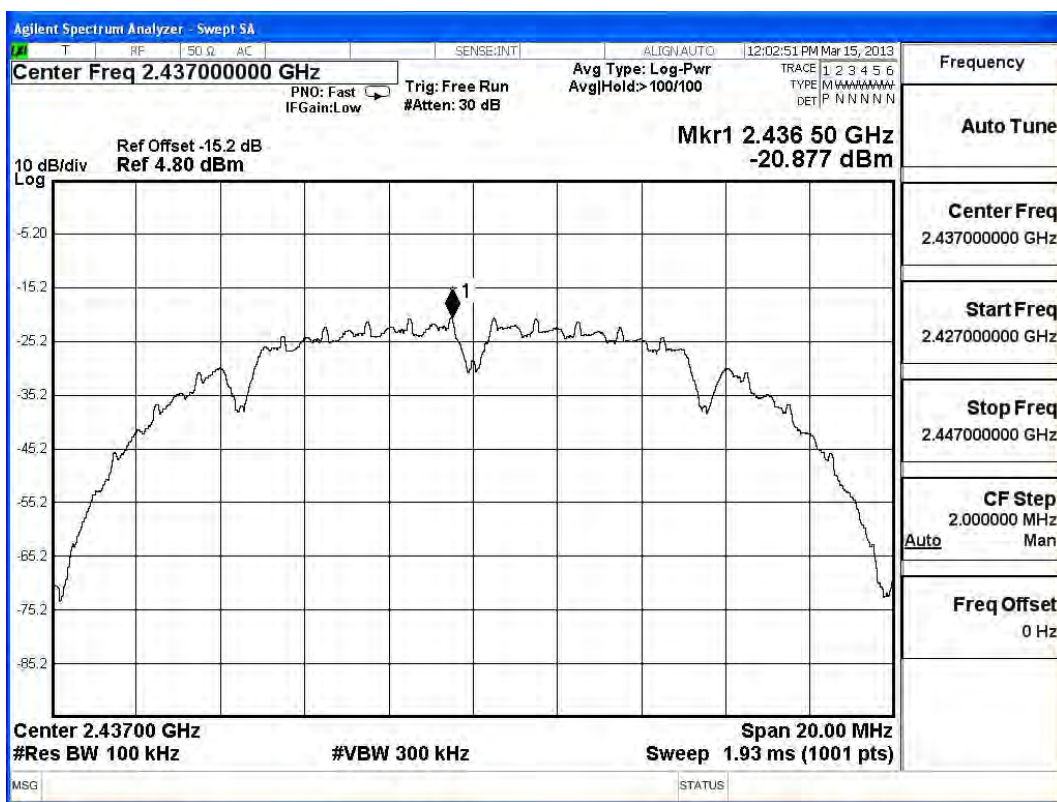

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (802.11b 1Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (dBm) | Required Limit (dBm) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11 | 2462 | -21.144 | < 8dBm | Pass |


Figure Channel 11:

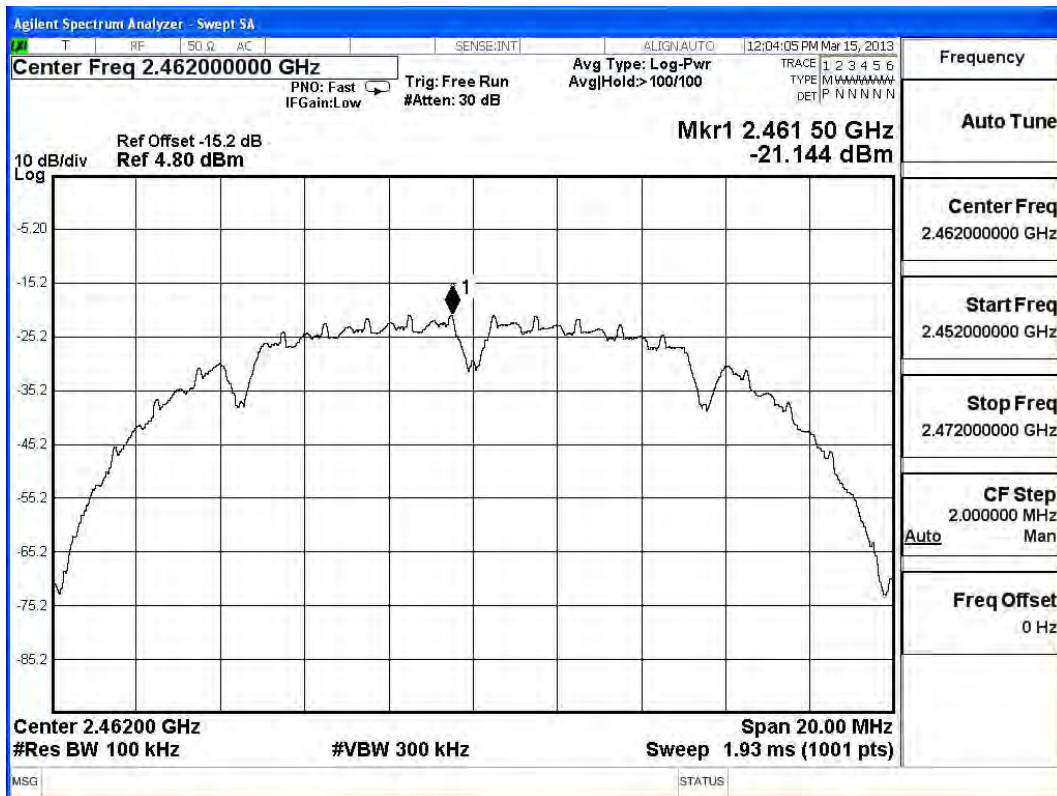

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2412MHz)

| Channel No. | Frequency (MHz) | Measure Level (dBm) | Limit (dBm) | Result |
|-------------|-----------------|---------------------|-------------|--------|
| 1 | 2412 | -24.581 | < 8dBm | Pass |


Figure Channel 1:

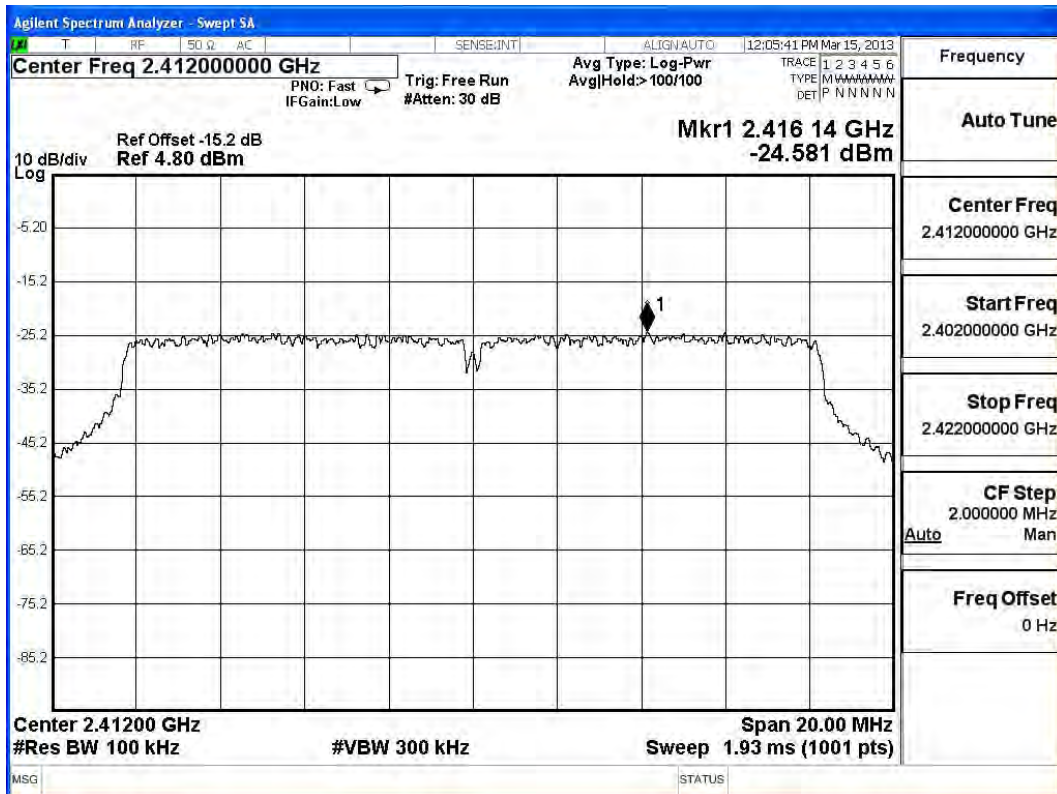

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Power Density Data
 Test Site : No.3OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2437MHz)

| Channel No. | Frequency (MHz) | Measurement Level (dBm) | Required Limit (dBm) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 6 | 2437 | -24.539 | < 8dBm | Pass |


Figure Channel 6:

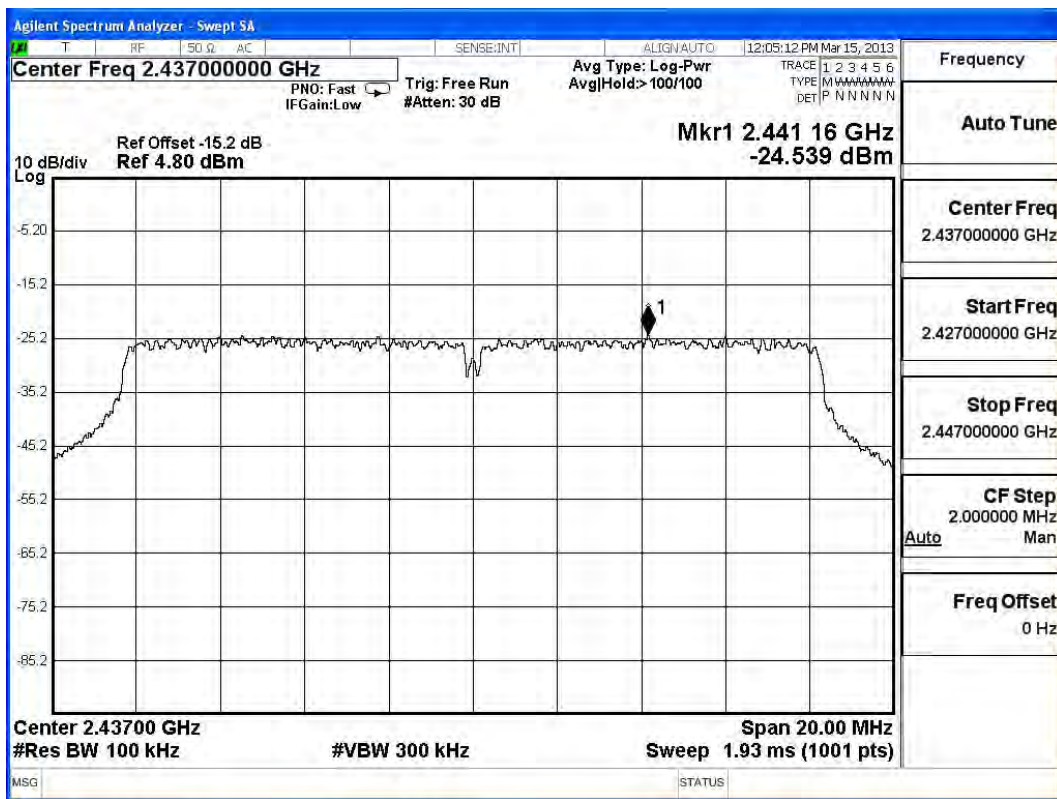

Product : Infotainment System with Headunit (with BT, WLAN, Klear technology)
 Test Item : Power Density Data
 Test Site : No.3 OATS
 Test Mode : Mode 2: Transmit (802.11g 6Mbps) (2462MHz)

| Channel No. | Frequency (MHz) | Measurement Level (dBm) | Required Limit (dBm) | Result |
|-------------|-----------------|-------------------------|----------------------|--------|
| 11 | 2462 | -25.847 | < 8dBm | Pass |

Figure Channel 11:

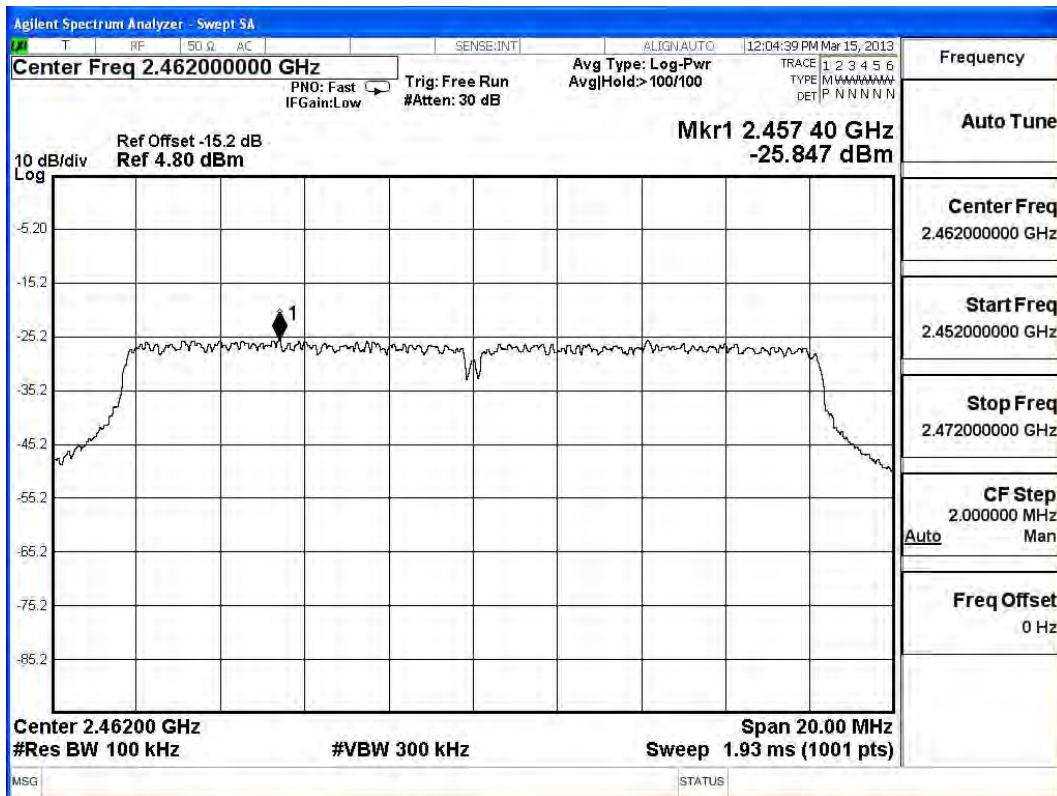

9. EMI Reduction Method During Compliance Testing

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs