

# FCC Measurement/Technical Report on

## Hardware for enhanced remote-, mobility- and emergency services HERMES 2.0

FCC ID: T8GHERMES2  
IC: 6434A-HERMES2

**Test Report Reference:** MDE\_HARMAN\_1731\_FCCb

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**  
Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/  
Managing Directors:  
Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

Registergericht/registered:  
Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

*www.7layers.com*

## Table of Contents

<b>1</b>	<b>Applied Standards and Test Summary</b>	<b>3</b>
1.1	Applied Standards	3
1.2	FCC-IC Correlation Table	4
1.3	Measurement Summary / Signatures	5
<b>2</b>	<b>Administrative Data</b>	<b>12</b>
2.1	Testing Laboratory	12
2.2	Project Data	12
2.3	Applicant Data	12
2.4	Manufacturer Data	12
<b>3</b>	<b>Test object Data</b>	<b>13</b>
3.1	General EUT Description	13
3.2	EUT Main components	13
3.3	Ancillary Equipment	14
3.4	Auxiliary Equipment	14
3.5	EUT Setups	15
3.6	Operating Modes	15
3.7	Product labelling	15
<b>4</b>	<b>Test Results</b>	<b>16</b>
4.1	26 dB Bandwidth	16
4.2	6 dB Bandwidth	20
4.3	99 % Bandwidth	24
4.4	Maximum Conducted Output Power	28
4.5	Peak Power Spectral Density	35
4.6	Undesirable Emissions; General Field Strength Limits	42
4.7	Band Edge	50
<b>5</b>	<b>Test Equipment</b>	<b>54</b>
<b>6</b>	<b>Antenna Factors, Cable Loss and Sample Calculations</b>	<b>57</b>
6.1	LISN R&S ESH3-Z5 (150 kHz – 30 MHz)	57
6.2	Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)	58
6.3	Antenna R&S HL562 (30 MHz – 1 GHz)	59
6.4	Antenna R&S HF907 (1 GHz – 18 GHz)	60
6.5	Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)	61
6.6	Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)	62
<b>7</b>	<b>Setup Drawings</b>	<b>63</b>
<b>8</b>	<b>Measurement Uncertainties</b>	<b>64</b>
<b>9</b>	<b>Photo Report</b>	<b>64</b>

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator (Digital Device / Spread Spectrum).

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-15 Edition) and 15 (10-1-15 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

Part 15, Subpart E – Unlicensed National Information Infrastructure Devices

§ 15.403 Definitions

§ 15.407 General technical requirements

#### Note:

The tests were selected and performed with reference to the FCC Public Notice "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02 General U-NII Test Procedures v01r03, 2016-08-22".

ANSI C63.10-2013 is applied.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules") is applied.

**Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.**

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for  
UNII / LE-LAN (e.g. WLAN 5 GHz) equipment  
from  
FCC and IC**

**UNII equipment**

<b>Measurement</b>	<b>FCC reference</b>	<b>IC reference</b>
Conducted emissions on AC Mains	§ 15.207	RSS-Gen Issue 4: 8.8
Occupied bandwidth	§ 15.403 (i) (26 dB) / § 15.407 (e) (6 dB)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1 (99%) RSS-247 Issue 2: 6.2.4.1 (6 dB)
Maximum conducted output power	§ 15.407 (a) (1),(2),(3),(4)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Maximum power spectral density	§ 15.407 (a) (1),(2),(3),(5)	RSS-247 Issue 2: 6.2.1.1, 6.2.2.1, 6.2.3.1, 6.2.4.1
Transmitter undesirable emissions; General Field Strength Limits, Restricted Bands	§ 15.407 (b) § 15.209 (a)	RSS-Gen Issue 4: 6.13/8.9/8.10; RSS-247 Issue 2: 3.3/6.2 6.2.1.2, 6.2.2.2, 6.2.3.2, 6.2.4.2
Frequency stability	§ 15.407 (g)	RSS-Gen Issue 4: 6.11/8.11
Transmit Power Control (TPC) and Dynamic Frequency Selection (DFS)	§ 15.407 (h)	RSS-247 Issue 2: 6.2.2.1, 6.2.3.1, 6.3
Antenna requirement	§ 15.203 / 15.204	RSS-Gen Issue 4: 8.3
Receiver spurious emissions	-	-

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.403 (i)

26 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-1	S01_AB01	Performed	N/A
WLAN a, high, U-NII-3	S01_AB01	Performed	N/A
WLAN a, low, U-NII-1	S01_AB01	Performed	N/A
WLAN a, low, U-NII-3	S01_AB01	Performed	N/A
WLAN a, mid, U-NII-1	S01_AB01	Performed	N/A
WLAN a, mid, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 20 MHz, high, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 20 MHz, high, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 20 MHz, low, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 20 MHz, low, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 20 MHz, mid, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 20 MHz, mid, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 40 MHz, high, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 40 MHz, high, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 40 MHz, low, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AB01	Performed	N/A
WLAN ac 80 MHz, mid, U-NII-1	S01_AB01	Performed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AB01	Performed	N/A
WLAN n 20 MHz, high, U-NII-1	S01_AB01	Performed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AB01	Performed	N/A
WLAN n 20 MHz, low, U-NII-1	S01_AB01	Performed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AB01	Performed	N/A
WLAN n 20 MHz, mid, U-NII-1	S01_AB01	Performed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AB01	Performed	N/A
WLAN n 40 MHz, high, U-NII-1	S01_AB01	Performed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AB01	Performed	N/A
WLAN n 40 MHz, low, U-NII-1	S01_AB01	Performed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AB01	Performed	N/A

#### 47 CFR CHAPTER I FCC PART 15 Subpart E §15.407

FCC §15.31, §15.407 (e)

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

#### Final Result

#### OP-Mode

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-3	S01_AB01	Passed	Passed
WLAN a, low, U-NII-3	S01_AB01	Passed	Passed
WLAN a, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-3	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, §15.407 (e)**

6 dB Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN ac 20 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, low, U-NII-3	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, IC RSS 247 Ch.  
6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN a, high, U-NII-1	S01_AB01	N/A	Performed
WLAN a, high, U-NII-3	S01_AB01	N/A	Performed
WLAN a, low, U-NII-1	S01_AB01	N/A	Performed
WLAN a, low, U-NII-3	S01_AB01	N/A	Performed
WLAN a, mid, U-NII-1	S01_AB01	N/A	Performed
WLAN a, mid, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 20 MHz, high, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 20 MHz, high, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 20 MHz, low, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 20 MHz, low, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 20 MHz, mid, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 20 MHz, mid, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 40 MHz, high, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 40 MHz, high, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 40 MHz, low, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 40 MHz, low, U-NII-3	S01_AB01	N/A	Performed
WLAN ac 80 MHz, mid, U-NII-1	S01_AB01	N/A	Performed
WLAN ac 80 MHz, mid, U-NII-3	S01_AB01	N/A	Performed
WLAN n 20 MHz, high, U-NII-1	S01_AB01	N/A	Performed
WLAN n 20 MHz, high, U-NII-3	S01_AB01	N/A	Performed
WLAN n 20 MHz, low, U-NII-1	S01_AB01	N/A	Performed
WLAN n 20 MHz, low, U-NII-3	S01_AB01	N/A	Performed
WLAN n 20 MHz, mid, U-NII-1	S01_AB01	N/A	Performed
WLAN n 20 MHz, mid, U-NII-3	S01_AB01	N/A	Performed
WLAN n 40 MHz, high, U-NII-1	S01_AB01	N/A	Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, IC RSS 247 Ch.  
6.2.x**

99 % Bandwidth

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN n 40 MHz, high, U-NII-3

WLAN n 40 MHz, low, U-NII-1

WLAN n 40 MHz, low, U-NII-3

**Setup**

S01\_AB01

S01\_AB01

S01\_AB01

**FCC**

N/A

N/A

N/A

**IC**

Performed

Performed

Performed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

WLAN a, high, U-NII-1

WLAN a, high, U-NII-3

WLAN a, low, U-NII-1

WLAN a, low, U-NII-3

WLAN a, mid, U-NII-1

WLAN a, mid, U-NII-3

WLAN ac 20 MHz MIMO, high, U-NII-1

WLAN ac 20 MHz MIMO, high, U-NII-3

WLAN ac 20 MHz MIMO, low, U-NII-1

WLAN ac 20 MHz MIMO, low, U-NII-3

WLAN ac 20 MHz MIMO, mid, U-NII-1

WLAN ac 20 MHz MIMO, mid, U-NII-3

WLAN ac 20 MHz, high, U-NII-1

WLAN ac 20 MHz, high, U-NII-3

WLAN ac 20 MHz, low, U-NII-1

WLAN ac 20 MHz, low, U-NII-3

WLAN ac 20 MHz, mid, U-NII-1

WLAN ac 20 MHz, mid, U-NII-3

WLAN ac 40 MHz MIMO, high, U-NII-1

WLAN ac 40 MHz MIMO, high, U-NII-3

WLAN ac 40 MHz MIMO, low, U-NII-1

WLAN ac 40 MHz MIMO, low, U-NII-3

WLAN ac 40 MHz, high, U-NII-1

WLAN ac 40 MHz, high, U-NII-3

WLAN ac 40 MHz, low, U-NII-1

WLAN ac 40 MHz, low, U-NII-3

WLAN ac 80 MHz MIMO, mid, U-NII-1

WLAN ac 80 MHz MIMO, mid, U-NII-3

WLAN ac 80 MHz, mid, U-NII-1

WLAN ac 80 MHz, mid, U-NII-3

WLAN n 20 MHz MIMO, high, U-NII-1

WLAN n 20 MHz MIMO, high, U-NII-3

**Setup**

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

S01\_AB01

**FCC**

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

Passed

**IC**

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

N/A

Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (a)(1)**

Maximum Conducted Output Power

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Subband			
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz MIMO, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz MIMO, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E**  
**§15.407**

**FCC §15.31, §15.407 (a)**  
**(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

**Final Result**

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
Radio Technology, Operating Frequency, Subband			
WLAN a, high, U-NII-1	S01_AB01	Passed	N/A
WLAN a, high, U-NII-3	S01_AB01	Passed	Passed
WLAN a, low, U-NII-1	S01_AB01	Passed	N/A
WLAN a, low, U-NII-3	S01_AB01	Passed	Passed
WLAN a, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN a, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz MIMO, high, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 20 MHz MIMO, high, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 20 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz MIMO, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 20 MHz MIMO, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 20 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 20 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 20 MHz, mid, U-NII-1	S01_AB01	Passed	N/A



**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.31, §15.407 (a)  
(1),(5)**

Peak Power Spectral Density

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

OP-Mode	Setup	FCC	IC
WLAN ac 20 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz MIMO, high, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 40 MHz MIMO, high, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 40 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 40 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 80 MHz MIMO, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN ac 80 MHz, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz MIMO, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz MIMO, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz MIMO, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 20 MHz, mid, U-NII-1	S01_AB01	Passed	N/A
WLAN n 20 MHz, mid, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz MIMO, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz MIMO, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz MIMO, low, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, high, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AB01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AB01	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AB01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4); FCC §15.205,  
§15.209, §15.407 (b) (5),(6)**

Undesirable Emissions; General Field Strength Limits

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Measurement range, Subband

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
WLAN a, high, 1GHz - 26GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN a, high, 1GHz - 26GHz, U-NII-3	S01_AC01	Passed	Passed
WLAN a, low, 1GHz - 26GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN a, low, 1GHz - 26GHz, U-NII-3	S01_AC01	Passed	Passed
WLAN a, mid, 1GHz - 26GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN a, mid, 1GHz - 26GHz, U-NII-3	S01_AC01	Passed	Passed
WLAN a, mid, 26GHz - 40GHz, U-NII-1	S01_AD01	Passed	N/A
WLAN a, mid, 26GHz - 40GHz, U-NII-3	S01_AD01	Passed	Passed
WLAN a, mid, 30MHz - 1GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN a, mid, 30MHz - 1GHz, U-NII-3	S01_AC01	Passed	Passed
WLAN a, mid, 9kHz - 30MHz, U-NII-1	S01_AC01	Passed	N/A
WLAN a, mid, 9kHz - 30MHz, U-NII-3	S01_AC01	Passed	Passed
WLAN n 20 MHz MIMO, mid, 1GHz - 26GHz, U-NII-1 Remark: tested in the range 1-18GHz	S01_AD01	Passed	N/A
WLAN n 20 MHz MIMO, mid, 1GHz - 26GHz, U-NII-3 Remark: tested in the range 1-18GHz	S01_AD01	Passed	Passed
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-1 Remark: tested in the range 1-18GHz	S01_AC01	Passed	N/A
WLAN n 20 MHz, high, 1GHz - 26GHz, U-NII-3 Remark: tested in the range 1-18GHz	S01_AC01	Passed	Passed
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-1 Remark: tested in the range 1-18GHz	S01_AC01	Passed	N/A
WLAN n 20 MHz, low, 1GHz - 26GHz, U-NII-3 Remark: tested in the range 1-18GHz	S01_AC01	Passed	Passed
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-1 Remark: tested in the range 1-18GHz	S01_AC01	Passed	N/A
WLAN n 20 MHz, mid, 1GHz - 26GHz, U-NII-3 Remark: tested in the range 1-18GHz	S01_AC01	Passed	Passed
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN n 40 MHz, high, 1GHz - 26GHz, U-NII-3	S01_AC01	Passed	Passed
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-1	S01_AC01	Passed	N/A
WLAN n 40 MHz, low, 1GHz - 26GHz, U-NII-3	S01_AC01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10

**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

<b>OP-Mode</b>	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
WLAN a, high, U-NII-3	S01_AC01	Passed	Passed
WLAN a, low, U-NII-1	S01_AC01	Passed	N/A
WLAN a, low, U-NII-3	S01_AC01	Passed	Passed

**47 CFR CHAPTER I FCC PART 15 Subpart E  
§15.407**

**FCC §15.407 (b),  
(1),(2),(3),(4)**

Band Edge

The measurement was performed according to ANSI C63.10


**Final Result**

**OP-Mode**

Radio Technology, Operating Frequency, Subband

	<b>Setup</b>	<b>FCC</b>	<b>IC</b>
WLAN ac 20 MHz, high, U-NII-3	S01_AC01	Passed	Passed
WLAN ac 20 MHz, low, U-NII-1	S01_AC01	Passed	N/A
WLAN ac 20 MHz, low, U-NII-3	S01_AC01	Passed	Passed
WLAN ac 40 MHz, high, U-NII-3	S01_AC01	Passed	Passed
WLAN ac 40 MHz, low, U-NII-1	S01_AC01	Passed	N/A
WLAN ac 40 MHz, low, U-NII-3	S01_AC01	Passed	Passed
WLAN ac 80 MHz MIMO, mid, U-NII-1	S01_AD01	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-1	S01_AC01	Passed	N/A
WLAN ac 80 MHz, mid, U-NII-3	S01_AC01	Passed	Passed
WLAN n 20 MHz MIMO, high, U-NII-3	S01_AC01	Passed	Passed
WLAN n 20 MHz MIMO, low, U-NII-1	S01_AD01	Passed	N/A
WLAN n 20 MHz MIMO, low, U-NII-3	S01_AC01	Passed	Passed
WLAN n 20 MHz, high, U-NII-3	S01_AC01	Passed	Passed
WLAN n 20 MHz, low, U-NII-1	S01_AC01	Passed	N/A
WLAN n 20 MHz, low, U-NII-3	S01_AC01	Passed	Passed
WLAN n 40 MHz MIMO, low, U-NII-1	S01_AD01	Passed	N/A
WLAN n 40 MHz, high, U-NII-3	S01_AC01	Passed	Passed
WLAN n 40 MHz, low, U-NII-1	S01_AC01	Passed	N/A
WLAN n 40 MHz, low, U-NII-3	S01_AC01	Passed	Passed

N/A: Not applicable  
N/P: Not performed

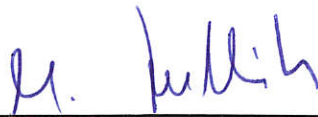

(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik



(responsible for testing and report)  
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

## 2 ADMINISTRATIVE DATA

### 2.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

This facility has been fully described in a report submitted to the ISED and accepted under the registration number: Site# 3699A-1.

The test facility is also accredited by the following accreditation organisation:

Laboratory accreditation no: DAKkS D-PL-12140-01-00  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146  
Responsible for accreditation scope: Dipl.-Ing. Marco Kullik  
Report Template Version: 2018-01-10

### 2.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2018-05-18  
Testing Period: 2018-03-09 to 2018-04-27

### 2.3 APPLICANT DATA

Company Name: Harman Becker Automotive Systems GmbH  
Address: Becker-Görling-Str. 16  
76307 Karlsbad  
Germany  
Contact Person: Mr. Simon Voegele

### 2.4 MANUFACTURER DATA

Company Name: Please see applicant data  
Address:  
Contact Person:

### 3 TEST OBJECT DATA

#### 3.1 GENERAL EUT DESCRIPTION

Kind of Device product description	Hardware for Enhanced Remote-, Mobility- & Emergency Services
Product name	HERMES 2.0
Type	HERMES 2.0
<b>Declared EUT data by the supplier</b>	
Voltage Type	DC
Voltage Level	12 V
Tested Modulation Type	OFDM:BPSK
General product description	The EUT is a Hardware for Enhanced Remote-, Mobility- & Emergency Services. It provides different telematic services and is the interface between different types of Daimler car headunits and the public network. It supports WLAN in the 2.4 and 5 GHz band
Specific product description	WLAN mode a, n20/40 and ac20/40/80 MHz are supported in the 5 GHz band by the device. Since DFS is not supported, only the bands 1 and 3 are supported. Band 1 is not supported for IC.
Ports of the device	Cellular Main Cellular Diversity GNSS Cable Harness incl. DC
Antenna 1	Integral / 4 dBi
Antenna 2	Integral / 4.4 dBi
Tested Datarates	WLAN a: 6 Mbps WLAN n/ac: MCS0
Special software used for testing	The ADB shell was used to start a local TX script on the EUT provided by the applicant.

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

#### 3.2 EUT MAIN COMPONENTS

Sample Name	Sample Code	Description
EUT A	DE1009029ab01	Conducted Sample
Sample Parameter	Value	
Serial No.		
HW Version	D3 sample (HW 17/37)	
SW Version	E221.10a (SVN: 03)	
Comment		
Integral Antenna	Replaced by temporary SMA connector	

Sample Name	Sample Code	Description
EUT B	DE1009029ac01	Radiated Sample
Sample Parameter	Value	
Serial No.	HS000325	
HW Version	D3 sample (HW 17/37)	
SW Version	E221.10a (SVN: 03)	
Comment		
Integral Antenna	5.2 dBi in 2.4 GHz band, 4.4 dBi in 5 GHz band	

Sample Name	Sample Code	Description
EUT C	DE1009029ad02	Radiated Sample
Sample Parameter	Value	
Serial No.	JS000561	
HW Version	D3 sample (HW 17/37)	
SW Version	RL_Her2_333.40a_18133AD2	
Comment		
Integral Antenna	5.2 dBi in 2.4 GHz band, 4.4 dBi in 5 GHz band	

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 3.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Device	Details (Manufacturer, Type Model, OUT Code)	Description
-	-	-

### 3.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

Device	Details (Manufacturer, HW, SW, S/N)	Description
AUX1	Mercedes-Benz A 156 905 09 02, 500110114217809278	Cellular Antenna
AUX2	Mercedes-Benz A 156 905 09 02, 500110114217809176	Cellular Antenna
AUX3	UBLOX ANN-MS-0-005, -, -, 410094	GNSS Antenna

### 3.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

<b>Setup</b>	<b>Combination of EUTs</b>	<b>Description and Rationale</b>
S01_AC01	EUT B, AUX 1 - 3	Radiated Setup
S01_AB01	EUT A	Conducted Setup
S01_AD01	EUT C, AUX 1 - 3	Radiated Setup

### 3.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

#### 3.6.1 TEST CHANNELS

<b>U-NII-Subband 1 5150 - 5250 MHz</b>			<b>U-NII-Subband 3 5725 - 5850 MHz</b>			<b>Nom. BW</b>
<b>low</b>	<b>mid</b>	<b>high</b>	<b>low</b>	<b>mid</b>	<b>high</b>	<b>20 MHz</b>
36	44	48	149	157	165	<b>Ch.-No.</b>
5180	5220	5240	5745	5785	5825	<b>MHz</b>

<b>low</b>	<b>mid</b>	<b>high</b>	<b>low</b>	<b>mid</b>	<b>high</b>	<b>40 MHz</b>
38	-	46	151	-	159	<b>Ch.-No.</b>
5190	-	5230	5755	-	5795	<b>MHz</b>
<b>low</b>	<b>mid</b>	<b>high</b>	<b>low</b>	<b>mid</b>	<b>high</b>	<b>80 MHz</b>
-	42	-	-	155	-	<b>Ch.-No.</b>
-	5210	-	-	5775	-	<b>MHz</b>

### 3.7 PRODUCT LABELLING

#### 3.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

#### 3.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.

## 4 TEST RESULTS

### 4.1 26 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

#### 4.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): initially approx. 1 % of nominal emission bandwidth
- Video Bandwidth (VBW): > RBW
- Span: 30 / 60 / 120 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweeptime: 5 ms
- Detector: Sample

#### 4.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.403 (i)

There exist no applicable limits for the U-NII subbands 1, 2A and 2C. The test was performed to determine the limits for the "Maximum Conducted Output Power" test case. Therefore no result was applied.



### 4.1.3 TEST PROTOCOL


Ambient temperature: 23 °C  
 Air Pressure: 1010 hPa  
 Humidity: 42 %

Radio Technology	Operating Frequency	Subband	26 dB Bandwidth [MHz]
WLAN a	low	U-NII-1	24.9
WLAN a	mid	U-NII-1	26.2
WLAN a	high	U-NII-1	23.2
WLAN a	low	U-NII-3	25.5
WLAN a	mid	U-NII-3	27.3
WLAN a	high	U-NII-3	23.6
WLAN n 20 MHz	low	U-NII-1	24.9
WLAN n 20 MHz	mid	U-NII-1	24.1
WLAN n 20 MHz	high	U-NII-1	23.2
WLAN n 20 MHz	low	U-NII-3	<b>30.5</b>
WLAN n 20 MHz	mid	U-NII-3	23.9
WLAN n 20 MHz	high	U-NII-3	23.6
WLAN n 40 MHz	low	U-NII-1	42.7
WLAN n 40 MHz	high	U-NII-1	<b>52.6</b>
WLAN n 40 MHz	low	U-NII-3	48.3
WLAN n 40 MHz	high	U-NII-3	51.1
WLAN ac 20 MHz	low	U-NII-1	24.4
WLAN ac 20 MHz	mid	U-NII-1	25.3
WLAN ac 20 MHz	high	U-NII-1	22.7
WLAN ac 20 MHz	low	U-NII-3	23.7
WLAN ac 20 MHz	mid	U-NII-3	22.1
WLAN ac 20 MHz	high	U-NII-3	22.0
WLAN ac 40 MHz	low	U-NII-1	44.2
WLAN ac 40 MHz	high	U-NII-1	50.2
WLAN ac 40 MHz	low	U-NII-3	49.2
WLAN ac 40 MHz	high	U-NII-3	52.1
WLAN ac 80 MHz	mid	U-NII-1	94.7
WLAN ac 80 MHz	mid	U-NII-3	<b>96.8</b>


Remark: Please see next sub-clause for the measurement plot.

#### 4.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AB01)

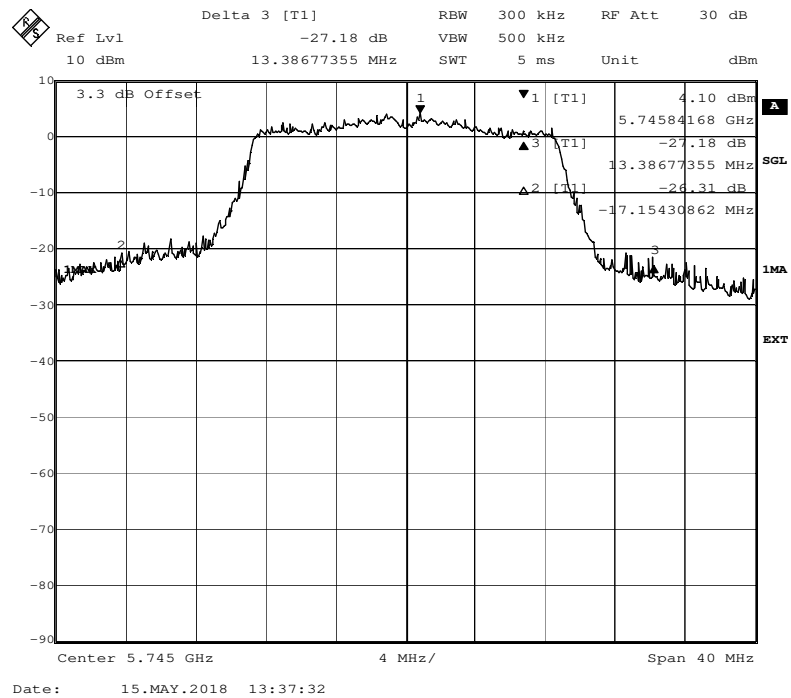

Radio Technology = WLAN n 40 MHz, Operating Frequency = high, Subband = U-NII-1 (S01\_AB01)

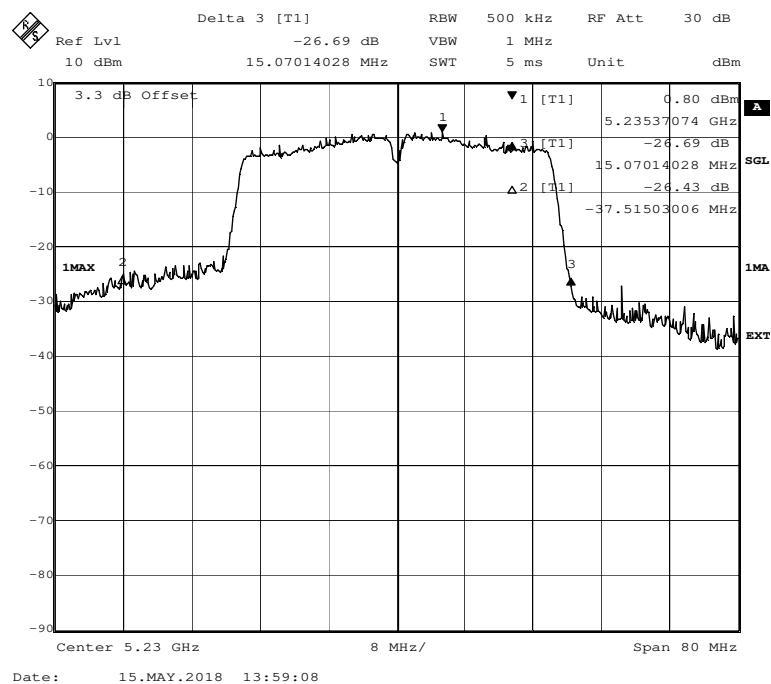

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3 (S01\_AB01)

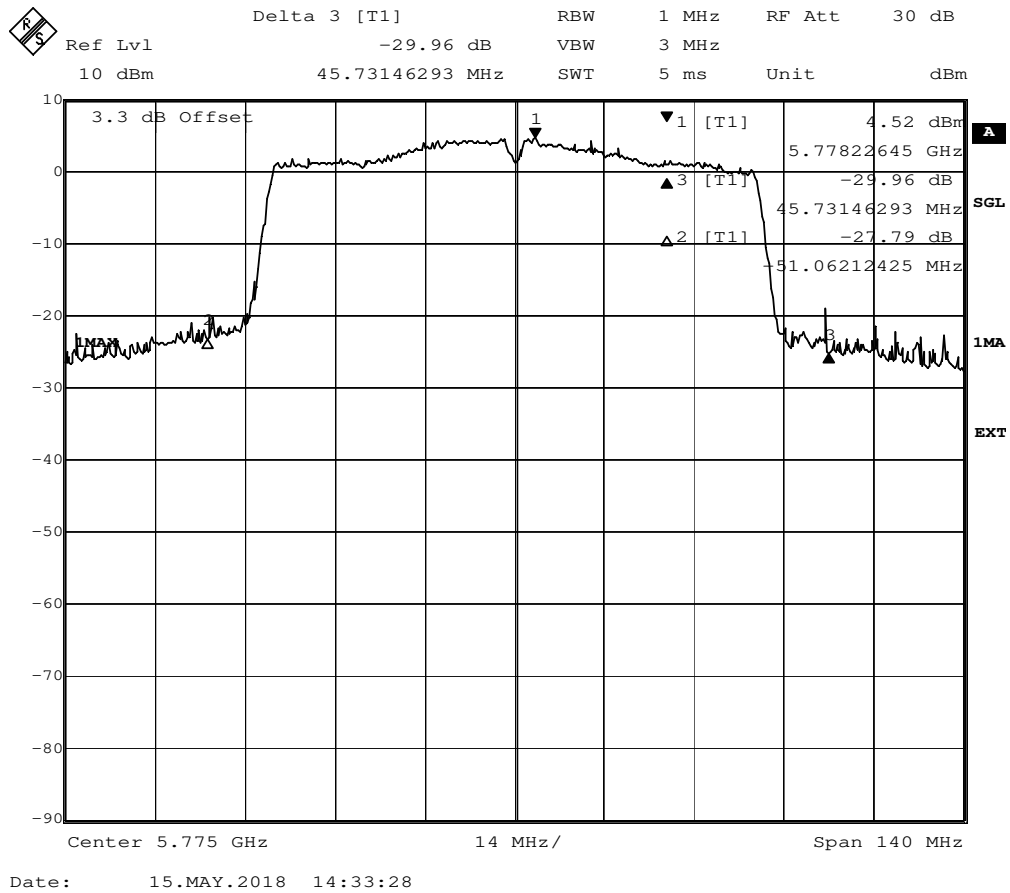

#### 4.1.5 TEST EQUIPMENT USED

- Regulatory WLAN RF Test Solution

## 4.2 6 DB BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was setup in a shielded room to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Span: 30 / 50 MHz (for 20 / 40 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweeptime: see plots
- Detector: Peak

### 4.2.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart E, §15.407 (e)

Within the 5.725-5.850 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.


### 4.2.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1010 hPa  
 Humidity: 42 %


Radio Technology	Operating Frequency	6 dB Bandwidth [MHz]	Limit [MHz]	Margin [MHz]
WLAN a	low	16.5	0.5	16.0
WLAN a	mid	<b>16.5</b>	0.5	16.0
WLAN a	high	16.5	0.5	16.0
WLAN n 20 MHz	low	17.7	0.5	17.2
WLAN n 20 MHz	mid	17.7	0.5	17.2
WLAN n 20 MHz	high	17.7	0.5	17.2
WLAN n 40 MHz	low	36.2	0.5	35.7
WLAN n 40 MHz	high	36.1	0.5	35.6
WLAN ac 20 MHz	low	17.7	0.5	17.2
WLAN ac 20 MHz	mid	17.7	0.5	17.2
WLAN ac 20 MHz	high	17.7	0.5	17.2
WLAN ac 40 MHz	low	<b>36.0</b>	0.5	35.5
WLAN ac 40 MHz	high	36.1	0.5	35.6
WLAN ac 80 MHz	mid	<b>76.0</b>	0.5	75.5

Remark: Please see next sub-clause for the measurement plot.


4.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")  
 Radio Technology = WLAN a, Operating Frequency = mid, Subband = U-NII-3  
 (S01\_AB01)

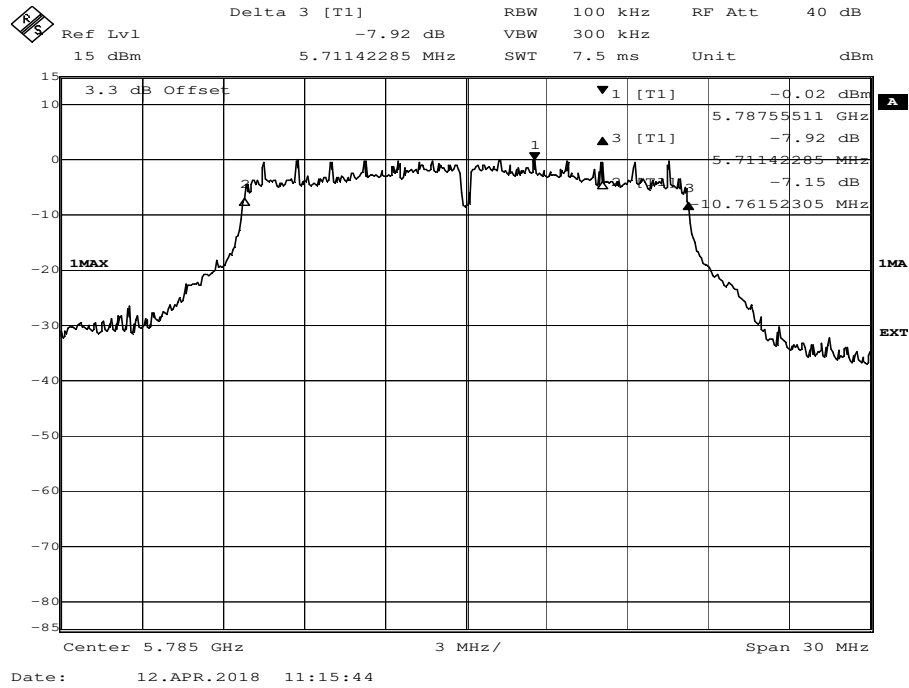

Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-3  
 (S01\_AB01)

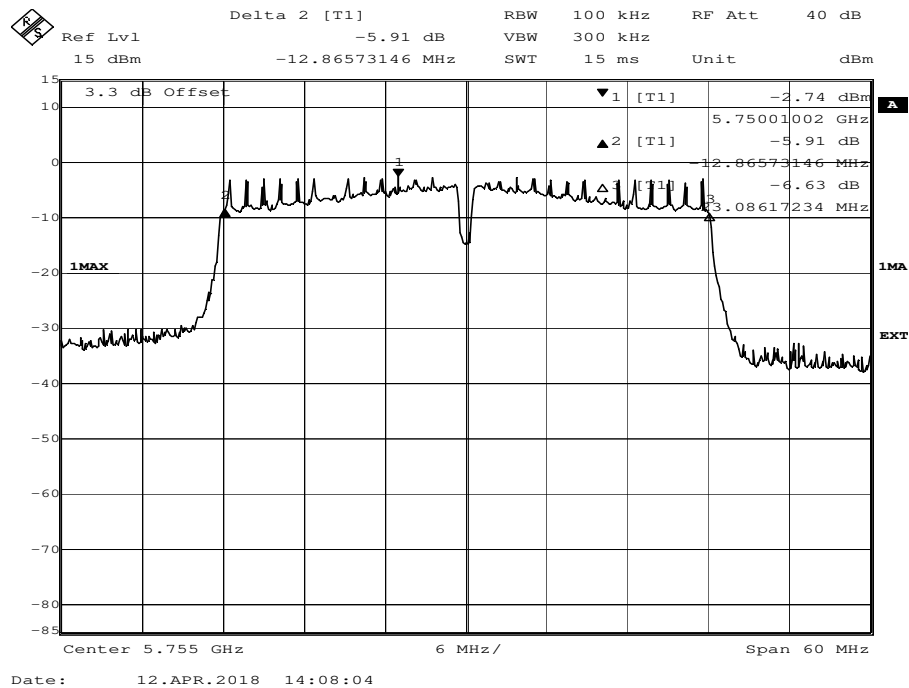

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-3  
(S01\_AB01)

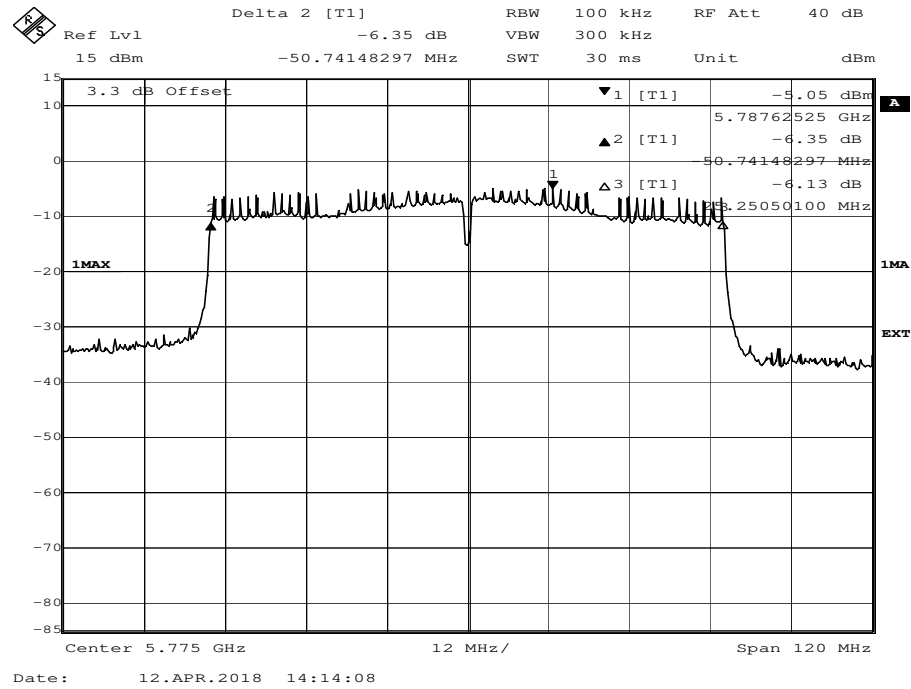

#### 4.2.5 TEST EQUIPMENT USED

- Regulatory WLAN RF Test Solution

## 4.3 99 % BANDWIDTH

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (widest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): approx.  $\geq 1$  % of the span, but not below
- Video Bandwidth (VBW):  $\geq 3$  times the RBW
- Span: 30 / 60 / 120 / 320 MHz (for 20 / 40 / 80 / 160 MHz nominal bandwidth)
- Trace: Maxhold
- Sweeps: 2000
- Sweeptime: 5 ms
- Detector: Sample

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

### 4.3.2 TEST REQUIREMENTS / LIMITS

No applicable limit:



### 4.3.3 TEST PROTOCOL


Ambient temperature: 23 °C  
Air Pressure: 1010 hPa  
Humidity: 42 %

Radio Technology	Operating Frequency	Subband	99% Bandwidth [MHz]
WLAN a	low	U-NII-1	17.8
WLAN a	mid	U-NII-1	17.8
WLAN a	high	U-NII-1	17.8
WLAN a	low	U-NII-3	17.7
WLAN a	mid	U-NII-3	17.7
WLAN a	high	U-NII-3	17.8
WLAN n 20 MHz	low	U-NII-1	18.9
WLAN n 20 MHz	mid	U-NII-1	18.5
WLAN n 20 MHz	high	U-NII-1	18.7
WLAN n 20 MHz	low	U-NII-3	18.7
WLAN n 20 MHz	mid	U-NII-3	18.9
WLAN n 20 MHz	high	U-NII-3	18.6
WLAN n 40 MHz	low	U-NII-1	36.2
WLAN n 40 MHz	high	U-NII-1	36.4
WLAN n 40 MHz	low	U-NII-3	<b>36.4</b>
WLAN n 40 MHz	high	U-NII-3	36.4
WLAN ac 20 MHz	low	U-NII-1	18.7
WLAN ac 20 MHz	mid	U-NII-1	<b>19.4</b>
WLAN ac 20 MHz	high	U-NII-1	18.7
WLAN ac 20 MHz	low	U-NII-3	18.9
WLAN ac 20 MHz	mid	U-NII-3	18.8
WLAN ac 20 MHz	high	U-NII-3	18.9
WLAN ac 40 MHz	low	U-NII-1	36.3
WLAN ac 40 MHz	high	U-NII-1	36.4
WLAN ac 40 MHz	low	U-NII-3	36.3
WLAN ac 40 MHz	high	U-NII-3	36.4
WLAN ac 80 MHz	mid	U-NII-1	<b>76.0</b>
WLAN ac 80 MHz	mid	U-NII-3	75.8


Remark: Please see next sub-clause for the measurement plot.

#### 4.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-3 (S01\_AB01)

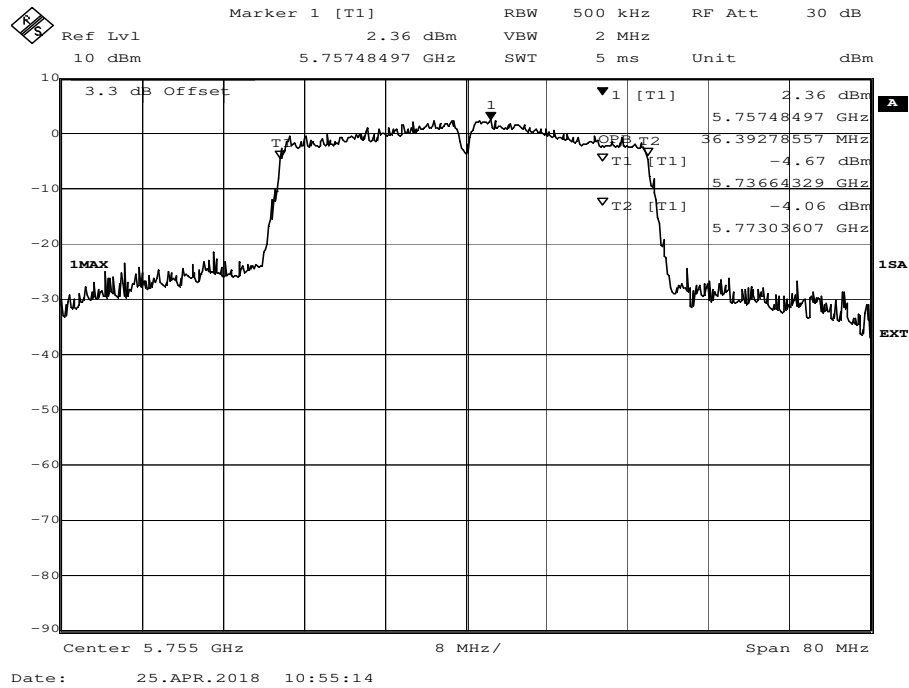

Radio Technology = WLAN ac 20 MHz, Operating Frequency = mid, Subband = U-NII-1 (S01\_AB01)

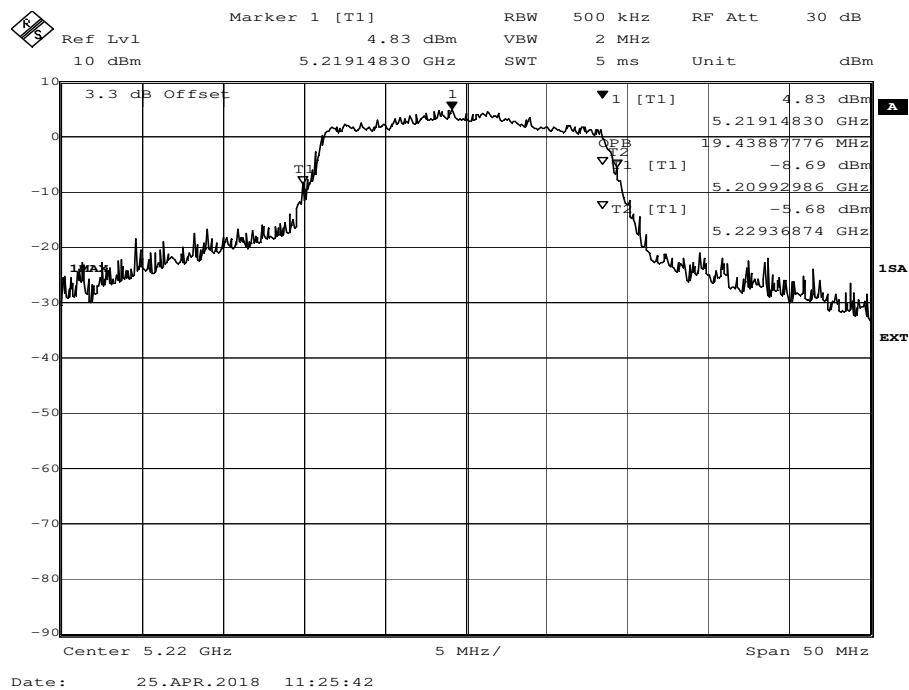

Radio Technology = WLAN ac 80 MHz, Operating Frequency = mid, Subband = U-NII-1 (S01\_AB01)

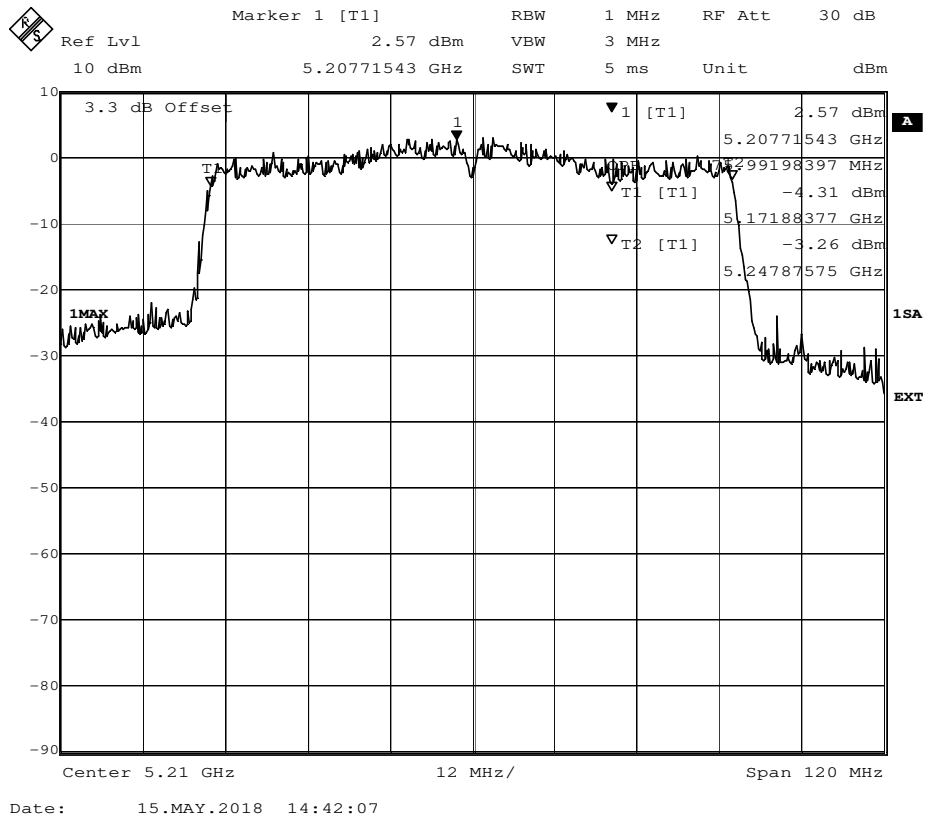

#### 4.3.5 TEST EQUIPMENT USED

- Regulatory WLAN RF Test Solution

## 4.4 MAXIMUM CONDUCTED OUTPUT POWER

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweeptime: 5 ms
- Detector: RMS
- Trigger: gated mode

The channel power function of the spectrum analyser was used (Used channel bandwidth = nominal bandwidth)

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

### 4.4.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

§15.407 (a) (1)

Limit: 50 mW (17 dBm) or 4 dBm + 10 log (26 dB bandwidth/MHz) whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (1) (i): Outdoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

§15.407 (a) (1) (ii): Indoor access point:

Limit: 1 W (30 dBm) provided the maximum antenna gain does not exceed 6 dBi.

§15.407 (a) (1) (iv): Mobile and portable client devices:

Limit: 250 mW (24 dBm) provided the maximum antenna gain does not exceed 6 dBi.

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

§15.407 (a) (2)

Limit: 250 mW (24 dBm) or  $11 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

§15.407 (a) (3)

Limit: 1 W (30 dBm) or  $17 \text{ dBm} + 10 \log (26 \text{ dB bandwidth/MHz})$  whatever is the lesser.

FCC ET Docket No. 13-49, FIRST REPORT AND ORDER, April 1, 2014 ("new rules"):

§15.407 (a) (3):

Limit: 1 W (30 dBm).

§15.407 (a) (4):

The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

## **B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:

Limit (e.i.r.p.): 200 mW (23 dBm) or  $10 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

B is the 99% emission bandwidth in MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

Note: For EUTs operating at a higher e.i.r.p. than 200 mW (23 dBm), compliance with the e.i.r.p. elevation mask is required.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:

Limits:

Maximum conducted Power: 250 mW (24 dBm) or  $11 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 1.0 W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

RSS-247, 6.2.4 (1), Band 5725-5825 MHz:

Limits:

Maximum conducted Power: 1W (30 dBm) or  $17 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

e.i.r.p.: 4.0 W (36 dBm) or  $23 + 10 \log_{10} B \text{ [dBm]}$ , whichever power is less.

All frequency bands: B is the 99% emission bandwidth in MHz.

### 4.4.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1010 hPa  
 Humidity: 42 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	36	5180	11.0	15.4	24.0	13.0	N/A		N/A	N/A	1)
	44	5220	10.6	15.0	24.0	13.4	N/A		N/A	N/A	1)
	48	5240	10.9	15.3	24.0	13.1	N/A		N/A	N/A	1)
3	149	5745	11.4	15.8	30.0	18.6	30.0	18.6	36.0	20.2	
	157	5785	11.6	16.0	30.0	18.4	30.0	18.4	36.0	20.0	
	165	5825	11.7	16.1	30.0	18.3	30.0	18.3	36.0	19.9	

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	36	5180	11.0	15.4	24.0	13.0	N/A		N/A	N/A	1)
	44	5220	10.3	14.7	24.0	13.7	N/A		N/A	N/A	1)
	48	5240	10.7	15.1	24.0	13.3	N/A		N/A	N/A	1)
3	149	5745	11.1	15.5	30.0	18.9	30.0	18.9	36.0	20.5	
	157	5785	11.3	15.7	30.0	18.7	30.0	18.7	36.0	20.3	
	165	5825	11.3	15.7	30.0	18.7	30.0	18.7	36.0	20.3	

WLAN n-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	ANT1 [dBm]	ANT2 [dBm]	
1	36	5180	14.1	18.5	24.0	9.9	11.9	10.2	1)
	44	5220	14.0	18.4	24.0	10.0	11.9	9.8	1)
	48	5240	13.8	18.2	24.0	10.2	11.4	10.1	1)
3	149	5745	12.3	16.7	30.0	17.7	7.8	10.5	
	157	5785	12.5	16.9	30.0	17.5	8.0	10.6	
	165	5825	12.3	16.7	30.0	17.7	7.8	10.4	

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]
1	36	5180	N/A		N/A	N/A
	44	5220	N/A		N/A	N/A
	48	5240	N/A		N/A	N/A
3	149	5745	30.0	17.7	36.0	19.3
	157	5785	30.0	17.5	36.0	19.1
	165	5825	30.0	17.7	36.0	19.3

WLAN ac-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	36	5180	10.7	15.1	24.0	13.3	N/A		N/A	N/A	1)
	44	5220	10.3	14.7	24.0	13.7	N/A		N/A	N/A	1)
	48	5240	10.6	15.0	24.0	13.4	N/A		N/A	N/A	1)
3	149	5745	11.1	15.5	30.0	18.9	30.0	18.9	36.0	20.5	
	157	5785	11.3	15.7	30.0	18.7	30.0	18.7	36.0	20.3	
	165	5825	11.3	15.7	30.0	18.7	30.0	18.7	36.0	20.3	

WLAN ac-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	ANT1 [dBm]	ANT2 [dBm]	
1	36	5180	14.4	18.8	24.0	9.6	12.3	10.3	1)
	44	5220	14.2	18.6	24.0	9.8	12.1	10.0	1)
	48	5240	14.0	18.4	24.0	10.0	11.6	10.2	1)
3	149	5745	12.5	16.9	30.0	17.5	7.9	10.7	
	157	5785	12.8	17.2	30.0	17.2	8.4	10.8	
	165	5825	12.5	16.9	30.0	17.5	8.0	10.6	

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]
1	36	5180	N/A		N/A	N/A
	44	5220	N/A		N/A	N/A
	48	5240	N/A		N/A	N/A
3	149	5745	30.0	17.5	36.0	19.1
	157	5785	30.0	17.2	36.0	18.8
	165	5825	30.0	17.5	36.0	19.1

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	38	5190	9.2	13.6	24.0	14.8	N/A		N/A	N/A	1)
	46	5230	8.6	13.0	24.0	15.4	N/A		N/A	N/A	1)
3	151	5755	10.5	14.9	30.0	19.5	30.0	19.5	36.0	21.1	
	159	5795	10.3	14.7	30.0	19.7	30.0	19.7	36.0	21.3	

WLAN n-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	ANT1 [dBm]	ANT2 [dBm]	
1	38	5190	12.8	17.2	24.0	11.2	10.8	8.4	1)
	46	5230	12.4	16.8	24.0	11.6	10.5	7.9	1)
3	151	5755	11.7	16.1	30.0	18.3	7.3	9.8	
	159	5795	11.6	16.0	30.0	18.4	7.6	9.4	

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]
1	38	5190	N/A		N/A	N/A
	46	5230	N/A		N/A	N/A
3	151	5755	30.0	27.0	36.0	19.9
	159	5795	30.0	18.3	36.0	20.0

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	38	5190	8.8	13.2	24.0	15.2	N/A		N/A	N/A	1)
	46	5230	8.4	12.8	24.0	15.7	N/A		N/A	N/A	1)
3	151	5755	10.3	14.7	30.0	19.7	30.0	19.7	36.0	21.3	
	159	5795	10.1	14.5	30.0	19.9	30.0	19.9	36.0	21.5	

WLAN ac-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	ANT1 [dBm]	ANT2 [dBm]	
1	38	5190	12.9	17.3	24.0	11.1	<b>11.0</b>	<b>8.4</b>	1)
	46	5230	12.7	17.1	24.0	11.3	10.9	8.0	1)
3	151	5755	11.7	16.1	30.0	18.3	7.3	9.8	
	159	5795	11.7	16.1	30.0	18.3	7.6	9.6	

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]
1	38	5190	N/A		N/A	N/A
	46	5230	N/A		N/A	N/A
3	151	5755	30.0	27.0	36.0	19.9
	159	5795	30.0	18.3	36.0	19.9

WLAN ac-Mode; 80 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]	
1	42	5210	9.2	13.6	24.0	14.8	N/A		N/A	N/A	1)
3	155	5775	10.0	14.4	30.0	20.0	30.0	20.0	36.0	21.6	

WLAN ac-Mode; 80 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	Cond. Power [dBm]	EIRP [dBm]	FCC Cond. Limit [dBm]	Margin [dB]	ANT1 [dBm]	ANT2 [dBm]	
1	42	5210	12.8	17.2	24.0	11.2	<b>10.9</b>	<b>8.4</b>	1)
3	155	5775	11.0	15.4	30.0	19.0	6.7	9.0	

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC Cond. Limit [dBm]	Margin [dB]	IC EIRP Limit [dBm]	Margin [dB]
1	42	5210	N/A		N/A	N/A
3	155	5775	30.0	19.0	36.0	20.6



Remark: Please see next sub-clause for the measurement plot.

1) E.I.R.P >21 dBm, additional limit related to the elevation is always met.





#### 4.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")



Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

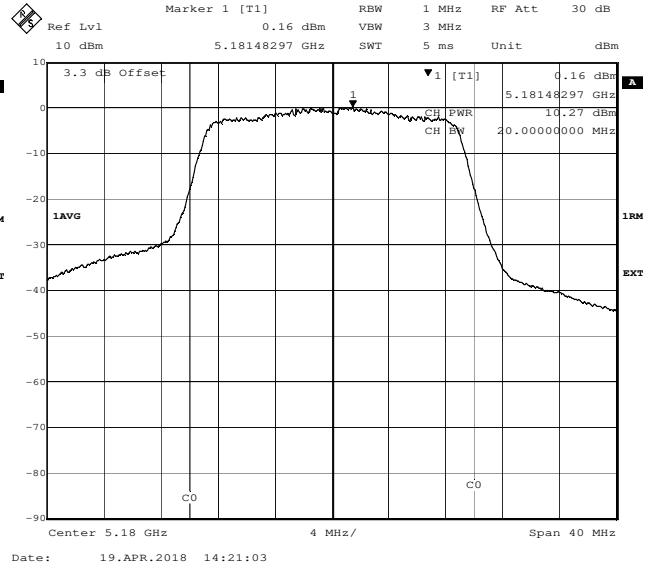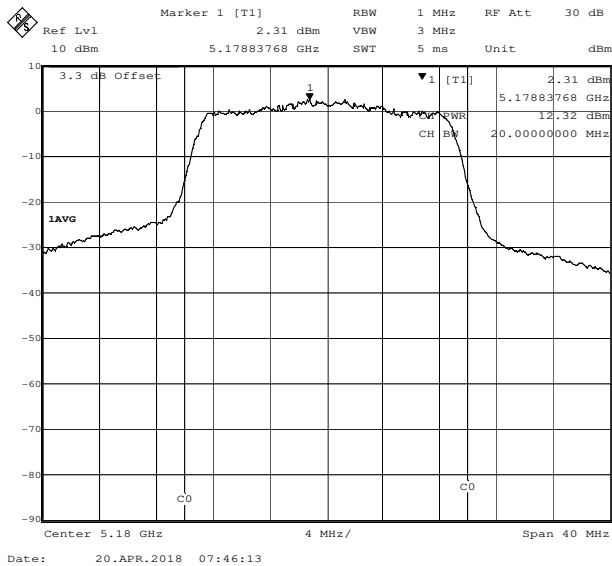

Radio Technology = WLAN ac 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

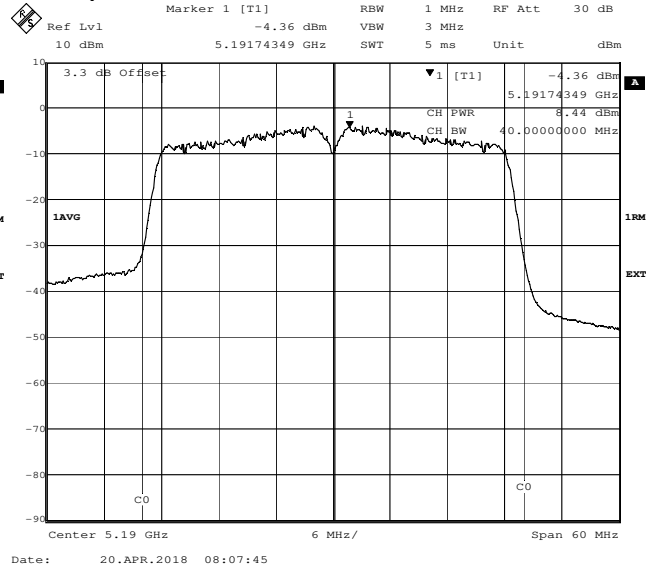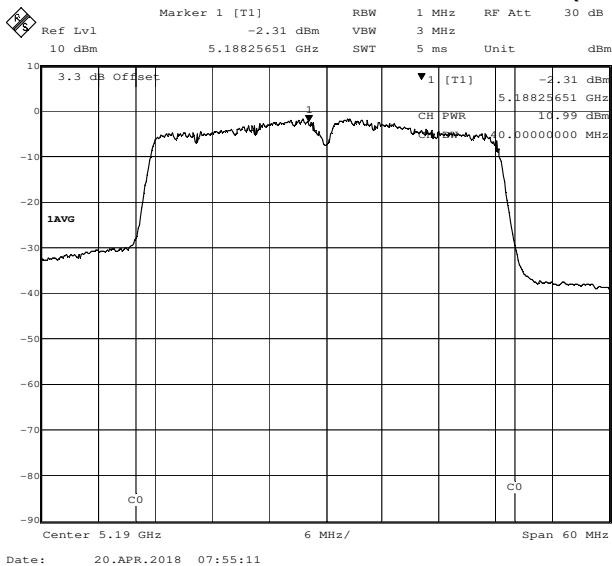

Radio Technology = WLAN ac 80 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

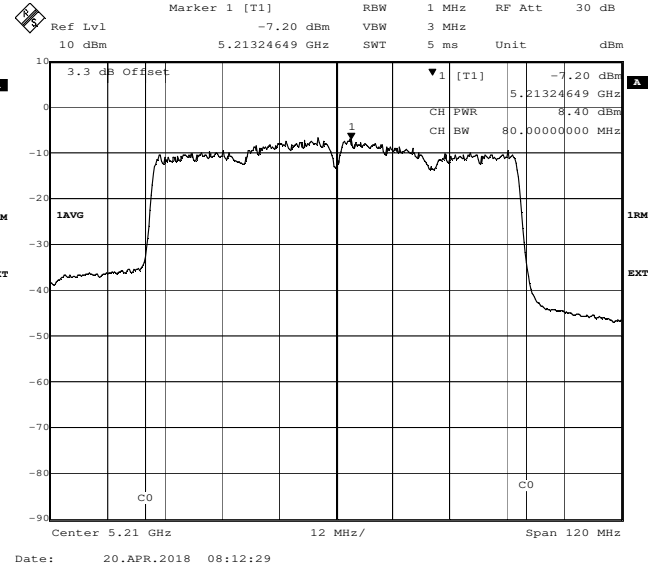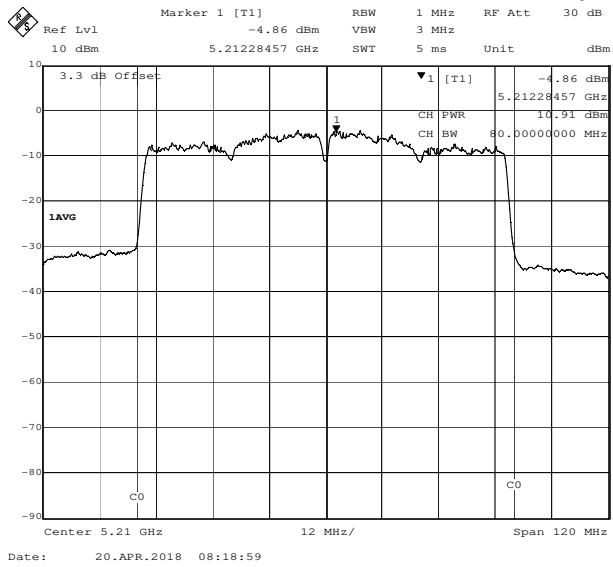

#### 4.4.5 TEST EQUIPMENT USED

- Regulatory WLAN RF Test Solution

## 4.5 PEAK POWER SPECTRAL DENSITY

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.5.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Maximum Power Spectral Density measurements.  
The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Resolution Bandwidth (RBW): 1 MHz
- Video Bandwidth (VBW): 3 MHz
- Trace: Average, RMS power averaging mode
- Sweeps: 100
- Sweeptime: 5 ms
- Detector: RMS
- Trigger: gated mode

Note:

The analyser settings are according FCC Public Note "Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, 789033 D02", method **SA-1**.

### 4.5.2 TEST REQUIREMENTS / LIMITS

#### **A) FCC**

FCC Part 15, Subpart E, §15.407 (a) (1)

For systems using digital modulation techniques in the 5.15 – 5.25 GHz bands:

(i) and (ii), outdoor and indoor access points: Limit: 17 dBm/MHz.

(iv), mobile and portable client devices: Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (2)

For systems using digital modulation techniques in the 5.25 – 5.35 GHz and 5.47 – 5.725 GHz bands:

Limit: 11 dBm/MHz.

FCC Part 15, Subpart E, §15.407 (a) (3)

For systems using digital modulation techniques in the 5.725 – 5.850 GHz bands:

Limit: 30 dBm/500 kHz.

Note: The limit will be also fulfilled when measuring at any bandwidth greater than 500 kHz.  
This applies to signals where the maximum conducted output power was measured at a bandwidth exceeding 500 kHz and which fulfil that limit of 30 dBm.

**B) IC**

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (1), Band 5150-5250 MHz, indoor operation only:  
Limit (e.i.r.p.): 10 dBm/MHz.

RSS-247, 6.2.2 (1), Band 5250-5350 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.3 (1), Bands 5470-5600 MHz and 5650-5725 MHz:  
Limit: 11 dBm/MHz.

RSS-247, 6.2.4 (1), Band 5725-5850 MHz:  
Limit: 30 dBm/500 kHz.

### 4.5.3 TEST PROTOCOL

Ambient temperature: 23 °C  
 Air Pressure: 1010 hPa  
 Humidity: 40 %

WLAN a-Mode; 20 MHz; 6 Mbit/s

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	36	5180	0.5	11.0	10.5	N/A	N/A	N/A
	44	5220	0.3	11.0	10.7	N/A	N/A	N/A
	48	5240	0.6	11.0	10.4	N/A	N/A	N/A
3	149	5745	1.5	30.0	28.5	30.0	28.5	
	157	5785	1.6	30.0	28.4	30.0	28.4	
	165	5825	1.6	30.0	28.4	30.0	28.4	

WLAN n-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	36	5180	0.6	11.0	10.4	N/A	N/A	N/A
	44	5220	0.1	11.0	10.9	N/A	N/A	N/A
	48	5240	0.4	11.0	10.6	N/A	N/A	N/A
3	149	5745	0.9	30.0	29.1	30.0	29.1	
	157	5785	1.1	30.0	28.9	30.0	28.9	
	165	5825	0.9	30.0	29.1	30.0	29.1	

WLAN n-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	ANT1 [dBm/MHz]	ANT2 [dBm/MHz]
1	36	5180	4.1	11.0	6.9	1.8	0.1
	44	5220	3.8	11.0	7.2	1.6	-0.3
	48	5240	3.5	11.0	7.5	1.0	0.0
3	149	5745	2.3	30.0	27.7	-2.4	0.5
	157	5785	2.2	30.0	27.8	-2.2	0.3
	165	5825	2.1	30.0	27.9	-2.6	0.2

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC EIRP MPSD	IC Limit [dBm/MHz]	Margin [dB]
1	36	5180	N/A	N/A	N/A
	44	5220	N/A	N/A	N/A
	48	5240	N/A	N/A	N/A
3	149	5745		30.0	27.7
	157	5785		30.0	27.8
	165	5825		30.0	27.9

WLAN ac-Mode; 20 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	36	5180	0.5	11.0	10.5	N/A	N/A	N/A
	44	5220	0.1	11.0	11.0	N/A	N/A	N/A
	48	5240	0.0	11.0	11.0	N/A	N/A	N/A
3	149	5745	0.7	30.0	29.3	30.0	29.3	
	157	5785	1.1	30.0	28.9	30.0	28.9	
	165	5825	1.1	30.0	28.9	30.0	28.9	

WLAN ac-Mode; 20 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	ANT1 [dBm/MHz]	ANT2 [dBm/MHz]
1	36	5180	4.4	11.0	6.6	2.3	0.2
	44	5220	4.1	11.0	6.9	2.0	-0.1
	48	5240	3.7	11.0	7.3	1.3	0.1
3	149	5745	2.3	30.0	27.7	-2.6	0.6
	157	5785	2.5	30.0	27.5	-2.3	0.8
	165	5825	2.1	30.0	27.9	-2.3	0.2

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC EIRP MPSD	IC Limit [dBm/MHz]	Margin [dB]
1	36	5180	N/A	N/A	N/A
	44	5220	N/A	N/A	N/A
	48	5240	N/A	N/A	N/A
3	149	5745		30.0	27.7
	157	5785		30.0	27.5
	165	5825		30.0	27.9

WLAN n-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	38	5190	-3.5	11.0	14.5	N/A	N/A	N/A
	46	5230	-4.5	11.0	15.5	N/A	N/A	N/A
3	151	5755	-3.0	30.0	33.0	30.0	33.0	
	159	5795	-2.5	30.0	32.5	30.0	32.5	

WLAN n-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	ANT1 [dBm/MHz]	ANT2 [dBm/MHz]
1	38	5190	0.0	11.0	11.0	-1.8	-4.7
	46	5230	-0.5	11.0	11.5	-2.5	-4.9
3	151	5755	-0.8	30.0	30.8	-5.4	-2.6
	159	5795	-0.9	30.0	30.9	-5.0	-3.1

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC EIRP MPSD	IC Limit [dBm/MHz]	Margin [dB]
1	38	5190	N/A	N/A	N/A
	46	5230	N/A	N/A	N/A
3	151	5755		30.0	30.8
	159	5795		30.0	30.9

WLAN ac-Mode; 40 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	38	5190	-4.3	11.0	15.3	N/A	N/A	N/A
	46	5230	-5.3	11.0	16.3	N/A	N/A	N/A
3	151	5755	-2.5	30.0	32.5	30.0	32.5	
	159	5795	-2.9	30.0	32.9	30.0	32.9	

WLAN ac-Mode; 40 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	ANT1	ANT2
1	38	5190	-0.2	11.0	11.2	-2.3	-4.4
	46	5230	-0.4	11.0	11.4	-2.3	-5.1
3	151	5755	-1.0	30.0	31.0	-5.7	-2.8
	159	5795	-1.0	30.0	31.0	-5.4	-2.9

table continued

U-NII-Subband	Ch. No.	Freq. [MHz]	IC EIRP MPSD	IC Limit [dBm/MHz]	Margin [dB]
1	38	5190	N/A	N/A	N/A
	46	5230	N/A	N/A	N/A
3	151	5755		30.0	31.0
	159	5795		30.0	31.0

WLAN ac-Mode; 80 MHz; MCS0; SISO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	IC Limit [dBm/MHz]	Margin [dB]	IC EIRP MPSD
1	42	5210	-6.6	11.0	17.6	N/A	N/A	N/A
3	155	5775	-5.8	30.0	35.8	30.0	35.8	

WLAN ac-Mode; 80 MHz; MCS0; MIMO

U-NII-Subband	Ch. No.	Freq. [MHz]	MPSD [dBm/MHz]	FCC Limit [dBm/MHz]	Margin [dB]	ANT1	ANT2
1	42	5210	-2.9	11.0	13.9	-4.9	-7.2
3	155	5775	-4.1	30.0	34.1	-8.4	-6.1

table continued



U-NII-Subband	Ch. No.	Freq. [MHz]	IC EIRP MPSD	IC Limit [dBm/MHz]	Margin [dB]
1	42	5210	N/A	N/A	N/A
3	155	5775		30.0	34.1

Remark: Please see next sub-clause for the measurement plot.



Power density in U-NII Subband 3 was measured in 1 MHz RBW (Worse Case)

#### 4.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN ac 20 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

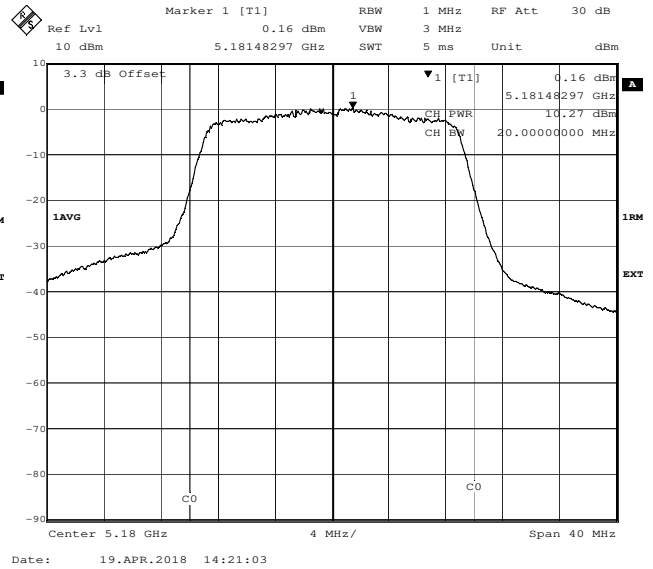
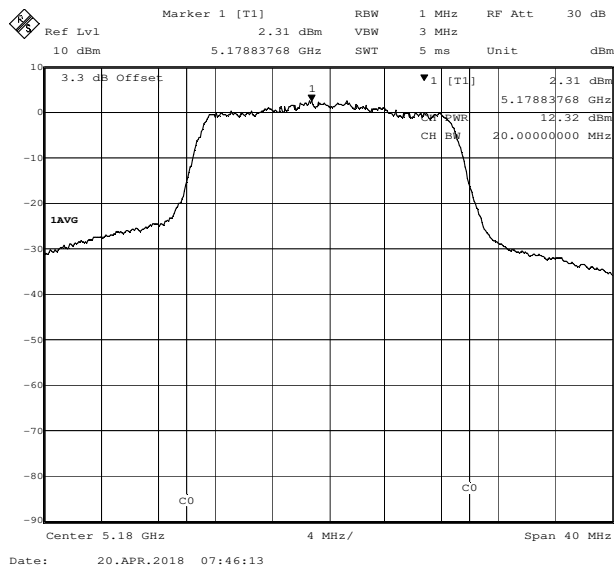


Radio Technology = WLAN n 40 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

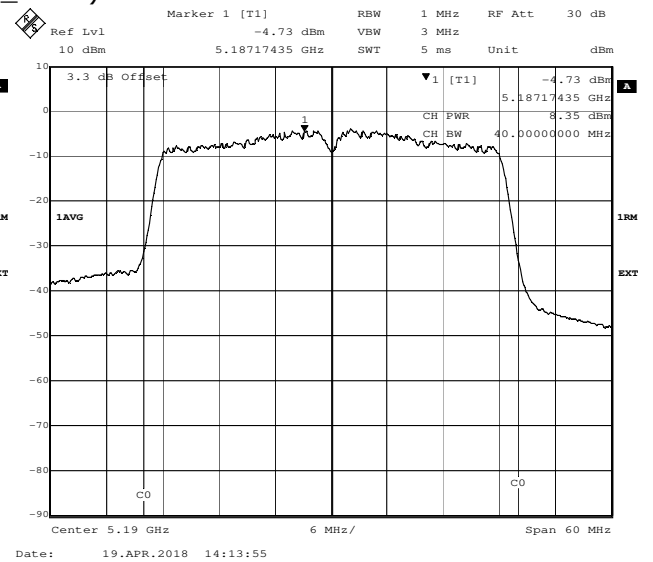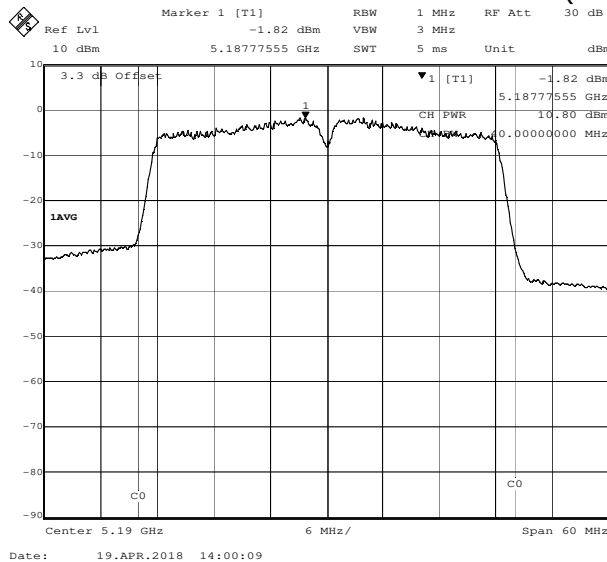



Radio Technology = WLAN ac 80 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AB01)

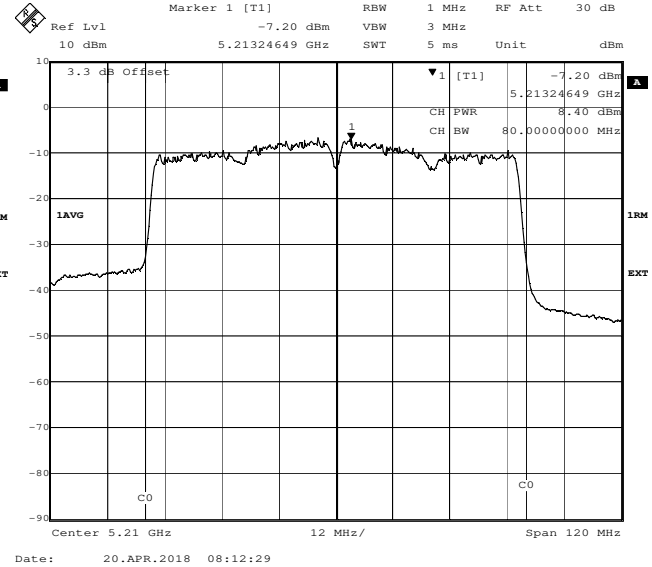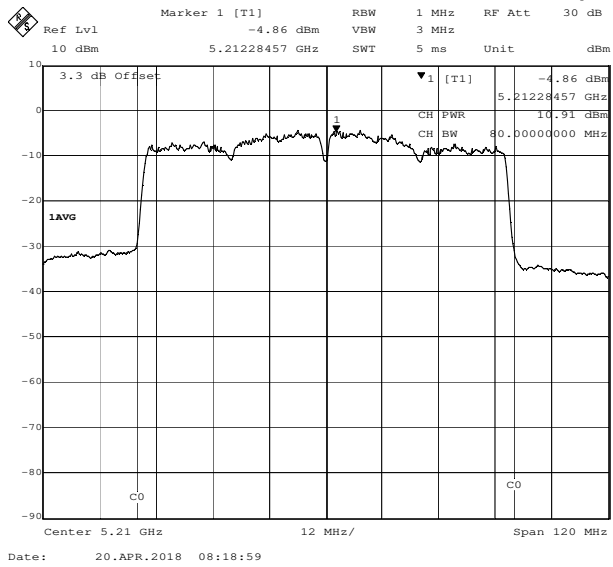

#### 4.5.5 TEST EQUIPMENT USED

- Regulatory WLAN RF Test Solution

## 4.6 UNDESIRABLE EMISSIONS; GENERAL FIELD STRENGTH LIMITS

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.6.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2:** Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

### **Step 3:** Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

## **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

Above 26 GHz the measurement distance is reduced to 1 m.

### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instead 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^\circ$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average

- IF Bandwidth = 1 MHz

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average

- Measured frequencies: in step 1 determined frequencies

- IF – Bandwidth: 1 MHz

- Measuring time: 1 s

## 4.6.2 TEST REQUIREMENTS / LIMITS

### A) FCC

FCC Part 15 Subpart E, §15.407 (b)(1)

For transmitters operating in the 5150–5250 MHz band:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(2)

For transmitters operating in the 5250–5350 MHz band:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5150–5350 MHz.

FCC Part 15 Subpart E, §15.407 (b)(3)

For transmitters operating in the 5470–5725 MHz band:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5470–5725 MHz.

FCC Part 15 Subpart E, §15.407 (b)(4)

For transmitters operating in the 5725–5850 MHz band:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5715–5860 MHz and additionally

Limit:  $-17$  dBm/MHz EIRP within the frequency ranges 5715–5725 and 5850–5860 MHz.

### B) IC

Different frequency bands and limits apply, as compared to the FCC requirements.

RSS-247, 6.2.1 (2), Emissions outside the band 5150-5250 MHz, indoor operation only:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5150–5250 MHz.

RSS-247, 6.2.2 (2), Emissions outside the band 5250-5350 MHz:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5250–5350 MHz.

RSS-247, 6.2.3 (2), Emissions outside the bands 5470-5600 MHz and 5650-5725 MHz:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5470–5725 MHz.

Note: No operation is permitted for the frequency range 5600–5650 MHz.

RSS-247, 6.2.4 (2), Emissions outside the band 5725-5825 MHz:

Limit:  $-27$  dBm/MHz EIRP outside of the band 5715–5835 MHz and additionally

Limit:  $-17$  dBm/MHz EIRP within the frequency ranges 5715–5725 and 5825–5835 MHz.

### C) FCC & IC

FCC Part 15 Subpart E, §15.405

The provisions of §§ 15.203 and 15.205 are included.

§15.407 (b)(6)

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209.

§15.407 (b)(7)

The provisions of §15.205 apply to intentional radiators operating under this section

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 – 0.49	2400/F(kHz)@300m	3	(48.5 – 13.8)@300m
0.49 – 1.705	24000/F(kHz)@30m	3	(33.8 – 23.0)@30m
1.705 – 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 – 88	100@3m	3	40.0@3m
88 – 216	150@3m	3	43.5@3m
216 – 960	200@3m	3	46.0@3m
960 – 26000	500@3m	3	54.0@3m
26000 – 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:

- Limit (dBµV/m) = 20 log (Limit (µV/m)/1µV/m)
- Limit (dBµV/m) = EIRP [dBm] – 20 log (d [m]) + 104.8

Limit types (in result tables on next page):

RB – Emissions falls into a "Restricted Band" according FCC §§15.205 and 15.209 \*)

UE – "Undesirable Emission Limit" according FCC §15.407

BE-RB – Band Edge Limit basing on "Restricted Band Limits"

BE-UE – Band Edge Limit basing on "Undesirable Emission Limit"

\*) Below 1 GHz the limits of §15.209 are applied for all frequencies.

### 4.6.3 TEST PROTOCOL

Ambient temperature: 23 - 25 °C  
 Air Pressure: 993 - 1011 hPa  
 Humidity: 28 - 37 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
36	5180	5116.0	57.1	PEAK	1000	74.0	16.9	RB
36	5180	5130.5	44.7	AV	1000	54.0	9.3	RB
36	5180	5145.5	45.0	AV	1000	54.0	9.0	RB
36	5180	5145.5	62.0	PEAK	1000	74.0	12.0	RB
36	5180	5147.2	45.2	AV	1000	54.0	8.8	RB
36	5180	5147.2	63.7	PEAK	1000	74.0	10.3	RB
36	5180	10359.4	64.9	PEAK	1000	68.2	3.3	UE
36	5180	15540.8	59.4	PEAK	1000	74.0	14.6	RB
36	5180	15542.2	40.9	AV	1000	54.0	13.1	RB
44	5220	6931.2	59.5	PEAK	1000	68.2	8.7	UE
44	5220	10439.4	62.3	PEAK	1000	68.2	5.9	UE
44	5220	15657.6	59.8	PEAK	1000	74.0	14.2	RB
44	5220	15659.8	43.1	AV	1000	54.0	10.9	RB
48	5240	10478.5	63.8	PEAK	1000	68.2	4.4	UE
48	5240	15718.6	61.6	PEAK	1000	74.0	12.4	RB
48	5240	15718.6	42.4	AV	1000	54.0	11.6	RB
149	5745	11488.9	62.0	PEAK	1000	74.0	12.0	RB
149	5745	11488.9	32.9	AV	1000	54.0	21.1	RB
157	5785	11572.7	63.5	PEAK	1000	74.0	10.5	RB
157	5785	11572.7	40.8	AV	1000	54.0	13.2	RB
165	5825	11649.5	61.7	PEAK	1000	74.0	12.3	RB
165	5825	11649.5	44.1	AV	1000	54.0	9.9	RB

WLAN n-Mode; 20 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
36	5180	5146.4	55.8	PEAK	1000	74.0	18.2	RB
36	5180	5146.4	43.3	AV	1000	54.0	10.7	RB
36	5180	10354.7	64.4	PEAK	1000	68.2	3.8	UE
36	5180	15547.5	58.8	PEAK	1000	74.0	15.2	RB
36	5180	15542.8	44.8	AV	1000	54.0	9.2	RB
44	5220	10440.0	64.4	PEAK	1000	68.2	3.8	UE
44	5220	15656.7	61.2	PEAK	1000	74.0	12.8	RB
44	5220	15660.1	42.4	AV	1000	54.0	11.6	RB
48	5240	10478.6	63.0	PEAK	1000	68.2	5.2	UE
48	5240	15724.1	60.9	PEAK	1000	74.0	13.1	RB
48	5240	15722.6	38.2	AV	1000	54.0	15.8	RB
149	5745	11489.4	37.1	AV	1000	54.0	16.9	RB
149	5745	11491.6	62.0	PEAK	1000	74.0	12.0	RB
157	5785	11573.5	64.4	PEAK	1000	74.0	9.6	RB
157	5785	11569.6	46.1	AV	1000	54.0	7.9	RB
165	5825	11648.5	61.4	PEAK	1000	74.0	12.6	RB
165	5825	11649.9	34.8	AV	1000	54.0	19.2	RB

WLAN n-Mode; 40 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
38	5190	10366.7	59.2	PEAK	1000	68.2	9.0	UE
46	5230	10460.0	60.7	PEAK	1000	68.2	7.5	UE
46	5230	15694.5	53.9	PEAK	1000	74.0	20.1	RB
46	5230	15694.7	35.3	AV	1000	54.0	18.7	RB
46	5230	22183.9	41.8	AV	1000	54.0	12.2	RB
46	5230	22183.9	55.1	PEAK	1000	74.0	18.9	RB
151	5755	11510.0	58.7	PEAK	1000	74.0	15.3	RB
151	5755	11510.8	43.8	AV	1000	54.0	10.2	RB
159	5795	11585.8	60.7	PEAK	1000	74.0	13.3	RB
159	5795	11590.0	44.8	AV	1000	54.0	9.3	RB


WLAN n-Mode; 20 MHz; MCS0  
 Applied duty cycle correction (AV): 0 dB

Ch. No.	Ch. Center Freq. [MHz]	Spurious Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type
44	5220	10438.3	59.3	PEAK	1000	68.2	8.9	UE
157	5785	-	-	-	-	-	>10	-


Remark: Please see next sub-clause for the measurement plot.

#### 4.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 26GHz - 40GHz, Subband = U-NII-1 (S01\_AD01)

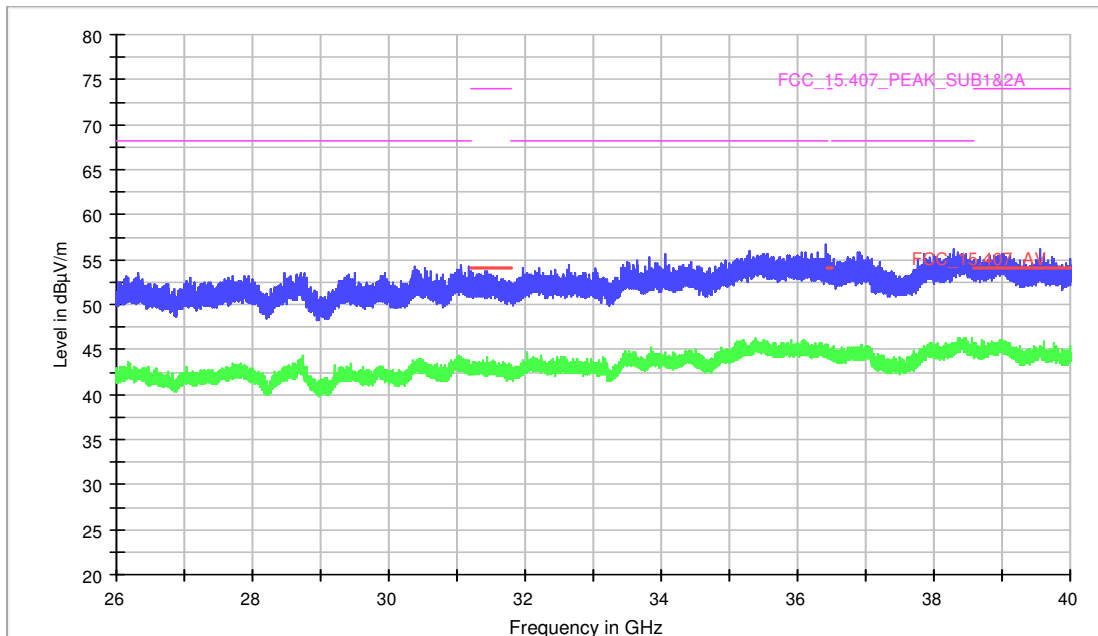


Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 9kHz - 30MHz, Subband = U-NII-1 (S01\_AC01)

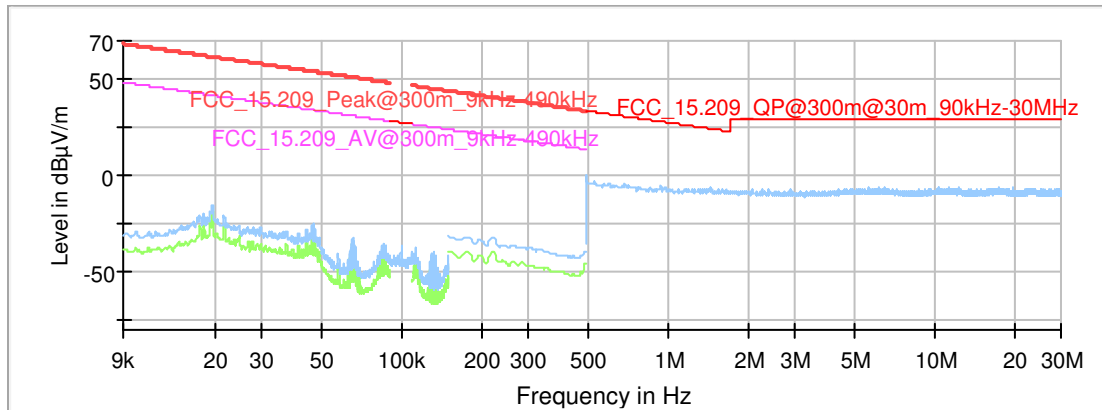

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---	---		---	---	

Radio Technology = WLAN a, Operating Frequency = mid, Measurement range = 30MHz - 1GHz, Subband = U-NII-1 (S01\_AC01)

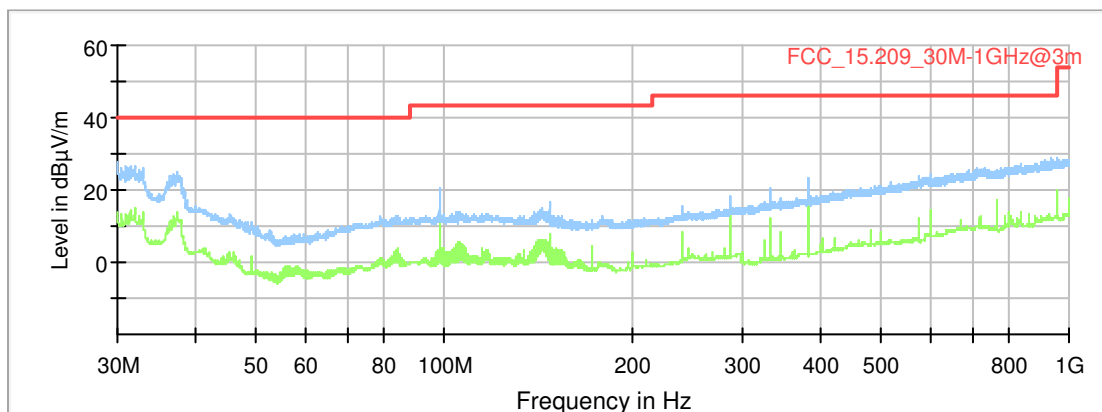


### Final Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	Comment
---	---	---	---	---	---	---		---	---	



Radio Technology = WLAN a, Operating Frequency = low, Measurement range = 1GHz - 26GHz, Subband = U-NII-1 (S01\_AC01)

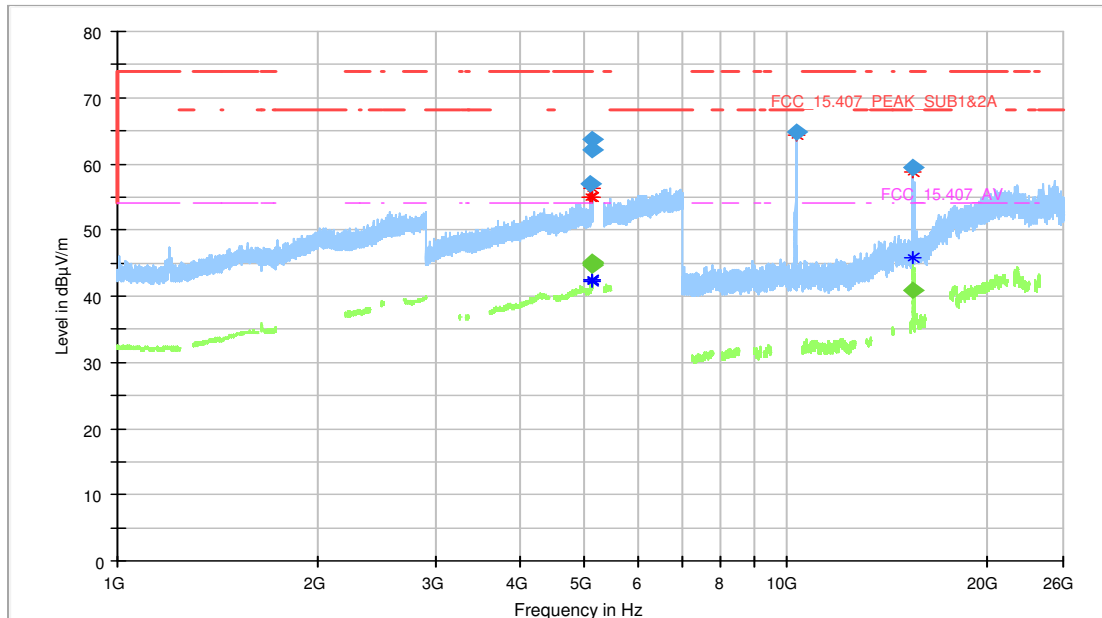

### Critical Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5116.037500	55.08	---	74.00	18.92	---	---	150.0	H	49.0	6.0
5130.500000	---	42.44	54.00	11.56	---	---	150.0	H	-11.0	-12.0
5145.450000	---	42.23	54.00	11.77	---	---	150.0	H	-11.0	-12.0
5145.450000	54.93	---	74.00	19.07	---	---	150.0	V	-184.0	99.0
5147.237500	---	42.53	54.00	11.47	---	---	150.0	H	-3.0	-10.0
5147.237500	56.39	---	74.00	17.61	---	---	150.0	H	-2.0	-4.0
10359.375000	64.34	---	68.20	3.86	---	---	150.0	H	-7.0	-6.0
15540.825000	58.68	---	74.00	15.32	---	---	150.0	H	49.0	105.0
15542.241667	---	45.78	54.00	8.22	---	---	150.0	H	-11.0	95.0

### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5116.037500	57.08	---	74.00	16.92	1000.0	1000.000	150.0	H	49.0	6.0
5130.500000	---	44.68	54.00	9.32	1000.0	1000.000	150.0	H	-11.0	-12.0
5145.450000	---	45.00	54.00	9.00	1000.0	1000.000	150.0	H	-11.0	-12.0
5145.450000	62.03	---	74.00	11.97	1000.0	1000.000	150.0	V	-184.0	99.0
5147.237500	---	45.24	54.00	8.76	1000.0	1000.000	150.0	H	-3.0	-10.0
5147.237500	63.65	---	74.00	10.35	1000.0	1000.000	150.0	H	-2.0	-4.0
10359.375000	64.91	---	68.20	3.29	1000.0	1000.000	150.0	H	-7.0	-6.0
15540.825000	59.39	---	74.00	14.61	1000.0	1000.000	150.0	H	49.0	105.0
15542.241667	---	40.92	54.00	13.08	1000.0	1000.000	150.0	H	-11.0	95.0

### 4.6.5 TEST EQUIPMENT USED

- Radiated Emissions

## 4.7 BAND EDGE

Standard **FCC Part 15 Subpart E**

**The test was performed according to:**  
ANSI C63.10

### 4.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

### 4.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
0.009 - 0.49	2400/F(kHz)@300m	3	(48.5 - 13.8)@300m
0.49 - 1.705	24000/F(kHz)@30m	3	(33.8 - 23.0)@30m
1.705 - 30	30@30m	3	29.5@30m

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limits (dBµV/m)
30 - 88	100@3m	3	40.0@3m
88 - 216	150@3m	3	43.5@3m
216 - 960	200@3m	3	46.0@3m
960 - 26000	500@3m	3	54.0@3m
26000 - 40000	500@3m	1	54.0@3m

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1µV/m)$

### 4.7.3 TEST PROTOCOL

Ambient temperature: 23 - 25 °C  
 Air Pressure: 993 - 1011 hPa  
 Humidity: 28 - 37 %  
 WLAN a-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	56.4	PEAK	1000	74.0	17.6	BE-RB	FCC&IC
	36	5180	5150.0	42.5	AV	1000	54.0	11.5	BE-RB	FCC&IC
3	149	5745	5725.0 <sup>1)</sup>	53.8	PEAK	1000	68.2	14.4	BE-UE	FCC&IC
	165	5825	5850.0 <sup>1)</sup>	53.5	PEAK	1000	68.2	14.7	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	56.3	PEAK	1000	74.0	17.7	BE-RB	FCC&IC
	36	5180	5150.0	43.2	AV	1000	54.0	10.8	BE-RB	FCC&IC
3	149	5745	5725.0 <sup>1)</sup>	57.0	PEAK	1000	68.2	11.2	BE-UE	FCC&IC
	165	5825	5850.0 <sup>1)</sup>	54.0	PEAK	1000	68.2	14.2	BE-UE	FCC&IC

WLAN n-Mode; 40 MHz; MCS0;SISO  
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	66.4	PEAK	1000	74.0	7.6	BE-RB	FCC&IC
	38	5190	5150.0	46.5	AV	1000	54.0	7.5	BE-RB	FCC&IC
3	151	5755	5725.0 <sup>1)</sup>	53.3	PEAK	1000	68.2	14.9	BE-UE	FCC&IC
	159	5795	5850.0 <sup>1)</sup>	53.5	PEAK	1000	68.2	14.7	BE-UE	FCC&IC

WLAN ac-Mode; 20 MHz; MCS0; SISO  
 Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	67.5	PEAK	1000	74.0	6.5	BE-RB	FCC&IC
	36	5180	5150.0	45.6	AV	1000	54.0	8.5	BE-RB	FCC&IC
3	149	5745	5725.0 <sup>1)</sup>	57.1	PEAK	1000	68.2	11.1	BE-UE	FCC&IC
	165	5825	5850.0 <sup>1)</sup>	57.5	PEAK	1000	68.2	10.7	BE-UE	FCC&IC

WLAN ac-Mode; 40 MHz; MCS0; SISO  
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	67.8	PEAK	1000	74.0	6.2	BE-RB	FCC&IC
	38	5190	5150.0	49.8	AV	1000	54.0	4.2	BE-RB	FCC&IC
3	151	5755	5725.0 <sup>1)</sup>	57.0	PEAK	1000	68.2	11.2	BE-UE	FCC&IC
	159	5795	5850.0 <sup>1)</sup>	57.8	PEAK	1000	68.2	10.4	BE-UE	FCC&IC

WLAN ac-Mode; 80 MHz; MCS0; SISO  
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	42	5210	5150.0	67.0	PEAK	1000	74.0	7.0	BE-RB	FCC&IC
	42	5210	5150.0	52.1	AV	1000	54.0	1.9	BE-RB	FCC&IC
3	155	5775	5725.0 <sup>1)</sup>	53.8	PEAK	1000	68.2	14.4	BE-UE	FCC&IC
	155	5775	5850.0 <sup>1)</sup>	54.8	PEAK	1000	68.2	13.4	BE-UE	FCC&IC

WLAN n-Mode; 20 MHz; MCS0; MIMO  
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	36	5180	5150.0	57.1	PEAK	1000	74.0	16.9	BE-RB	FCC&IC
	36	5180	5150.0	44.9	AV	1000	54.0	9.1	BE-RB	FCC&IC
3	149	5745	5725.0 <sup>1)</sup>	52.6	PEAK	1000	68.2	15.6	BE-UE	FCC&IC
	165	5825	5850.0 <sup>1)</sup>	55.0	PEAK	1000	68.2	13.2	BE-UE	FCC&IC

WLAN n-Mode; 40 MHz; MCS0; MIMO  
Applied duty cycle correction (AV): 0 dB

U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	38	5190	5150.0	58.1	PEAK	1000	74.0	15.9	BE-RB	FCC&IC
	38	5190	5150.0	45.0	AV	1000	54.0	9.0	BE-RB	FCC&IC

WLAN ac-Mode; 80 MHz; MCS0; MIMO  
Applied duty cycle correction (AV): 0 dB


U-NII-Subband	Ch. No.	Ch. Center Freq. [MHz]	Band Edge Freq. [MHz]	Spurious Level [dBμV/m]	Detector	RBW [kHz]	Limit [dBμV/m]	Margin [dB]	Limit Type	FCC /IC?
1	42	5210	5150.0	56.8	PEAK	1000	74.0	17.2	BE-RB	FCC&IC
	42	5210	5150.0	45.0	AV	1000	54.0	9.0	BE-RB	FCC&IC

Remark: Please see next sub-clause for the measurement plot.

- 1) The value given is the closest value of trace to limit in the range of the descending limit at the corresponding band edge of U-NII-Subband 3 in the ranges 5648 MHz – 5725 MHz or 5850 – 5927 MHz.

#### 4.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = WLAN ac 80 MHz, Operating Frequency = low, Subband = U-NII-1 (S01\_AC01)

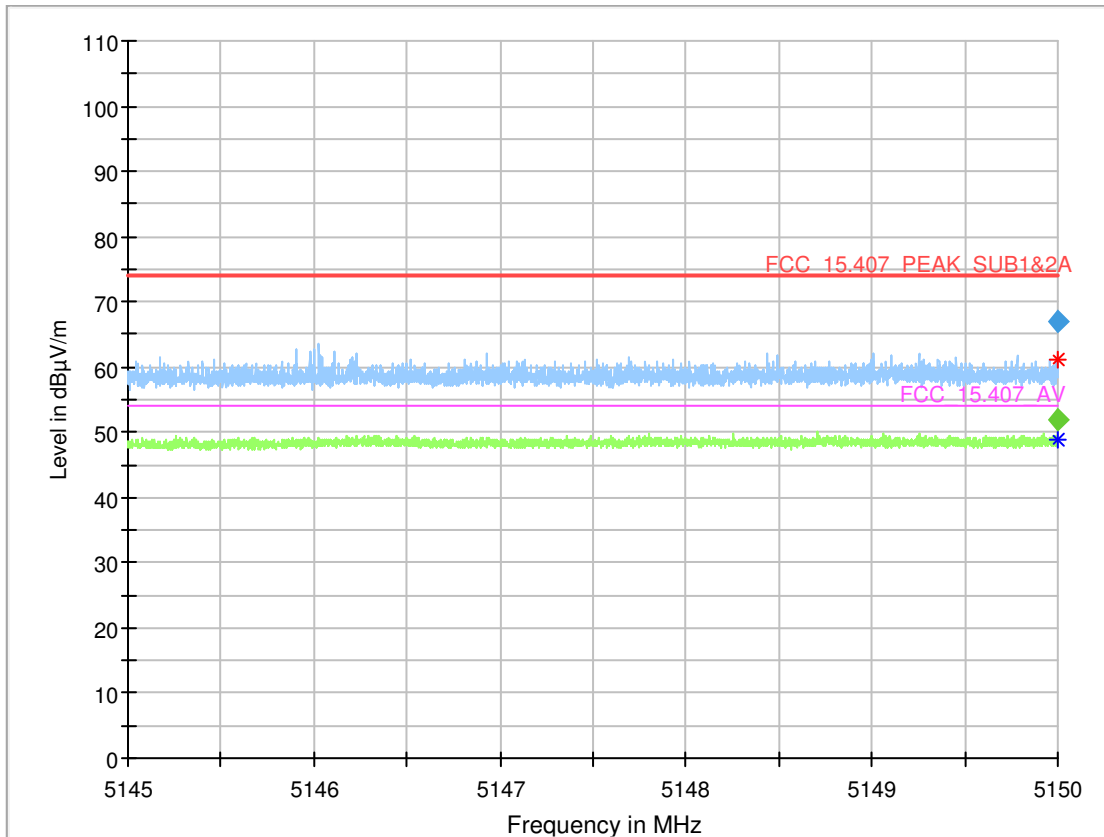

#### Final Result

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Elevation (deg)
5149.997500	---	52.08	54.00	1.92	1000.0	1000.000	150.0	H	130.0	3.0
5149.998750	67.02	---	74.00	6.98	1000.0	1000.000	150.0	H	133.0	10.0

#### 4.7.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5 TEST EQUIPMENT

- 1 Radiated Emissions  
Lab to perform radiated emission tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.1	NRV-Z1	Sensor Head A	Rohde & Schwarz	827753/005	2017-05	2018-05
1.2	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2017-10	2018-10
1.3	Opus10 TPR (8253.00)	ThermoAirpressure Datalogger 13 (Environ)	Lufft Mess- und Regeltechnik GmbH	13936	2017-04	2019-04
1.4	Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup>	Frankonia	none	2016-05	2019-05
1.5	FS-Z60	Harmonic Mixer 40 - 60 GHz	Rohde & Schwarz Messgerätebau GmbH	100178	2016-12	2019-12
1.6	FS-Z220	Harmonic Mixer 140 - 220 GHz	Rohde & Schwarz Messgerätebau GmbH	101005	2017-03	2020-03
1.7	SGH-05	Antenna (140 - 220 GHz)		075		
1.8	HL 562	Ultralog new biconicals	Rohde & Schwarz	830547/003	2015-06	2018-06
1.9	5HC2700/12750 -1.5-KK	High Pass Filter	Trilithic	9942012		
1.10	ASP 1.2/1.8-10 kg	Antenna Mast	Maturo GmbH	-		
1.11	Fully Anechoic Room	8.80m x 4.60m x 4.05m (l x w x h)	Albatross Projects	P26971-647-001-PRB	2015-06	2018-06
1.12	Fluke 177	Digital Multimeter 03 (Multimeter)	Fluke Europe B.V.	86670383	2018-04	2020-04
1.13	JS4-18002600-32-5P	Broadband Amplifier 18 GHz - 26 GHz	Miteq	849785		
1.14	FSW 43	Spectrum Analyzer	Rohde & Schwarz	103779	2016-12	2018-12
1.15	3160-09	Standard Gain / Pyramidal Horn Antenna 26.5 GHz	EMCO Elektronik GmbH	00083069		
1.16	SGH-19	Antenna (40 - 60 GHz)		093		
1.17	WHKX 7.0/18G-8SS	High Pass Filter	Wainwright	09		
1.18	4HC1600/12750 -1.5-KK	High Pass Filter	Trilithic	9942011		
1.19	Chroma 6404	AC Power Source	Chroma ATE INC.	64040001304		
1.20	JS4-00102600-42-5A	Broadband Amplifier 30 MHz - 26 GHz	Miteq	619368		
1.21	TT 1.5 WI	Turn Table	Maturo GmbH	-		

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
1.22	HL 562 Ultralog	Log.-per. Antenna	Rohde & Schwarz	100609	2016-04	2019-04
1.23	FS-Z325	Harmonic Mixer 220 - 325 GHz	Rohde & Schwarz Messgerätebau GmbH	101006	2017-03	2020-03
1.24	3160-10	Standard Gain / Pyramidal Horn Antenna 40 GHz	EMCO Elektronik GmbH	00086675		
1.25	SGH-08	Antenna (90 - 140 GHz)		064		
1.26	SGH-12	Antenna (60 - 90 GHz)		326		
1.27	5HC3500/18000-1.2-KK	High Pass Filter	Trilithic	200035008		
1.28	FS-Z140	Harmonic Mixer 90 -140 GHz	Rohde & Schwarz Messgerätebau GmbH	101007	2017-02	2020-02
1.29	HFH2-Z2	Loop Antenna	Rohde & Schwarz	829324/006	2018-01	2021-01
1.30	Opus10 THI (8152.00)	ThermoHygro Datalogger 12 (Environ)	Lufft Mess- und Regeltechnik GmbH	12482	2017-03	2019-03
1.31	ESR 7	EMI Receiver / Spectrum Analyzer	Rohde & Schwarz	101424	2016-11	2018-11
1.32	JS4-00101800-35-5P	Broadband Amplifier 30 MHz - 18 GHz	Miteq	896037		
1.33	AS 620 P	Antenna mast	HD GmbH	620/37		
1.34	Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	Maturo GmbH	TD1.5-10kg/024/3790709		
1.35	SGH-03	Antenna (220 - 325 GHz)		060		
1.36	FS-Z90	Harmonic Mixer 60 - 90 GHz	Rohde & Schwarz Messgerätebau GmbH	101686	2017-03	2020-03
1.37	ESIB 26	Spectrum Analyzer	Rohde & Schwarz	830482/004	2018-01	2020-01
1.38	PAS 2.5 - 10 kg	Antenna Mast	Maturo GmbH	-		
1.39	AFS42-00101800-25-S-42	Broadband Amplifier 25 MHz - 18 GHz	Miteq	2035324		
1.40	AM 4.0	Antenna mast	Maturo GmbH	AM4.0/180/11920513		
1.41	HF 907	Double-ridged horn	Rohde & Schwarz	102444	2015-05	2018-05

2 Regulatory WLAN RF Test Solution  
Regulatory WLAN RF Tests

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.1	MFS	Rubidium Frequency Normal MFS	Datum GmbH	002	2017-10	2018-10

Ref.No.	Device Name	Description	Manufacturer	Serial Number	Last Calibration	Calibration Due
2.2	TGA12101	Arbitrary Waveform Generator	Aim and Thurlby Thandar Instruments	284482		
2.3	NRV Z1 A	Power Sensor	Rohde & Schwarz	832279/013	2017-09	2018-09
2.4	Opus10 THI (8152.00)	T/H Logger 15	Lufft Mess- und Regeltechnik GmbH	13985	2017-04	2019-04
2.5	TOCT Switching Unit		7layers, Inc.	040107		
2.6	NRVD	Power Meter	Rohde & Schwarz	832025/059	2017-09	2018-09
2.7	FSU3	Spectrum Analyser	Rohde & Schwarz GmbH & Co. KG	200046	2017-06	2018-06
2.8	FSIQ26	Signal Analyser	Rohde & Schwarz	832695/007	2016-09	2018-09
2.9	FSU26	Spectrum Analyser	Rohde & Schwarz GmbH & Co. KG	100136	2018-01	2019-01
2.10	SMIQ 03B	Signal Generator	Rohde & Schwarz GmbH & Co. KG	832870/017	2016-06	2019-06
2.11	NGSM 32/10	Power Supply	Rohde & Schwarz	2725	2017-06	2019-06

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"



## 6 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 6.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

Frequency MHz	Corr. dB	LISN insertion loss ESH3- Z5 dB	cable loss (incl. 10 dB atten- uator) dB
0.15	10.1	0.1	10.0
5	10.3	0.1	10.2
7	10.5	0.2	10.3
10	10.5	0.2	10.3
12	10.7	0.3	10.4
14	10.7	0.3	10.4
16	10.8	0.4	10.4
18	10.9	0.4	10.5
20	10.9	0.4	10.5
22	11.1	0.5	10.6
24	11.1	0.5	10.6
26	11.2	0.5	10.7
28	11.2	0.5	10.7
30	11.3	0.5	10.8

#### Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 6.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

Frequency MHz	AF HFH-Z2) dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-40 dB/ decade) dB	d <sub>Limit</sub> (meas. distance (limit) m	d <sub>used</sub> (meas. distance (used) m
0.009	20.50	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.01	20.45	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.015	20.37	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.02	20.36	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.025	20.38	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.03	20.32	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.05	20.35	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.08	20.30	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.1	20.20	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.2	20.17	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.3	20.14	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.49	20.12	-79.6	0.1	0.1	0.1	0.1	-80	300	3
0.490001	20.12	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.5	20.11	-39.6	0.1	0.1	0.1	0.1	-40	30	3
0.8	20.10	-39.6	0.1	0.1	0.1	0.1	-40	30	3
1	20.09	-39.6	0.1	0.1	0.1	0.1	-40	30	3
2	20.08	-39.6	0.1	0.1	0.1	0.1	-40	30	3
3	20.06	-39.6	0.1	0.1	0.1	0.1	-40	30	3
4	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
5	20.05	-39.5	0.2	0.1	0.1	0.1	-40	30	3
6	20.02	-39.5	0.2	0.1	0.1	0.1	-40	30	3
8	19.95	-39.5	0.2	0.1	0.1	0.1	-40	30	3
10	19.83	-39.4	0.2	0.1	0.2	0.1	-40	30	3
12	19.71	-39.4	0.2	0.1	0.2	0.1	-40	30	3
14	19.54	-39.4	0.2	0.1	0.2	0.1	-40	30	3
16	19.53	-39.3	0.3	0.1	0.2	0.1	-40	30	3
18	19.50	-39.3	0.3	0.1	0.2	0.1	-40	30	3
20	19.57	-39.3	0.3	0.1	0.2	0.1	-40	30	3
22	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
24	19.61	-39.3	0.3	0.1	0.2	0.1	-40	30	3
26	19.54	-39.3	0.3	0.1	0.2	0.1	-40	30	3
28	19.46	-39.2	0.3	0.1	0.3	0.1	-40	30	3
30	19.73	-39.1	0.4	0.1	0.3	0.1	-40	30	3

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 6.3 ANTENNA R&S HL562 (30 MHZ – 1 GHZ)

( $d_{Limit} = 3\text{ m}$ )

Frequency	AF R&S HL562	Corr.
MHz	dB (1/m)	dB
30	18.6	0.6
50	6.0	0.9
100	9.7	1.2
150	7.9	1.6
200	7.6	1.9
250	9.5	2.1
300	11.0	2.3
350	12.4	2.6
400	13.6	2.9
450	14.7	3.1
500	15.6	3.2
550	16.3	3.5
600	17.2	3.5
650	18.1	3.6
700	18.5	3.6
750	19.1	4.1
800	19.6	4.1
850	20.1	4.4
900	20.8	4.7
950	21.1	4.8
1000	21.6	4.9

cable loss 1 (inside chamber)	cable loss 2 (outside chamber)	cable loss 3 (switch unit)	cable loss 4 (to receiver)	distance corr. (-20 dB/decade)	$d_{Limit}$ (meas. distance (limit))	$d_{used}$ (meas. distance (used))
dB	dB	dB	dB	dB	m	m
0.29	0.04	0.23	0.02	0.0	3	3
0.39	0.09	0.32	0.08	0.0	3	3
0.56	0.14	0.47	0.08	0.0	3	3
0.73	0.20	0.59	0.12	0.0	3	3
0.84	0.21	0.70	0.11	0.0	3	3
0.98	0.24	0.80	0.13	0.0	3	3
1.04	0.26	0.89	0.15	0.0	3	3
1.18	0.31	0.96	0.13	0.0	3	3
1.28	0.35	1.03	0.19	0.0	3	3
1.39	0.38	1.11	0.22	0.0	3	3
1.44	0.39	1.20	0.19	0.0	3	3
1.55	0.46	1.24	0.23	0.0	3	3
1.59	0.43	1.29	0.23	0.0	3	3
1.67	0.34	1.35	0.22	0.0	3	3
1.67	0.42	1.41	0.15	0.0	3	3
1.87	0.54	1.46	0.25	0.0	3	3
1.90	0.46	1.51	0.25	0.0	3	3
1.99	0.60	1.56	0.27	0.0	3	3
2.14	0.60	1.63	0.29	0.0	3	3
2.22	0.60	1.66	0.33	0.0	3	3
2.23	0.61	1.71	0.30	0.0	3	3

( $d_{Limit} = 10\text{ m}$ )

30	18.6	-9.9
50	6.0	-9.6
100	9.7	-9.2
150	7.9	-8.8
200	7.6	-8.6
250	9.5	-8.3
300	11.0	-8.1
350	12.4	-7.9
400	13.6	-7.6
450	14.7	-7.4
500	15.6	-7.2
550	16.3	-7.0
600	17.2	-6.9
650	18.1	-6.9
700	18.5	-6.8
750	19.1	-6.3
800	19.6	-6.3
850	20.1	-6.0
900	20.8	-5.8
950	21.1	-5.6
1000	21.6	-5.6

0.29	0.04	0.23	0.02	-10.5	10	3
0.39	0.09	0.32	0.08	-10.5	10	3
0.56	0.14	0.47	0.08	-10.5	10	3
0.73	0.20	0.59	0.12	-10.5	10	3
0.84	0.21	0.70	0.11	-10.5	10	3
0.98	0.24	0.80	0.13	-10.5	10	3
1.04	0.26	0.89	0.15	-10.5	10	3
1.18	0.31	0.96	0.13	-10.5	10	3
1.28	0.35	1.03	0.19	-10.5	10	3
1.39	0.38	1.11	0.22	-10.5	10	3
1.44	0.39	1.20	0.19	-10.5	10	3
1.55	0.46	1.24	0.23	-10.5	10	3
1.59	0.43	1.29	0.23	-10.5	10	3
1.67	0.34	1.35	0.22	-10.5	10	3
1.67	0.42	1.41	0.15	-10.5	10	3
1.87	0.54	1.46	0.25	-10.5	10	3
1.90	0.46	1.51	0.25	-10.5	10	3
1.99	0.60	1.56	0.27	-10.5	10	3
2.14	0.60	1.63	0.29	-10.5	10	3
2.22	0.60	1.66	0.33	-10.5	10	3
2.23	0.61	1.71	0.30	-10.5	10	3

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-20 * \text{LOG} (d_{Limit} / d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

### 6.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
1000	24.4	-19.4
2000	28.5	-17.4
3000	31.0	-16.1
4000	33.1	-14.7
5000	34.4	-13.7
6000	34.7	-12.7
7000	35.6	-11.0

cable loss 1 (relay + cable inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit, atten- uator & pre-amp) dB	cable loss 4 (to receiver) dB
0.99	0.31	-21.51	0.79
1.44	0.44	-20.63	1.38
1.87	0.53	-19.85	1.33
2.41	0.67	-19.13	1.31
2.78	0.86	-18.71	1.40
2.74	0.90	-17.83	1.47
2.82	0.86	-16.19	1.46

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
3000	31.0	-23.4
4000	33.1	-23.3
5000	34.4	-21.7
6000	34.7	-21.2
7000	35.6	-19.8

cable loss 1 (relay inside chamber) dB	cable loss 2 (inside chamber) dB	cable loss 3 (outside chamber) dB	cable loss 4 (switch unit, atten- uator & pre-amp) dB	cable loss 5 (to receiver) dB	used for FCC 15.247
0.47	1.87	0.53	-27.58	1.33	
0.56	2.41	0.67	-28.23	1.31	
0.61	2.78	0.86	-27.35	1.40	
0.58	2.74	0.90	-26.89	1.47	
0.66	2.82	0.86	-25.58	1.46	

Frequency MHz	AF R&S HF907 dB (1/m)	Corr. dB
7000	35.6	-57.3
8000	36.3	-56.3
9000	37.1	-55.3
10000	37.5	-56.2
11000	37.5	-55.3
12000	37.6	-53.7
13000	38.2	-53.5
14000	39.9	-56.3
15000	40.9	-54.1
16000	41.3	-54.1
17000	42.8	-54.4
18000	44.2	-54.7

cable loss 1 (relay inside chamber) dB	cable loss 2 (High Pass) dB	cable loss 3 (pre- amp) dB	cable loss 4 (inside chamber) dB	cable loss 5 (outside chamber) dB	cable loss 6 (to receiver) dB
0.56	1.28	-62.72	2.66	0.94	1.46
0.69	0.71	-61.49	2.84	1.00	1.53
0.68	0.65	-60.80	3.06	1.09	1.60
0.70	0.54	-61.91	3.28	1.20	1.67
0.80	0.61	-61.40	3.43	1.27	1.70
0.84	0.42	-59.70	3.53	1.26	1.73
0.83	0.44	-59.81	3.75	1.32	1.83
0.91	0.53	-63.03	3.91	1.40	1.77
0.98	0.54	-61.05	4.02	1.44	1.83
1.23	0.49	-61.51	4.17	1.51	1.85
1.36	0.76	-62.36	4.34	1.53	2.00
1.70	0.53	-62.88	4.41	1.55	1.91

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

## 6.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

Frequency	AF EMCO 3160-09	Corr.
MHz	dB (1/m)	dB
18000	40.2	-23.5
18500	40.2	-23.2
19000	40.2	-22.0
19500	40.3	-21.3
20000	40.3	-20.3
20500	40.3	-19.9
21000	40.3	-19.1
21500	40.3	-19.1
22000	40.3	-18.7
22500	40.4	-19.0
23000	40.4	-19.5
23500	40.4	-19.3
24000	40.4	-19.8
24500	40.4	-19.5
25000	40.4	-19.3
25500	40.5	-20.4
26000	40.5	-21.3
26500	40.5	-21.1

cable loss 1 (inside chamber)	cable loss 2 (pre- amp)	cable loss 3 (inside chamber)	cable loss 4 (switch unit)	cable loss 5 (to receiver)
dB	dB	dB	dB	dB
0.72	-35.85	6.20	2.81	2.65
0.69	-35.71	6.46	2.76	2.59
0.76	-35.44	6.69	3.15	2.79
0.74	-35.07	7.04	3.11	2.91
0.72	-34.49	7.30	3.07	3.05
0.78	-34.46	7.48	3.12	3.15
0.87	-34.07	7.61	3.20	3.33
0.90	-33.96	7.47	3.28	3.19
0.89	-33.57	7.34	3.35	3.28
0.87	-33.66	7.06	3.75	2.94
0.88	-33.75	6.92	3.77	2.70
0.90	-33.35	6.99	3.52	2.66
0.88	-33.99	6.88	3.88	2.58
0.91	-33.89	7.01	3.93	2.51
0.88	-33.00	6.72	3.96	2.14
0.89	-34.07	6.90	3.66	2.22
0.86	-35.11	7.02	3.69	2.28
0.90	-35.20	7.15	3.91	2.36

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 6.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

Frequency GHz	AF EMCO 3160-10 dB (1/m)	Corr. dB	cable loss 1 (inside chamber) dB	cable loss 2 (outside chamber) dB	cable loss 3 (switch unit) dB	cable loss 4 (to receiver) dB	distance corr. (-20 dB/ decade) dB	d <sub>Limit</sub> (meas. distance (limit) m	d <sub>used</sub> (meas. distance (used) m
26.5	43.4	-11.2	4.4				-15.6	3	0.5
27.0	43.4	-11.2	4.4				-15.6	3	0.5
28.0	43.4	-11.1	4.5				-15.6	3	0.5
29.0	43.5	-11.0	4.6				-15.6	3	0.5
30.0	43.5	-10.9	4.7				-15.6	3	0.5
31.0	43.5	-10.8	4.7				-15.6	3	0.5
32.0	43.5	-10.7	4.8				-15.6	3	0.5
33.0	43.6	-10.7	4.9				-15.6	3	0.5
34.0	43.6	-10.6	5.0				-15.6	3	0.5
35.0	43.6	-10.5	5.1				-15.6	3	0.5
36.0	43.6	-10.4	5.1				-15.6	3	0.5
37.0	43.7	-10.3	5.2				-15.6	3	0.5
38.0	43.7	-10.2	5.3				-15.6	3	0.5
39.0	43.7	-10.2	5.4				-15.6	3	0.5
40.0	43.8	-10.1	5.5				-15.6	3	0.5

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)


Linear interpolation will be used for frequencies in between the values in the table.

distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7 SETUP DRAWINGS

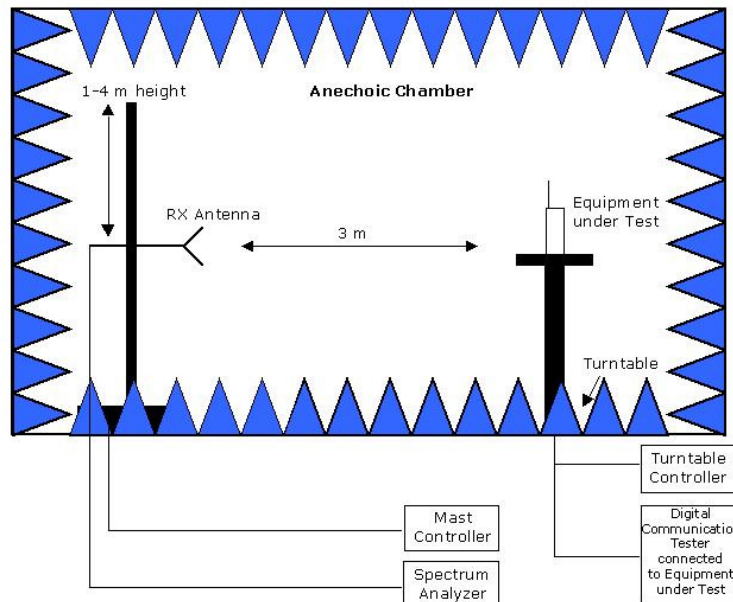

Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

## 8 MEASUREMENT UNCERTAINTIES

<b>Test Case</b>	<b>Parameter</b>	<b>Uncertainty</b>
AC Power Line	Power	± 3.4 dB
Field Strength of spurious radiation	Power	± 5.5 dB
6 dB / 26 dB / 99% Bandwidth	Power Frequency	± 2.9 dB ± 11.2 kHz
Conducted Output Power	Power	± 2.2 dB
Band Edge Compliance	Power Frequency	± 2.2 dB ± 11.2 kHz
Frequency Stability	Frequency	± 25 Hz
Power Spectral Density	Power	± 2.2 dB

## 9 PHOTO REPORT

Please see separate photo report.