

# FCC Measurement/Technical Report on Telematic Unit CONBOX-HIGH

FCC ID: T8GP114  
IC: 6434A-P114

**Test Report Reference:** MDE\_HARMAN\_1736\_FCCb\_rev1

**Test Laboratory:**

7layers GmbH  
Borsigstrasse 11  
40880 Ratingen  
Germany



**Note:**

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

**7layers GmbH**  
Borsigstraße 11  
40880 Ratingen, Germany  
T +49 (0) 2102 749 0  
F +49 (0) 2102 749 350

Geschäftsführer/  
Managing Directors:  
Frank Spiller  
Bernhard Retka  
Alexandre Norré-Oudard

Registergericht/registered:  
Düsseldorf HRB 75554  
USt-Id.-Nr./VAT-No. DE203159652  
Steuer-Nr./TAX-No. 147/5869/0385

*a Bureau Veritas  
Group Company*

*www.7layers.com*

## Table of Contents

|          |  |           |
|----------|--|-----------|
| <b>1</b> | <b>Applied Standards and Test Summary</b>                  | <b>4</b>  |
| 1.1      | Applied Standards  | 4         |
| 1.2      | FCC-IC Correlation Table                                   | 5         |
| 1.3      | Measurement Summary / Signatures                           | 6         |
| <b>2</b> | <b>Revision History</b>                                    | <b>10</b> |
| <b>3</b> | <b>Administrative Data</b>                                 | <b>11</b> |
| 3.1      | Testing Laboratory   | 11        |
| 3.2      | Project Data   | 11        |
| 3.3      | Applicant Data   | 11        |
| 3.4      | Manufacturer Data  | 12        |
| <b>4</b> | <b>Test object Data</b>                                    | <b>13</b> |
| 4.1      | General EUT Description                                    | 13        |
| 4.2      | EUT Main components  | 14        |
| 4.3      | Ancillary Equipment  | 15        |
| 4.4      | Auxiliary Equipment  | 15        |
| 4.5      | EUT Setups   | 15        |
| 4.6      | Operating Modes  | 16        |
| 4.7      | Product labelling  | 16        |
| <b>5</b> | <b>Test Results</b>  | <b>17</b> |
| 5.1      | Occupied Bandwidth (6 dB)                                  | 17        |
| 5.2      | Occupied Bandwidth (99%)                                   | 20        |
| 5.3      | Peak Power Output  | 23        |
| 5.4      | Spurious RF Conducted Emissions                            | 26        |
| 5.5      | Transmitter Spurious Radiated Emissions                    | 29        |
| 5.6      | Band Edge Compliance Conducted                             | 37        |
| 5.7      | Band Edge Compliance Radiated                              | 41        |
| 5.8      | Power Density  | 45        |
| <b>6</b> | <b>Test Equipment</b>                                      | <b>48</b> |
| <b>7</b> | <b>Antenna Factors, Cable Loss and Sample Calculations</b> | <b>51</b> |
| 7.1      | LISN R&S ESH3-Z5 (150 kHz – 30 MHz)                        | 51        |
| 7.2      | Antenna R&S HFH2-Z2 (9 kHz – 30 MHz)                       | 52        |
| 7.3      | Antenna R&S HL562 (30 MHz – 1 GHz)                         | 53        |
| 7.4      | Antenna R&S HF907 (1 GHz – 18 GHz)                         | 54        |
| 7.5      | Antenna EMCO 3160-09 (18 GHz – 26.5 GHz)                   | 55        |
| 7.6      | Antenna EMCO 3160-10 (26.5 GHz – 40 GHz)                   | 56        |
| <b>8</b> | <b>Setup Drawings</b>                                      | <b>57</b> |

|           |                                  |           |
|-----------|----------------------------------|-----------|
| <b>9</b>  | <b>Measurement Uncertainties</b> | <b>58</b> |
| <b>10</b> | <b>Photo Report</b>              | <b>58</b> |

## 1 APPLIED STANDARDS AND TEST SUMMARY

### 1.1 APPLIED STANDARDS

#### **Type of Authorization**

Certification for an Intentional Radiator.

#### **Applicable FCC Rules**

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 and 15 (10-1-18 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz

#### **Note:**

The tests were selected and performed with reference to the FCC Public Notice "Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of the FCC Rules, 558074 D01 15.247 Meas Guidance v05, 2018-08-24". ANSI C63.10–2013 is applied.

**Summary Test Results:**

**The EUT complied with all performed tests as listed in chapter 1.3 Measurement Summary / Signatures.**

1.2 FCC-IC CORRELATION TABLE

**Correlation of measurement requirements for  
DTS (e.g. WLAN 2.4 GHz, BT LE) equipment  
from  
FCC and IC**

**DTS equipment**

| <b>Measurement</b>                          | <b>FCC reference</b>          | <b>IC reference</b>                                       |
|---|-------------------------------|---|
| Conducted emissions on AC Mains             | § 15.207                      | RSS-Gen Issue 5: 8.8                                      |
| Occupied bandwidth                          | § 15.247 (a) (2)              | RSS-247 Issue 2: 5.2 (a)                                  |
| Peak conducted output power                 | § 15.247 (b) (3), (4)         | RSS-247 Issue 2: 5.4 (d)                                  |
| Transmitter spurious RF conducted emissions | § 15.247 (d)                  | RSS-Gen Issue 5: 6.13 / 8.9/8.10;<br>RSS-247 Issue 2: 5.5 |
| Transmitter spurious radiated emissions     | § 15.247 (d);<br>§ 15.209 (a) | RSS-Gen Issue 5: 6.13 / 8.9/8.10;<br>RSS-247 Issue 2: 5.5 |
| Band edge compliance                        | § 15.247 (d)                  | RSS-247 Issue 2: 5.5                                      |
| Power density                               | § 15.247 (e)                  | RSS-247 Issue 2: 5.2 (b)                                  |
| Antenna requirement                         | § 15.203 / 15.204             | RSS-Gen Issue 5: 8.3                                      |
| Receiver spurious emissions                 | –                             | –   |

### 1.3 MEASUREMENT SUMMARY / SIGNATURES

#### 47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

#### § 15.247 (a) (2)

Occupied Bandwidth (6 dB)

The measurement was performed according to ANSI C63.10

#### Final Result

| OP-Mode                               | Setup    | FCC    | IC     |
|---------------------------------------|----------|--------|--------|
| Radio Technology, Operating Frequency |          |        |        |
| Bluetooth LE, high                    | S01_AF02 | Passed | Passed |
| Bluetooth LE, low                     | S01_AF02 | Passed | Passed |
| Bluetooth LE, mid                     | S01_AF02 | Passed | Passed |
| WLAN b, high                          | S01_AB01 | Passed | Passed |
| WLAN b, low                           | S01_AB01 | Passed | Passed |
| WLAN b, mid                           | S01_AB01 | Passed | Passed |
| WLAN g, high                          | S01_AB01 | Passed | Passed |
| WLAN g, low                           | S01_AB01 | Passed | Passed |
| WLAN g, mid                           | S01_AB01 | Passed | Passed |
| WLAN n 20 MHz, high                   | S01_AB01 | Passed | Passed |
| WLAN n 20 MHz, low                    | S01_AB01 | Passed | Passed |
| WLAN n 20 MHz, mid                    | S01_AB01 | Passed | Passed |

#### 47 CFR CHAPTER I FCC PART 15 Subpart C §15.247

#### IC RSS-Gen & IC TRC-43; Ch. 6.7 & Ch. 8

Occupied Bandwidth (99%)

The measurement was performed according to ANSI C63.10

#### Final Result

| OP-Mode                               | Setup    | FCC | IC     |
|---------------------------------------|----------|-----|--------|
| Radio Technology, Operating Frequency |          |     |        |
| Bluetooth LE, high                    | S01_AF02 | N/A | Passed |
| Bluetooth LE, low                     | S01_AF02 | N/A | Passed |
| Bluetooth LE, mid                     | S01_AF02 | N/A | Passed |
| WLAN b, high                          | S01_AB01 | N/A | Passed |
| WLAN b, low                           | S01_AB01 | N/A | Passed |
| WLAN b, mid                           | S01_AB01 | N/A | Passed |
| WLAN g, high                          | S01_AB01 | N/A | Passed |
| WLAN g, low                           | S01_AB01 | N/A | Passed |
| WLAN g, mid                           | S01_AB01 | N/A | Passed |
| WLAN n 20 MHz, high                   | S01_AB01 | N/A | Passed |
| WLAN n 20 MHz, low                    | S01_AB01 | N/A | Passed |
| WLAN n 20 MHz, mid                    | S01_AB01 | N/A | Passed |

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (b) (3)**

Peak Power Output

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b>  | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|---|--------------|------------|-----------|
| Radio Technology, Operating Frequency, Measurement method |              |            |           |
| Bluetooth LE, high, conducted                             | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, low, conducted                              | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, mid, conducted                              | S01_AF02     | Passed     | Passed    |
| WLAN b, high, conducted                                   | S01_AB01     | Passed     | Passed    |
| WLAN b, low, conducted                                    | S01_AB01     | Passed     | Passed    |
| WLAN b, mid, conducted                                    | S01_AB01     | Passed     | Passed    |
| WLAN g, high, conducted                                   | S01_AB01     | Passed     | Passed    |
| WLAN g, low, conducted                                    | S01_AB01     | Passed     | Passed    |
| WLAN g, mid, conducted                                    | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, high, conducted                            | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, low, conducted                             | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, mid, conducted                             | S01_AB01     | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Spurious RF Conducted Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b>                        | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------|--------------|------------|-----------|
| Radio Technology, Operating Frequency |              |            |           |
| Bluetooth LE, high                    | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, low                     | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, mid                     | S01_AF02     | Passed     | Passed    |
| WLAN b, high                          | S01_AB01     | Passed     | Passed    |
| WLAN b, low                           | S01_AB01     | Passed     | Passed    |
| WLAN b, mid                           | S01_AB01     | Passed     | Passed    |
| WLAN g, high                          | S01_AB01     | Passed     | Passed    |
| WLAN g, low                           | S01_AB01     | Passed     | Passed    |
| WLAN g, mid                           | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, high                   | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, low                    | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, mid                    | S01_AB01     | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Transmitter Spurious Radiated Emissions

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b>   | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|--|--------------|------------|-----------|
| Radio Technology, Operating Frequency, Measurement range |              |            |           |
| Bluetooth LE, high, 1 GHz - 26 GHz                       | S02_AH02     | Passed     | Passed    |
| Bluetooth LE, high, 30 MHz - 1 GHz                       | S02_AF02     | Passed     | Passed    |
| Bluetooth LE, low, 1 GHz - 26 GHz                        | S02_AH02     | Passed     | Passed    |
| Bluetooth LE, low, 30 MHz - 1 GHz                        | S02_AF02     | Passed     | Passed    |
| Bluetooth LE, mid, 1 GHz - 26 GHz                        | S02_AH02     | Passed     | Passed    |
| Bluetooth LE, mid, 30 MHz - 1 GHz                        | S02_AF02     | Passed     | Passed    |
| Bluetooth LE, mid, 9 kHz - 30 MHz                        | S02_AF02     | Passed     | Passed    |
| WLAN b, high, 1 GHz - 26 GHz                             | S02_AE02     | Passed     | Passed    |
| WLAN b, high, 30 MHz - 1 GHz                             | S02_AE02     | Passed     | Passed    |
| WLAN b, low, 1 GHz - 26 GHz                              | S02_AE02     | Passed     | Passed    |
| WLAN b, low, 30 MHz - 1 GHz                              | S02_AE02     | Passed     | Passed    |
| WLAN b, mid, 1 GHz - 26 GHz                              | S02_AE02     | Passed     | Passed    |
| WLAN b, mid, 30 MHz - 1 GHz                              | S02_AE02     | Passed     | Passed    |
| WLAN b, mid, 9 kHz - 30 MHz                              | S02_AE02     | Passed     | Passed    |
| WLAN g, high, 1 GHz - 8 GHz                              | S02_AE02     | Passed     | Passed    |
| WLAN g, low, 1 GHz - 8 GHz                               | S02_AE02     | Passed     | Passed    |
| WLAN g, mid, 1 GHz - 8 GHz                               | S02_AE02     | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Conducted

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b>                                   | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|--|--------------|------------|-----------|
| Radio Technology, Operating Frequency, Band Edge |              |            |           |
| Bluetooth LE, high, high                         | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, low, low                           | S01_AF02     | Passed     | Passed    |
| WLAN b, high, high                               | S01_AB01     | Passed     | Passed    |
| WLAN b, low, low                                 | S01_AB01     | Passed     | Passed    |
| WLAN g, high, high                               | S01_AB01     | Passed     | Passed    |
| WLAN g, low, low                                 | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, high, high                        | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, low, low                          | S01_AB01     | Passed     | Passed    |



**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (d)**

Band Edge Compliance Radiated

The measurement was performed according to ANSI C63.10

**Final Result**

| <b>OP-Mode</b>                                   | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|--|--------------|------------|-----------|
| Radio Technology, Operating Frequency, Band Edge |              |            |           |
| Bluetooth LE, high, high                         | S02_AH02     | Passed     | Passed    |
| WLAN b, high, high                               | S02_AE02     | Passed     | Passed    |
| WLAN g, high, high                               | S02_AE02     | Passed     | Passed    |
| WLAN n 20 MHz, high, high                        | S02_AE02     | Passed     | Passed    |

**47 CFR CHAPTER I FCC PART 15 Subpart C**  
**§15.247**

**§ 15.247 (e)**

Power Density

The measurement was performed according to ANSI C63.10

**Final Result**


| <b>OP-Mode</b>                        | <b>Setup</b> | <b>FCC</b> | <b>IC</b> |
|---------------------------------------|--------------|------------|-----------|
| Radio Technology, Operating Frequency |              |            |           |
| Bluetooth LE, high                    | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, low                     | S01_AF02     | Passed     | Passed    |
| Bluetooth LE, mid                     | S01_AF02     | Passed     | Passed    |
| WLAN b, high                          | S01_AB01     | Passed     | Passed    |
| WLAN b, low                           | S01_AB01     | Passed     | Passed    |
| WLAN b, mid                           | S01_AB01     | Passed     | Passed    |
| WLAN g, high                          | S01_AB01     | Passed     | Passed    |
| WLAN g, low                           | S01_AB01     | Passed     | Passed    |
| WLAN g, mid                           | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, high                   | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, low                    | S01_AB01     | Passed     | Passed    |
| WLAN n 20 MHz, mid                    | S01_AB01     | Passed     | Passed    |

N/A: Not applicable  
N/P: Not performed

2 REVISION HISTORY

| Report version control |              |  |                  |
|------------------------|--------------|--|------------------|
| Version                | Release date | Change Description   | Version validity |
| initial                | 2019-04-16   | --   | valid            |
| rev1                   | 2019-05-14   | Changed referenced version of 47 CFR Ch.1 Parts 2 and 15 edition to 2018 | valid            |

COMMENT: -



(responsible for accreditation scope)  
Dipl.-Ing. Marco Kullik



(responsible for testing and report)  
Dipl.-Ing. Daniel Gall



7 layers GmbH, Borsigstr. 11  
40880 Ratingen, Germany  
Phone +49 (0)2102 749 0

### 3 ADMINISTRATIVE DATA

#### 3.1 TESTING LABORATORY

Company Name: 7layers GmbH  
Address: Borsigstr. 11  
40880 Ratingen  
Germany

The test facility is accredited by the following accreditation organisation:

Laboratory accreditation no: DAkKS D-PL-12140-01-00  
FCC Designation Number: DE0015  
FCC Test Firm Registration: 929146  
ISED CAB Identifier DE0007; ISED#: 3699A

Responsible for accreditation scope: Dipl.-Ing. Marco Kullik

Report Template Version: 2019-02-12

#### 3.2 PROJECT DATA

Responsible for testing and report: Dipl.-Ing. Daniel Gall  
Employees who performed the tests: documented internally at 7Layers  
Date of Report: 2019-05-14  
Testing Period: 2018-03-12 to 2019-04-10

#### 3.3 APPLICANT DATA

Company Name: HARMAN BECKER Automotive Systems GmbH  
Address: Becker-Goering-Str. 16  
76307 Karlsbad  
Germany  
Contact Person: Stefan Blaschek

### 3.4 MANUFACTURER DATA

Company Name: HARMAN BECKER Automotive Systems GmbH

Address: Becker-Goering-Str. 16  
76307 Karlsbad  
Germany

Contact Person: Stefan Blaschek

## 4 TEST OBJECT DATA

### 4.1 GENERAL EUT DESCRIPTION

|  |  |
|--|--|
| Kind of Device product description       | Telematic system with BT, WLAN, GNSS, GSM, UMTS, LTE   |
| Product name                             | CONBOX-HIGH  |
| Type                                     | CONBOX-HIGH  |
| <b>Declared EUT data by the supplier</b> |  |
| Voltage Type                             | DC   |
| Voltage Level                            | 12 V   |
| Tested Modulation Type                   | BT LE: GFSK<br>WLANb: DSSS<br>WLAN g/n: OFDM   |
| Specific product description for the EUT | In the 2.4 GHz band the EUT has integrated Bluetooth, Bluetooth Low Energy and WLAN functionality.<br>Relevant for this report is the Bluetooth Low Energy and the WLAN transmitter. The WLAN transmitter supports WLAN mode b/g/n in 20 MHz bandwidth.<br>The antenna gain for the external antennas in the 2.4 GHz band is: -0.1 dBi |
| The EUT provides the following ports:    | Enclosure<br>Cable Harness incl. DC (unshielded)<br>Antenna Port Cellular (4 Antennas, shielded)<br>Antenna Port WLAN/BT/BT LE (3 Antennas, shielded)<br>Antenna Port GNSS (1 Antenna, shielded)   |
| Tested datarates                         | BT LE: 1Mbps<br>WLAN mode b: 1 Mbps<br>WLAN mode g: 6 Mbps<br>WLAN mode n: MCS0  |

**The main components of the EUT are listed and described in chapter 3.2 EUT Main components.**

#### 4.2 EUT MAIN COMPONENTS

| Sample Name      | Sample Code     | Description |
|------------------|-----------------|-------------|
| EUT af02         | DE1009043af02   |             |
| Sample Parameter | Value           |             |
| Serial No.       | P114H70JB001194 |             |
| HW Version       | EC983           |             |
| SW Version       | Z025            |             |
| Comment          |                 |             |

| Sample Name      | Sample Code     | Description |
|------------------|-----------------|-------------|
| EUT ae02         | DE1009043ae02   |             |
| Sample Parameter | Value           |             |
| Serial No.       | A975J20JB000071 |             |
| HW Version       | EC995           |             |
| SW Version       | Y025            |             |
| Comment          |                 |             |

| Sample Name      | Sample Code     | Description |
|------------------|-----------------|-------------|
| EUT ah02         | DE1009043ah02   |             |
| Sample Parameter | Value           |             |
| Serial No.       | P114H40JB001164 |             |
| HW Version       | EC983           |             |
| SW Version       | Y025            |             |
| Comment          |                 |             |

| Sample Name      | Sample Code     | Description |
|------------------|-----------------|-------------|
| EUT ab01         | DE1009043ab01   |             |
| Sample Parameter | Value           |             |
| Serial No.       | P114H00JB001124 |             |
| HW Version       | EC983           |             |
| SW Version       | Z025            |             |
| Comment          |                 |             |

NOTE: The short description is used to simplify the identification of the EUT in this test report.

### 4.3 ANCILLARY EQUIPMENT

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, Type Model, OUT Code) | Description |
|--------|---|-------------|
| -      | -   | -           |

### 4.4 AUXILIARY EQUIPMENT

For the purposes of this test report, auxiliary equipment is defined as equipment which is used temporarily to enable operational and control features especially used for the tests of the EUT which is not used during normal operation or equipment that is used during the tests in combination with the EUT but is not subject of this test report. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Auxiliary Equipment can influence the test results.

| Device | Details<br>(Manufacturer, Type Model, HW, SW, S/N) | Description                  |
|--------|--|------------------------------|
| AUX1   | 4M0.035.507, 09/18, - ,<br>00052/00056/00191/00037 | 4 external cellular antennas |
| AUX2   | 4N0 035 500, 47/17, -, -                           | 3 external WLAN/BT antennas  |
| AUX3   | Hirschmann, -                                      | External GNSS antenna        |

### 4.5 EUT SETUPS

This chapter describes the combination of EUTs and equipment used for testing. The rationale for selecting the EUTs, ancillary and auxiliary equipment and interconnecting cables, is to test a representative configuration meeting the requirements of the referenced standards.

| Setup    | Combination of EUTs        | Description and Rationale |
|----------|----------------------------|---------------------------|
| S01_AB01 | EUT ab01,                  | Conducted Setup           |
| S02_AE02 | EUT ae02, AUX1, AUX2, AUX3 | Radiated Setup            |
| S01_AF02 | EUT af02,                  | Conducted Setup           |
| S02_AF02 | EUT af02, AUX1, AUX2, AUX3 | Radiated Setup            |
| S02_AH02 | EUT ah02, AUX1, AUX2, AUX3 | Radiated Setup            |

## 4.6 OPERATING MODES

This chapter describes the operating modes of the EUTs used for testing.

### 4.6.1 TEST CHANNELS

**WLAN**  
**20 MHz Test Channels:**  
**Channel:**  
**Frequency [MHz]**

| <b>2.4 GHz ISM</b>       |            |             |
|--------------------------|------------|-------------|
| <b>2400 - 2483.5 MHz</b> |            |             |
| <b>low</b>               | <b>mid</b> | <b>high</b> |
| 1                        | 6          | 11          |
| 2412                     | 2437       | 2462        |

**BT LE Test Channels:**  
**Channel:**  
**Frequency [MHz]**

| <b>2.4 GHz ISM</b>       |            |             |
|--------------------------|------------|-------------|
| <b>2400 - 2483.5 MHz</b> |            |             |
| <b>low</b>               | <b>mid</b> | <b>high</b> |
| 0                        | 19         | 39          |
| 2402                     | 2440       | 2480        |

## 4.7 PRODUCT LABELLING

### 4.7.1 FCC ID LABEL

Please refer to the documentation of the applicant.

### 4.7.2 LOCATION OF THE LABEL ON THE EUT

Please refer to the documentation of the applicant.



## 5 TEST RESULTS

### 5.1 OCCUPIED BANDWIDTH (6 DB)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 5.1.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The results recorded were measured with the modulation which produce the worst-case (smallest) emission bandwidth.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram

#### 5.1.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (a) (2)

Systems using digital modulation techniques may operate in the 902-928 MHz and 2400-2483.5 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 5.1.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE GFSK

| Band        | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 0           | 2402            | 0.75                 | 0.5         | 0.25                  |
|             | 19          | 2440            | 0.75                 | 0.5         | 0.25                  |
|             | 39          | 2480            | 0.73                 | 0.5         | 0.23                  |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Band        | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1           | 2412            | 9.3                  | 0.5         | 8.8                   |
|             | 6           | 2437            | 9.3                  | 0.5         | 8.8                   |
|             | 11          | 2462            | 9.3                  | 0.5         | 8.8                   |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Band        | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1           | 2412            | 16.5                 | 0.5         | 16.0                  |
|             | 6           | 2437            | 16.5                 | 0.5         | 16.0                  |
|             | 11          | 2462            | 16.5                 | 0.5         | 16.0                  |


WLAN n-Mode; 20 MHz; MCS0

| Band        | Channel No. | Frequency [MHz] | 6 dB Bandwidth [MHz] | Limit [MHz] | Margin to Limit [MHz] |
|-------------|-------------|-----------------|----------------------|-------------|-----------------------|
| 2.4 GHz ISM | 1           | 2412            | 17.7                 | 0.5         | 17.2                  |
|             | 6           | 2437            | 17.5                 | 0.5         | 17.0                  |
|             | 11          | 2462            | 17.7                 | 0.5         | 17.2                  |

Remark: Please see next sub-clause for the measurement plot.


### 5.1.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

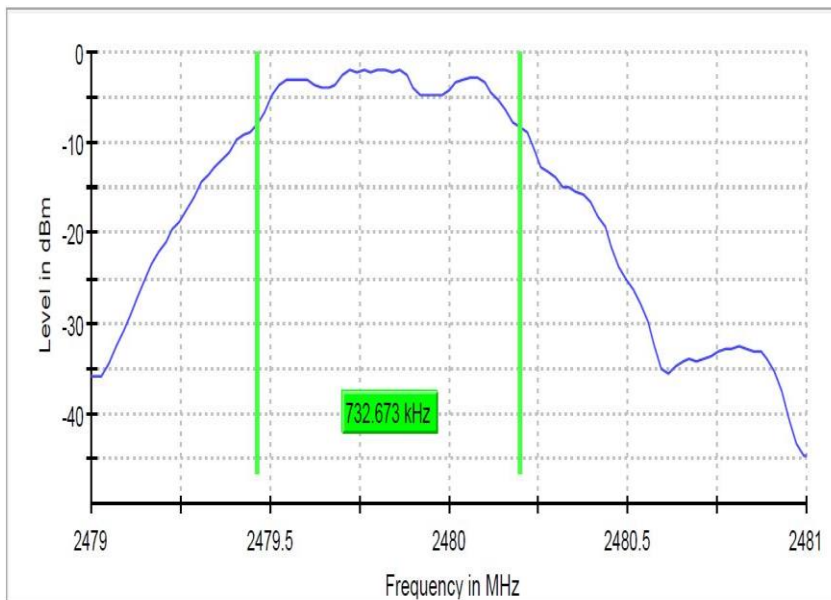

| Setting               | Instrument Value |
|-----------------------|------------------|
| Start Frequency       | 2.47900 GHz      |
| Stop Frequency        | 2.48100 GHz      |
| Span                  | 2.000 MHz        |
| RBW                   | 100.000 kHz      |
| VBW                   | 300.000 kHz      |
| SweepPoints           | 101              |
| Sweeptime             | 18.938 $\mu$ s   |
| Reference Level       | -10.000 dBm      |
| Attenuation           | 10.000 dB        |
| Detector              | MaxPeak          |
| SweepCount            | 100              |
| Filter                | 3 dB             |
| Trace Mode            | Max Hold         |
| Sweeptype             | FFT              |
| Preamp                | off              |
| Stablemode            | Trace            |
| Stablevalue           | 0.50 dB          |
| Run                   | 20 / max. 150    |
| Stable                | 5 / 5            |
| Max Stable Difference | 0.31 dB          |

Radio Technology = WLAN b, Operating Frequency = mid  
(S01\_AB01)

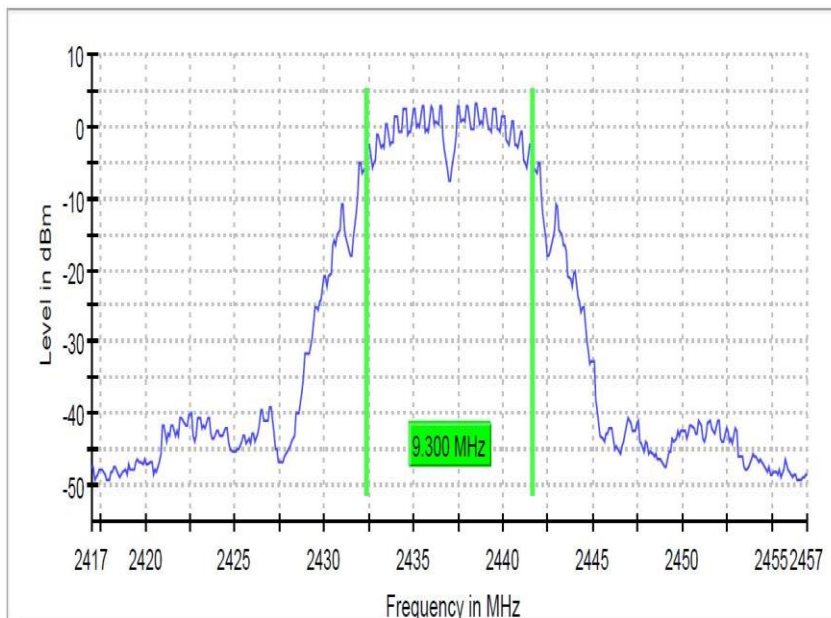

| Setting               | Instrument Value |
|-----------------------|------------------|
| Start Frequency       | 2.41700 GHz      |
| Stop Frequency        | 2.45700 GHz      |
| Span                  | 40.000 MHz       |
| RBW                   | 100.000 kHz      |
| VBW                   | 300.000 kHz      |
| SweepPoints           | 400              |
| Sweeptime             | 56.886 $\mu$ s   |
| Reference Level       | 0.000 dBm        |
| Attenuation           | 20.000 dB        |
| Detector              | MaxPeak          |
| SweepCount            | 100              |
| Filter                | 3 dB             |
| Trace Mode            | Max Hold         |
| Sweeptype             | FFT              |
| Preamp                | off              |
| Stablemode            | Trace            |
| Stablevalue           | 0.50 dB          |
| Run                   | 13 / max. 150    |
| Stable                | 5 / 5            |
| Max Stable Difference | 0.00 dB          |

### 5.1.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.2 OCCUPIED BANDWIDTH (99%)

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.2.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the occupied bandwidth measurements.

The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

The 99 % measurement function of the spectrum analyser function was used to determine the 99 % bandwidth.

### 5.2.2 TEST REQUIREMENTS / LIMITS

No applicable limit:

### 5.2.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE

| Band        | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 0           | 2402            | 1.0                  |
|             | 19          | 2440            | 1.0                  |
|             | 39          | 2480            | 1.0                  |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Band        | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1           | 2412            | 11.3                 |
|             | 6           | 2437            | 11.5                 |
|             | 11          | 2462            | 11.5                 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Band        | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1           | 2412            | 17.5                 |
|             | 6           | 2437            | 17.4                 |
|             | 11          | 2462            | 17.4                 |


WLAN n-Mode; 20 MHz; MCS0

| Band        | Channel No. | Frequency [MHz] | 99 % Bandwidth [MHz] |
|-------------|-------------|-----------------|----------------------|
| 2.4 GHz ISM | 1           | 2412            | 18.5                 |
|             | 6           | 2437            | 18.5                 |
|             | 11          | 2462            | 18.6                 |


Remark: Please see next sub-clause for the measurement plot.

### 5.2.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = mid  
(S01\_AF02)

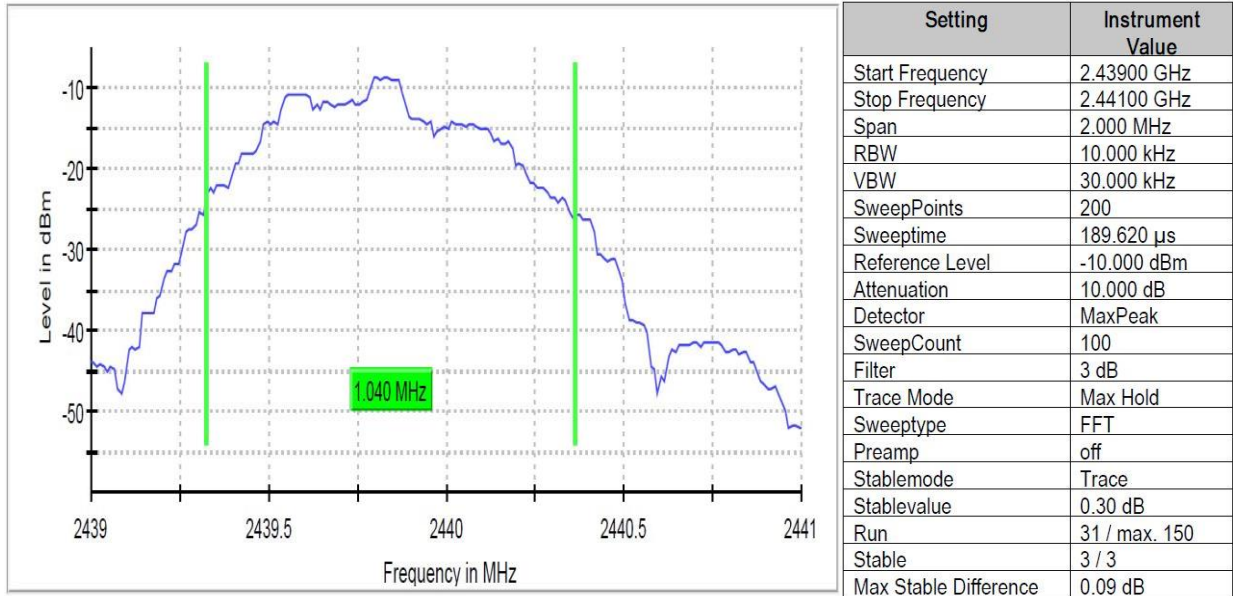

Radio Technology = WLAN n 20 MHz, Operating Frequency = high  
(S01\_AB01)

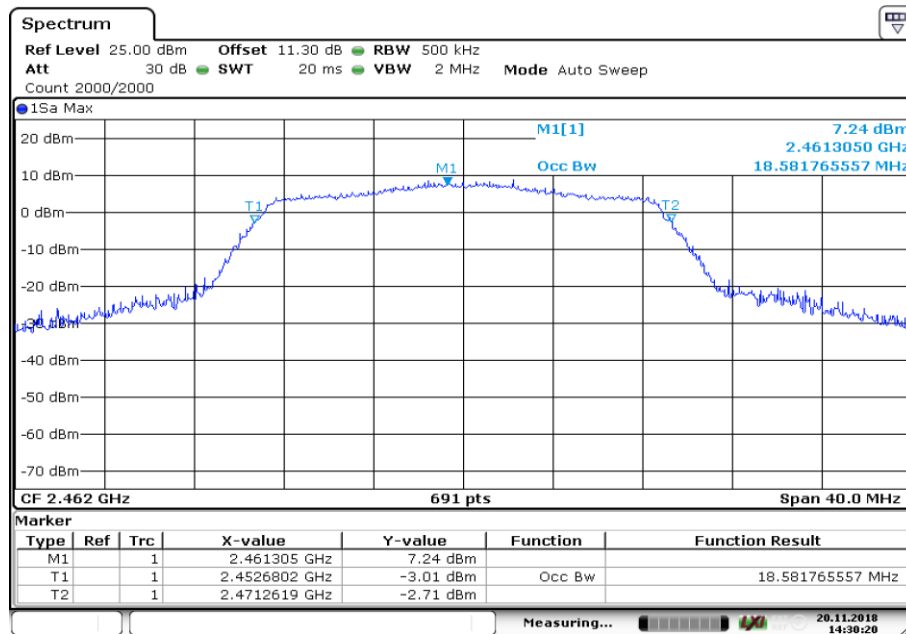

Date: 20.NOV.2018 14:30:20

### 5.2.5 TEST EQUIPMENT USED

- R&S TS8997

### 5.3 PEAK POWER OUTPUT

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

#### 5.3.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power. The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings BT LE:  
Please see diagram.

For the WLAN measurements a gated RF average-reading power meter was used.

#### 5.3.2 TEST REQUIREMENTS / LIMITS

##### **DTS devices:**

FCC Part 15, Subpart C, §15.247 (b) (3)

For systems using digital modulation techniques in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1 watt.

==> Maximum conducted peak output power: 30 dBm (excluding antenna gain, if antennas with directional gains that do not exceed 6 dBi are used).

##### **Frequency Hopping Systems:**

FCC Part 15, Subpart C, §15.247 (b) (1)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

FCC Part 15, Subpart C, §15.247 (b) (2)

For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

Used conversion factor: Limit (dBm) = 10 log (Limit (W)/1mW)

#### 5.3.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 1010 hPa  
Humidity: 37 %

BT LE

| Band        | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 0           | 2402            | -1.7             | 30.0        | 31.7                 | -1.6          |
|             | 19          | 2440            | -1.9             | 30.0        | 31.9                 | -1.8          |
|             | 39          | 2480            | -2.0             | 30.0        | 32.0                 | -1.9          |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Band        | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1           | 2412            | 11.3             | 30.0        | 18.7                 | 11.4          |
|             | 6           | 2437            | 11.7             | 30.0        | 18.3                 | 11.8          |
|             | 11          | 2462            | 12.0             | 30.0        | 18.0                 | 12.1          |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Band        | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1           | 2412            | 11.6             | 30.0        | 18.4                 | 11.7          |
|             | 6           | 2437            | 11.8             | 30.0        | 18.2                 | 11.9          |
|             | 11          | 2462            | 12.1             | 30.0        | 17.9                 | 12.2          |


WLAN n-Mode; 20 MHz; MCS0

| Band        | Channel No. | Frequency [MHz] | Peak Power [dBm] | Limit [dBm] | Margin to Limit [dB] | E.I.R.P [dBm] |
|-------------|-------------|-----------------|------------------|-------------|----------------------|---------------|
| 2.4 GHz ISM | 1           | 2412            | 11.9             | 30.0        | 18.1                 | 12.0          |
|             | 6           | 2437            | 12.3             | 30.0        | 17.7                 | 12.4          |
|             | 11          | 2462            | 12.6             | 30.0        | 17.4                 | 12.7          |

Remark: Please see next sub-clause for the measurement plot.

### 5.3.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = low, Measurement method = conducted (S01\_AF02)

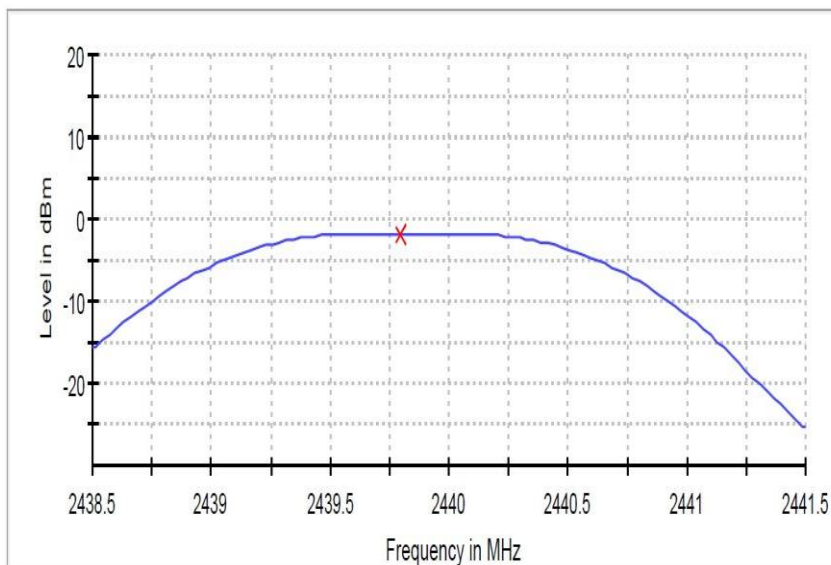

— Connector 1    X Peak Connector 1

| Setting               | Instrument Value |
|-----------------------|------------------|
| Start Frequency       | 2.43850 GHz      |
| Stop Frequency        | 2.44150 GHz      |
| Span                  | 3.000 MHz        |
| RBW                   | 1.000 MHz        |
| VBW                   | 3.000 MHz        |
| SweepPoints           | 101              |
| Sweeptime             | 1.907 $\mu$ s    |
| Reference Level       | 0.000 dBm        |
| Attenuation           | 20.000 dB        |
| Detector              | MaxPeak          |
| SweepCount            | 100              |
| Filter                | 3 dB             |
| Trace Mode            | Max Hold         |
| Sweeptype             | FFT              |
| Preamp                | off              |
| Stablemode            | Trace            |
| Stablevalue           | 0.50 dB          |
| Run                   | 4 / max. 150     |
| Stable                | 3 / 3            |
| Max Stable Difference | 0.05 dB          |

Note: No plots for the WLAN results are given since a power meter was used.



### 5.3.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.4 SPURIOUS RF CONDUCTED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.4.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up to perform the spurious emissions measurements. The EUT was connected to spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:

- Frequency range: 30 – 25000 MHz
- Resolution Bandwidth (RBW): 100 kHz
- Video Bandwidth (VBW): 300 kHz
- Trace: Maxhold
- Sweeps: 2
- Sweep Time: 330 s
- Detector: Peak

The reference value for the measurement of the spurious RF conducted emissions is determined during the test “band edge compliance conducted” (low and high frequency) and 6 dB BW test (mid frequency). This value is used to calculate the 20 or 30 dBc limit.

### 5.4.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (c)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE GFSK

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 20 dBc Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|--------------------|----------------------|
| 0          | 2402                       | -                    | -                    | PEAK     | 100       | -1.7             | -21.7              | >20                  |
| 19         | 2440                       | -                    | -                    | PEAK     | 100       | -1.9             | -21.9              | >20                  |
| 39         | 2480                       | -                    | -                    | PEAK     | 100       | -2.2             | -22.2              | >20                  |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30dBc Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------------|----------------------|
| 1          | 2412                       | -                    | -                    | PEAK     | 100       | 2.9              | -27.1             | >10                  |
| 6          | 2437                       | -                    | -                    | PEAK     | 100       | 3.2              | -26.8             | >10                  |
| 11         | 2462                       | -                    | -                    | PEAK     | 100       | 3.7              | -26.3             | >10                  |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30dBc Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------------|----------------------|
| 1          | 2412                       | -                    | -                    | PEAK     | 100       | -0.1             | -30.1             | >10                  |
| 6          | 2437                       | -                    | -                    | PEAK     | 100       | 0.4              | -29.6             | >10                  |
| 11         | 2462                       | -                    | -                    | PEAK     | 100       | 0.6              | -29.4             | >10                  |


WLAN n-Mode; 20 MHz; MCS0

| Channel No | Channel Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30dBc Limit [dBm] | Margin to Limit [dB] |
|------------|----------------------------|----------------------|----------------------|----------|-----------|------------------|-------------------|----------------------|
| 1          | 2412                       | -                    | -                    | PEAK     | 100       | -0.1             | -30.1             | >10                  |
| 6          | 2437                       | -                    | -                    | PEAK     | 100       | 0.4              | -29.6             | >10                  |
| 11         | 2462                       | -                    | -                    | PEAK     | 100       | 0.5              | -29.5             | >10                  |

Remark: Please see next sub-clause for the measurement plot.


#### 5.4.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

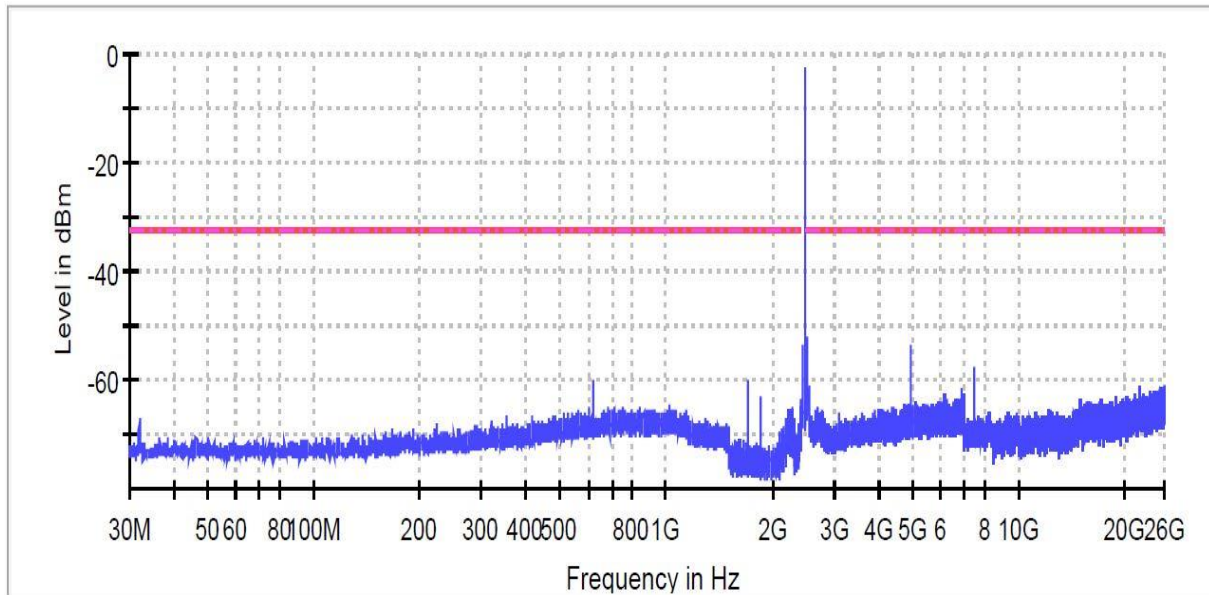

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

Radio Technology = WLAN n-Mode, Operating Frequency = mid  
(S01\_AK05)

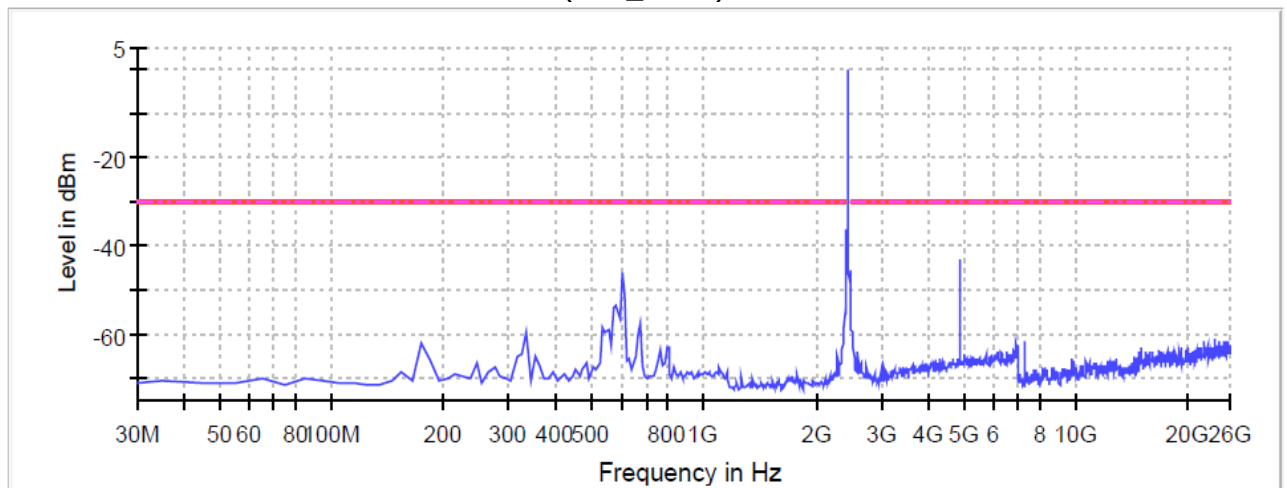

— Limit    — Sum Level    - - - Threshold    × Critical    × Final Critical

#### 5.4.5 TEST EQUIPMENT USED

- R&S TS8997

## 5.5 TRANSMITTER SPURIOUS RADIATED EMISSIONS

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.5.1 TEST DESCRIPTION

The test set-up was made in accordance to the general provisions of ANSI C63.10 in a typical installation configuration. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m<sup>2</sup> in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The measurement procedure is implemented into the EMI test software EMC32 from R&S. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is also performed at 3 axes. A pre-check is performed while the EUT is powered from a DC power source.

#### 1. Measurement up to 30 MHz

The Loop antenna HFH2-Z2 is used.

##### Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 3 m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 MHz and 0.15 - 30 MHz
- Frequency steps: 0.05 kHz and 2.25 kHz
- IF-Bandwidth: 0.2 kHz and 9 kHz
- Measuring time / Frequency step: 100 ms (FFT-based)

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

##### Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 - 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 0.2 - 10 kHz
- Measuring time / Frequency step: 1 s

#### 2. Measurement above 30 MHz and up to 1 GHz

##### Step 1: Preliminary scan

This is a preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Antenna distance: 3 m
- Detector: Peak-Maxhold / Quasipeak (FFT-based)
- Frequency range: 30 - 1000 MHz

- Frequency steps: 30 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100 ms
- Turntable angle range:  $-180^{\circ}$  to  $90^{\circ}$
- Turntable step size:  $90^{\circ}$
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

### **Step 2:** Adjustment measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will slowly vary by  $\pm 45^{\circ}$  around this value. During this action, the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position, the antenna height will also slowly vary by  $\pm 100$  cm around the antenna height determined. During this action, the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range:  $\pm 45^{\circ}$  around the determined value
- Height variation range:  $\pm 100$  cm around the determined value
- Antenna Polarisation: max. value determined in step 1

### **Step 3:** Final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak ( $< 1$  GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

## **3. Measurement above 1 GHz**

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

### **Step 1:**

The Equipment Under Test (EUT) was set up on a non-conductive support (tilt device) at 1.5 m height in the fully-anechoic chamber.

All steps were performed with one height (1.5 m) of the receiving antenna only.

The EUT is turned during the preliminary measurement across the elevation axis, with a step size of  $90^{\circ}$ .

The turn table step size (azimuth angle) for the preliminary measurement is  $45^{\circ}$ .

### **Step 2:**

Due to the fact, that in this frequency range the test is performed in a fully anechoic room, the height scan of the receiving antenna instep 2 is omitted. Instead of this, a maximum search with a step size  $\pm 45^{\circ}$  for the elevation axis is performed.

The turn table azimuth will slowly vary by  $\pm 22.5^\circ$ .

The elevation angle will slowly vary by  $\pm 45^\circ$

EMI receiver settings (for all steps):

- Detector: Peak, Average
- IF Bandwidth = 1 MHz

**Step 3:**

Spectrum analyser settings for step 3:

- Detector: Peak / Average
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 1 MHz
- Measuring time: 1 s

### 5.5.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit ( $\mu\text{V}/\text{m}$ ) | Measurement distance (m) | Limits ( $\text{dB}\mu\text{V}/\text{m}$ ) |
|------------------|----------------------------------|--------------------------|--|
| 0.009 – 0.49     | 2400/F(kHz)@300m                 | 3                        | (48.5 – 13.8)@300m                         |
| 0.49 – 1.705     | 24000/F(kHz)@30m                 | 3                        | (33.8 – 23.0)@30m                          |
| 1.705 – 30       | 30@30m                           | 3                        | 29.5@30m                                   |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit ( $\mu\text{V}/\text{m}$ ) | Measurement distance (m) | Limits ( $\text{dB}\mu\text{V}/\text{m}$ ) |
|------------------|----------------------------------|--------------------------|--|
| 30 – 88          | 100@3m                           | 3                        | 40.0@3m                                    |
| 88 – 216         | 150@3m                           | 3                        | 43.5@3m                                    |
| 216 – 960        | 200@3m                           | 3                        | 46.0@3m                                    |
| 960 – 26000      | 500@3m                           | 3                        | 54.0@3m                                    |
| 26000 – 40000    | 500@3m                           | 1                        | 54.0@3m                                    |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V}/\text{m)} = 20 \log (\text{Limit } (\mu\text{V}/\text{m})/1\mu\text{V}/\text{m})$

### 5.5.3 TEST PROTOCOL

Ambient temperature: 23 - 24 °C  
 Air Pressure: 1006–1018 hPa  
 Humidity: 28–35 %  
 BT low Energy  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dB $\mu$ V/m] | Detector | RBW [kHz] | Limit [dB $\mu$ V/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------------|----------|-----------|----------------------|----------------------|------------|
| 39      | 2480                   | 125.0                | 33.6                          | QP       | 120       | 43.5                 | 9.9                  | RB         |

WLAN b-Mode; 20 MHz; 1 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dB $\mu$ V/m] | Detector | RBW [kHz] | Limit [dB $\mu$ V/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------------|----------|-----------|----------------------|----------------------|------------|
| 11      | 2462                   | 2497.0               | 56.0                          | PEAK     | 1000      | 74.0                 | 18.0                 | RB         |
| 11      | 2462                   | 2497.3               | 37.5                          | AV       | 1000      | 54.0                 | 16.5                 | RB         |

WLAN g-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB


| Ch. No. | Ch. Center Freq. [MHz] | Spurious Freq. [MHz] | Spurious Level [dB $\mu$ V/m] | Detector | RBW [kHz] | Limit [dB $\mu$ V/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|----------------------|-------------------------------|----------|-----------|----------------------|----------------------|------------|
| 1       | 2412                   | 2390.0               | 63.3                          | PEAK     | 1000      | 74.0                 | 10.7                 | RB         |
| 1       | 2412                   | 2390.0               | 47.3                          | AV       | 1000      | 54.0                 | 6.7                  | RB         |
| 1       | 2412                   | 2497.9               | 56.6                          | PEAK     | 1000      | 74.0                 | 17.4                 | RB         |
| 1       | 2412                   | 2498.0               | 36.3                          | AV       | 1000      | 54.0                 | 17.7                 | RB         |

Remark: Please see next sub-clause for the measurement plot.



### 5.5.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = Bluetooth LE, Operating Frequency = high, Measurement range = 30 MHz - 1 GHz (S01\_AF02)

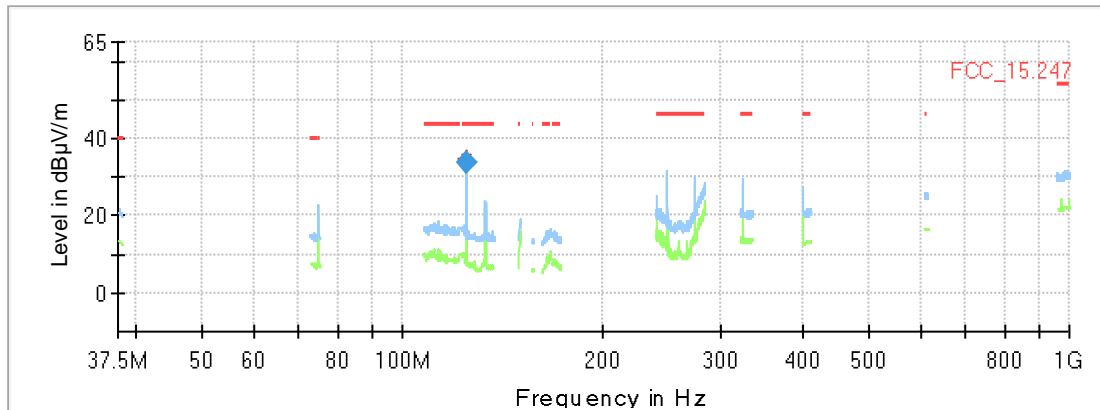

### Final Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment | Corr. (dB) |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|------------|
| 125.010000      | 33.57              | 43.50          | 9.93        | 1000.0          | 120.000         | 105.0       | V   | 77.0          | 11.0         |         | ---        |

Radio Technology = Bluetooth LE, Operating Frequency = mid, Measurement range = 1 GHz - 26 GHz (S01\_AH02)

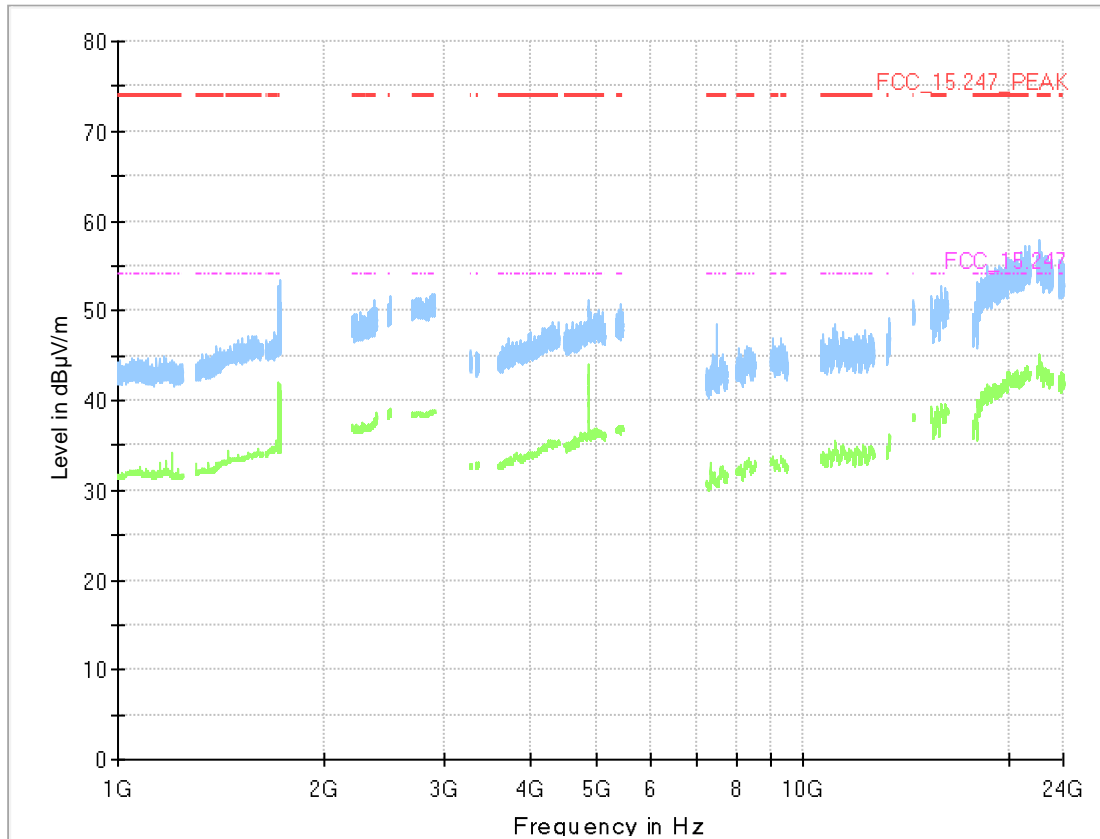


### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| ---             | ---              | ---              | ---            | ---         | ---             | ---             | ---         |     | ---           | ---             |

### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| ---             | ---              | ---               | ---            | ---         | ---             | ---             | ---         |     | ---           | ---             |


Radio Technology = WLAN b, Operating Frequency = mid, Measurement range = 9 kHz - 30 MHz  
(S01\_AE02)

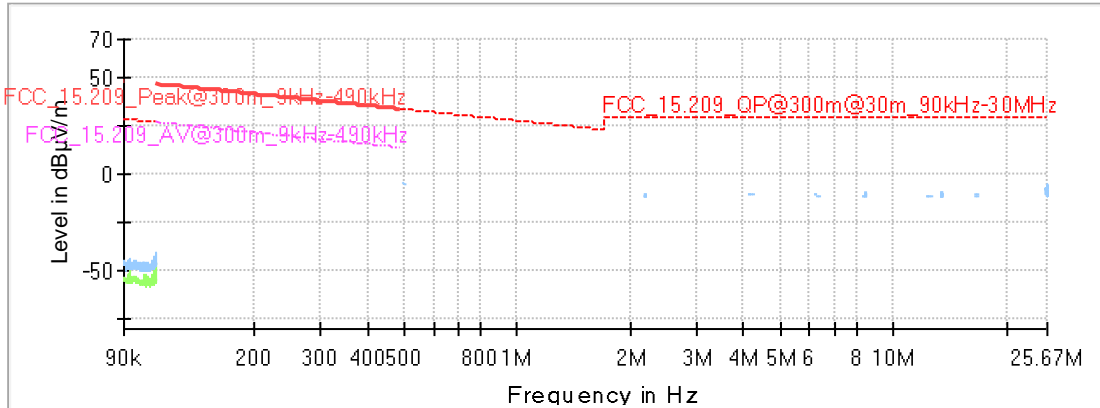

### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|------------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| ---             | ---              | ---                | ---            | ---         | ---             | ---             | ---         | --- | ---           | ---          | ---     |


Radio Technology = WLAN b, Operating Frequency = low, Measurement range = 30 MHz - 1 GHz  
(S01\_AE02)

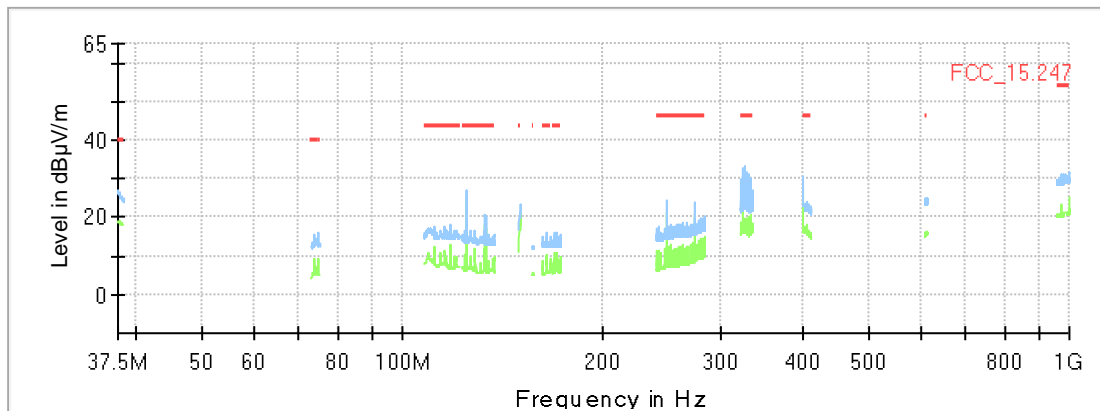

### Final\_Result

| Frequency (MHz) | QuasiPeak (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Corr. (dB/m) | Comment |
|-----------------|--------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|--------------|---------|
| ---             | ---                | ---            | ---         | ---             | ---             | ---         | --- | ---           | ---          | ---     |

Radio Technology = WLAN g, Operating Frequency = low, Measurement range = 1 GHz - 26 GHz  
(S01\_AE02)

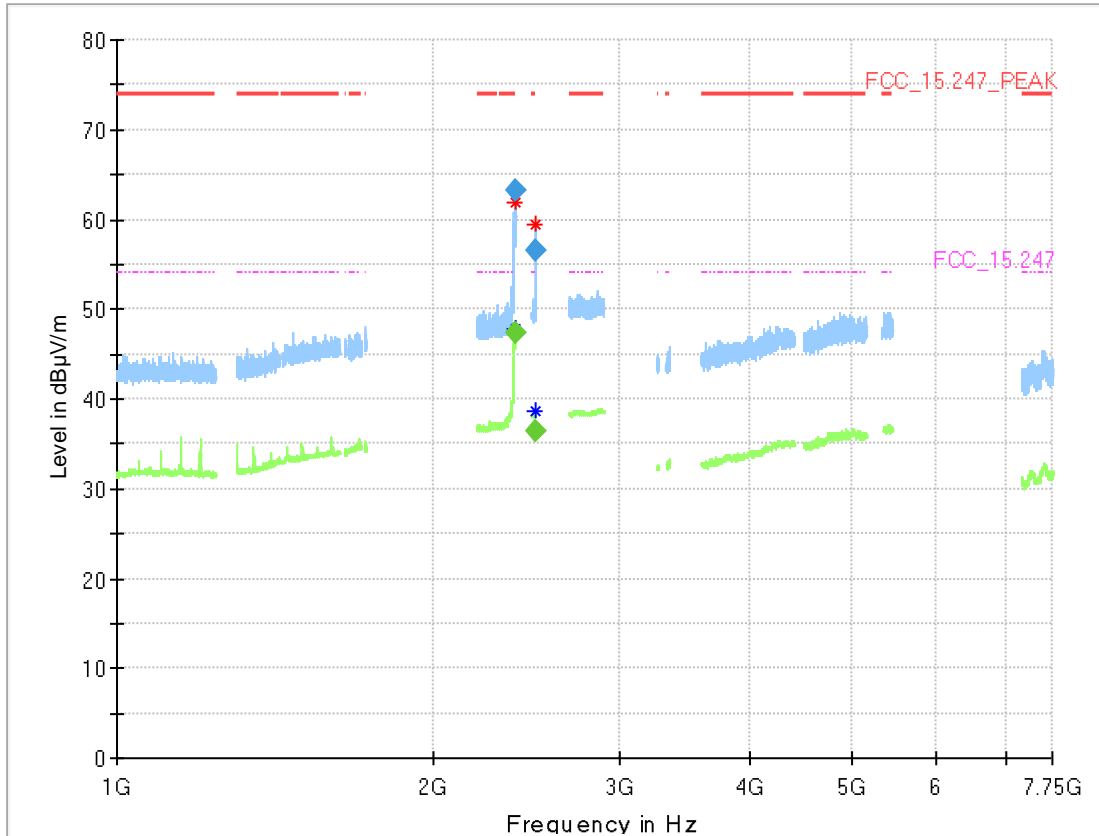

### Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 2390.000        | 61.8             | ---              | 74.00          | 12.19       | ---             | ---             | 150.0       | V   | -95.0         | 78.0            |
| 2390.000        | ---              | 47.7             | 54.00          | 6.27        | ---             | ---             | 150.0       | V   | -117.0        | 78.0            |
| 2497.938        | 59.4             | ---              | 74.00          | 14.57       | ---             | ---             | 150.0       | V   | -32.0         | 105.0           |
| 2498.020        | ---              | 38.7             | 54.00          | 15.25       | ---             | ---             | 150.0       | V   | -36.0         | 100.0           |

### Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 2390.000        | ---              | 47.3              | 54.00          | 6.68        | 1000.0          | 1000.000        | 150.0       | V   | -117.0        | 78.0            |
| 2390.000        | 63.3             | ---               | 74.00          | 10.73       | 1000.0          | 1000.000        | 150.0       | V   | -95.0         | 78.0            |
| 2497.938        | 56.6             | ---               | 74.00          | 17.44       | 1000.0          | 1000.000        | 150.0       | V   | -32.0         | 105.0           |
| 2498.020        | ---              | 36.3              | 54.00          | 17.67       | 1000.0          | 1000.000        | 150.0       | V   | -36.0         | 100.0           |

### 5.5.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5.6 BAND EDGE COMPLIANCE CONDUCTED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.6.1 TEST DESCRIPTION

For the conducted measurement, the Equipment Under Test (EUT) is placed in a shielded room. The reference power was measured in the test case "Spurious RF Conducted Emissions". The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

### 5.6.2 TEST REQUIREMENTS / LIMITS

FCC Part 15.247 (d)

"In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. ...

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c))."

For the conducted measurement the RF power at the band edge shall be "at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power..."

### 5.6.3 TEST PROTOCOL

Ambient temperature: 25 °C  
Air Pressure: 1010 hPa  
Humidity: 37 %  
BT LE GFSK

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 20 dBc Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|--------------------|----------------------|
| 0           | 2402                           | 2400.0                | -41.0                | PEAK     | 100       | 2.9              | -27.1              | 13.9                 |
| 39          | 2480                           | 2483.5                | -46.5                | PEAK     | 100       | 3.7              | -26.3              | 20.2                 |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30 dBc Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|--------------------|----------------------|
| 1           | 2412                           | 2400.0                | -41.2                | PEAK     | 100       | 2.5              | -27.5              | 13.7                 |
| 11          | 2462                           | 2483.5                | -46.6                | PEAK     | 100       | 2.7              | -27.3              | 19.3                 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30 dBc Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|--------------------|----------------------|
| 1           | 2412                           | 2400.0                | -35.1                | PEAK     | 100       | -0.1             | -30.1              | 5.0                  |
| 11          | 2462                           | 2483.5                | -43.8                | PEAK     | 100       | 0.6              | -29.4              | 14.4                 |


WLAN n-Mode; 20 MHz; MCS0

| Channel No. | Channel Center Frequency [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBm] | Detector | RBW [kHz] | Ref. Level [dBm] | 30 dBc Limit [dBm] | Margin to Limit [dB] |
|-------------|--------------------------------|-----------------------|----------------------|----------|-----------|------------------|--------------------|----------------------|
| 1           | 2412                           | 2400.0                | -34.8                | PEAK     | 100       | -0.1             | -30.1              | 4.7                  |
| 11          | 2462                           | 2483.5                | -42.9                | PEAK     | 100       | 0.5              | -29.5              | 13.4                 |

Remark: Please see next sub-clause for the measurement plot.

### 5.6.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = low, Band Edge = low (S01\_AF02)

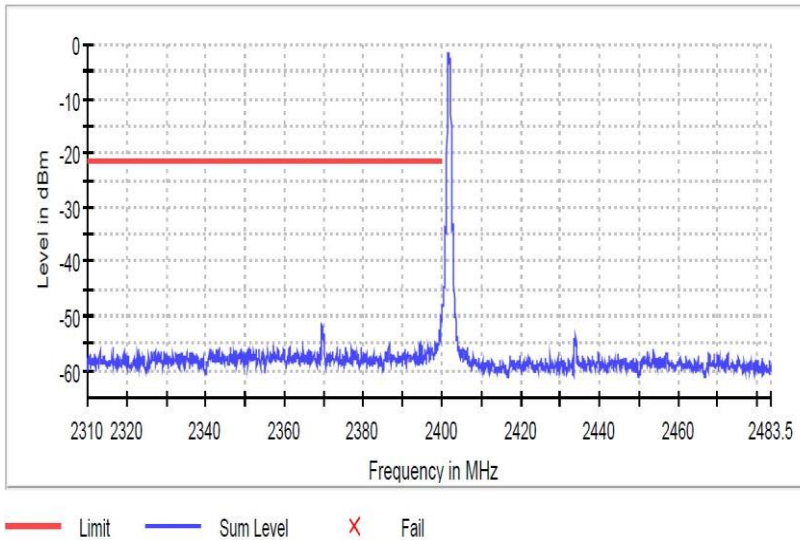


#### Inband Peak

| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 2401.825000     | -1.7        |

#### Measurements

| Frequency (MHz) | Level (dBm) | Margin (dB) | Limit (dBm) | Result |
|-----------------|-------------|-------------|-------------|--------|
| 2399.975000     | -49.2       | 27.5        | -21.7       | PASS   |
| 2399.925000     | -49.9       | 28.3        | -21.7       | PASS   |
| 2399.775000     | -50.1       | 28.4        | -21.7       | PASS   |
| 2399.825000     | -50.2       | 28.6        | -21.7       | PASS   |
| 2399.725000     | -51.0       | 29.3        | -21.7       | PASS   |
| 2399.875000     | -51.4       | 29.7        | -21.7       | PASS   |
| 2399.675000     | -51.4       | 29.8        | -21.7       | PASS   |
| 2369.525000     | -51.8       | 30.1        | -21.7       | PASS   |
| 2369.775000     | -52.0       | 30.3        | -21.7       | PASS   |
| 2369.575000     | -52.1       | 30.4        | -21.7       | PASS   |
| 2369.725000     | -52.1       | 30.5        | -21.7       | PASS   |
| 2399.325000     | -52.4       | 30.7        | -21.7       | PASS   |
| 2399.275000     | -52.7       | 31.0        | -21.7       | PASS   |
| 2369.825000     | -52.7       | 31.0        | -21.7       | PASS   |
| 2369.625000     | -52.8       | 31.2        | -21.7       | PASS   |

Radio Technology = WLAN n 20 MHz, Operating Frequency = low, Band Edge = low (S01\_AB01)

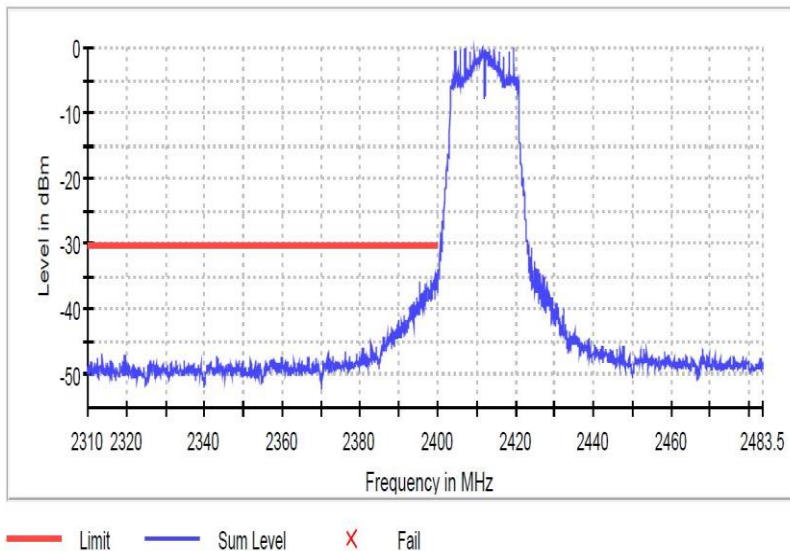


#### Inband Peak

| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 2419.525000     | -0.1        |

#### Measurements

| Frequency (MHz) | Level (dBm) | Margin (dB) | Limit (dBm) | Result |
|-----------------|-------------|-------------|-------------|--------|
| 2399.775000     | -34.8       | 4.7         | -30.1       | PASS   |
| 2399.825000     | -34.9       | 4.8         | -30.1       | PASS   |
| 2399.175000     | -35.1       | 5.0         | -30.1       | PASS   |
| 2399.125000     | -35.2       | 5.1         | -30.1       | PASS   |
| 2398.875000     | -35.2       | 5.1         | -30.1       | PASS   |
| 2398.225000     | -35.2       | 5.1         | -30.1       | PASS   |
| 2399.225000     | -35.4       | 5.3         | -30.1       | PASS   |
| 2399.525000     | -35.4       | 5.3         | -30.1       | PASS   |
| 2398.275000     | -35.6       | 5.4         | -30.1       | PASS   |
| 2399.875000     | -35.6       | 5.5         | -30.1       | PASS   |
| 2395.375000     | -35.7       | 5.6         | -30.1       | PASS   |
| 2398.975000     | -35.7       | 5.6         | -30.1       | PASS   |
| 2398.925000     | -35.7       | 5.6         | -30.1       | PASS   |
| 2398.175000     | -35.7       | 5.6         | -30.1       | PASS   |
| 2399.275000     | -35.8       | 5.6         | -30.1       | PASS   |

Radio Technology = WLAN g, Operating Frequency = high, Band Edge = high  
(S01\_AB01)

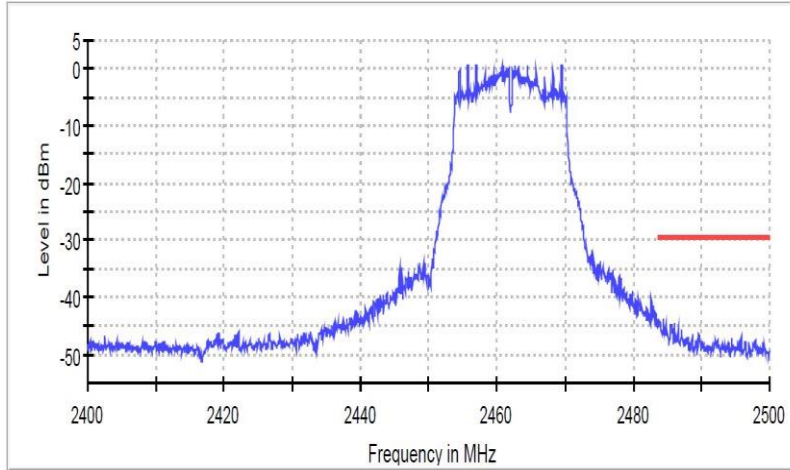

— Limit    — Sum Level    × Fail

**Inband Peak**

| Frequency (MHz) | Level (dBm) |
|-----------------|-------------|
| 2455.725000     | 0.6         |

**Measurements**

| Frequency (MHz) | Level (dBm) | Margin (dB) | Limit (dBm) | Result |
|-----------------|-------------|-------------|-------------|--------|
| 2484.425000     | -43.8       | 14.4        | -29.4       | PASS   |
| 2483.875000     | -44.1       | 14.7        | -29.4       | PASS   |
| 2484.475000     | -44.4       | 15.0        | -29.4       | PASS   |
| 2486.025000     | -44.4       | 15.0        | -29.4       | PASS   |
| 2483.925000     | -44.6       | 15.2        | -29.4       | PASS   |
| 2483.625000     | -44.7       | 15.3        | -29.4       | PASS   |
| 2484.725000     | -44.7       | 15.3        | -29.4       | PASS   |
| 2483.725000     | -44.7       | 15.3        | -29.4       | PASS   |
| 2484.025000     | -44.7       | 15.3        | -29.4       | PASS   |
| 2483.775000     | -44.7       | 15.3        | -29.4       | PASS   |
| 2483.575000     | -44.8       | 15.4        | -29.4       | PASS   |
| 2484.375000     | -44.8       | 15.4        | -29.4       | PASS   |
| 2485.975000     | -44.9       | 15.5        | -29.4       | PASS   |
| 2485.525000     | -45.0       | 15.6        | -29.4       | PASS   |
| 2485.475000     | -45.0       | 15.6        | -29.4       | PASS   |

5.6.5 TEST EQUIPMENT USED

- R&S TS8997



## 5.7 BAND EDGE COMPLIANCE RADIATED

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.7.1 TEST DESCRIPTION

Please see test description for the test case "Spurious Radiated Emissions"

### 5.7.2 TEST REQUIREMENTS / LIMITS

For band edges connected to a restricted band, the limits are specified in Section 15.209(a)

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

| Frequency in MHz | Limit (µV/m)     | Measurement distance (m) | Limits (dBµV/m)    |
|------------------|------------------|--------------------------|--------------------|
| 0.009 - 0.49     | 2400/F(kHz)@300m | 3                        | (48.5 - 13.8)@300m |
| 0.49 - 1.705     | 24000/F(kHz)@30m | 3                        | (33.8 - 23.0)@30m  |
| 1.705 - 30       | 30@30m           | 3                        | 29.5@30m           |

The measured values are corrected with an inverse linear distance extrapolation factor (40 dB/decade) according FCC 15.31 (2).

| Frequency in MHz | Limit (µV/m) | Measurement distance (m) | Limits (dBµV/m) |
|------------------|--------------|--------------------------|-----------------|
| 30 - 88          | 100@3m       | 3                        | 40.0@3m         |
| 88 - 216         | 150@3m       | 3                        | 43.5@3m         |
| 216 - 960        | 200@3m       | 3                        | 46.0@3m         |
| 960 - 26000      | 500@3m       | 3                        | 54.0@3m         |
| 26000 - 40000    | 500@3m       | 1                        | 54.0@3m         |

The measured values above 26 GHz are corrected with an inverse linear distance extrapolation factor (20 dB/decade).

§15.35(b) ..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor:  $\text{Limit (dB}\mu\text{V/m)} = 20 \log (\text{Limit } (\mu\text{V/m})/1\mu\text{V/m)}$

### 5.7.3 TEST PROTOCOL

Ambient temperature: 22–23 °C  
 Air Pressure: 989 - 1001 hPa  
 Humidity: 29–30 %  
 BT LE GFSK  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detec-tor | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|-----------|-----------|----------------|----------------------|------------|
| 39      | 2480                   | 2483.5                | 54.3                    | PEAK      | 1000      | 74.0           | 19.7                 | BE         |
| 39      | 2480                   | 2483.5                | 36.5                    | AV        | 1000      | 54.0           | 17.5                 | BE         |

WLAN b-Mode; 20 MHz; 1 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detec-tor | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|-----------|-----------|----------------|----------------------|------------|
| 11      | 2462                   | 2483.5                | 55.0                    | PEAK      | 1000      | 74.0           | 19.0                 | BE         |
| 11      | 2462                   | 2483.5                | 41.6                    | AV        | 1000      | 54.0           | 12.4                 | BE         |

WLAN g-Mode; 20 MHz; 6 Mbit/s  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detec-tor | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|-----------|-----------|----------------|----------------------|------------|
| 11      | 2462                   | 2483.5                | 63.6                    | PEAK      | 1000      | 74.0           | 10.4                 | BE         |
| 11      | 2462                   | 2483.5                | 43.7                    | AV        | 1000      | 54.0           | 10.3                 | BE         |


WLAN n-Mode; 20 MHz; MCS0  
 Applied duty cycle correction (AV): 0 dB

| Ch. No. | Ch. Center Freq. [MHz] | Band Edge Freq. [MHz] | Spurious Level [dBµV/m] | Detec-tor | RBW [kHz] | Limit [dBµV/m] | Margin to Limit [dB] | Limit Type |
|---------|------------------------|-----------------------|-------------------------|-----------|-----------|----------------|----------------------|------------|
| 11      | 2462                   | 2483.5                | 64.3                    | PEAK      | 1000      | 74.0           | 9.7                  | BE         |
| 11      | 2462                   | 2483.5                | 45.5                    | AV        | 1000      | 54.0           | 8.5                  | BE         |

Remark: Please see next sub-clause for the measurement plot.

### 5.7.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")

Radio Technology = Bluetooth LE, Operating Frequency = high, Band Edge = high (S01\_AH02)

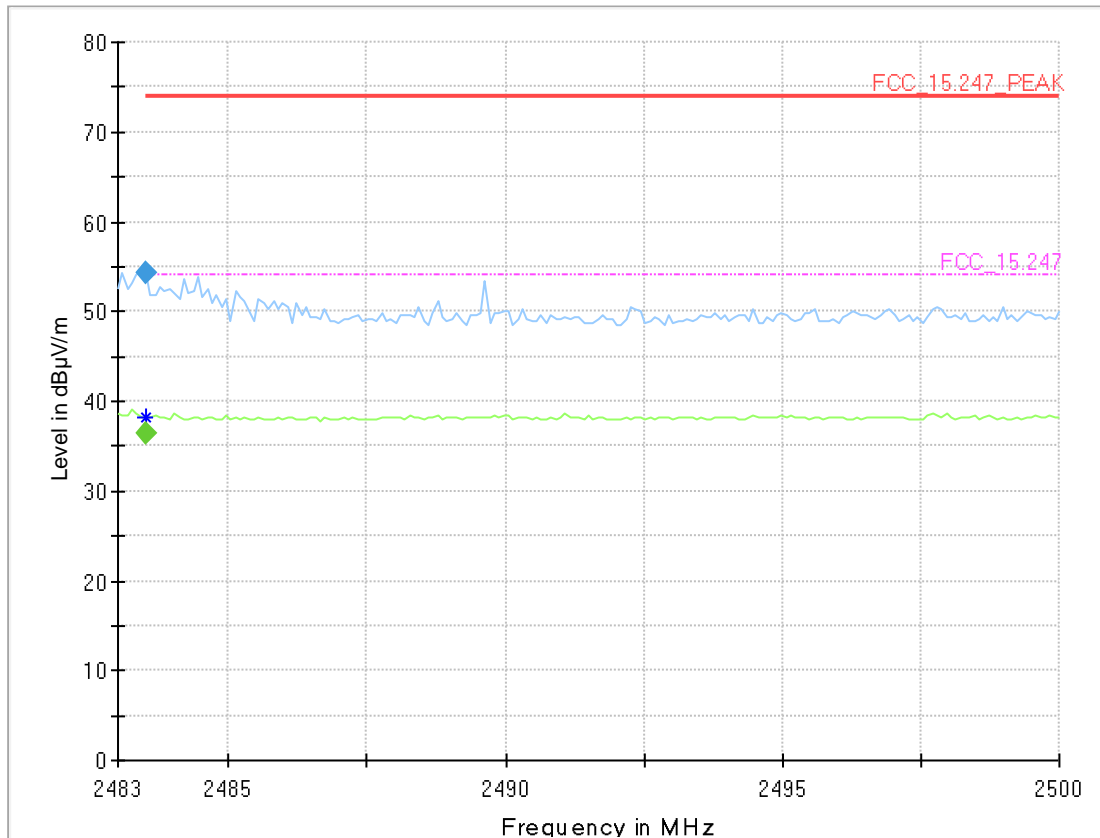


#### Critical\_Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margi n (dB) | Meas. Time (ms) | Bandwidt h (kHz) | Heigh t (cm) | Pol | Azimet h (deg) | Elevatio n (deg) |
|-----------------|------------------|------------------|----------------|--------------|-----------------|------------------|--------------|-----|----------------|------------------|
| 2483.510        | 54.4             | ---              | 74.00          | 19.59        | ---             | ---              | 150.0        | V   | -5.0           | 105.0            |
| 2483.510        | ---              | 38.2             | 54.00          | 15.81        | ---             | ---              | 150.0        | V   | -180.0         | 80.0             |

#### Final\_Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margi n (dB) | Meas. Time (ms) | Bandwidt h (kHz) | Heigh t (cm) | Pol | Azimet h (deg) | Elevatio n (deg) |
|-----------------|------------------|-------------------|----------------|--------------|-----------------|------------------|--------------|-----|----------------|------------------|
| 2483.510        | ---              | 36.5              | 54.00          | 17.50        | 1000.0          | 1000.000         | 150.0        | V   | -180.0         | 80.0             |
| 2483.510        | 54.3             | ---               | 74.00          | 19.72        | 1000.0          | 1000.000         | 150.0        | V   | -5.0           | 105.0            |

Radio Technology = WLAN n 20 MHz, Operating Frequency = high, Band Edge = high (S01\_AE02)

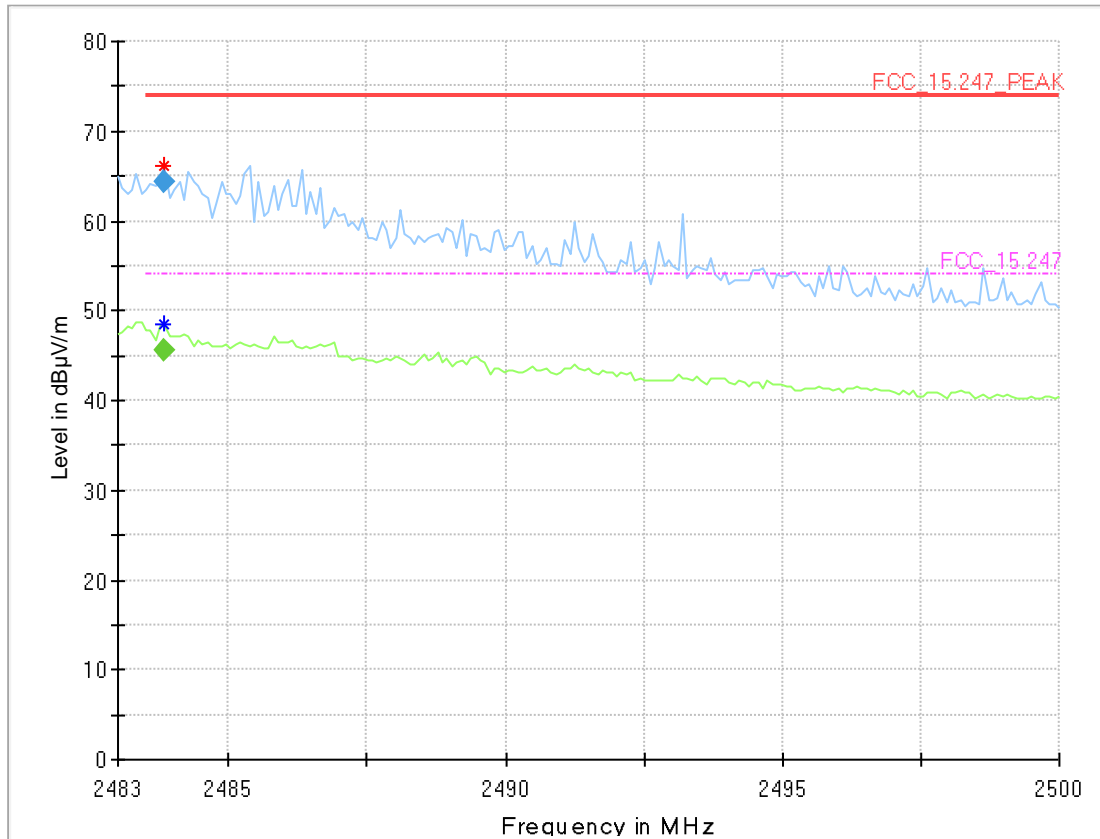

### Critical Freqs

| Frequency (MHz) | MaxPeak (dBµV/m) | Average (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 2483.850        | 66.2             | ---              | 74.00          | 7.75        | ---             | ---             | 150.0       | H   | 19.0          | 88.0            |
| 2483.850        | ---              | 48.4             | 54.00          | 5.58        | ---             | ---             | 150.0       | H   | 121.0         | -15.0           |

### Final Result

| Frequency (MHz) | MaxPeak (dBµV/m) | CAverage (dBµV/m) | Limit (dBµV/m) | Margin (dB) | Meas. Time (ms) | Bandwidth (kHz) | Height (cm) | Pol | Azimuth (deg) | Elevation (deg) |
|-----------------|------------------|-------------------|----------------|-------------|-----------------|-----------------|-------------|-----|---------------|-----------------|
| 2483.850        | ---              | 45.5              | 54.00          | 8.52        | 1000.0          | 1000.000        | 150.0       | H   | 121.0         | -15.0           |
| 2483.850        | 64.3             | ---               | 74.00          | 9.69        | 1000.0          | 1000.000        | 150.0       | H   | 19.0          | 88.0            |

### 5.7.5 TEST EQUIPMENT USED

- Radiated Emissions

## 5.8 POWER DENSITY

Standard **FCC Part 15 Subpart C**

**The test was performed according to:**  
ANSI C63.10

### 5.8.1 TEST DESCRIPTION

The Equipment Under Test (EUT) was set up in a shielded room to perform the Power Density measurements.

The results recorded were measured with the modulation which produces the worst-case (highest) power density.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

Analyzer settings:  
Please see diagram.

### 5.8.2 TEST REQUIREMENTS / LIMITS

FCC Part 15, Subpart C, §15.247 (e)

For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

...

The same method of determining the conducted output power shall be used to determine the power spectral density.

FCC Part 15, Subpart C, §15.247 (f)

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques.

...

The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

### 5.8.3 TEST PROTOCOL

Ambient temperature: 25 °C  
 Air Pressure: 1010 hPa  
 Humidity: 37 %  
 BT LE

| Band    | Channel No. | Frequency [MHz] | Power Density [dBm/10kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|---------|-------------|-----------------|---------------------------|------------------|----------------------|
| 2.4 GHz | 0           | 2402            | -8.2                      | 8.0              | 16.2                 |
| ISM     | 19          | 2440            | -8.5                      | 8.0              | 16.5                 |
|         | 39          | 2480            | -7.2                      | 8.0              | 15.2                 |

WLAN b-Mode; 20 MHz; 1 Mbit/s

| Band    | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|---------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz | 1           | 2412            | -6.2                       | 8.0              | 14.2                 |
| ISM     | 6           | 2437            | -5.5                       | 8.0              | 13.5                 |
|         | 11          | 2462            | -5.3                       | 8.0              | 13.3                 |

WLAN g-Mode; 20 MHz; 6 Mbit/s

| Band    | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|---------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz | 1           | 2412            | -6.4                       | 8.0              | 14.4                 |
| ISM     | 6           | 2437            | -6.2                       | 8.0              | 14.2                 |
|         | 11          | 2462            | -5.8                       | 8.0              | 13.8                 |


WLAN n-Mode; 20 MHz; MCS0

| Band    | Channel No. | Frequency [MHz] | Power Density [dBm/100kHz] | Limit [dBm/3kHz] | Margin to Limit [dB] |
|---------|-------------|-----------------|----------------------------|------------------|----------------------|
| 2.4 GHz | 1           | 2412            | -6.4                       | 8.0              | 14.4                 |
| ISM     | 6           | 2437            | -6.1                       | 8.0              | 14.1                 |
|         | 11          | 2462            | -5.7                       | 8.0              | 13.7                 |

Remark: Please see next sub-clause for the measurement plot.

### 5.8.4 MEASUREMENT PLOT (SHOWING THE HIGHEST VALUE, "WORST CASE")


Radio Technology = Bluetooth LE, Operating Frequency = high  
(S01\_AF02)

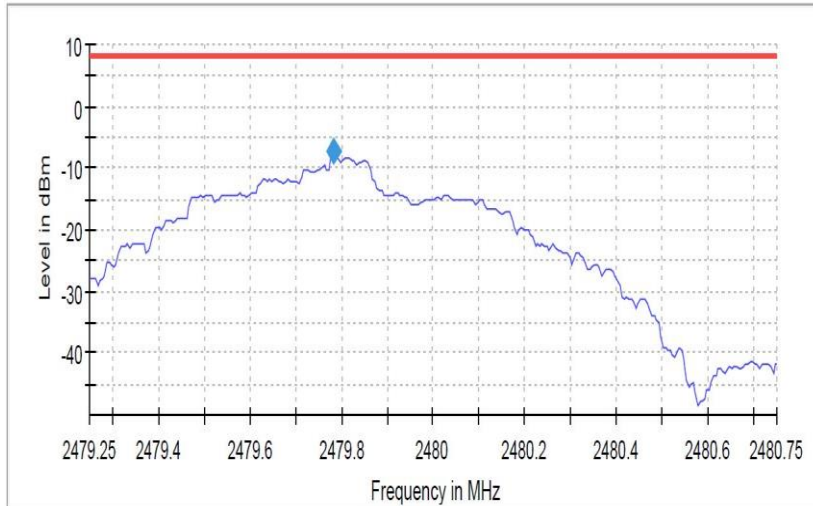

— Limit — Sum Level ◆ PSD

| Setting               | Instrument Value |
|-----------------------|------------------|
| Start Frequency       | 2.47925 GHz      |
| Stop Frequency        | 2.48075 GHz      |
| Span                  | 1.500 MHz        |
| RBW                   | 10.000 kHz       |
| VBW                   | 30.000 kHz       |
| SweepPoints           | 300              |
| Sweeptime             | 1.500 ms         |
| Reference Level       | -10.000 dBm      |
| Attenuation           | 10.000 dB        |
| Detector              | MaxPeak          |
| SweepCount            | 100              |
| Filter                | 3 dB             |
| Trace Mode            | Max Hold         |
| Sweeptype             | Sweep            |
| Preamp                | off              |
| Stablemode            | Trace            |
| Stablevalue           | 0.50 dB          |
| Run                   | 15 / max. 150    |
| Stable                | 2 / 2            |
| Max Stable Difference | 0.45 dB          |

Radio Technology = WLAN b, Operating Frequency = high  
(S01\_AB01)

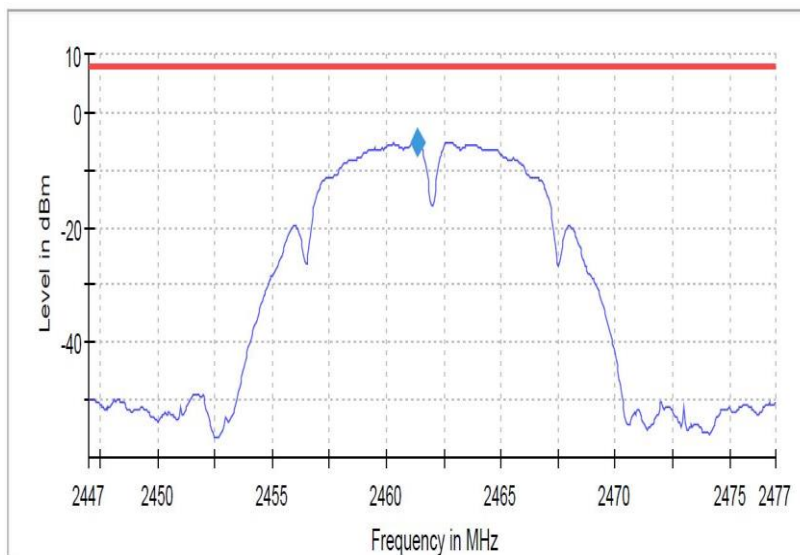

— Limit — Sum Level ◆ PSD

| Setting               | Instrument Value |
|-----------------------|------------------|
| Start Frequency       | 2.44700 GHz      |
| Stop Frequency        | 2.47700 GHz      |
| Span                  | 30.000 MHz       |
| RBW                   | 100.000 kHz      |
| VBW                   | 300.000 kHz      |
| SweepPoints           | 600              |
| Sweeptime             | 3.000 s          |
| Reference Level       | 0.000 dBm        |
| Attenuation           | 20.000 dB        |
| Detector              | RMS              |
| SweepCount            | 1                |
| Filter                | 3 dB             |
| Trace Mode            | Max Hold         |
| Sweeptype             | Sweep            |
| Preamp                | off              |
| Stablemode            | Trace            |
| Stablevalue           | 0.50 dB          |
| Run                   | 6 / max. 150     |
| Stable                | 3 / 3            |
| Max Stable Difference | 0.35 dB          |

### 5.8.5 TEST EQUIPMENT USED

- R&S TS8997

## 6 TEST EQUIPMENT

1 R&S TS8997  
EN300328/301893 Test Lab

| Ref.No. | Device Name          | Description                                | Manufacturer                      | Serial Number  | Last Calibration | Calibration Due |
|---------|----------------------|--|-----------------------------------|----------------|------------------|-----------------|
| 1.1     | SMB100A              | Signal Generator 9 kHz - 6 GHz             | Rohde & Schwarz                   | 107695         | 2017-07          | 2020-07         |
| 1.2     | MFS                  | Rubidium Frequency Standard                | Datum-Beverly                     | 5489/001       | 2018-07          | 2019-07         |
| 1.3     | 1515 / 93459         | Broadband Power Divider SMA (Aux)          | Weinschel Associates              | LN673          |                  |                 |
| 1.4     | FSV30                | Signal Analyzer 10 Hz - 30 GHz             | Rohde & Schwarz                   | 103005         | 2018-04          | 2020-04         |
| 1.5     | Fluke 177            | Digital Multimeter 03 (Multimeter)         | Fluke Europe B.V.                 | 86670383       | 2018-04          | 2020-04         |
| 1.6     | VHF-3100+            | High Pass Filter                           |                                   | -              |                  |                 |
| 1.7     | VT 4002              | Temperature Chamber                        | Vötsch                            | 58566002150010 | 2018-04          | 2020-04         |
| 1.8     | A8455-4              | 4 Way Power Divider (SMA)                  |                                   | -              |                  |                 |
| 1.9     | Opus10 THI (8152.00) | ThermoHygro Datalogger 03 (Environ)        | Lufft Mess- und Regeltechnik GmbH | 7482           | 2017-03          | 2019-03         |
| 1.10    | SMBV100A             | Vector Signal Generator 9 kHz - 6 GHz      | Rohde & Schwarz                   | 259291         | 2016-10          | 2019-10         |
| 1.11    | OSP120               | Switching Unit with integrated power meter | Rohde & Schwarz                   | 101158         | 2018-05          | 2021-05         |

2 Radiated Emissions  
Lab to perform radiated emission tests

| Ref.No. | Device Name          | Description                               | Manufacturer                       | Serial Number | Last Calibration | Calibration Due |
|---------|----------------------|---|------------------------------------|---------------|------------------|-----------------|
| 2.1     | NRV-Z1               | Sensor Head A                             | Rohde & Schwarz GmbH & Co. KG      | 827753/005    | 2018-07          | 2019-07         |
| 2.2     | MFS                  | Rubidium Frequency Normal MFS             | Datum GmbH                         | 002           | 2018-10          | 2020-10         |
| 2.3     | Opus10 TPR (8253.00) | ThermoAirpressure Datalogger 13 (Environ) | Lufft Mess- und Regeltechnik GmbH  | 13936         | 2017-04          | 2019-04         |
| 2.4     | ESW44                | EMI Test Receiver                         | Rohde & Schwarz GmbH & Co. KG      | 101603        | 2018-05          | 2019-05         |
| 2.5     | Anechoic Chamber     | 10.58 x 6.38 x 6.00 m <sup>3</sup>        | Frankonia                          | none          | 2018-06          | 2020-06         |
| 2.6     | FS-Z60               | Harmonic Mixer 40 - 60 GHz                | Rohde & Schwarz Messgerätebau GmbH | 100178        | 2016-12          | 2019-12         |



| Ref.No. | Device Name          | Description  | Manufacturer                       | Serial Number      | Last Calibration | Calibration Due |
|---------|----------------------|--|------------------------------------|--------------------|------------------|-----------------|
| 2.7     | FS-Z220              | Harmonic Mixer 140 - 220 GHz                           | Rohde & Schwarz Messgerätebau GmbH | 101005             | 2017-03          | 2020-03         |
| 2.8     | SGH-05               | Standard Gain / Pyramidal Horn Antenna (140 - 220 GHz) | RPG-Radiometer Physics GmbH        | 075                |                  |                 |
| 2.9     | HL 562               | Ultralog new biconicals                                | Rohde & Schwarz                    | 830547/003         | 2018-07          | 2021-07         |
| 2.10    | 5HC2700/12750-1.5-KK | High Pass Filter                                       | Trilithic                          | 9942012            |                  |                 |
| 2.11    | ASP 1.2/1.8-10 kg    | Antenna Mast   | Maturo GmbH                        | -                  |                  |                 |
| 2.12    | Fully Anechoic Room  | 8.80m x 4.60m x 4.05m (l x w x h)                      | Albatross Projects                 | P26971-647-001-PRB | 2018-06          | 2020-06         |
| 2.13    | Fluke 177            | Digital Multimeter 03 (Multimeter)                     | Fluke Europe B.V.                  | 86670383           | 2018-04          | 2020-04         |
| 2.14    | NRVD                 | Power Meter  | Rohde & Schwarz GmbH & Co. KG      | 828110/016         | 2018-07          | 2019-07         |
| 2.15    | HF 906               | Double-ridged horn                                     | Rohde & Schwarz                    | 357357/002         | 2018-09          | 2021-09         |
| 2.16    | JS4-18002600-32-5P   | Broadband Amplifier 18 GHz - 26 GHz                    | Miteq                              | 849785             |                  |                 |
| 2.17    | FSW 43               | Spectrum Analyzer                                      | Rohde & Schwarz                    | 103779             | 2019-02          | 2021-02         |
| 2.18    | 3160-09              | Standard Gain / Pyramidal Horn Antenna 26.5 GHz        | EMCO Elektronik GmbH               | 00083069           |                  |                 |
| 2.19    | SGH-19               | Standard Gain / Pyramidal Horn Antenna (40 - 60 GHz)   | RPG-Radiometer Physics GmbH        | 093                |                  |                 |
| 2.20    | WHKX 7.0/18G-8SS     | High Pass Filter                                       | Wainwright                         | 09                 |                  |                 |
| 2.21    | 4HC1600/12750-1.5-KK | High Pass Filter                                       | Trilithic                          | 9942011            |                  |                 |
| 2.22    | Chroma 6404          | AC Power Source  | Chroma ATE INC.                    | 64040001304        |                  |                 |
| 2.23    | JS4-00102600-42-5A   | Broadband Amplifier 30 MHz - 26 GHz                    | Miteq                              | 619368             |                  |                 |
| 2.24    | TT 1.5 WI            | Turn Table   | Maturo GmbH                        | -                  |                  |                 |
| 2.25    | HL 562 Ultralog      | Log.-per. Antenna                                      | Rohde & Schwarz                    | 100609             | 2016-04          | 2019-04         |
| 2.26    | HF 906               | Double-ridged horn                                     | Rohde & Schwarz                    | 357357/001         | 2018-03          | 2021-03         |
| 2.27    | FS-Z325              | Harmonic Mixer 220 - 325 GHz                           | Rohde & Schwarz Messgerätebau GmbH | 101006             | 2017-03          | 2020-03         |

| Ref.No. | Device Name                    | Description  | Manufacturer                       | Serial Number          | Last Calibration | Calibration Due |
|---------|--------------------------------|--|------------------------------------|------------------------|------------------|-----------------|
| 2.28    | 3160-10                        | Standard Gain / Pyramidal Horn Antenna 40 GHz          | EMCO Elektronik GmbH               | 00086675               |                  |                 |
| 2.29    | SGH-08                         | Standard Gain / Pyramidal Horn Antenna (90 - 140 GHz)  | RPG-Radiometer Physics GmbH        | 064                    |                  |                 |
| 2.30    | SGH-12                         | Standard Gain / Pyramidal Horn Antenna (60 - 90 GHz)   | RPG-Radiometer Physics GmbH        | 326                    |                  |                 |
| 2.31    | 5HC3500/18000-1.2-KK           | High Pass Filter                                       | Trilithic                          | 200035008              |                  |                 |
| 2.32    | FS-Z140                        | Harmonic Mixer 90 -140 GHz                             | Rohde & Schwarz Messgerätebau GmbH | 101007                 | 2017-02          | 2020-02         |
| 2.33    | HFH2-Z2                        | Loop Antenna   | Rohde & Schwarz                    | 829324/006             | 2018-01          | 2021-01         |
| 2.34    | Opus10 THI (8152.00)           | ThermoHygro Datalogger 12 (Environ)                    | Lufft Mess- und Regeltechnik GmbH  | 12482                  | 2017-03          | 2019-03         |
| 2.35    | ESR 7                          | EMI Receiver / Spectrum Analyzer                       | Rohde & Schwarz                    | 101424                 | 2019-01          | 2020-01         |
| 2.36    | JS4-00101800-35-5P             | Broadband Amplifier 30 MHz - 18 GHz                    | Miteq                              | 896037                 |                  |                 |
| 2.37    | AS 620 P                       | Antenna mast   | HD GmbH                            | 620/37                 |                  |                 |
| 2.38    | Tilt device Maturro (Rohacell) | Antrieb TD1.5-10kg                                     | Maturro GmbH                       | TD1.5-10kg/024/3790709 |                  |                 |
| 2.39    | SGH-03                         | Standard Gain / Pyramidal Horn Antenna (220 - 325 GHz) | RPG-Radiometer Physics GmbH        | 060                    |                  |                 |
| 2.40    | FS-Z90                         | Harmonic Mixer 60 - 90 GHz                             | Rohde & Schwarz Messgerätebau GmbH | 101686                 | 2017-03          | 2020-03         |
| 2.41    | ESIB 26                        | Spectrum Analyzer                                      | Rohde & Schwarz                    | 830482/004             | 2018-01          | 2020-01         |
| 2.42    | PAS 2.5 - 10 kg                | Antenna Mast   | Maturro GmbH                       | -                      |                  |                 |
| 2.43    | AFS42-00101800-25-S-42         | Broadband Amplifier 25 MHz - 18 GHz                    | Miteq                              | 2035324                |                  |                 |
| 2.44    | AM 4.0                         | Antenna mast   | Maturro GmbH                       | AM4.0/180/11920513     |                  |                 |
| 2.45    | HF 907                         | Double-ridged horn                                     | Rohde & Schwarz                    | 102444                 | 2018-07          | 2021-07         |

The calibration interval is the time interval between "Last Calibration" and "Calibration Due"

## 7 ANTENNA FACTORS, CABLE LOSS AND SAMPLE CALCULATIONS

This chapter contains the antenna factors with their corresponding path loss of the used measurement path for all antennas as well as the insertion loss of the LISN.

### 7.1 LISN R&S ESH3-Z5 (150 KHZ – 30 MHZ)

| Frequency<br>MHz | Corr.<br>dB | LISN<br>insertion<br>loss<br>ESH3-<br>Z5<br>dB | cable<br>loss<br>(incl. 10<br>dB<br>atten-<br>uator)<br>dB |
|------------------|-------------|--|--|
| 0.15             | 10.1        | 0.1  | 10.0   |
| 5                | 10.3        | 0.1  | 10.2   |
| 7                | 10.5        | 0.2  | 10.3   |
| 10               | 10.5        | 0.2  | 10.3   |
| 12               | 10.7        | 0.3  | 10.4   |
| 14               | 10.7        | 0.3  | 10.4   |
| 16               | 10.8        | 0.4  | 10.4   |
| 18               | 10.9        | 0.4  | 10.5   |
| 20               | 10.9        | 0.4  | 10.5   |
| 22               | 11.1        | 0.5  | 10.6   |
| 24               | 11.1        | 0.5  | 10.6   |
| 26               | 11.2        | 0.5  | 10.7   |
| 28               | 11.2        | 0.5  | 10.7   |
| 30               | 11.3        | 0.5  | 10.8   |

#### Sample calculation

$$U_{\text{LISN}} (\text{dB } \mu\text{V}) = U (\text{dB } \mu\text{V}) + \text{Corr. (dB)}$$

U = Receiver reading

LISN Insertion loss = Voltage Division Factor of LISN

Corr. = sum of single correction factors of used LISN, cables, switch units (if used)

Linear interpolation will be used for frequencies in between the values in the table.

## 7.2 ANTENNA R&S HFH2-Z2 (9 KHZ – 30 MHZ)

| Frequency<br>MHz | AF<br>HFH-Z2)<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-40 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit)<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used)<br>m |
|------------------|---------------------------|-------------|--|---|---|---|--|--|--|
| 0.009            | 20.50                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.01             | 20.45                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.015            | 20.37                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.02             | 20.36                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.025            | 20.38                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.03             | 20.32                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.05             | 20.35                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.08             | 20.30                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.1              | 20.20                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.2              | 20.17                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.3              | 20.14                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.49             | 20.12                     | -79.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -80  | 300  | 3  |
| 0.490001         | 20.12                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 0.5              | 20.11                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 0.8              | 20.10                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 1                | 20.09                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 2                | 20.08                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 3                | 20.06                     | -39.6       | 0.1  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 4                | 20.05                     | -39.5       | 0.2  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 5                | 20.05                     | -39.5       | 0.2  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 6                | 20.02                     | -39.5       | 0.2  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 8                | 19.95                     | -39.5       | 0.2  | 0.1   | 0.1                                       | 0.1                                       | -40  | 30   | 3  |
| 10               | 19.83                     | -39.4       | 0.2  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 12               | 19.71                     | -39.4       | 0.2  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 14               | 19.54                     | -39.4       | 0.2  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 16               | 19.53                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 18               | 19.50                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 20               | 19.57                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 22               | 19.61                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 24               | 19.61                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 26               | 19.54                     | -39.3       | 0.3  | 0.1   | 0.2                                       | 0.1                                       | -40  | 30   | 3  |
| 28               | 19.46                     | -39.2       | 0.3  | 0.1   | 0.3                                       | 0.1                                       | -40  | 30   | 3  |
| 30               | 19.73                     | -39.1       | 0.4  | 0.1   | 0.3                                       | 0.1                                       | -40  | 30   | 3  |

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-40 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values

### 7.3 ANTENNA R&S HL562 (30 MHz – 1 GHz)

( $d_{Limit} = 3\text{ m}$ )

| Frequency | AF<br>R&S<br>HL562 | Corr. |
|-----------|--------------------|-------|
| MHz       | dB (1/m)           | dB    |
| 30        | 18.6               | 0.6   |
| 50        | 6.0                | 0.9   |
| 100       | 9.7                | 1.2   |
| 150       | 7.9                | 1.6   |
| 200       | 7.6                | 1.9   |
| 250       | 9.5                | 2.1   |
| 300       | 11.0               | 2.3   |
| 350       | 12.4               | 2.6   |
| 400       | 13.6               | 2.9   |
| 450       | 14.7               | 3.1   |
| 500       | 15.6               | 3.2   |
| 550       | 16.3               | 3.5   |
| 600       | 17.2               | 3.5   |
| 650       | 18.1               | 3.6   |
| 700       | 18.5               | 3.6   |
| 750       | 19.1               | 4.1   |
| 800       | 19.6               | 4.1   |
| 850       | 20.1               | 4.4   |
| 900       | 20.8               | 4.7   |
| 950       | 21.1               | 4.8   |
| 1000      | 21.6               | 4.9   |

| cable<br>loss 1<br>(inside<br>chamber) | cable<br>loss 2<br>(outside<br>chamber) | cable<br>loss 3<br>(switch<br>unit) | cable<br>loss 4<br>(to<br>receiver) | distance<br>corr.<br>(-20 dB/<br>decade) | $d_{Limit}$<br>(meas.<br>distance<br>(limit)) | $d_{used}$<br>(meas.<br>distance<br>(used)) |
|--|---|-------------------------------------|-------------------------------------|--|---|---|
| dB                                     | dB                                      | dB                                  | dB                                  | dB                                       | m   | m   |
| 0.29                                   | 0.04                                    | 0.23                                | 0.02                                | 0.0                                      | 3   | 3   |
| 0.39                                   | 0.09                                    | 0.32                                | 0.08                                | 0.0                                      | 3   | 3   |
| 0.56                                   | 0.14                                    | 0.47                                | 0.08                                | 0.0                                      | 3   | 3   |
| 0.73                                   | 0.20                                    | 0.59                                | 0.12                                | 0.0                                      | 3   | 3   |
| 0.84                                   | 0.21                                    | 0.70                                | 0.11                                | 0.0                                      | 3   | 3   |
| 0.98                                   | 0.24                                    | 0.80                                | 0.13                                | 0.0                                      | 3   | 3   |
| 1.04                                   | 0.26                                    | 0.89                                | 0.15                                | 0.0                                      | 3   | 3   |
| 1.18                                   | 0.31                                    | 0.96                                | 0.13                                | 0.0                                      | 3   | 3   |
| 1.28                                   | 0.35                                    | 1.03                                | 0.19                                | 0.0                                      | 3   | 3   |
| 1.39                                   | 0.38                                    | 1.11                                | 0.22                                | 0.0                                      | 3   | 3   |
| 1.44                                   | 0.39                                    | 1.20                                | 0.19                                | 0.0                                      | 3   | 3   |
| 1.55                                   | 0.46                                    | 1.24                                | 0.23                                | 0.0                                      | 3   | 3   |
| 1.59                                   | 0.43                                    | 1.29                                | 0.23                                | 0.0                                      | 3   | 3   |
| 1.67                                   | 0.34                                    | 1.35                                | 0.22                                | 0.0                                      | 3   | 3   |
| 1.67                                   | 0.42                                    | 1.41                                | 0.15                                | 0.0                                      | 3   | 3   |
| 1.87                                   | 0.54                                    | 1.46                                | 0.25                                | 0.0                                      | 3   | 3   |
| 1.90                                   | 0.46                                    | 1.51                                | 0.25                                | 0.0                                      | 3   | 3   |
| 1.99                                   | 0.60                                    | 1.56                                | 0.27                                | 0.0                                      | 3   | 3   |
| 2.14                                   | 0.60                                    | 1.63                                | 0.29                                | 0.0                                      | 3   | 3   |
| 2.22                                   | 0.60                                    | 1.66                                | 0.33                                | 0.0                                      | 3   | 3   |
| 2.23                                   | 0.61                                    | 1.71                                | 0.30                                | 0.0                                      | 3   | 3   |

( $d_{Limit} = 10\text{ m}$ )

|      |      |      |
|------|------|------|
| 30   | 18.6 | -9.9 |
| 50   | 6.0  | -9.6 |
| 100  | 9.7  | -9.2 |
| 150  | 7.9  | -8.8 |
| 200  | 7.6  | -8.6 |
| 250  | 9.5  | -8.3 |
| 300  | 11.0 | -8.1 |
| 350  | 12.4 | -7.9 |
| 400  | 13.6 | -7.6 |
| 450  | 14.7 | -7.4 |
| 500  | 15.6 | -7.2 |
| 550  | 16.3 | -7.0 |
| 600  | 17.2 | -6.9 |
| 650  | 18.1 | -6.9 |
| 700  | 18.5 | -6.8 |
| 750  | 19.1 | -6.3 |
| 800  | 19.6 | -6.3 |
| 850  | 20.1 | -6.0 |
| 900  | 20.8 | -5.8 |
| 950  | 21.1 | -5.6 |
| 1000 | 21.6 | -5.6 |

|      |      |      |      |       |    |   |
|------|------|------|------|-------|----|---|
| 0.29 | 0.04 | 0.23 | 0.02 | -10.5 | 10 | 3 |
| 0.39 | 0.09 | 0.32 | 0.08 | -10.5 | 10 | 3 |
| 0.56 | 0.14 | 0.47 | 0.08 | -10.5 | 10 | 3 |
| 0.73 | 0.20 | 0.59 | 0.12 | -10.5 | 10 | 3 |
| 0.84 | 0.21 | 0.70 | 0.11 | -10.5 | 10 | 3 |
| 0.98 | 0.24 | 0.80 | 0.13 | -10.5 | 10 | 3 |
| 1.04 | 0.26 | 0.89 | 0.15 | -10.5 | 10 | 3 |
| 1.18 | 0.31 | 0.96 | 0.13 | -10.5 | 10 | 3 |
| 1.28 | 0.35 | 1.03 | 0.19 | -10.5 | 10 | 3 |
| 1.39 | 0.38 | 1.11 | 0.22 | -10.5 | 10 | 3 |
| 1.44 | 0.39 | 1.20 | 0.19 | -10.5 | 10 | 3 |
| 1.55 | 0.46 | 1.24 | 0.23 | -10.5 | 10 | 3 |
| 1.59 | 0.43 | 1.29 | 0.23 | -10.5 | 10 | 3 |
| 1.67 | 0.34 | 1.35 | 0.22 | -10.5 | 10 | 3 |
| 1.67 | 0.42 | 1.41 | 0.15 | -10.5 | 10 | 3 |
| 1.87 | 0.54 | 1.46 | 0.25 | -10.5 | 10 | 3 |
| 1.90 | 0.46 | 1.51 | 0.25 | -10.5 | 10 | 3 |
| 1.99 | 0.60 | 1.56 | 0.27 | -10.5 | 10 | 3 |
| 2.14 | 0.60 | 1.63 | 0.29 | -10.5 | 10 | 3 |
| 2.22 | 0.60 | 1.66 | 0.33 | -10.5 | 10 | 3 |
| 2.23 | 0.61 | 1.71 | 0.30 | -10.5 | 10 | 3 |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

distance correction =  $-20 * \text{LOG}(d_{Limit}/d_{used})$

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

### 7.4 ANTENNA R&S HF907 (1 GHZ – 18 GHZ)

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 1000             | 24.4                           | -19.4       |
| 2000             | 28.5                           | -17.4       |
| 3000             | 31.0                           | -16.1       |
| 4000             | 33.1                           | -14.7       |
| 5000             | 34.4                           | -13.7       |
| 6000             | 34.7                           | -12.7       |
| 7000             | 35.6                           | -11.0       |

| cable loss 1<br>(relay +<br>cable<br>inside<br>chamber)<br>dB | cable loss 2<br>(outside<br>chamber)<br>dB | cable loss 3<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp)<br>dB | cable loss 4 (to<br>receiver)<br>dB |
|---|--|---|-------------------------------------|
| 0.99  | 0.31                                       | -21.51  | 0.79                                |
| 1.44  | 0.44                                       | -20.63  | 1.38                                |
| 1.87  | 0.53                                       | -19.85  | 1.33                                |
| 2.41  | 0.67                                       | -19.13  | 1.31                                |
| 2.78  | 0.86                                       | -18.71  | 1.40                                |
| 2.74  | 0.90                                       | -17.83  | 1.47                                |
| 2.82  | 0.86                                       | -16.19  | 1.46                                |

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 3000             | 31.0                           | -23.4       |
| 4000             | 33.1                           | -23.3       |
| 5000             | 34.4                           | -21.7       |
| 6000             | 34.7                           | -21.2       |
| 7000             | 35.6                           | -19.8       |

| cable loss 1<br>(relay<br>inside<br>chamber)<br>dB | cable loss 2<br>(inside<br>chamber)<br>dB | cable loss 3<br>(outside<br>chamber)<br>dB | cable loss 4<br>(switch<br>unit,<br>atten-<br>uator &<br>pre-amp)<br>dB | cable loss 5 (to<br>receiver)<br>dB | used<br>for<br>FCC<br>15.247 |
|--|---|--|---|-------------------------------------|------------------------------|
| 0.47   | 1.87                                      | 0.53                                       | -27.58  | 1.33                                |                              |
| 0.56   | 2.41                                      | 0.67                                       | -28.23  | 1.31                                |                              |
| 0.61   | 2.78                                      | 0.86                                       | -27.35  | 1.40                                |                              |
| 0.58   | 2.74                                      | 0.90                                       | -26.89  | 1.47                                |                              |
| 0.66   | 2.82                                      | 0.86                                       | -25.58  | 1.46                                |                              |

| Frequency<br>MHz | AF<br>R&S<br>HF907<br>dB (1/m) | Corr.<br>dB |
|------------------|--------------------------------|-------------|
| 7000             | 35.6                           | -57.3       |
| 8000             | 36.3                           | -56.3       |
| 9000             | 37.1                           | -55.3       |
| 10000            | 37.5                           | -56.2       |
| 11000            | 37.5                           | -55.3       |
| 12000            | 37.6                           | -53.7       |
| 13000            | 38.2                           | -53.5       |
| 14000            | 39.9                           | -56.3       |
| 15000            | 40.9                           | -54.1       |
| 16000            | 41.3                           | -54.1       |
| 17000            | 42.8                           | -54.4       |
| 18000            | 44.2                           | -54.7       |

| cable loss 1<br>(relay<br>inside<br>chamber)<br>dB | cable loss 2<br>(High<br>Pass)<br>dB | cable loss 3<br>(pre-<br>amp)<br>dB | cable loss 4<br>(inside<br>chamber)<br>dB | cable loss 5<br>(outside<br>chamber)<br>dB | cable loss 6<br>(to<br>receiver)<br>dB |
|--|--------------------------------------|-------------------------------------|---|--|--|
| 0.56   | 1.28                                 | -62.72                              | 2.66                                      | 0.94                                       | 1.46                                   |
| 0.69   | 0.71                                 | -61.49                              | 2.84                                      | 1.00                                       | 1.53                                   |
| 0.68   | 0.65                                 | -60.80                              | 3.06                                      | 1.09                                       | 1.60                                   |
| 0.70   | 0.54                                 | -61.91                              | 3.28                                      | 1.20                                       | 1.67                                   |
| 0.80   | 0.61                                 | -61.40                              | 3.43                                      | 1.27                                       | 1.70                                   |
| 0.84   | 0.42                                 | -59.70                              | 3.53                                      | 1.26                                       | 1.73                                   |
| 0.83   | 0.44                                 | -59.81                              | 3.75                                      | 1.32                                       | 1.83                                   |
| 0.91   | 0.53                                 | -63.03                              | 3.91                                      | 1.40                                       | 1.77                                   |
| 0.98   | 0.54                                 | -61.05                              | 4.02                                      | 1.44                                       | 1.83                                   |
| 1.23   | 0.49                                 | -61.51                              | 4.17                                      | 1.51                                       | 1.85                                   |
| 1.36   | 0.76                                 | -62.36                              | 4.34                                      | 1.53                                       | 2.00                                   |
| 1.70   | 0.53                                 | -62.88                              | 4.41                                      | 1.55                                       | 1.91                                   |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Tables show an extract of values.

### 7.5 ANTENNA EMCO 3160-09 (18 GHZ – 26.5 GHZ)

| Frequency<br>MHz | AF<br>EMCO<br>3160-09<br>dB (1/m) | Corr.<br>dB |
|------------------|-----------------------------------|-------------|
| 18000            | 40.2                              | -23.5       |
| 18500            | 40.2                              | -23.2       |
| 19000            | 40.2                              | -22.0       |
| 19500            | 40.3                              | -21.3       |
| 20000            | 40.3                              | -20.3       |
| 20500            | 40.3                              | -19.9       |
| 21000            | 40.3                              | -19.1       |
| 21500            | 40.3                              | -19.1       |
| 22000            | 40.3                              | -18.7       |
| 22500            | 40.4                              | -19.0       |
| 23000            | 40.4                              | -19.5       |
| 23500            | 40.4                              | -19.3       |
| 24000            | 40.4                              | -19.8       |
| 24500            | 40.4                              | -19.5       |
| 25000            | 40.4                              | -19.3       |
| 25500            | 40.5                              | -20.4       |
| 26000            | 40.5                              | -21.3       |
| 26500            | 40.5                              | -21.1       |

| cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(pre-<br>amp)<br>dB | cable<br>loss 3<br>(inside<br>chamber)<br>dB | cable<br>loss 4<br>(switch<br>unit)<br>dB | cable<br>loss 5<br>(to<br>receiver)<br>dB |
|--|--|--|---|---|
| 0.72   | -35.85                                 | 6.20   | 2.81                                      | 2.65                                      |
| 0.69   | -35.71                                 | 6.46   | 2.76                                      | 2.59                                      |
| 0.76   | -35.44                                 | 6.69   | 3.15                                      | 2.79                                      |
| 0.74   | -35.07                                 | 7.04   | 3.11                                      | 2.91                                      |
| 0.72   | -34.49                                 | 7.30   | 3.07                                      | 3.05                                      |
| 0.78   | -34.46                                 | 7.48   | 3.12                                      | 3.15                                      |
| 0.87   | -34.07                                 | 7.61   | 3.20                                      | 3.33                                      |
| 0.90   | -33.96                                 | 7.47   | 3.28                                      | 3.19                                      |
| 0.89   | -33.57                                 | 7.34   | 3.35                                      | 3.28                                      |
| 0.87   | -33.66                                 | 7.06   | 3.75                                      | 2.94                                      |
| 0.88   | -33.75                                 | 6.92   | 3.77                                      | 2.70                                      |
| 0.90   | -33.35                                 | 6.99   | 3.52                                      | 2.66                                      |
| 0.88   | -33.99                                 | 6.88   | 3.88                                      | 2.58                                      |
| 0.91   | -33.89                                 | 7.01   | 3.93                                      | 2.51                                      |
| 0.88   | -33.00                                 | 6.72   | 3.96                                      | 2.14                                      |
| 0.89   | -34.07                                 | 6.90   | 3.66                                      | 2.22                                      |
| 0.86   | -35.11                                 | 7.02   | 3.69                                      | 2.28                                      |
| 0.90   | -35.20                                 | 7.15   | 3.91                                      | 2.36                                      |

#### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + AF \text{ (dB 1/m)} + Corr. \text{ (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.

Table shows an extract of values.

## 7.6 ANTENNA EMCO 3160-10 (26.5 GHZ – 40 GHZ)

| Frequency<br>GHz | AF<br>EMCO<br>3160-10<br>dB (1/m) | Corr.<br>dB | cable<br>loss 1<br>(inside<br>chamber)<br>dB | cable<br>loss 2<br>(outside<br>chamber)<br>dB | cable<br>loss 3<br>(switch<br>unit)<br>dB | cable<br>loss 4<br>(to<br>receiver)<br>dB | distance<br>corr.<br>(-20 dB/<br>decade)<br>dB | d <sub>Limit</sub><br>(meas.<br>distance<br>(limit))<br>m | d <sub>used</sub><br>(meas.<br>distance<br>(used))<br>m |
|------------------|-----------------------------------|-------------|--|---|---|---|--|---|---|
| 26.5             | 43.4                              | -11.2       | 4.4  |   |   |   | -9.5   | 3   | 1.0   |
| 27.0             | 43.4                              | -11.2       | 4.4  |   |   |   | -9.5   | 3   | 1.0   |
| 28.0             | 43.4                              | -11.1       | 4.5  |   |   |   | -9.5   | 3   | 1.0   |
| 29.0             | 43.5                              | -11.0       | 4.6  |   |   |   | -9.5   | 3   | 1.0   |
| 30.0             | 43.5                              | -10.9       | 4.7  |   |   |   | -9.5   | 3   | 1.0   |
| 31.0             | 43.5                              | -10.8       | 4.7  |   |   |   | -9.5   | 3   | 1.0   |
| 32.0             | 43.5                              | -10.7       | 4.8  |   |   |   | -9.5   | 3   | 1.0   |
| 33.0             | 43.6                              | -10.7       | 4.9  |   |   |   | -9.5   | 3   | 1.0   |
| 34.0             | 43.6                              | -10.6       | 5.0  |   |   |   | -9.5   | 3   | 1.0   |
| 35.0             | 43.6                              | -10.5       | 5.1  |   |   |   | -9.5   | 3   | 1.0   |
| 36.0             | 43.6                              | -10.4       | 5.1  |   |   |   | -9.5   | 3   | 1.0   |
| 37.0             | 43.7                              | -10.3       | 5.2  |   |   |   | -9.5   | 3   | 1.0   |
| 38.0             | 43.7                              | -10.2       | 5.3  |   |   |   | -9.5   | 3   | 1.0   |
| 39.0             | 43.7                              | -10.2       | 5.4  |   |   |   | -9.5   | 3   | 1.0   |
| 40.0             | 43.8                              | -10.1       | 5.5  |   |   |   | -9.5   | 3   | 1.0   |

### Sample calculation

$$E \text{ (dB } \mu\text{V/m)} = U \text{ (dB } \mu\text{V)} + \text{AF (dB 1/m)} + \text{Corr. (dB)}$$

U = Receiver reading

AF = Antenna factor

Corr. = sum of single correction factors of used cables, switch unit, distance correction, amplifier (if applicable)

Linear interpolation will be used for frequencies in between the values in the table.


distance correction =  $-20 * \text{LOG} (d_{\text{Limit}} / d_{\text{used}})$

Linear interpolation will be used for frequencies in between the values in the table.


Table shows an extract of values.



## 8 SETUP DRAWINGS

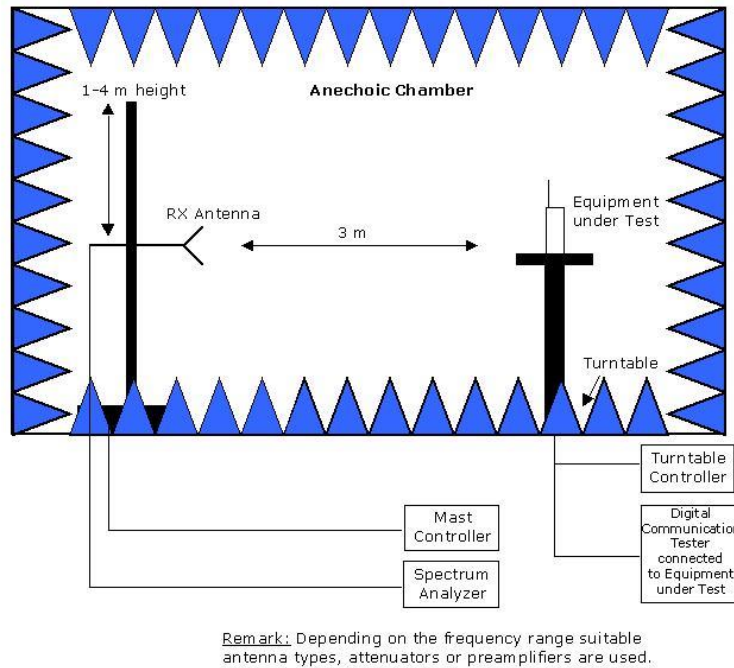

**Drawing 1:** Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting groundplane.

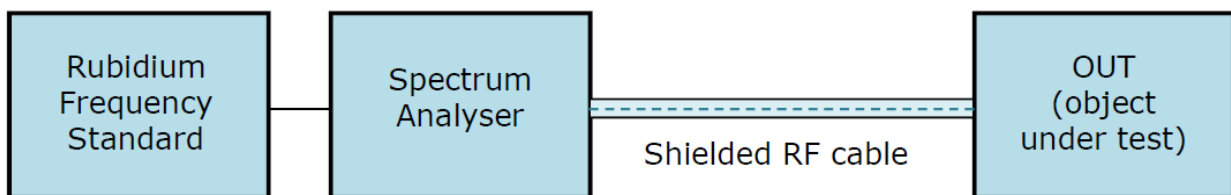

**Drawing 2:** Setup for conducted radio tests.

## 9 MEASUREMENT UNCERTAINTIES

| <b>Test Case</b>                     | <b>Parameter</b>   | <b>Uncertainty</b>     |
|--------------------------------------|--------------------|------------------------|
| AC Power Line                        | Power              | ± 3.4 dB               |
| Field Strength of spurious radiation | Power              | ± 5.5 dB               |
| 6 dB / 26 dB / 99% Bandwidth         | Power<br>Frequency | ± 2.9 dB<br>± 11.2 kHz |
| Conducted Output Power               | Power              | ± 2.2 dB               |
| Band Edge Compliance                 | Power<br>Frequency | ± 2.2 dB<br>± 11.2 kHz |
| Frequency Stability                  | Frequency          | ± 25 Hz                |
| Power Spectral Density               | Power              | ± 2.2 dB               |

## 10 PHOTO REPORT

Please see separate photo report.