



Inter**Lab**[®]

FCC Measurement/Technical Report on

Bluetooth transceiver
GM UHP 7104

Report Reference: MDE_Harman_0707_FCCb

Test Laboratory:

7 layers AG
Borsigstrasse 11
40880 Ratingen
Germany
email: info@7Layers.de



Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the testing laboratory.

7 layers AG
Borsigstrasse 11
40880 Ratingen, Germany
Phone: +49 (0) 2102 749 0
Fax: +49 (0) 2102 749 350
www.7Layers.com

*Aufsichtsratsvorsitzender •
Chairman of the Supervisory Board:*
Markus Becker
Vorstand • Board:
Dr. Hans-Jürgen Meckelburg
René Schildknecht

Registergericht • registered in:
Düsseldorf, HRB 44096
USt-IdNr • VAT Nr:
DE 203159652
TAX No. 147/5869/0385

InterLab[®] is a registered trademark of 7 layers AG



Table of Contents

0 Summary	3
0.1 Technical Report Summary	3
0.2 Measurement Summary	4
1 Administrative Data	6
1.1 Testing Laboratory	6
1.2 Project Data	6
1.3 Applicant Data	6
1.4 Manufacturer Data	6
2 Product labelling	7
2.1 FCC ID label	7
2.2 Location of the label on the EUT	7
3 Test object Data	8
3.1 General EUT Description	8
3.2 EUT Main components	9
3.3 Ancillary Equipment	9
3.4 EUT Setups	9
3.5 Operating Modes	10
4 Test Results	11
4.1 Peak power output	11
4.2 Spurious radiated emissions	13
5 Test Equipment	18
6 Photo Report	21
7 Setup Drawings	24
8 Annex measurement plots	25
8.1 Peak power output	25
8.2 Radiated emissions (f<30MHz)	26
8.3 Radiated emissions (f=30MHz to 1GHz)	28



0 Summary

0.1 Technical Report Summary

Type of Authorization

Certification for an Intentional Radiator (Frequency Hopping Spread Spectrum).

Applicable FCC Rules

Prepared in accordance with the requirements of FCC Rules and Regulations as listed in 47 CFR Ch.1 Parts 2 (10-1-06 Edition) and 15 (10-1-06 Edition). The following subparts are applicable to the results in this test report.

Part 2, Subpart J - Equipment Authorization Procedures, Certification

Part 15, Subpart C – Intentional Radiators

§ 15.201 Equipment authorization requirement

§ 15.207 Conducted limits

§ 15.209 Radiated emission limits; general requirements

§ 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz

Note:

The tests were selected and performed with reference to the FCC Public Notice DA 00-705, released March 30, 2000

Instead of applying ANSI C63.4-1992 which is referenced in the FCC Public Note, the newer ANSI C63.4-2003 is applied.

Summary Test Results:

The EUT complied with all performed tests as listed in chapter 0.2 Measurement Summary.



0.2 Measurement Summary

FCC Part 15, Subpart C		§ 15.207	
Conducted emissions (AC power line)			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	Final Result
-	-	AC Port (power line)	2003 N/A
FCC Part 15, Subpart C		§ 15.247 (a) (1)	
Occupied bandwidth			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Antenna connector	10-1-06 N/P
FCC Part 15, Subpart C		§ 15.247 (b) (1)	
Peak power output			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Antenna connector	10-1-06 N/P
		Antenna connector	N/P
op-mode 3	Setup_a01	Antenna connector	passed
FCC Part 15, Subpart C		§ 15.247 (d)	
Spurious RF conducted emissions			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Antenna connector	10-1-06 N/P
FCC Part 15, Subpart C		§ 15.247 (d), § 15.35 (b), § 15.209	
Spurious radiated emissions			
The measurement was performed according to ANSI C63.4			
OP-Mode	Setup	Port	Final Result
op-mode 1	Setup_a02	Enclosure	2003 passed
op-mode 2	Setup_a02	Enclosure	passed
op-mode 3	Setup_a02	Enclosure	passed
FCC Part 15, Subpart C		§ 15.247 (d)	
Band edge compliance			
The measurement was performed according to FCC § 15.31			
(10-1-06) / ANSI C63.4 (2003)			
OP-Mode	Setup	Port	Final Result
		Antenna connector	10-1-06 / 2003 N/P
FCC Part 15, Subpart C		§ 15.247 (a) (1) (iii)	
Dwell time			
The measurement was performed according to FCC § 15.31			
OP-Mode	Setup	Port	Final Result
		Antenna connector	10-1-06 N/P

FCC Part 15, Subpart C

§ 15.247 (a) (1)

Channel separation

The measurement was performed according to FCC § 15.31

10-1-06

OP-Mode

Setup

Port

Final Result

Antenna connector

N/P

FCC Part 15, Subpart C

§ 15.247 (a) (iii)

Number of hopping frequencies

The measurement was performed according to FCC § 15.31

10-1-06

OP-Mode

Setup

Port

Final Result

Antenna connector

N/P

N/A not applicable:
the EUT is powered by DC

N/P not performed:
the RF part of the device has been declared as identical with the RF part in the product "GM UHP embedded 7105" therefore the corresponding conducted test was not repeated with this product.



7 layers AG, Borsigstr. 11
40880 Ratingen, Germany
Phone +49 (0)2102 749 0

Responsible for
Accreditation Scope:

B. Rethen

Responsible
for Test Report:

Machulec



1 Administrative Data

1.1 Testing Laboratory

Company Name: 7 Layers AG
Address Borsigstr. 11
40880 Ratingen
Germany

This facility has been fully described in a report submitted to the FCC and accepted under the registration number 96716 .

The test facility is also accredited by the following accreditation organisation:
- Deutscher Akkreditierungs Rat DAR-Registration no. DAT-P-192/99-01

Responsible for Accreditation Scope: Dipl.-Ing. Bernhard Retka
Dipl.-Ing. Robert Machulec
Dipl.-Ing. Thomas Hoell

Report Template Version: 2007-06-12

1.2 Project Data

Responsible for testing and report: Dipl.-Ing. Robert Machulec
Date of Test(s): 2007-11-29 to 2007-12-19
Date of Report: 2008-01-16

1.3 Applicant Data

Company Name: HARMAN/BECKER Automotive Systems GmbH
Address: Söflinger Strasse 100
89077 Ulm
Germany
Contact Person: Werner Bollinger

1.4 Manufacturer Data

Company Name: please see applicant data
Address:
Contact Person:



2 Product labelling

2.1 FCC ID label

At the time of the report there was no FCC label available.

2.2 Location of the label on the EUT

see above



3 Test object Data

3.1 General EUT Description

Equipment under Test	Bluetooth transceiver
Type Designation:	GM UHP 7104
Kind of Device:	Car equipment
(optional)	
Voltage Type:	DC (car 12VDC)
Voltage level:	13.2 V
Modulation Type:	GFSK

General product description:

Bluetooth is a short-range radio link intended to be a cable replacement between portable and/or fixed electronic devices.

Bluetooth operates in the unlicensed ISM Band at 2.4 GHz. In the US a band of 83.5 MHz width is available. In this band, the Bluetooth technology defines 79 RF channels spaced 1 MHz (2402 - 2480 MHz). The actual RF channel is chosen from a pseudo-random hopping sequence through the 79 channels. A channel is occupied for a defined amount of time slots, with a nominal slot length of 625 μ s. The maximum dwell time on one channel is defined by the packet type and is 0.625 ms for DH1 packets, 1.875 ms for DH3 and 3.125 ms for DH5. The nominal hop rate is 1600 hops/s for DH1, 1600/3 for DH3 and 1600/5 for DH5. All frequencies are equally used. The maximum nominal average time of occupancy is 0.4 s within a period of 79*0.4 seconds.

The basic data rate of 1 Mbps uses GFSK modulation

Specific product description for the EUT:

EUT is a Bluetooth transceiver. Two variant are available one with high speed CAN bus and one with Low speed CAN bus.

The EUT provides the following ports:

Ports

- Antenna connector
- Enclosure
- DC Port (power line)
- System connector

The main components of the EUT are listed and described in Chapter 3.2



3.2 EUT Main components

Type, S/N, Short Descriptions etc. used in this Test Report

Short Description	Equipment under Test	Type Designation	Serial No.	HW Status	SW Status	Date of Receipt
EUT A (Code: 43041F02)	GM UHP high	7104	75000573	24.09.2007	470070002	2007-11-27
Remark: EUT is equipped with a permanent antenna connector						

NOTE: The short description is used to simplify the identification of the EUT in this test report.

3.3 Ancillary Equipment

For the purposes of this test report, ancillary equipment is defined as equipment which is used in conjunction with the EUT to provide operational and control features to the EUT. It is necessary to configure the system in a typical fashion, as a customer would normally use it. But nevertheless Ancillary Equipment can influence the test results.

Short Description	Equipment under Test	Type Designation	Serial no.	HW Status	SW Status	FCC ID
AE1	External antenna	antenna gain = 1.4 dBi	-	-	-	-

3.4 EUT Setups

This chapter describes the combination of EUTs and ancillary equipment used for testing.

Setup No.	Combination of EUT's	Description
Setup_a01	EUT A	setup for conducted measurements
Setup_a02	EUT A + AE1	setup for radiated measurements



3.5 Operating Modes

This chapter describes the operating modes of the EUTs used for testing. After check of radiated emissions below 1 GHz with booth CAN bus speeds the high speed variant was chosen as worst case variant.

Op. Mode	Description of Operating Modes	Remarks
Op-mode 1	The EUT transmits on 2402 MHz	Loopback mode, basic data rate 1 Mbps
Op-mode 2	The EUT transmits on 2441 MHz	Loopback mode, basic data rate 1 Mbps
Op-mode 3	The EUT transmits on 2480 MHz	Loopback mode, basic data rate 1 Mbps
Op-mode 4	The EUT is in Hopping mode	The EUT is hopping on 79 channels, basic data rate 1 Mbps



4 Test Results

4.1 Peak power output

Standard FCC Part 15, 10-1-06
Subpart C

The test was performed according to: FCC §15.31, 10-1-06

4.1.1 Test Description

The Equipment Under Test (EUT) was set up to perform the output power measurements. The results recorded were measured with the modulation which produces the worst-case (highest) output power.

The resolution bandwidth for measuring the output power was 3 MHz.

The reference level of the spectrum analyzer was set higher than the output power of the EUT.

The EUT was connected to the spectrum analyzer via a short coax cable with a known loss.

4.1.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (b) (1)

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

Used conversion factor: Limit (dBm) = $10 \log (\text{Limit (W)}/1\text{mW})$

==> Maximum Output Power: 30 dBm



4.1.3 Test Protocol

Temperature: 24 °C
Air Pressure: 1041 hPa
Humidity: 29 %

Op. Mode	Setup	Port
op-mode 3	Setup_a01	Antenna connector

Output power dBm	Remarks
2.05	To verify that no difference exist the test outpour power at highest channel was done. The EIRP including antenna gain (1.4 dBi) is 3.45 dBm

Remark: Please see annex for the measurement plot.

4.1.4 Test result: Peak power output

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 3	passed



4.2 Spurious radiated emissions

Standard FCC Part 15, 10-1-06
Subpart C

The test was performed according to: ANSI C 63.4, 2003

4.2.1 Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S.

1. Measurement up to 30 MHz

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2003. The Equipment Under Test (EUT) was set up on a non-conductive table in the anechoic chamber.

The radiated emissions measurements were made in a typical installation configuration. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The Loop antenna HFH2-Z2 is used.

Step 1: pre measurement

- Anechoic chamber
- Antenna distance: 10m
- Detector: Peak-Maxhold
- Frequency range: 0.009 - 0.15 and 0.15 – 30 MHz
- Frequency steps: 0.1 kHz and 5 kHz
- IF-Bandwidth: 0.2 kHz and 10 kHz
- Measuring time / Frequency step: 100 ms

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: final measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is to find the maximum emission level.

- Open area test side
- Antenna distance: according to the Standard
- Detector: Quasi-Peak
- Frequency range: 0.009 – 30 MHz
- Frequency steps: measurement at frequencies detected in step 1
- IF-Bandwidth: 200 Hz - 10 kHz
- Measuring time / Frequency step: 100 ms

2. Measurement above 30 MHz and up to 1 GHz

Step 1: Preliminary scan

Preliminary test to identify the highest amplitudes relative to the limit.

Settings for step 1:

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz

- Measuring time / Frequency step: 100 μ s (BT Timing 1.25 ms)
- Turntable angle range: -180 to 180°
- Turntable step size: 90°
- Height variation range: 1 – 3m
- Height variation step size: 2m
- Polarisation: Horizontal + Vertical

Intention of this step is, to determine the radiated EMI-profile of the EUT. Afterwards the relevant emissions for the final measurement are identified.

Step 2: second measurement

For the relevant emissions determined in step 1, an additional measurement with the following settings will be performed. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180 to 180°
- Turntable step size: 45°
- Height variation range: 1 – 4m
- Height variation step size: 0.5m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5m

Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by $\pm 22.5^\circ$ around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by ± 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to $+ 22.5^\circ$ around the determined value
- Height variation range: -0.25m to + 0.25m around the determined value

Step 4: final measurement with QP detector

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak (< 1 GHz)
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s



3. Measurement above 1 GHz

The following modifications apply to the measurement procedure for the frequency range above 1 GHz:

The measurement distance was reduced to 1m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear distance for field strength measurements, inverse linear-distance squared for the power reference level measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18-25 GHz) are used, the steps 2-4 are omitted. Step 1 was performed with one height of the receiving antenna only.

EMI receiver settings:

- Detector: Peak, Average
- RBW = VBW = 100 kHz

After the measurement a plot will be generated which contains a diagram with the results of the preliminary scan and a chart with the frequencies and values of the results of the final measurement.

4.2.2 Test Requirements / Limits

FCC Part 15, Subpart C, §15.247 (d)

... In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

FCC Part 15, Subpart C, §15.209, Radiated Emission Limits

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit(dBµV/m @10m)
0.009 – 0.49	2400/F(kHz)	300	Limit (dBµV/m)+30dB
0.49 – 1.705	24000/F(kHz)	30	Limit (dBµV/m)+10dB
1.705 - 30	30	30	Limit (dBµV/m)+10dB

Frequency in MHz	Limit (µV/m)	Measurement distance (m)	Limit (dBµV/m)
30 - 88	100	3	40.0
88 - 216	150	3	43.5
216 - 960	200	3	46.0
above 960	500	3	54.0

§15.35(b)

..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit....

Used conversion factor: $\text{Limit (dBµV/m)} = 20 \log (\text{Limit (µV/m)}/1\mu\text{V/m})$



4.2.3 Test Protocol

Temperature: 24°C
 Air Pressure: 1011 hPa
 Humidity: 37 %

4.2.3.1 Measurement up to 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_a02	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
0°	-	-	-	-	-	-	-	-	-
90°	-	-	-	-	-	-	-	-	-

Remark: No (further) spurious emissions in the range 20 dB below the limit found therefore step 2 was not performed.
 The found peak at 91.2 kHz is emission from loop antenna power supply.

4.2.3.2 Measurement above 30 MHz

Op. Mode	Setup	Port
op-mode 1	Setup_a02	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to limit dB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	1602	-	46.15	36.61	-	74.00	54.00	27.85	17.39
Vertical + horizontal	4804	-	58.42	46.78	-	74.00	54.00	15.58	7.22

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

Op. Mode	Setup	Port
op-mode 2	Setup_a02	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to Limit DB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	1602	-	44.59	35.43	-	74.00	54.00	29.41	18.57
Vertical + horizontal	4882	-	58.13	46.43	-	74.00	54.00	15.87	7.57

Remark: No (further) spurious emissions in the range 20 dB below the limit found.



Op. Mode	Setup	Port
op-mode 3	Setup_a02	Enclosure

Polarisation	Frequency MHz	Corrected value dBµV/m			Limit dBµV/m	Limit dBµV/m	Limit dBµV/m	Delta to limit dB	Delta to Limit DB
		QP	Peak	AV	QP	Peak	AV	QP/Peak	AV
Vertical + horizontal	1602	-	46.65	35.20	-	74.00	54.00	28.35	18.80
Vertical + horizontal	2484	-	50.55	36.19	-	74.00	54.00	23.45	17.81
Vertical + horizontal	4960	-	55.07	43.33	-	74.00	54.00	18.93	10.67

Remark: No (further) spurious emissions in the range 20 dB below the limit found.

4.2.4 Test result: Spurious radiated emissions

FCC Part 15, Subpart C	Op. Mode	Result
	op-mode 1	passed
	op-mode 2	passed
	op-mode 3	passed

5 Test Equipment

EUT Digital Signalling System

Equipment	Type	Serial No.	Manufacturer
Digital Radio Communication Tester	CMD 55	831050/020	Rohde & Schwarz
Signalling Unit for Bluetooth Spurious Emissions	PTW60	100004	Rohde & Schwarz
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz
Bluetooth Signalling Unit	CBT (1153.9000.35)	100302	Rohde & Schwarz

EMI Test System

Equipment	Type	Serial No.	Manufacturer
Comparison Noise Emitter	CNE III	99/016	York
EMI Analyzer	ESI 26	830482/004	Rohde & Schwarz
Signal Generator	SMR 20	846834/008	Rohde & Schwarz

EMI Radiated Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer
Antenna mast 4m	MA 240	240/492	HD GmbH H. Deisel
Biconical dipole	VUBA 9117	9117108	Schwarzbeck
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32	849785	Miteq
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35	896037	Miteq
Broadband Amplifier 45MHz-27GHz	JS4-00102600-42	619368	Miteq
Cable "ESI to EMI Antenna"	EcoFlex10	W18.01-2 + W38.01-2	Kabel Kusch
Cable "ESI to Horn Antenna"	UFB311A + UFB293C	W18.02-2 + W38.02-2	Rosenberger-Microcoax
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz
Double-ridged horn	HF 906	357357/001	Rohde & Schwarz
High Pass Filter	5HC3500/12750-1.2-KK	200035008	Trilithic
High Pass Filter	5HC2700/12750-1.5-KK	9942012	Trilithic
High Pass Filter	4HC1600/12750-1.5-KK	9942011	Trilithic
KUEP pre amplifier	Kuep 00304000	001	7layers
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz
Pyramidal Horn Antenna 26.5 GHz	Model 3160-09	9910-1184	EMCO

EMI Conducted Auxiliary Equipment

Equipment	Type	Serial No.	Manufacturer
Cable "LISN to ESI"	RG214	W18.03+W48.03	Huber+Suhner
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz
Two-Line V-Network	ESH 3-Z5	829996/002	Rohde & Schwarz

Auxiliary Test Equipment

Equipment	Type	Serial No.	Manufacturer
Broadband Resist. Power Divider N	1506A / 93459	LM390	Weinschel
Broadband Resist. Power Divider SMA	1515 / 93459	LN673	Weinschel
Digital Multimeter 01	Voltcraft M-3860M	IJ096055	Conrad
Digital Multimeter 02	Voltcraft M-3860M	IJ095955	Conrad
Digital Oscilloscope	TDS 784C	B021311	Tektronix
Fibre optic link Satellite	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver	FO RS232 Link	182-018	Pontis
I/Q Modulation Generator	AMIQ-B1	832085/018	Rohde & Schwarz
Notch Filter ultra stable	WRCA800/960-6E	24	Wainwright
Spectrum Analyzer 9 kHz to 3 GHz	FSP3	838164/004	Rohde & Schwarz
Temperature Chamber	VT 4002	58566002150010	Vötsch
Temperature Chamber	KWP 120/70	59226012190010	Weiss
ThermoHygro Datalogger 03	Opus10 THI (8152.00)	7482	Lufft Mess- und Regeltechnik GmbH

Anechoic Chamber

Equipment	Type	Serial No.	Manufacturer
Air Compressor (pneumatic)			Atlas Copco
Controller	CO 2000	CO2000/328/12470406 /L	Innco innovative constructions GmbH
EMC Camera	CE-CAM/1		CE-SYS
EMC Camera for observation of EUT	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter telephone systems / modem	B84312-C40-B1		Siemens&Matsushita
Filter Universal 1A	B84312-C30-H3		Siemens&Matsushita
Fully/Semi AE Chamber	10.58x6.38x6		Frankonia
Turntable	DS 420S	420/573/99	HD GmbH, H. Deisel
Valve Control Unit (pneum.)	VE 615P	615/348/99	HD GmbH, H. Deisel



7 layers Bluetooth Full RF Test Solution

Bluetooth RF Conformance Test System TS8960

Equipment	Type	Serial No.	Manufacturer
10 MHz Reference	MFS	5489/001	Efratom
Power Meter 832025/059	NRVD	832025/059	Rohde & Schwarz
Power Sensor A 832279/013	NRV-Z1	832279/013	Rohde & Schwarz
Power Sensor B 832279/015	NRV-Z1	832279/015	Rohde & Schwarz
Power Supply	E3632A	MY40003776	Agilent
Power Supply	PS-2403D	-	Conrad
RF Step Attenuator 833695/001	RSP	833695/001	Rohde & Schwarz
Rubidium Frequency Normal	MFS	002	Efratom
Signal Analyzer FSIQ26 832695/007	FSIQ26	832695/007	Rohde & Schwarz
Signal Generator 833680/003	SMP 03	833680/003	Rohde & Schwarz
Signal Generator A 834344/002	SMIQ03B	834344/002	Rohde & Schwarz
Signal Generator B 832870/017	SMIQ03B	832870/017	Rohde & Schwarz
Signal Switching and Conditioning Unit	SSCU	338826/005	Rohde & Schwarz
Signalling Unit PTW60 838312/014	PTW60 for TS8960	838312/014	Rohde & Schwarz
System Controller 829323/008	PSM12	829323/008	Rohde & Schwarz
Bluetooth Signalling Unit	CBT (1153.9000.35)	100302	Rohde & Schwarz

6 Photo Report

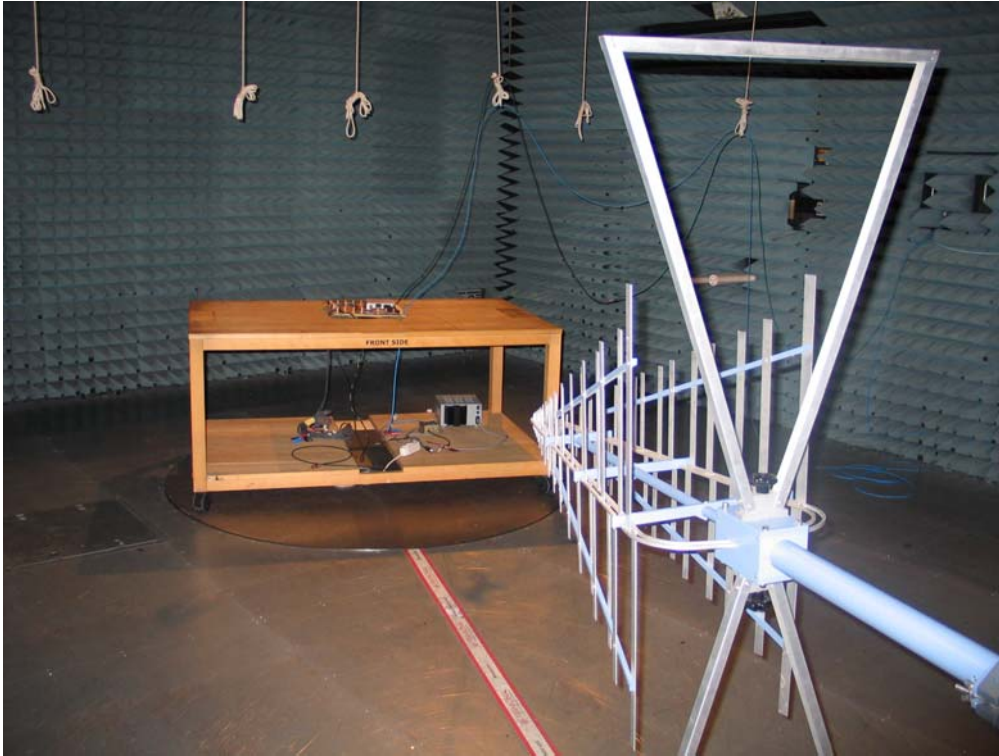


Photo 1: Test setup for radiated measurements (Enclosure, 30 MHz to 1 GHz)



Photo 2: Test setup for radiated measurements (Enclosure, below 30 MHz)

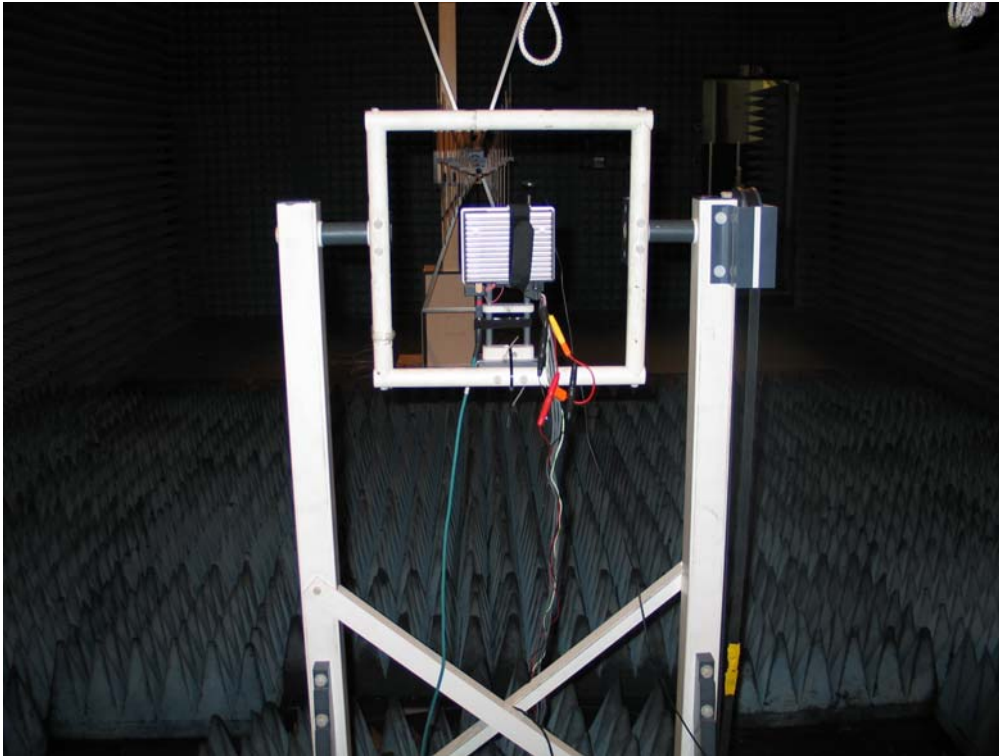


Photo 3: Test setup for radiated measurements (Enclosure, above 1 GHz)

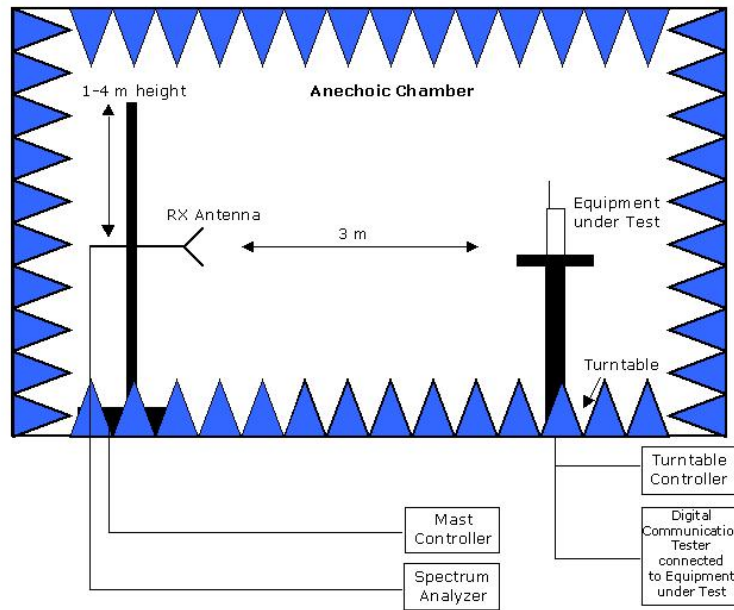


Photo 5: EUT (rear side)



Photo 7: EUT (bottom side)

7 Setup Drawings



Remark: Depending on the frequency range suitable antenna types, attenuators or preamplifiers are used.

Drawing 1: Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.



8 Annex measurement plots


8.1 Peak power output

8.1.1 Peak power output operating mode 3

Op. Mode

op-mode 3

	Marker 1 [T1]	RBW	3 MHz	RF Att	20 dB
	Ref Lvl	2.05 dBm	VBW	3 MHz	
	10 dBm	2.47982565 GHz	SWT	5 ms	Unit dBm

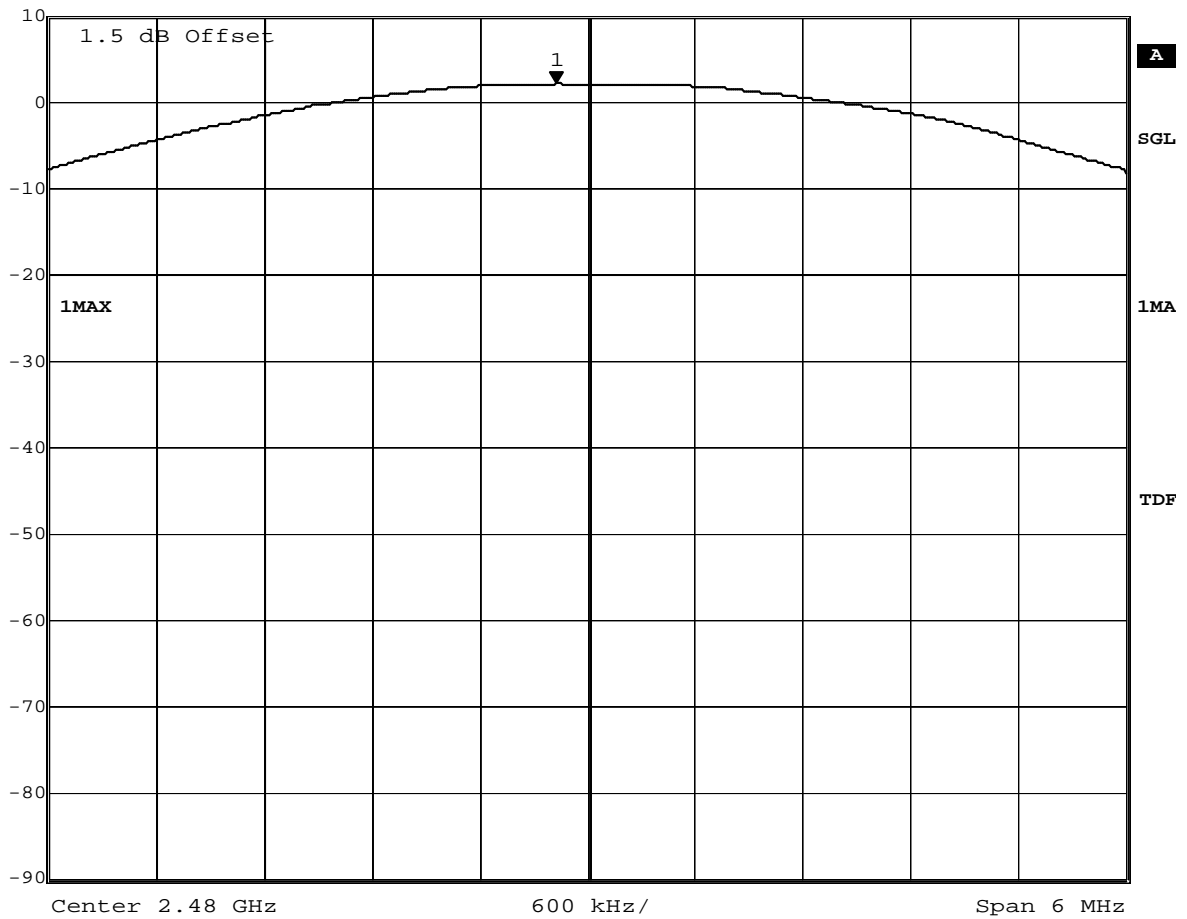


Title: Peak outputpower Power
 Comment A: CH T: 2480 MHz
 Date: 20.DEC.2007 15:44:34

8.2 Radiated emissions (f<30MHz)


Op. Mode

op-mode 1

Antenna position 90°
EUT position front side

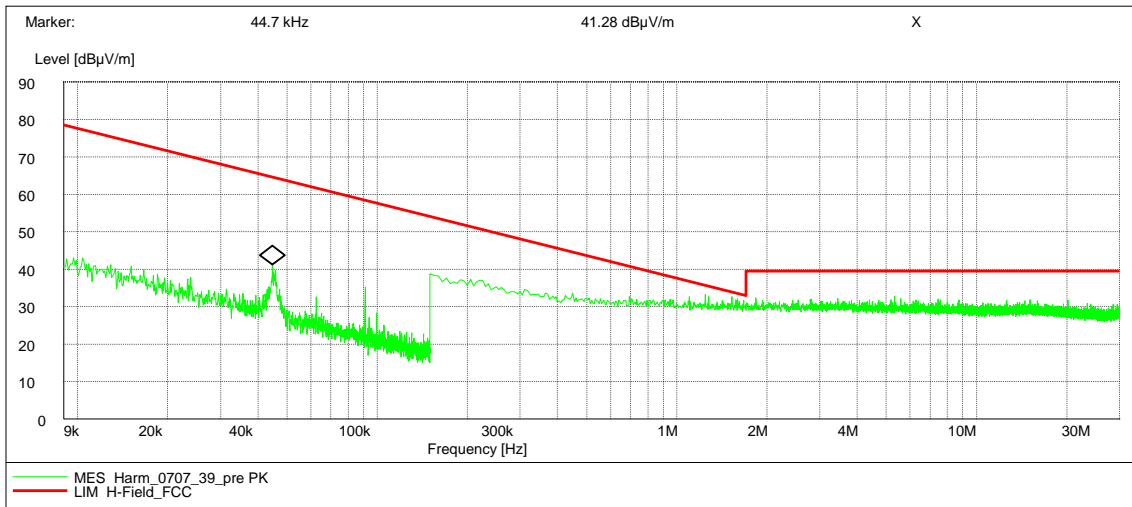


Antenna position 90°
EUT position right side

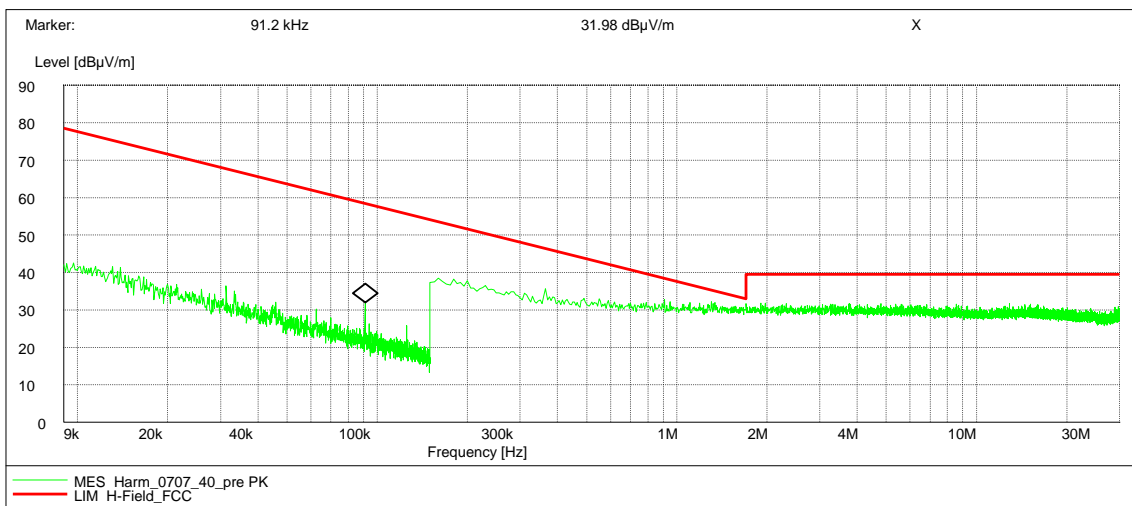


Op. Mode

op-mode 1

Antenna position 0°
EUT position front side

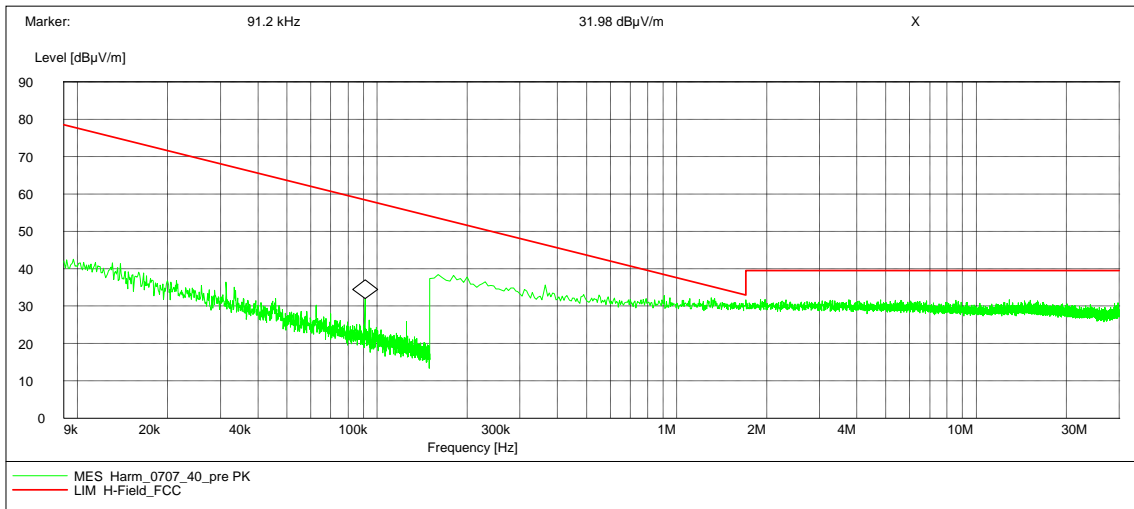


Antenna position 0°
EUT position right side

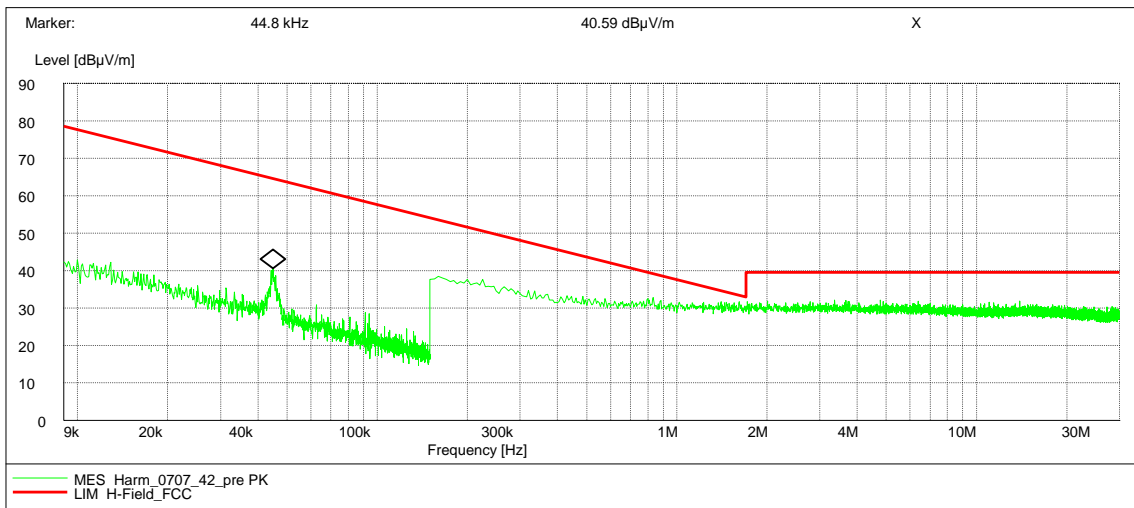

8.3 Radiated emissions (f=30MHz to 1GHz)


Measurement performed for verification of worst case between GM UHP High speed and GM UHP Low speed

Measurement for the can bus low speed variant:

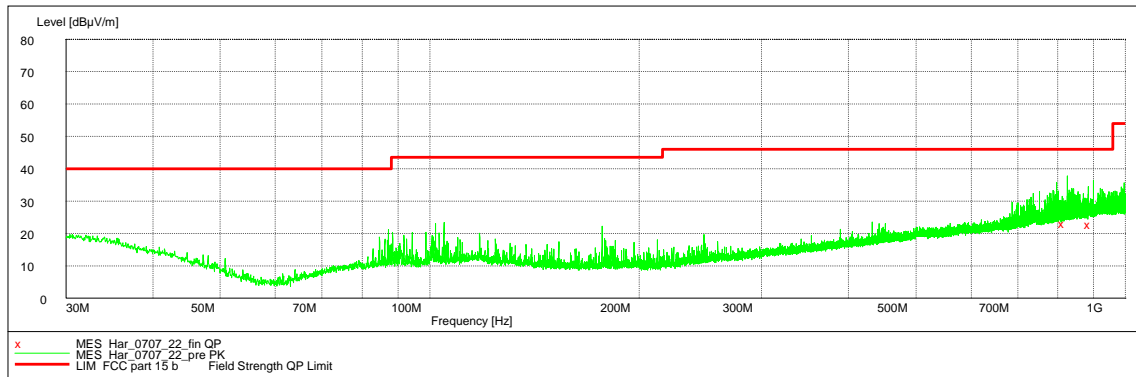

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
825.720000	23.50	21.8	46.0	22.5	103.0	247.00	HORIZONTAL
899.280000	23.20	22.9	46.0	22.8	103.0	247.00	HORIZONTAL

Measurement for the can bus high speed variant:

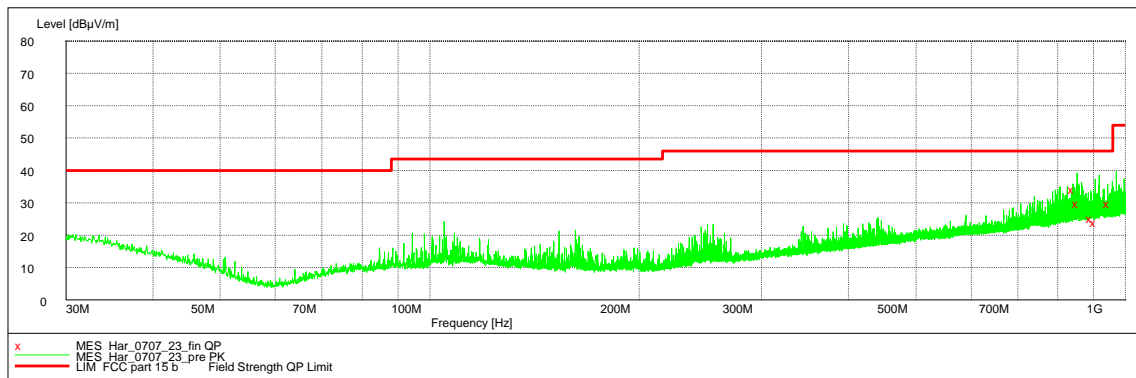

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Height cm	Azimuth deg	Polarisation
852.000000	34.60	21.9	46.0	11.4	100.0	284.00	HORIZONTAL
865.020000	30.00	22.1	46.0	16.0	100.0	16.00	HORIZONTAL
904.500000	25.40	22.9	46.0	20.6	254.0	247.00	HORIZONTAL
917.520000	24.40	23.4	46.0	21.6	150.0	157.00	VERTICAL
956.880000	30.30	23.3	46.0	15.7	100.0	247.00	HORIZONTAL