



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

FCC Rules and Regulations / Intentional Radiators

Operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands

Part 15, Subpart C, Section 15.249

THE FOLLOWING "**MEETS**" THE ABOVE TEST SPECIFICATION

Formal Name: Indoor Cycle
Kind of Equipment: training / fitness device
Test Configuration: Stand Alone (Tested at 3 vdc)
Model Number(s): Pro 300PT
Model(s) Tested: Pro 300PT
Serial Number(s): NA
Date of Tests: June 12, 2006 and April 2, 2007
Test Conducted For: Saris Cycling Group Inc
5253 Verona Rd
Madison, Wisconsin 53711

NOTICE: "This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government". Please see the "Additional Description of Equipment Under Test" page listed inside of this report.

© Copyright 1983- 2006 D.L.S. Electronic Systems, Inc

COPYRIGHT NOTICE

This report or any portion thereof, may not be reproduced or modified in any form without the expressed written consent of D.L.S. Electronic Systems, Inc.



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

SIGNATURE PAGE

Report By:

Arnom C. Rowe
Test Engineer
EMC-001375-NE

Reviewed By:

William Stumpf
OATS Manager

Approved By:

Brian Mattson
General Manager

Company Official:

Saris Cycling Group Inc



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

TABLE OF CONTENTS

- i. Cover Page 1
- ii. Signature Page 2
- iii. Table of Contents 3
- iv. NVLAP Certificate of Accreditation 5
- 1.0 Summary of Test Report 6
- 2.0 Introduction 6
- 3.0 Object 6
- 4.0 Test Set-Up 7
- 5.0 Test Equipment 8
- 6.0 Ambient Measurements 9
- 7.0 Description of Test Sample 10
- 8.0 Additional Description of Test Sample 11
- 9.0 Photo Information and Test Set-Up 12
- 10.0 Radiated Photos Taken During Testing 13
- 11.0 Results of Tests 14
- 12.0 Conclusion 14
- TABLE 1 – EQUIPMENT LIST 15



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

TABLE OF CONTENTS


Appendix A – Electric Field Radiated Emissions Test.....	17
1.0 Conducted Emission Measurements	18
2.0 Restrict Band Compliance	19
2.0 Data and Graph(s) taken showing the Restrict Band Compliance.....	20
3.0 Field Strength of Spurious Emission Measurements	22
3.0 Radiated Data and Graph(s) taken for Fundamental Emission Measurements	24
3.0 Radiated Data and Graph(s) taken for Field Strength Spurious Emission Measurements	26
4.0 20 dB Bandwidth (FCC Part 15.249) To Show in Band Operation.....	28
4.0 Duty cycle correction factor (FCC Part 15.35).....	30



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

United States Department of Commerce
National Institute of Standards and Technology

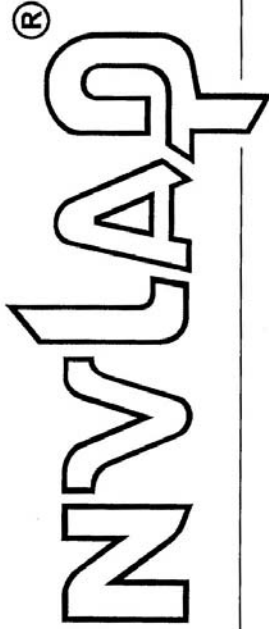

Certificate of Accreditation to ISO/IEC 17025:1999

NVLAP LAB CODE: 100276-0

D.L.S. Electronic Systems, Inc.
Wheeling, IL

is recognized by the National Voluntary Laboratory Accreditation Program for conformance with criteria set forth in NIST Handbook 150:2001 and all requirements of ISO/IEC 17025:1999.
Accreditation is granted for specific services, listed on the Scope of Accreditation, for:

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS



2006-10-01 through 2007-09-30

Effective dates

Dolly S. Buce
For the National Institute of Standards and Technology

NVLAP-01C (REV. 2005-05-19)



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

1.0 SUMMARY OF TEST REPORT

It was found that the Indoor Cycle, Model Number(s) Pro 300PT, "**meets**" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Indoor Cycle is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.

2.0 INTRODUCTION

On June 12, 2006 and April 2, 2007, a series of radio frequency interference measurements was performed on Indoor Cycle, Model Number(s) Pro 300PT, Serial Number: NA. The tests were performed according to the procedures of the FCC as stated in the "Methods of Measurement of Radio-Noise Emissions for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz" found in the American National Standards Institute, ANSI C63.4-2003. Tests were performed by personnel of D.L.S. Electronic Systems, Inc. who are responsible to Donald L. Sweeney, Senior EMC Engineer.

D.L.S. Electronic Systems, Inc. is a full service EMC/Safety Testing Laboratory accredited to ISO 17025. NVLAP Certificate and Scope can be viewed at <http://www.dlsemc.com/certificate>. Our facilities are registered with the FCC, Industry Canada, and VCCI.

3.0 OBJECT

The purpose of this series of tests was to determine if the test sample could meet the radio frequency interference emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Sections 15.35(b), 15.37(d), 15.209 & 15.249 for Intentional Radiators operating in the Bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24-24.25 GHz.



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

4.0 TEST SET-UP

All emission tests were performed at D.L.S. Electronic Systems, Inc. and set up according to the American National Standards Institute, ANSI C63.4-2003, Section 8, (Figures 11a and 11b). The conducted tests were performed with the test item placed on a non-conductive table (table top equipment), located in the test room. Equipment normally operated on the floor was tested by placing it on the metal ground plane. The ground plane has an electrical isolation layer over its surface approximately 7mm thick. The power line supplied was connected to a dual line impedance stabilization network electrically bonded to the ground plane, located on the floor. The networks were constructed per the requirements of the American National Standards Institute, ANSI C63.4-2003, Section 4, (Figure 2).

All radiated emissions tests were performed with the test item placed on a 80 cm high rotating non-conductive table, located in the test room. Equipment normally operated on the floor was placed on a metal covered turntable which is flush with the surrounding conducting ground plane. The ground plane has an electrical isolation layer over its surface approximately 7 mm thick. The EUT is separated from the turntable ground plane by a non-conductive layer. The equipment under test was set up according to ANSI C63.4-2003, Sections 6 and 8.



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

5.0 TEST EQUIPMENT (Bandwidths and Detector Function)

All preliminary data below 1000 MHz was automatically plotted using the HP Spectrum Analyzer or ESI 26/40 Fixed Tuned Receiver. The data was taken using Peak, Quasi-Peak or the Average Detector Functions as required. This information was then used to determine the frequencies of maximum emissions. Above 1000 MHz, final data was taken using the Average Detector.

Below 1000 MHz, final data was taken using the HP Spectrum Analyzer and/or ESI 26/40 Fixed Tuned Receiver. These plots were made using the Peak or Quasi-Peak Detector functions, with manual measurements performed on the questionable frequencies using the Quasi-Peak or the Average Detector Function of the Analyzer or ESI 26/40 Fixed Tuned Receiver as required. Above 1000 MHz, final data was taken using the Average Detector on the Spectrum Analyzer.

The bandwidths shown below are specified by ANSI C63.4-2003, Section 4.2.

Frequency Range	Bandwidth (-6 dB)
10 to 150 kHz	200 Hz
150 kHz to 30 MHz	9 kHz
30 MHz to 1 GHz	120 kHz
Above 1 GHz	1 MHz

A list of the equipment used can be found in Table 1. All primary equipment was calibrated against known reference standards with a verified traceable path to NIST.



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

6.0 AMBIENT MEASUREMENTS

For emissions measurements, broadband antennas and an EMI Test Receiver with a panoramic spectrum display are used. First the frequency range is scanned and displayed on the test receiver display. Next the scanned frequency range is divided into smaller ranges, and then it is manually tuned through to determine the emissions from the EUT. A headset or loudspeaker is connected to the test receiver's AM/FM demodulated output as an aid in detecting ambient signals and finding frequencies of significant emission from the EUT. If there is any doubt as to the source of the emission, it is further investigated by rotating the EUT, or by disconnecting the power from the EUT.

The EUT is set up in its typical configuration and operated in its various modes. For tabletop systems, cables are manipulated within the range of likely configurations. For floor-standing equipment, the cables are located in the same manner as the user would install them and no further manipulation is made. If the manner of cable installation is not known, or if it changes with each installation, cables or wires for floor-standing equipment shall be manipulated to the extent possible to produce the maximum level of emissions. For each mode of operation, the frequency spectrum is monitored. Variations in antenna height, antenna polarization, EUT azimuth, and cable or wire placement (each variable within bounds specified elsewhere) are explored to produce the emissions that have the highest amplitude relative to the limit. These methods are performed to the specifications in MP-5 or ANSI C63.4-2003, as appropriate.



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

7.0 DESCRIPTION OF TEST SAMPLE: (See also Paragraph 8.0)

7.1 Description:

The Pro 300PT is installed into a flywheel; the rear hub of the Indoor Cycle. The hub measure parameters of the rear wheel; torque, wheel speed, rider cadence. The hub transmits the information every 0.63 seconds. The Console receives the hub transmission and displays the information to the user real time.

The Console calculates further parameter from the raw hub data; Power (in Watts), speed in MPH, distance, ride time etc.

CW test mode is a special test condition that is not used for regular operation. The test mode is entered with a 4.5 K resistor connected to a test point; it configures the radio for CW and loops (no end). The regular mode only transmits a short packet of data every 0.63 seconds.

7.2 PHYSICAL DIMENSIONS OF EQUIPMENT UNDER TEST

Hub length = 150mm (axle) x 120mm flange diameter

7.3 LINE FILTER USED:

NA

7.4 INTERNAL CLOCK FREQUENCIES:

Switching Power Supply Frequencies:

NA

Clock Frequencies:

.03125 MHz, .032768 MHz, 1 MHz, 4 MHz, & 16 MHz

7.5 DESCRIPTION OF ALL CIRCUIT BOARDS:

1. Hub electronics; Main Circuit Board PN: 16748 Revision E
2. Hub electronics; RF Circuit Board PN: 16776 Revision 1



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

8.0 ADDITIONAL DESCRIPTION OF TEST SAMPLE:
(See also Paragraph 7.0)

1: Added a low pass filter between the amplifier output and antenna. This change was made by Saris Cycling before coming to D.L.S. Electronic Systems, Inc.

NOTE:

The Indoor Cycle Model Number Pro 300PT was set in the continuous transmit mode for testing.

I certify that the above, as described in paragraph 7.0, describes the equipment tested and will be manufactured as stated.

By: _____
Signature Title

For: _____
Company Date



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

9.0 PHOTO INFORMATION AND TEST SET-UP

Item 0 Indoor Cycle


Model Number: Pro 300PT; Serial Number: NA



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

10.0 RADIATED PHOTOS TAKEN DURING TESTING

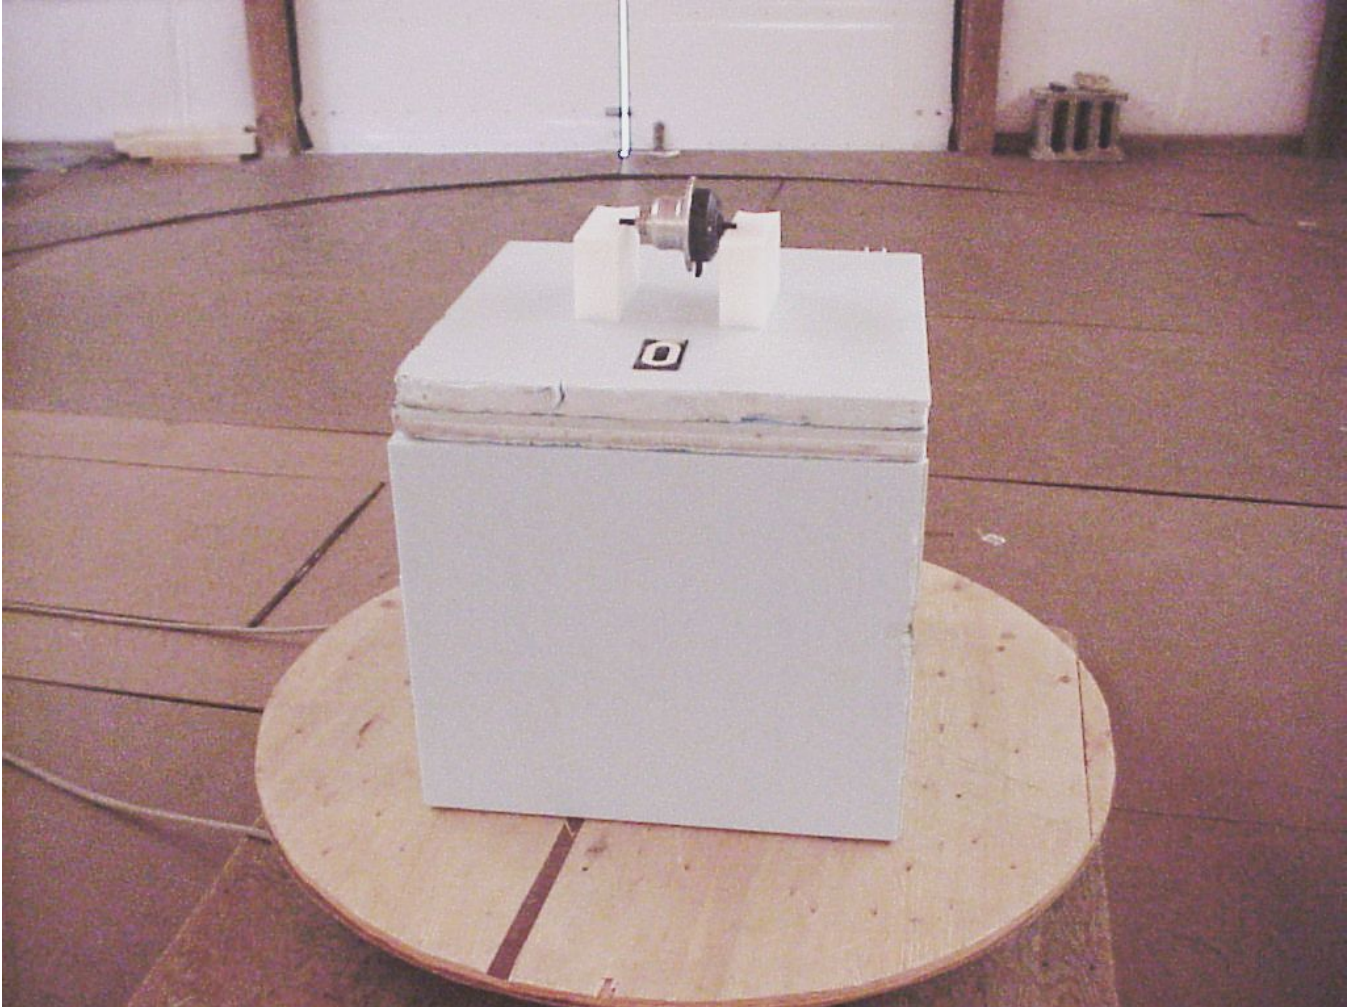



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

11.0 RESULTS OF TESTS

The radio interference emission charts can be seen on the pages at the end of this report. Data sheets indicating the test measurements taken during testing can also be found at the end of this report.

12.0 CONCLUSION

It was found that the Indoor Cycle, Model Number(s) Pro 300PT "**meets**" the radio interference radiated emission requirements of the FCC "Rules and Regulations", Part 15, Subpart C, Section 15.249 for operational in the 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz Bands. The conducted emissions test was not required because the Indoor Cycle is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
Receiver	Rohde & Schwarz	ESI 26	837491/010	20 Hz – 26 GHz	11/07
Receiver	Rohde & Schwarz	ESI 40	837808/006	20 Hz – 40 GHz	12/07
Receiver	Rohde & Schwarz	ESI 40	837808/005	20 Hz – 40 GHz	12/07
Antenna	EMCO	3104C	00054891	20 MHz – 200 MHz	2/08
Antenna	Electrometrics	LPA-25	1114	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	00054892	20 MHz – 200 MHz	3/08
Antenna	Electrometrics	3146	1205	200 MHz – 1 GHz	3/08
Antenna	EMCO	3104C	97014785	20 MHz – 200 MHz	2/08
Antenna	EMCO	3146	97024895	200 MHz – 1 GHz	3/08
Antenna	EMCO	3115	2479	1 GHz – 18 GHz	8/07
Antenna	EMCO	3115	99035731	1 GHz – 18 GHz	4/08
Antenna	Rohde & Schwarz	HUF-Z1	829381001	20 MHz – 1 GHz	2/08
Antenna	Rohde & Schwarz	HUF-Z1	829381005	20 MHz – 1 GHz	8/07

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

TABLE 1 – EQUIPMENT LIST

Test Equipment	Manufacturer	Model Number	Serial Number	Frequency Range	Cal Due Dates
LISN	Solar	8012-50-R-24-BNC	8305116	10 MHz – 30 MHz	8/07
LISN	Solar	8012-50-R-24-BNC	814548	10 MHz – 30 MHz	8/07
LISN	Solar	9252-50-R-24-BNC	961019	10 MHz – 30 MHz	12/07
LISN	Solar	9252-50-R-24-BNC	971612	10 MHz – 30 MHz	10/07
LISN	Solar	9252-50-R-24-BNC	92710620	10 MHz – 30 MHz	7/07

All primary equipment is calibrated against known reference standards with a verified traceable path to NIST.



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

APPENDIX A

TEST PROCEDURE

Part 15, Subpart C, Section 15.249a-e

Operation within the Bands 902-928 MHz,
2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz MHz



Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

1.0 CONDUCTED EMISSION MEASUREMENTS

Conducted emissions were measured over the frequency range from 150 kHz to 30 MHz in accordance with the power line measurements as specified in FCC Part 15, Subpart C, Section 15.207 & ANSI C63.4-2003. Since the device is operated from the public utility lines, the 120 Vac, 60 Hz power leads, high (hot) and low (neutral) sides, were measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. During the test, the cables were placed and items moved (when appropriate) to maximize emissions. All signals were then recorded. The allowed levels for Intentional Radiators which is designed to be connected to the public utility (AC) power line shall not exceed 250 uV (47.96 dBuV) from 150 kHz to 30 MHz

NOTE:

The conducted emissions test was not required because the Indoor Cycle is powered from a D.C. power source. It does not have a line cord to plug into the A.C. power line.



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

2.0 RESTRICTED BAND COMPLIANCE

The field strength of any emissions appearing outside the 902 to 928 MHz band shall not exceed the general radiated emissions limits as stated Section 15.209. The fundamental from the Indoor Cycle transmitter shall not be inside the restricted band 960 to 1240 MHz.

As stated in Section 15.205a, the fundamental emission from the Indoor Cycle shall not fall within any of the bands listed below:

Frequency in MHz	Frequency in MHz	Frequency in MHz	Frequency in GHz
.0900 to .1100	162.0125 to 167.17	2310.0 to 2390	9.30 to 9.50
.4900 to .5100	167.7200 to 173.20	2483.5 to 2500	10.60 to 12.70
2.1735 to 2.1905	240.000 to 285.00	2655.0 to 2900	13.25 to 13.40
8.362 to 8.3660	322.200 to 335.40	3260.0 to 3267	14.47 to 14.50
13.36 to 13.410	399.900 to 410.00	3332.0 to 3339	15.35 to 16.20
25.50 to 25.670	608.000 to 614.00	3345.8 to 3358	17.70 to 21.40
37.50 to 38.250	960.000 to 1240.00	3600.0 to 4400	22.01 to 23.13
73.00 to 75.500	1300.000 to 1427.00	4500.0 to 5250	23.60 to 24.00
108.00 to 121.94	1435.000 to 1626.50	5350.0 to 5450	31.20 to 31.80
123.00 to 138.00	1660.000 to 1710.00	7250.0 to 7750	36.43 to 36.50
149.90 to 150.00	1718.800 to 1722.20	8025.0 to 8500	ABOVE 38.60
156.70 to 156.90	2200.000 to 2300.00	9000.0 to 9200	

NOTE:

The noise floor within the Restricted Bands for the EMC Receiver and HP Spectrum Analyzer will typically lay 20 dB below the limit.

See the following page(s) for the data taken to show compliance for Restricted Band: Also see the table of measurements made for the Fundamental and Spurious emissions in paragraph 3 of this section.



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

DATA AND GRAPH(S) TAKEN SHOWING THE
RESTRICTED BAND COMPLIANCE

PART 15.249



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Restricted Band Emissions – 30 MHz to 25 GHz
Tested at a 3 Meter Distance (30 MHz to 10 GHz)
Tested at a 1 Meter Distance (10 GHz to 25 GHz)

EUT: Pro 300PT Hub Transmitter
Manufacturer: Saris Cycling Group
Operating Condition: 70 deg F; 39% R.H.
Test Site: Site 2
Operator: Craig Brandt
Test Specification: FCC Part 15.249, Part 15.205 and Part 15.209
Comment: Continuous Transmit
Date: 04/02/2007

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the FCC Part 15.209 limits
 (3) No emissions where found at the upper and lower band-edges

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
4914	Max Peak	Vert	60.73	33.01	-35.3	58.5	NA	58.5	74 (Peak)	15.5	1.1	225	Res. Band
4914	Max Peak	Vert	60.73	33.01	-35.3	58.5	-20	38.5	54 (Avg)	15.5	1.1	225	Res. Band
4914	Max Peak	Horz	60.99	33.01	-35.3	58.7	NA	58.7	74 (Peak)	15.3	1.1	270	Res. Band
4914	Max Peak	Horz	60.99	33.01	-35.3	58.7	-20	38.7	54 (Avg)	15.3	1.1	270	Res. Band



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (SECTION 15.249a-d)

The radiated measurements made at D.L.S. Electronic Systems, Inc., for the Indoor Cycle, Model Number: Pro 300PT, are shown in tabulated and graph form. Preliminary radiation measurements were performed at a 3 meter test distance with the limits adjusted linearly when required. The frequency range from 30 MHz to over 960 MHz, depending upon the fundamental frequency as stated in Part 15.33a, was automatically scanned and plotted at various angles.

Measurements for the Indoor Cycle were made up to 25000 MHz, in accordance with Section 15.33a for Intentional Radiators with a fundamental frequency of 2457 MHz. For intentional radiators, the frequency range to be investigated is determined by the lowest radio frequency generated by the device without going below 30 MHz, up to at least the tenth harmonic of the highest fundamental frequency or 10 GHz, whichever is lower. At those frequencies where significant signals were detected, measurements were made over the entire frequency range specified in FCC Part 15, Subpart C, Section 15.249 at the open field test site, located at Genoa City, Wisconsin, FCC file number **31040/SIT**. When required, levels were extrapolated from 10 meters to 3 meters using a linear extrapolation.

All signals in the frequency range of 30 MHz to 2000 MHz were measured with a Biconical Antenna or tuned dipoles and from 200 MHz to 1000 MHz, a Log Periodic or Tuned Dipoles were used. From 1000 MHz to 10 GHz Horn Antennas were used. During the test the equipment was rotated and the antenna was raised and lowered from 1 meter to 4 meters to find the maximum level of emissions. In order to find maximum emissions, the cables were moved through all the positions the equipment would be expected to experience in the field. The EUT, peripheral equipment and cables were configured to meet the conditions in ANSI C63.4-2003, Clauses 6 & 8. Tests were made with the receive antenna(s) in both the horizontal and vertical planes of polarization. In each case, the table was rotated to find the maximum emissions.



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

APPENDIX A

3.0 FIELD STRENGTH OF SPURIOUS EMISSION MEASUREMENTS (CON'T)

For operation in the bands 902 to 928 MHz, 2400 to 2483.5 MHz, 5725 to 5875 MHz, and 24.0 to 24.25 GHz the field strength of any emissions within this band shall not exceed the field strength levels specified in the following table as stated in FCC, Part 15, Section 15.249(a).

Frequency range in MHz	Field Strength of Fundamental millivolts/meter	Field Strength of Fundamental dBuV/meter	Field Strength of Harmonics microvolts/meter	Field Strength of Harmonics dBuV/meter
902 to 928	50	93.98	500	53.98
2400 to 2483.5	50	93.98	500	53.98
5725 to 5875	50	93.98	500	53.98
24000 to 24250	250	107.96	2500	67.96

Field strength limits are at a distance of 3 meters. The emission limits shown are based on measurement instrumentation employing an average detector.

Emissions radiated outside of the specified frequency bands, except for harmonics are attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Preliminary radiated emission measurements were performed at a 3 meter test distance. The frequency range from 30 MHz to 1000 MHz was automatically scanned and plotted at various angles.

NOTE:

All radiated emissions measurements were made at a test room temperature of **70°F** at **39%** relative humidity.



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

RADIATED DATA AND GRAPH(S) TAKEN FOR
FUNDAMENTAL EMISSION MEASUREMENTS

PART 15.249



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Radiated Fundamental Emissions – 30 MHz to 25 GHz
Tested at a 3 Meter Distance (30 MHz to 10 GHz)
Tested at a 1 Meter Distance (10 GHz to 25 GHz)

EUT: Pro 300PT Hub Transmitter
Manufacturer: Saris Cycling Group
Operating Condition: 70 deg F; 39% R.H.
Test Site: Site 2
Operator: Craig Brandt
Test Specification: FCC Part 15.249, Part 15.205 and Part 15.209
Comment: Continuous Transmit
Date: 04/02/2007

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the FCC Part 15.209 limits
 (3) No emissions were found at the upper and lower band-edges

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	UT Angle (deg)	Comment
2457	Max Peak	Vert	65.61	28.29	2.3	96.2	NA	96.2	113.98 (Peak)	17.78	1.2	225	Fundamental
2457	Max Peak	Vert	65.61	28.29	2.3	96.2	-20	76.2	93.98 (Avg)	17.78	1.2	225	Fundamental
2457	Max Peak	Horz	69.39	28.29	2.3	100.0	NA	100.0	113.98 (Peak)	13.98	1.3	315	Fundamental
2457	Max Peak	Horz	69.39	28.29	2.3	100.0	-20	80.0	93.98 (Avg)	13.98	1.3	315	Fundamental



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

RADIATED DATA AND GRAPH(S) TAKEN FOR
FIELD STRENGTH
SPURIOUS EMISSION MEASUREMENTS
PART 15.209



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Radiated Spurious Emissions – 30 MHz to 25 GHz
Tested at a 3 Meter Distance (30 MHz to 10 GHz)
Tested at a 1 Meter Distance (10 GHz to 25 GHz)

EUT: Pro 300PT Hub Transmitter
Manufacturer: Saris Cycling Group
Operating Condition: 70 deg F; 39% R.H.
Test Site: Site 2
Operator: Craig Brandt
Test Specification: FCC Part 15.249, Part 15.205 and Part 15.209
Comment: Continuous Transmit
Date: 04/02/2007

- Notes:** (1) The EUT was measured in 3 orthogonal axis and placed in the worst case axis for the following measurements.
 (2) All other emissions at least 20 dB under the FCC Part 15.209 limits
 (3) No emissions were found at the upper and lower band-edges

Frequency (MHz)	Measurement Detector	Ant. Pol.	Level (dBuV)	Antenna Factor (dB/m)	System Loss (dB)	Total Level (dBuV/m)	Duty Cycle Correction (dB)	Final Corrected (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Ant. Height (m)	EUT Angle (deg)	Comment
7371	Max Peak	Vert	53.74	36.21	-32.5	57.4	NA	57.4	74 (Peak)	16.6	1.1	190	Harmonic
7371	Max Peak	Vert	53.74	36.21	-32.5	57.4	-20	37.4	54 (Avg)	16.6	1.1	190	Harmonic
7371	Max Peak	Horz	53.34	36.21	-32.5	57.0	NA	57.0	74 (Peak)	17.0	2.2	270	Harmonic
7371	Max Peak	Horz	53.34	36.21	-32.5	57.0	-20	37.0	54 (Avg)	17.0	2.2	270	Harmonic
9828	Max Peak	Vert	52.08	38.16	-33.4	56.9	NA	56.9	74 (Peak)	17.1	1.0	315	Harmonic
9828	Max Peak	Vert	52.08	38.16	-33.4	56.9	-20	36.9	54 (Avg)	17.1	1.0	315	Harmonic
9828	Max Peak	Horz	52.80	38.16	-33.4	57.6	NA	57.6	74 (Peak)	16.4	1.1	270	Harmonic
9828	Max Peak	Horz	52.80	38.16	-33.4	57.6	-20	37.6	54 (Avg)	16.4	1.1	270	Harmonic



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

20 dB Bandwidth (FCC Part 15.249)

To Show in Band Operation




Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 06-12-2006
 Company: Saris Cycling Group
 EUT: Power Tap SL2.4 Hub Transmitter
 Test: 20 dB Bandwidth (FCC Part 15.249) To Show in Band Operation
 Operator: Jason Lauer
 Comment: Frequency – 2.457 GHz

20 dB Bandwidth = 69.34 kHz

	Delta 1 [T2]	RBW	3 kHz	RF Att	10 dB
	Ref Lvl	0.13 dB	VBW	10 kHz	
	92 dB*	69.33867736 kHz	SWT	50 ms	Unit dBµV/m

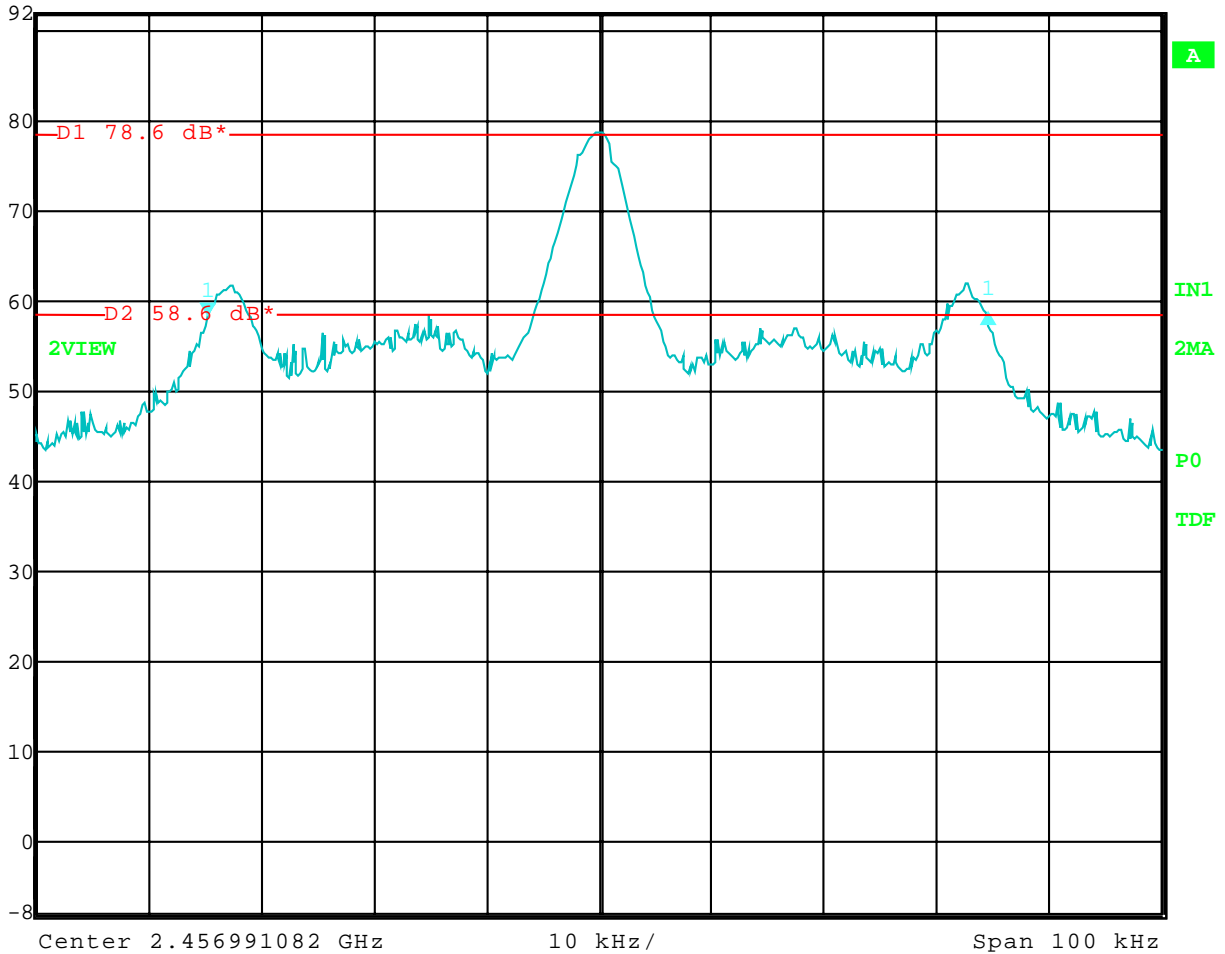

Date: 12.JUN.2006 13:09:58



1250 Peterson Dr., Wheeling, IL 60090

Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

DUTY CYCLE CORRECTION FACTOR


(FCC Part 15.35)



Company: Saris Cycling Group Inc
 Model Tested: Pro 300PT
 Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 06-12-2006
 Company: Saris Cycling Group
 EUT: Power Tap SL2.4 Hub Transmitter
 Test: Duty Cycle (FCC Part 15.35)
 Operator: Jason Lauer
 Comment: 10 ms sweep
 Comment: Total ON Time during 100 ms = 0.2405 ms
 $20 \log (0.2405\text{ms} / 100\text{ms}) = (52.38 \text{ dB}) > 20 \text{ dB Limit}$
Duty cycle correction factor = 20 dB

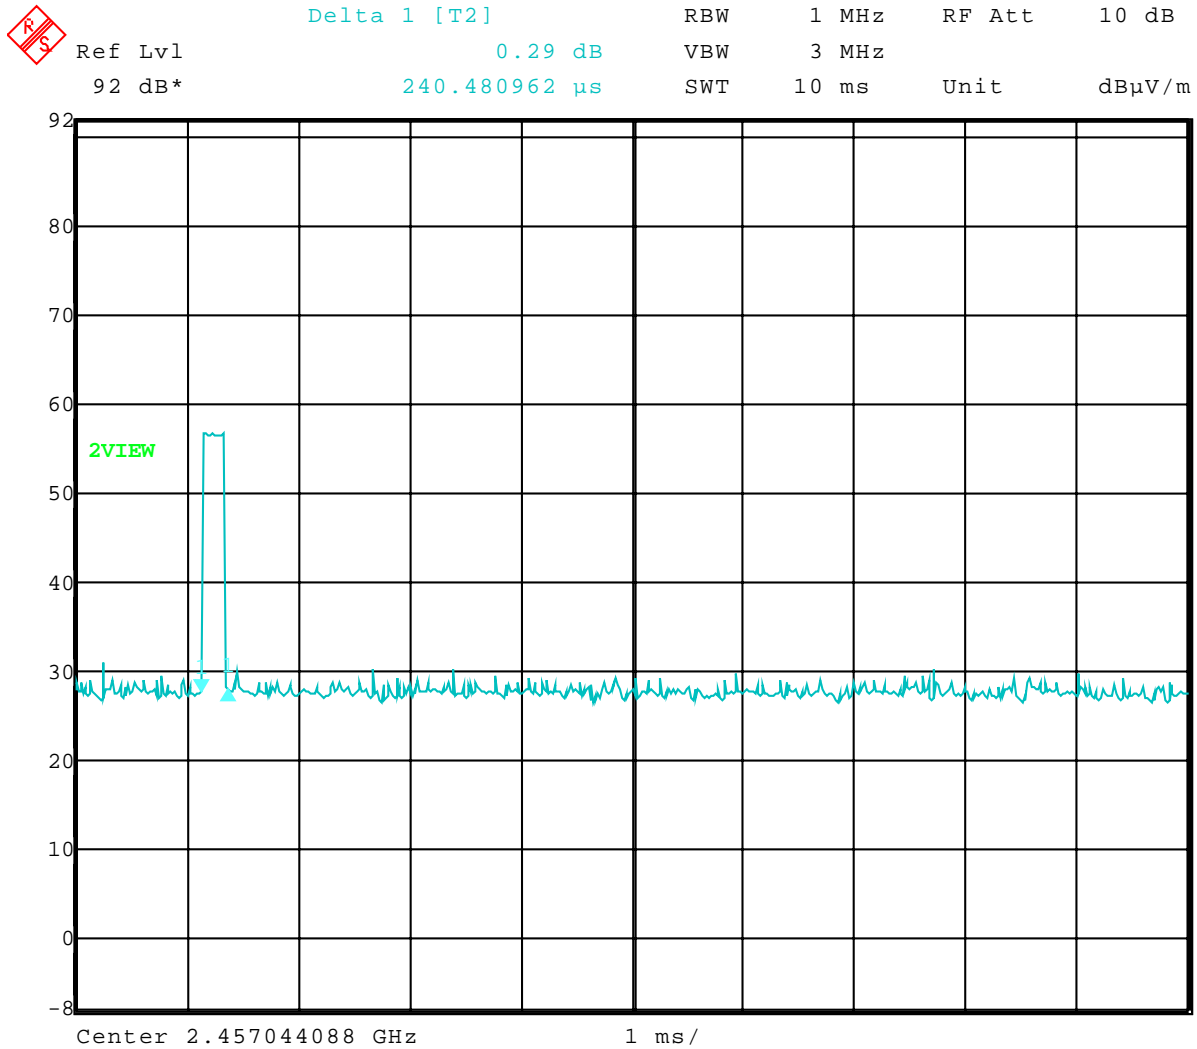

Date: 12.JUN.2006 11:55:28




Company: Saris Cycling Group Inc
Model Tested: Pro 300PT
Report Number: 13107

1250 Peterson Dr., Wheeling, IL 60090

Test Date: 06-12-2006
Company: Saris Cycling Group
EUT: Power Tap SL2.4 Hub Transmitter
Test: Duty Cycle
Operator: Jason Lauer
Comment: 100 ms sweep



Ref Lvl	RBW	1 MHz	RF Att	10 dB
92 dB*	VBW	3 MHz	Unit	dB μ V/m
	SWT	100 ms		

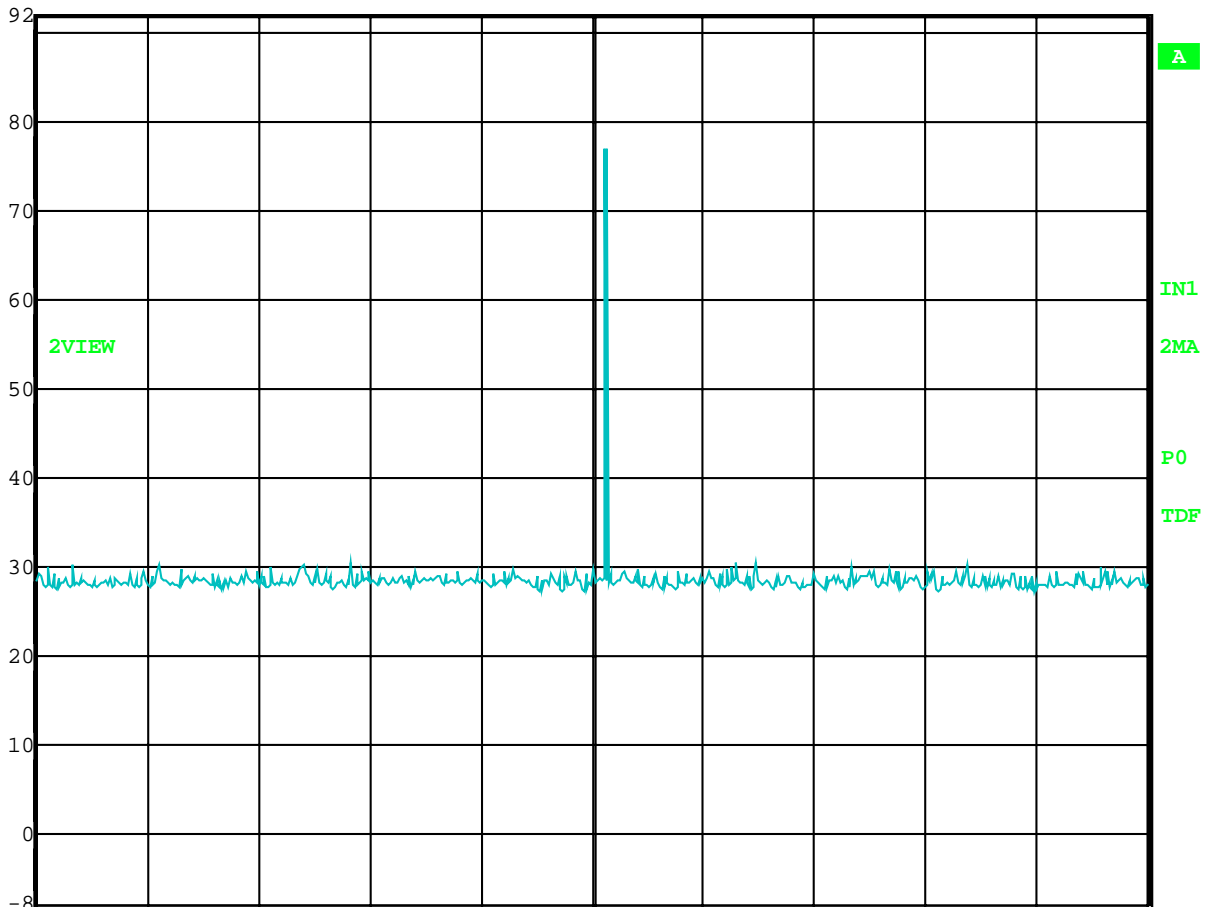

Center 2.457044088 GHz 10 ms/

Date: 12.JUN.2006 12:55:16