

**FCC PART 15 SUBPART C TEST REPORT**

**for**

**Class 1 Bluetooth Module**

**Model No.: RN-41**

**FCC ID: T9JRN41-3**

**of**

**Applicant: Microchip Technology Inc.**

**Address: 2355 West Chandler Blvd. Chandler, Arizona,  
United States 85224-6199**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6R21301-13005-C-1**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877      FAX: 886-2-66068879      E-mail: [wts@wts-lab.com](mailto:wts@wts-lab.com)



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**TABLE OF CONTENTS**

1 GENERAL INFORMATION ..... 2

1.1 Notes ..... 2

1.2 Testing laboratory ..... 3

    1.2.1 Location ..... 3

    1.2.2 Details of accreditation status ..... 3

1.3 Details of approval holder ..... 3

1.4 Application details ..... 4

1.5 General information of Test item..... 4

1.6 Test standards ..... 5

2 TECHNICAL TEST ..... 6

2.1 Summary of test results ..... 6

2.2 Test environment ..... 6

2.3 Test Equipment List ..... 7

2.4 General Test Procedure ..... 9

3 TEST RESULTS (ENCLOSURE) ..... 11

3.1 Peak Output Power (transmitter) ..... 12

3.2 RF Exposure Compliance Requirements ..... 16

3.3 Out of Band Radiated Emissions ..... 16

3.4 Transmitter Radiated Emissions in restricted Bands ..... 17

3.5 Spurious emissions (tx) ..... 18

3.6 Carrier Frequency Separation ..... 21

3.7 Number of Hopping Frequencies..... 24

    3.7.1 Pseudorandom Frequency Hopping Sequence ..... 26

    3.7.2 Coordination of hopping sequences to other transmitters..... 26

    3.7.3 System Receiver Hopping Capability ..... 26

3.8 Time of Occupancy (Dwell Time)..... 27

3.9 20dB Bandwidth ..... 33

    3.9.1 System Receiver Input Bandwidth..... 36

3.10 Band-edge Compliance of RF Emissions ..... 37

3.11 Radiated Emissions from Receiver Part ..... 42

3.12 Power Line Conducted Emission..... 45



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**1 General Information**

**1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems. The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

**Tester:**

March 29, 2013

Leon Chueh

Date

WTS-Lab.

Name

Signature

**Technical responsibility for area of testing:**

March 29, 2013

Danny Sung

Date

WTS

Name

Signature



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## 1.2 Testing laboratory

### 1.2.1 Location

OATS

No.5-1, Lishui, Shuang Sing Village,  
Wanli Dist., New Taipei City 207,  
Taiwan (R.O.C.)

3 meter semi-anechoic chamber

No.35, Aly. 21, Ln. 228, Ankang Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

TEL:886-2-6613-0228

FAX:886-2-2791-5046

Company

Worldwide Testing Services(Taiwan) Co., Ltd.

6F, NO. 58, LANE 188, RUEY-KUANG RD.

NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

### 1.2.2 Details of accreditation status

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.

Accredited number: ./.

Street: ./.

Town: ./.

Country: ./.

Telephone: ./.

Fax: ./.

## 1.3 Details of approval holder

Name: Microchip Technology Inc.

Street: 2355 West Chandler Blvd.

Town: Chandler, Arizona,

Country: United States 85224-6199

Telephone: (480) 792-7200

Fax: (480) 899-9210



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

#### **1.4 Application details**

Date of receipt of test item: February 06, 2013  
Date of test: from February 07, 2013 to March 29, 2013

#### **1.5 General information of Test item**

Type of test item: Class 1 Bluetooth Module  
Model Number: RN-41  
Brand Name: Microchip  
Multi-listing model number: ./.  
Photos: see Annex

#### **Technical data**

Frequency band: 2402 - 2480 MHz  
Frequency ( ch A): 2.402 GHz  
Frequency ( ch B): 2.441 GHz  
Frequency ( ch C): 2.480 GHz

#### **Transmitter**

#### **Unom**

##### Normal Mode

Power ( ch 0 or A): Conducted: 16.30 dBm  
Power ( ch 39 or B): Conducted: 17.02 dBm  
Power ( ch 78 or C): Conducted :18.37 dBm

##### EDR Mode

Power ( ch 0 or A): Conducted: 13.50 dBm  
Power ( ch 39 or B): Conducted: 14.05 dBm  
Power ( ch 78 or C): Conducted: 14.94 dBm

Power supply: 3.3VDC (regulated down from 1.5VDC\*3 power source on the testing peripheral board)

Operation modes: duplex

Modulation Type: GFSK、 $\pi/4$ DQPSK、8DPSK

Antenna Type: Chip antenna

Antenna gain: 4.1 dBi



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

Host device: none

Classification:

Fixed Device	<input type="checkbox"/>
Mobile Device (Human Body distance > 20cm)	<input type="checkbox"/>
Portable Device (Human Body distance < 20cm)	<input type="checkbox"/>
Modular Radio Device	<input checked="" type="checkbox"/>

## **Manufacturer: (if applicable)**

Name: ./.

Street: ./.

Town: ./.

Country: ./.

Additional information: ./.

## **1.6 Test standards**

Technical standard : FCC RULES PART 15 SUBPART C § 15.247 (2011-10)



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**2 Technical test**

**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.

**or**

The deviations as specified in 3 were ascertained in the course of the tests performed.

**2.2 Test environment**

Temperature:	23 °C
Relative humidity content:	20 ... 75 %
Air pressure:	86 ... 103 kPa
Details of power supply:	3.3VDC (regulated down from 1.5VDC*3 power source on the testing peripheral board)
Extreme conditions parameters:	test voltage : -- extreme min : -- V max : -- V



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

## 2.3 Test Equipment List

No.	Test equipment	Type	Serial No.	Manufacturer	Cal. Date	Next Cal. Date
ETSTW-CE 001	EMI TEST RECEIVER	ESHS10	842121/013	R&S	2012/9/5	2013/9/4
ETSTW-CE 003	AC POWER SOURCE	APS-9102	D161137	GW	Function Test	
ETSTW-CE 004	ZWEILEITER-V- NETZNACHBILDUNG TWO-LINE V-NETWORK	ESH3-Z5	840731/011	R&S	2012/12/21	2013/12/20
ETSTW-CE 006	IMPULSBEGRENZER PULSE LIMITER	ESH3-Z2	100226	R&S	2013/3/4	2014/3/3
ETSTW-CE 007	SPECTRUM ANALYZER 5GHz	FSB	849670/001	R&S	Pre-test Use	
ETSTW-CE 008	HF-EICHLEITUNG RF STEP ATTENUATOR 139dB DPSP	334.6010.02	844581/024	R&S	Function Test	
ETSTW-CE 009	TEMP.&HUMIDITY CHAMBER	GTH-225-40-1P-U	MAA0305-009	GIANT FORCE	2012/7/3	2013/7/2
ETSTW-RE 004	EMI TEST RECEIVER	ESI 40	832427/004	R&S	2012/9/5	2013/9/4
ETSTW-RE 005	EMI TEST RECEIVER	ESVS10	843207/020	R&S	2012/9/5	2013/9/4
ETSTW-RE 012	TUNABLE BANDREJECT FILTER	D.C 0309	146	K&L	Function Test	
ETSTW-RE 013	TUNABLE BANDREJECT FILTER	D.C 0336	397	K&L	Function Test	
ETSTW-RE 018	MICROWAVE HORN ANTENNA	AT4560	27212	AR	2012/10/12	2013/10/11
ETSTW-RE 027	Passive Loop Antenna	6512	00034563	ETS-Lindgren	2012/8/01	2013/7/31
ETSTW-RE 030	Double-Ridged Guide Horn Antenna	3117	00035224	EMCO	2013/3/4	2014/3/3
ETSTW-RE 045	ESA-E SERIES SPECTRUM ANALYZER	E4404B	MY45111242	Agilent	Pre-test Use	
ETSTW-RE 049	TRILOG Super Broadband test Antenna	VULB 9160	9160-3185	Schwarzbeck	2013/3/21	2014/3/20
ETSTW-RE 050	Attenuator 10dB	50HF-010-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 051	Attenuator 6dB	50HF-006-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 053	Attenuator 3dB	50HF-003-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 055	SPECTRUM ANALYZER	FSU 26	200074	R&S	2012/5/29	2013/5/28
ETSTW-RE 060	Attenuator 30dB	5015-30	F651012z-01	ATM	2013/3/4	2014/3/3
ETSTW-RE 062	Amplifier Module	CHC 2	None	KMIC	2012/11/28	2013/11/27
ETSTW-RE 064	Bluetooth Test Set	MT8852B-042	6K00005709	Anritsu	Function Test	
ETSTW-RE 069	Double-Ridged Guide Horn Antenna	3117	00069377	EMCO	Function Test	
ETSTW-RE 072	CELL SITE TEST SET	8921A	3339A00375	HP	2012/10/5	2013/10/4
ETSTW-RE 088	SOLID STATE AMPLIFIER	KMA180265A01	99057	KMIC	2012/10/12	2013/10/11
ETSTW-RE 099	DC Block	50DB-007-1	None	JFW	2013/3/4	2014/3/3
ETSTW-RE 106	Humidity Temperature Meter	TES-1366	091011113	TES	2012/12/4	2013/12/3
ETSTW-RE 111	TRILOG Super Broadband test Antenna	VULB 9160	9160-3309	Schwarz beck	2012/12/13	2013/12/12
ETSTW-RE 112	AC POWER SOURCE	TFC-1005	None	T-Power	Function test	
ETSTW-RE 115	2.4GHz Notch Filter	N0124411	473874	MICROWAVE CIRCUITS	2013/1/11	2014/1/10
ETSTW-RE 120	RF Player	MP9200	MP9210-111022	ADIVIC	Function test	





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

ETSTW-RE 122	SIGNAL GENERATOR	SMF100A	102149	R&S	2012/7/3	2013/7/2
ETSTW-RE 125	5GHz Notch filter	5NSL11-5200/E221.3-O/O	1	K&L Microwave	2012/8/18	2013/8/17
ETSTW-RE 126	5GHz Notch filter	5NSL11-5800/E221.3-O/O	1	K&L Microwave	2012/8/18	2013/8/17
ETSTW-RE 127	RF Switch Box	RFS-01	None	WTS	2013/3/4	2014/3/3
ETSTW-GSM 002	Universal Radio Communication Tester	CMU 200	109439	R&S	2012/10/5	2013/10/4
ETSTW-GSM 019	Band Reject Filter	WRCTF824/849-822/851-40 /12+9SS	3	WI	2013/1/11	2014/1/10
ETSTW-GSM 020	Band Reject Filter	WRCD1747/1748-1743/1752-32/5SS	1	WI	2013/1/11	2014/1/10
ETSTW-GSM 021	Band Reject Filter	WRCD1879.5/1880.5-1875.5/1884.5-32/5SS	3	WI	2013/1/11	2014/1/10
ETSTW-GSM 022	Band Reject Filter	WRCT901.9/903.1-904.25-50/8SS	1	WI	2013/1/11	2014/1/10
ETSTW-GSM 023	Power Divider	4901.19.A	None	SUHNER	2012/9/18	2013/9/17
ETSTW-Cable 010	BNC Cable	5 M BNC Cable	None	JYE BAO CO.,LTD.	2013/3/4	2014/3/3
ETSTW-Cable 011	BNC Cable	BNC Cable 1	None	JYE BAO CO.,LTD.	Pre-test Use NCR	
ETSTW-Cable 012	N TYPE To SMA Cable	Cable 012	None	JYE BAO CO.,LTD.	2013/3/4	2014/3/3
ETSTW-Cable 016	BNC Cable	Switch Box	B Cable 1	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 017	BNC Cable	X Cable	B Cable 2	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 018	BNC Cable	Y Cable	B Cable 3	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 019	BNC Cable	Z Cable	B Cable 4	Schwarz beck	2013/3/4	2014/3/3
ETSTW-Cable 022	N TYPE Cable	5006	0002	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
ETSTW-Cable 026	Microwave Cable	SUCOFLEX 104	279075	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 027	Microwave Cable	SUCOFLEX 104	279083	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 028	Microwave Cable	FA147A0015M2020	30064-2	UTIFLEX	2012/10/12	2013/10/11
ETSTW-Cable 029	Microwave Cable	FA147A0015M2020	30064-3	UTIFLEX	2012/10/12	2013/10/11
ETSTW-Cable 030	Microwave Cable	SUCOFLEX 104 (S Cable 9)	279067	HUBER+SUHNER	2013/3/4	2014/3/3
ETSTW-Cable 031	Microwave Cable	SUCOFLEX 104 (S Cable 10)	238092	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 043	Microwave Cable	SUCOFLEX 104	317576	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 047	Microwave Cable	SUCOFLEX 104	325518	HUBER+SUHNER	2012/11/28	2013/11/27
ETSTW-Cable 053	N TYPE To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
ETSTW-Cable 054	BNC To SMA Cable	RG142	None	JYE BAO CO.,LTD.	2013/3/26	2014/3/25
WTSTW-SW 002	EMI TEST SOFTWARE	EZ EMC	None	Farad	Version ETS-03A1	



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2009 5.2 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2009 6.4 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The ambient temperature of the UUT was 23°C with a humidity of 40 %.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

Freq (MHz)      METER READING + ACF + CABLE LOSS (to the receiver) = FS  
33                      20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m

The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2009 6.3.1. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Lishui, Shuang Sing Village, Wanli Dist., New Taipei City 207, Taiwan (R.O.C.). The Registration Number: **930600**.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.



## **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor =  $20 \log (\text{dwell time}/T)$

T = 100ms when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB

ANSI STANDARD C63.4-2009 10.2.7: Any measurements that utilize special test software shall be indicated and referenced in the test report. During testing, test software 'EZ EMC' was used for setting up different operation modes.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

## **3 Test results (enclosure)**

TEST CASE	Para. Number	Required	Test passed	Test failed
Peak Output Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Equivalent radiated Power	15.247(b)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions radiated – Transmitter operating	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Spurious Emissions conducted – Transmitter operating	15.247	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Carrier Frequency Separation	15.247(a) (1)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Number of Hopping Frequencies	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy (Dwell Time)	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
20 dB Bandwidth	15.247(a) (1)(i)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Band-edge Compliance of RF Emission	15.247(c)	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Radiated Emission from Receiver Part	15.109	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Power Line Conducted Emission	15.207(a)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

The follows is intended to leave blank.



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3


## 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.


The power was measured with modulation (declared by the applicant).

### Normal mode

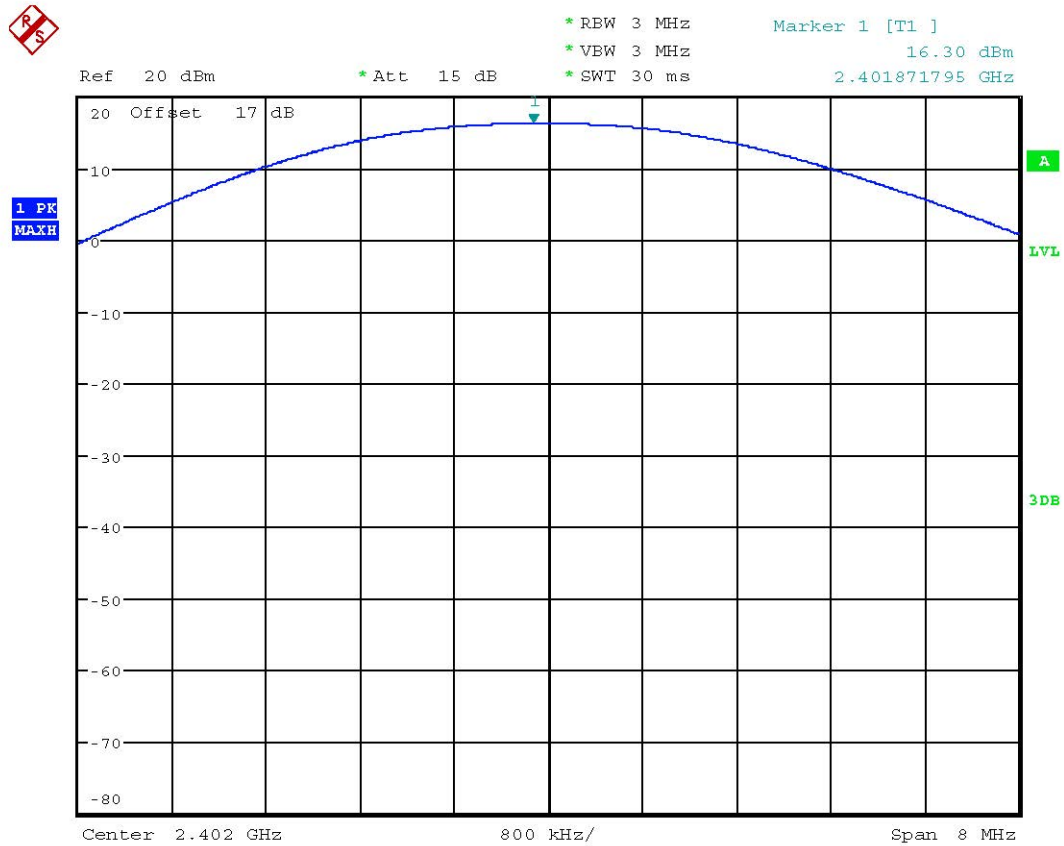


MAX OUTPUT POWER CHO

Date: 29.MAR.2013 16:21:23




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

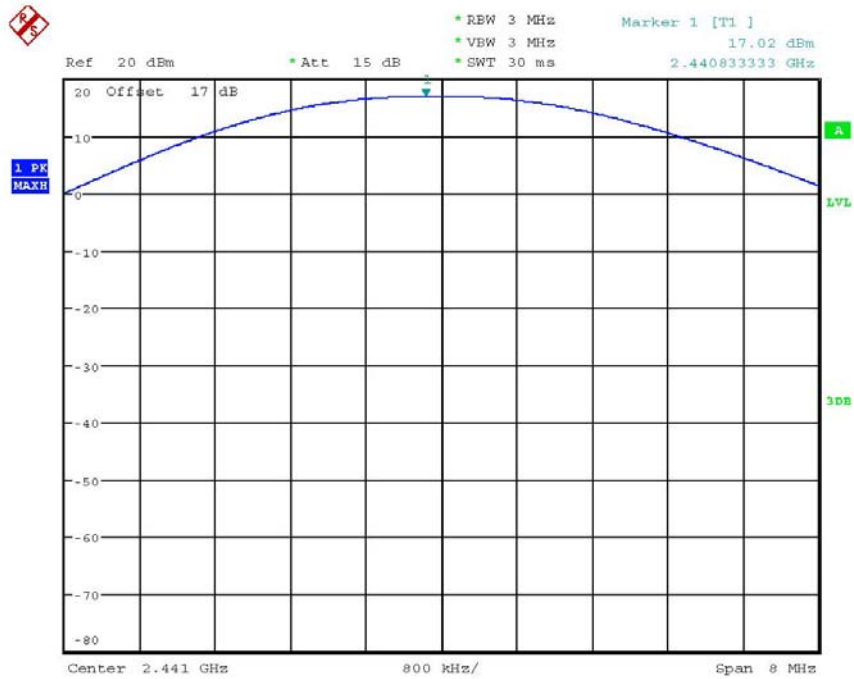

MAX OUTPUT POWER CH39  
Date: 29.MAR.2013 16:21:55

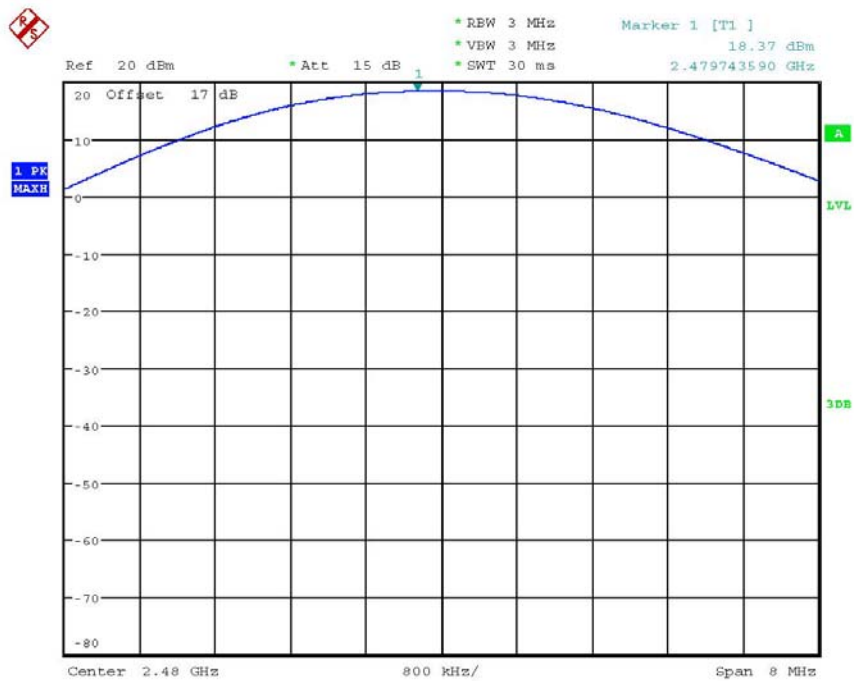

MAX OUTPUT POWER CH78  
Date: 29.MAR.2013 16:22:15




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

**EDR mode**

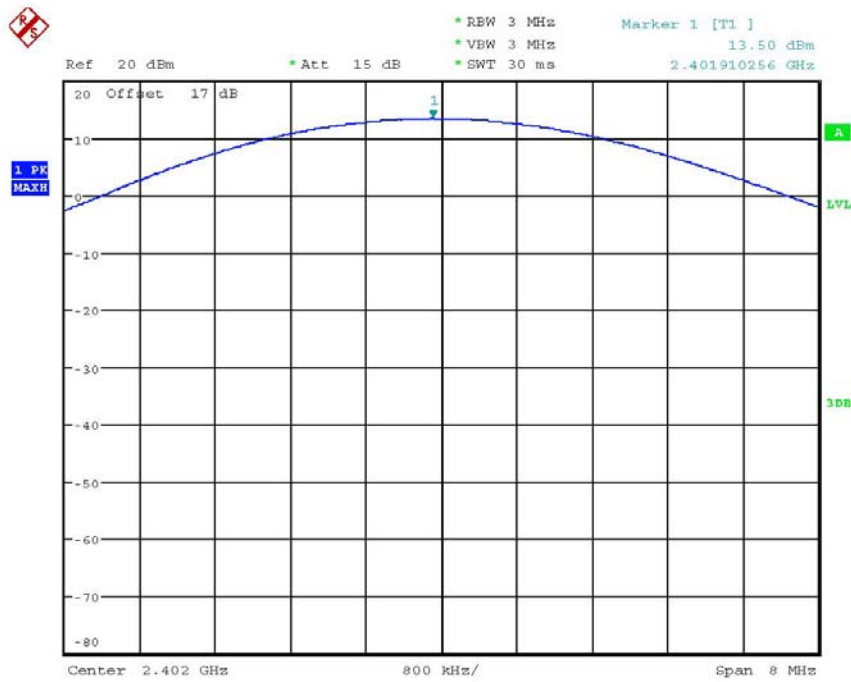


MAX OUTPUT POWER CH0 EDR MODE

Date: 29.MAR.2013 16:27:35

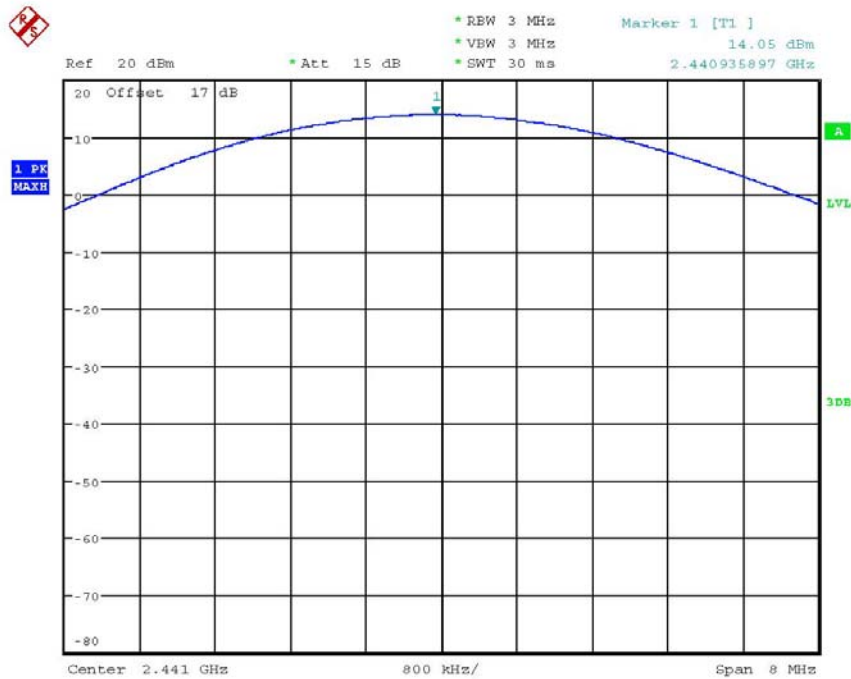


MAX OUTPUT POWER CH39 EDR MODE

Date: 29.MAR.2013 16:28:07



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

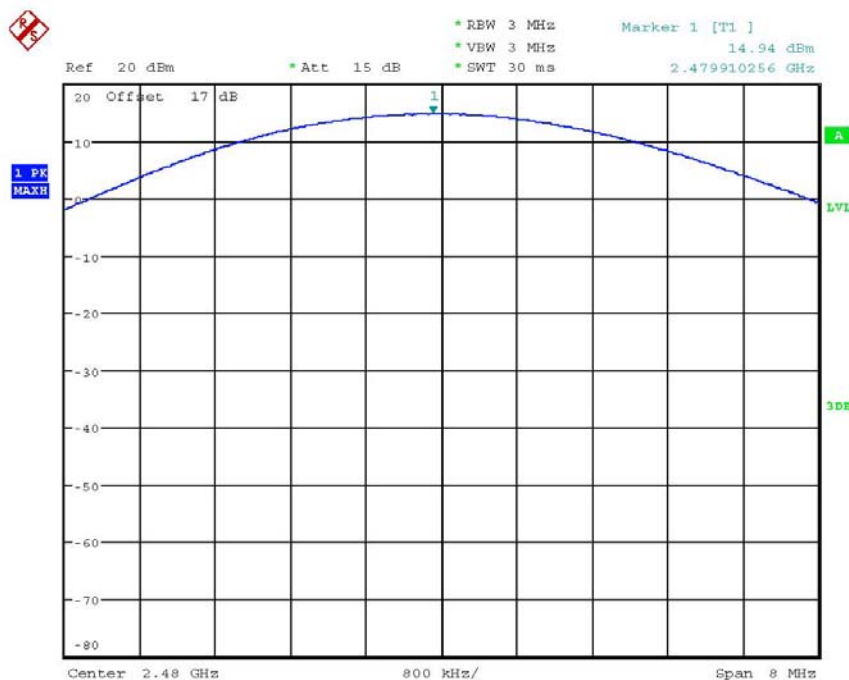

MAX OUTPUT POWER CH78 EDR MODE  
 Date: 29.MAR.2013 16:28:27

## Maximum Peak Output Power


Limits:

Frequency MHz	Number of hopping channels			
	$\geq 75$	$\geq 50$	$49 \geq 25$	$74 \geq 15$
902-928		30 dBm	24 dBm	
2400-2483.5 MHz	30 dBm	-		21 dBm
5725-5850 MHz	30 dBm	-		

In case of employing transmitter antennas having antenna gain >dBi and using fixed point-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 050, ETSTW-RE 064





Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

### **3.2 RF Exposure Compliance Requirements**

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

The antenna used for this Bluetooth transceiver module must not be co-located or operating in conjunction with any other antenna or transmitter.

### **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 111, ETSTW-RE 030, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

Frequency of Emission (MHz)	Field strength (microvolts/meter)	Field Strength (dB microvolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dB $\mu$ V/m

For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB $\mu$ V/m + 20 dB= 74 dB $\mu$ V/m

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 064

Explanation: See attached diagrams in appendix.



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

### 3.5 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.


If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

### Summary table with radiated data of the test plots

Model:	RN-41	Date:	2013/3/29	
Mode:	BT TX 2402MHz	Temperature:	24 °C	Engineer: Vic
Polarization:	Horizontal	Humidity:	60 %	

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
165.2704	3.69	peak	14.82	18.51	43.50	-24.99	220	100
608.6172	3.56	peak	22.69	26.25	46.00	-19.75	205	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1603.2060	62.07	61.30	-8.97	53.10	52.33	74.00	54.00	-1.67	0	100
4804.1040	55.55	48.81	-1.38	54.17	47.43	74.00	54.00	-6.57	174	100
7206.4130	45.12	---	4.16	49.28	---	74.00	54.00	-24.72	135	100
9608.0000	37.39	---	6.44	43.83	---	74.00	54.00	-30.17	110	100
12010.0000	34.18	---	11.23	45.41	---	74.00	54.00	-28.59	265	100



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
38.1162	1.27	peak	13.55	14.82	40.00	-25.18	190	100
611.4228	3.20	peak	22.72	25.92	46.00	-20.08	175	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1602.5050	57.47	54.06	-8.98	48.49	45.08	74.00	54.00	-8.92	359	100
4804.0640	62.05	53.68	-1.38	60.67	52.30	74.00	54.00	-1.70	176	100
7206.4130	45.01	---	4.16	49.17	---	74.00	54.00	-24.83	125	100
9608.7170	40.04	---	6.44	46.48	---	74.00	54.00	-27.52	175	100
12010.0000	32.86	---	11.23	44.09	---	74.00	54.00	-29.91	265	100

Mode: BT TX 2441MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
171.2223	4.10	peak	14.50	18.60	43.50	-24.90	280	100
960.7214	7.21	peak	27.54	34.75	54.00	-19.25	345	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1628.4760	63.77	60.53	-8.76	55.01	51.77	74.00	54.00	-2.23	360	100
4882.4250	53.84	46.30	-1.13	52.71	45.17	74.00	54.00	-8.83	175	100
7323.2860	47.92	39.85	4.38	52.30	44.23	74.00	54.00	-9.77	175	100
9764.0000	34.53	---	6.83	41.36	---	74.00	54.00	-32.64	285	100
12205.0000	33.28	---	12.44	45.72	---	74.00	54.00	-28.28	140	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
37.5752	1.40	peak	13.51	14.91	40.00	-25.09	165	100
960.7214	7.13	peak	27.54	34.67	54.00	-19.33	175	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1629.2580	57.53	---	-8.75	48.78	---	74.00	54.00	-25.22	130	100
4882.5050	62.24	53.60	-1.13	61.11	52.47	74.00	54.00	-1.53	175	100
7326.6530	44.63	---	4.40	49.03	---	74.00	54.00	-24.97	250	100
9764.0000	34.5	---	6.83	41.33	---	74.00	54.00	-32.67	125	100
12205.0000	32.44	---	12.44	44.88	---	74.00	54.00	-29.12	160	100



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

Mode: BT TX 2480MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
164.7295	2.87	peak	14.84	17.71	43.50	-25.79	235	100
988.7776	6.59	peak	27.77	34.36	54.00	-19.64	170	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1655.3110	63.78	60.35	-8.53	55.25	51.82	74.00	54.00	-2.18	290	100
4960.4410	53.57	43.09	-0.83	52.74	42.26	74.00	54.00	-11.74	55	100
7438.8780	43.67	---	4.56	48.23	---	74.00	54.00	-25.77	215	100
9922.8460	40.41	---	7.21	47.62	---	74.00	54.00	-26.38	270	100
12400.0000	31.72	---	12.88	44.60	---	74.00	54.00	-29.40	195	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
169.5992	3.44	peak	14.64	18.08	43.50	-25.42	185	100
612.8257	4.14	peak	22.73	26.87	46.00	-19.13	250	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1653.3070	58.46	---	-8.55	49.91	---	74.00	54.00	-24.09	325	100
4960.4410	61.47	51.45	-0.83	60.64	50.62	74.00	54.00	-3.38	20	100
7440.0000	42.00	---	4.56	46.56	---	74.00	54.00	-27.44	185	100
9922.8460	42.92	---	7.21	50.13	---	74.00	54.00	-23.87	275	100
12400.0000	32.86	---	12.88	45.74	---	74.00	54.00	-28.26	135	100

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. Measurement uncertainty above 1GHz: 30-1000 MHz = ± 3.72 dB, 1-18 GHz = ± 5.56 dB, 18-40 GHz = ± 3.46 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
  6. See attached diagrams in appendix.

All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030, ETSTW-RE 111, ETSTW-RE 064  
 ETSTW-RE 088, ETSTW-RE 018




Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## 3.6 Carrier Frequency Separation


Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

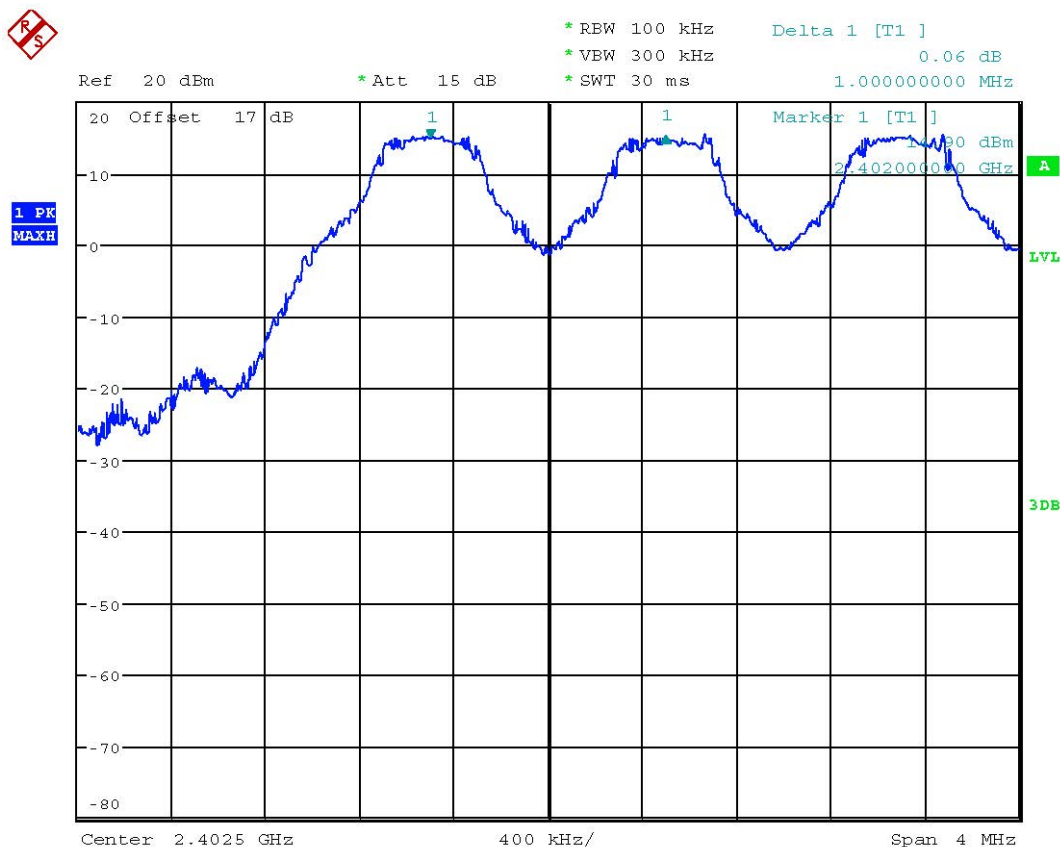


FREQUENCY SEPARATION CHO

Date: 29.MAR.2013 16:25:51




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

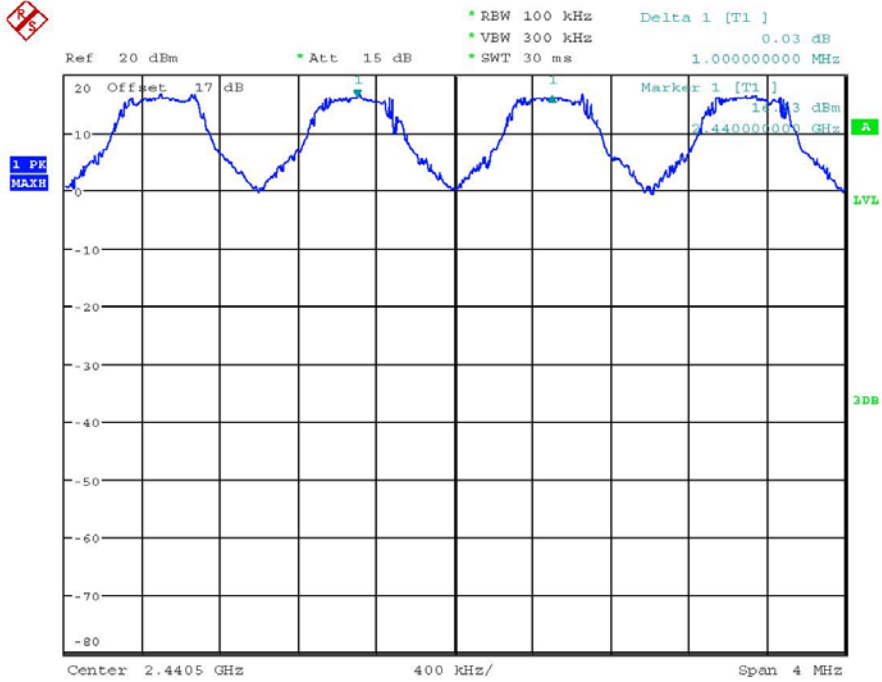


FREQUENCY SEPARATION CH39  
Date: 29.MAR.2013 16:26:35

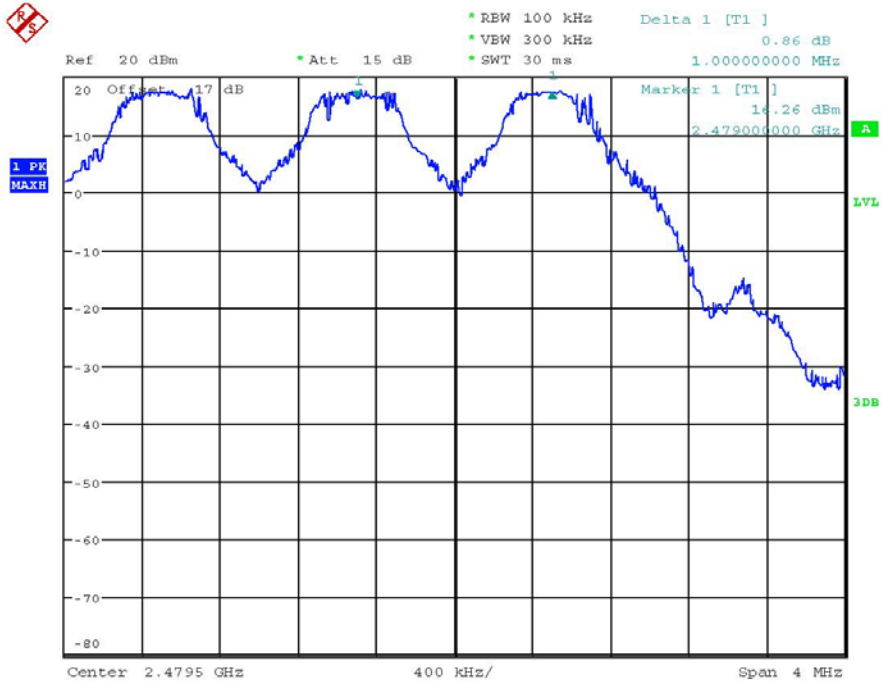

FREQUENCY SEPARATION CH78  
Date: 29.MAR.2013 16:27:23





# **Worldwide Testing Services(Taiwan) Co., Ltd.**


Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## **Limits:**

Frequency Range MHz	Limits	
	20 dB bandwidth < 25 kHz	20 dB bandwidth > 25 kHz
902-928	25 kHz	20 dB bandwidth
2400-2483.5 5725-5850.0	25 kHz	20 dB bandwidth

Test equipment used: ETSTW-RE 055, ETSTW-RE 064






Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

### 3.7 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

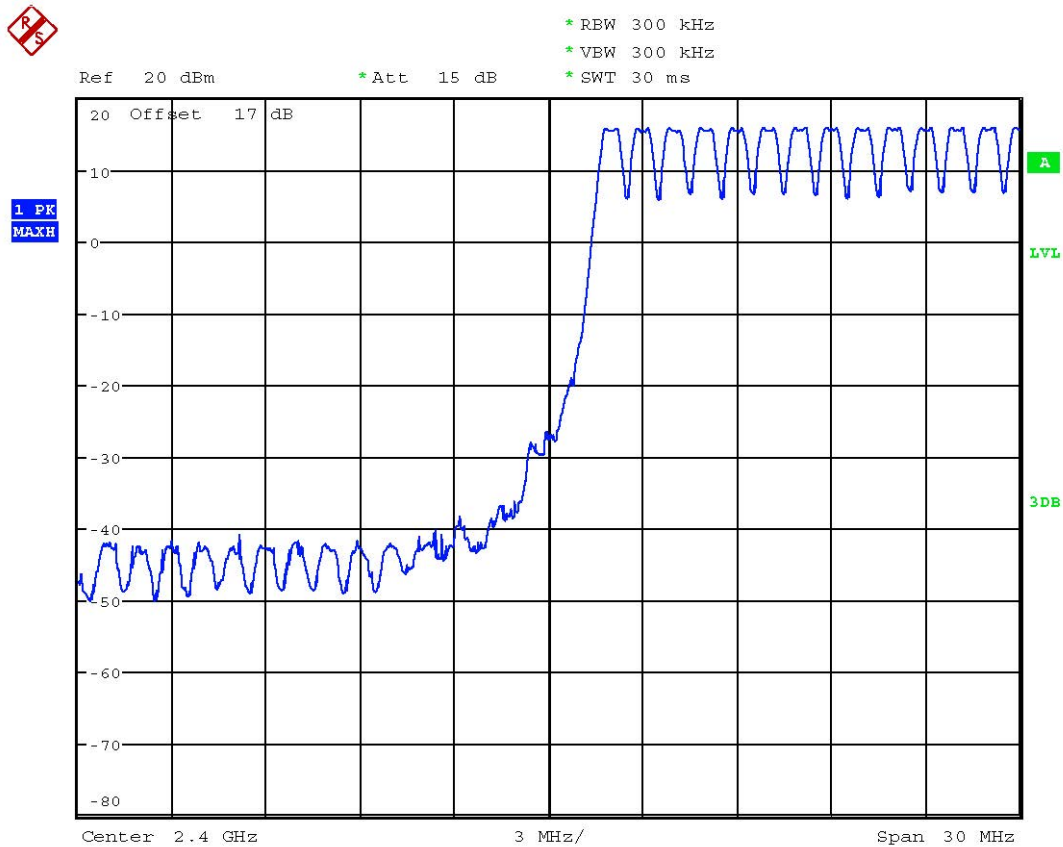


NUMBER OF HOPPING CH0-13  
Date: 29.MAR.2013 16:23:11




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

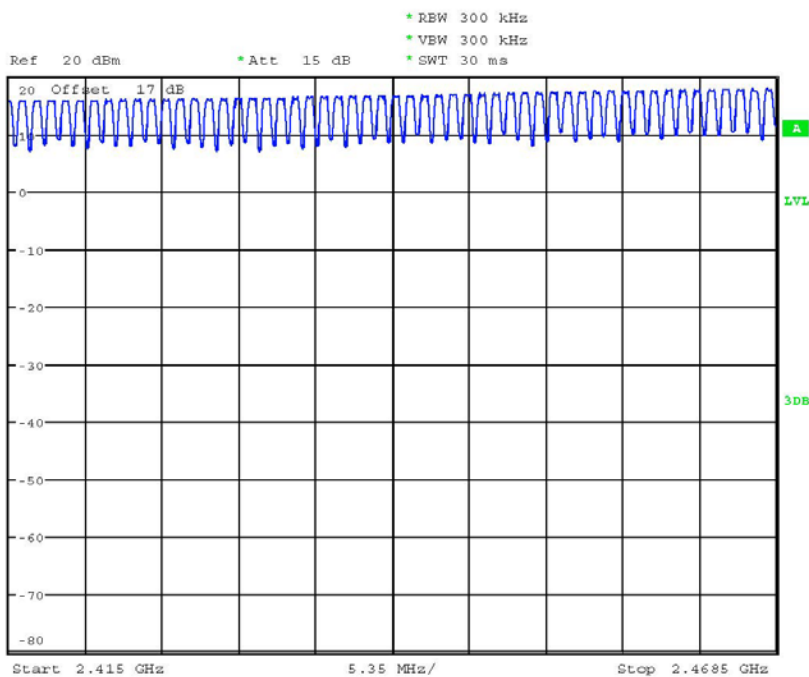

NUMBER OF HOPPING CH14-66  
Date: 29.MAR.2013 16:24:59

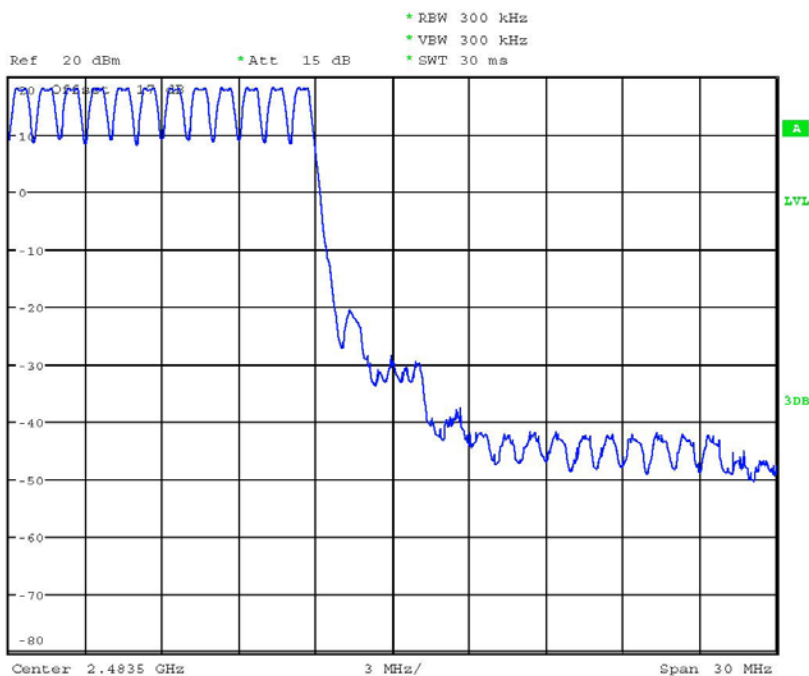

NUMBER OF HOPPING CH67-78  
Date: 29.MAR.2013 16:23:51



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**Limits:**

Frequency Range MHz	Limit	
	20dB Bandwidth	Number of Channels
902-928 MHz	Bandwidth < 250 kHz	≥ 50
	Bandwidth ≥ 250 kHz	≥ 25
2400-2483.5	not defined	15
5725-5850.0 MHz	1 MHz	75

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

**3.7.1 Pseudorandom Frequency Hopping Sequence**

The generation of the hopping sequence is determined by the Bluetooth cord specification and complies with the FCC requirements.

**3.7.2 Coordination of hopping sequences to other transmitters**

According to the Bluetooth core specification such a coordination is not possible. During scatternet function only one of the two hopping sequences will be used at a definite moment.

**3.7.3 System Receiver Hopping Capability**

According to the Bluetooth core specification. The system receivers shift frequencies in synchronization with the transmitted signals.




Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## 3.8 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

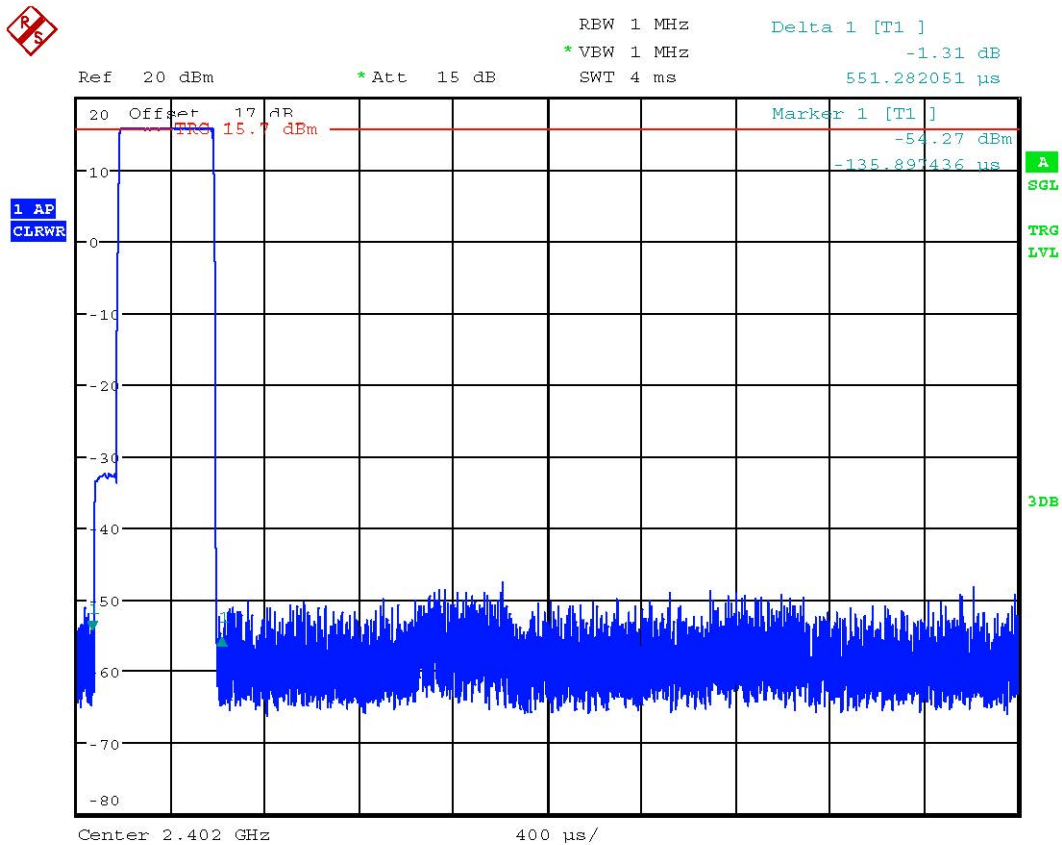


DWELL TIME CH0 DH1 (0.5513ms \* 320event = 176.416ms)

Date: 29.MAR.2013 16:55:04




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

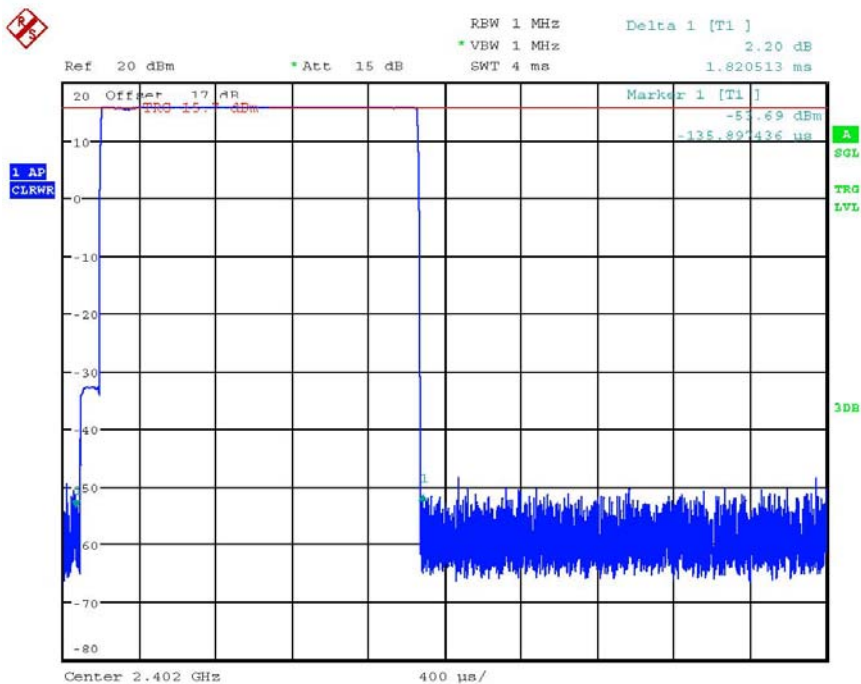

DWELL TIME CH0 DH3 (1.8205ms \* 160event = 291.28ms)  
 Date: 29.MAR.2013 16:58:47

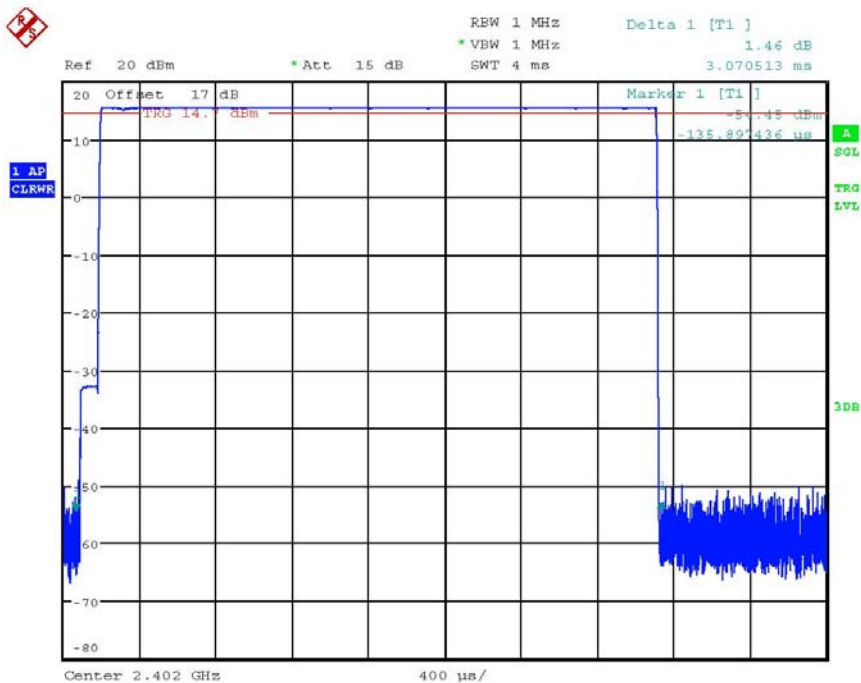


DWELL TIME CH0 DH5 (3.0705ms \* 110event = 337.755ms)  
 Date: 29.MAR.2013 17:00:33




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

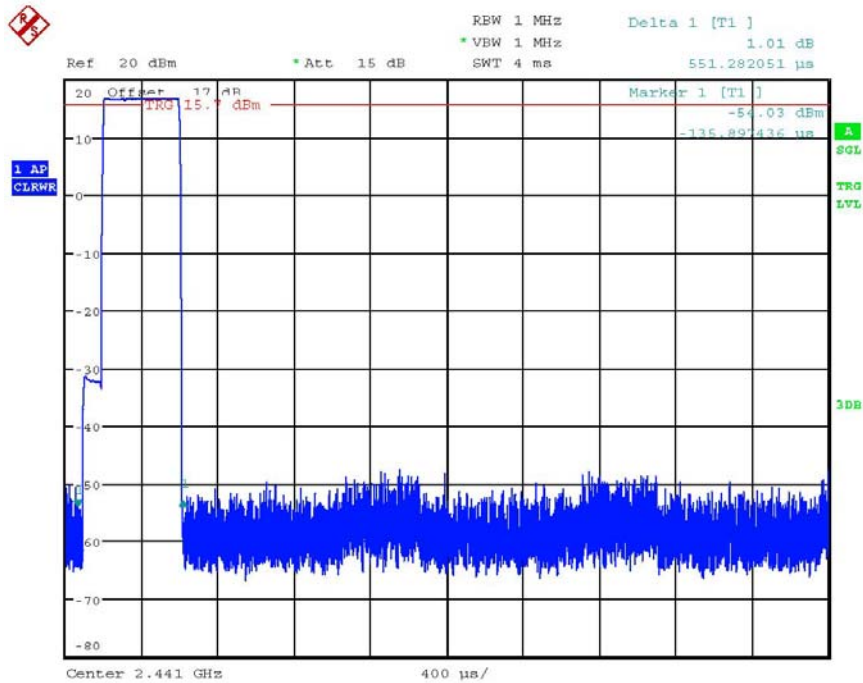

DWELL TIME CH39 DH1 (0.5513ms \* 320event = 176.416ms)  
Date: 29.MAR.2013 16:55:35

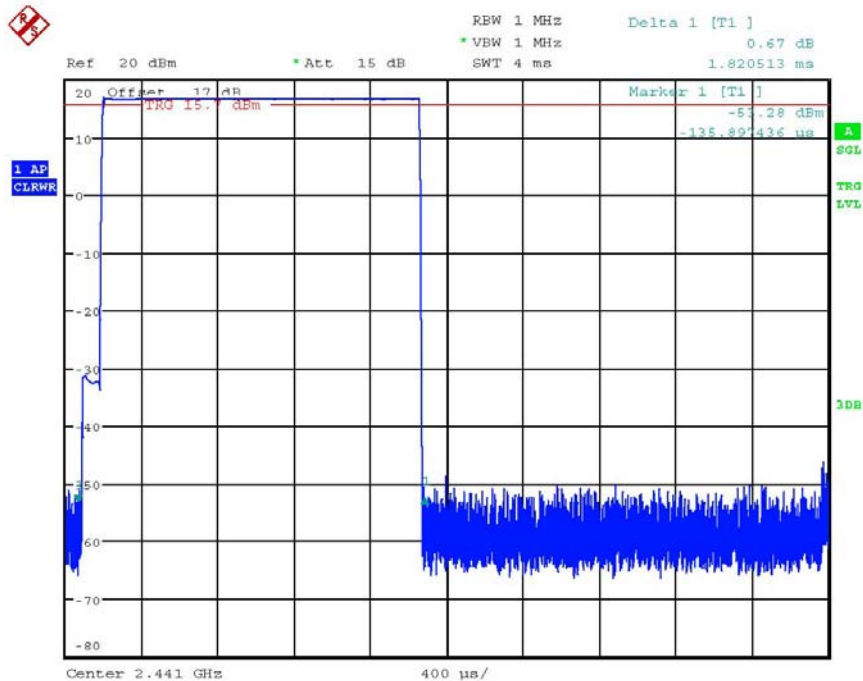


DWELL TIME CH39 DH3 (1.8205ms \* 160event = 291.28ms)  
Date: 29.MAR.2013 16:58:04




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

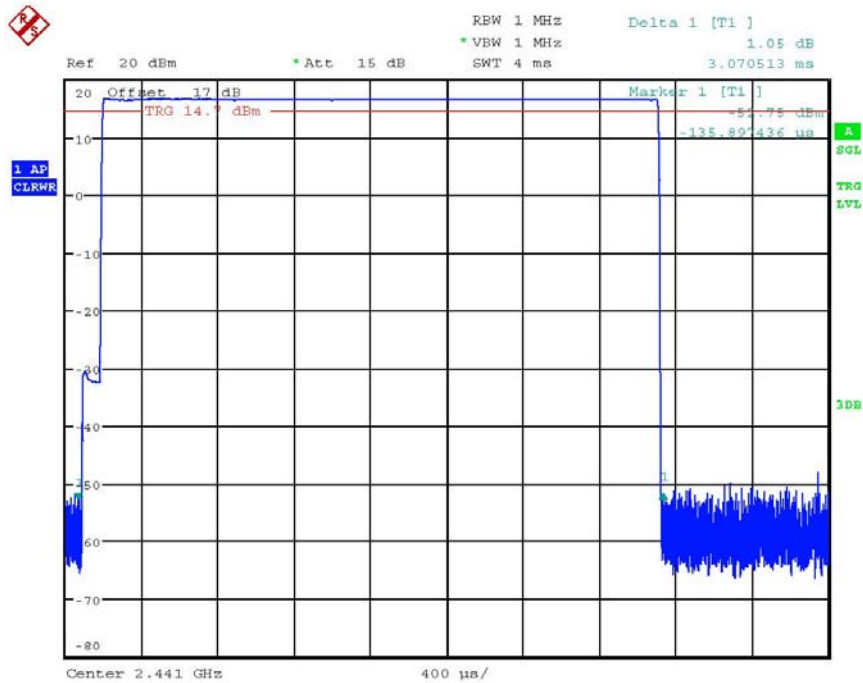


DWELL TIME CH39 DH5 (3.0705ms \* 110event = 337.755ms)  
Date: 29.MAR.2013 17:01:12

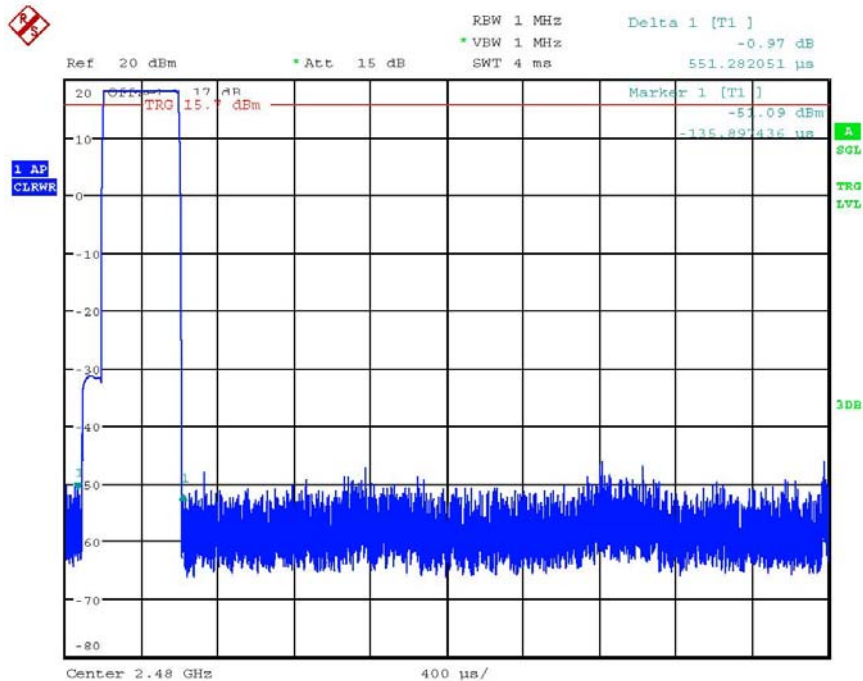


DWELL TIME CH78 DH1 (0.5513ms \* 320event = 176.416ms)  
Date: 29.MAR.2013 16:56:00






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

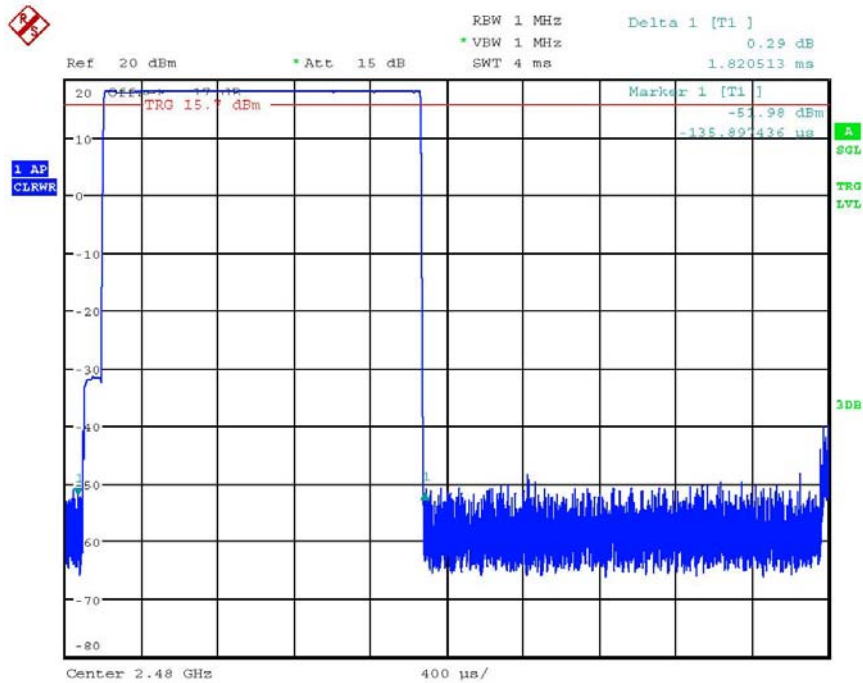

DWELL TIME CH78 DH3 (1.8205ms \* 160event = 291.28ms)  
 Date: 29.MAR.2013 16:57:37

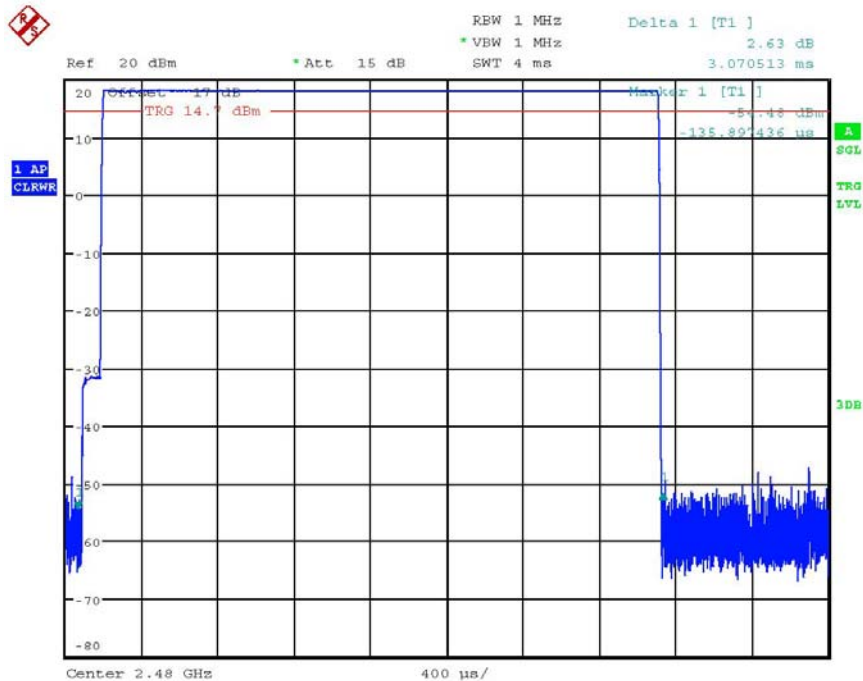

DWELL TIME CH78 DH5 (3.0705ms \* 110event = 337.755ms)  
 Date: 29.MAR.2013 17:01:47





Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

**Limits and measurement periods:**

Frequency MHz	Number of channels	Measurement Periode	Limit
902 – 928	$\geq 50$	20 s	0.4 s
	$49 \geq 25$	10 s	0.4 s
2400 – 2483.5	$\geq 15$	0.4 s * number of used channels	0.4 s
5725- 5850	$\geq 75$	30 s	0.4s

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3


## 3.9 20dB Bandwidth

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

### Normal Mode

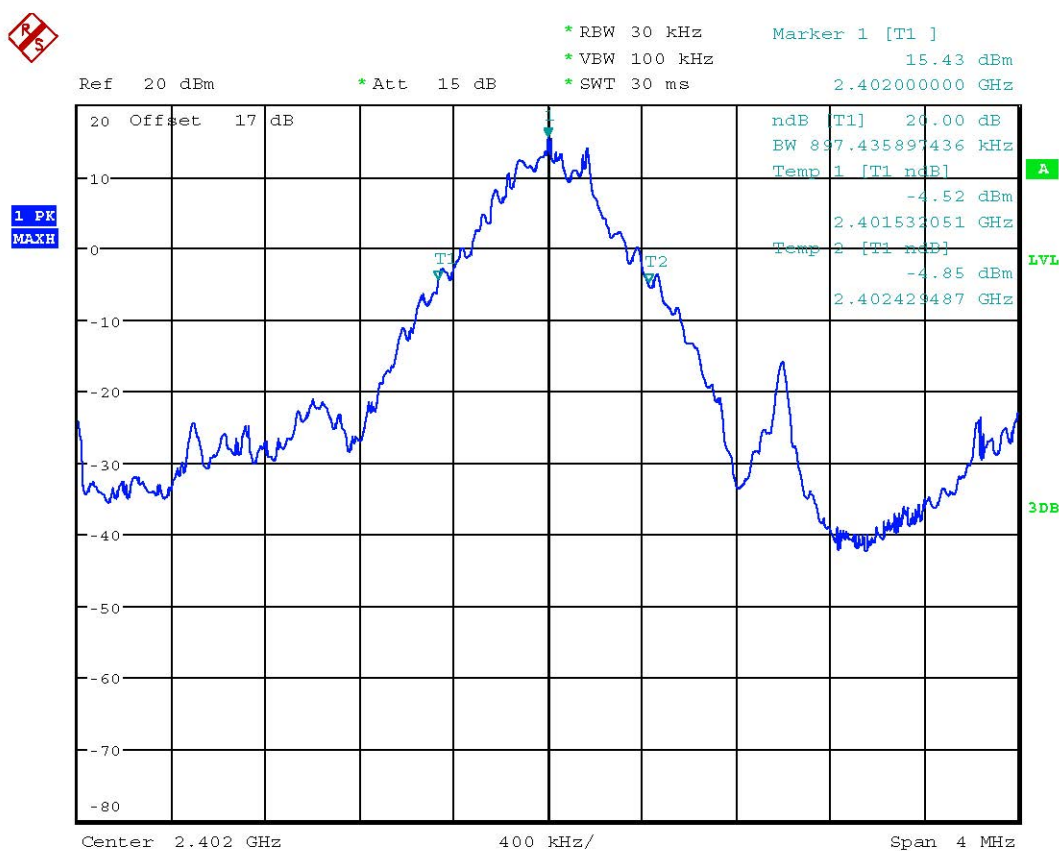


20DB BANDWIDTH CHO

Date: 29.MAR.2013 16:21:31




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

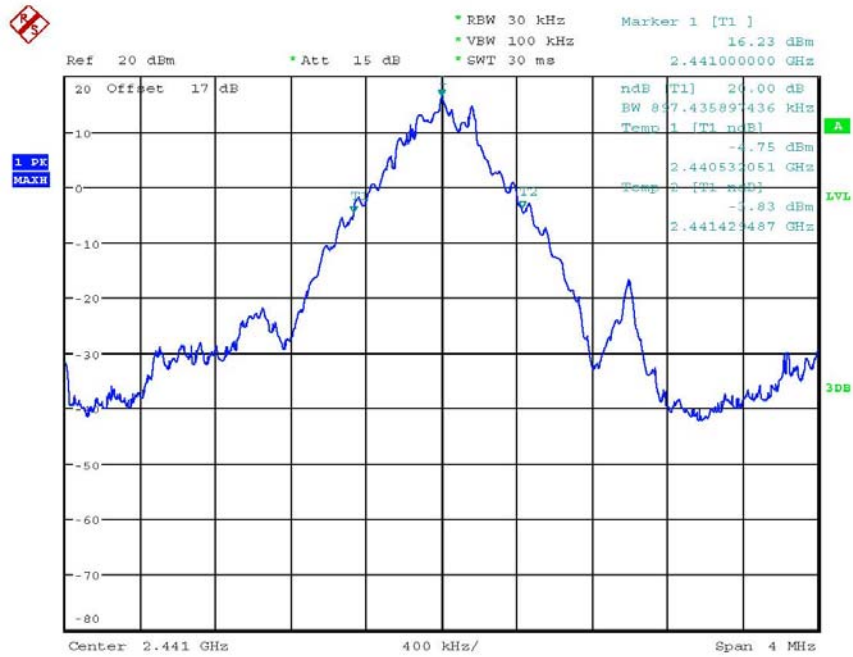

20DB BANDWIDTH CH39  
 Date: 29.MAR.2013 16:22:03

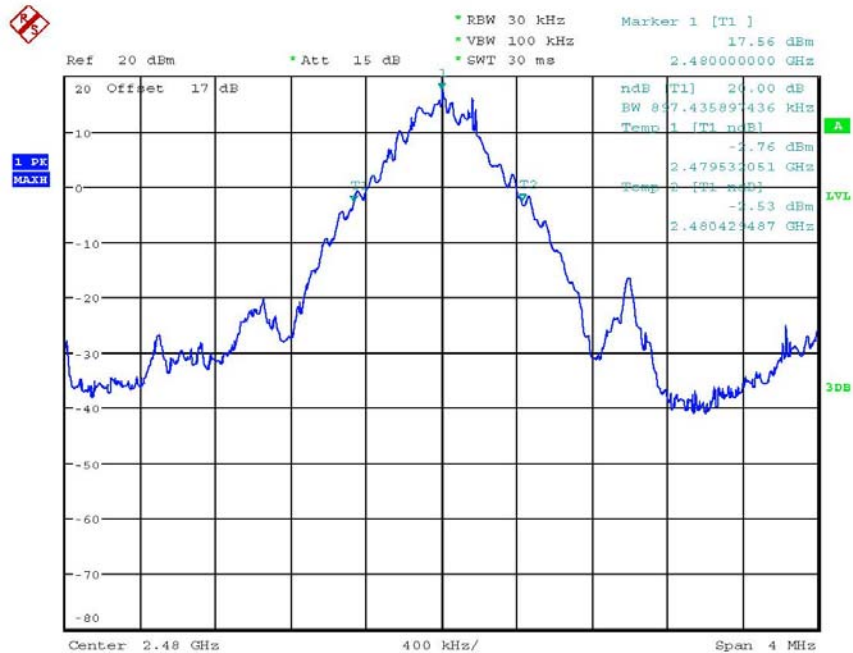

20DB BANDWIDTH CH78  
 Date: 29.MAR.2013 16:22:23




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

EDR Mod

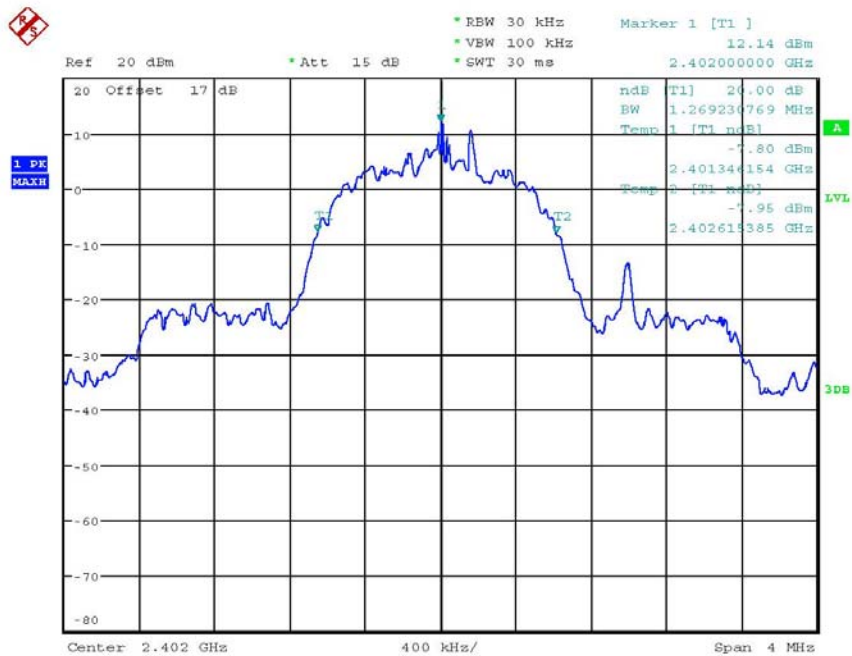

20DB BANDWIDTH CH0 EDR MODE

Date: 29.MAR.2013 16:27:43

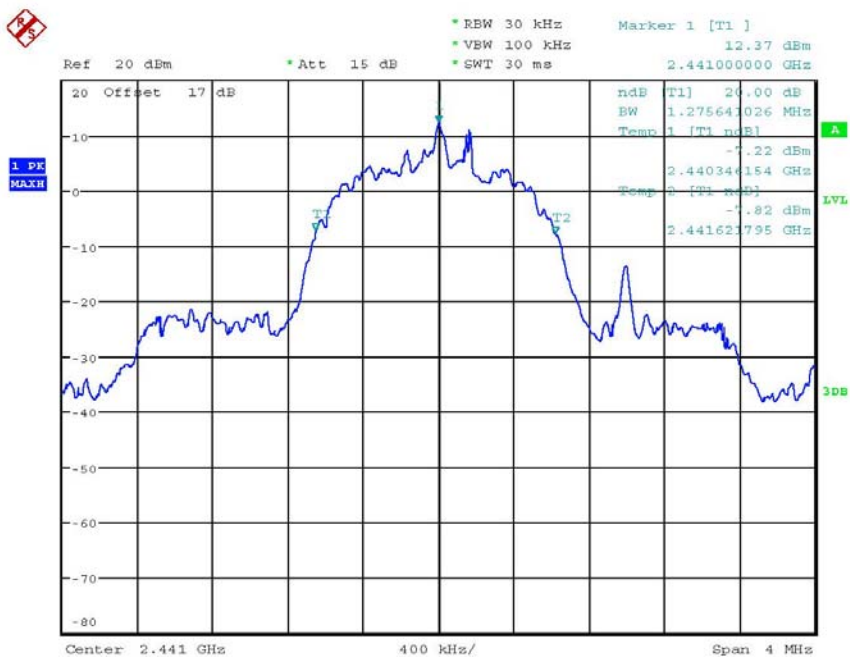


20DB BANDWIDTH CH39 EDR MODE

Date: 29.MAR.2013 16:28:15

e



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

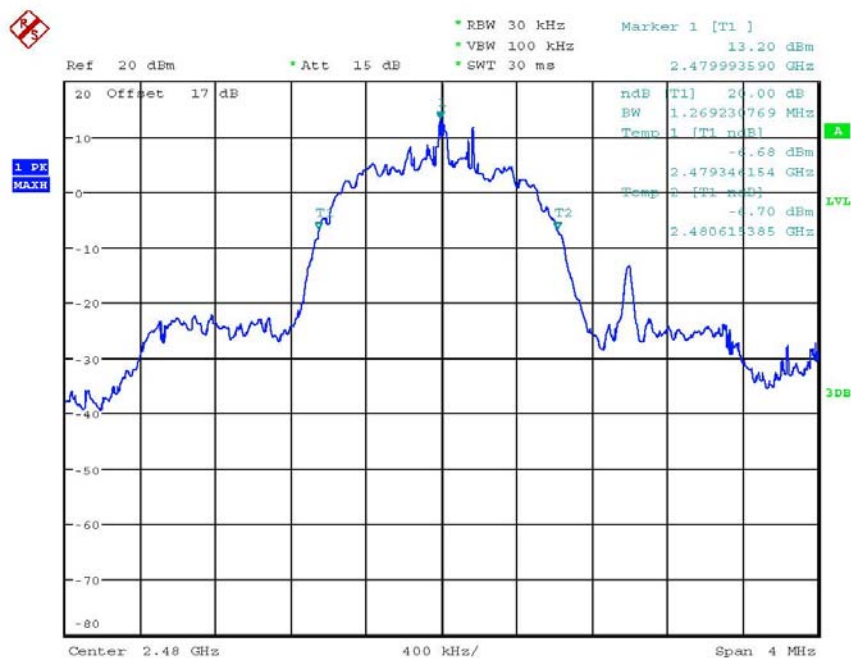

20DB BANDWIDTH CH78 EDR MODE  
 Date: 29.MAR.2013 16:28:35


### Limits:

Frequency Range / MHz	Limit
902-928	≤ 500 kHz
2400-2483.5	not defined
5725-5850	≤ 1 MHz

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

### 3.9.1 System Receiver Input Bandwidth

It is determined in the Bluetooth core specification. The value matches to the bandwidth of transmitter signal.




Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## 3.10 Band-edge Compliance of RF Emissions

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.


In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

### Normal Mode

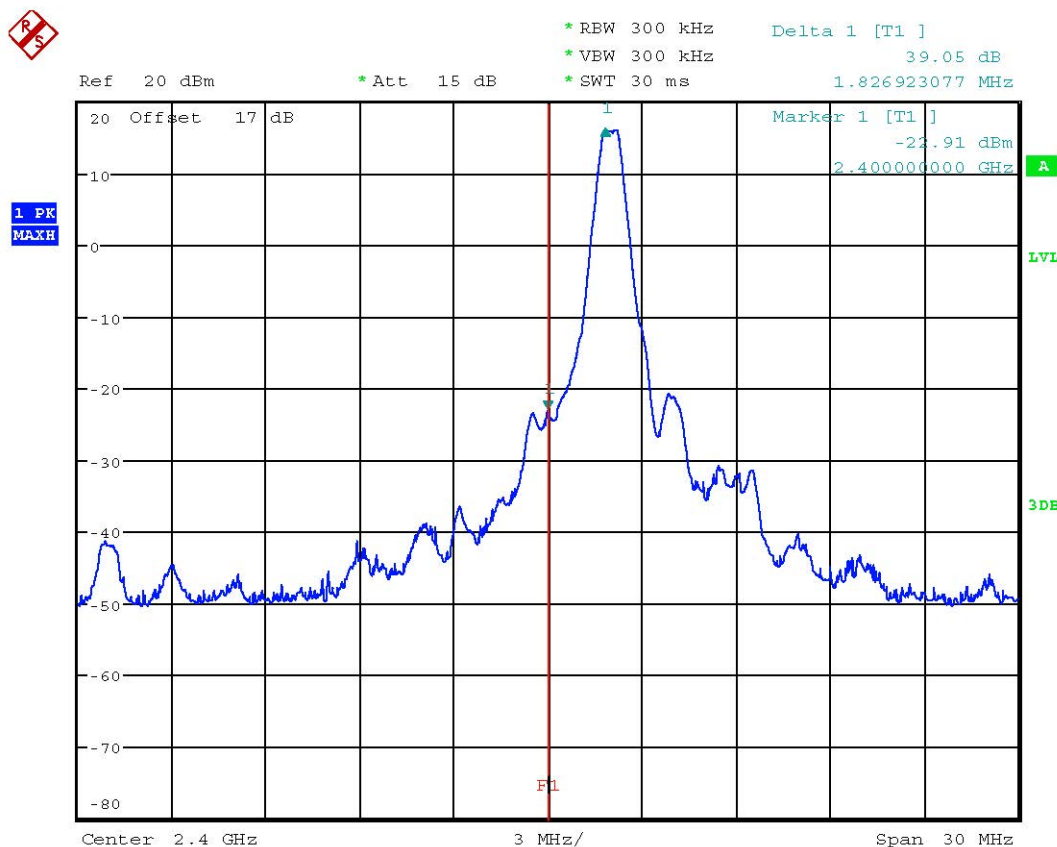


BANDEDGE CHO

Date: 29.MAR.2013 16:21:43




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

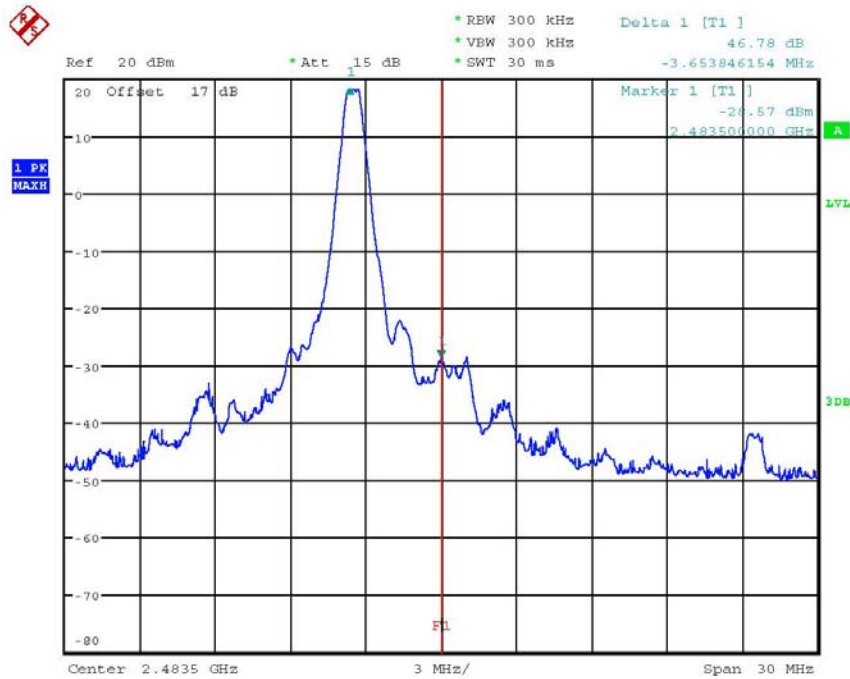


BANDEGE CH78  
Date: 29.MAR.2013 16:22:31

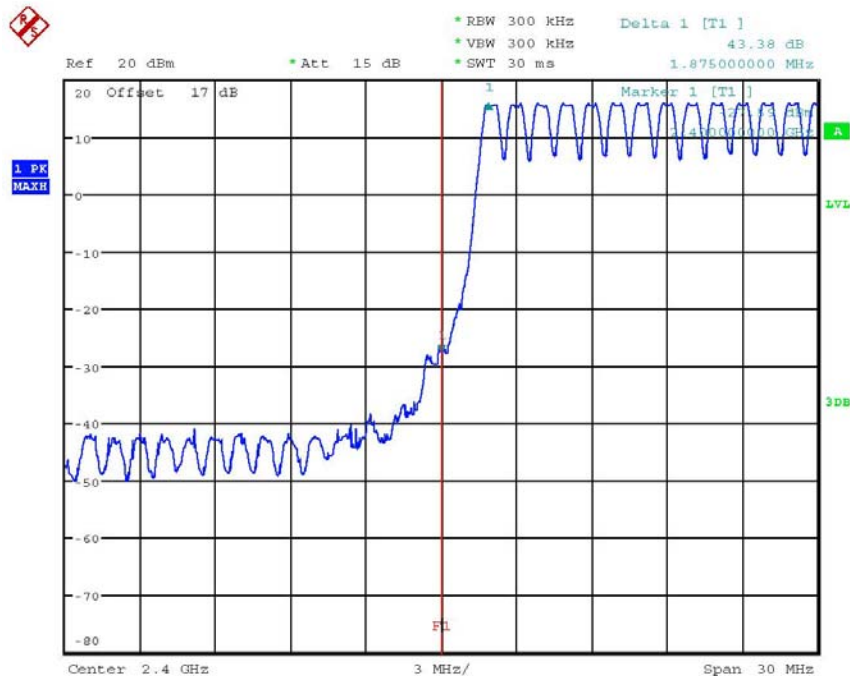


BANDEGE CH0 HOPPING MODE  
Date: 29.MAR.2013 16:23:12






# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

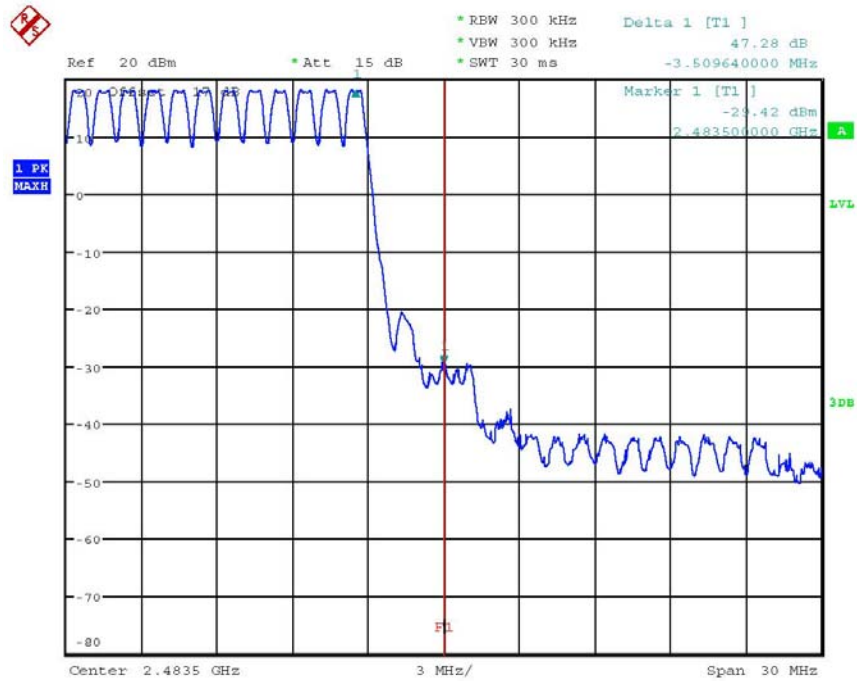


BANDEGE CH78 HOPPING MODE  
Date: 29.MAR.2013 16:23:52

## EDR Mode

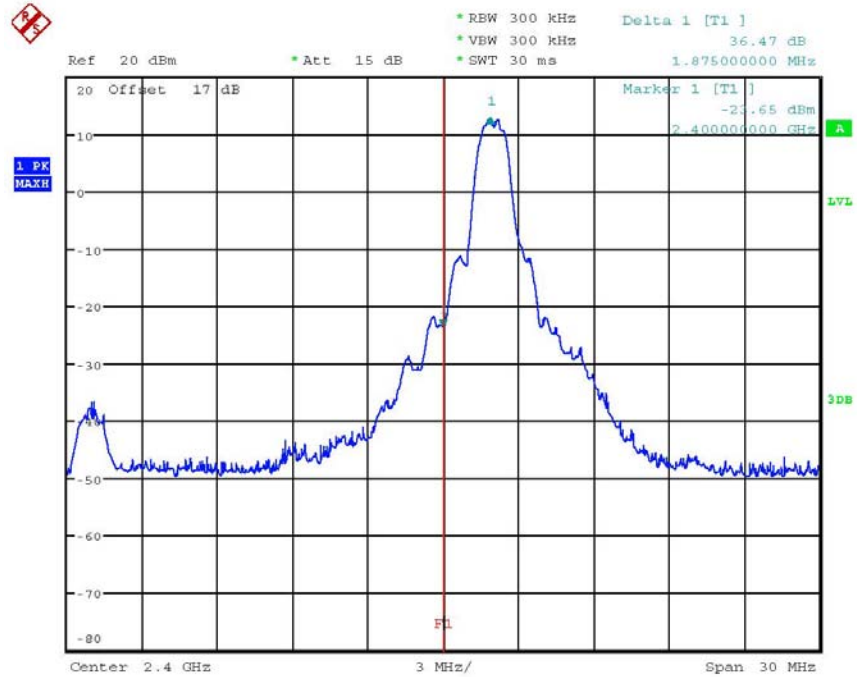


BANDEGE CH0 EDR MODE  
Date: 29.MAR.2013 16:27:51






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

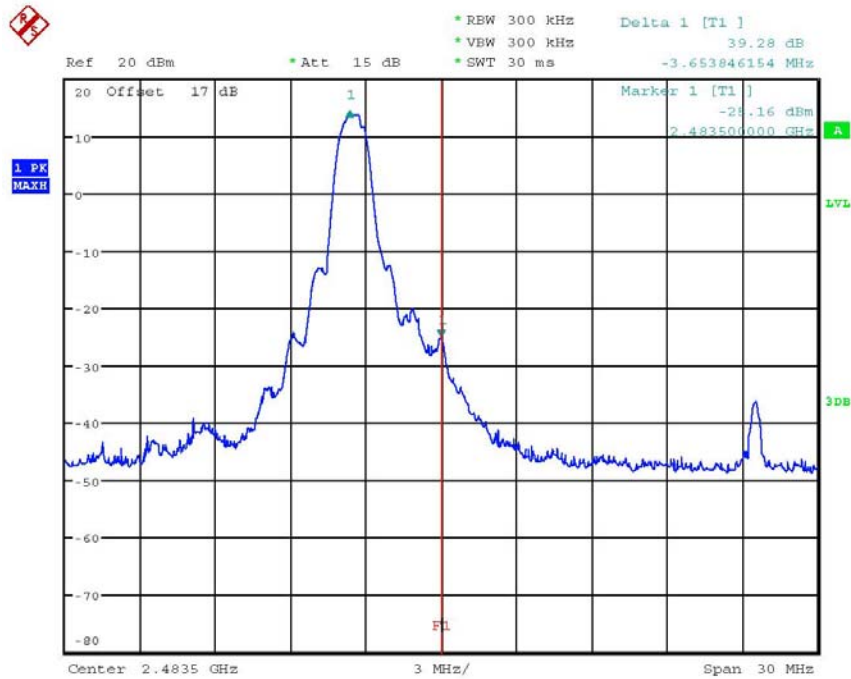

BANDEGE CH78 EDR MODE  
Date: 29.MAR.2013 16:28:47

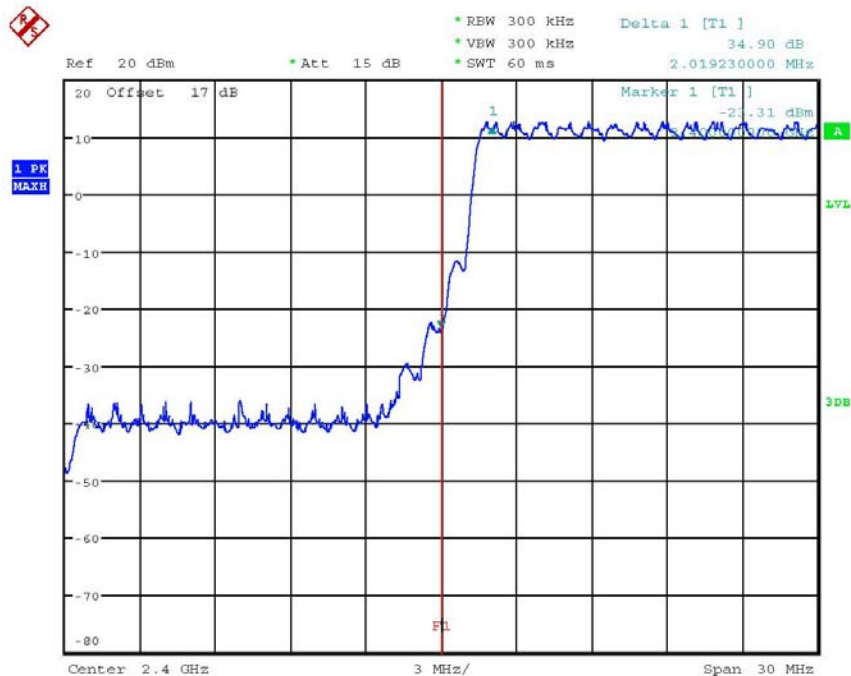


BANDEGE CH0 EDR HOPPING MODE  
Date: 29.MAR.2013 16:30:35



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

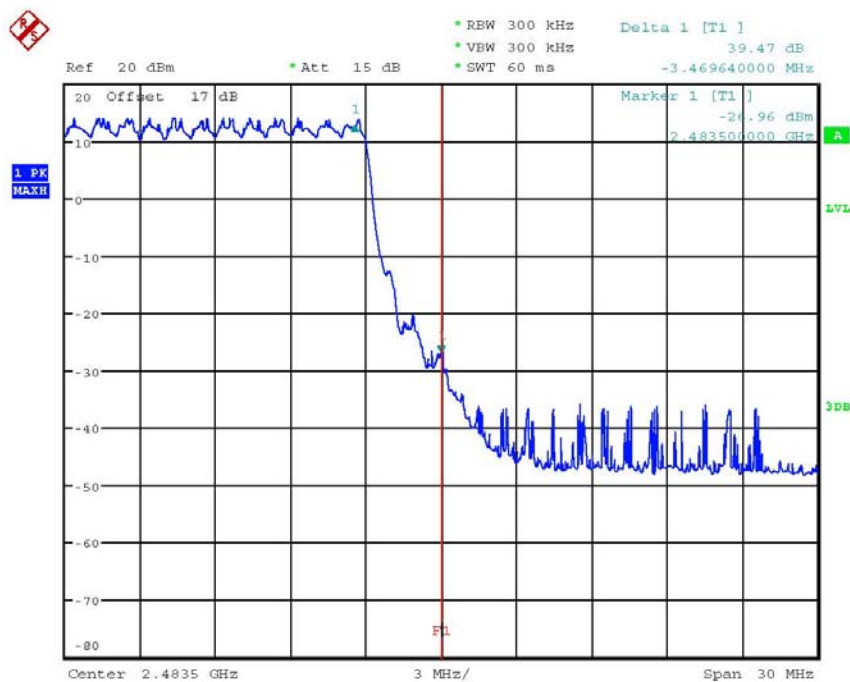

BANDEDGE CH78 EDR HOPPING MODE  
 Date: 29.MAR.2013 16:32:19

### Limits:

Frequency Range / MHz	Limit
902 – 928	- 20 dB
2400 – 2483.5	
5725 - 5850	

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

## 3.11 Radiated Emissions from Receiver Part

FCC Rule: 15.109

Model: RN-41 Date: 2013/3/29  
 Mode: BT RX 2402MHz Temperature: 24 °C Engineer: Vic  
 Polarization: Horizontal Humidity: 60 %

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
49.4388	3.74	peak	14.12	17.86	40.00	-22.14	175	155
164.1282	3.48	peak	14.87	18.35	43.50	-25.15	135	120
288.5371	12.03	peak	15.35	27.38	46.00	-18.62	220	190
307.9760	7.57	peak	15.76	23.33	46.00	-22.67	265	110

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1589.1780	56.27	---	-9.09	47.18	---	74.00	54.00	-26.82	155	100
7102.2040	41.23	---	4.23	45.46	---	74.00	54.00	-28.54	225	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
45.5511	3.70	peak	14.02	17.72	40.00	-22.28	315	110
146.6333	2.99	peak	14.99	17.98	43.50	-25.52	245	120
370.1804	3.55	peak	17.46	21.01	46.00	-24.99	150	105
959.1784	8.96	peak	27.53	36.49	46.00	-9.51	175	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1617.2350	55.20	---	-8.85	46.35	---	74.00	54.00	-27.65	170	100
7396.7940	41.14	---	4.68	45.82	---	74.00	54.00	-28.18	325	100

Mode: BT RX 2441MHz  
 Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
45.5510	4.24	peak	14.02	18.26	40.00	-21.74	275	125
154.4088	3.25	peak	15.06	18.31	43.50	-25.19	185	110
300.2004	7.77	peak	15.53	23.30	46.00	-22.70	310	100
959.1784	8.64	peak	27.53	36.17	46.00	-9.83	165	110



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1626.4170	63.04	56.22	-8.78	54.26	47.44	74.00	54.00	-6.56	300	100
7901.8040	42.12	---	4.66	46.78	---	74.00	54.00	-27.22	265	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
49.4388	4.26	peak	14.12	18.38	40.00	-21.62	250	100
152.4648	3.47	peak	15.07	18.54	43.50	-24.96	110	110
447.9360	3.78	peak	19.54	23.32	46.00	-22.68	195	100
959.1784	8.84	peak	27.53	36.37	46.00	-9.63	325	105

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1617.2350	57.04	---	-8.85	48.19	---	74.00	54.00	-25.81	185	100
7663.3270	41.61	---	4.22	45.83	---	74.00	54.00	-28.17	245	100

Mode: BT RX 2480MHz

Polarization: Horizontal

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
55.2704	3.64	peak	13.69	17.33	40.00	-22.67	245	105
168.0160	3.78	peak	14.71	18.49	43.50	-25.01	110	110
288.5371	8.64	peak	15.35	23.99	46.00	-22.01	180	130
362.4048	5.79	peak	17.26	23.05	46.00	-22.95	315	100

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1652.4030	63.83	57.63	-8.55	55.28	49.08	74.00	54.00	-4.92	180	100
7214.4290	41.45	---	4.17	45.62	---	74.00	54.00	-28.38	210	100

Polarization: Vertical

Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
49.4388	3.45	peak	14.12	17.57	40.00	-22.43	265	100
131.0822	4.22	peak	13.88	18.10	43.50	-25.40	315	110
350.7415	3.97	peak	16.94	20.91	46.00	-25.09	155	100
959.1784	7.90	peak	27.53	35.43	46.00	-10.57	75	105



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

Frequency (MHz)	Reading (dBuV)		Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Degree (Deg.)	Ant. High (cm)
	Peak	Ave.		Peak	Ave.	Peak	Ave.			
1645.2910	58.06	---	-8.62	49.44	---	74.00	54.00	-24.56	265	100
7228.4570	41.58	---	4.19	45.77	---	74.00	54.00	-28.23	130	100


- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. Measurement uncertainty above 1GHz: 30-1000 MHz = ± 3.72 dB, 1-18 GHz = ± 5.56 dB, 18-40 GHz = ± 3.46 dB ; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.
  6. See attached diagrams in appendix.

### Summary table with radiated data of the test plots

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency of Emission (MHz)	Field Strength (microvolts/meter)	Field Strength (dBmicrovolts/meter)
30 – 88	100	40.0
88 – 216	150	43.5
216 – 960	200	46.0
Above 960	500	54.0

Test equipment used: ETSTW-RE 055, ETSTW-RE 064, ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 030  
 ETSTW-RE 111



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

**3.12 Power Line Conducted Emission**

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

Frequency	Level (dBμV)	
	quasi-peak	average
150 kHz	lower limit line	Lower limit line

**Limits:**

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi Peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- Note:**
- 1. The formula of measured value as: Test Result = Reading + Correction Factor**
  - 2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss**
  - 3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average**
  - 4. All not in the table noted test results are more than 20 dB below the relevant limits.**
  - 5. Measurement uncertainty = ±1.10 dB; Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k = 2.**
  - 6. This test is not required because there is no AC power line or signal line for this EUT.**

Test equipment used: ETSTW-CE 001, ETSTW-CE 004, ETSTW-CE 006, ETSTW-CE 007, ETSTW-RE 064



## **Appendix**


### **A. Measurement diagrams**

Spurious Emissions radiated

### **B. Photos**

1. External photos
2. Internal photos
3. Set Up photo of Radiated Emission







Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

Spurious Emissions radiated-TX

Bluetooth 2402 MHz

Antenna Polarization H

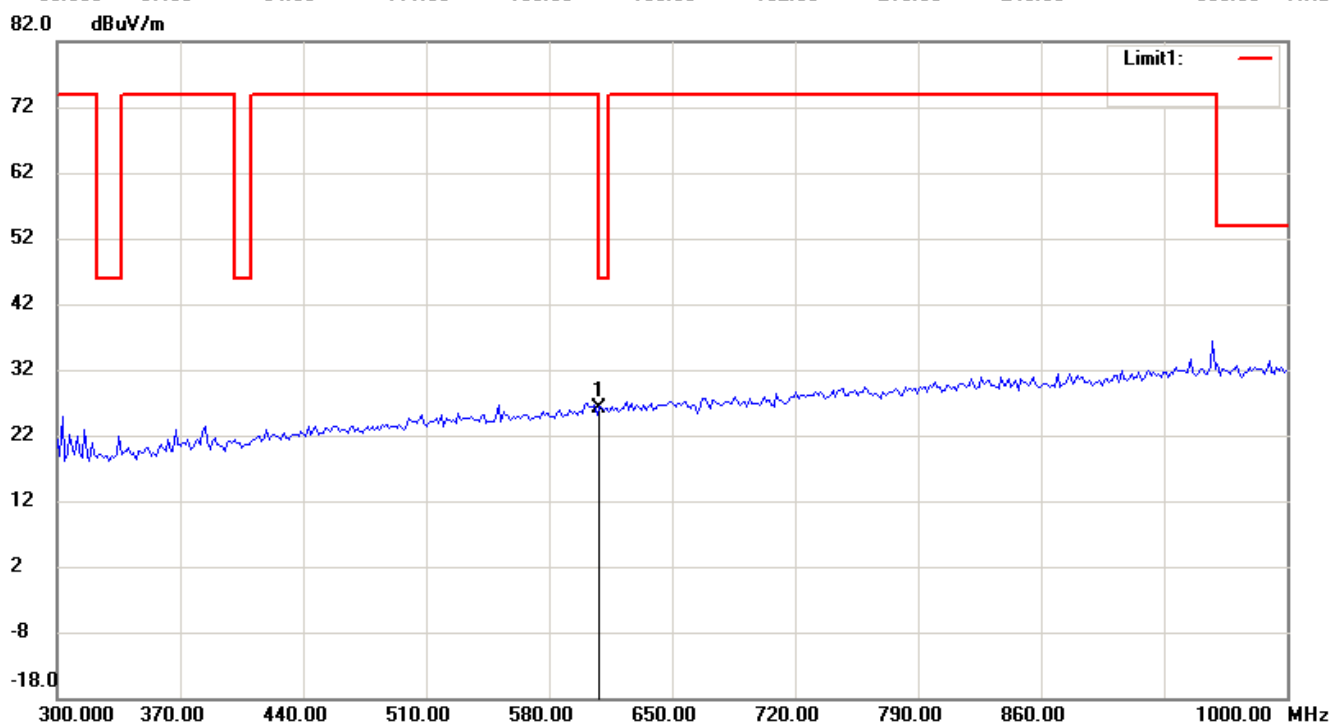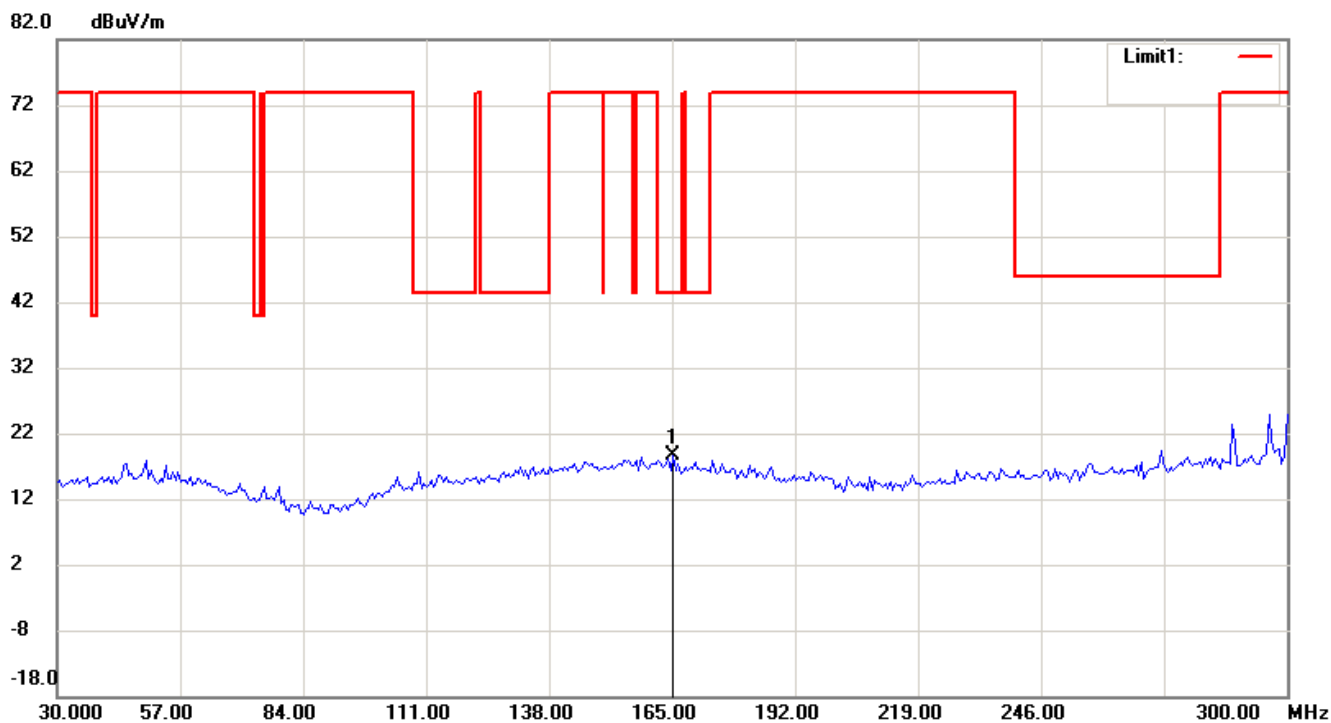

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

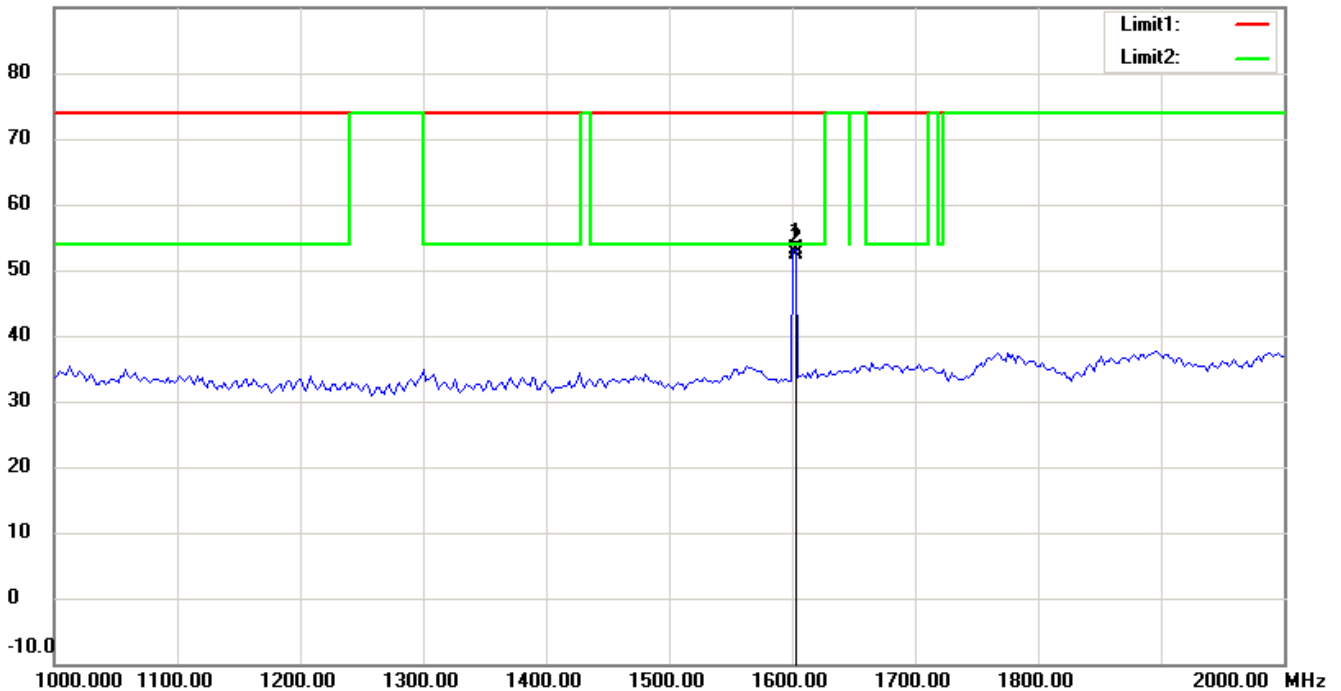


90.0 dBuV/m

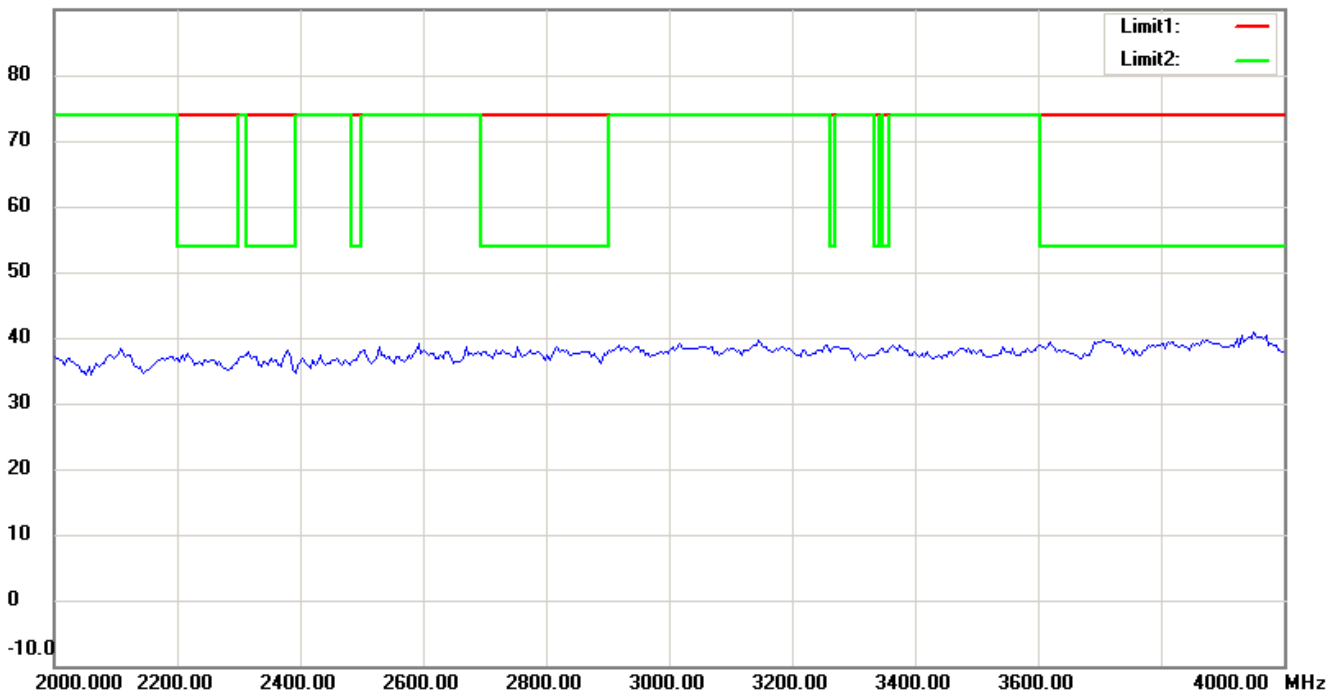

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

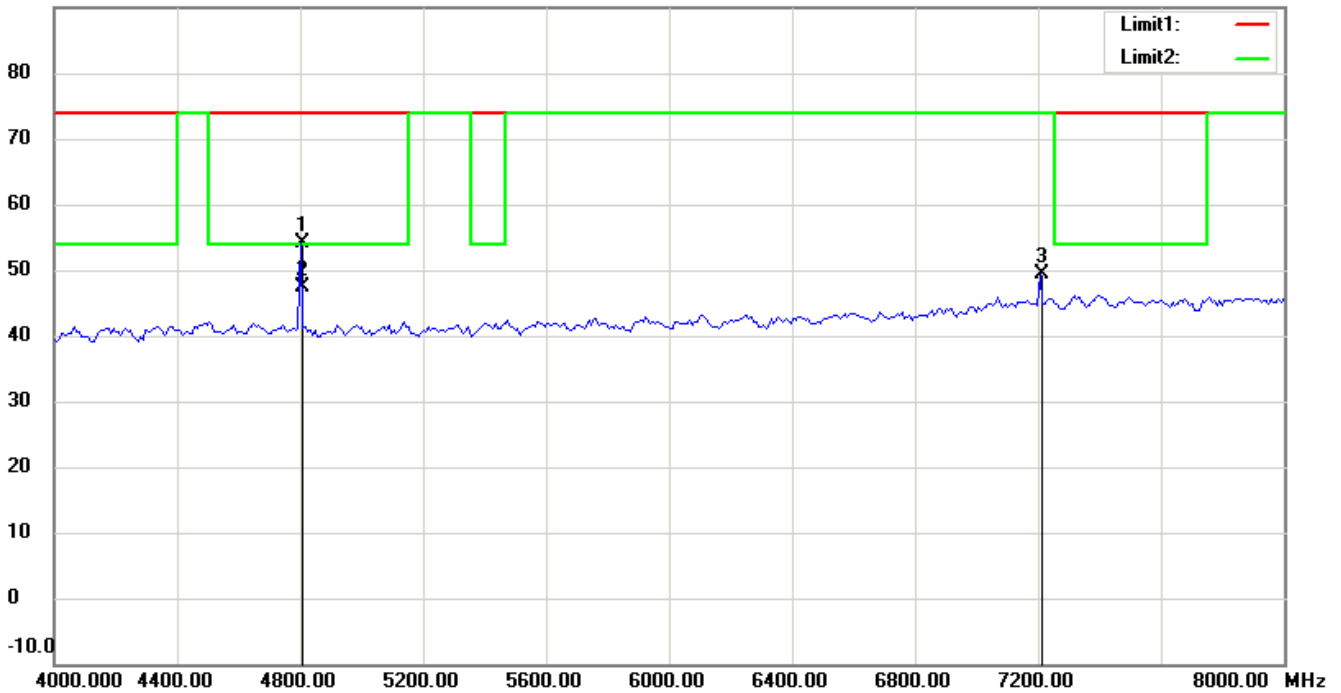

90.0 dBuV/m

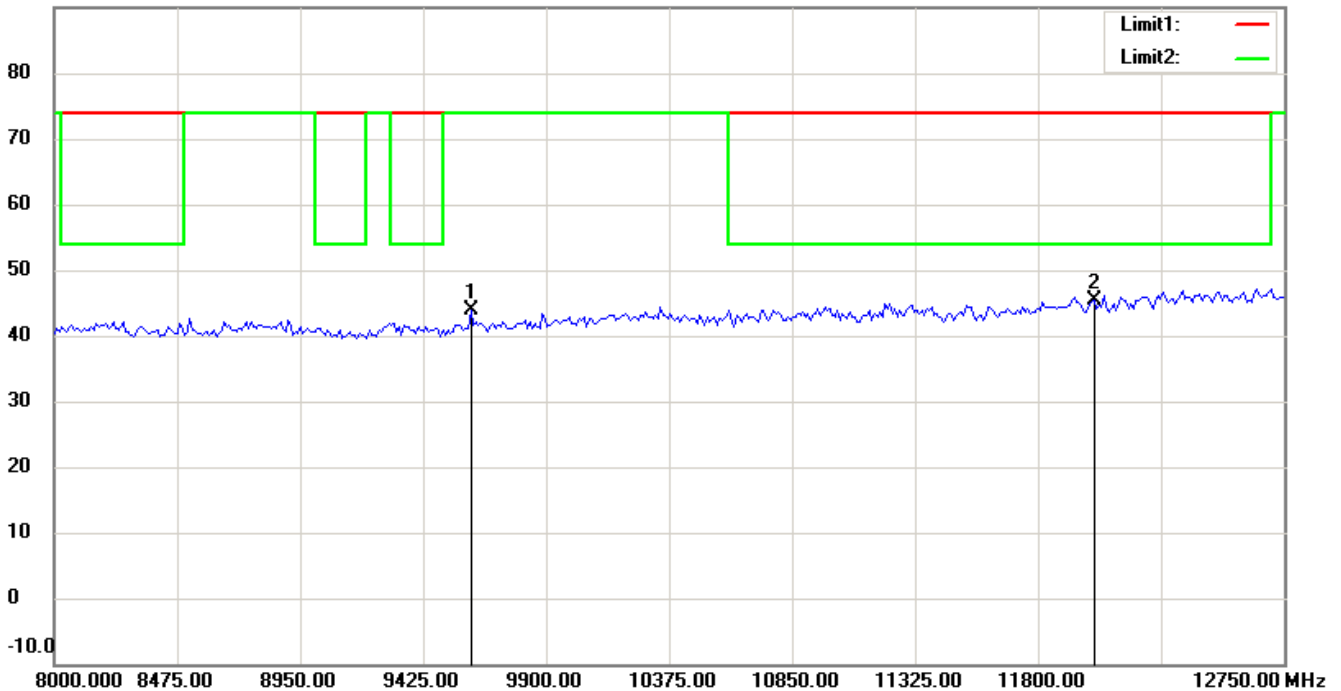

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

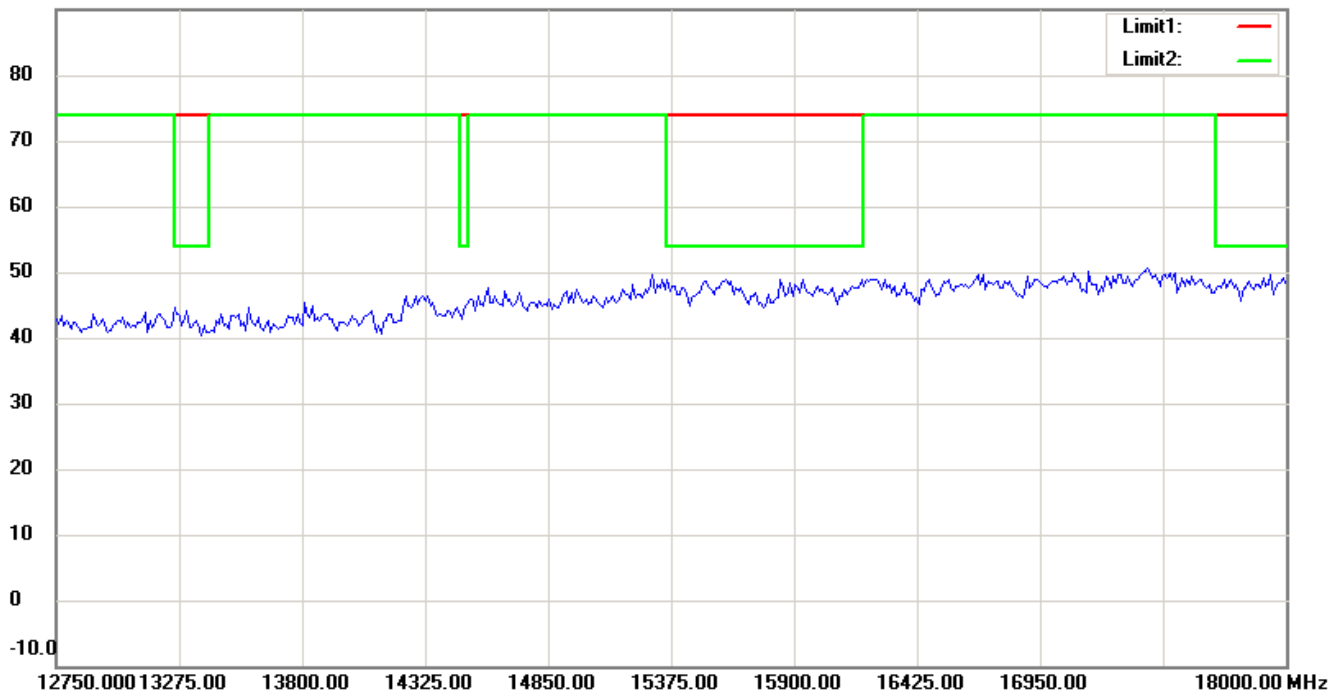

90.0 dBuV/m

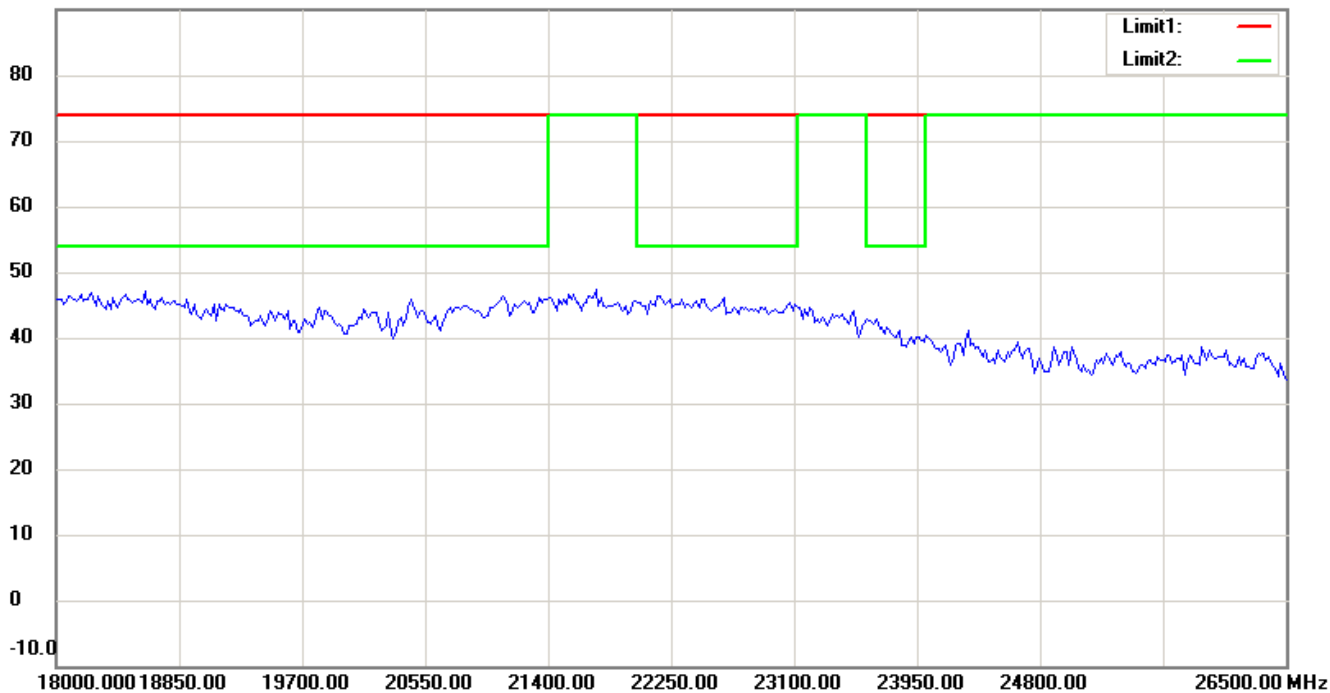

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3


## Antenna Polarization V

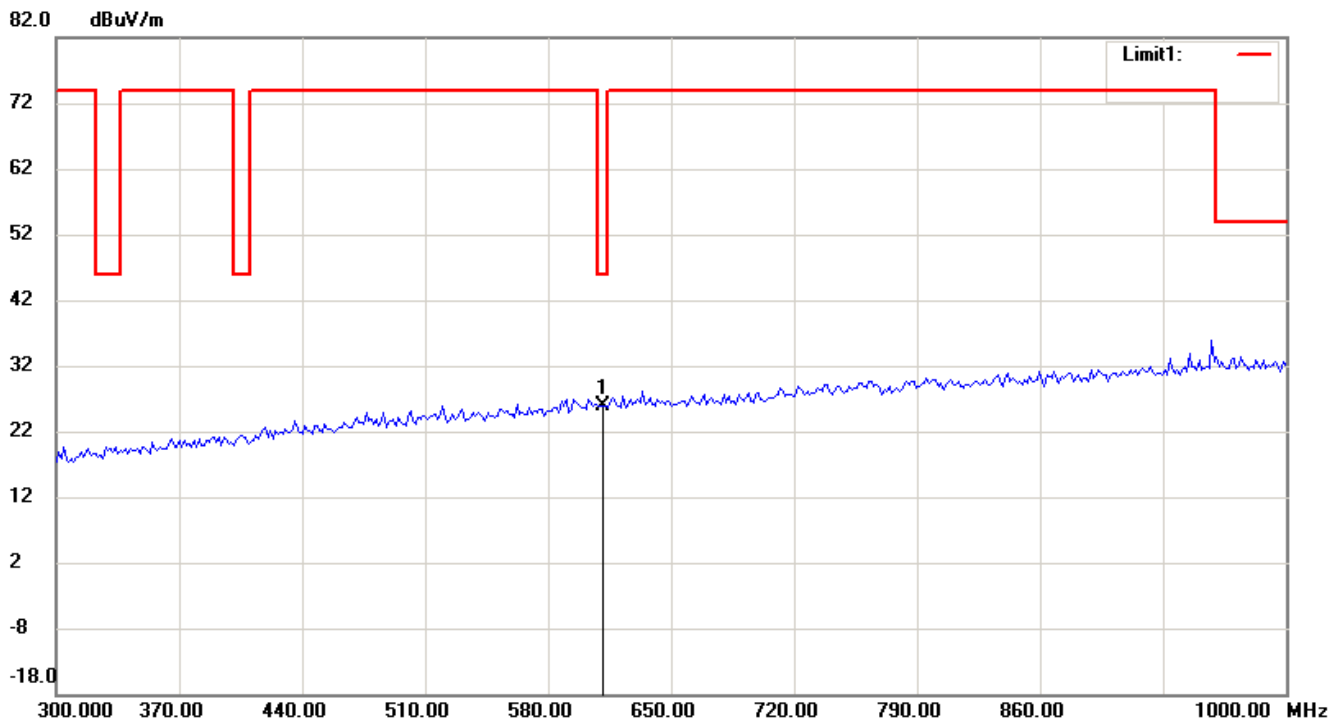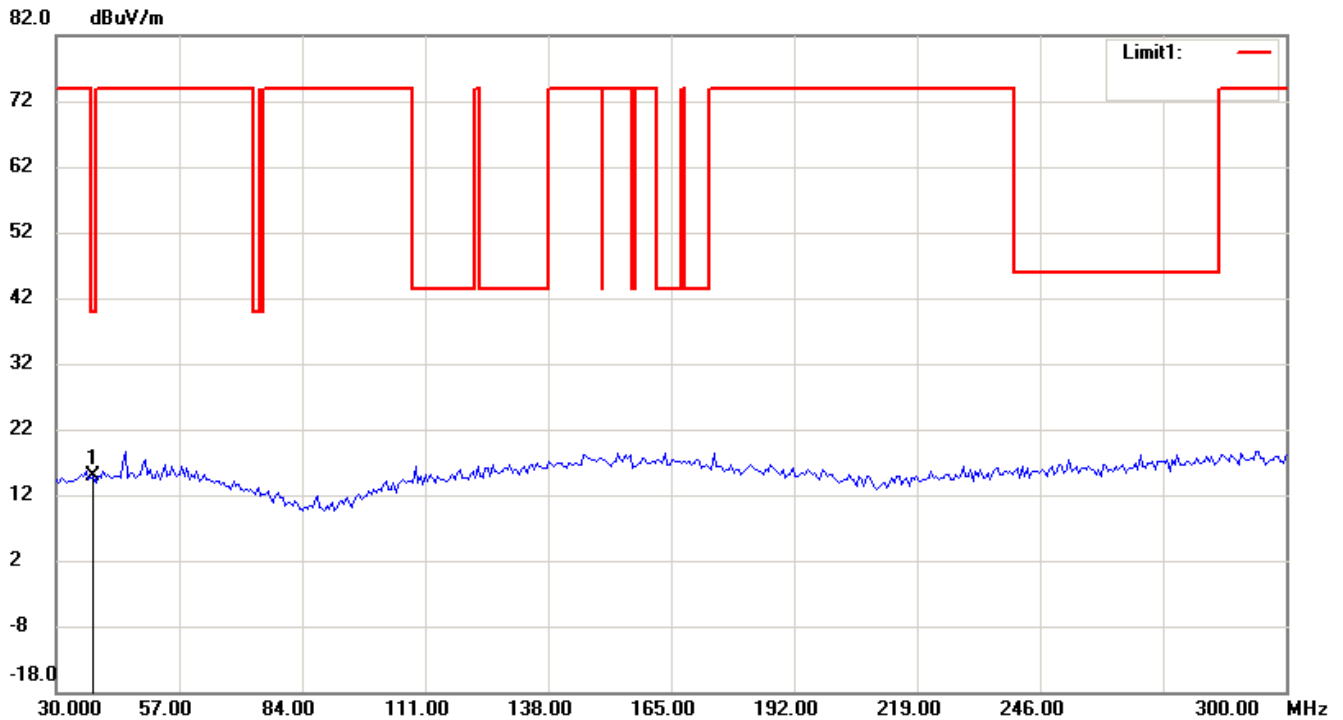

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

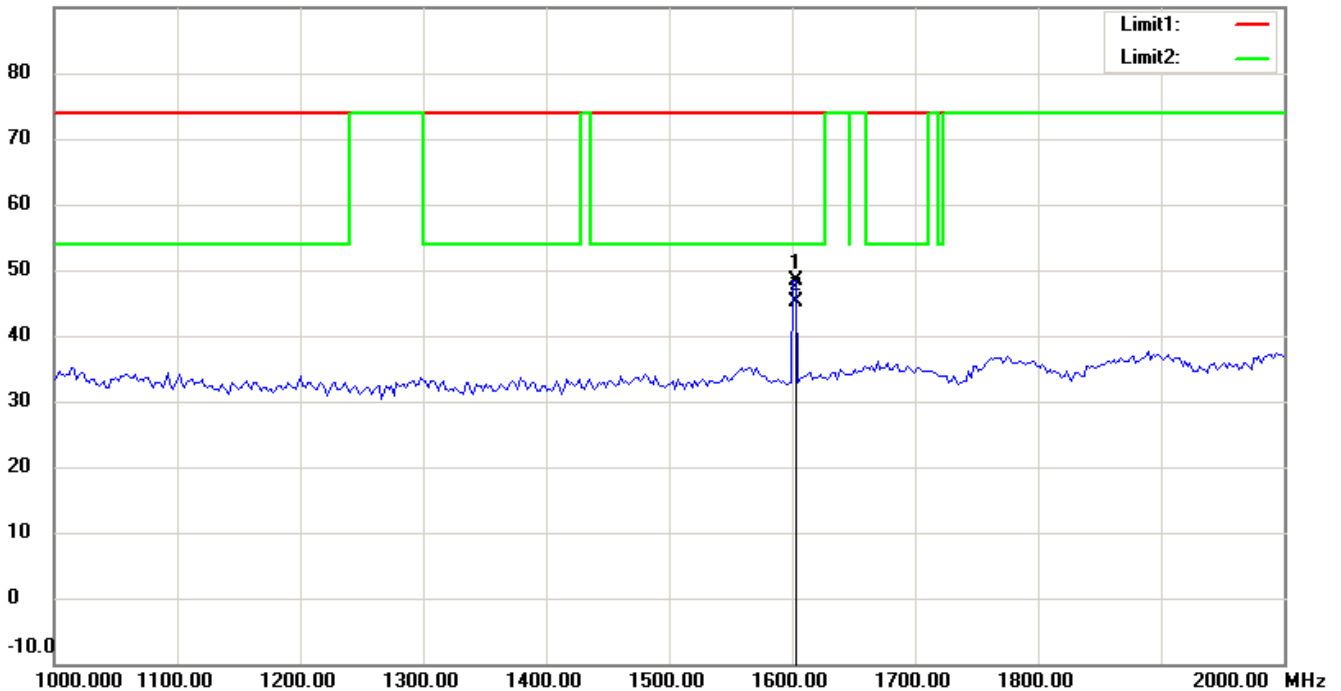


90.0 dBuV/m

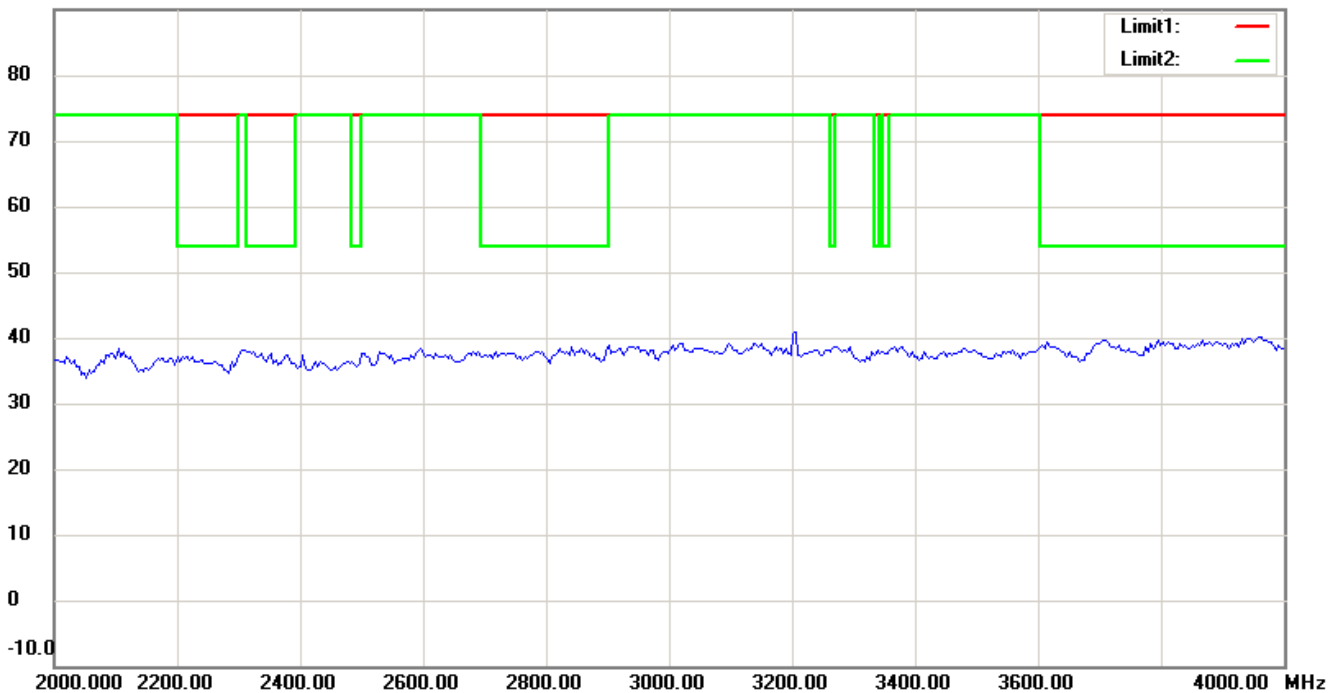

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

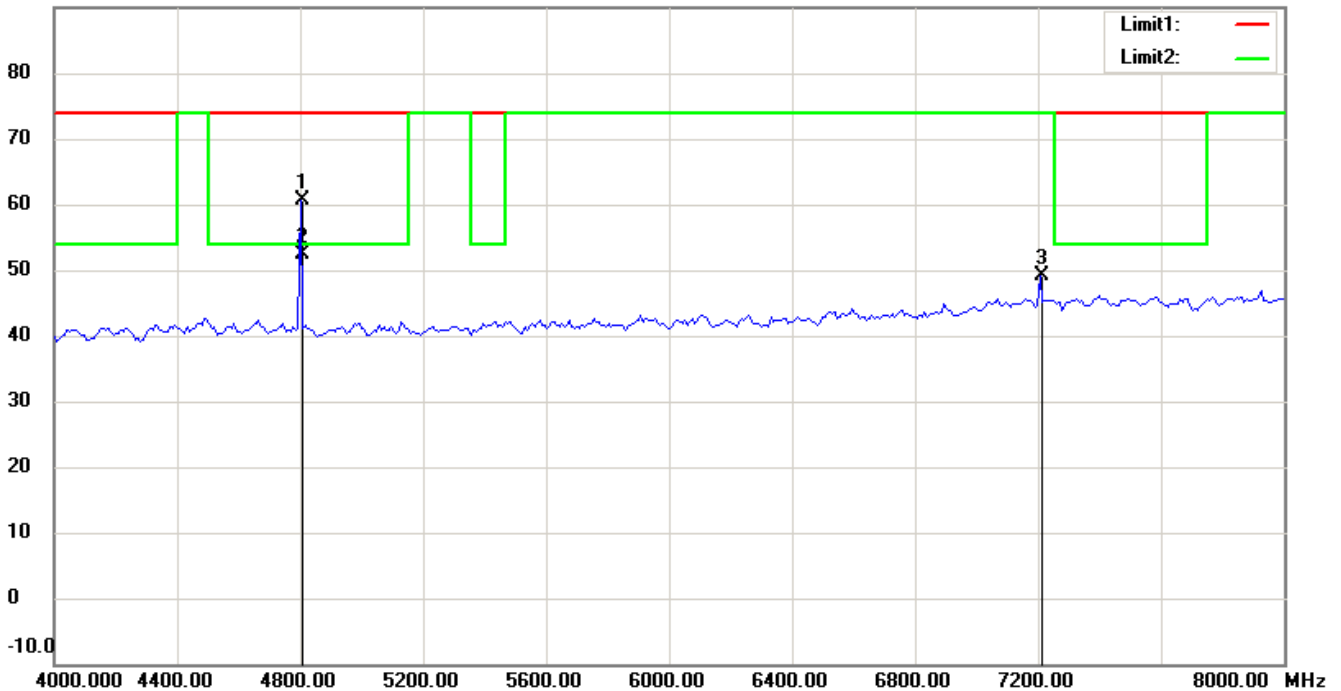

90.0 dBuV/m

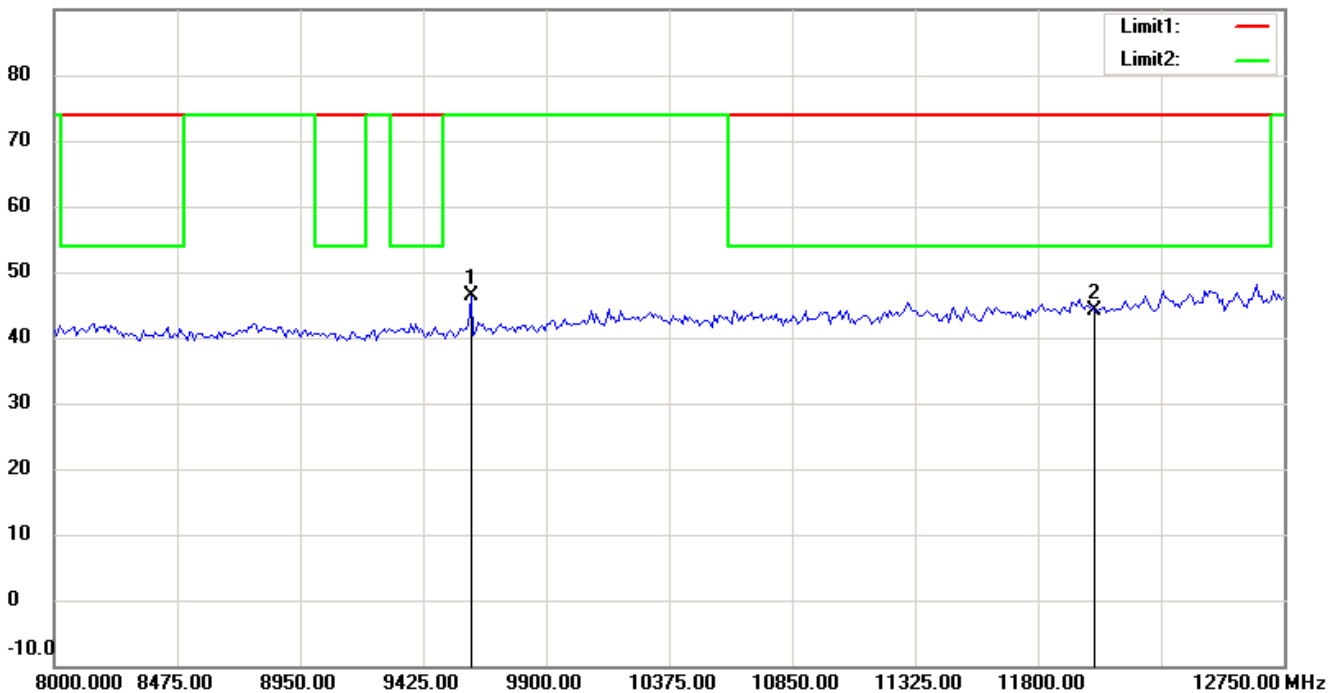

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

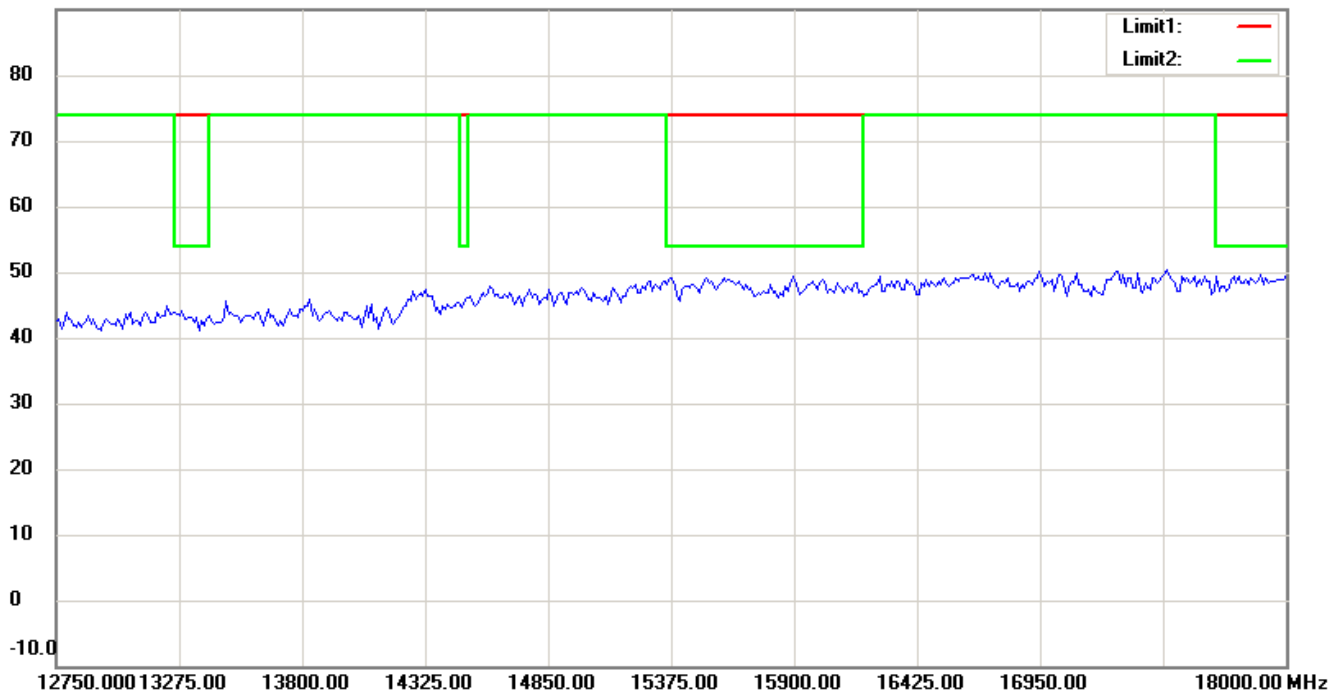

90.0 dBuV/m

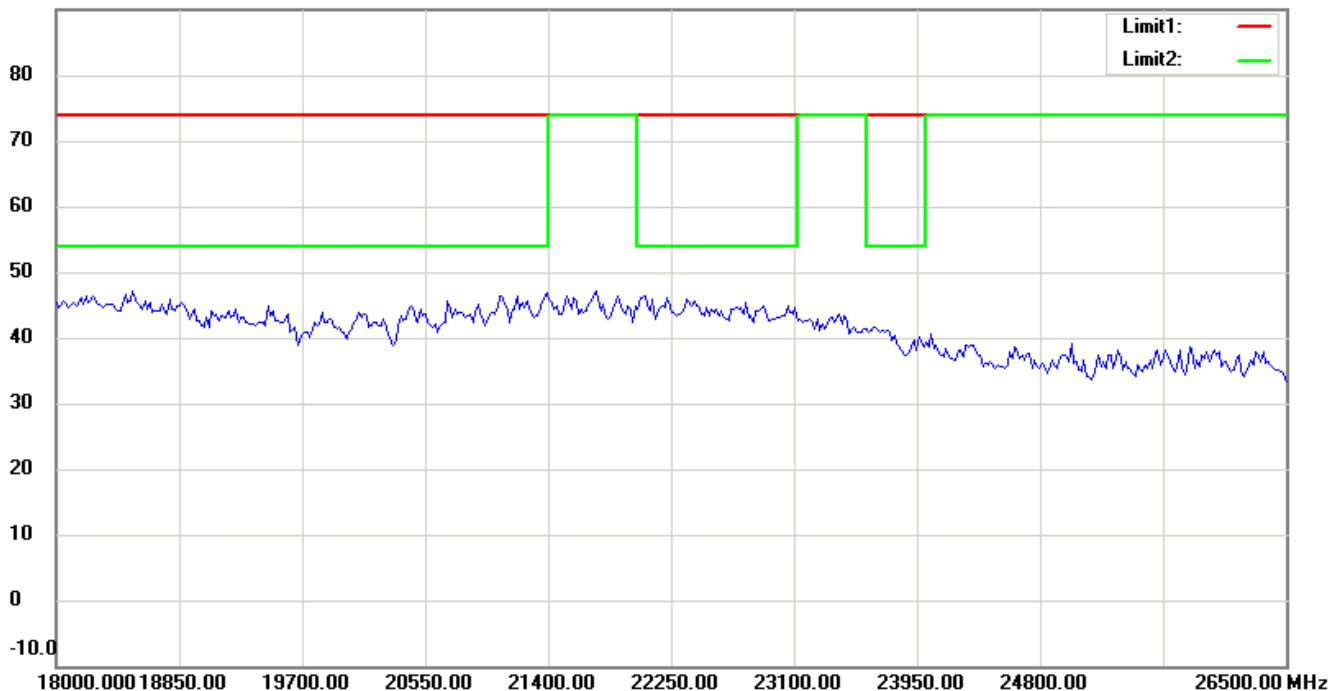

Up Line: Peak Limit Line Down Line: Ave Limit Line



Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## Bluetooth 2441 MHz Antenna Polarization H

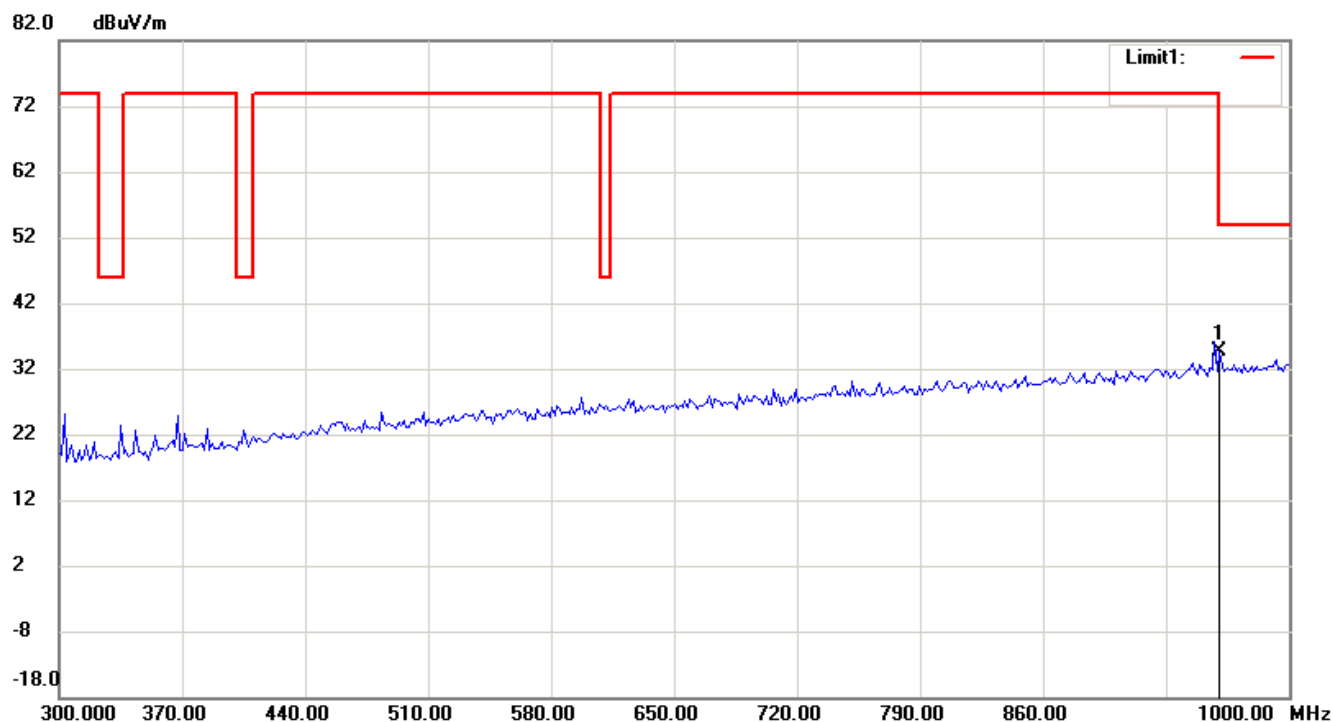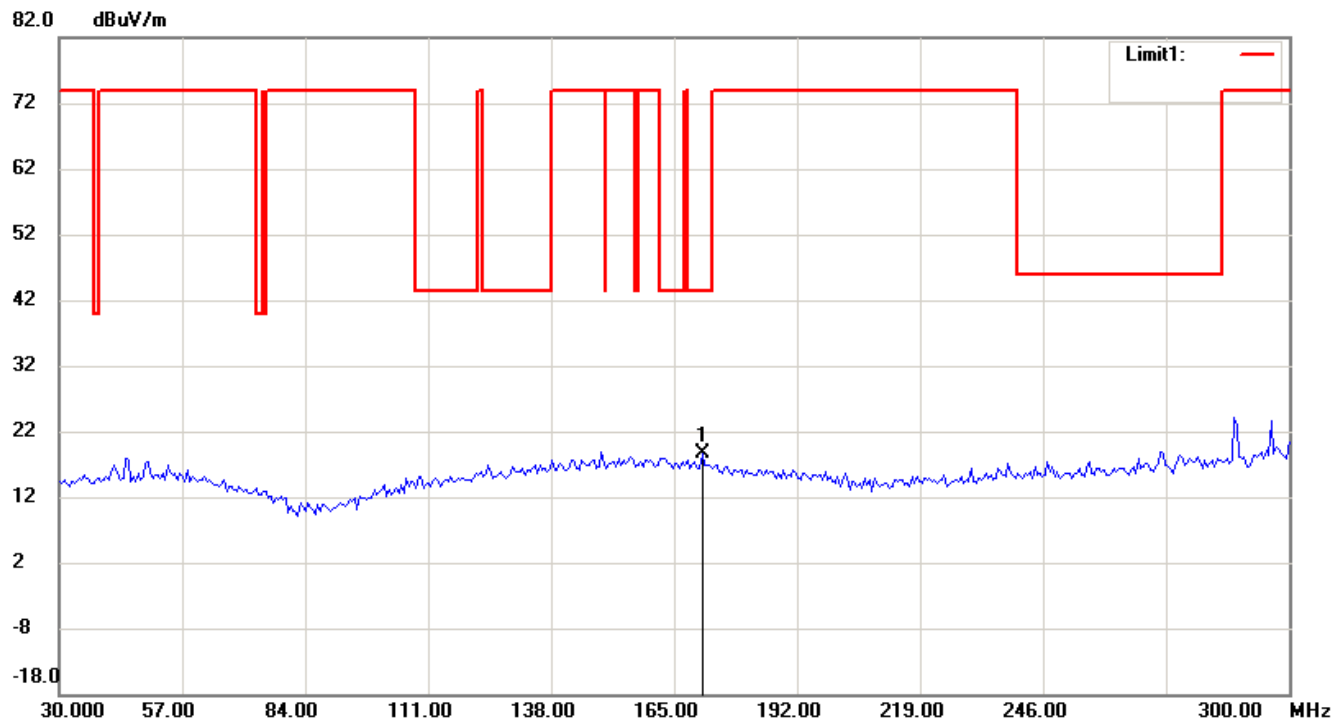

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

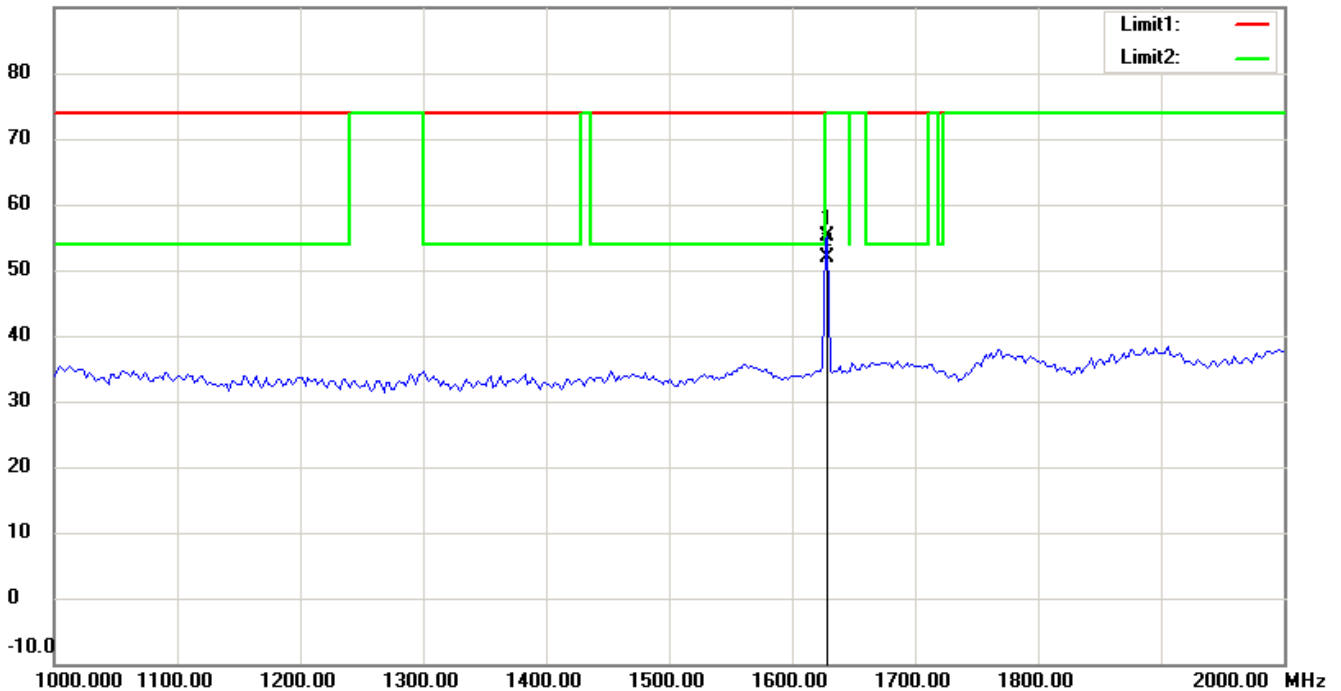

90.0 dBuV/m

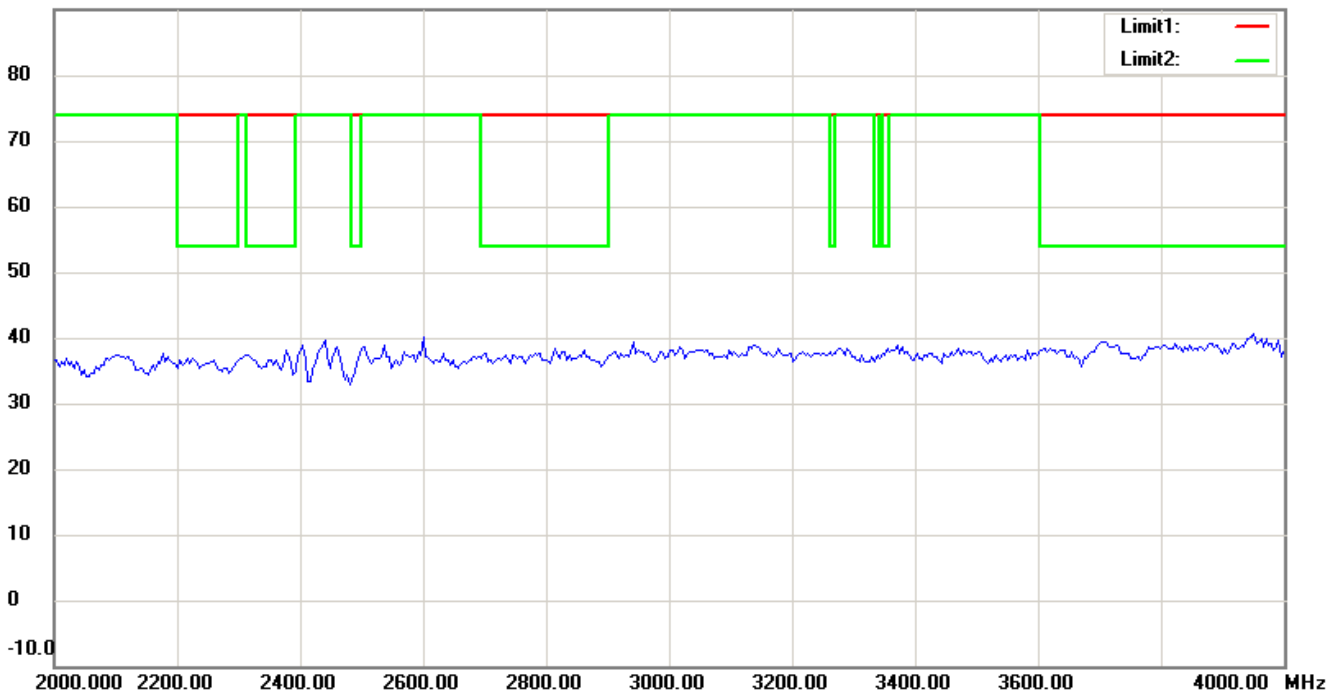

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

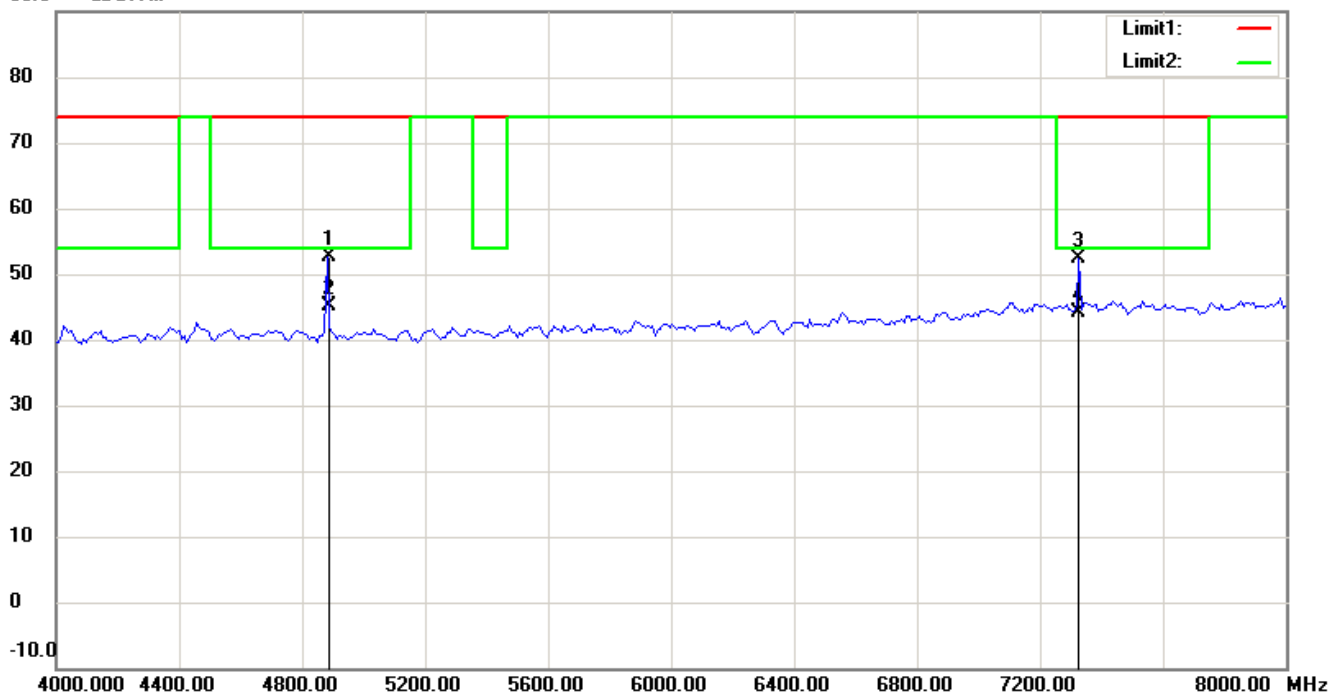

90.0 dBuV/m

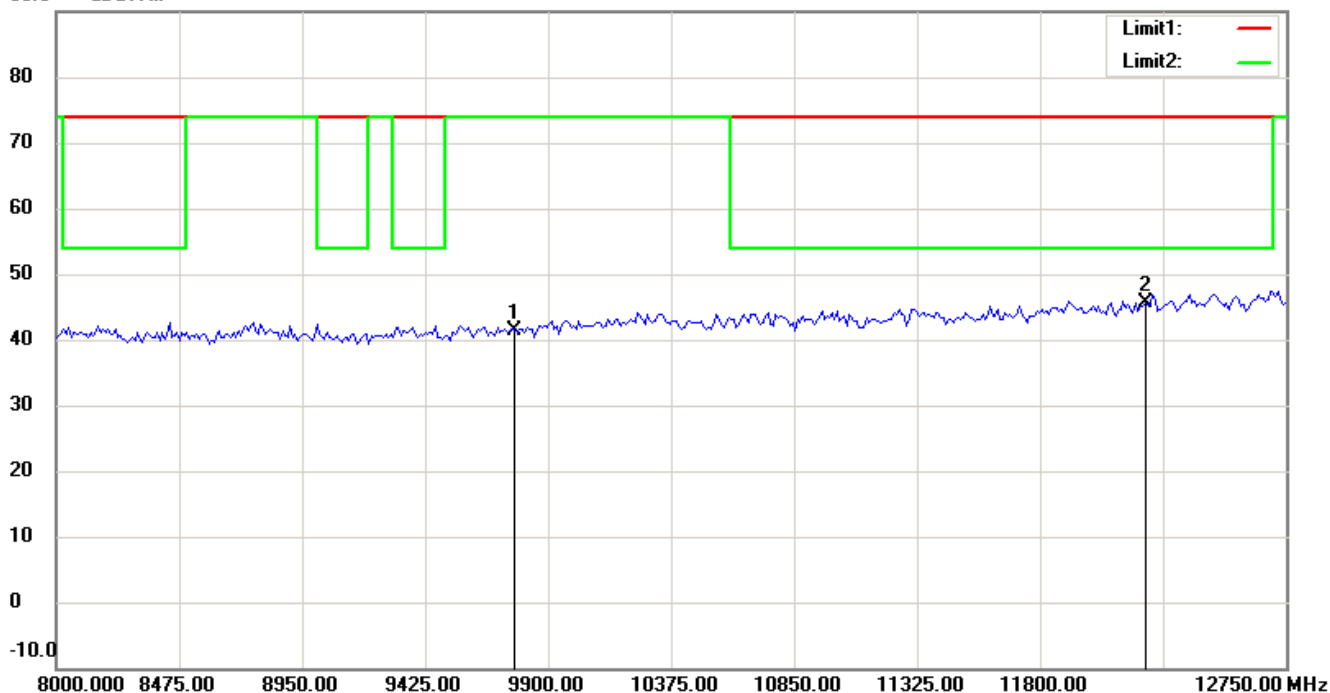

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

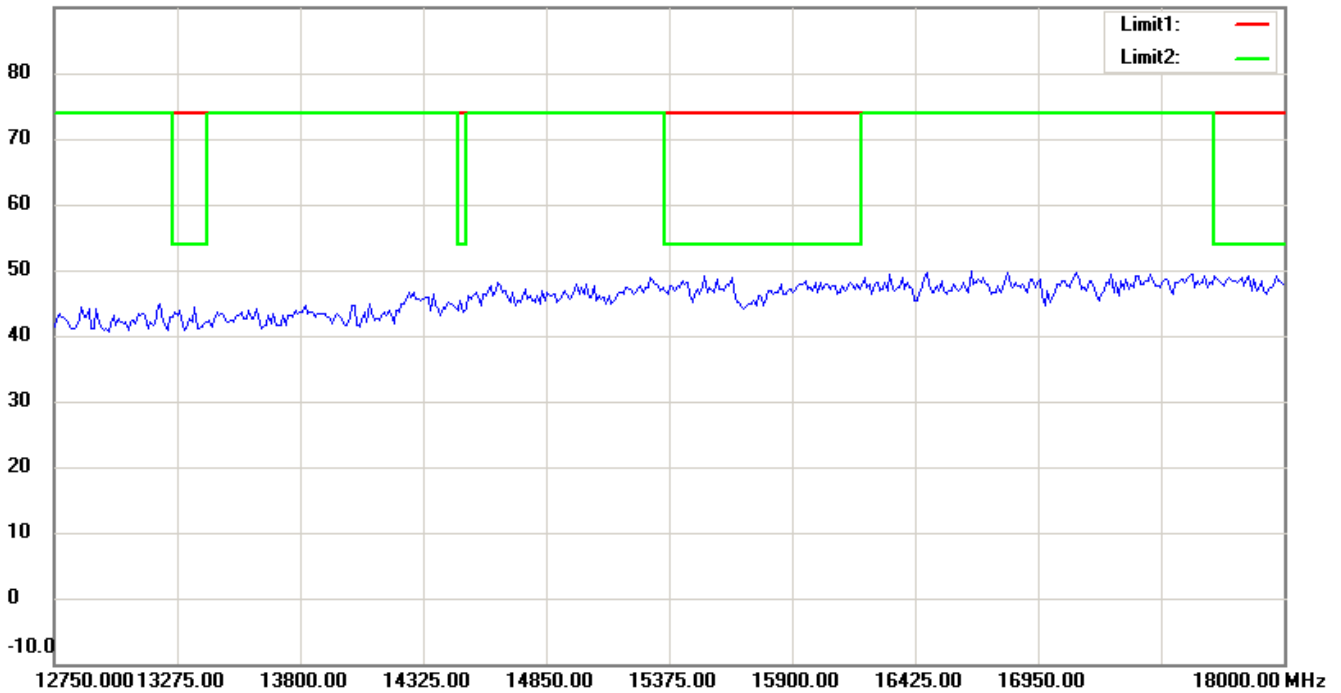

90.0 dBuV/m

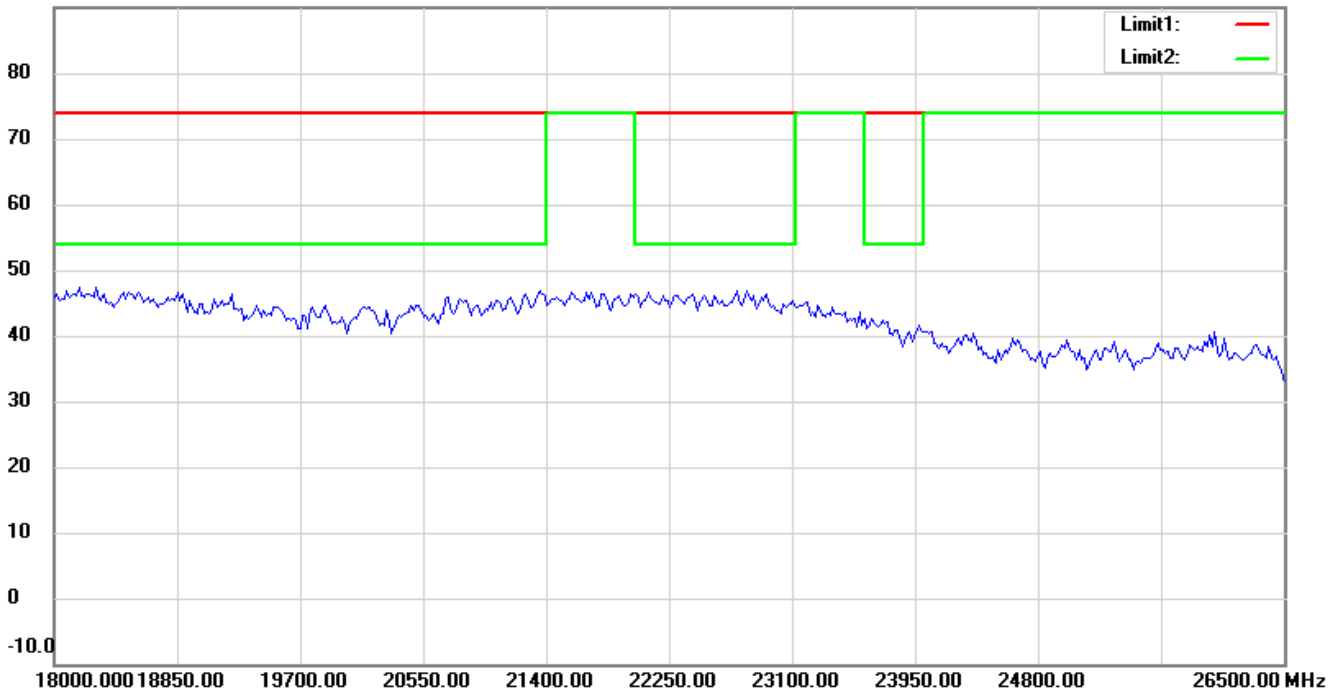

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

## Antenna Polarization V

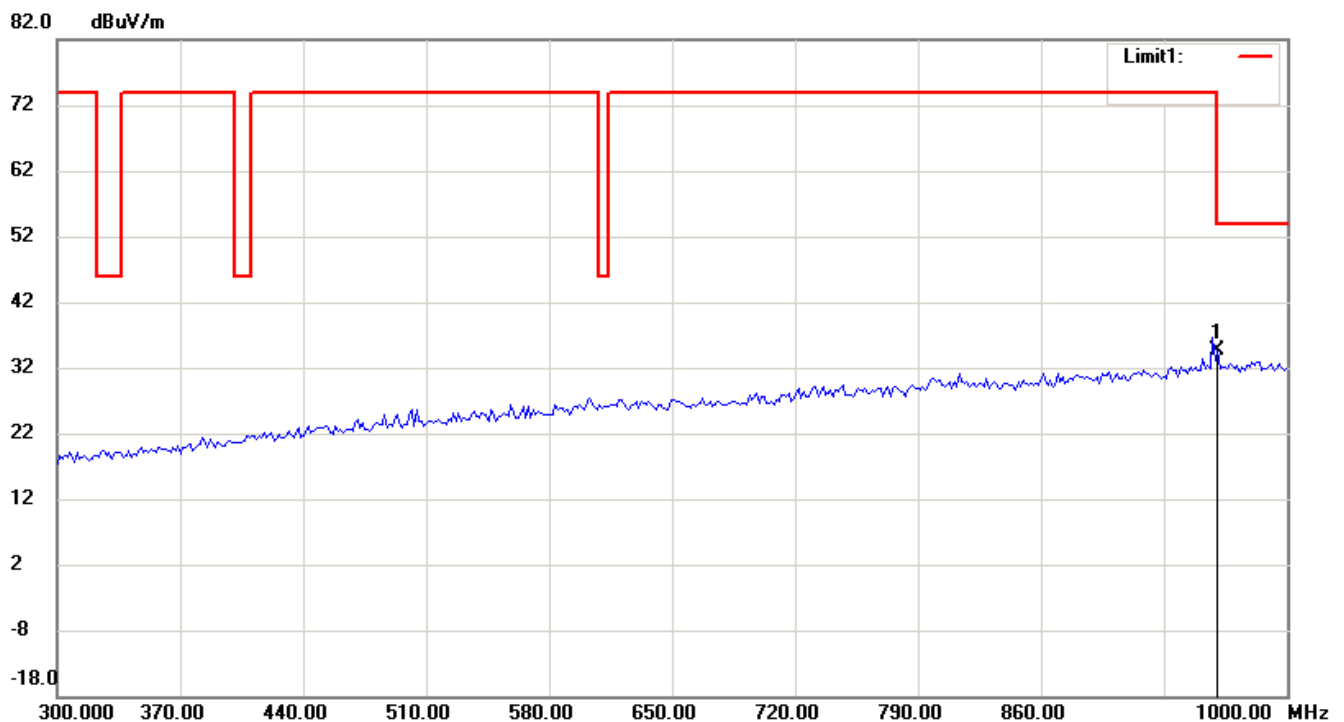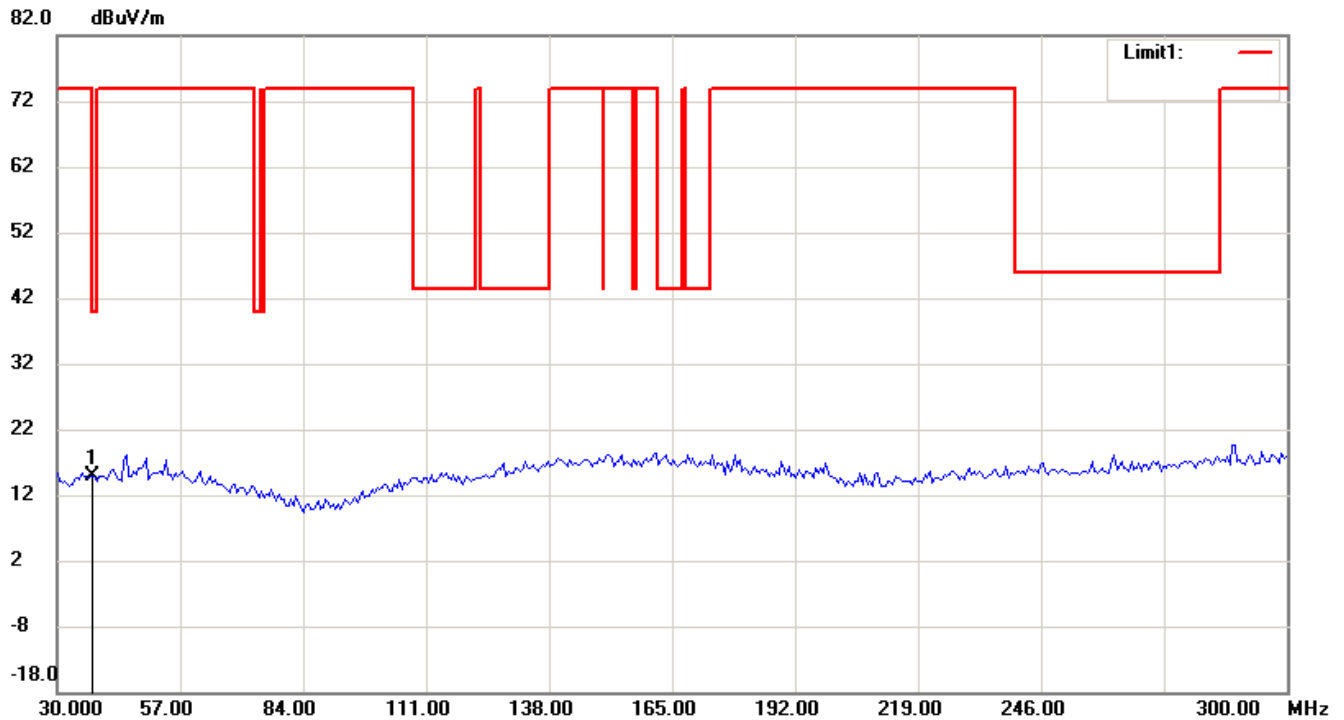

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

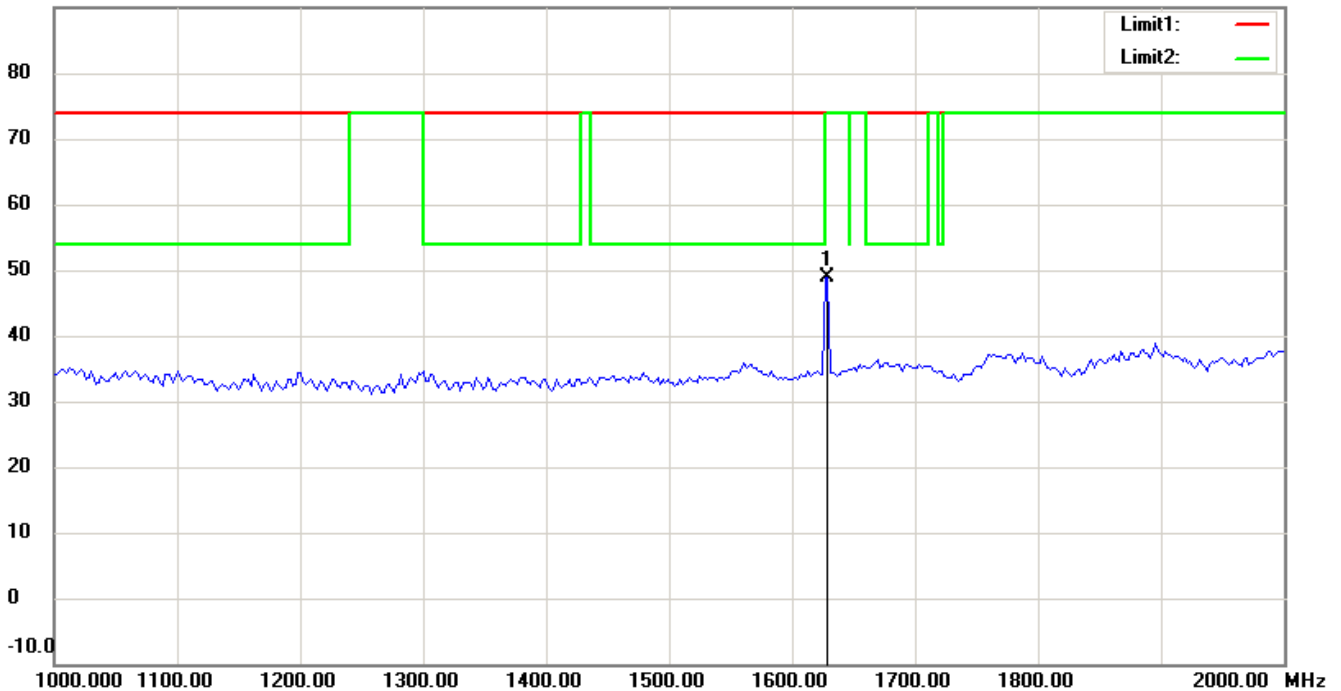

90.0 dBuV/m

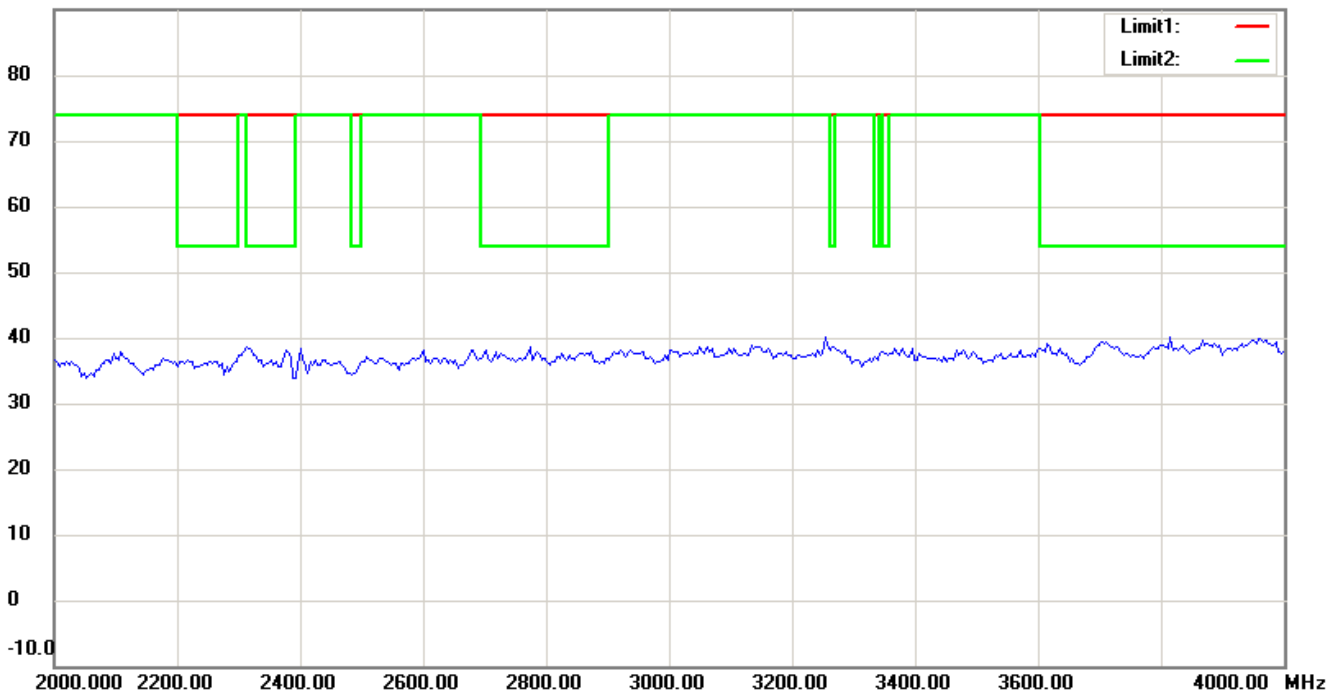


Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

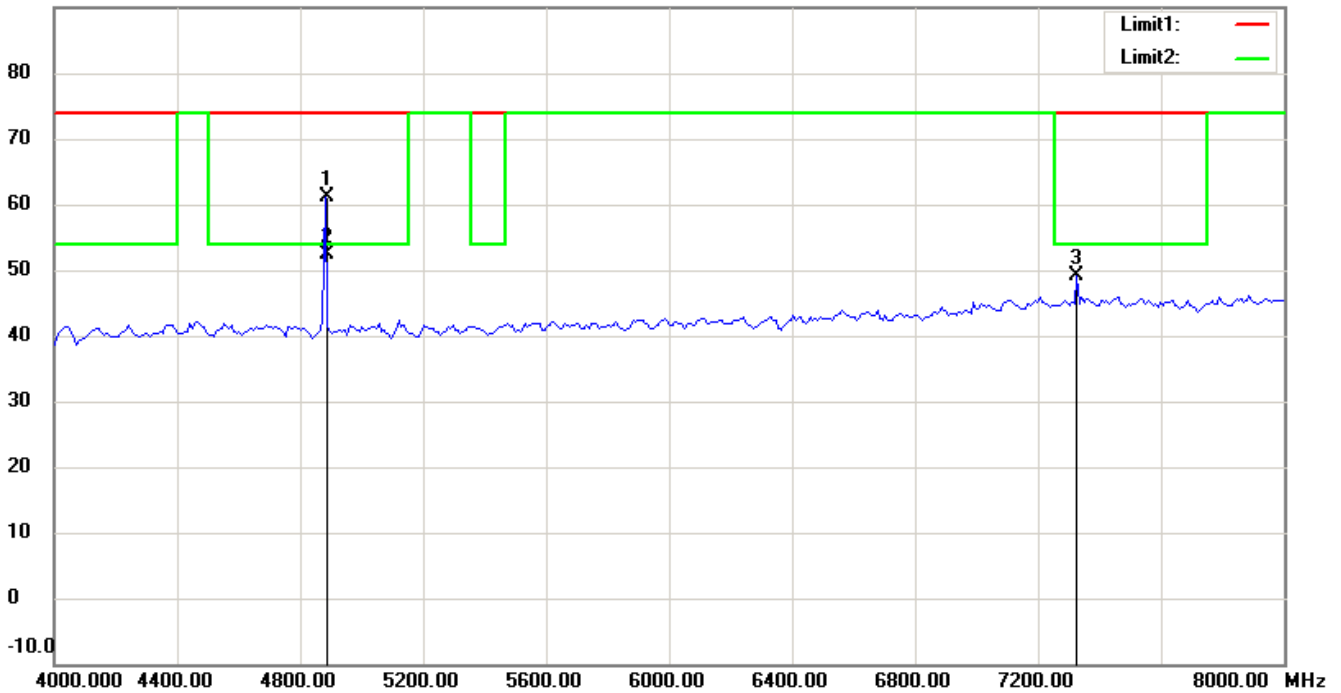

90.0 dBuV/m

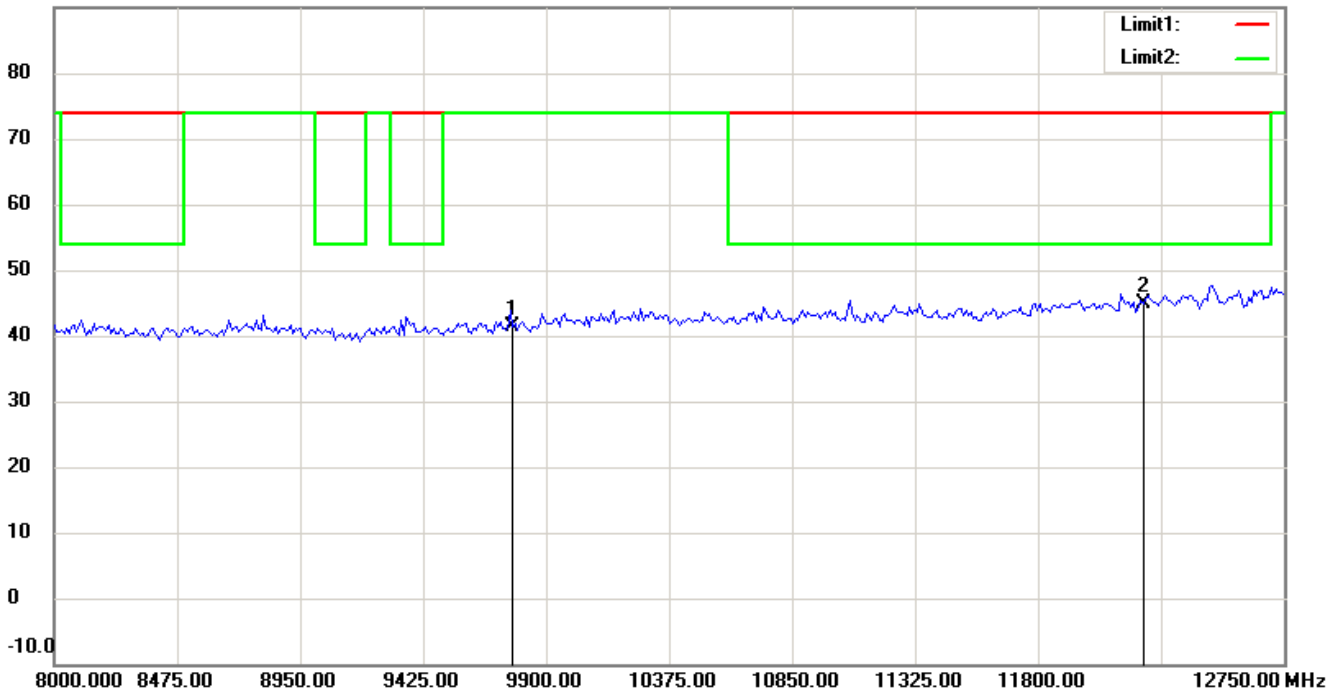

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

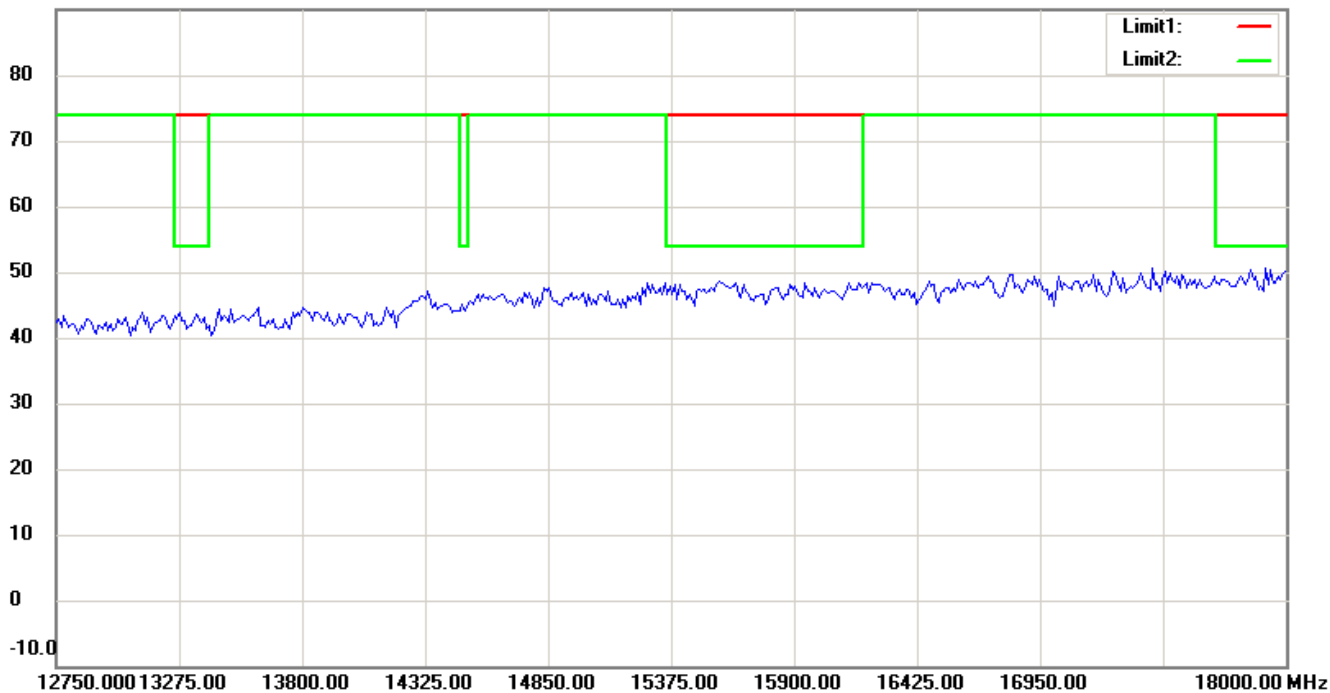

90.0 dBuV/m

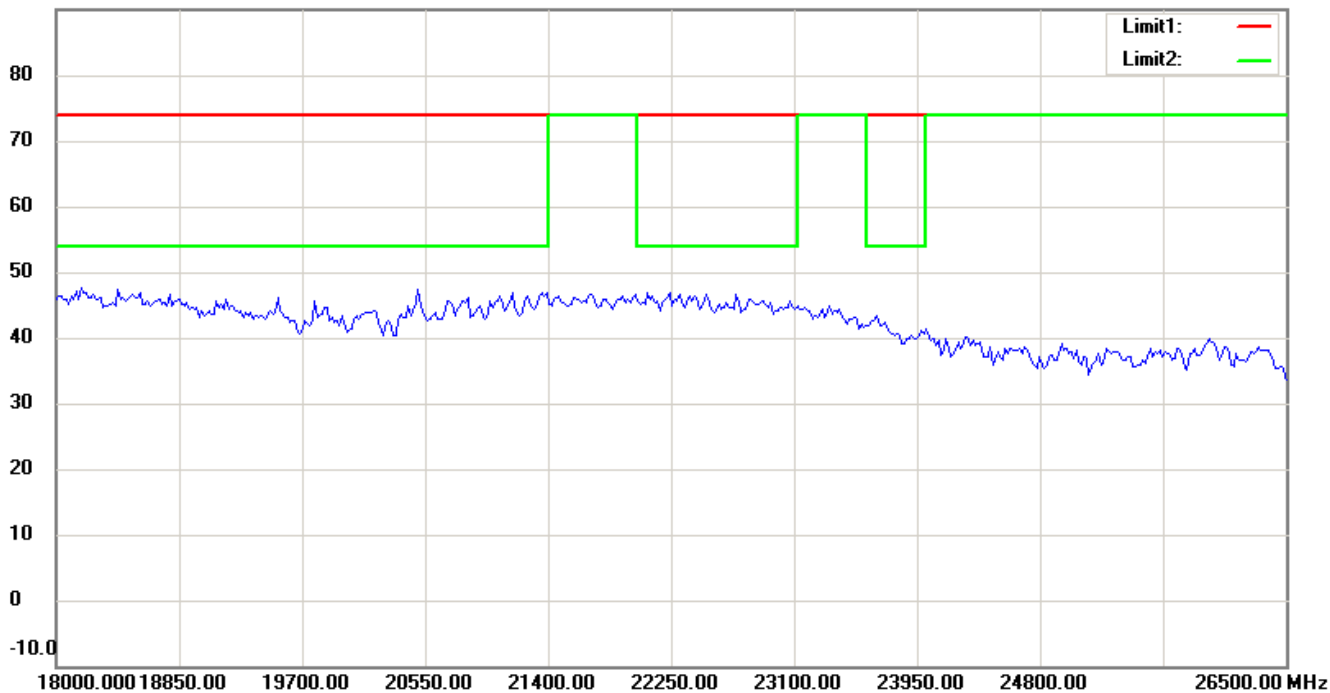

Up Line: Peak Limit Line Down Line: Ave Limit Line



Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

## Bluetooth 2480 MHz Antenna Polarization H

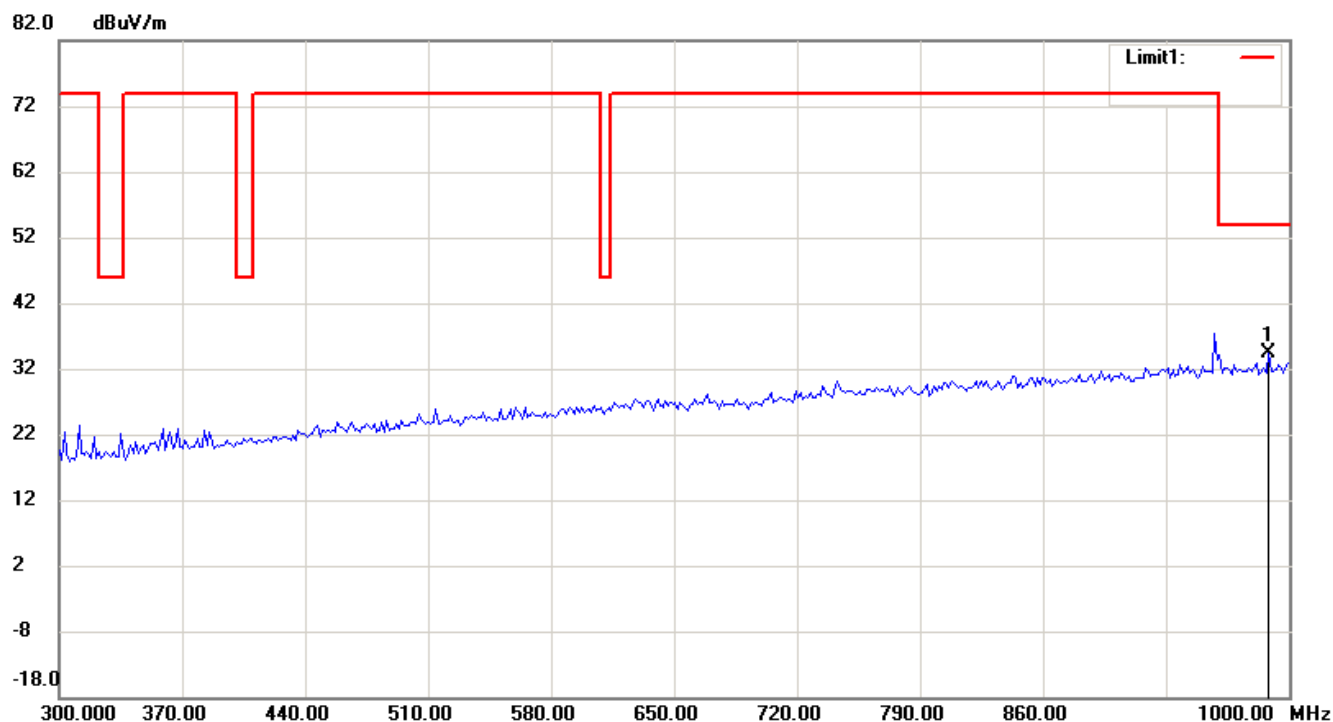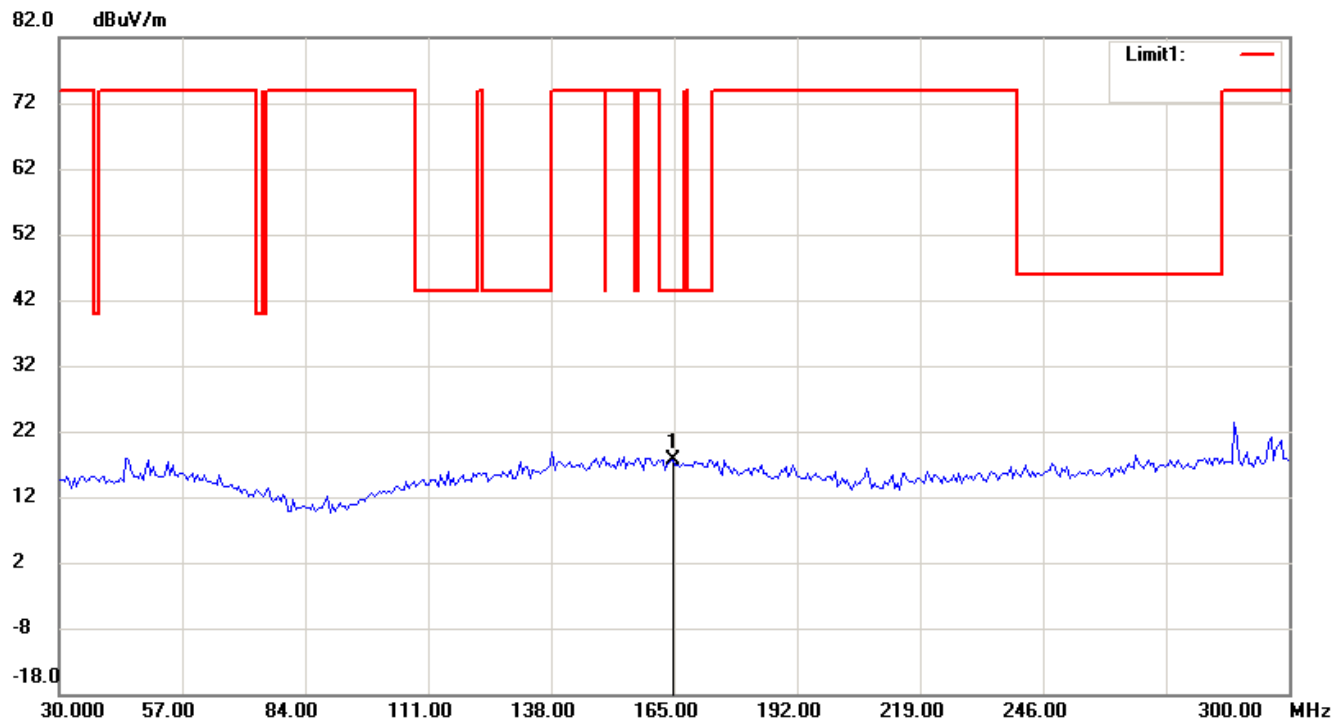

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

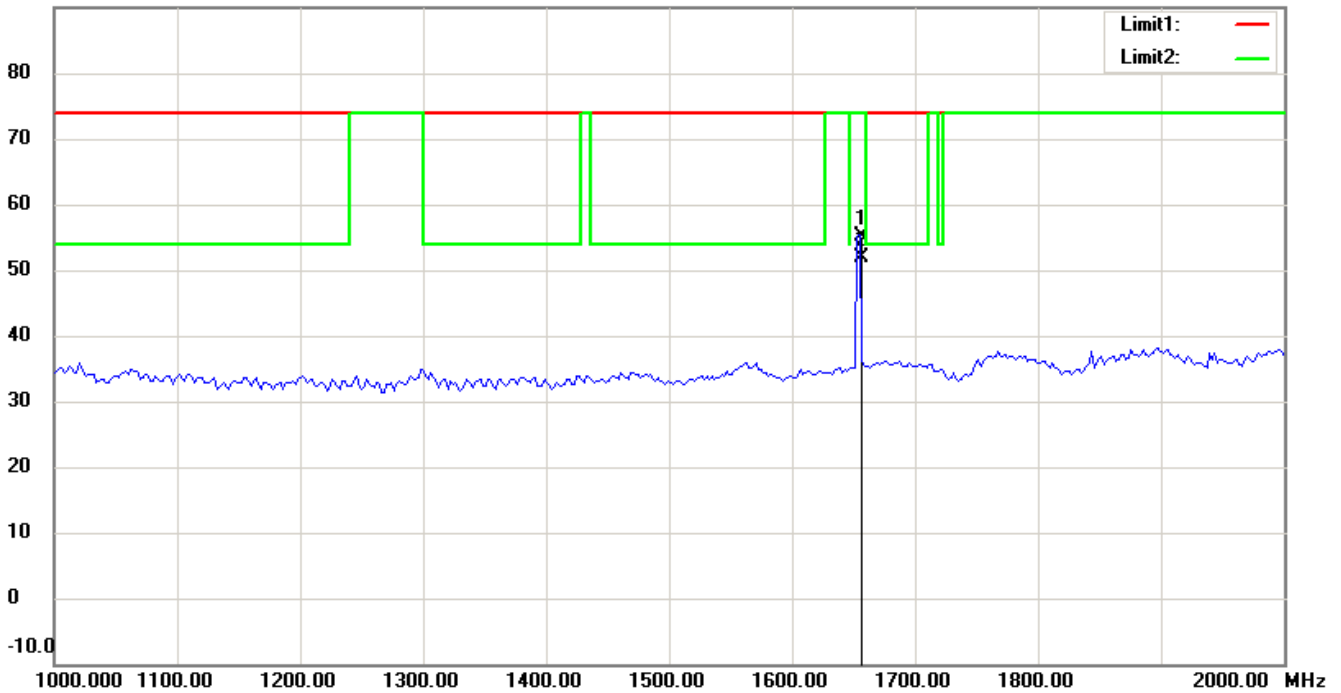


90.0 dBuV/m

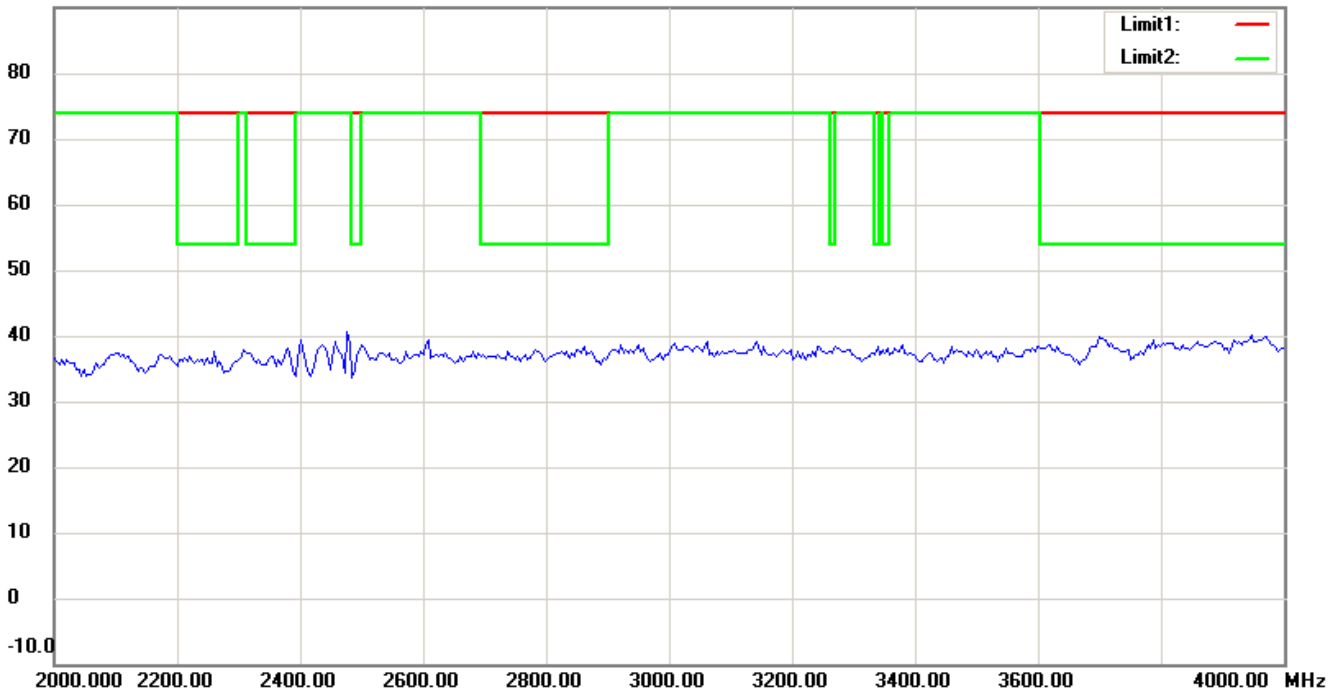

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

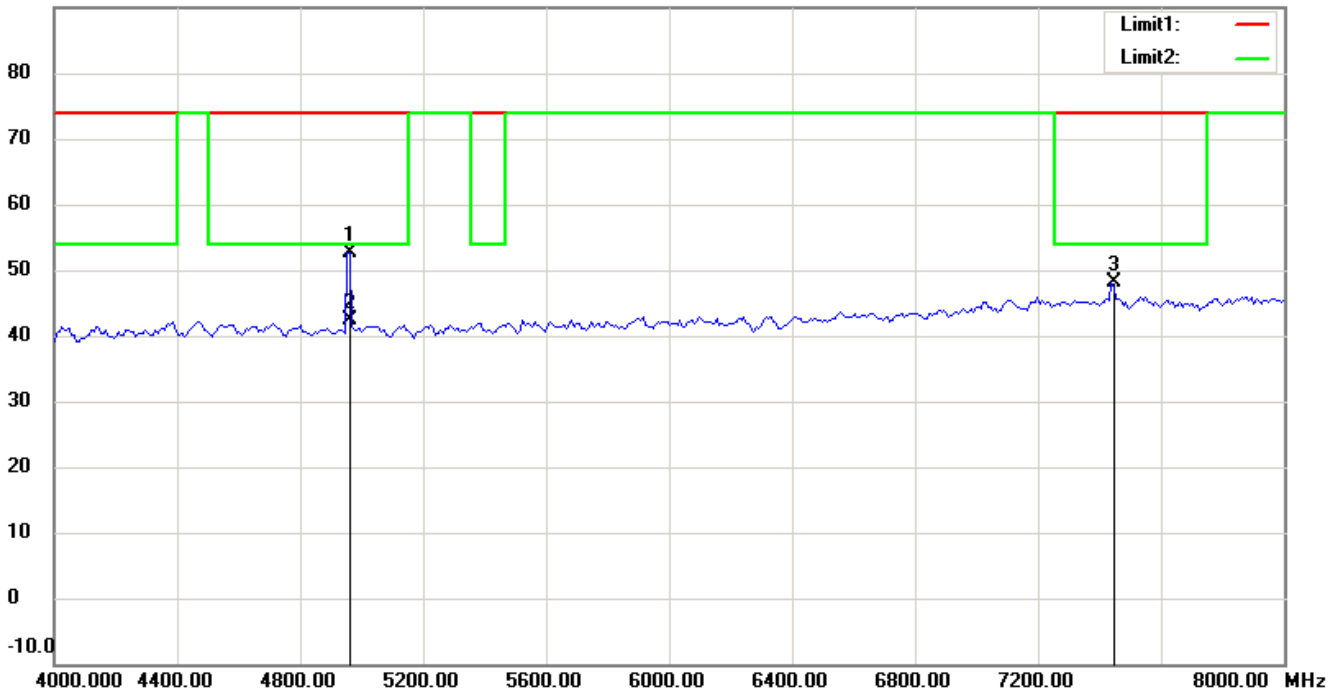

90.0 dBuV/m

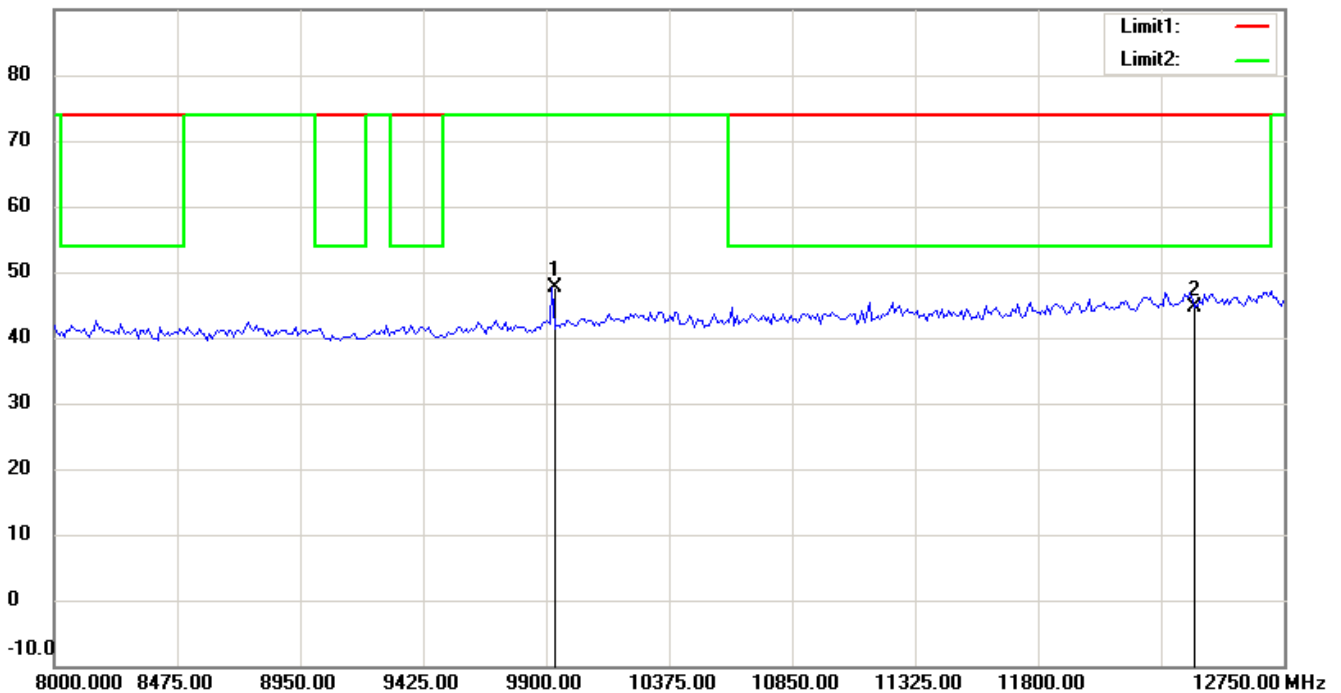

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

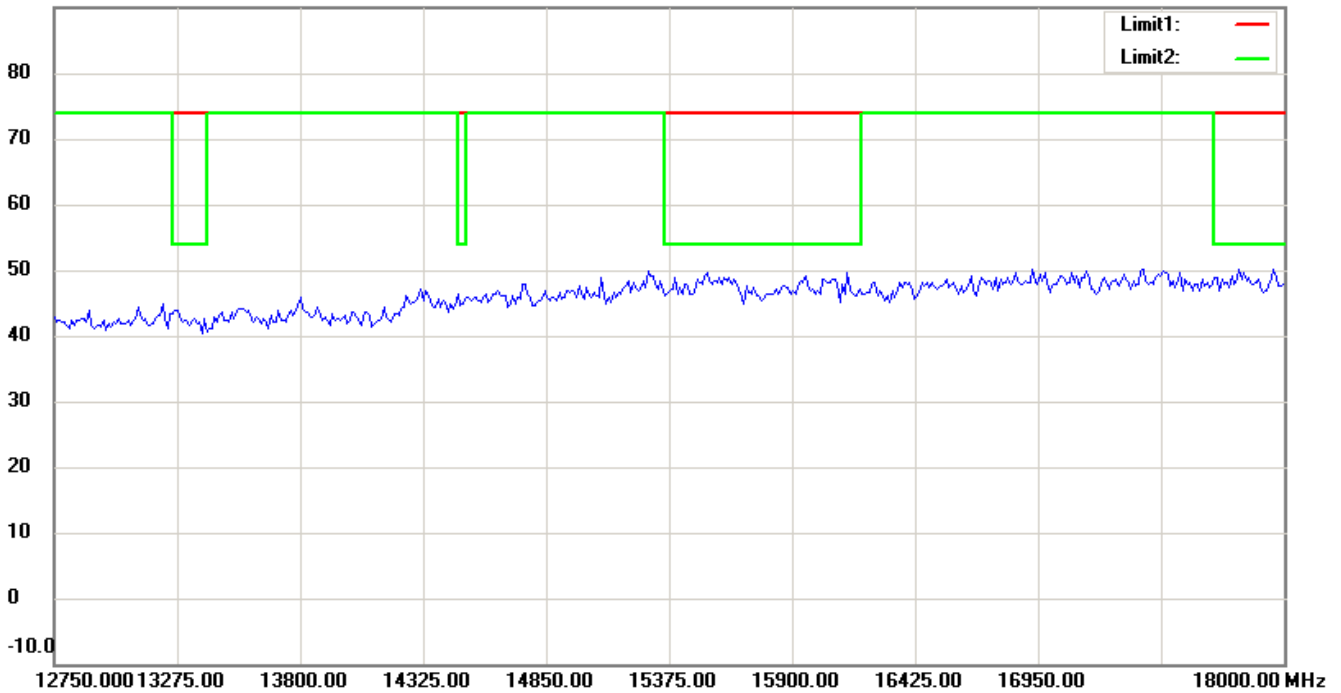

90.0 dBuV/m

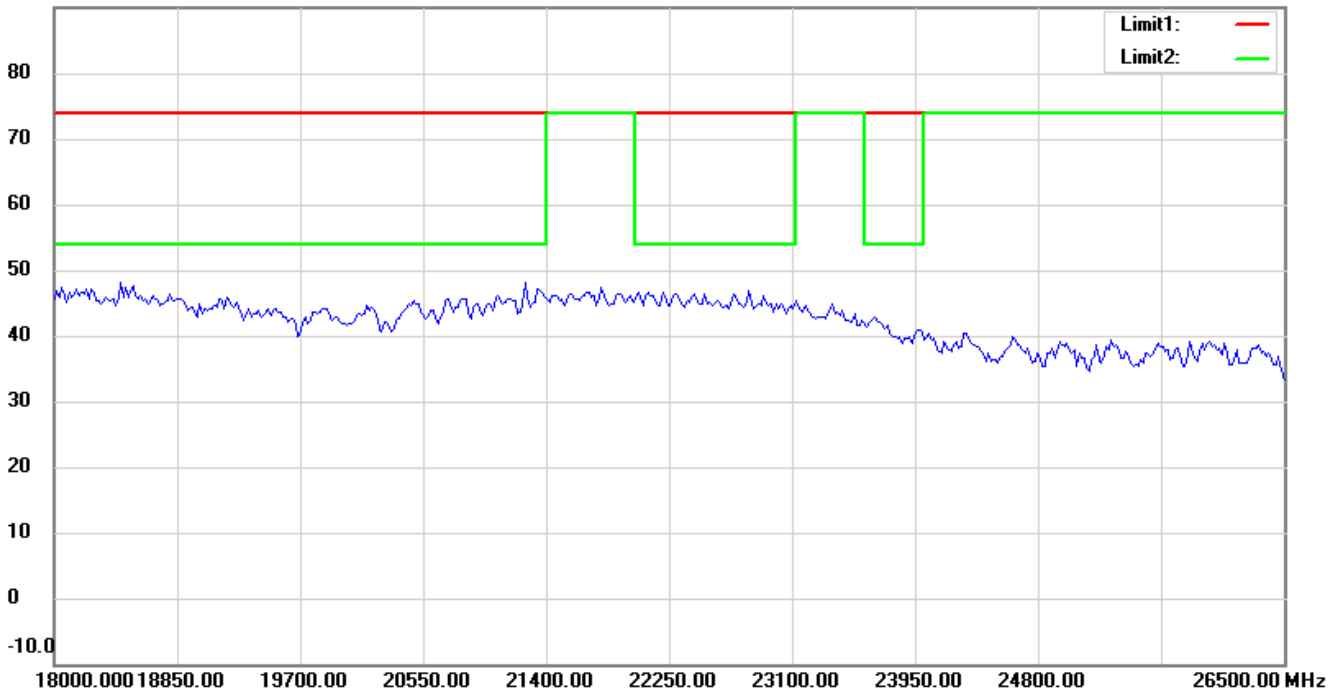

Up Line: Peak Limit Line Down Line: Ave Limit Line



Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3


## Antenna Polarization V

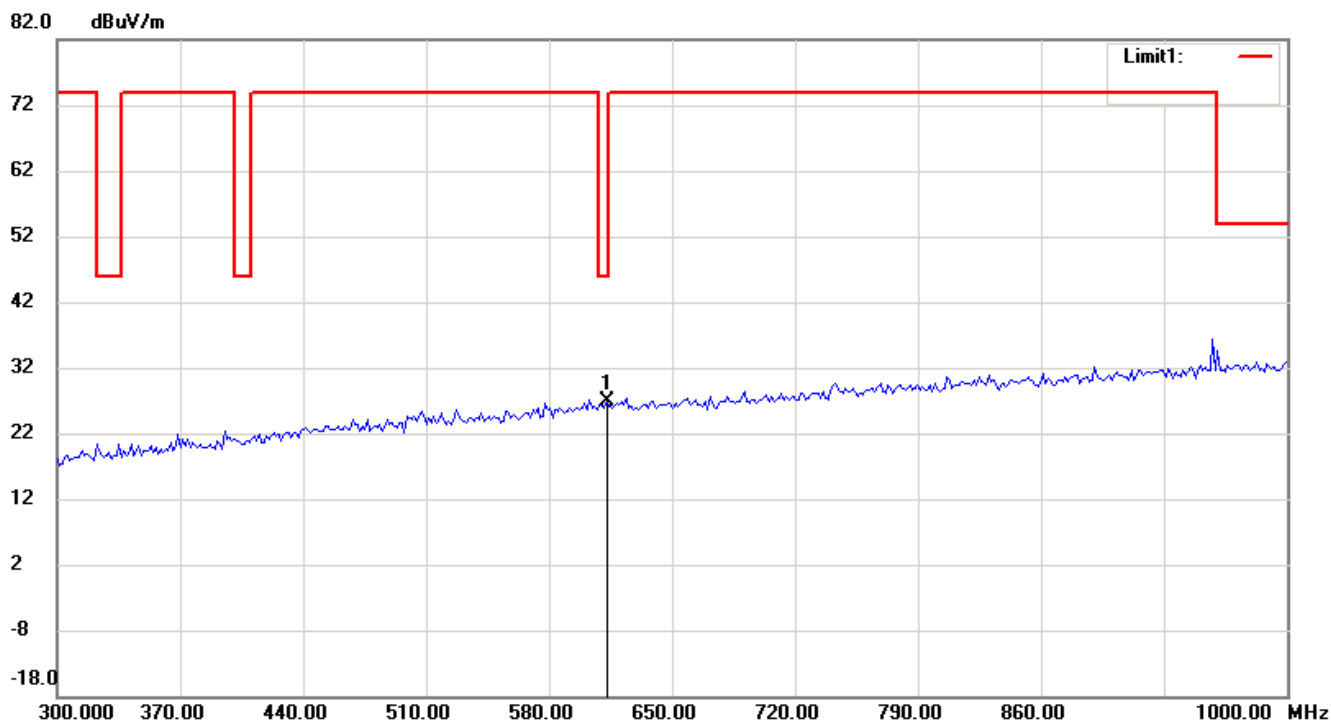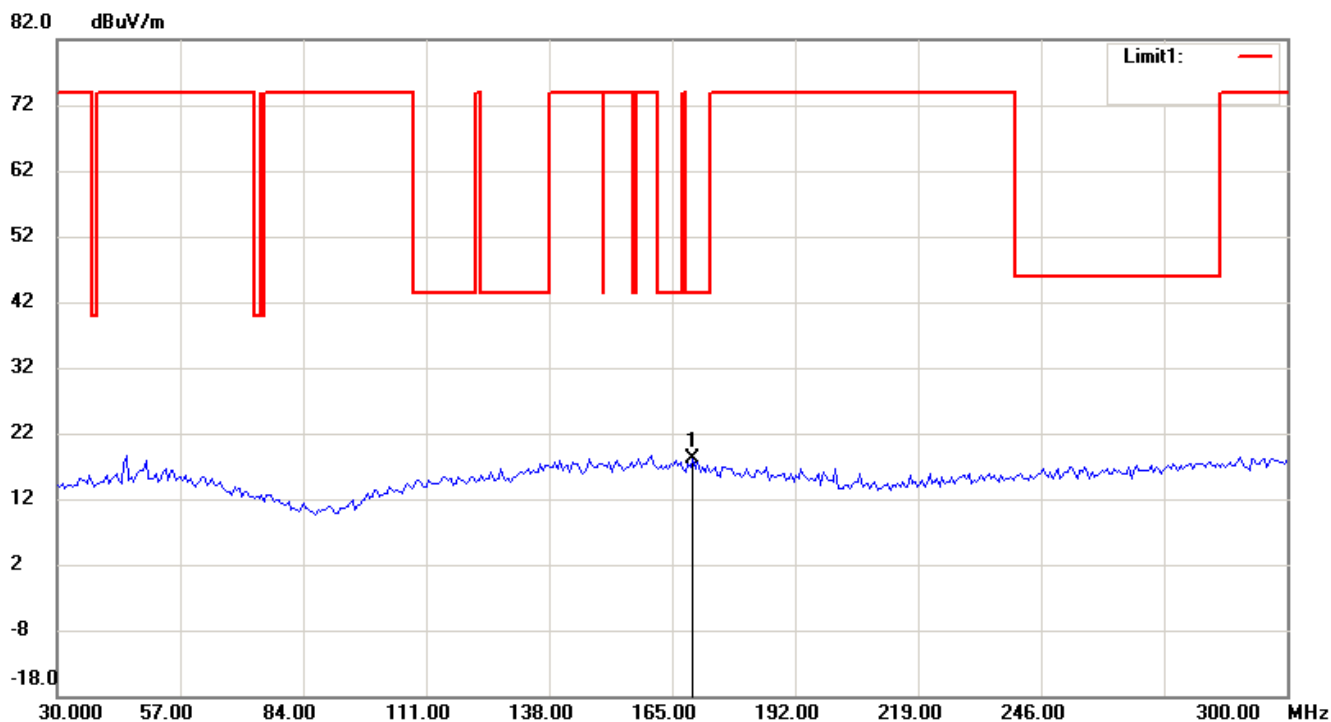

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

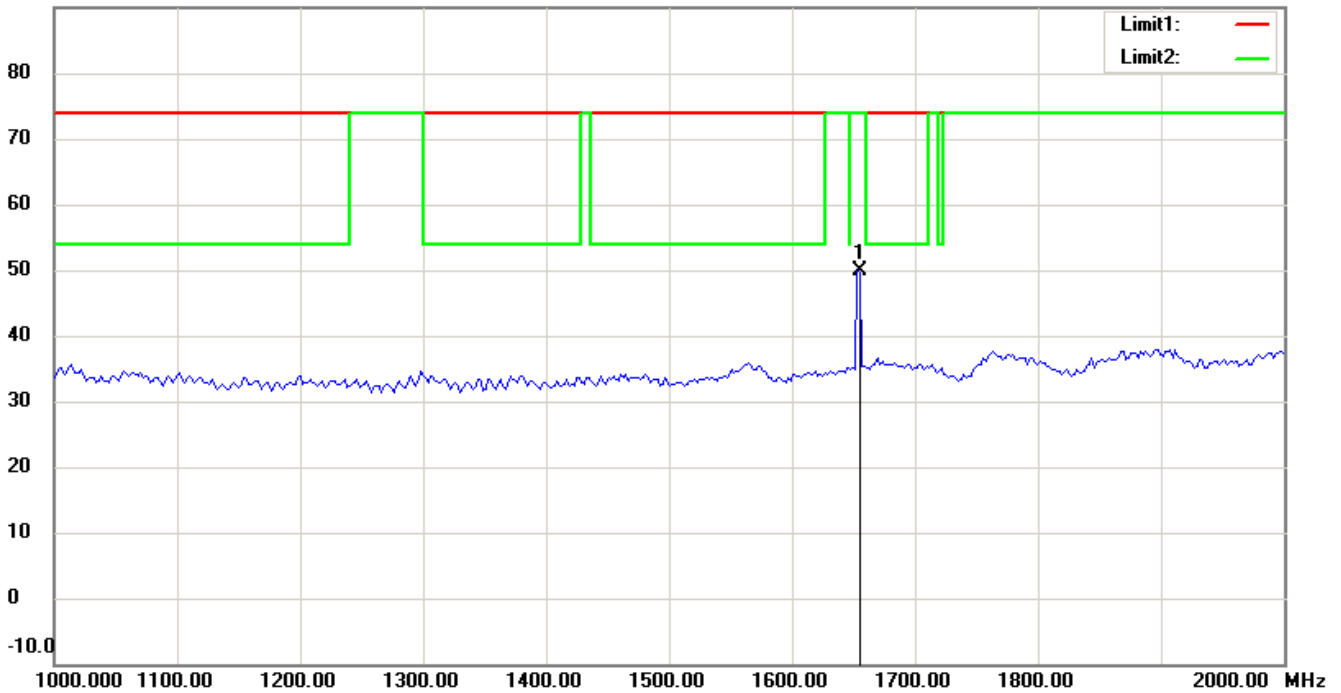

90.0 dBuV/m

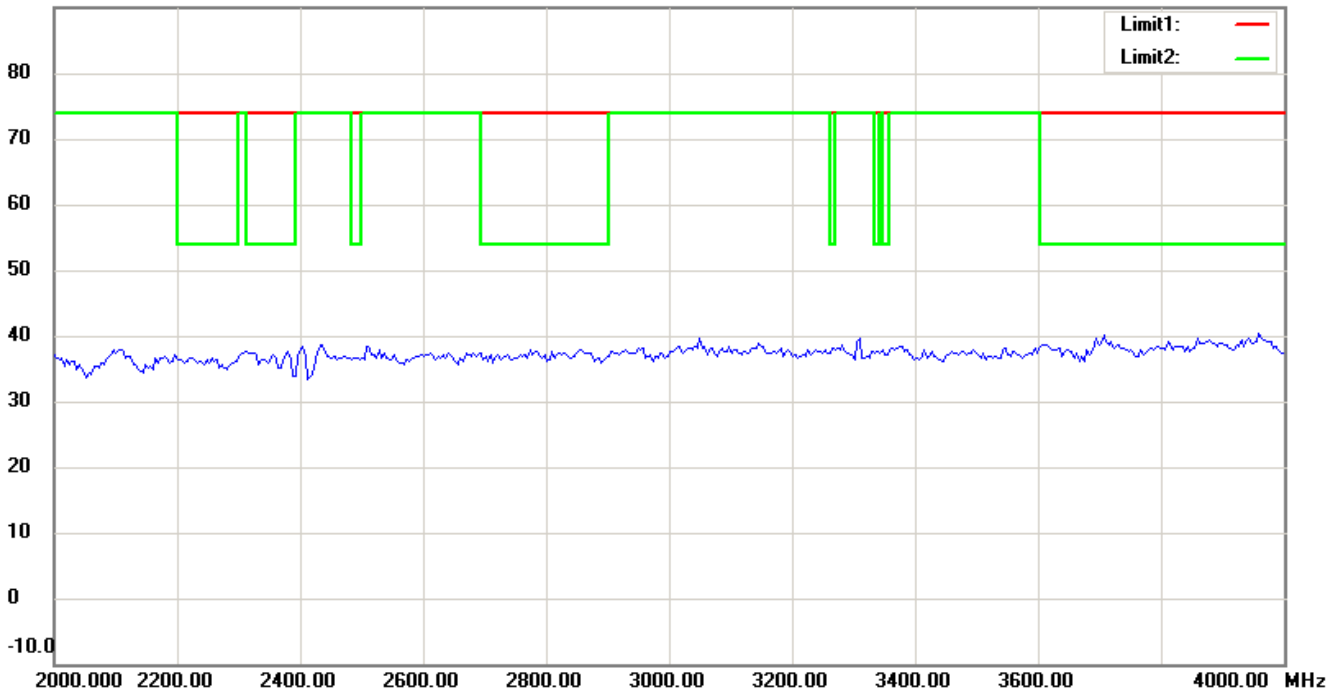

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:



1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

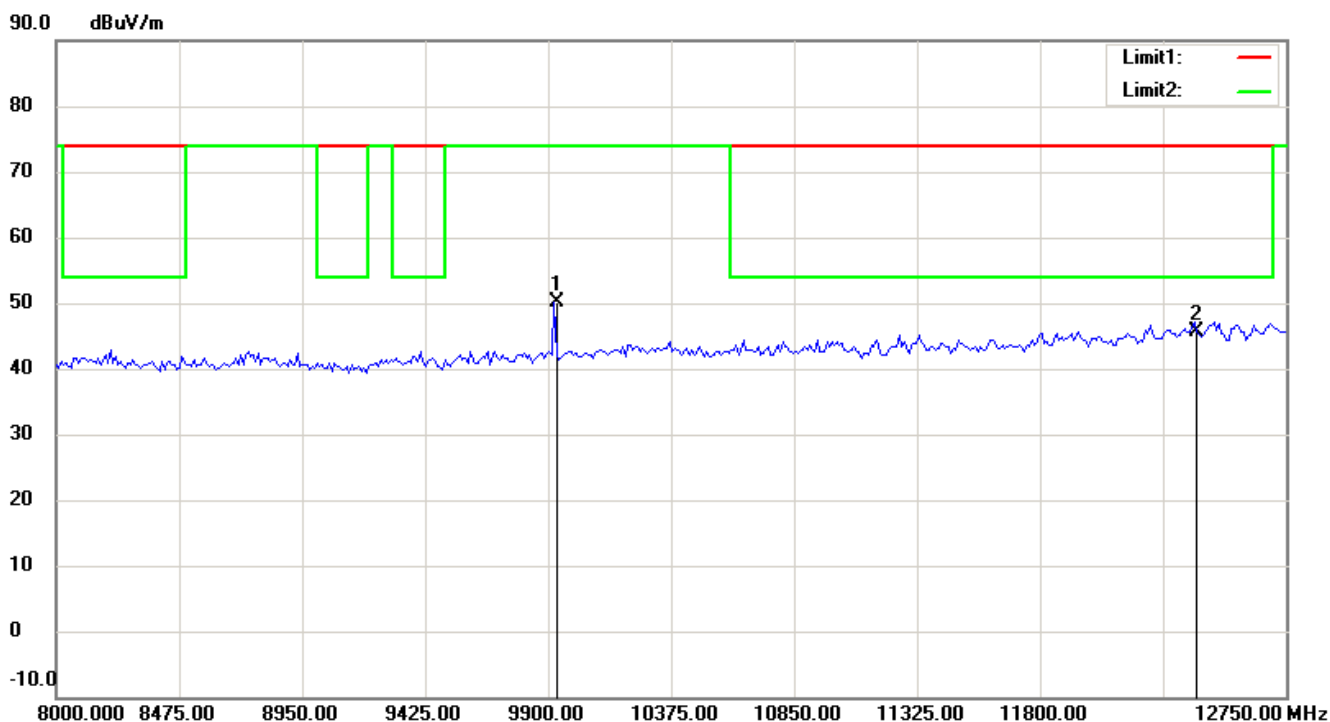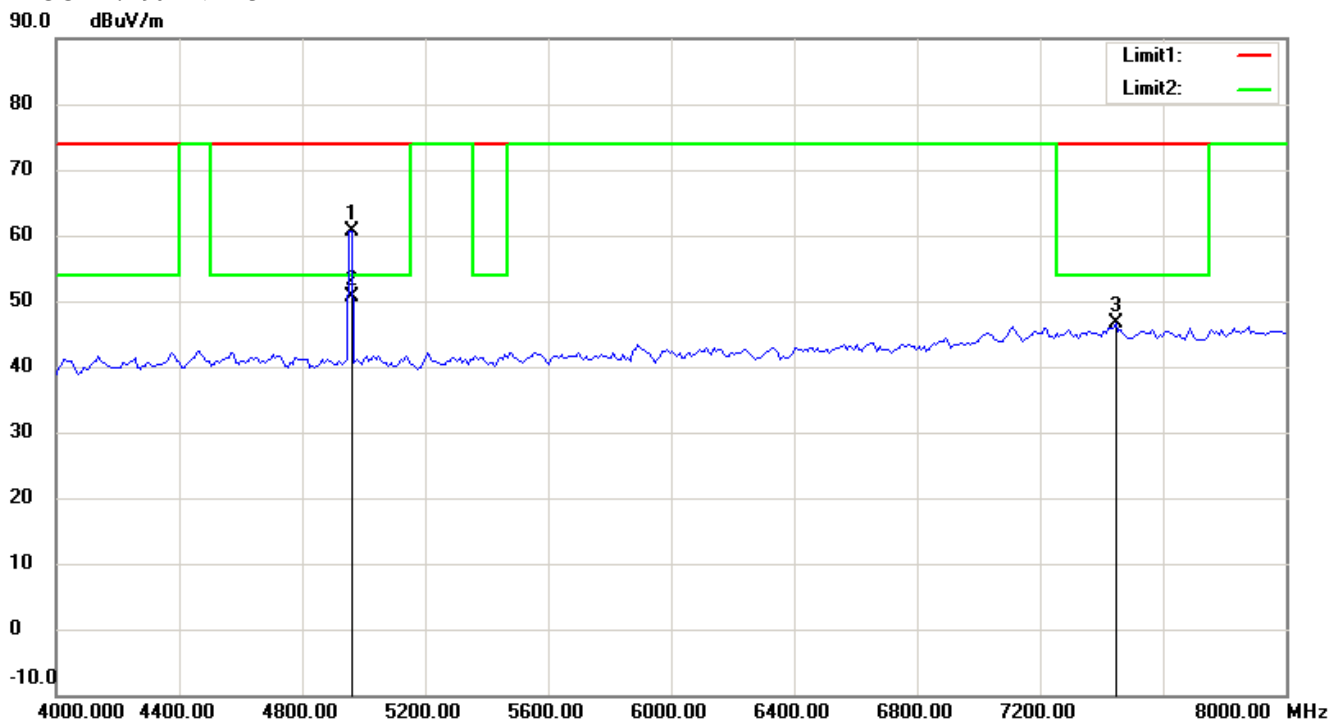

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

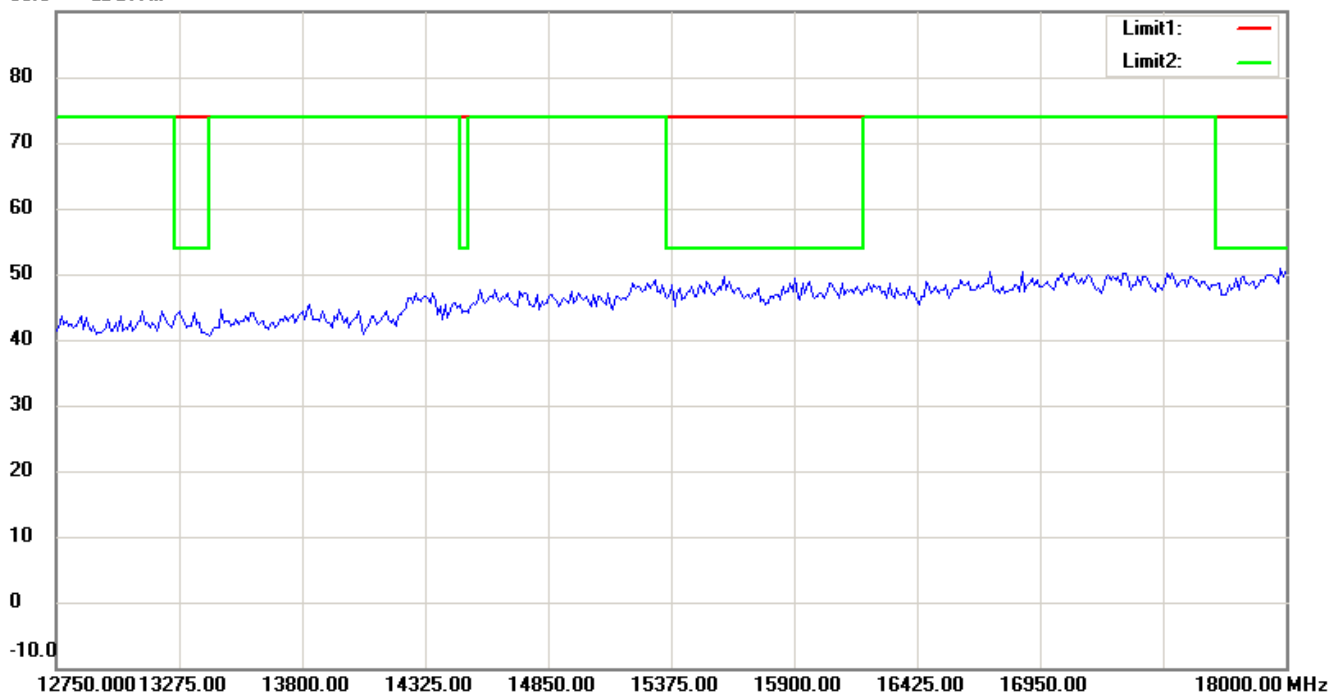


90.0 dBuV/m

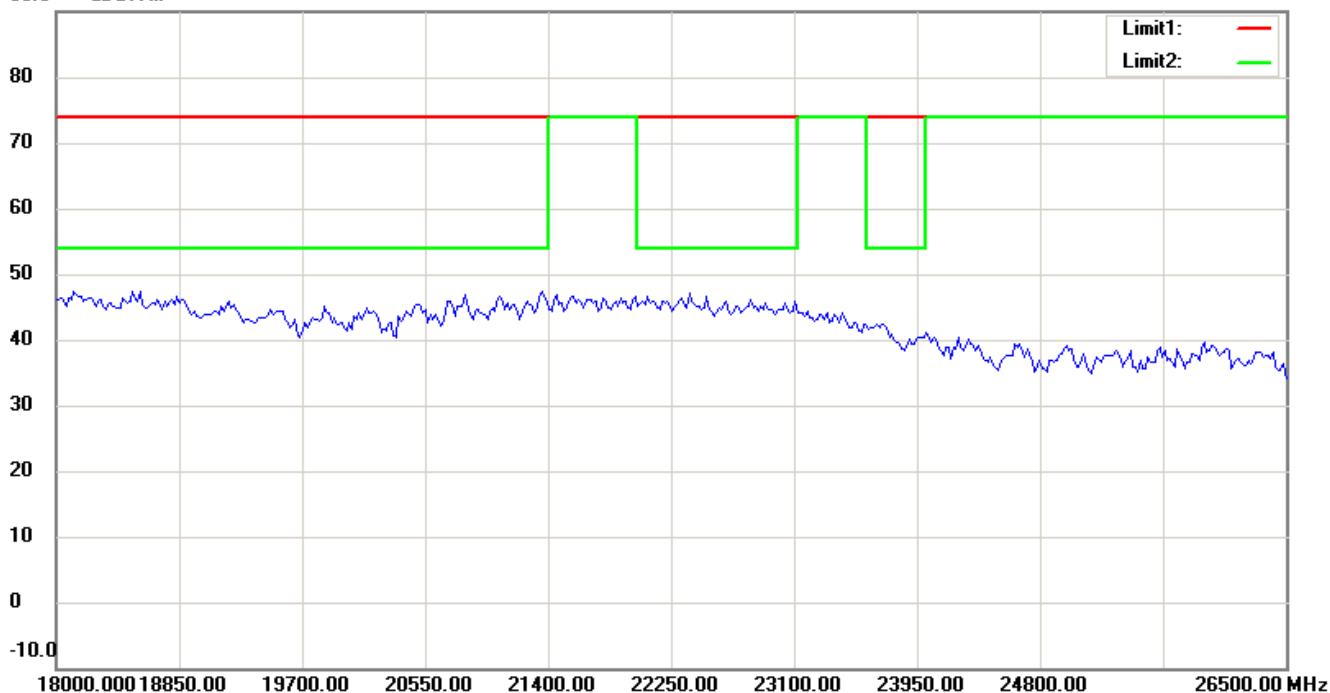

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

Spurious Emissions radiated-RX

Bluetooth 2402 MHz


Antenna Polarization H

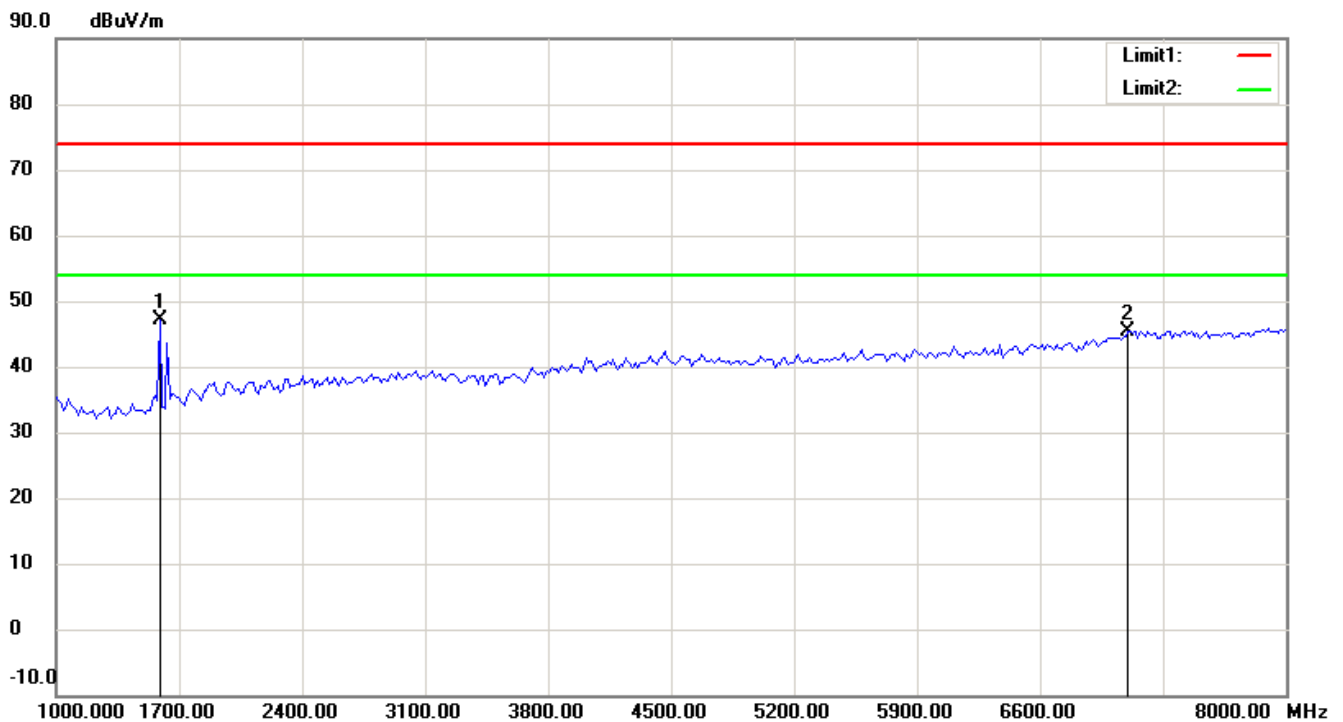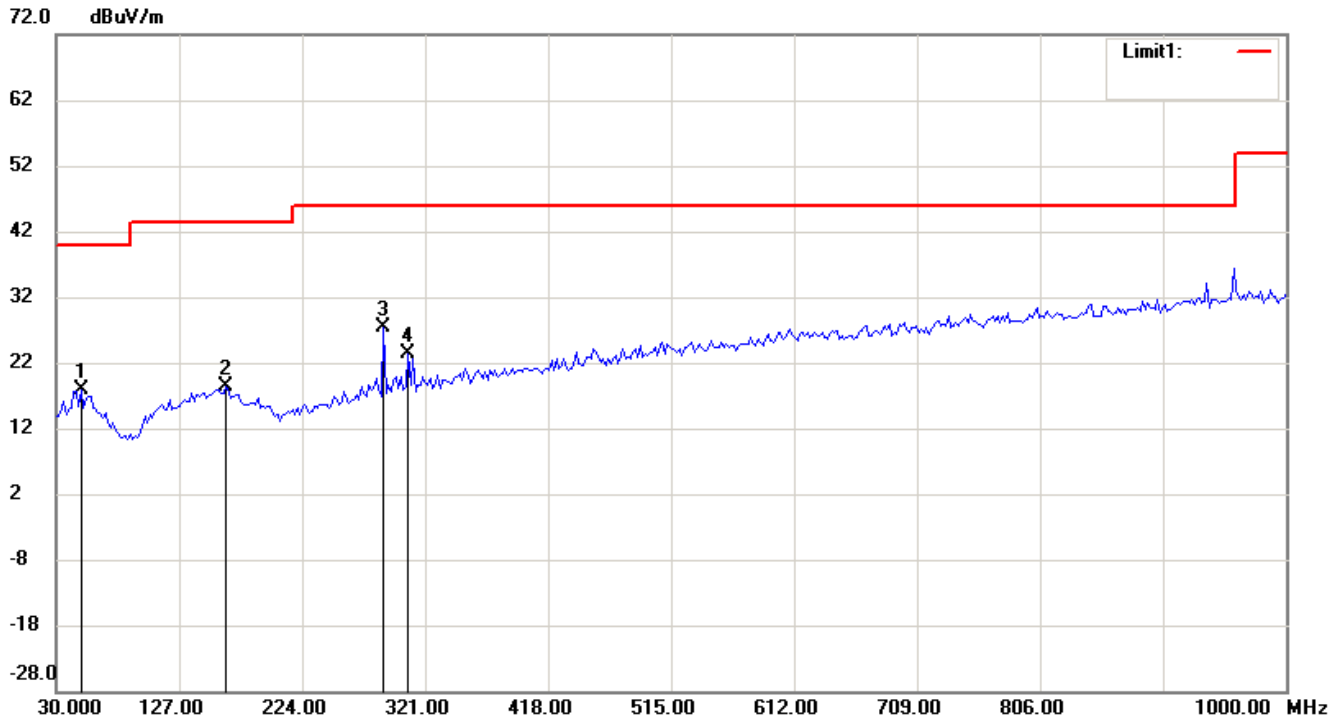

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

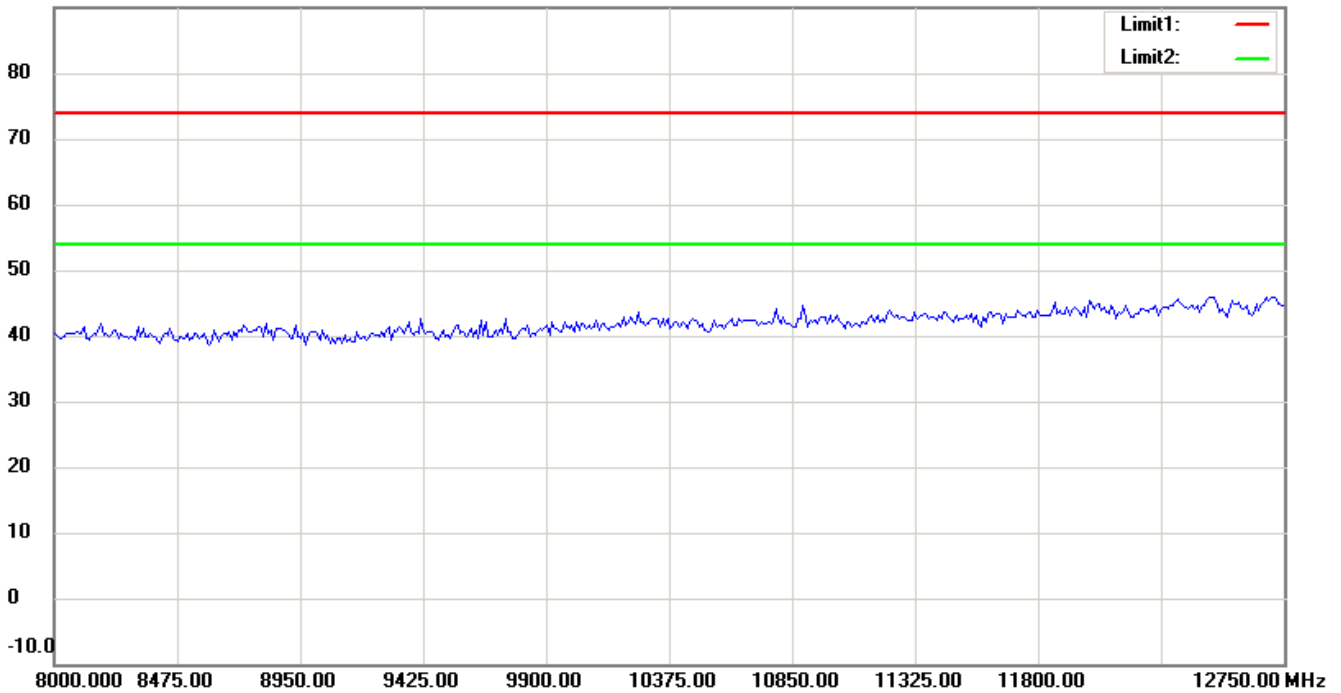


90.0 dBuV/m

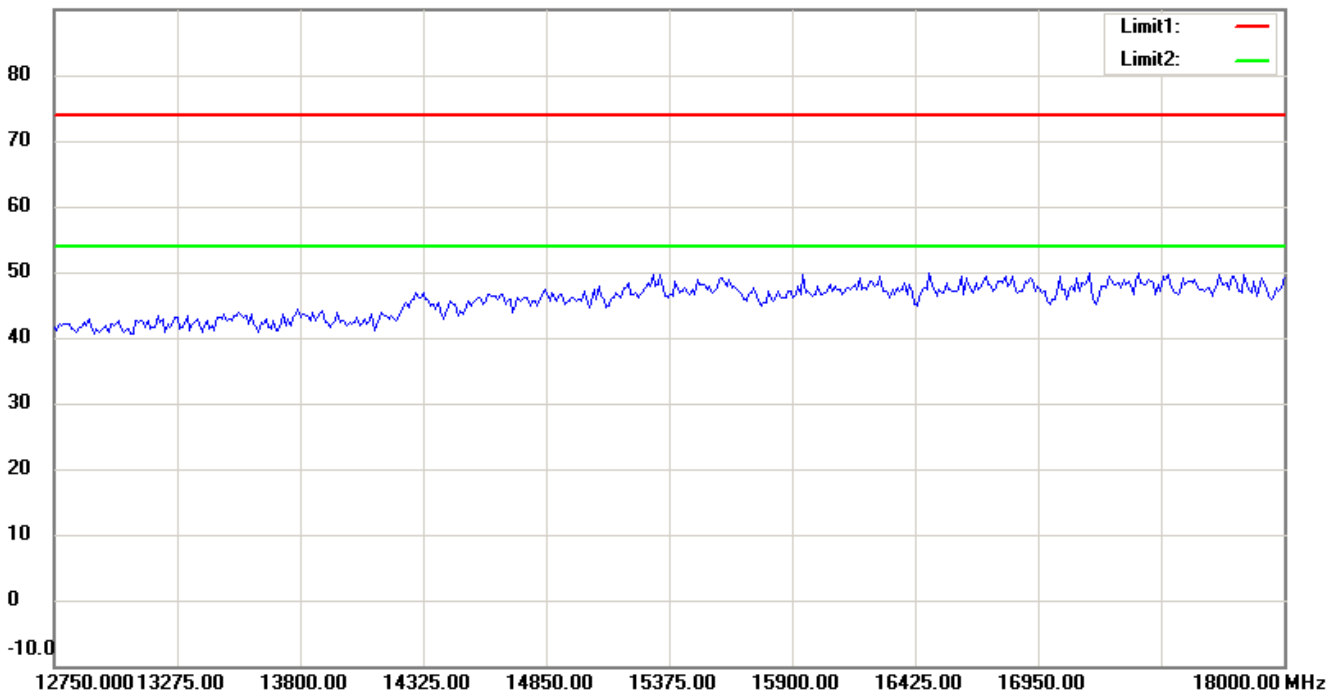

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

90.0 dBuV/m

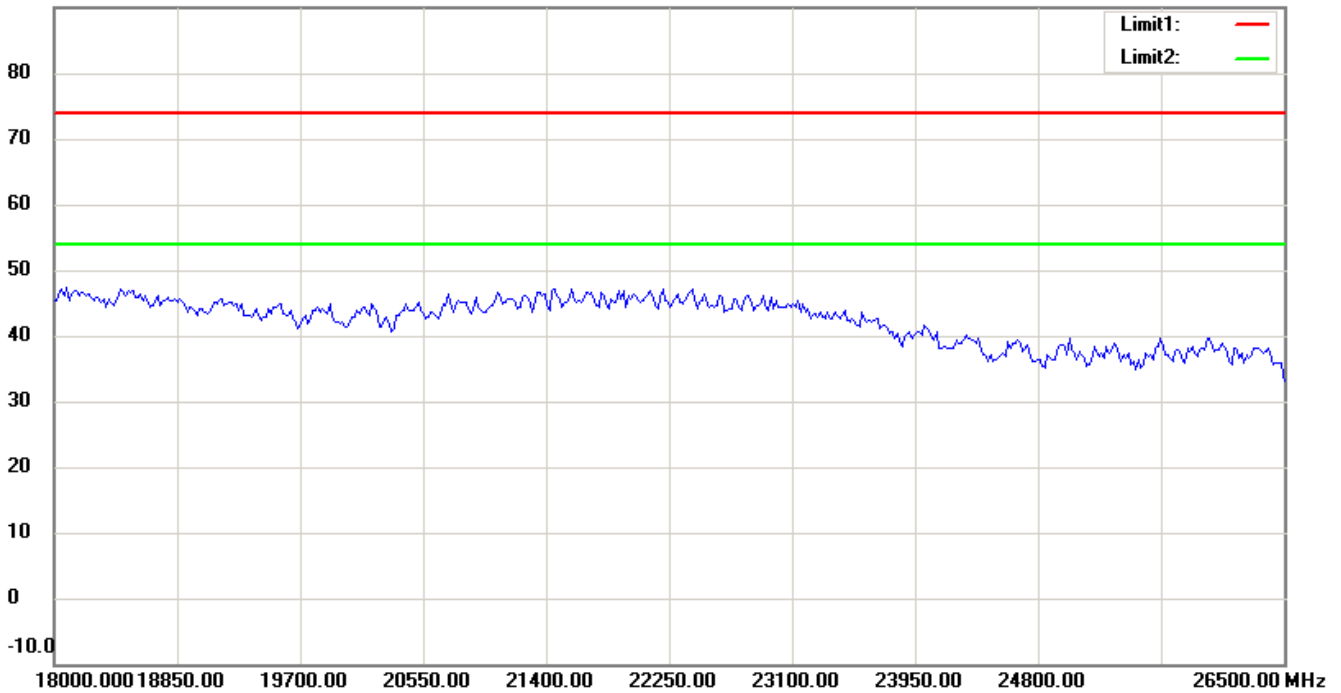

## Antenna Polarization V

72.0 dBuV/m

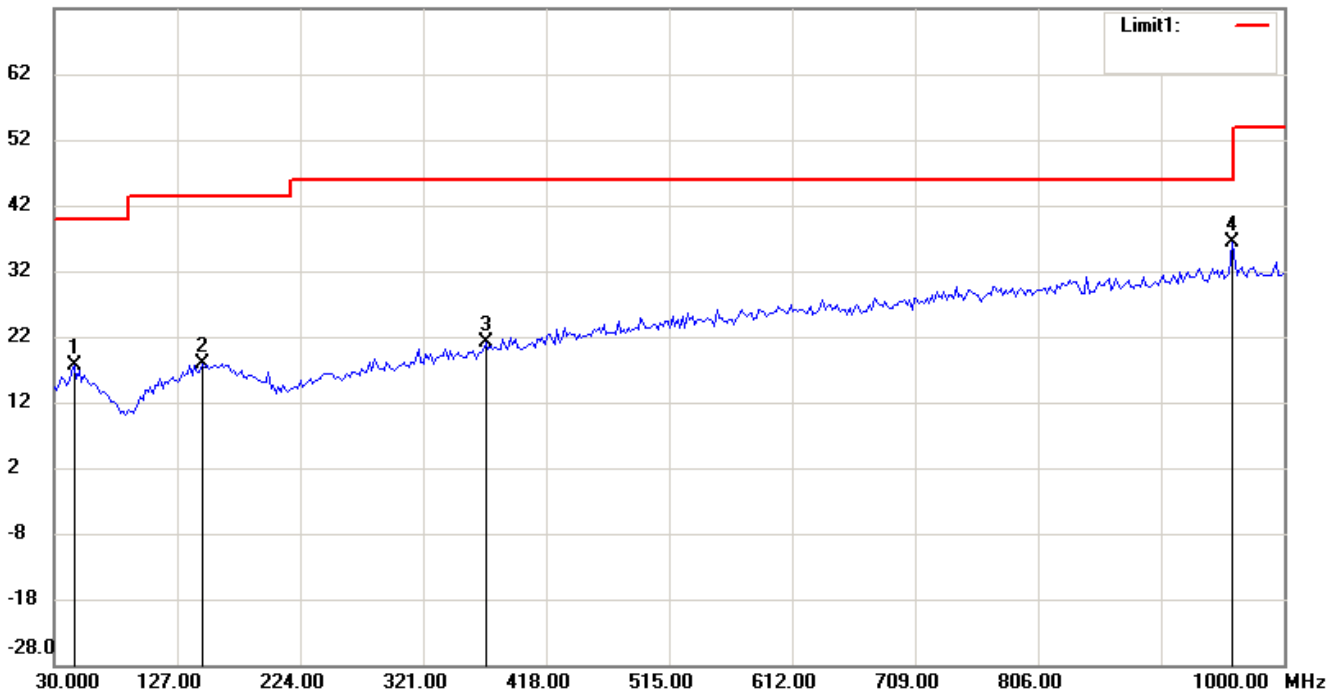

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

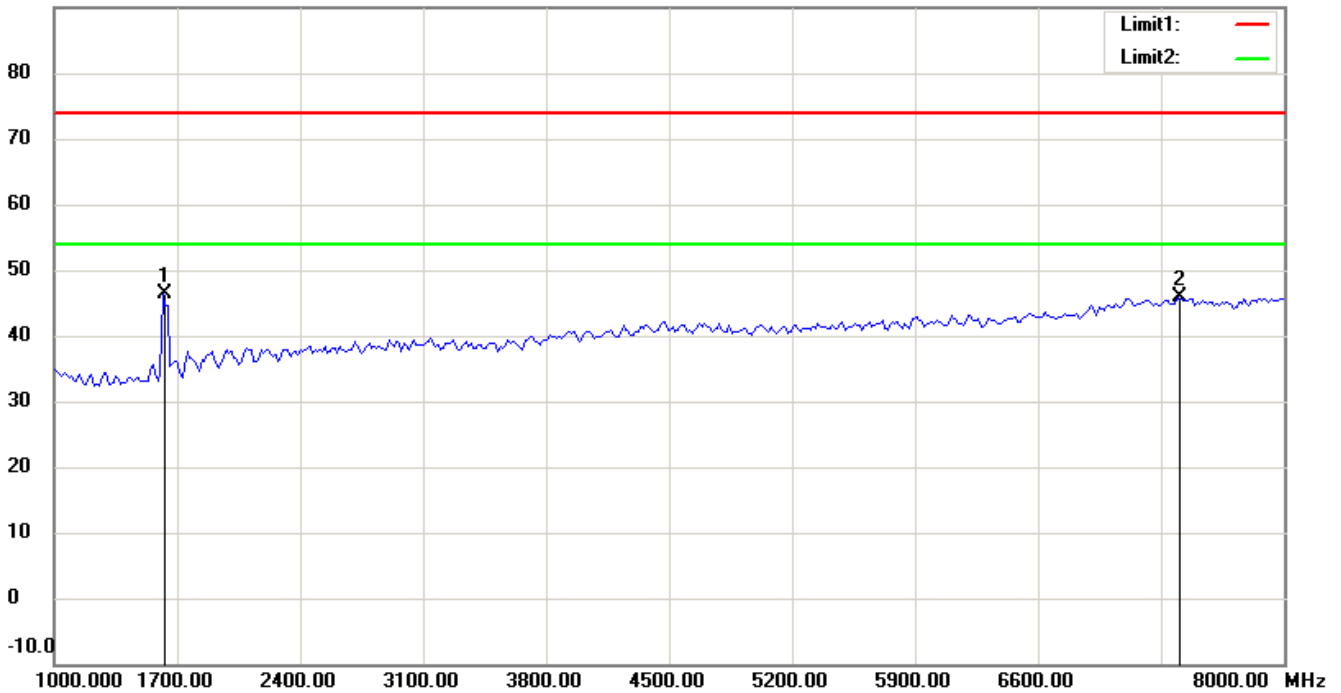


90.0 dBuV/m

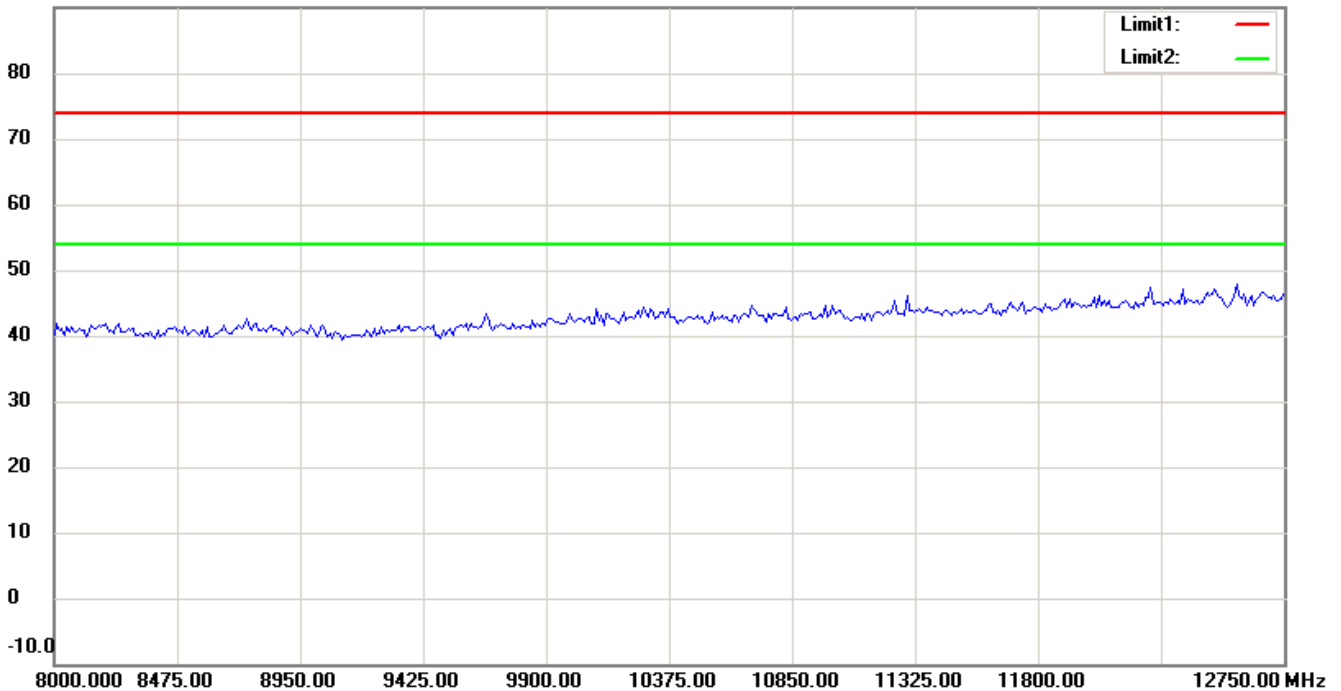

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

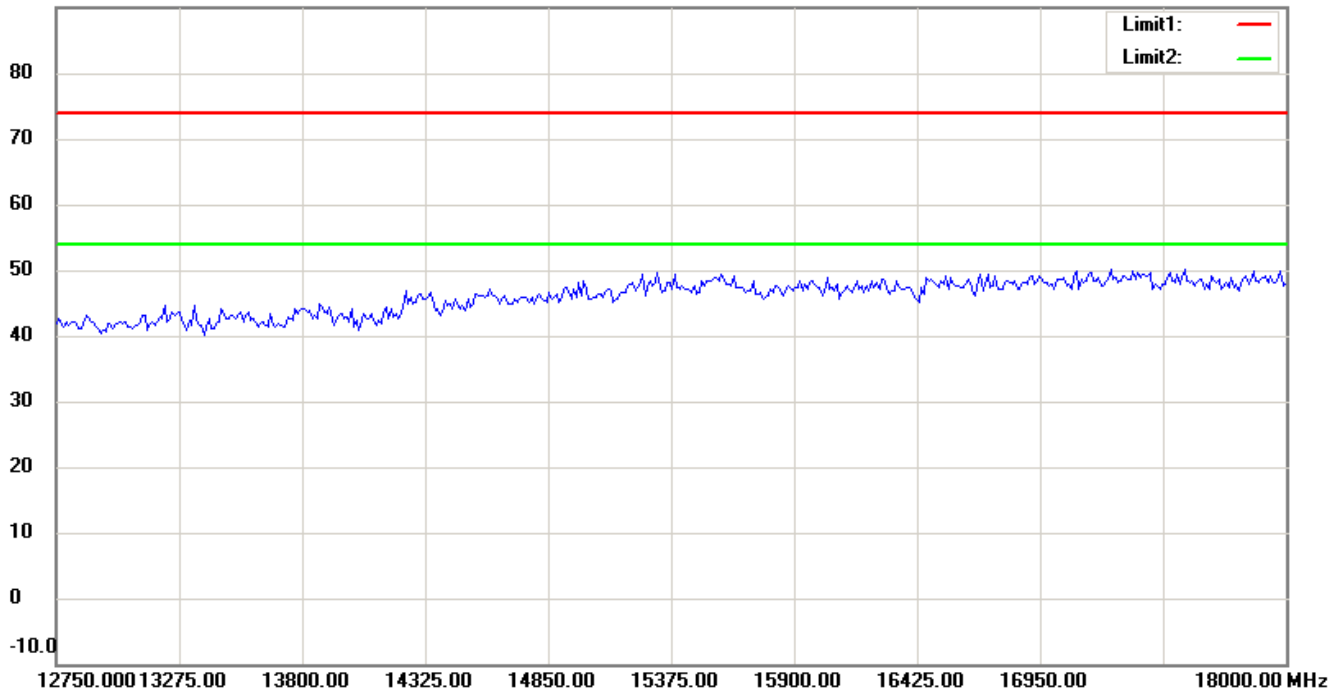

90.0 dBuV/m

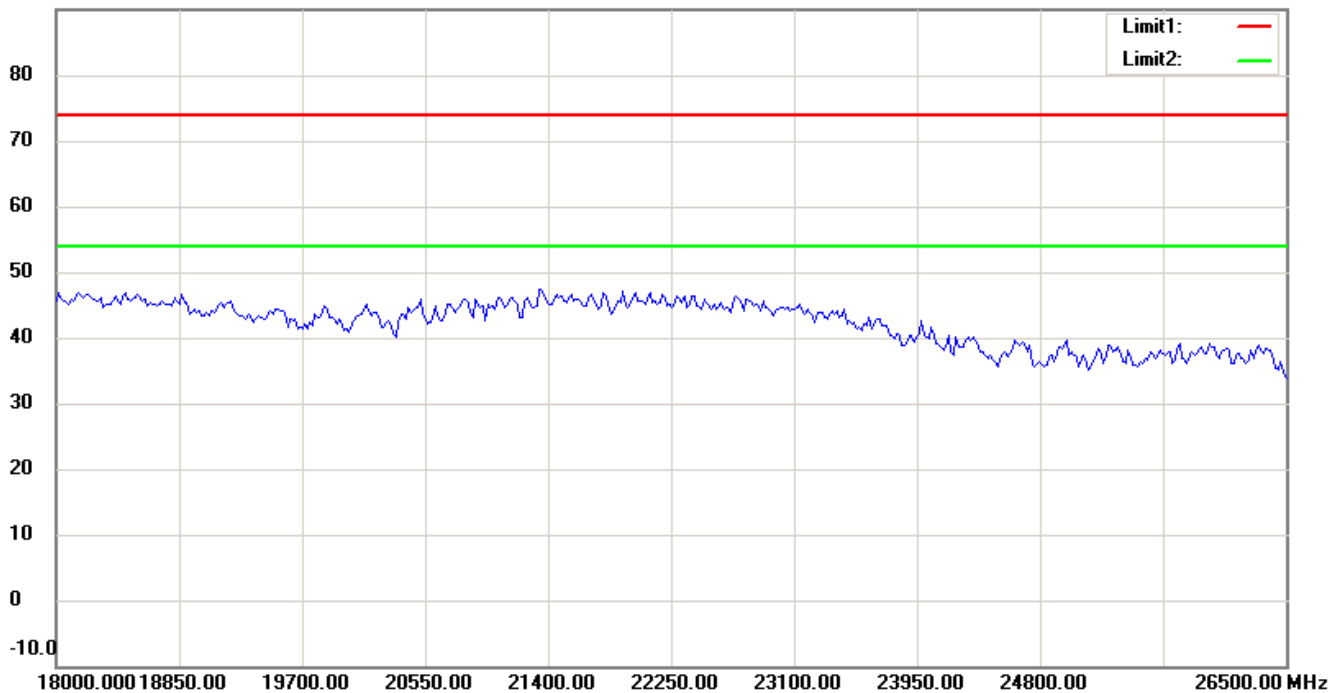

Up Line: Peak Limit Line Down Line: Ave Limit Line


Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1  
 FCC ID:T9JRN41-3

Bluetooth 2441 MHz  
 Antenna Polarization H

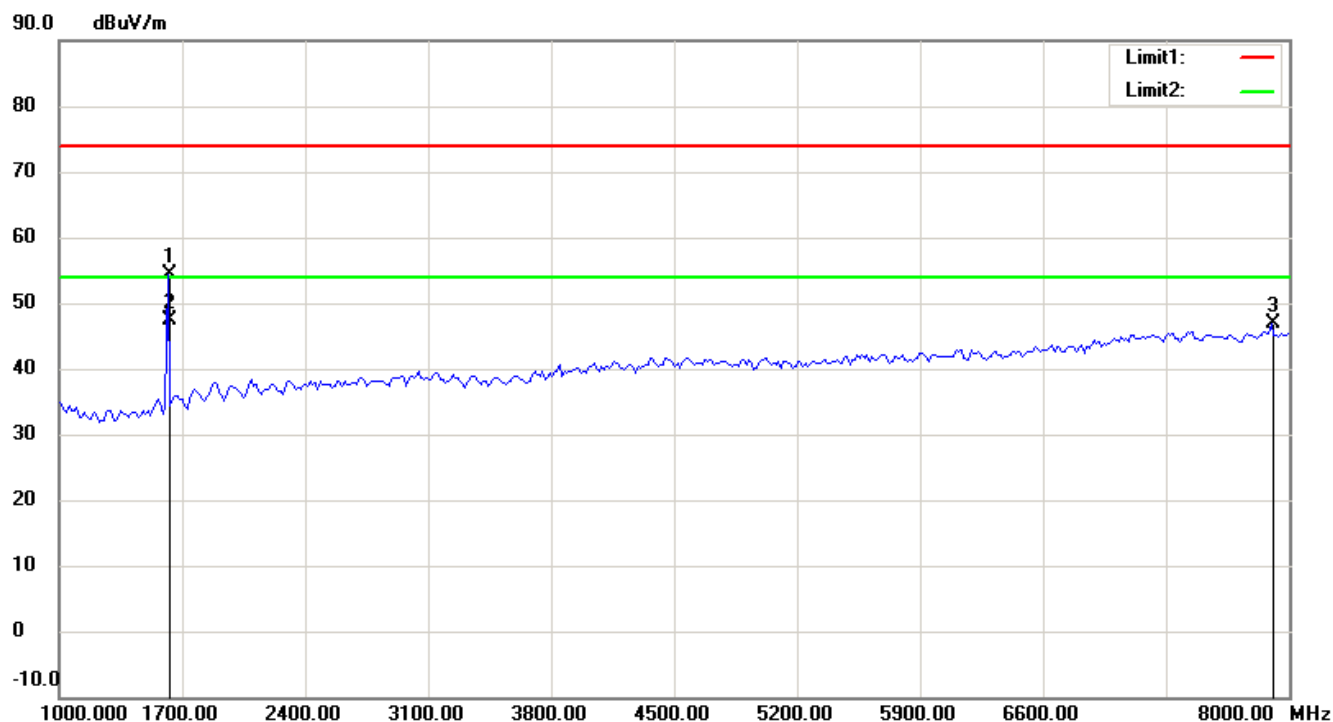


Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

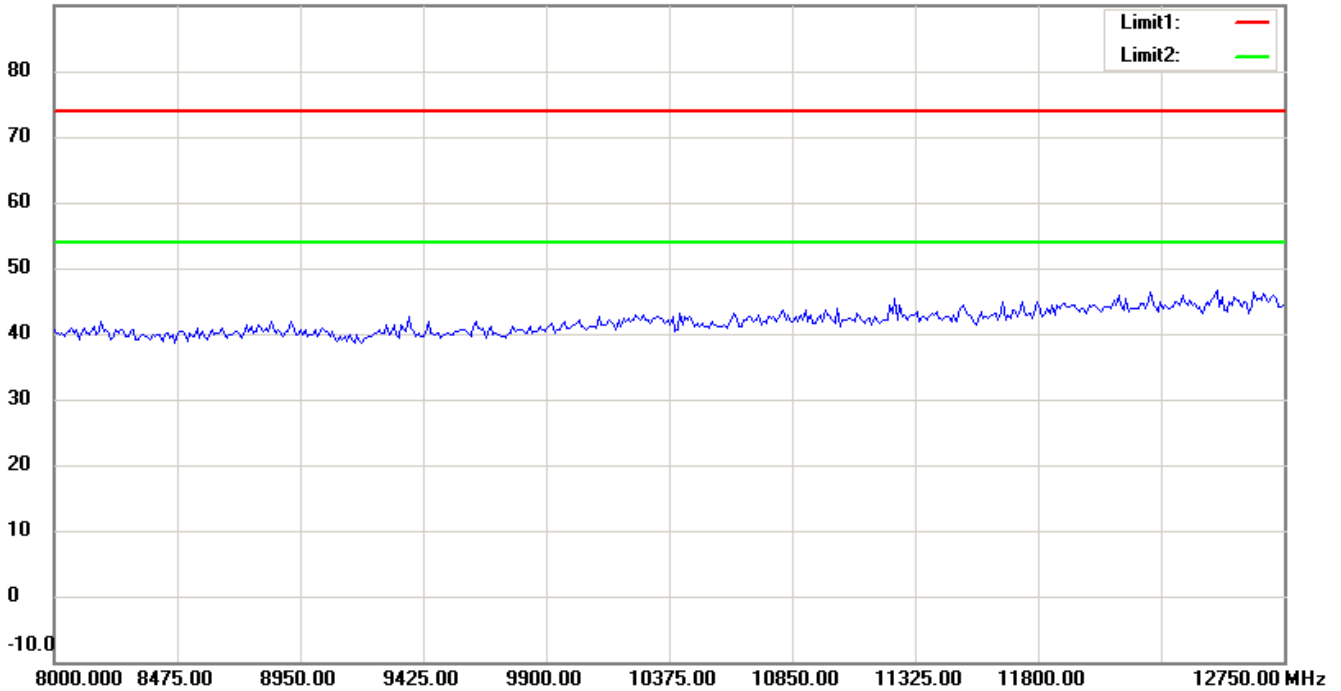

90.0 dBuV/m

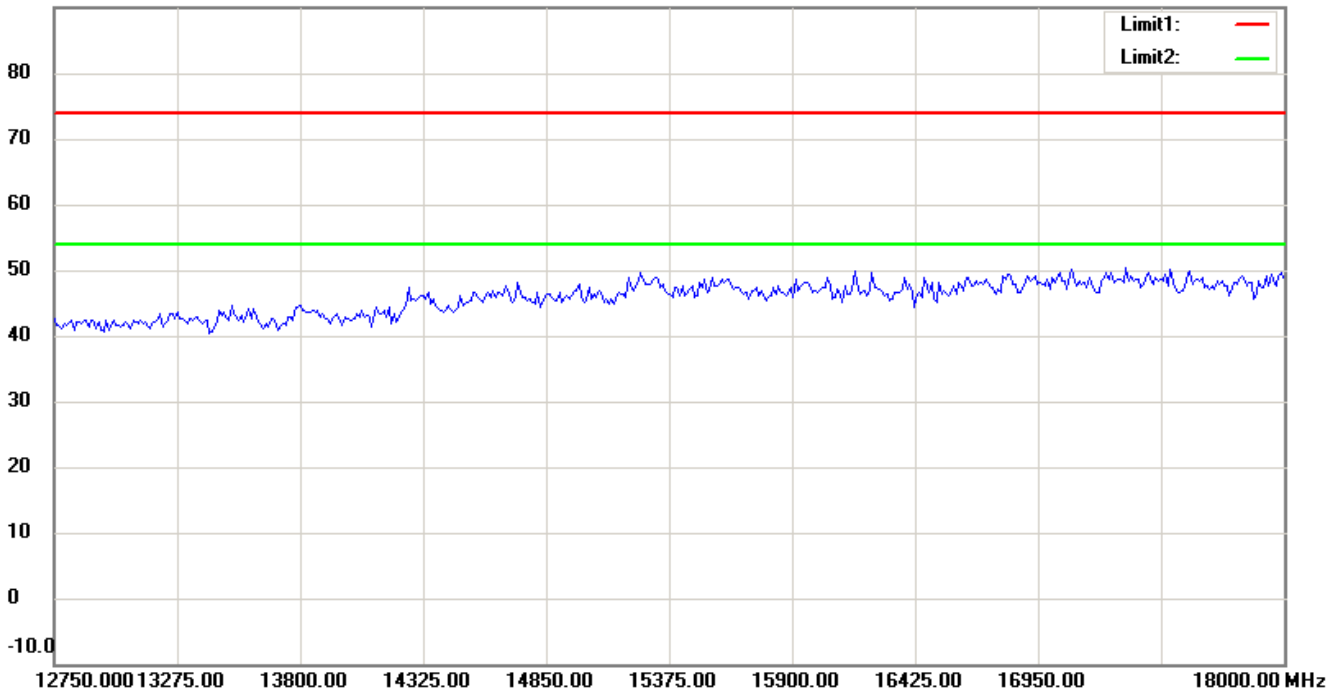

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

90.0 dBuV/m

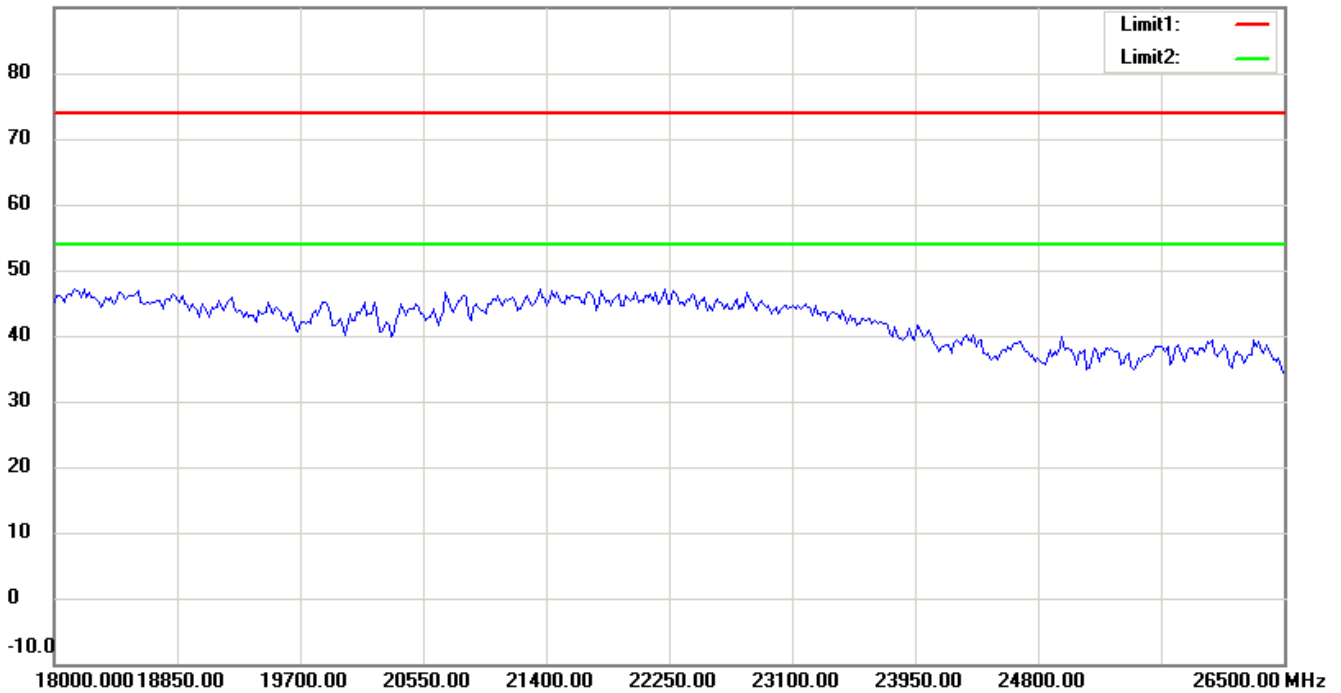

## Antenna Polarization V


72.0 dBuV/m

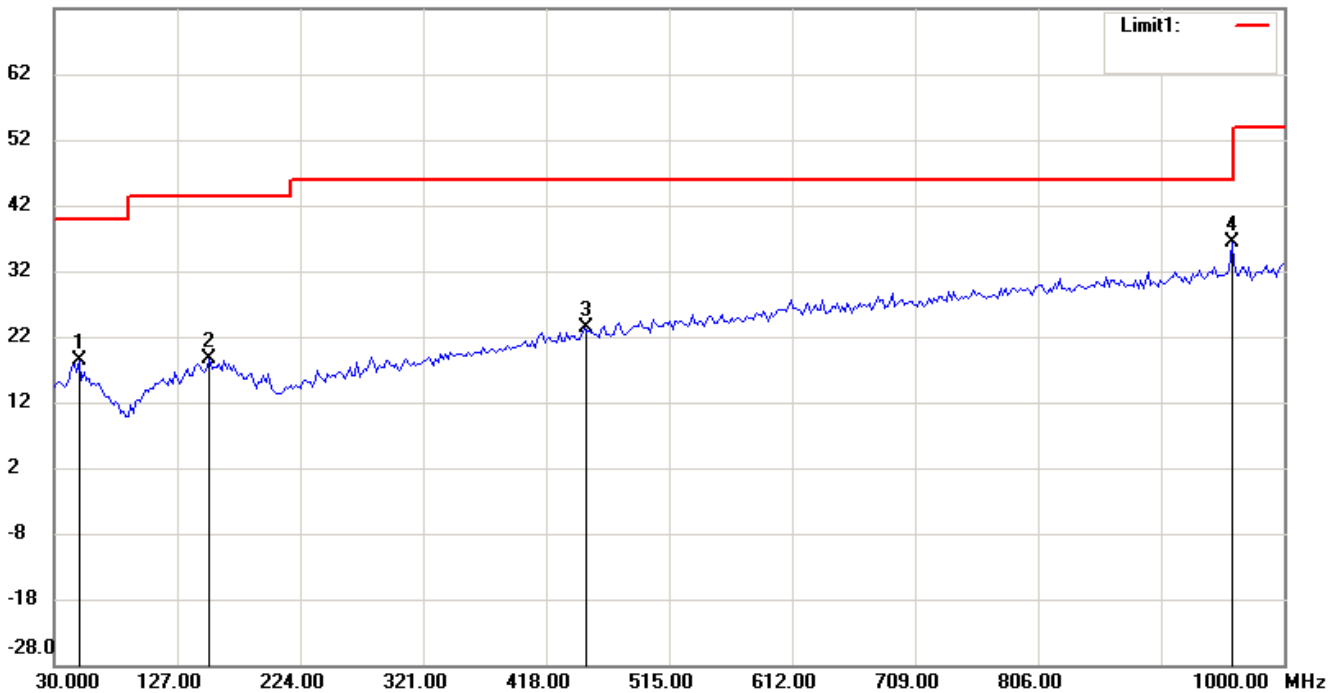

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

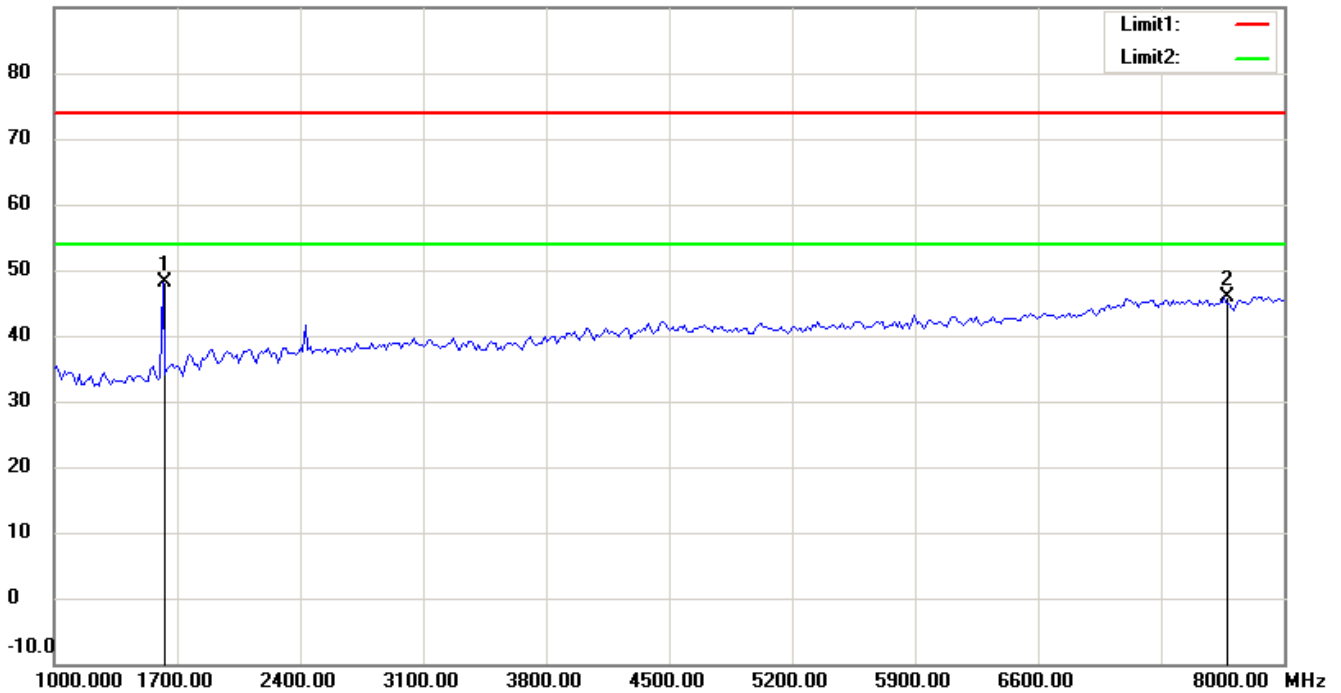

90.0 dBuV/m

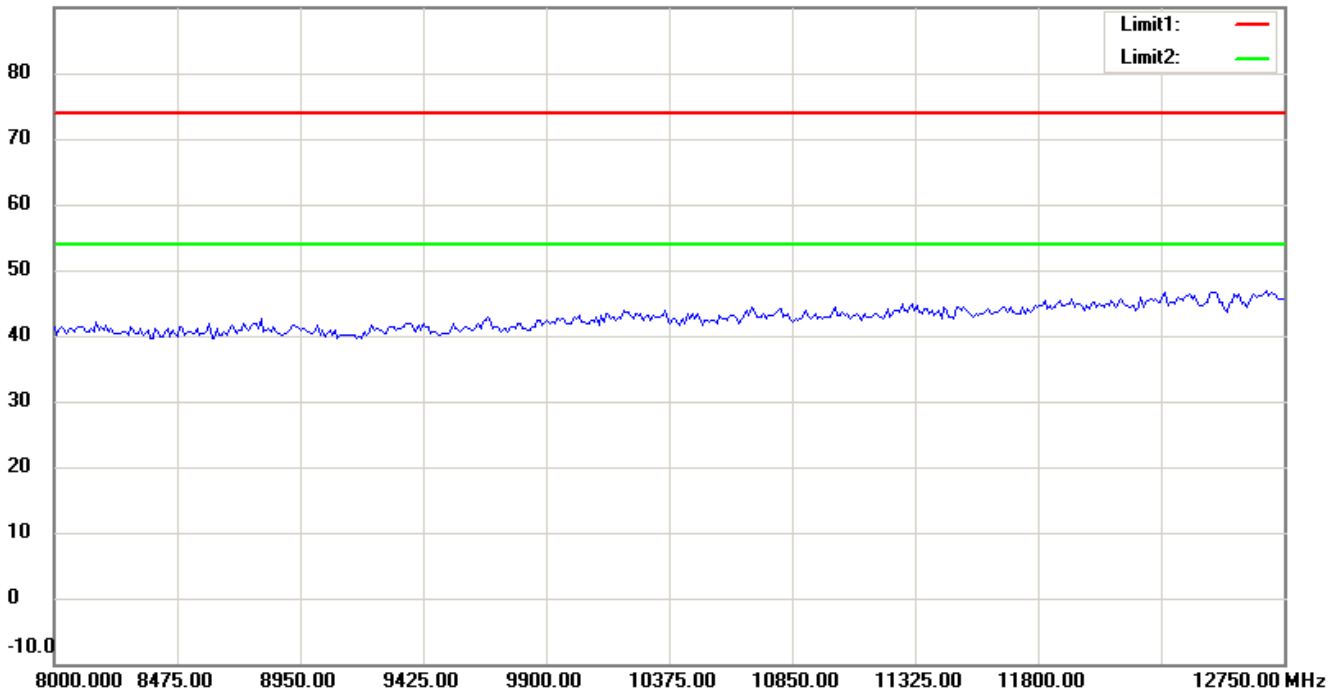

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

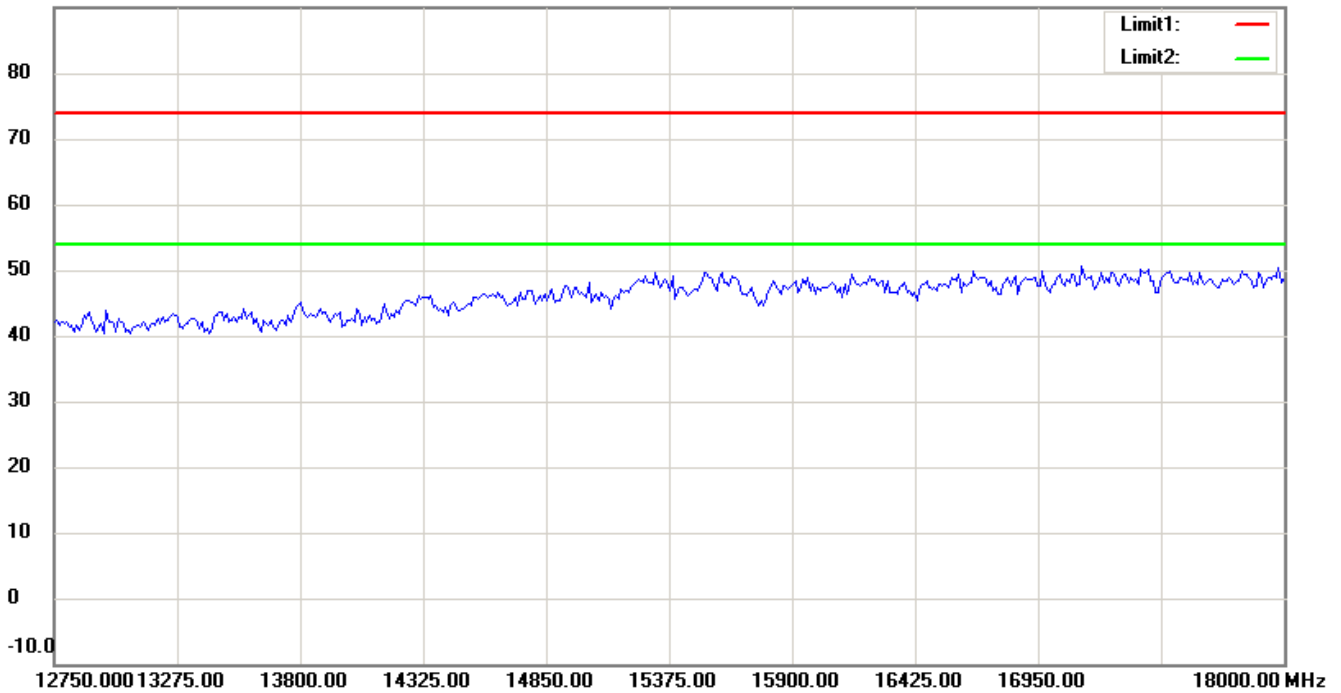

90.0 dBuV/m

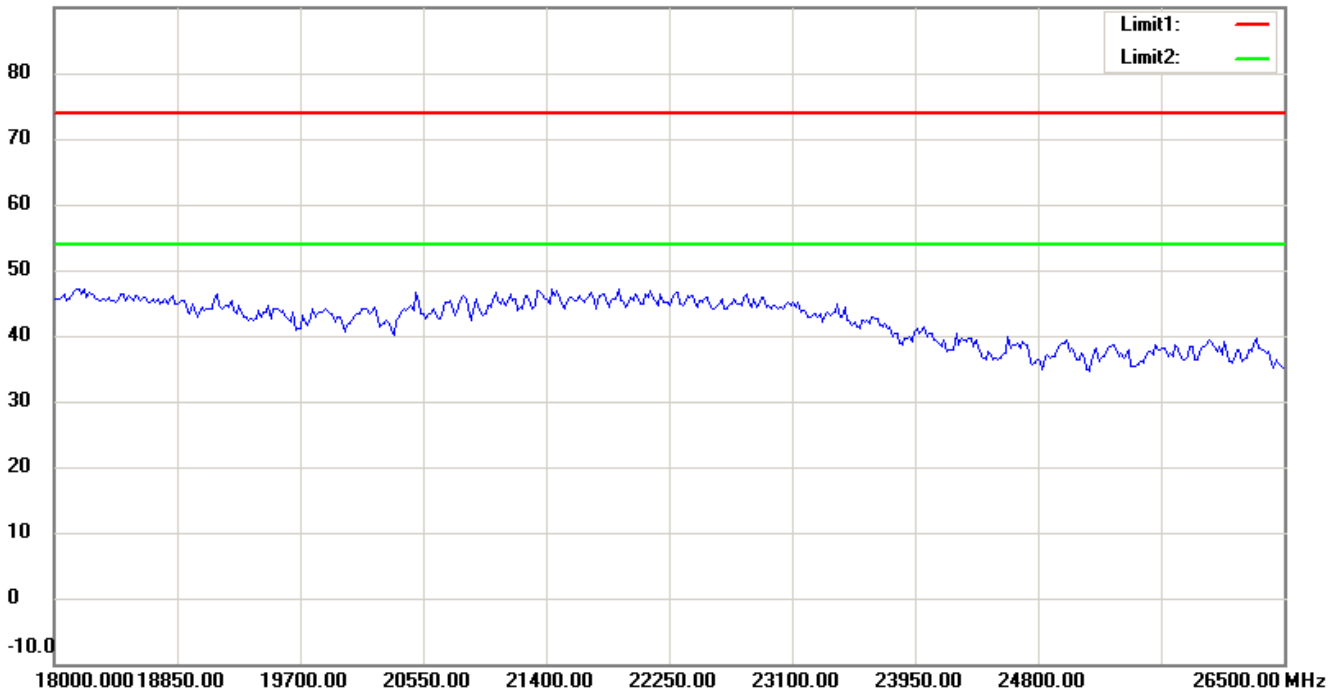

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

Bluetooth 2480 MHz

Antenna Polarization H

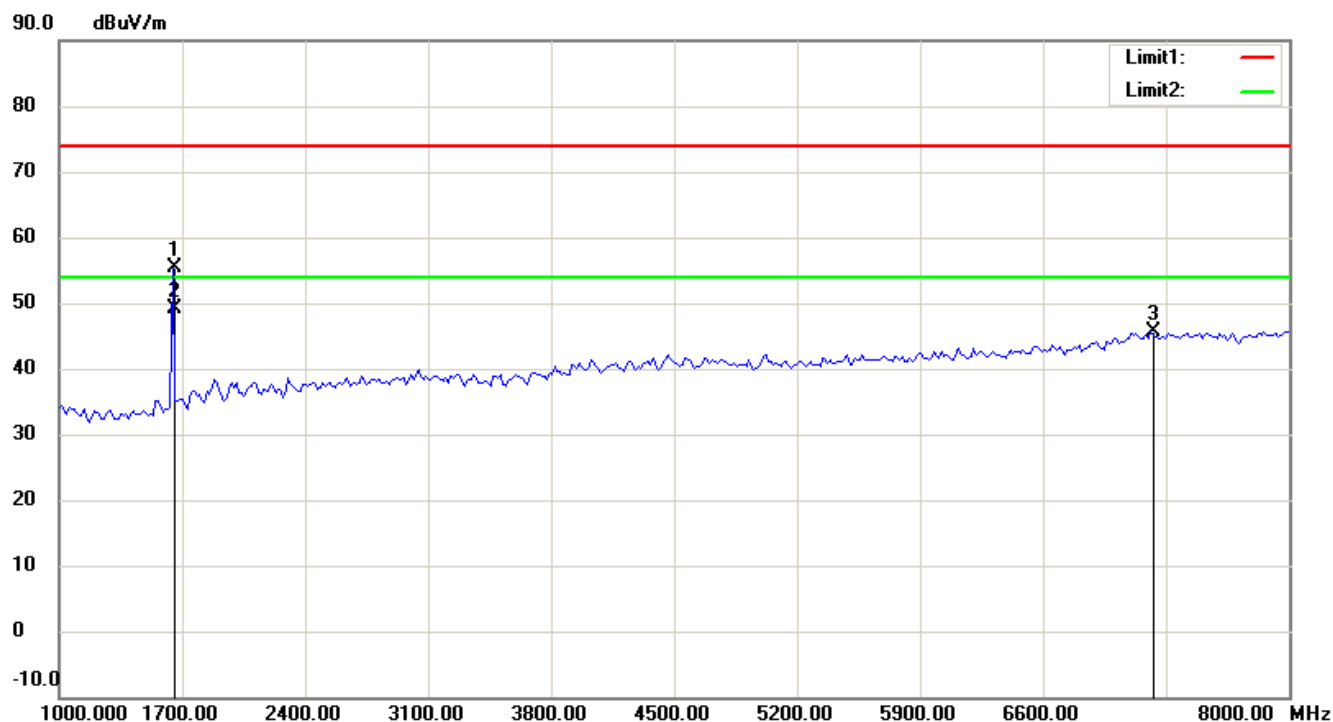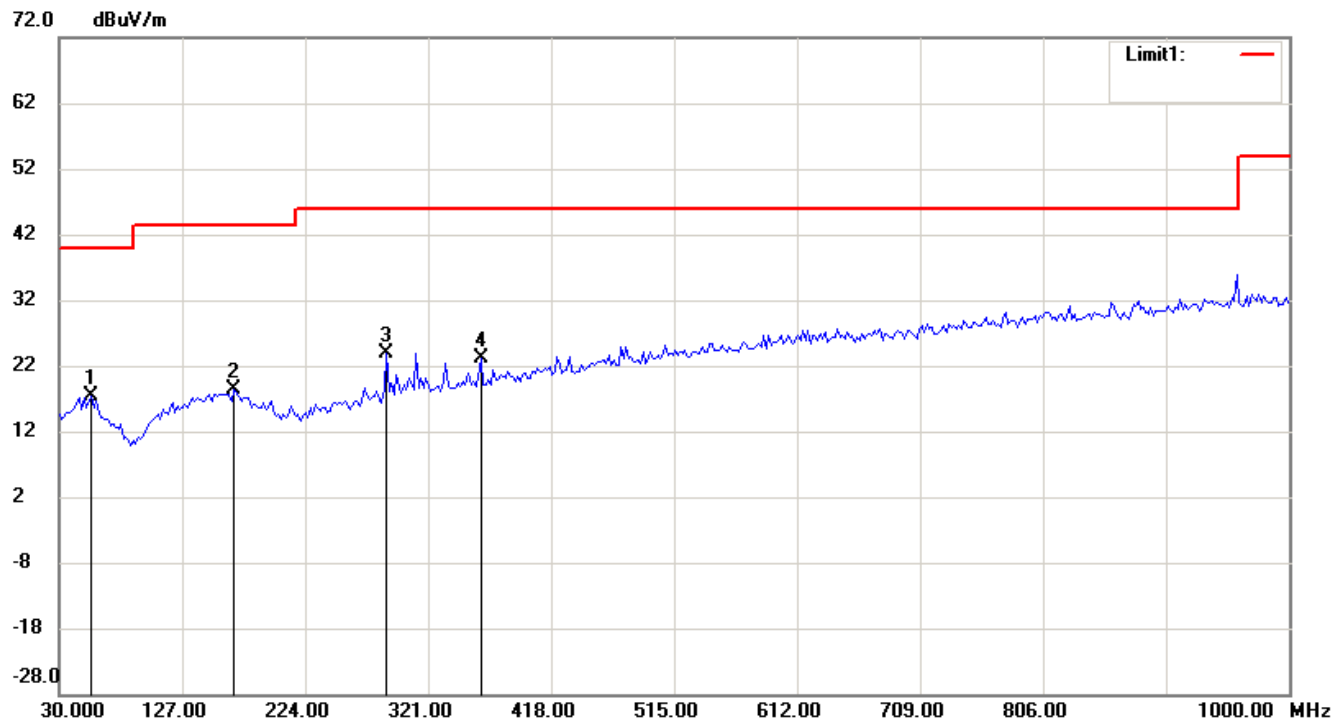

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

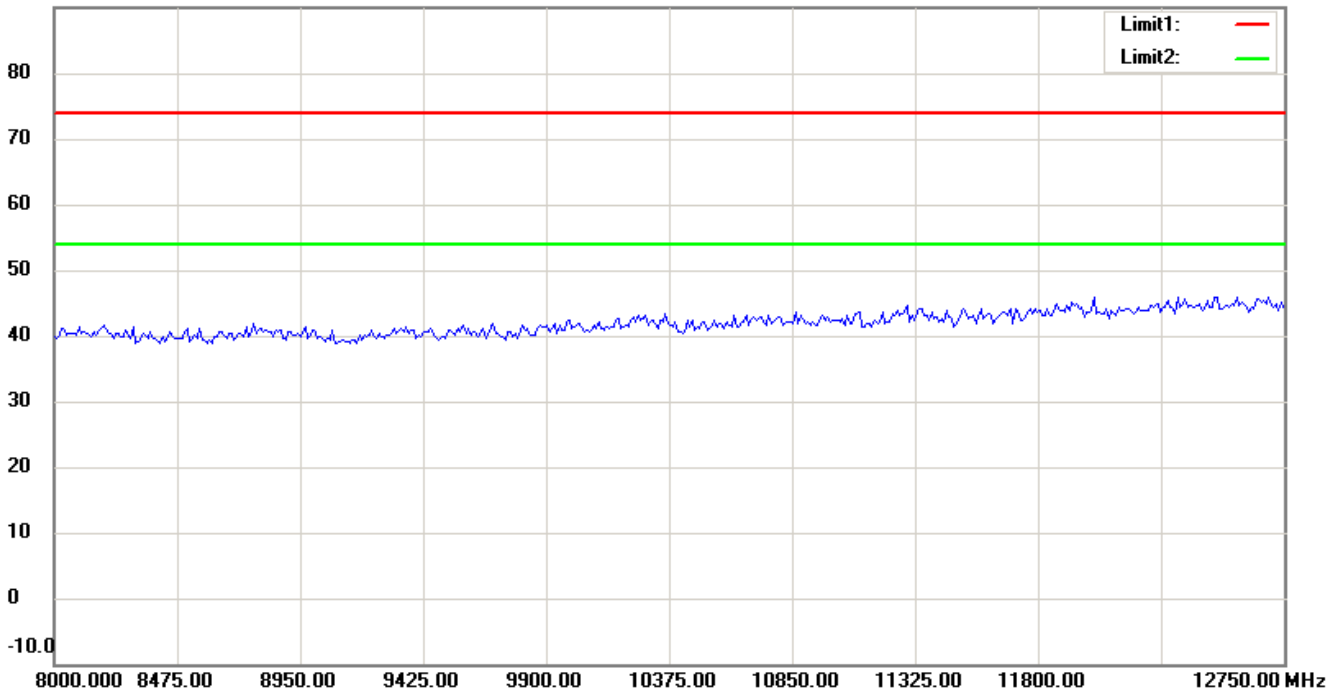

90.0 dBuV/m

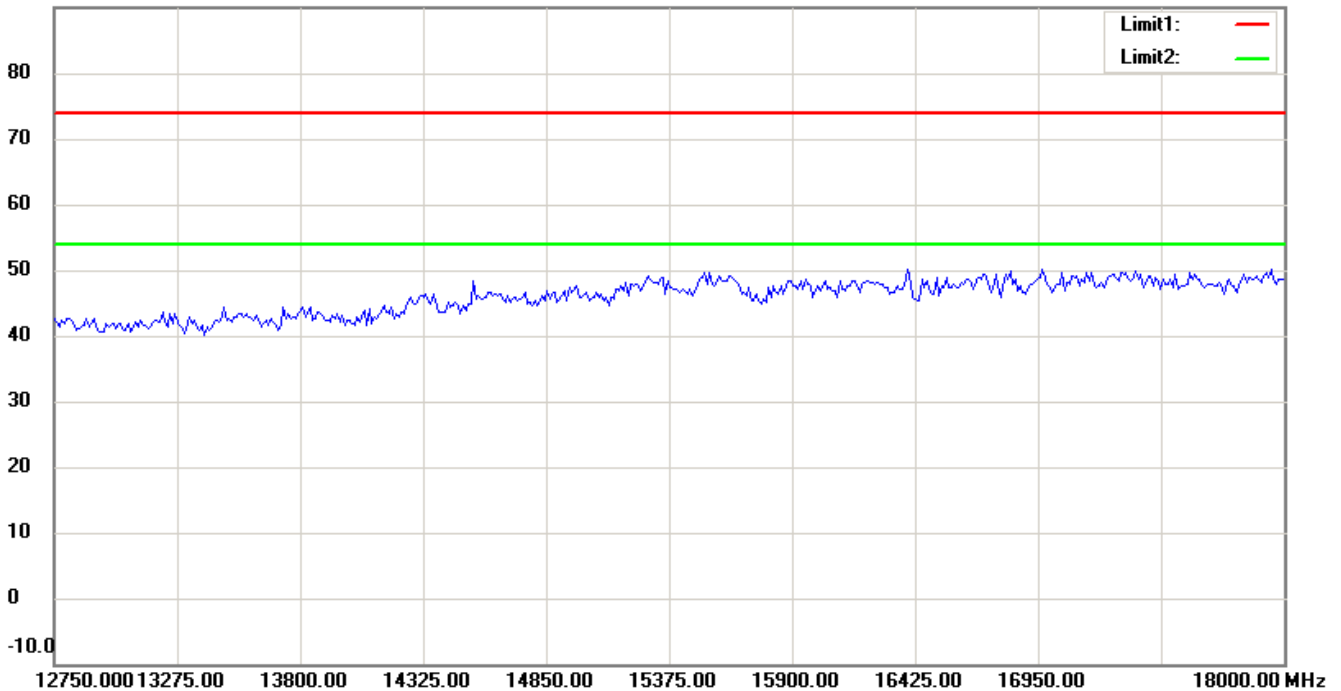

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

90.0 dBuV/m

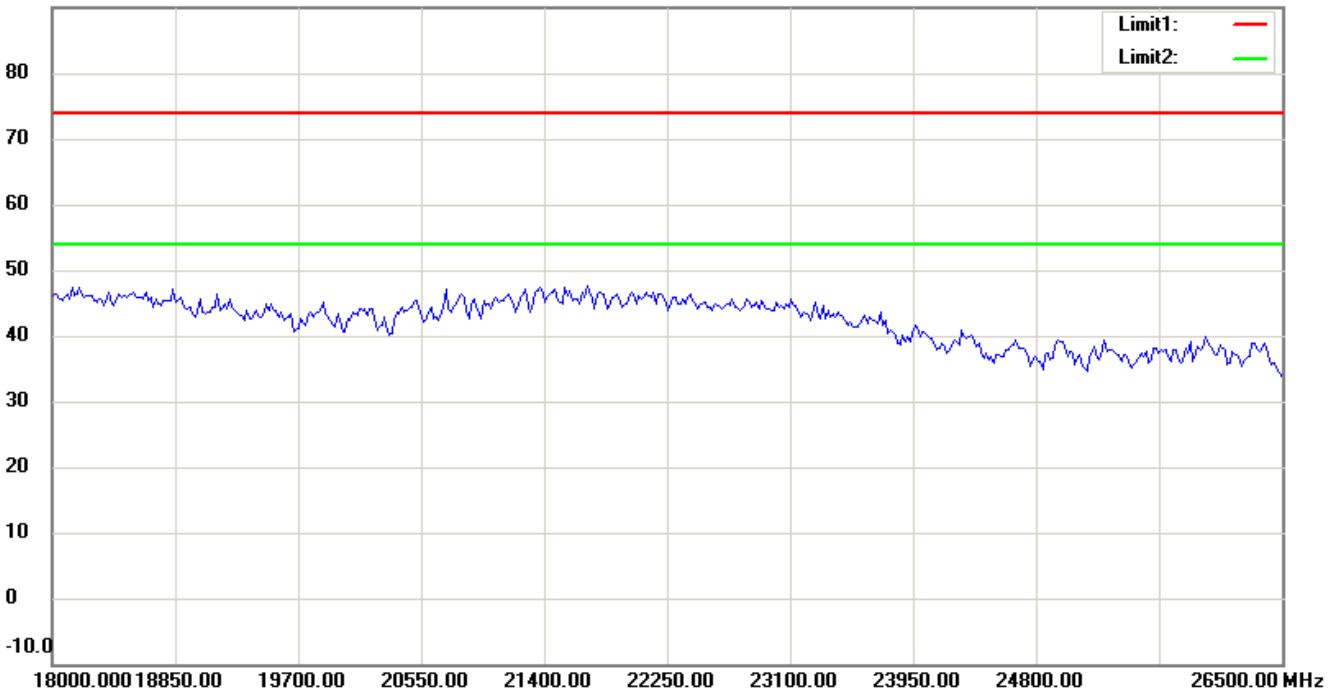

## Antenna Polarization V

72.0 dBuV/m

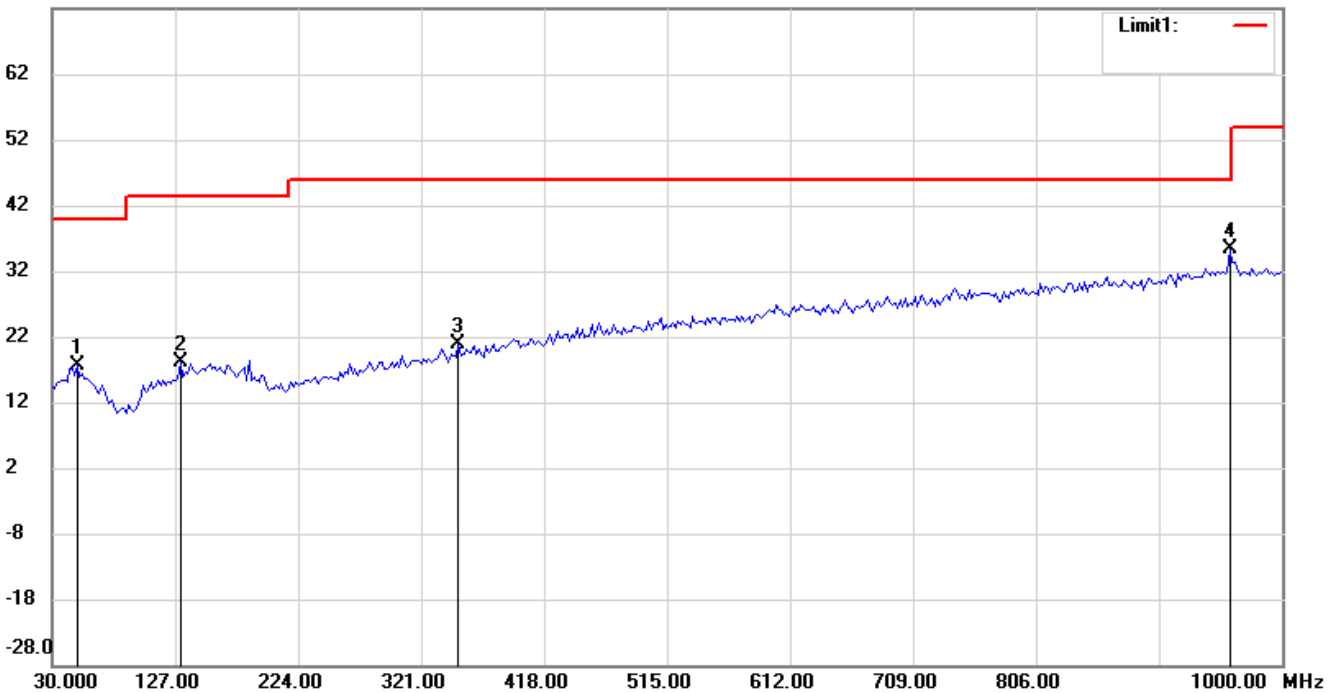

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

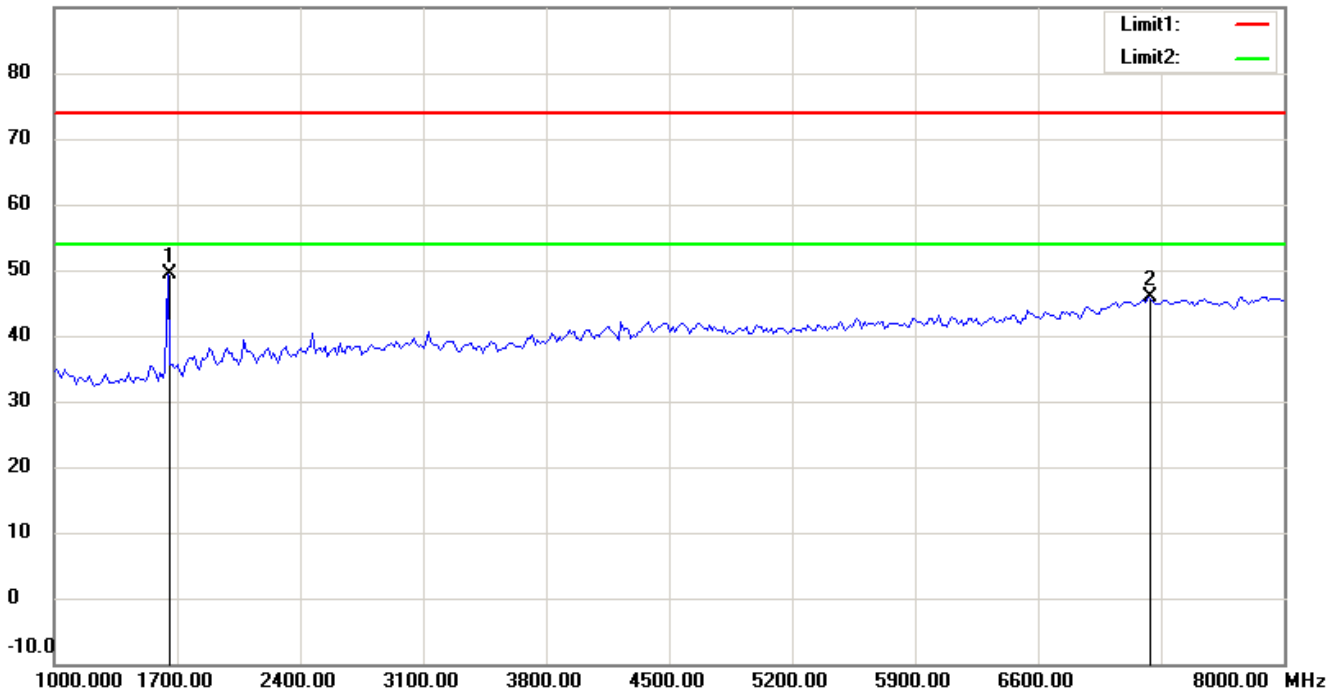

90.0 dBuV/m

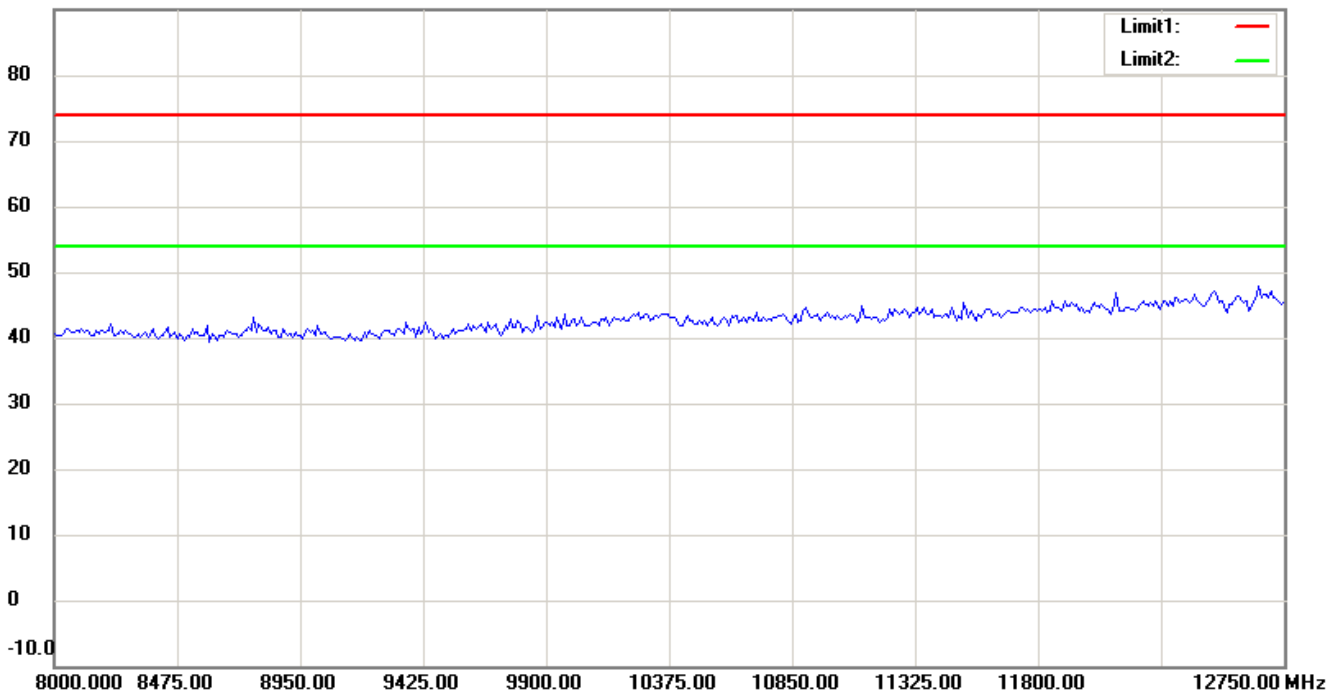


Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.






# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

90.0 dBuV/m

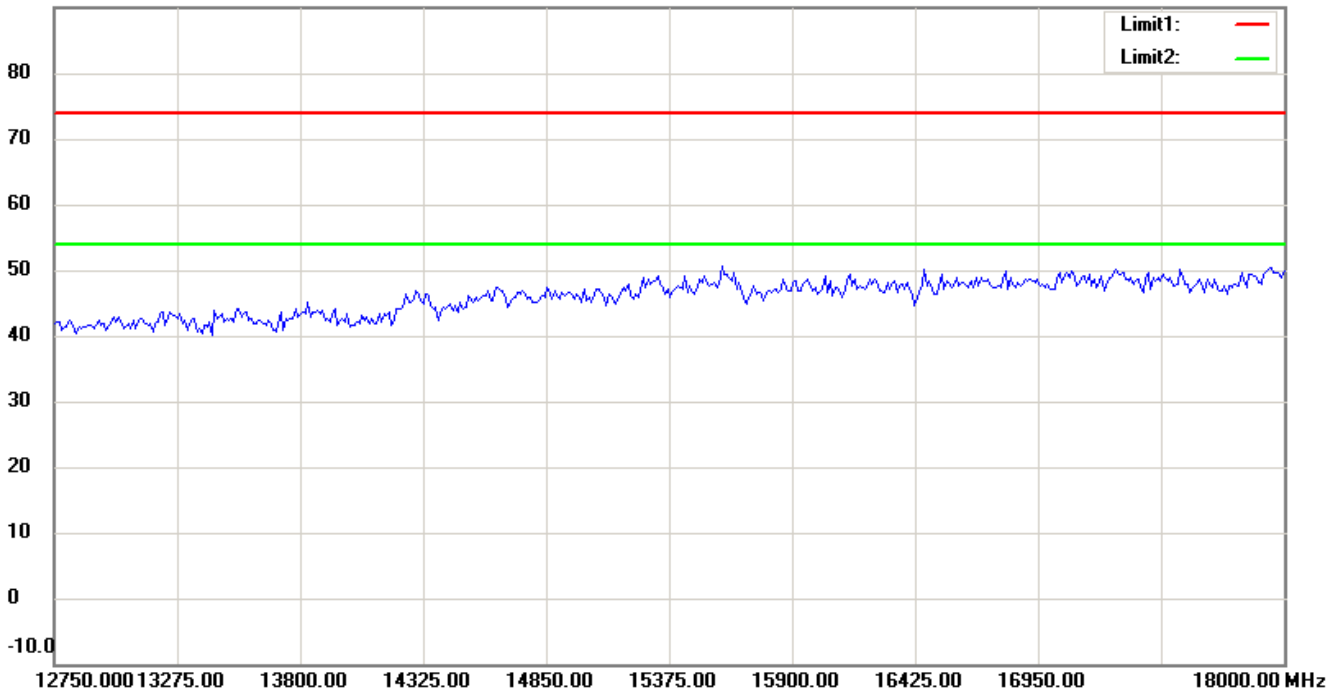


90.0 dBuV/m

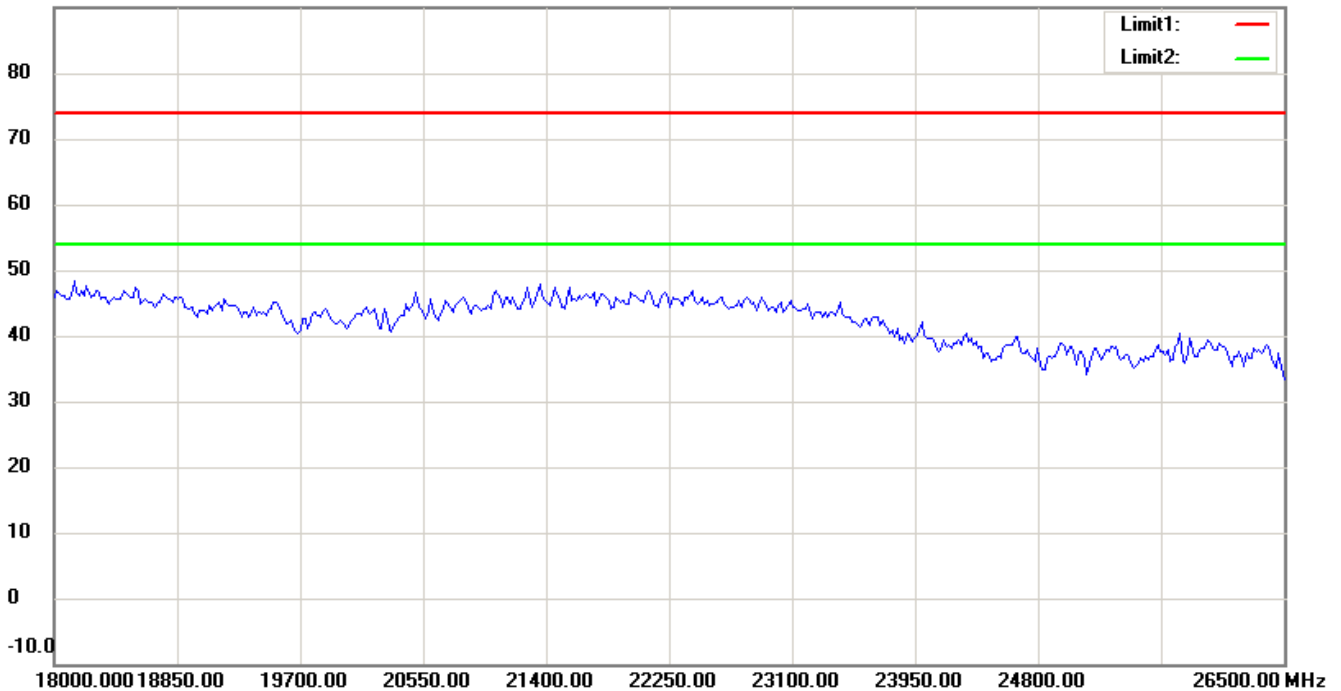

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




Registration number: W6R21301-13005-C-1


FCC ID:T9JRN41-3

External photos

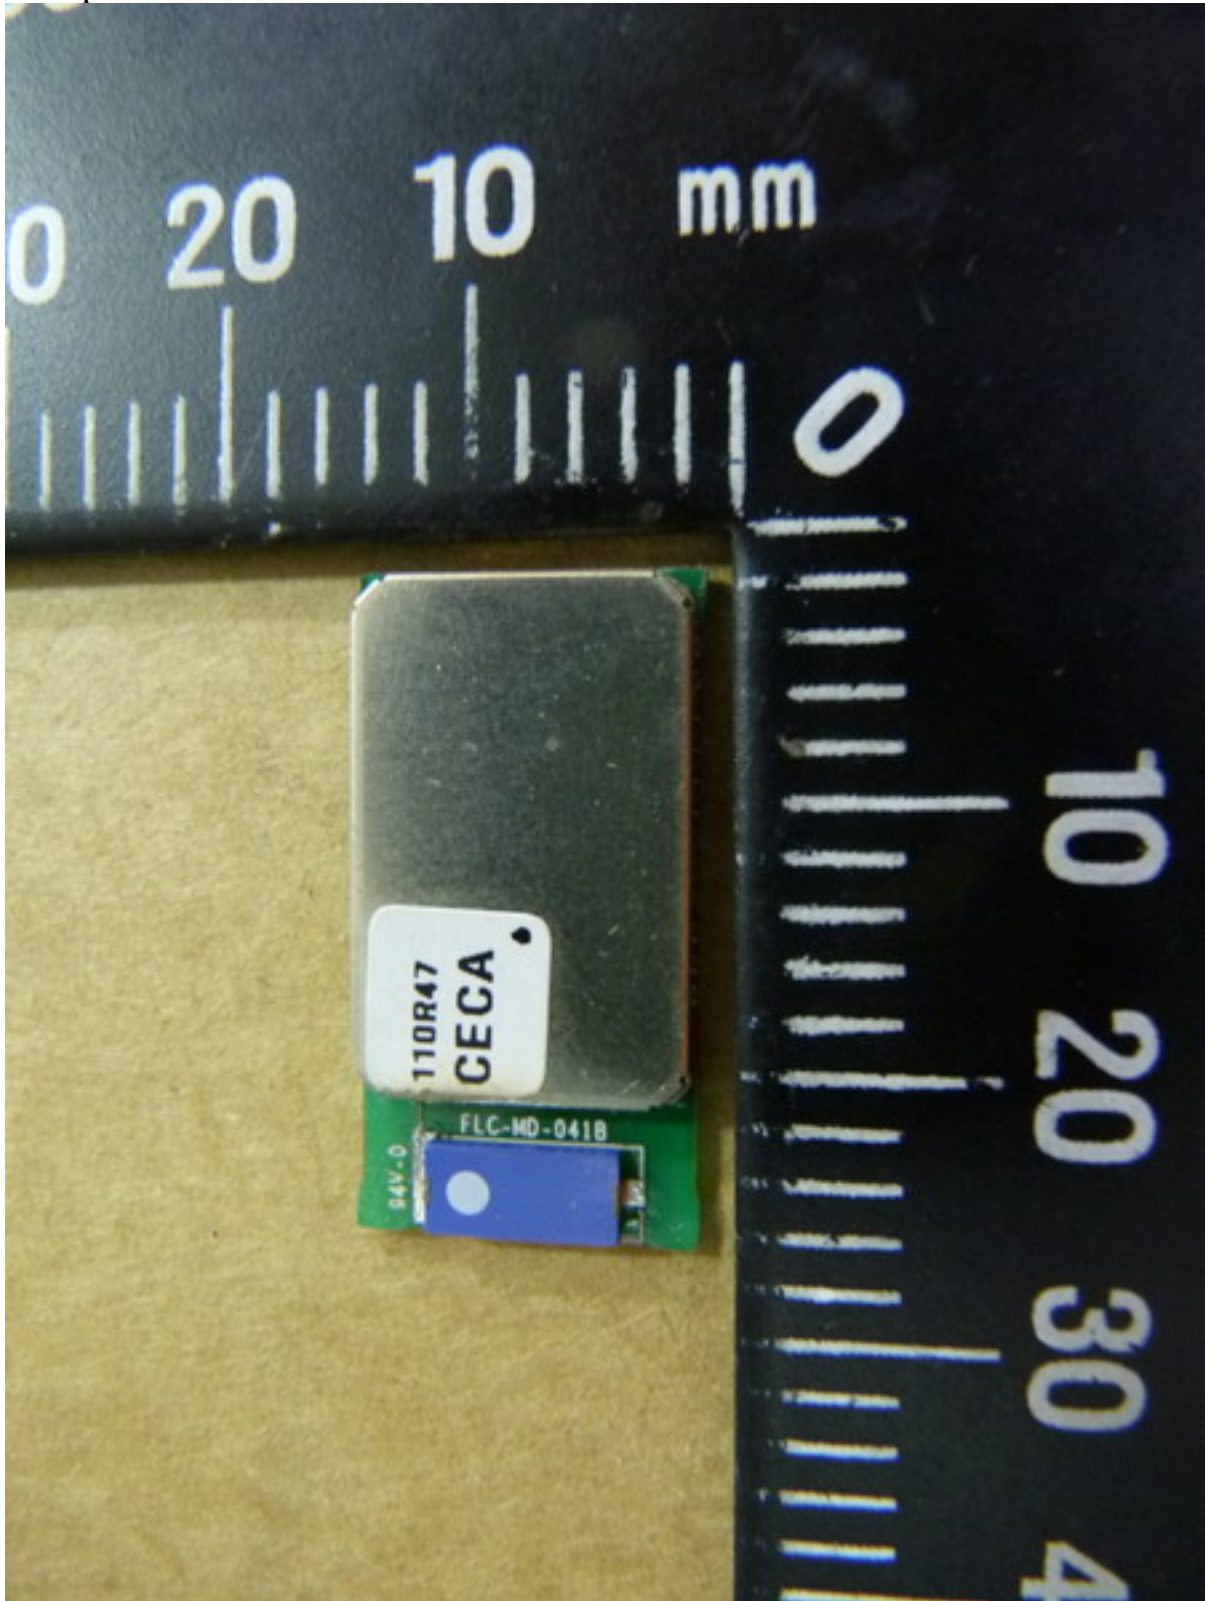




Registration number: W6R21301-13005-C-1  
FCC ID:T9JRN41-3

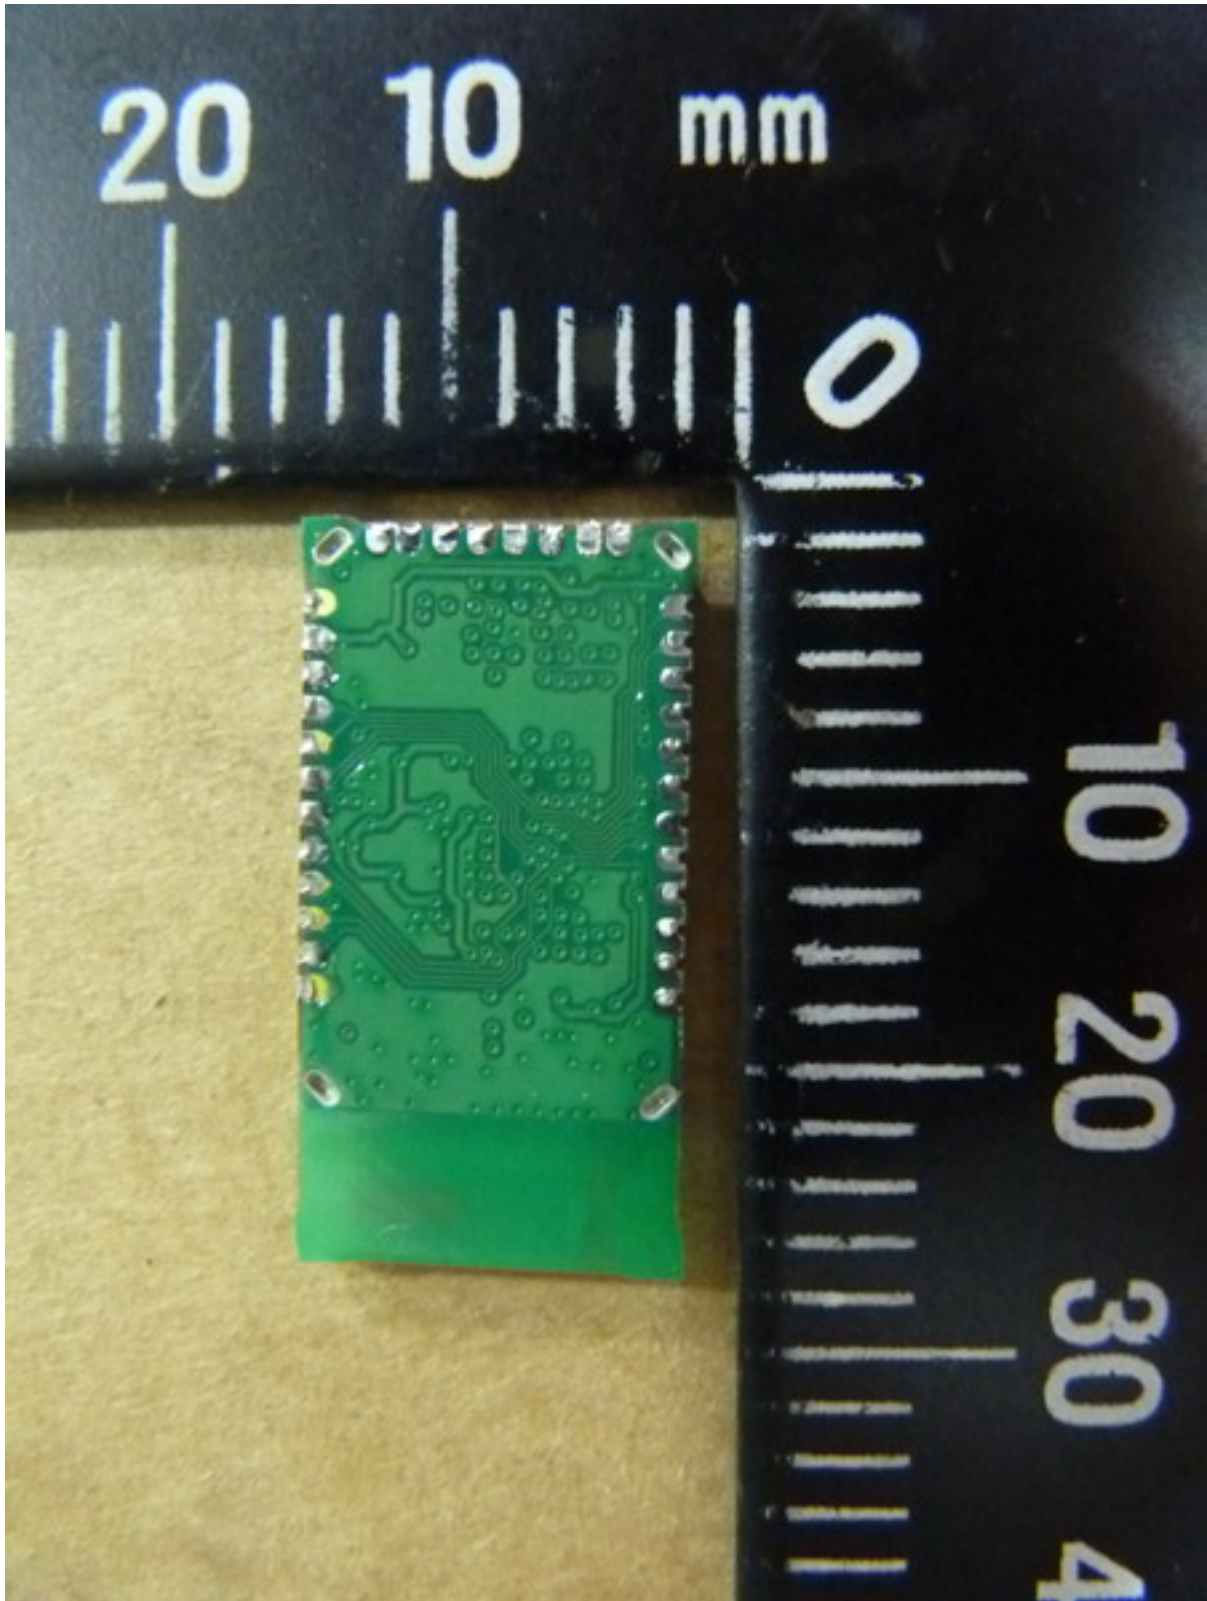







Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

Internal photos

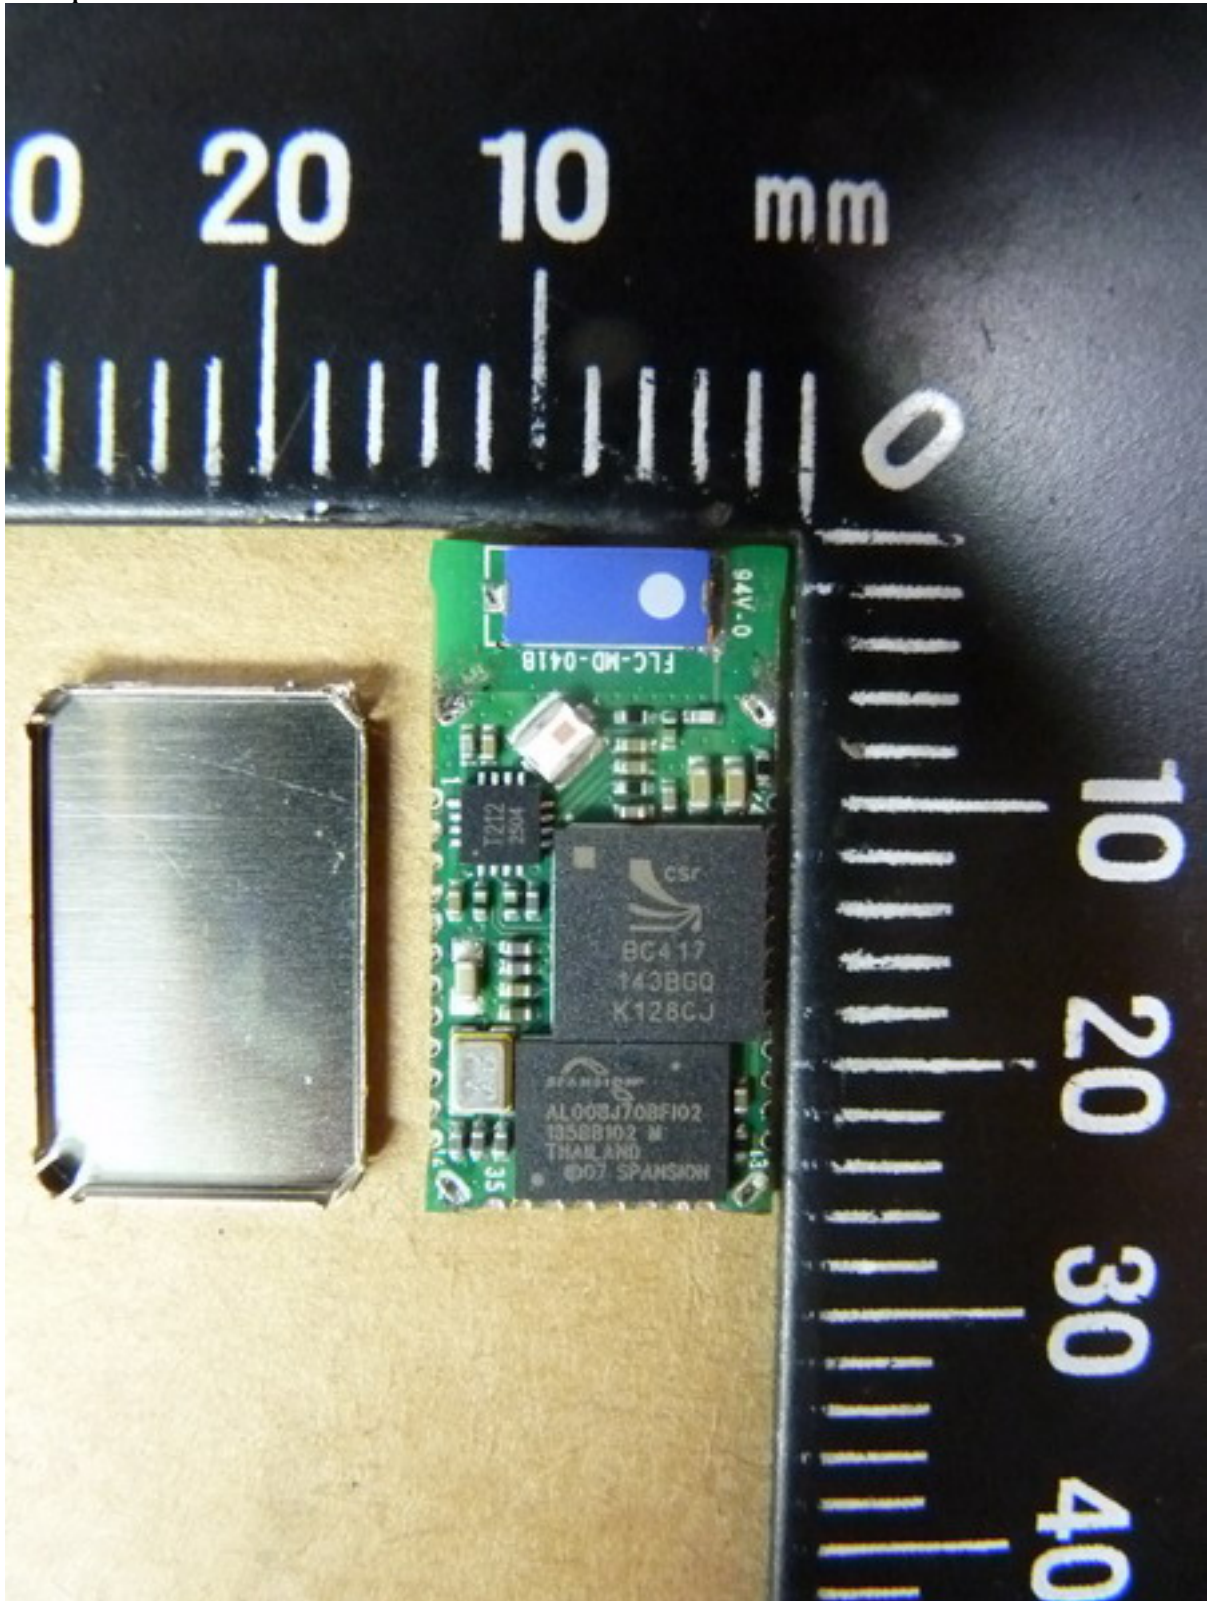



Registration number: W6R21301-13005-C-1

FCC ID:T9JRN41-3

**Set Up photo of Radiated Emission**

