



Product Service

**Choose certainty.
Add value.**

Report On

FCC and Industry Canada Testing of the
Ericsson AB RRUS 11 B5 / KRC 161 285/2

COMMERCIAL-IN-CONFIDENCE

FCC ID: TA8AKRC161285-2
IC ID: 287AB-AS1612852

Document 75923458 Report 04 Issue 1

September 2013



Product Service

TÜV SÜD Product Service, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuv-sud.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON FCC and Industry Canada Testing of the
Ericsson RRUS 11 B5 / KRC 161 285/2

Document 75923458 Report 04 Issue 1

September 2013

PREPARED FOR Ericsson AB
Isafjordsgatan 10
SE-164 80
Stockholm
Sweden

PREPARED BY
G Zhao
Test Engineer

N Forsyth
Authorised Signatory

DATED 27 September 2013

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with FCC CFR 47: Part 22 and Industry Canada RSS-132. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s):

G Zhao

X Zhang





CONTENTS

Section		Page No
1	REPORT SUMMARY	3
1.1	Introduction	4
1.2	Brief Summary of Results	5
1.3	Declaration of Build Status	10
1.4	Product Information	11
1.5	Test Conditions.....	17
1.6	Deviations From the Standard	17
1.7	Modification Record	17
1.8	Alternative Test Site.....	17
2	TEST DETAILS	18
2.1	Maximum Peak Output Power - Conducted	19
2.2	Peak – average ratio.....	25
2.3	Spurious Emissions at Antenna Terminals ($\pm 1\text{MHz}$).....	36
2.4	Radiated Spurious Emissions.....	44
2.5	Conducted Spurious Emissions.....	50
2.6	Receiver Spurious Emissions	68
3	TEST EQUIPMENT USED	74
3.1	Test Equipment Used	75
3.2	Measurement Uncertainty	76
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....	77
4.1	Accreditation, Disclaimers and Copyright.....	78



Product Service

SECTION 1

REPORT SUMMARY

FCC and Industry Canada Testing of the
Ericsson RRUS 11 B5 / KRC 161 285/2



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Ericsson RRUS 11 B5 / KRC 161 285/2 to the requirements of FCC CFR 47 Part 22 and Industry Canada RSS-132.

Testing was carried out in support of a C2PC application for Grant of RRUS 11 B5 / KRC 161 285/2 for hardware update in WCDMA and LTE Multi Standard Radio mode. The manufacturer has declared that this hardware update does not affect the frequency stability, therefore this requirement was not tested.

Objective	To perform FCC and Industry Canada Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Ericsson AB
Product Name	RRUS 11 B5
Product Number	KRC 161 285/2
IC Model Number	AS1612852
Serial Number(s)	CB4P587219
WCDMA Software	CXP9021719 Rev R1CB18
LTE Software	CXP102051/16 Rev R32BD
PIS Software	CXP9017316/1 Rev R39UL
Hardware Version	R2B
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 22: 2012 Industry Canada RSS-132 Issue 3: 2013
Incoming Release Date	Declaration of Build Status 19 July 2013
Order Number	PTP
Date	26 June 2013
Start of Test	19 July 2013
Finish of Test	21 August 2013
Name of Engineer(s)	G Zhao X Zhang
Related Document(s)	ANSI C63.4: 2009 FCC CFR 47 Part 2: 2012 Industry Canada RSS-GEN Issue 3: 2010



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results in accordance with FCC CFR 47 Part 22 and Industry Canada RSS-132, is shown below.

Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-132 and RSS-GEN					
22.913 (a)	5.4	Effective Radiated Power		871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)		N/A	No integral antenna.
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)		N/A	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)		N/A	
				871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)	0	Pass	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)	0	Pass	
				871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)			
2.1	2.1046, 22.913 (a)	5.4	Maximum Peak Output Power - Conducted	873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)			-
				873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)			
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)			
				871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)			
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)			
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)			
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)			



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-132 and RSS-GEN					
2.2	22.913 (a)	5.4	Peak – Average Ratio	871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)	0	Pass	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)	0	Pass	
				871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)		N/A	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)		N/A	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)		N/A	
	2.1047 (d)	5.2	Modulation Characteristics	873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)		N/A	



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-132 and RSS-GEN					
2.1049, 22.917 (b)	RSS-Gen 4.6.1	Occupied Bandwidth		871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)		N/A	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)		N/A	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)		N/A	
				871.4MHz (W) + 874.7MHz (L1.4)	0	Pass	
				888.3MHz (L1.4) + 891.6MHz(W)	0	Pass	
				871.4MHz (W) + 888.3 MHz (L1.4)	0	Pass	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W) 873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4)	0	Pass	
2.3	2.1051, 22.917 (b)	5.5	Spurious Emissions at Antenna Terminals (±1MHz)	873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4)	0	Pass	-
				873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)	0	Pass	
				871.4MHz (W) + 874.7MHz (L1.4)	0	Pass	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4)	0	Pass	
2.4	2.1053, 22.917 (a)	5.5	Radiated Spurious Emissions	873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4)	0	Pass	-
				871.4MHz (W) + 888.3 MHz (L1.4)	0	Pass	
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4)	0	Pass	
				871.4MHz (W) + 874.7MHz (L1.4)	0	Pass	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
2.5	2.1051, 22.917 (a)	5.5	Conducted Spurious Emissions	874.7 MHz (L1.4) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)	0	Pass	-
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4)	0	Pass	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4)	0	Pass	
				871.4MHz (W) + 874.7MHz (L1.4)	0	Pass	
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)	0	Pass	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)	0	Pass	-
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4)	0	Pass	



Configuration 1 – Remote Radio Equipment							
Section	Spec Clause		Test Description	Mode	Mod State	Result	Comments
	FCC Part 2 and 22	RSS-132 and RSS-GEN					
2.1055, 22.355	5.3		Frequency Stability Under Temperature Variations	871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)		N/A	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)		N/A	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)		N/A	
				871.4MHz (W) + 888.3 MHz (L1.4) / 871.4 MHz (W) + 887.5 MHz (L3) 871.4 MHz (W) + 886.5 MHz (L5) / 871.4 MHz (W) + 884.0 MHz (L10)		N/A	-
				873.8 MHz (W) + 890.7 MHz (L1.4) / 873.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 888.9 MHz (L5) / 873.8 MHz (W) + 886.4 MHz (L10)		N/A	
				874.7 MHz (L1.4) + 891.6 MHz (W) / 875.5 MHz (L3) + 891.6 MHz (W) 876.5 MHz (L5) + 891.6 MHz (W) / 879.0 MHz (L10) + 891.6 MHz (W)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 890.7 MHz (L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 888.9 MHz (L5) 873.8 MHz (W) + 878.8 MHz (W) + 886.4 MHz (L10)		N/A	
				873.8 MHz (W) + 878.8 MHz (W) + 889.3 MHz (L1.4) + 890.7 MHz(L1.4) 873.8 MHz (W) + 878.8 MHz (W) + 886.9 MHz (L3) + 889.9 MHz (L3) 873.8 MHz (W) + 878.8 MHz (W) + 883.9 MHz (L5) + 888.9 MHz (L5)		N/A	



Product Service

Section	Spec Clause	Test Description	Mode	Mod State	Result	Comments
	FCC Part 15					
2.6	15.111	Receiver Spurious Emissions	871.4MHz (W) + 888.3 MHz (L1.4) 873.8 MHz (W) + 890.7 MHz (L1.4) 874.7 MHz (L1.4) + 891.6 MHz (W)	0 0 0	Pass Pass Pass	This test is shown for information only.

L1.4 denotes LTE network with 1.4MHz channel bandwidth.

L3 denotes LTE network with 3MHz channel bandwidth.

L5 denotes LTE network with 5MHz channel bandwidth.

L10 denotes LTE network with 10MHz channel bandwidth.

W denotes WCDMA network

N/A – Not Applicable



1.3 DECLARATION OF BUILD STATUS

MAIN EUT	
MANUFACTURING DESCRIPTION	Remote Radio Equipment
MANUFACTURER	Ericsson AB
PRODUCT NUMBER	RRUS 11 B5
PART NUMBER	KRC 161 285/2
IC Model NUMBER	AS1612852
SERIAL NUMBER	CB4P587219
HARDWARE VERSION	R2B
WCDMA SOFTWARE	CXP9021719 Rev R1CB18
LTE SOFTWARE	CXP102051/16 Rev R32BD
PIS SOFTWARE	CXP9017316/1 Rev R39UL
TRANSMITTER OPERATING RANGE	TX: 869MHz - 894MHz RX: 824MHz - 849MHz
MODULATIONS	WCDMA: QPSK, 16QAM, 64QAM LTE: QPSK, 16QAM, 64QAM
NUMBER OF CARRIERS	Maximum 4 carriers (2 WCDMA carriers and 2 LTE carriers)
ITU DESIGNATION OF EMISSION	WCDMA: 5M00F9W LTE: 1M40F9W, 3M00F9W, 5M00F9W, 10M0F9W
OUTPUT POWER (RMS) (W or dBm)	2 x 46.0dBm (2 x 40W)
OUTPUT POWER TOLERANCE	± 1.0dB
INSTANTANEOUS BANDWIDTH	20MHz
CHANNEL BANDWIDTH	WCDMA: 4.2 MHz to 5MHz (configurable in steps of 100/200kHz) LTE: 1.4MHz, 3MHz, 5MHz and 10MHz according to 3GPP TS 36.141
ANTENNA	No dedicated antenna, handled during licensing
NUMBER OF ANTENNA PORTS	2 TX/RX ports
FCC ID	TA8AKRC161285-2
IC ID	287AB-AS1612852
TECHNICAL DESCRIPTION (a brief description of the intended use and operation)	The equipment is the Radio Part of WCDMA, LTE Base Station.

Signature

Date

08 August 2013

D of B S Serial No

75923458/04

No responsibility will be accepted by TÜV SÜD Product Service as to the accuracy of the information declared in this document by the manufacturer.



1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) RRUS 11 B5 / KRC 161 285/2 is an Ericsson Radio Equipment working in the public mobile service 850MHz band which provides communication connections to WCDMA and LTE network. The RRUS 11 B5 / KRC 161 285/2 operates from a -48V DC supply.

The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturers documentation.



Equipment Under Test



1.4.2 Test Configuration

Configuration 1: Radio Equipment

The EUT was configured in accordance with FCC CFR 47 Part 22 and Industry Canada RSS-132.

The RRUS 11 B5 / KRC 161 285/2 supports MSR LTE/WCDMA access technology. WCDMA supports TM1 (QPSK), TM5 (16QAM) and TM6 (64QAM) defined in 3GPP TS 25.141, and LTE supports Test Models E-TM1.1 (QPSK), E-TM3.2 (16QAM) and E-TM3.1 (64QAM) defined in 3GPP TS 36.141 at 869-894MHz.

The EUT includes two TX/RX ports and it can be configured to transmit in MIMO mode, and MIMO mode was used for measurements as the worst configuration.

The Maximum Output Power was tested on both TX/RX output connector RF A and RF B, all other TX measurements were performed on the combined TX/RX output connector RF A of the EUT as the representative port. RX testing was performed on the antenna connector RF B of the EUT.

The complete testing was performed with the EUT transmitting at maximum RF power unless otherwise stated.

The settings below were found to be representative for all modes when several settings with the different modulations and different number of carriers were tested to find the worst case setting. The settings were used for all measurements if not otherwise noted:

- WCDMA/LTE Mix Carrier:

WCDMA:

Single Carrier: Test Model 1 (TM1): 64DPCHs at 30 ksps (SF=128)

Multi Carrier (1x2): Test Model 1 (TM1): 32 DPCHs at 30 ksps (SF=128)

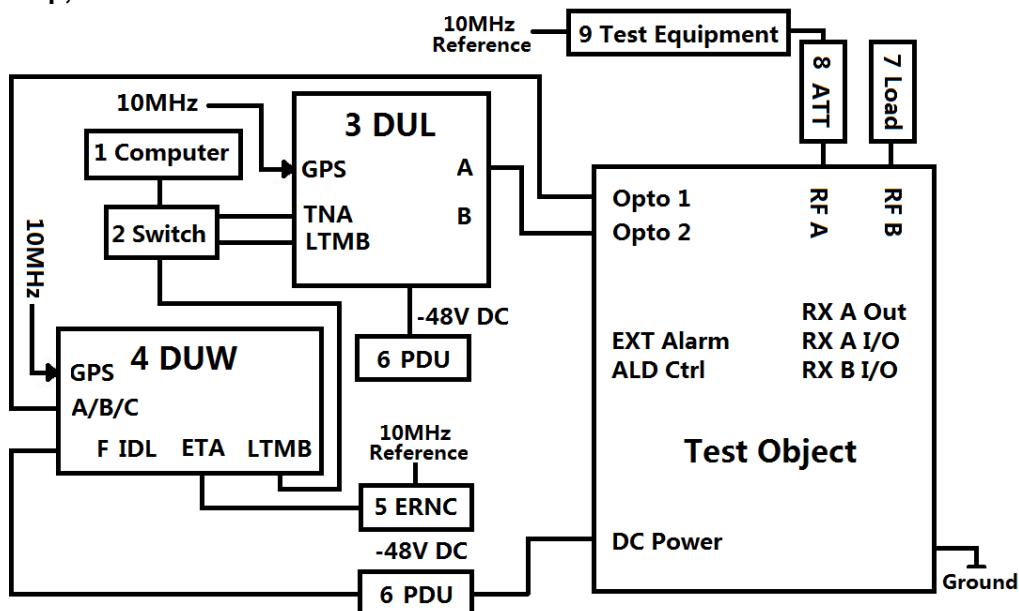
Channel Bandwidth: 5MHz

Modulation: QPSK

LTE:

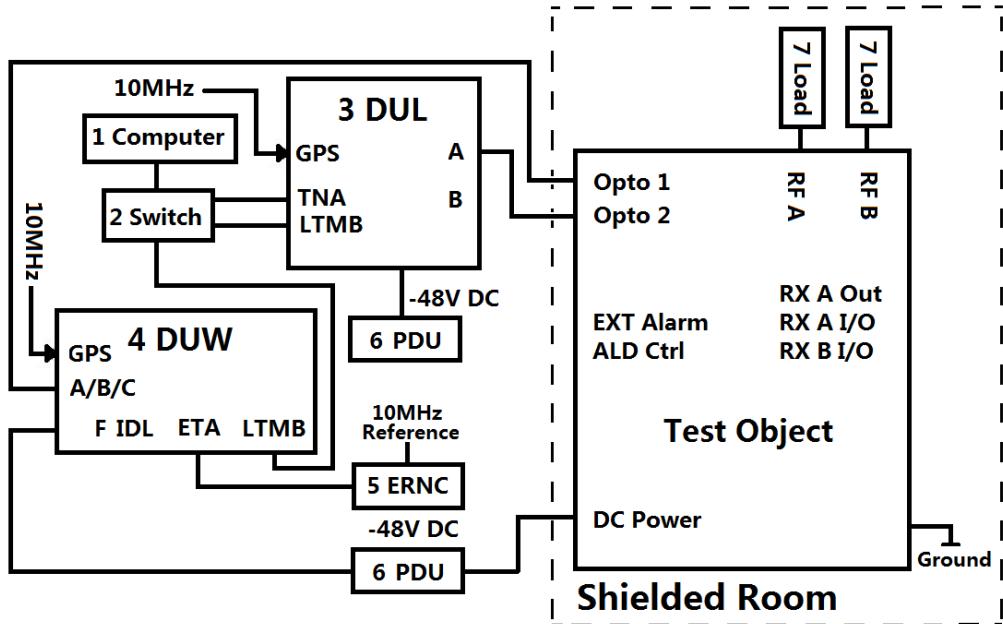
Test Model E-TM1.1 (QPSK) in channel bandwidth 1.4MHz and 10MHz

The EUT was powered by a -48V DC Power supply.

**Test Setup, Conducted Measurement:**

Product Name	Product Number	Version	Serial Number
RRUS 11 B5	KRC 161 285/2	R2B	CB4P587219

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Computer	HP EliteBook 8460p	--	AP523464
	Work Station	Sun A70-XHZB1-9AG-2GDT	--	0826TFC1V9
2	Switch	TL-HP8MU	--	05300902892
	Switch	TL-SF1008+	--	11936826484
3	RBS 6601	BFL 901 009/1	--	--
	DUL 20 01	KDU 137 533/4	R1C	CB4H365213
	SUP 6601	1/BFL 901 009/1	R3B	BR81262578
4	RBS 6601	BFL 901 009/1	--	--
	DUW 30 01	KDU 127 161/3	R4F	TU8X960893
	SUP 6601	1/BFL 901 009/1	R3B	BR80908065
5	ERNC SIM	FAB 102 614	--	ETC/L167
6	Power Supply	DH1716-5D	--	2008040041
	Power Supply	DH1716-5D	--	2008040050
7	Load	TF100	--	09121648
8	40dB Attenuator	48-40-43-LIM	--	BR5020
9	Power Meter	Rohde & Schwarz NRP2	--	101283
	Power Sensor	Rohde & Schwarz NRP-Z51	--	102310
	Spectrum Analyzer	FSQ26	--	100253

**Test Setup, Radiated Measurement:**

Product Name	Product Number	Version	Serial Number
RRUS 11 B5	KRC 161 285/2	R2B	CB4P587219

No.	Auxiliary Equipment	Part Number / Model Type	Version	Serial Number
1	Computer	HP EliteBook 8460p	--	AP523464
	Work Station	Sun A70-XHXB1-9AG-2GDT	--	0826TFC1V9
2	Switch	TL-HP8MU	--	05300902892
	Switch	TL-SF1008+	--	11936826484
3	RBS 6601	BFL 901 009/1	--	--
	DUL 20 01	KDU 137 533/4	R1C	CB4H365213
	SUP 6601	1/BFL 901 009/1	R3B	BR81262578
4	RBS 6601	BFL 901 009/1	--	--
	DUW 30 01	KDU 127 161/3	R4F	TU8X960893
	SUP 6601	1/BFL 901 009/1	R3B	BR80908065
5	ERNC SIM	FAB 102 614	--	ETC/L167
6	Power Supply	DH1716-5D	--	2008040041
	Power Supply	DH1716-5D	--	2008040050
7	Load	TF100	--	09121648
	Load	TF100	--	09121605



1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

L1.4 denotes LTE network with 1.4MHz channel bandwidth.
 L3 denotes LTE network with 3MHz channel bandwidth.
 L5 denotes LTE network with 5MHz channel bandwidth.
 L10 denotes LTE network with 10MHz channel bandwidth.
 W denotes WCDMA network

WCDMA/LTE MSR:

Mix Carrier(x2): 1W (20W) + 1L (20W)

Mode 1 - W&L1.4, W&L3, W&L5, W&L10

MSR	Channel No.	Frequencies (MHz)
W & L1.4	4357(W) & 2593(L)	871.4+888.3
W & L3	4357(W) & 2585(L)	871.4+887.5
W & L5	4357(W) & 2575(L)	871.4+886.5
W & L10	4357(W) & 2550(L)	871.4+884.0

Mode 2 - W&L1.4, W&L3, W&L5, W&L10

MSR	Channel No.	Frequencies (MHz)
W & L1.4	4369(W) & 2617(L)	873.8+890.7
W & L3	4369(W) & 2609(L)	873.8+889.9
W & L5	4369(W) & 2599(L)	873.8+888.9
W & L10	4369(W) & 2574(L)	873.8+886.4

Mode 3 - L1.4&W, L3&W, L5&W, L10&W

MSR	Channel No.	Frequencies (MHz)
L1.4 & W	2457(L) & 4458(W)	874.7+891.6
L3 & W	2465(L) & 4458(W)	875.5+891.6
L5 & W	2475(L) & 4458(W)	876.5+891.6
L10 & W	2500(L) & 4458(W)	879.0+891.6

Mode 4 - W&L1.4

MSR	Channel No.	Frequencies (MHz)
W & L1.4	4357(W) & 2457(L)	871.4+874.7

Mode 5 - L1.4&W

MSR	Channel No.	Frequencies (MHz)
L1.4 & W	2593(L) & 4458(W)	888.3+891.6

**Mix Carrier(x3): 2W (2x15W) + 1L (1x10W)**

Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10

MSR	Channel No.	Frequencies (MHz)
W&W & L1.4	4369(W)&4394(W) & 2617(L)	873.8+878.8+890.7
W&W & L3	4369(W)&4394(W) & 2609(L)	873.8+878.8+889.9
W&W & L5	4369(W)&4394(W) & 2599(L)	873.8+878.8+888.9
W&W & L10	4369(W)&4394(W) & 2574(L)	873.8+878.8+886.4

Mix Carrier(x4): 2W (2x10W) + 2L (2x10W)

Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5

MSR	Channel No.	Frequencies (MHz)
W&W & L1.4&L1.4	4369(W)&4394(W) & 2603(L)&2617(L)	873.8+878.8+889.3+890.7
W&W & L3&L3	4369(W)&4394(W) & 2579(L)&2609(L)	873.8+878.8+886.9+889.9
W&W & L5&L5	4369(W)&4394(W) & 2549(L)&2599(L)	873.8+878.8+883.9+888.9

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



Product Service

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure, test laboratories or an open test area as appropriate.

The EUT was powered from a -48V DC supply.

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.7 MODIFICATION RECORD

Mod State 0 - No modifications were made to the EUT during testing.

1.8 ALTERNATIVE TEST SITE

Only Radiated Spurious Emissions testing has been performed under the following site registrations:

FCC Accreditation 910917:
The State Radio Monitoring Centre, No.80 Beilishi Road Xicheng District Beijing, China.

Industry Canada Accreditation 7308A-1:
The State Radio Monitoring Centre, No.80 Beilishi Road Xicheng District Beijing, China.



Product Service

SECTION 2

TEST DETAILS

FCC and Industry Canada Testing of the
Ericsson RRUS 11 B5 / KRC 161 285/2



2.1 MAXIMUM PEAK OUTPUT POWER - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
 FCC CFR 47 Part 22, Clause 22.913 (a)
 Industry Canada RSS-132, Clause 5.4

2.1.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.1.3 Date of Test and Modification State

19, 23 and 24 July 2013 – Modification State 0

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132.

Using a power meter and attenuator(s), the output power of the EUT was measured at the antenna terminal.

Since the EUT working in MIMO mode, the EUT transmit on two antennas simultaneously in the same frequency range, using the Measure-and-Sum approach, the output power at both TX antennas RF A and RF B were tested, and the total output power were then summed mathematically in linear power units.

The path loss was measured and entered to the power meter as a reference level offset to get the output power value directly.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W
 - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10
 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5

2.1.6 Environmental Conditions

	19 July 2013	23 July 2013	24 July 2013
Ambient Temperature	23.5°C	23.8°C	24.0°C
Relative Humidity	60.5%	63.0%	65.0%



2.1.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132 for Maximum Peak Output Power.

The test results are shown below

Antenna RF A and RF B

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 1 - W&L1.4, W&L3, W&L5, W&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	871.4+888.3	45.73	37.41	45.83	38.28	48.79	75.69
W & L3	871.4+887.5	45.76	37.67	45.87	38.64	48.83	76.31
W & L5	871.4+886.5	45.80	38.02	45.88	38.73	48.85	76.75
W & L10	871.4+884.0	45.84	38.37	45.90	38.90	48.88	77.27

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	871.4+888.3	45.67	36.90	45.80	38.02	48.75	74.92
W & L3	871.4+887.5	45.72	37.33	45.81	38.11	48.78	75.44
W & L5	871.4+886.5	45.75	37.58	45.85	38.46	48.81	76.04
W & L10	871.4+884.0	45.78	37.84	45.87	38.64	48.84	76.48

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	871.4+888.3	45.57	36.06	45.67	36.90	48.63	72.96
W & L3	871.4+887.5	45.57	36.06	45.76	37.67	48.68	73.73
W & L5	871.4+886.5	45.70	37.15	45.81	38.11	48.77	75.26
W & L10	871.4+884.0	45.71	37.24	45.80	38.02	48.77	75.26

Configuration 1 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10**LTE (E-TM1.1) & WCDMA (QPSK)**

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	873.8+890.7	45.69	37.07	45.79	37.93	48.75	75.00
W & L3	873.8+889.9	45.71	37.24	45.86	38.55	48.80	75.79
W & L5	873.8+888.9	45.76	37.67	45.86	38.55	48.82	76.22
W & L10	873.8+886.4	45.80	38.02	45.91	38.99	48.87	77.01

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	873.8+890.7	45.78	37.84	45.90	38.90	48.85	76.74
W & L3	873.8+889.9	45.81	38.11	45.93	39.17	48.88	77.28
W & L5	873.8+888.9	45.80	38.02	45.92	39.08	48.87	77.10
W & L10	873.8+886.4	45.78	37.84	45.85	38.46	48.83	76.30

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W & L1.4	873.8+890.7	45.74	37.50	45.89	38.82	48.83	76.32
W & L3	873.8+889.9	45.81	38.11	45.95	39.36	48.89	77.47
W & L5	873.8+888.9	45.86	38.55	45.96	39.45	48.92	78.00
W & L10	873.8+886.4	45.91	38.99	45.99	39.72	48.96	78.71

Configuration 1 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W**LTE (E-TM1.1) & WCDMA (QPSK)**

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	874.7+891.6	45.75	37.58	45.78	37.84	48.77	75.42
L3 & W	875.5+891.6	45.77	37.76	45.85	38.46	48.82	76.22
L5 & W	876.5+891.6	45.80	38.02	45.84	38.37	48.83	76.39
L10 & W	879.0+891.6	45.81	38.11	45.84	38.37	48.84	76.48

**LTE (E-TM3.2) & WCDMA (16QAM)**

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	874.7+891.6	45.69	37.07	45.75	37.58	48.73	74.65
L3 & W	875.5+891.6	45.72	37.33	45.77	37.76	48.76	75.09
L5 & W	876.5+891.6	45.72	37.33	45.78	37.84	48.76	75.17
L10 & W	879.0+891.6	45.74	37.50	45.78	37.84	48.77	75.34

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
L1.4 & W	874.7+891.6	45.57	36.06	45.64	36.64	48.62	72.70
L3 & W	875.5+891.6	45.65	36.73	45.69	37.07	48.68	73.80
L5 & W	876.5+891.6	45.66	36.81	45.73	37.41	48.71	74.22
L10 & W	879.0+891.6	45.66	36.81	45.71	37.24	48.70	74.05

Mix Carrier(x3): 2W+1L

Configuration 1 - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	873.8+878.8+890.7	45.83	38.28	45.91	38.99	48.88	77.27
W&W & L3	873.8+878.8+889.9	45.85	38.46	45.95	39.36	48.91	77.82
W&W & L5	873.8+878.8+888.9	45.87	38.64	45.94	39.26	48.92	77.90
W&W & L10	873.8+878.8+886.4	45.89	38.82	45.98	39.63	48.95	78.45

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	873.8+878.8+890.7	45.85	38.46	45.92	39.08	48.90	77.54
W&W & L3	873.8+878.8+889.9	45.85	38.46	45.94	39.26	48.91	77.72
W&W & L5	873.8+878.8+888.9	45.85	38.46	45.94	39.26	48.91	77.72
W&W & L10	873.8+878.8+886.4	45.89	38.82	45.98	39.63	48.95	78.45

**LTE (E-TM3.1) & WCDMA (64QAM)**

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4	873.8+878.8+890.7	45.68	36.98	45.76	37.67	48.73	74.65
W&W & L3	873.8+878.8+889.9	45.71	37.24	45.79	37.93	48.76	75.17
W&W & L5	873.8+878.8+888.9	45.72	37.33	45.81	38.11	48.78	75.44
W&W & L10	873.8+878.8+886.4	45.75	37.58	45.84	38.37	48.81	75.95

Mix Carrier(x4): 2W+2L

Configuration 1 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5, W&W&L10&L10

LTE (E-TM1.1) & WCDMA (QPSK)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	873.8+878.8+889.3+890.7	45.72	37.33	45.80	38.02	48.77	75.35
W&W & L3&L3	873.8+878.8+886.9+889.9	45.79	37.93	45.89	38.82	48.85	76.75
W&W & L5&L5	873.8+878.8+883.9+888.9	45.82	38.19	45.89	38.82	48.87	77.01

LTE (E-TM3.2) & WCDMA (16QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	873.8+878.8+889.3+890.7	45.70	37.15	45.83	38.28	48.78	75.43
W&W & L3&L3	873.8+878.8+886.9+889.9	45.77	37.76	45.84	38.37	48.82	76.13
W&W & L5&L5	873.8+878.8+883.9+888.9	45.76	37.67	45.87	38.64	48.83	76.31

LTE (E-TM3.1) & WCDMA (64QAM)

MSR	Frequency(MHz)	Antenna A		Antenna B		*Total (dBm) RMS	*Total (W) RMS
		Result (dBm) RMS	Result (W) RMS	Result (dBm) RMS	Result (W) RMS		
W&W & L1.4&L1.4	873.8+878.8+889.3+890.7	45.62	36.48	45.72	37.33	48.68	73.81
W&W & L3&L3	873.8+878.8+886.9+889.9	45.69	37.07	45.79	37.93	48.75	75.00
W&W & L5&L5	873.8+878.8+883.9+888.9	45.73	37.41	45.81	38.11	48.78	75.52

Note *:

Two transmitters output power were summed up according to FCC KDB662911 D01 for MIMO mode.

This unit is tested without antenna. ERP/EIRP compliance is addressed at the time of licensing, as required by the responsible FCC/IC Bureau(s). Licensee's are required to take into account maximum allowed antenna gain used in combination with above power settings to prevent the radiated output power to exceed the limits.



Product Service

Limit	≤820W or ≤+59.1dBm
-------	--------------------

Remarks

The EUT does not exceed 820W or 59.1dBm at the measured frequencies.



2.2 PEAK – AVERAGE RATIO

2.2.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.913 (a)
Industry Canada RSS-132, Clause 5.4

2.2.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.2.3 Date of Test and Modification State

19, 23 and 24 July 2013 – Modification State 0

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 22 and Industry Canada RSS-132.

A peak to average ratio measurement is performed at the conducted port of the EUT. The spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level.

The measurements were performed on the combined output connector RF A. Limited complementary measurement were done at the output connector RF B to verify identical performance for both transmitter chains in MIMO mode.

The path loss measured and entered as a reference level offset.

The test was performed with the EUT in the following configurations and modes of operation:

- | | |
|-----------------|--|
| Configuration 1 | <ul style="list-style-type: none"> - Mode 1 - W&L1.4, W&L3, W&L5, W&L10 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10 - Mode 3 - L1.4&W, L3&W, L5&W, L10&W - Mode 6 - W&W&L1.4, W&W&L3, W&W&L5, W&W&L10 - Mode 7 - W&W&L1.4&L1.4, W&W&L3&L3, W&W&L5&L5 |
|-----------------|--|

2.2.6 Environmental Conditions

	19 July 2013	23 July 2013	24 July 2013
Ambient Temperature	23.5°C	23.8°C	24.0°C
Relative Humidity	60.5%	63.0%	65.0%



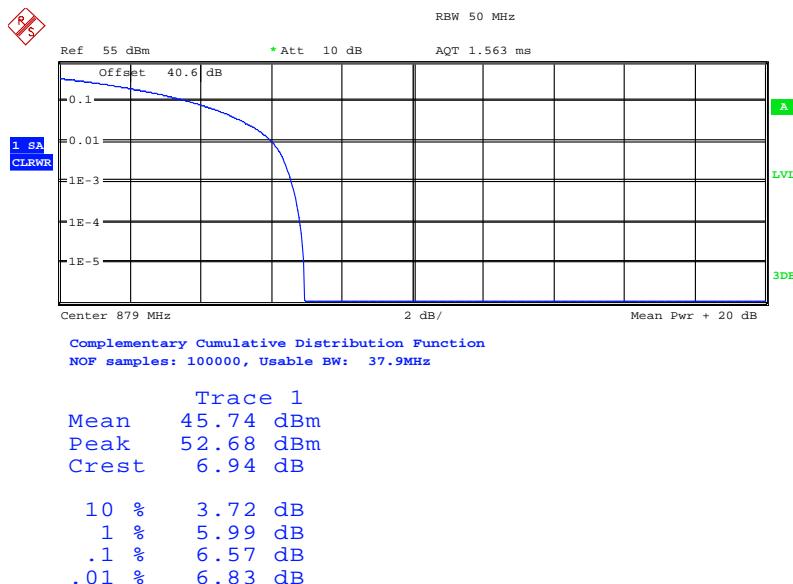
2.2.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 22 and Industry Canada RSS-132 for Peak – Average Ratio.

The test results are shown below.

Mix Carrier(x2): 1W+1L

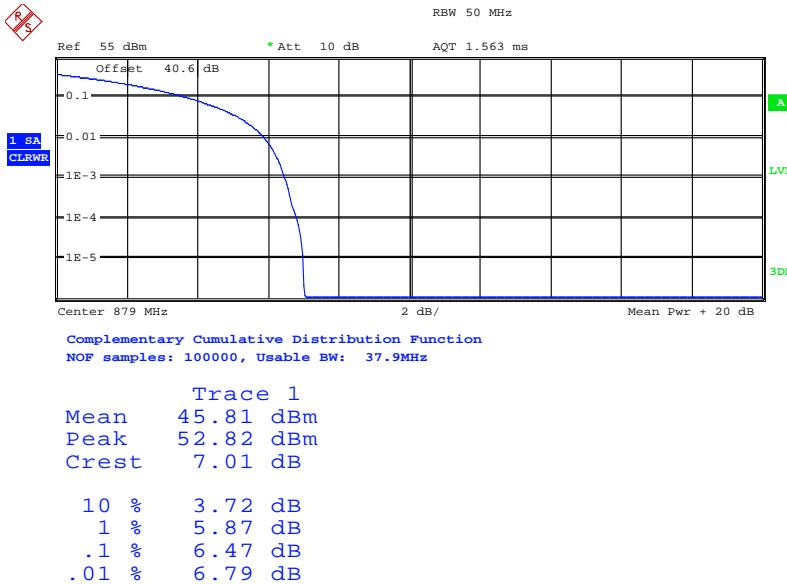
Configuration 1 - Mode 1 - W&L1.4



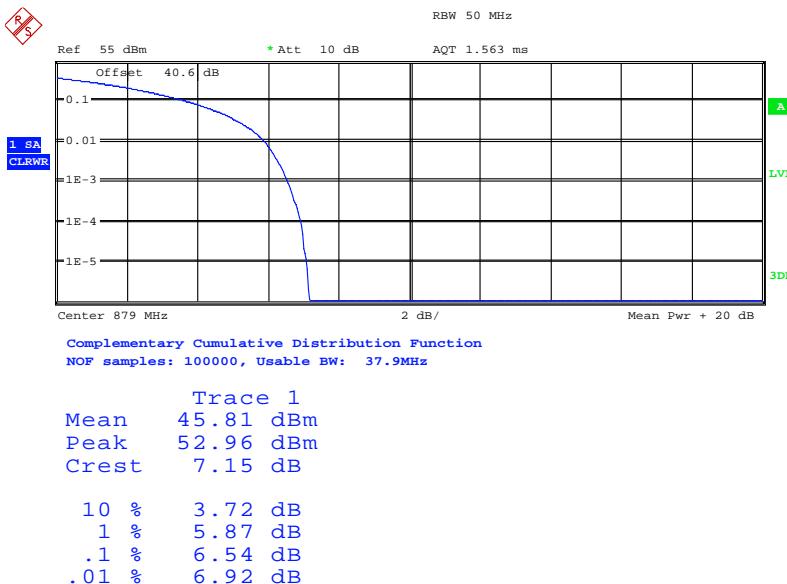
Date: 19.JUL.2013 10:33:02



Product Service

Configuration 1 - Mode 1 - W&L3

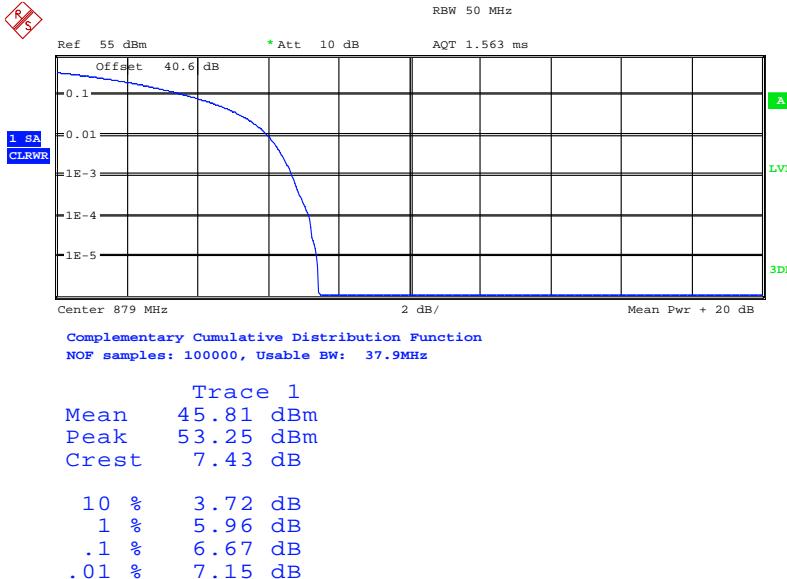
Date: 19.JUL.2013 11:11:13

Configuration 1 - Mode 1 - W&L5

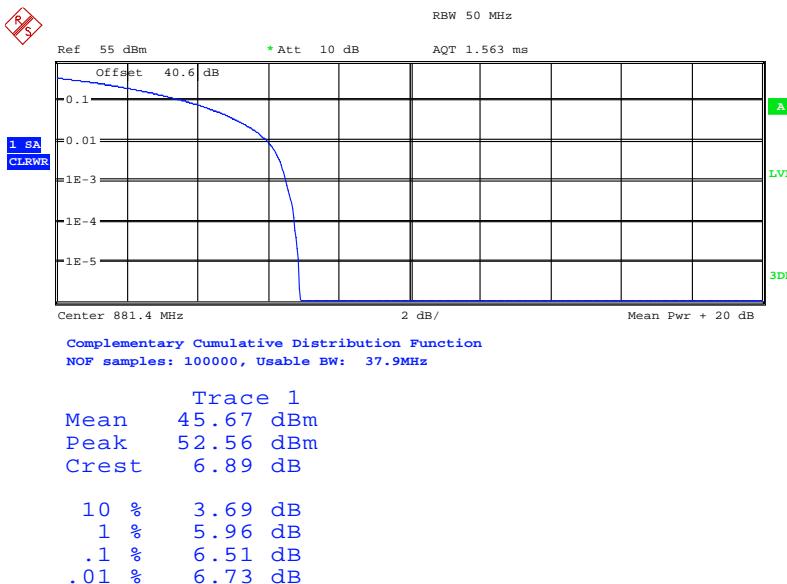
Date: 19.JUL.2013 11:46:26



Product Service

Configuration 1 - Mode 1 - W&L10

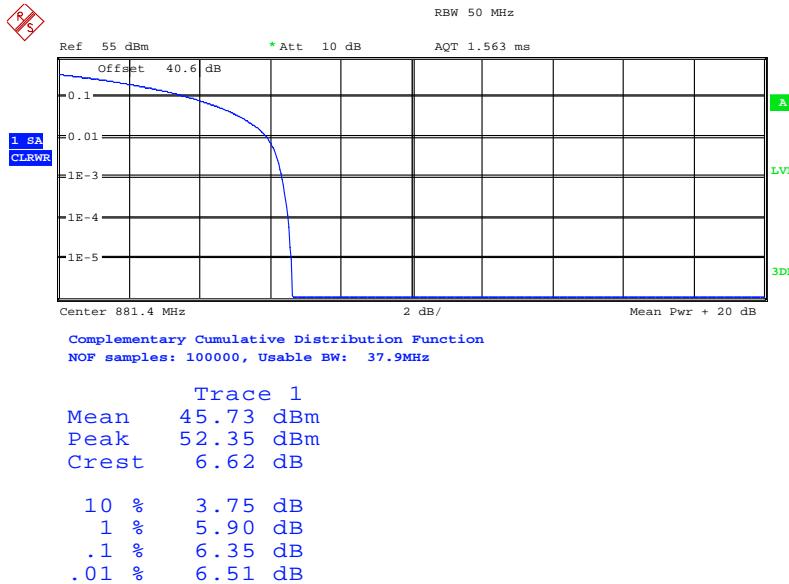
Date: 19.JUL.2013 13:14:41

Configuration 1 - Mode 2 - W&L1.4

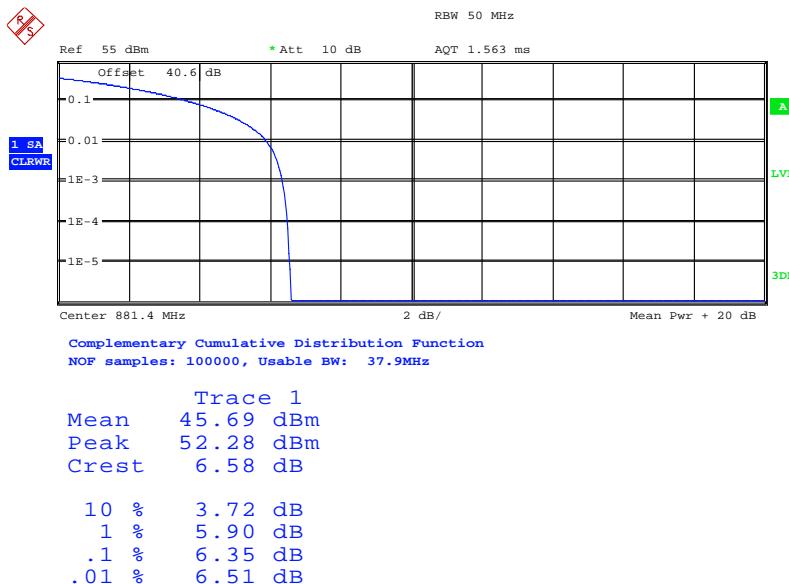
Date: 19.JUL.2013 15:35:50



Product Service

Configuration 1 - Mode 2 - W&L3

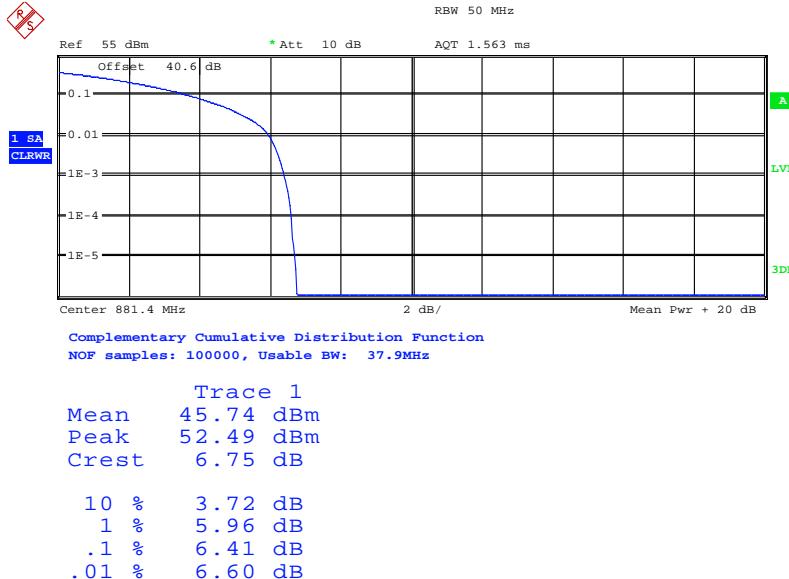
Date: 19.JUL.2013 16:02:29

Configuration 1 - Mode 2 - W&L5

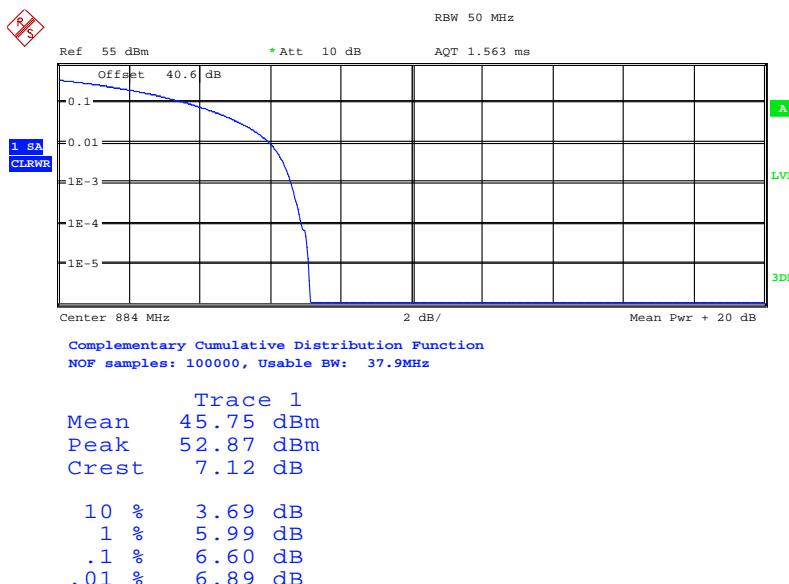
Date: 19.JUL.2013 16:10:58



Product Service

Configuration 1 - Mode 2 - W&L10

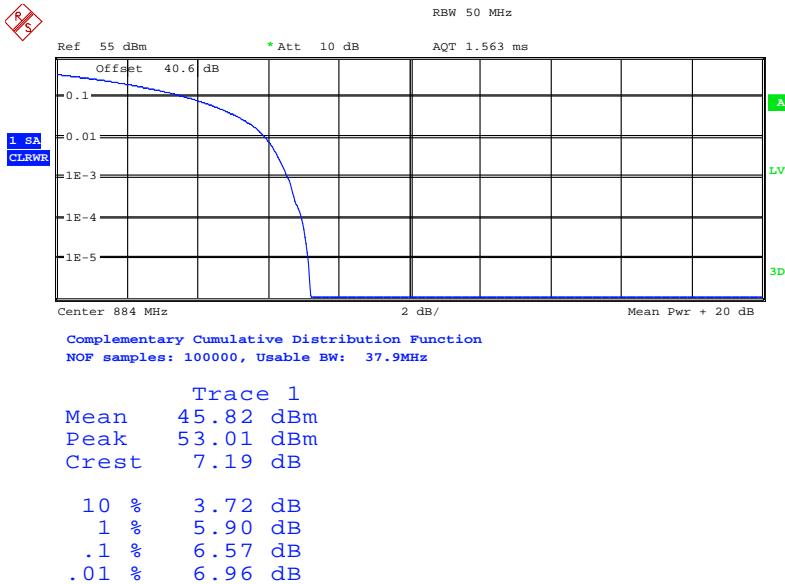
Date: 19.JUL.2013 16:38:05

Configuration 1 - Mode 3 - L1.4&W

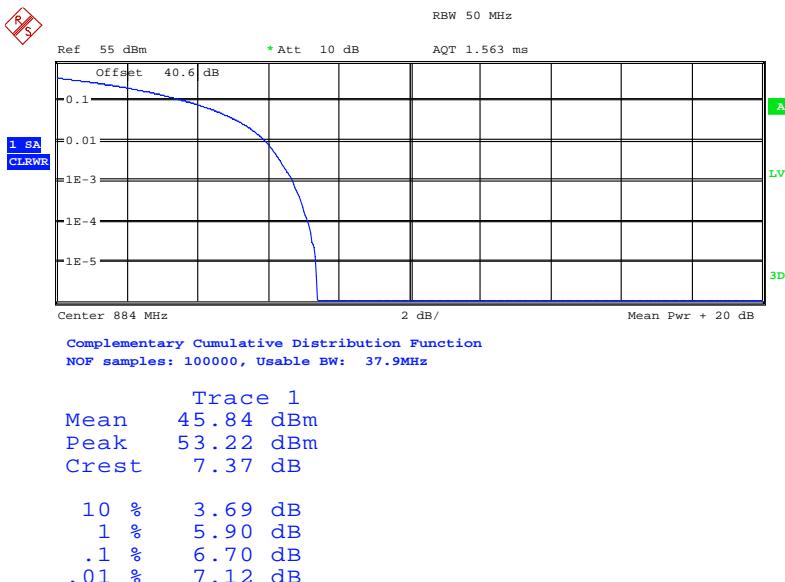
Date: 19.JUL.2013 15:02:20



Product Service

Configuration 1 - Mode 3 - L3&W

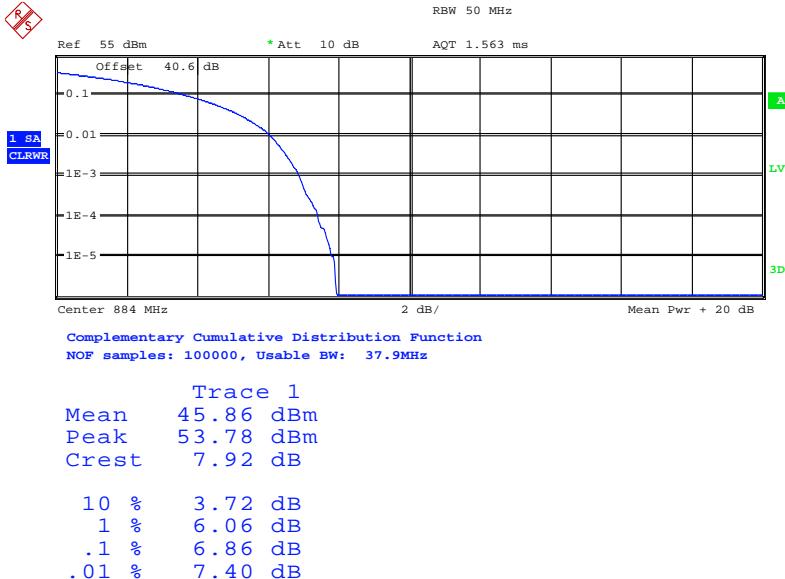
Date: 19.JUL.2013 14:43:43

Configuration 1 - Mode 3 - L5&W

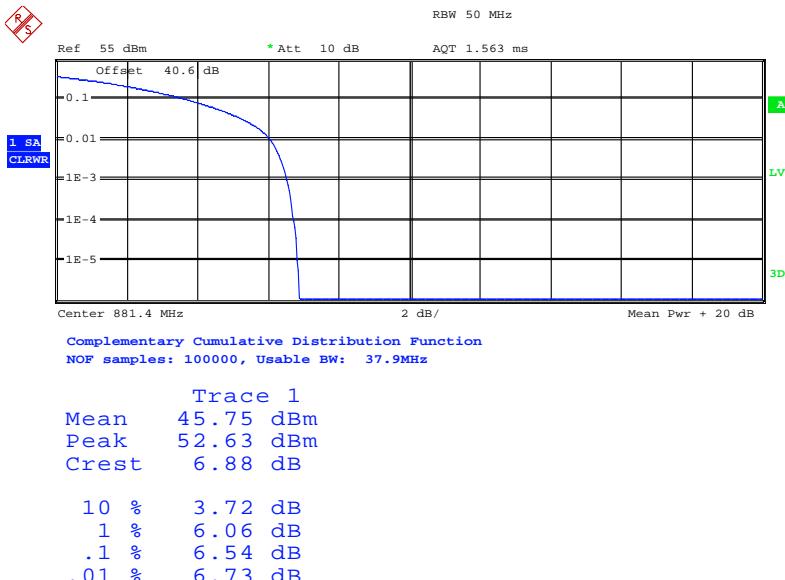
Date: 19.JUL.2013 14:03:07



Product Service

Configuration 1 - Mode 3 - L10&W

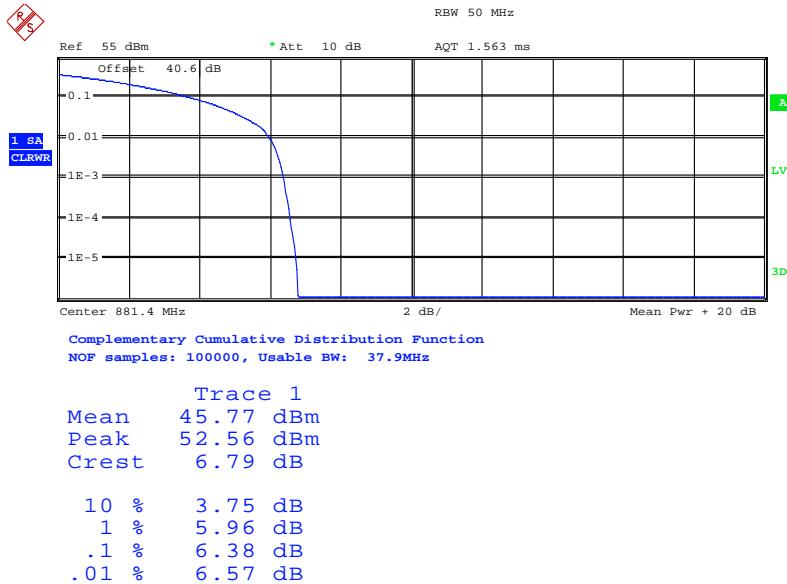
Date: 19.JUL.2013 13:52:43

Mix Carrier(x3): 2W+1LConfiguration 1 - Mode 6 - W&W&L1.4

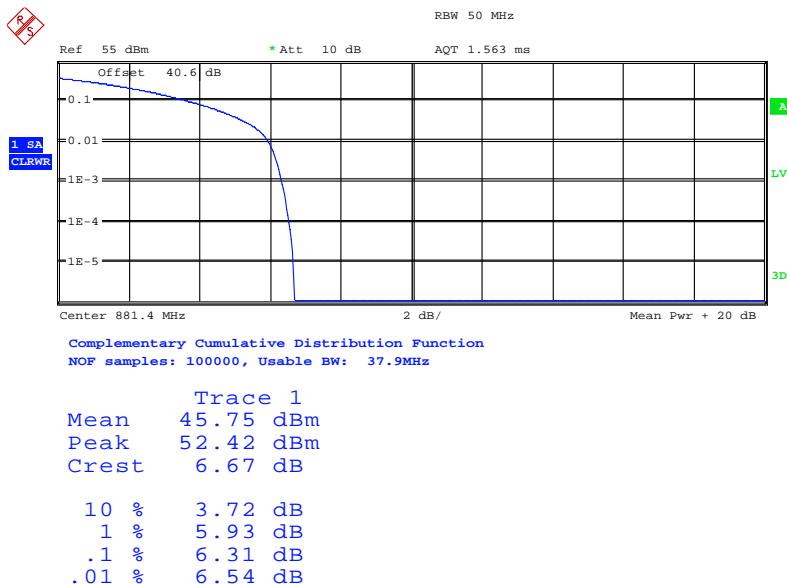
Date: 24.JUL.2013 15:02:33



Product Service

Configuration 1 - Mode 6 - W&W&L3

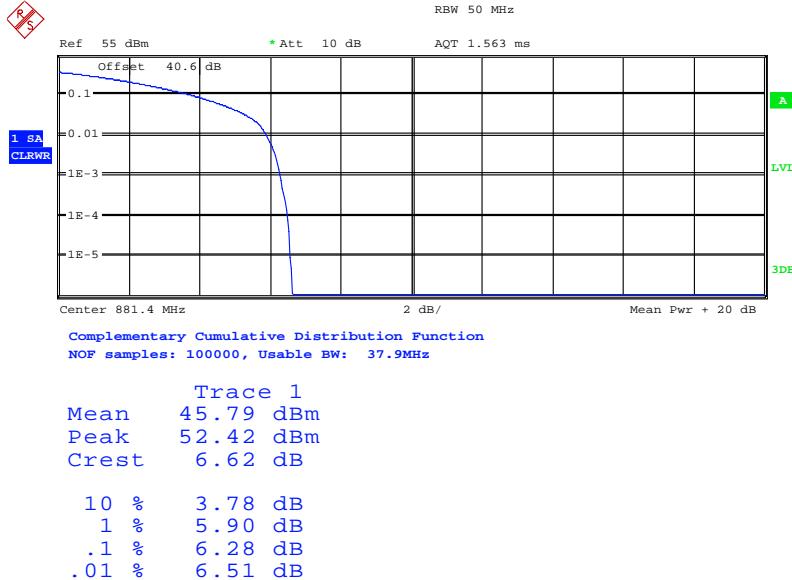
Date: 24.JUL.2013 15:14:30

Configuration 1 - Mode 6 - W&W&L5

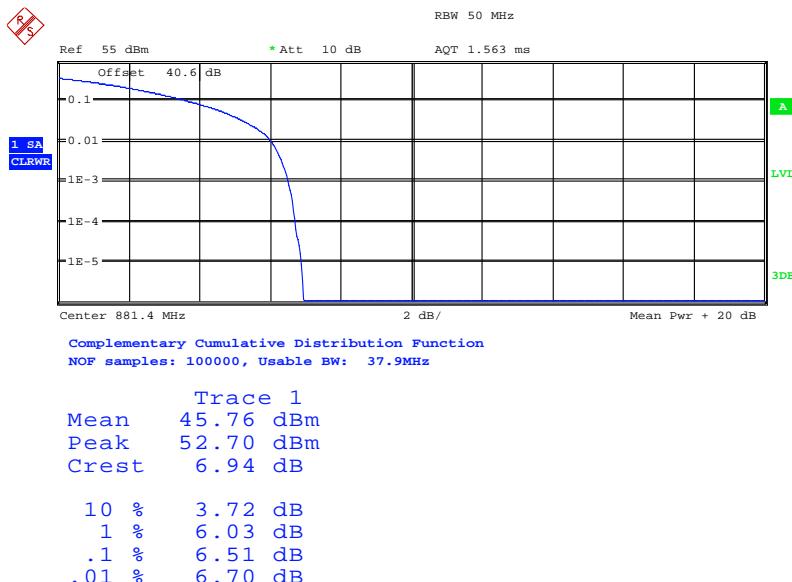
Date: 24.JUL.2013 15:25:42



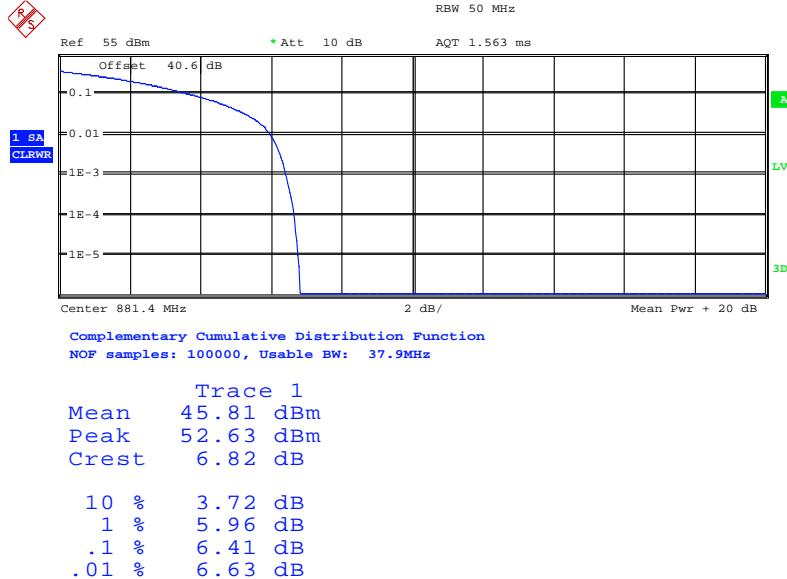
Product Service

Configuration 1 - Mode 6 - W&W&L10

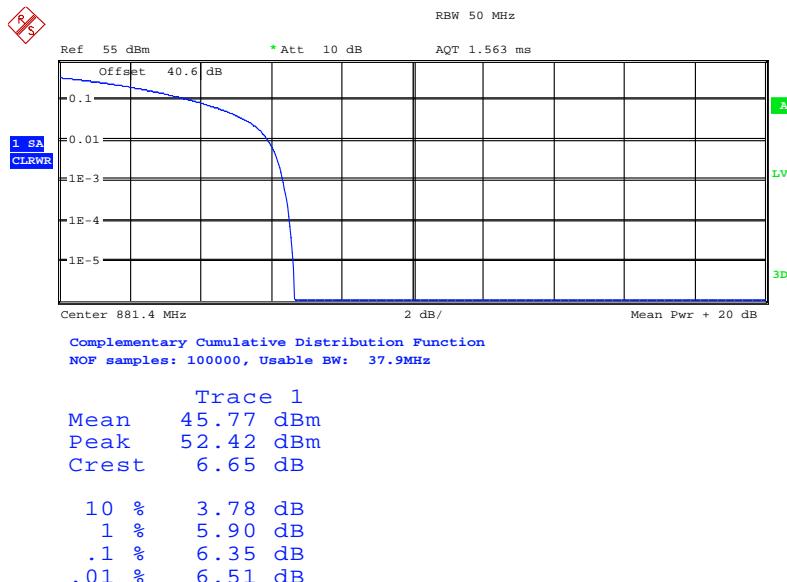
Date: 24.JUL.2013 15:37:42

Mix Carrier(x4): 2W+2LConfiguration 1 - Mode 7 – W&W&L1.4&L1.4

Date: 23.JUL.2013 15:36:25

Configuration 1 - Mode 7 - W&W&L3&L3

Date: 23.JUL.2013 15:59:34

Configuration 1 - Mode 7 - W&W&L5&L5

Date: 23.JUL.2013 16:12:38

Limit	13dB
-------	------

Remarks

The Peak – Average ratio does not exceed 13dB at the measured frequencies.



2.3 SPURIOUS EMISSIONS AT ANTENNA TERMINALS ($\pm 1\text{MHz}$)

2.3.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
 FCC CFR 47 Part 22, Clause 22.917(b)
 Industry Canada RSS-132 Clause 5.5

2.3.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.3.3 Date of Test and Modification State

19 and 23 July 2013 – Modification State 0

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132.

In accordance with 22.917(b), at least 1% of the emission bandwidth should be used for the frequencies offset up to 1MHz away from the block edge. For WCDMA/LTE mix carrier 1W+1L, with WCDMA signal at the edge, which is selected as the worst case, 30kHz resolution bandwidth was used. 30kHz is <1% of the Emission Bandwidth (5MHz nominal Bandwidth setting). To compensate for the reduced measurement bandwidth, at the frequency range up to 1MHz away from the band edges, the limit was adjusted from -13dBm to -15.2dBm. According to the FCC rules, a RBW of 100kHz for measurements of emissions > 1MHz away from the band edges. Spectrum analyser detector was set as RMS.

The limit was adjusted with a correction of -3dB [10Log(2)] by using the Measure and Add 10Log(N) dB technique according to FCC KDB662911 D01 accounting for simultaneous transmission from antenna ports RF A and RF B.

The measurements were performed on the combined output connector RF A. Limited complementary measurement were done at the output connector RF B to verify identical performance for both transmitter chains.

The EUT was tested at it's maximum power level. The path loss measured and entered as a reference level offset.

The test was performed with the EUT in the following configurations and modes of operation:

Configuration 1 - Mode 4 - W&L1.4
 - Mode 5 - L1.4&W



2.3.6 Environmental Conditions

	19 July 2013	23 July 2013
Ambient Temperature	23.5°C	23.8°C
Relative Humidity	60.5%	63.0%

2.3.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132 for Spurious Emissions Antenna Terminals ($\pm 1\text{MHz}$).

Below are the Frequencies the EUT was tested against along with the tested channels.

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 4 - W&L1.4 and 5 - L1.4&W

Band Edge Frequency	Edge Test with WCDMA Channel No./Frequencies	RBW / VBW (kHz)	Limit (dB)
Bottom 869MHz	Channel: 4357&2457 Frequency: 871.4MHz(W)+ 874.7MHz(L1.4)	30 / 300	-18.2
Top 894MHz	Channel: 4458&2593 Frequency: 891.6 MHz(W)+ 888.3MHz(L1.4)	30 / 300	-18.2

The channels shown in the table above are the minimum and maximum channels that can be used in the authorised frequency ranges to maintain compliance. Channels used outside of those stated and power levels used beyond those stated in the table exceed the specification limits, thus they cannot be used.

The channels outside of those shown in the table above were not tested at lower power levels to determine a level at which compliance would be achieved. Therefore, to maintain compliance, only the channels shown in the table above shall be used.



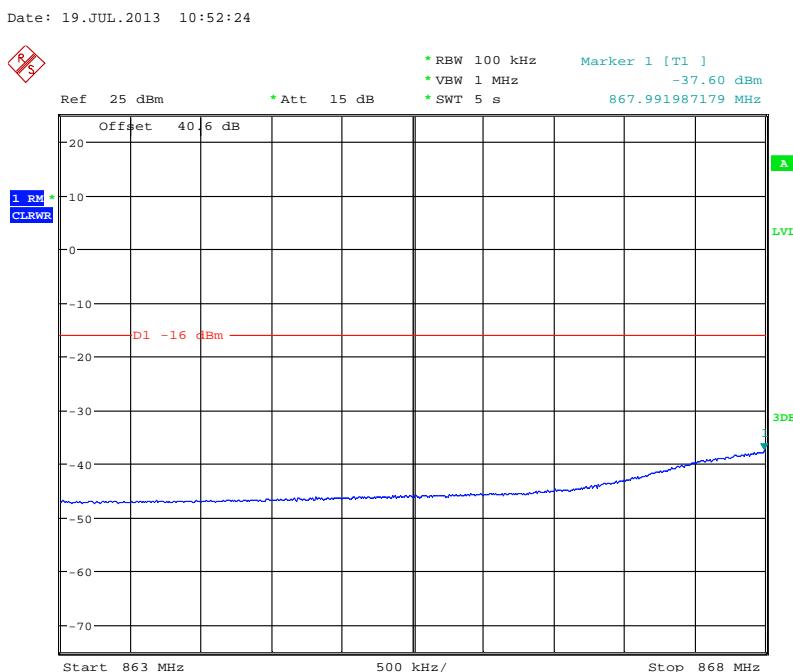
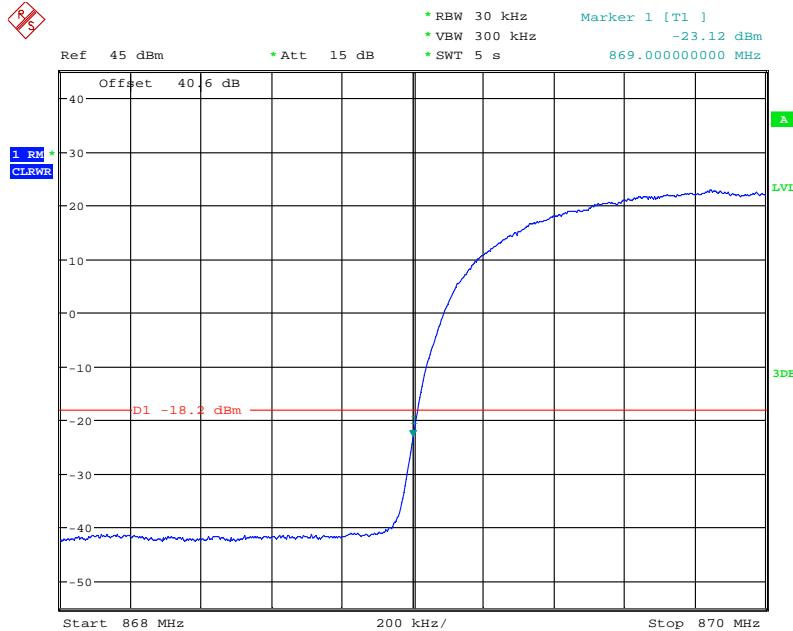
Product Service

The test results are shown below

Mix Carrier(x2): 1W+1L

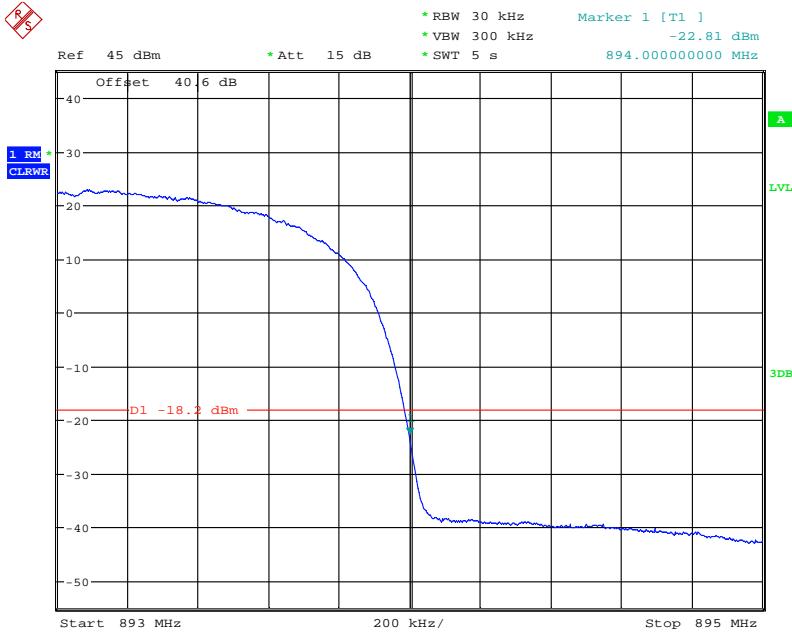
LTE (E-TM1.1) & WCDMA (QPSK)

Configuration 1 - Mode 4 - W&L1.4

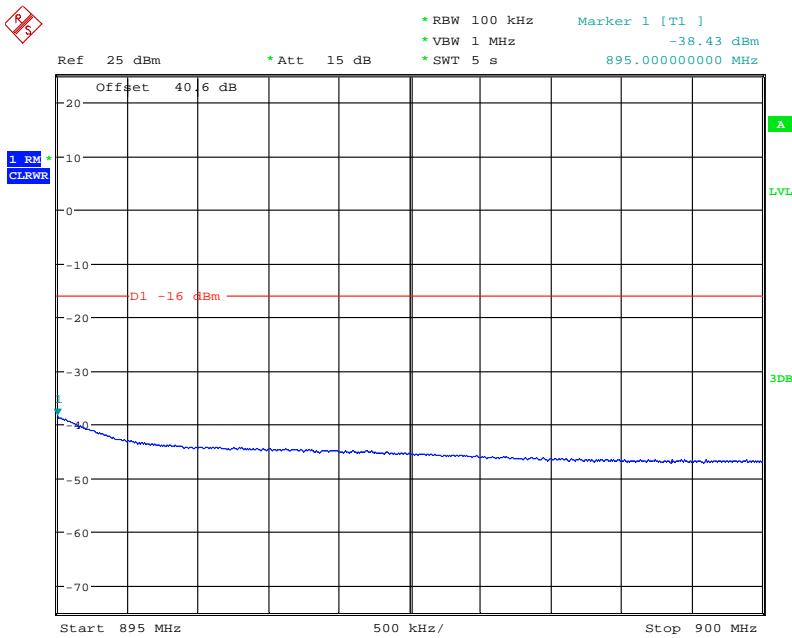




Product Service

Configuration 1 - Mode 5 - L1.4&W

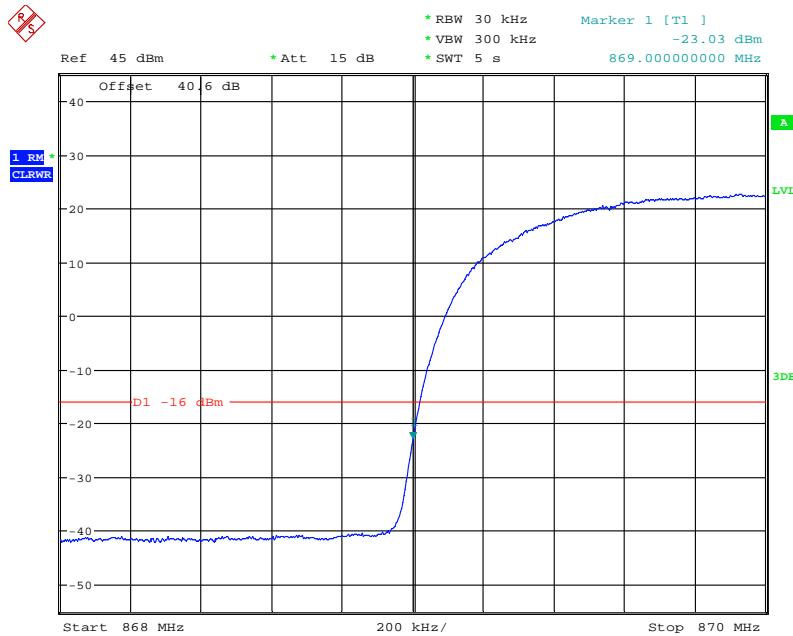
Date: 19.JUL.2013 14:58:56



Date: 19.JUL.2013 14:57:28

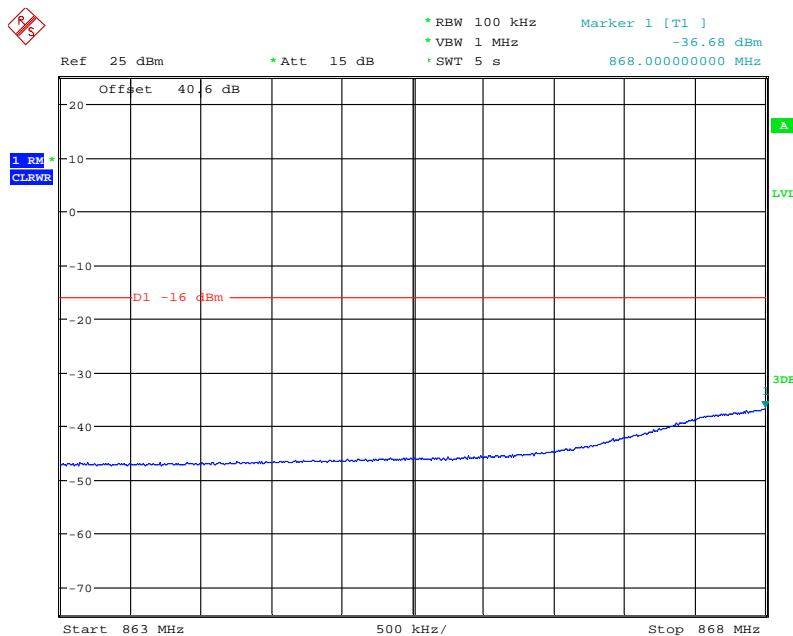


Product Service

LTE (E-TM3.2) & WCDMA (16QAM)Configuration 1 - Mode 4 - W&L1.4

Date: 23.JUL.2013 09:46:10

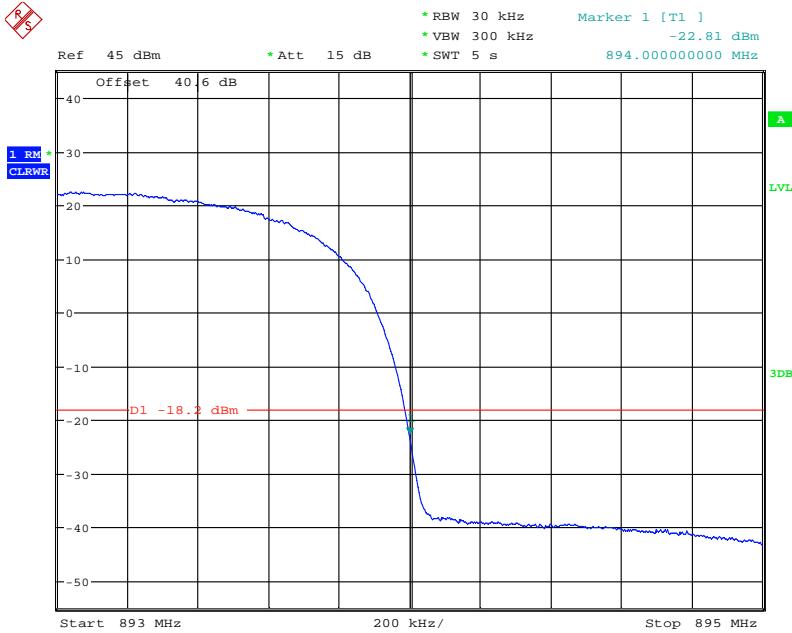
Note: The results offset up to 1MHz away from the block edge should be compared to a limit of -18.2dBm.



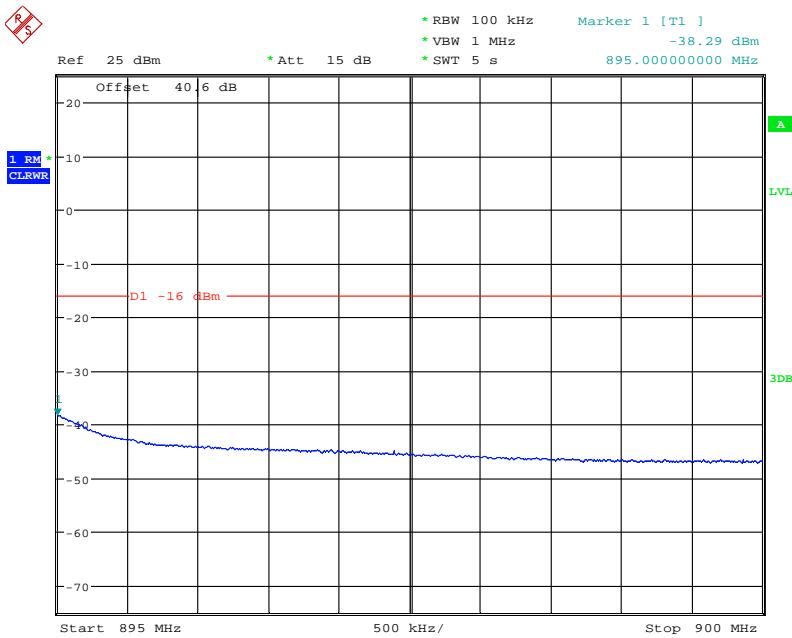
Date: 23.JUL.2013 09:43:48



Product Service

Configuration 1 - Mode 5 – L1.4&W

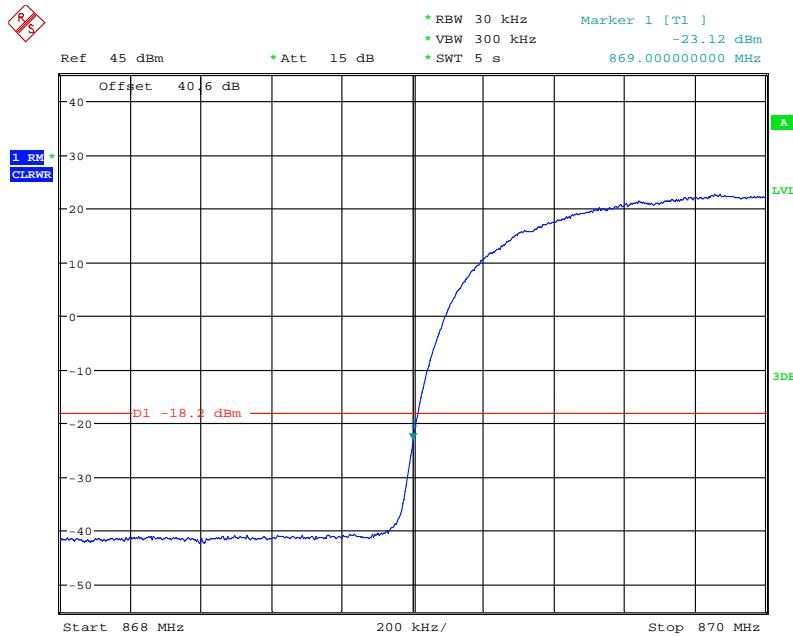
Date: 23.JUL.2013 14:26:39



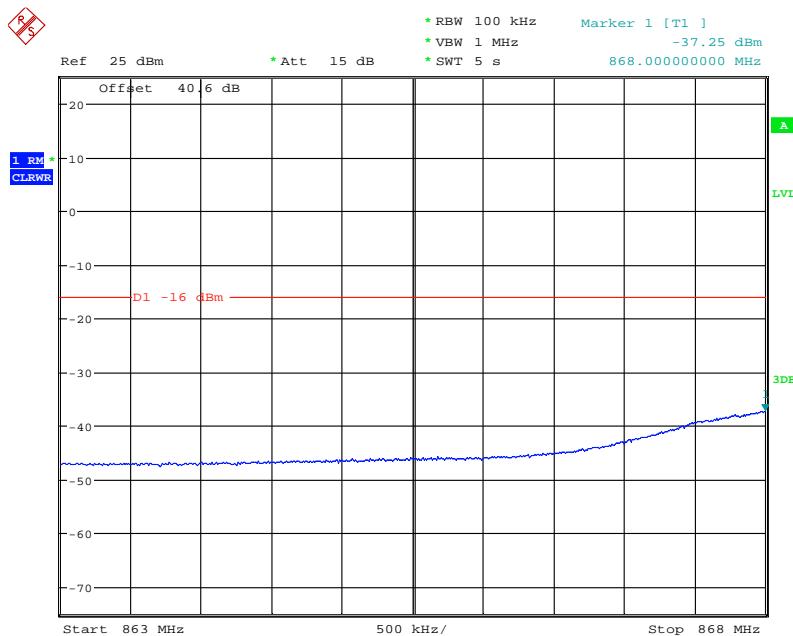
Date: 23.JUL.2013 14:24:41



Product Service

LTE (E-TM3.1) & WCDMA (64QAM)Configuration 1 - Mode 4 - W&L1.4

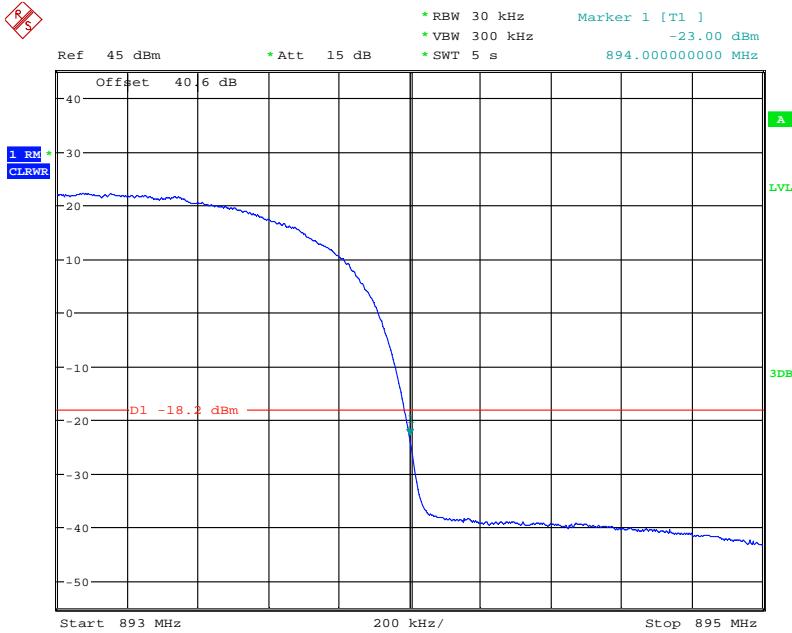
Date: 23.JUL.2013 10:16:25



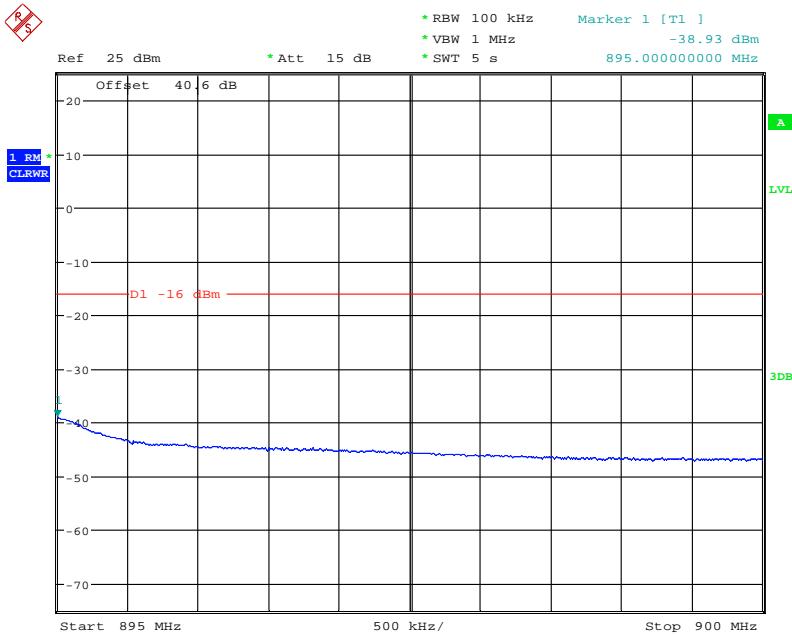
Date: 23.JUL.2013 10:17:32



Product Service

Configuration 1 - Mode 5 – L1.4&W

Date: 23.JUL.2013 13:20:31



Date: 23.JUL.2013 13:21:22

Limit

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10\log P \text{ dB} + 10\log(N_{ANT})$.



2.4 RADIATED SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1053
 FCC CFR 47 Part 22, Clause 22.917 (a)
 Industry Canada RSS-132, Clause 5.5

2.4.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.4.3 Date of Test and Modification State

20 and 21 August 2013 – Modification State 0

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132.

A preliminary profile of the Spurious Radiated Emissions was obtained by operating the EUT on a remotely controlled turntable within the chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations.

Emissions identified within the range 30MHz – 10GHz were then formally measured using a Peak detector as the worst case.

In the frequency Range 30MHz – 10GHz, the measurement was performed with a resolution bandwidth of 1MHz as the worst case.

The measurements were performed at a 3m distance unless otherwise stated.

The limits for Spurious Emissions have been calculated, as shown below using the following formula:

Field Strength of Carrier - (43 + 10Log (P)) dB

Where:

Field Strength is measured in dB μ V/m

P is measured Transmitter Power in Watts



Determination of Spurious Emission Limit

As the EUT does not have an integral antenna, the field strength of the carrier has been calculated assuming that the power is to be fed to a half-wave tuned dipoles as per 2.1053 (a).

$$E_{(v/m)} = (30 \times G_i \times P_o)^{0.5} / d$$

Where G_i is the antenna gain of ideal half-wave dipoles,
 P_o is the power out of the transceiver in W,
 d is the measurement distance in meter.

Therefore at 3m measurement distance the field strength using the lowest transceiver output power would be:

$$E_{(v/m)} = (30 \times 1.64 \times 72.70)^{0.5} / 3 = 19.94 \text{ V/m} = 146.0 \text{ dB}\mu\text{V/m}$$

As per 22.917 (a) the spurious emission must be attenuated by $43 + 10\log(P_o)$ dB this gives:

$$43 + 10\log(72.70) = 61.6 \text{ dB}$$

Therefore the limit at 3m measurement distance is:

$$146.0 - 61.6 = 84.4 \text{ dB}\mu\text{V/m}$$

This limit has been used to determine Pass or Fail for the harmonics measured and detailed in the following results.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1 - W&L1.4
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W
 - Mode 6 - W&W&L1.4
 - Mode 7 - W&W&L1.4&L1.4

2.4.6 Environmental Conditions

	20 August 2013	21 August 2013
Ambient Temperature	24.0°C	23.0°C
Relative Humidity	55.0%	54.0%



2.4.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 & Part 22 and Industry Canada RSS-132 for Radiated Spurious Emissions.

The test results are shown below

Note: Only the worst case results plots have been included as all of the emissions are greater than 20dB below the limit. A set of plots have been included to show the measurement system noise floor.

LTE (E-TM1.1) & WCDMA (QPSK)

Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 2 - W&L1.4

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L3

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L5

No emissions were detected within 20dB of the limit.

Configuration 1 - Mode 2 - W&L10

No emissions were detected within 20dB of the limit.

LTE (E-TM3.2) & WCDMA (16QAM)

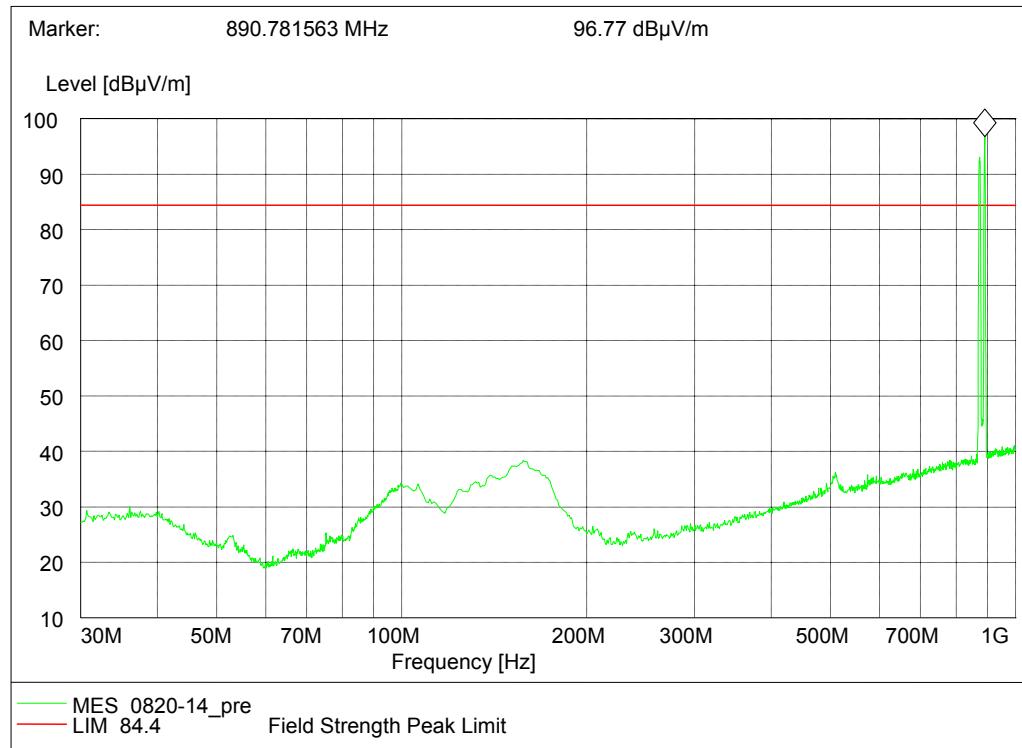
Mix Carrier(x2): 1W+1L

Configuration 1 - Mode 1 - W&L1.4

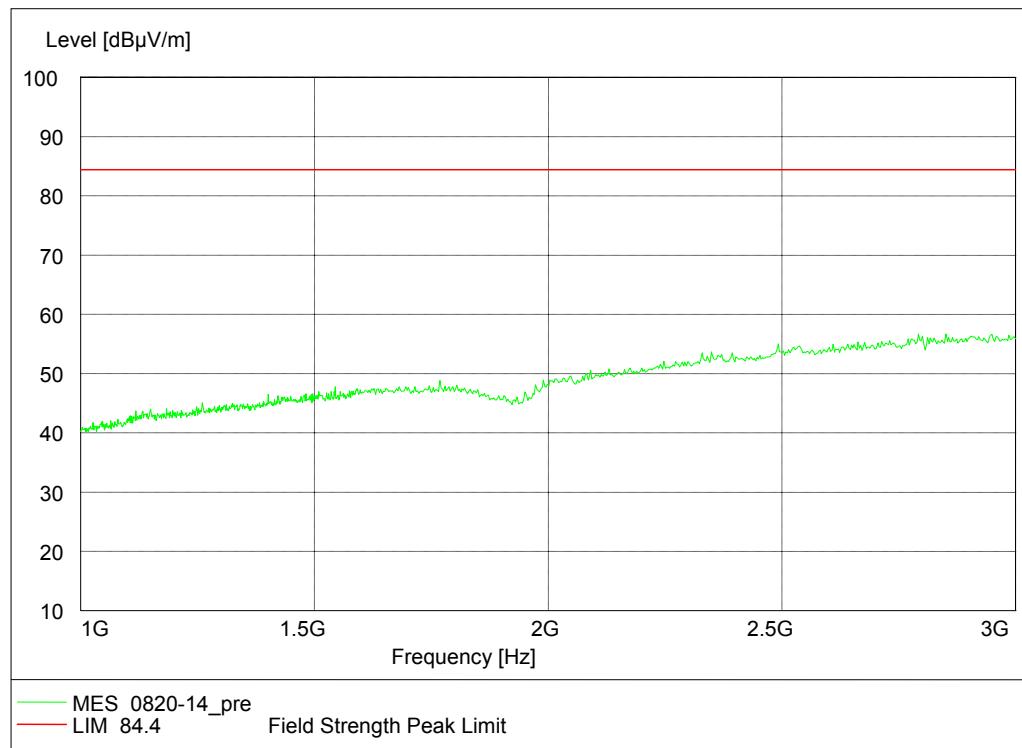
No emissions were detected within 20dB of the limit.

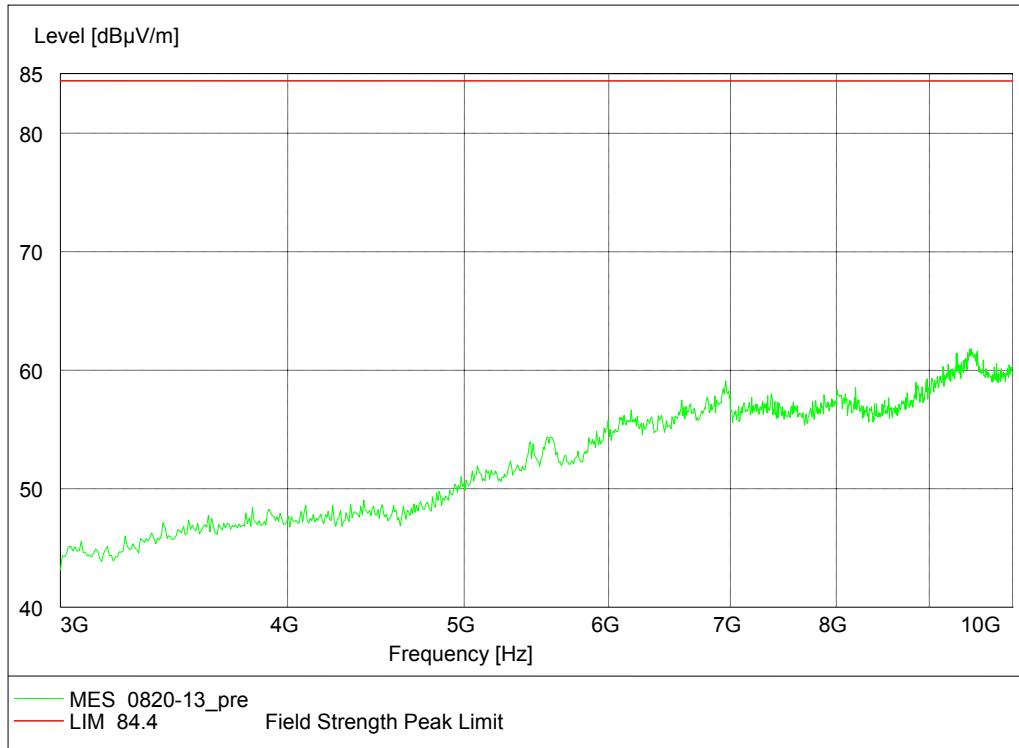


Product Service

Configuration 1 - Mode 2 - W&L1.430MHz - 1GHz

Note: The emission beyond the limit is the operating frequency.

1GHz - 3GHz

3GHz - 10GHzConfiguration 1 - Mode 3 - L1.4&W

No emissions were detected within 20dB of the limit.

LTE (E-TM3.1) & WCDMA (64QAM)Mix Carrier(x2): 1W+1LConfiguration 1 - Mode 2 - W&L1.4

No emissions were detected within 20dB of the limit.

LTE (E-TM1.1) & WCDMA (QPSK)Mix Carrier(x3): 2W+1LConfiguration 1 - Mode 6 - W&W&L1.4

No emissions were detected within 20dB of the limit.



Product Service

LTE (E-TM1.1) & WCDMA (QPSK)**Mix Carrier(x4): 2W+2L****Configuration 1 - Mode 7 - W&W&L1.4&L1.4**

No emissions were detected within 20dB of the limit.

Limit	-13dBm or 84.4dB μ V/m
-------	----------------------------

Remarks

The EUT does not exceed -13dBm or 84.4dB μ V/m at the measured frequencies.



2.5 CONDUCTED SPURIOUS EMISSIONS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
 FCC CFR 47 Part 22, Clause 22.917 (a)
 Industry Canada RSS-132, Clause 5.5

2.5.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.5.3 Date of Test and Modification State

19, 23 and 24 July 2013 – Modification State 0

2.5.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132.

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using an attenuator and the frequency spectrum investigated from 9kHz to 10GHz. The EUT was set to transmit on maximum power. The resolution was set to 100kHz for 9kHz to 10GHz thus meeting the requirements of FCC CFR 47 Part 22, Clause 22.917 (b) and Industry Canada RSS-132, Clause 5.5. The spectrum analyser detector was set to peak and trace was kept on Max Hold.

The limit was adjusted with a correction of -3dB [10Log(2)] by using the Measure and Add 10Log(N) dB technique according to FCC KDB662911 D01 accounting for simultaneous transmission from antenna ports RF A and RF B.

The maximum path loss across the measurement band was used as the reference level offset to ensure worst case.

Measurements were made up to the 10th harmonics of the highest carrier frequency at least.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1 - W&L1.4, W&L10
 - Mode 2 - W&L1.4, W&L3, W&L5, W&L10
 - Mode 3 - L1.4&W, L10&W
 - Mode 6 - W&W&L1.4
 - Mode 7 - W&W&L1.4&L1.4



Product Service

2.5.6 Environmental Conditions

	19 July 2013	23 July 2013	24 July 2013
Ambient Temperature	23.5°C	23.8°C	24.0°C
Relative Humidity	60.5%	63.0%	65.0%

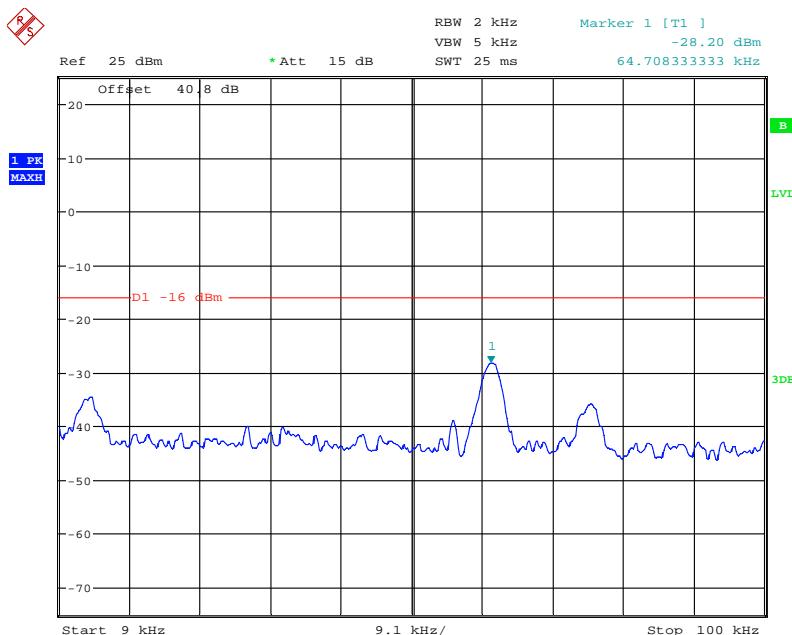
2.5.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 2 and Part 22 and Industry Canada RSS-132 for Conducted Spurious Emissions.

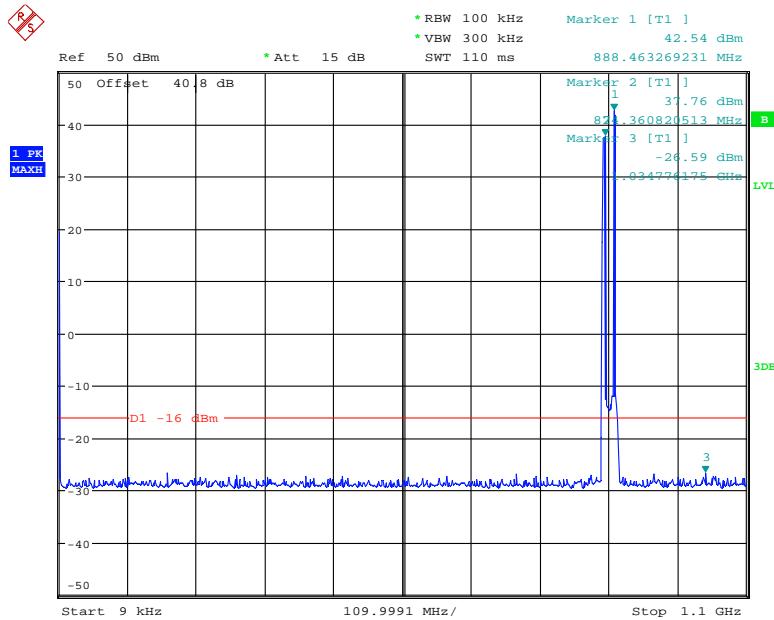
The test results are shown below

Remark:

The emissions at 9kHz on the plots was not generated by the test object. A complementary measurement with a smaller Span showed that it was related to the LO feedthrough.

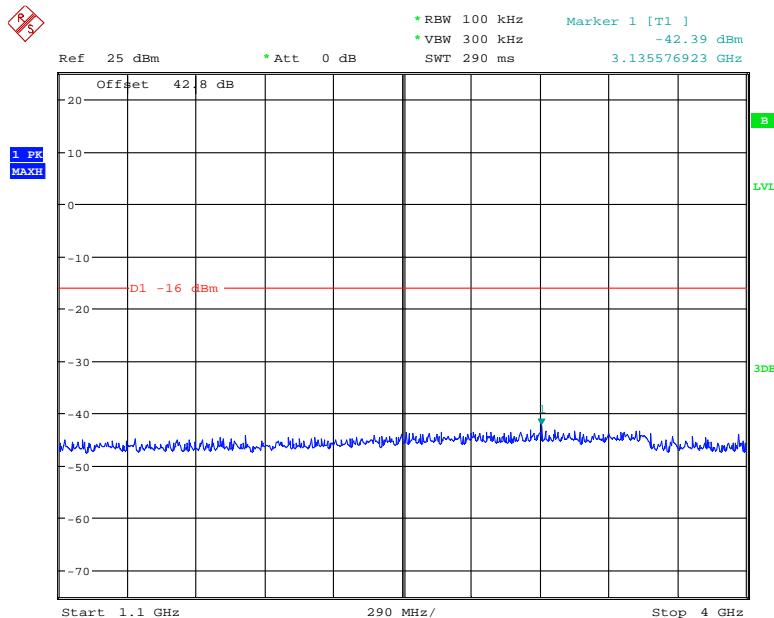


Date: 19.JUL.2013 11:40:39

**LTE (E-TM1.1) & WCDMA (QPSK)****Mix Carrier(x2): 1W+1L****Configuration 1 - Mode 1 - W&L1.4****9kHz to 1.1GHz**

Date: 19.JUL.2013 10:26:08

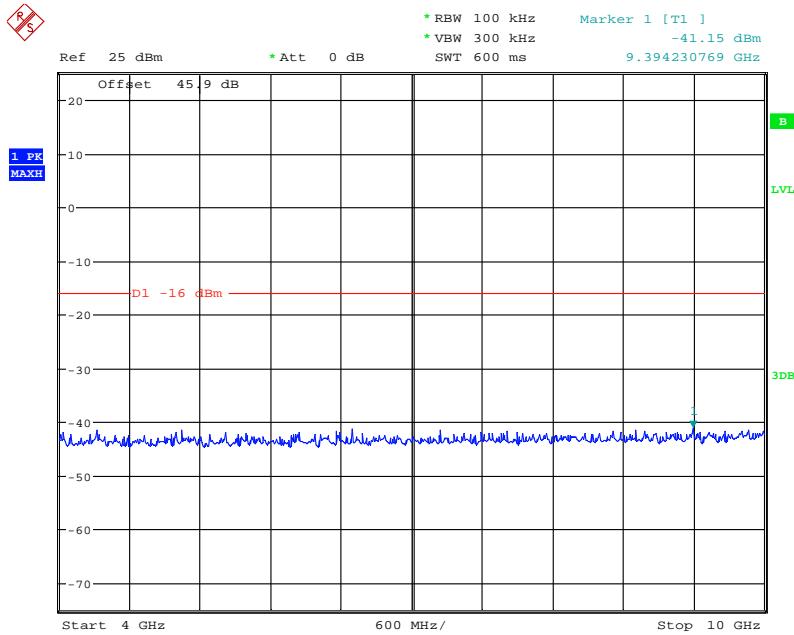
Note: The emissions beyond the limit are the operating frequencies.

1.1GHz to 4GHz

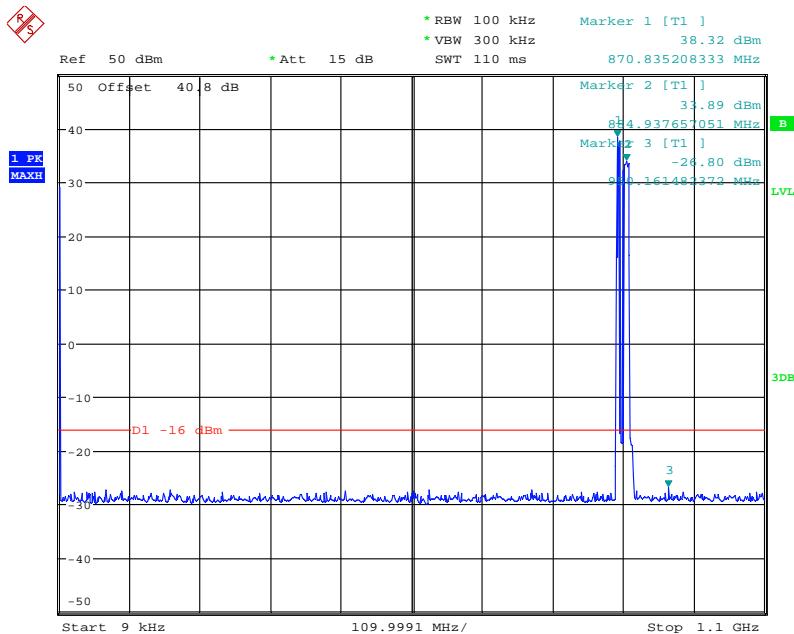
Date: 19.JUL.2013 11:17:18



Product Service

4GHz to 10GHz

Date: 19.JUL.2013 10:28:12

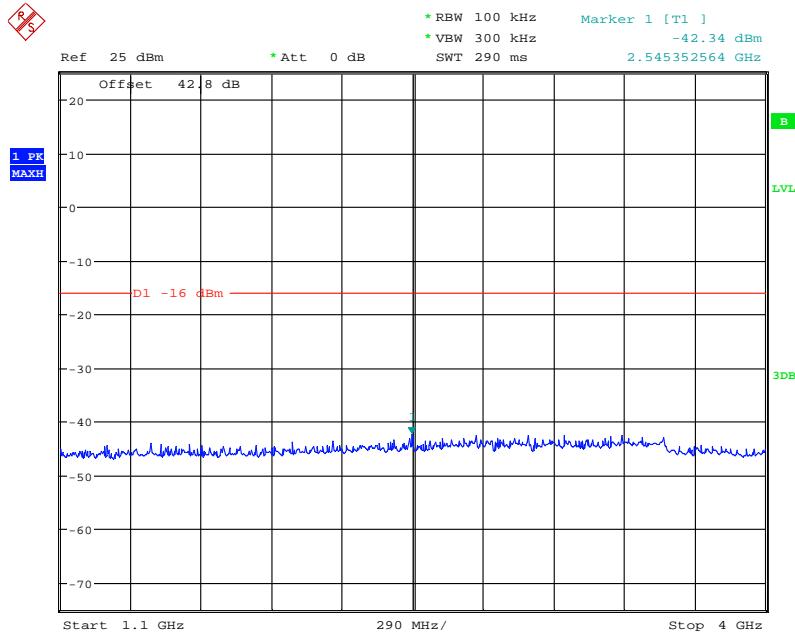
Configuration 1 - Mode 1 - W&L109kHz to 1.1GHz

Date: 19.JUL.2013 13:19:51

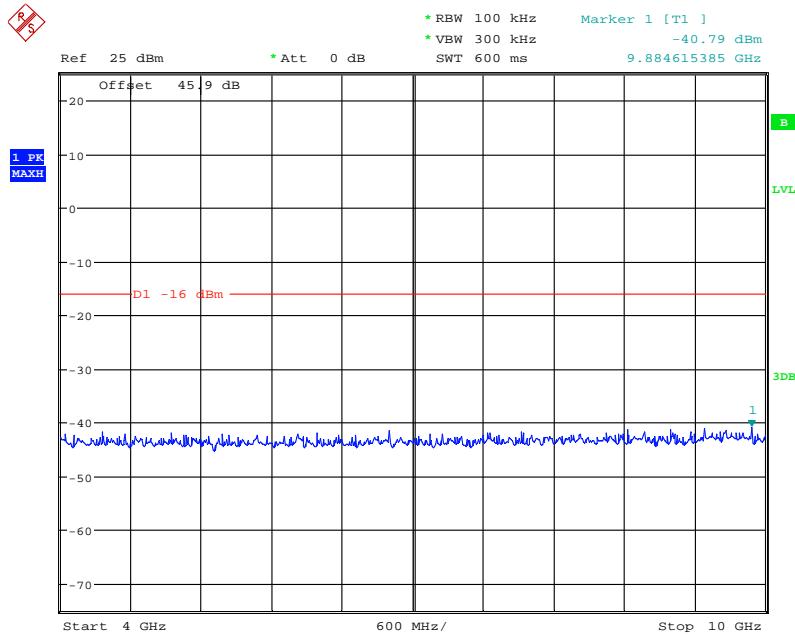
Note: The emissions beyond the limit are the operating frequencies.



Product Service

1.1GHz to 4GHz

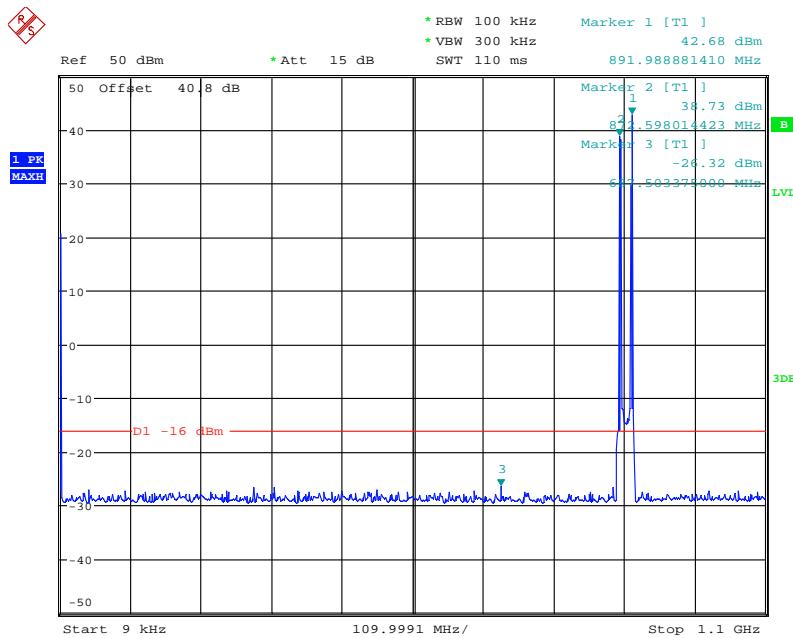
Date: 19.JUL.2013 13:23:16

4GHz to 10GHz

Date: 19.JUL.2013 13:16:22

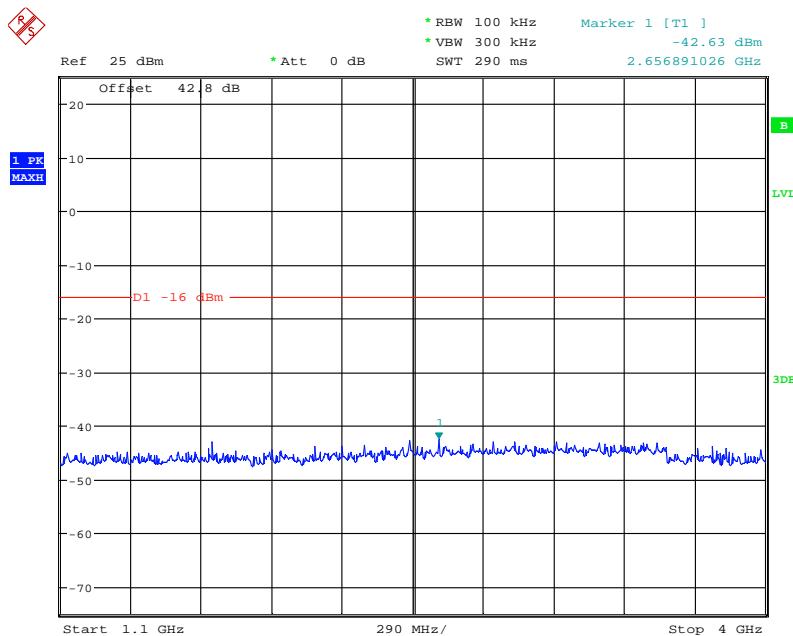


Product Service

Configuration 1 - Mode 2 - W&L1.49kHz to 1.1GHz

Date: 19.JUL.2013 15:43:03

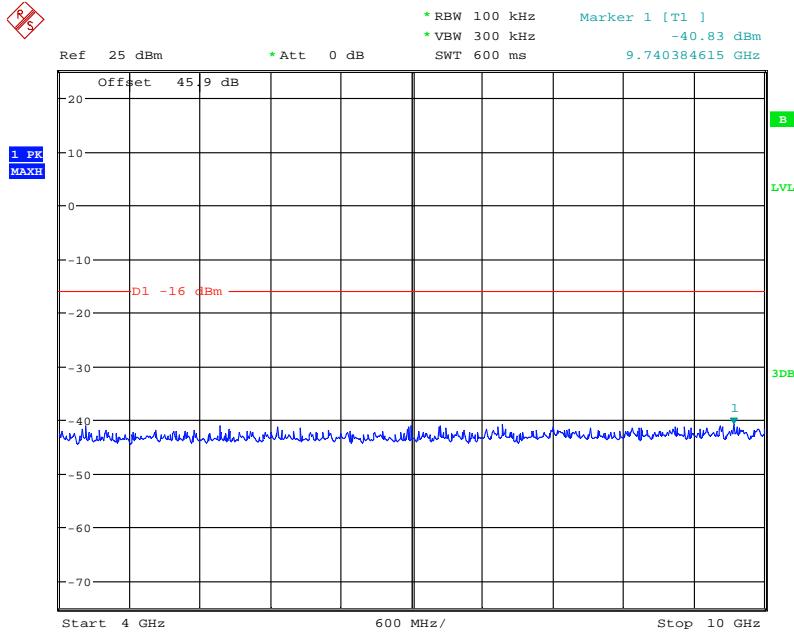
Note: The emissions beyond the limit are the operating frequencies.

1.1GHz to 4GHz

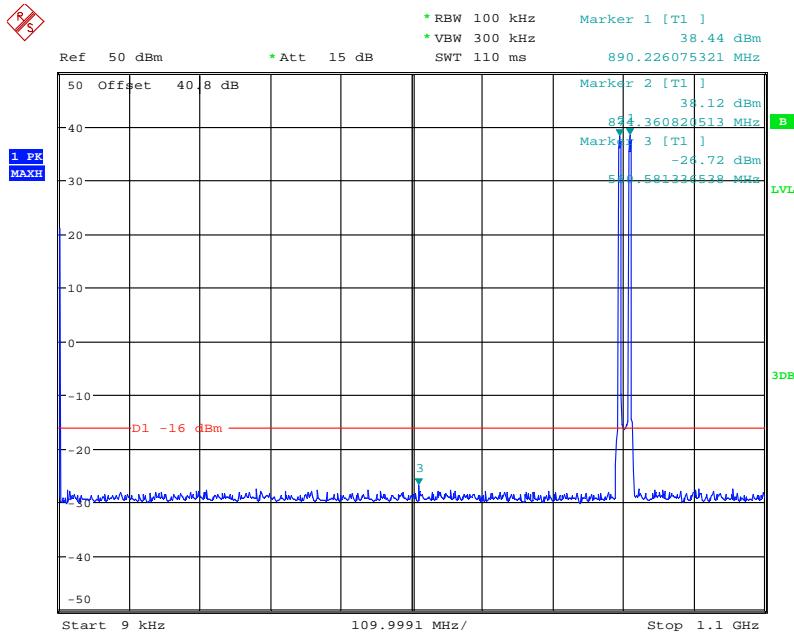
Date: 19.JUL.2013 15:45:32



Product Service

4GHz to 10GHz

Date: 19.JUL.2013 15:38:12

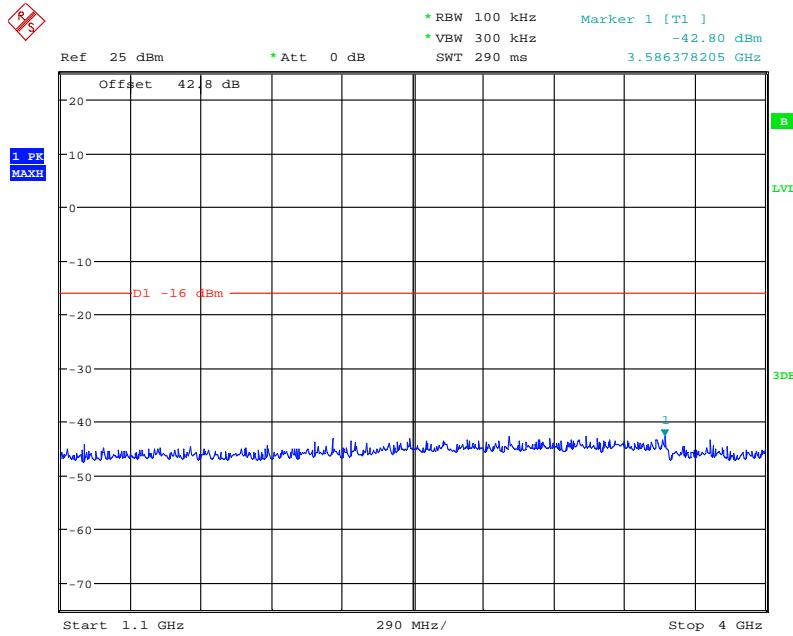
Configuration 1 - Mode 2 - W&L39kHz to 1.1GHz

Date: 19.JUL.2013 16:01:22

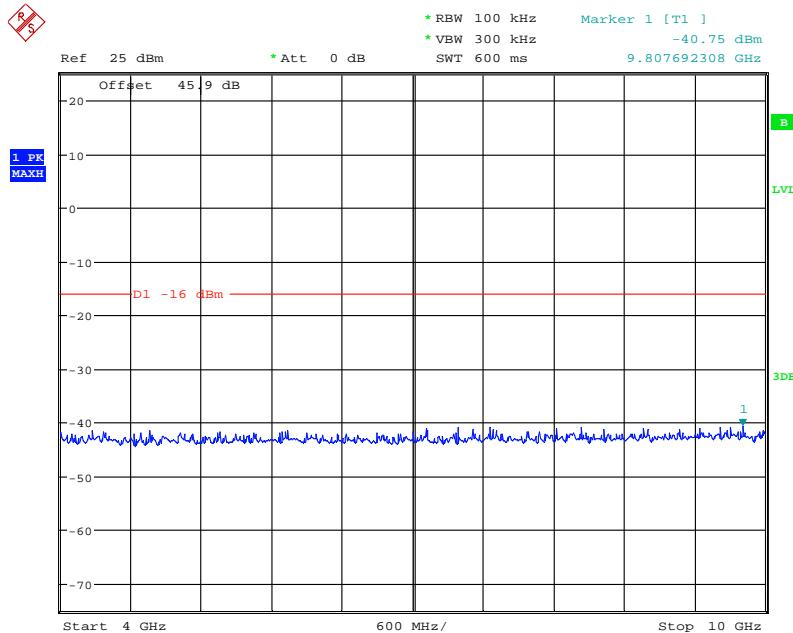
Note: The emissions beyond the limit are the operating frequencies.



Product Service

1.1GHz to 4GHz

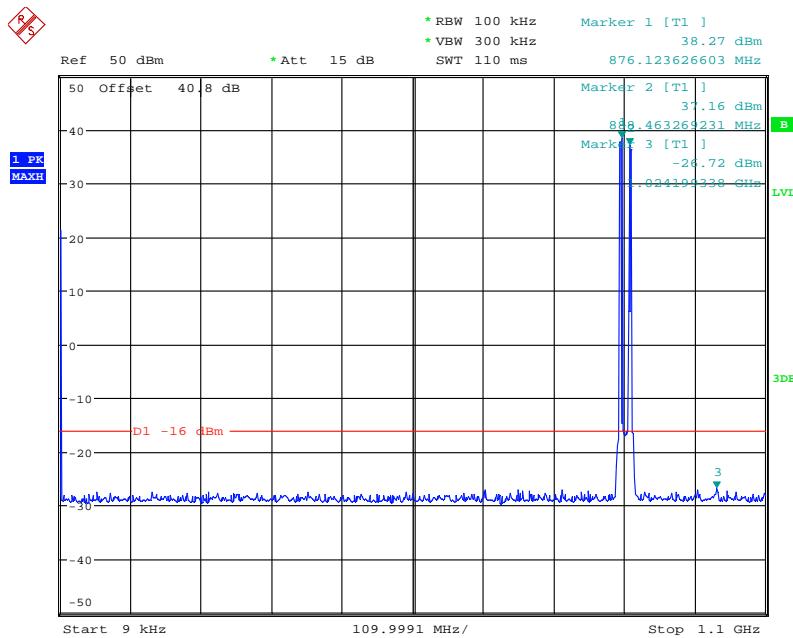
Date: 19.JUL.2013 15:55:54

4GHz to 10GHz

Date: 19.JUL.2013 15:57:11

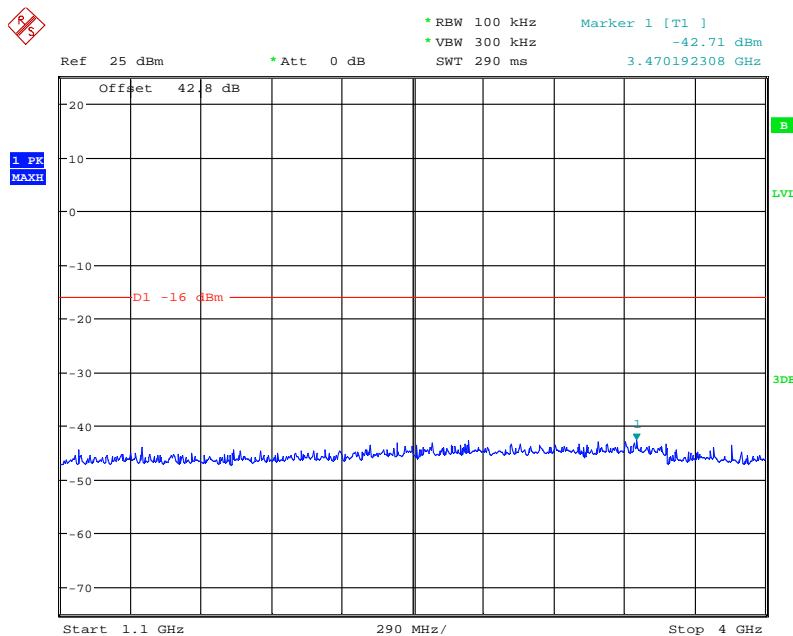


Product Service

Configuration 1 - Mode 2 - W&L59kHz to 1.1GHz

Date: 19.JUL.2013 16:15:18

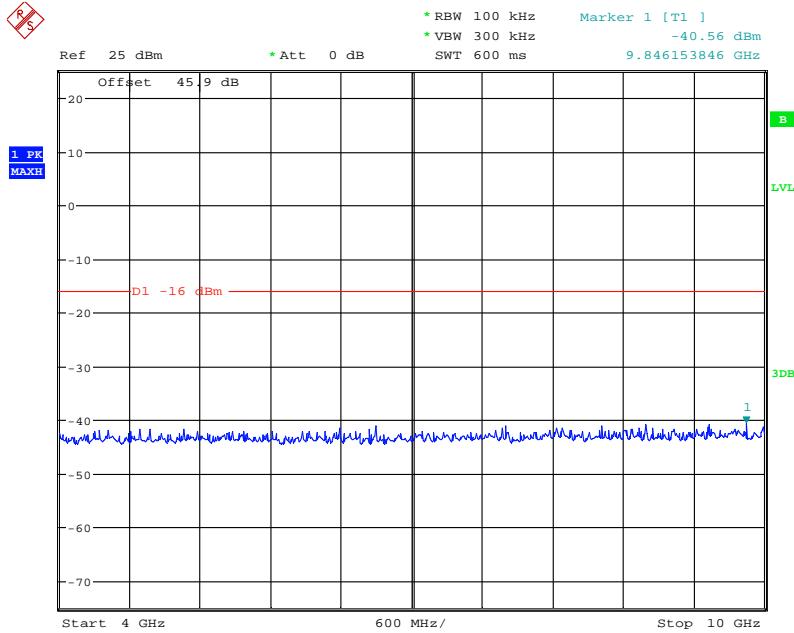
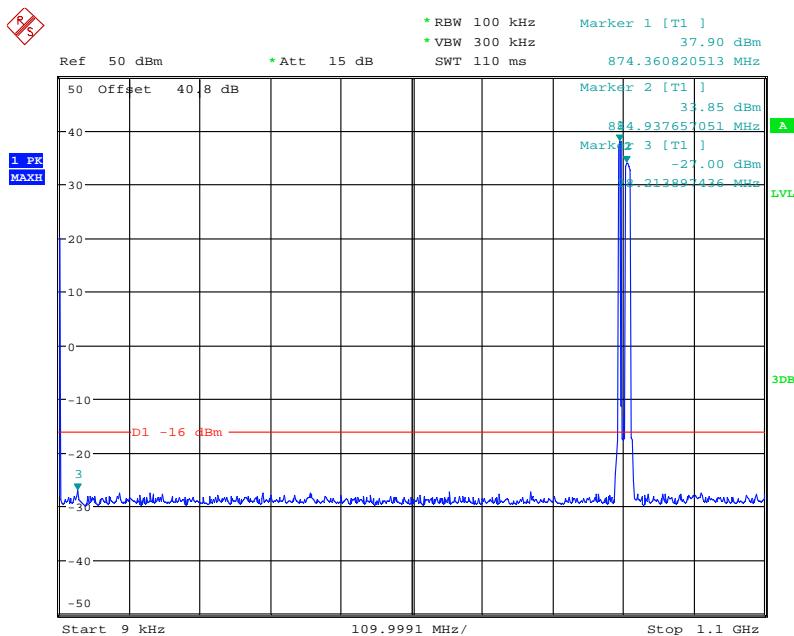
Note: The emissions beyond the limit are the operating frequencies.

1.1GHz to 4GHz

Date: 19.JUL.2013 16:17:38



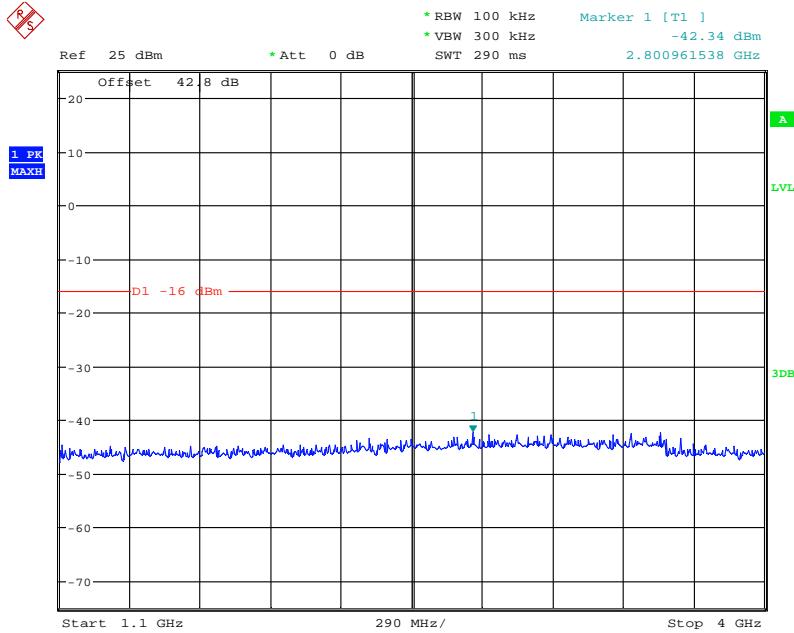
Product Service

4GHz to 10GHzConfiguration 1 - Mode 2 - W&L109kHz to 1.1GHz

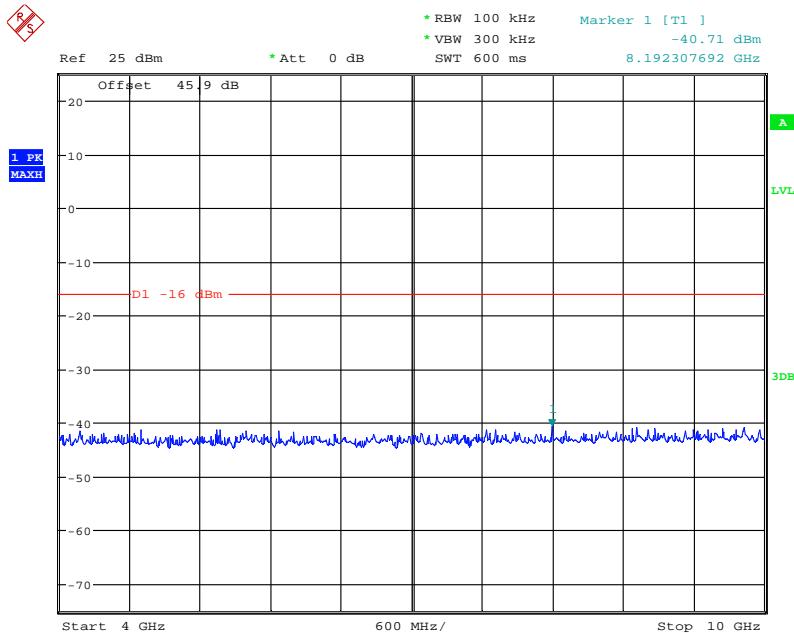
Note: The emissions beyond the limit are the operating frequencies.



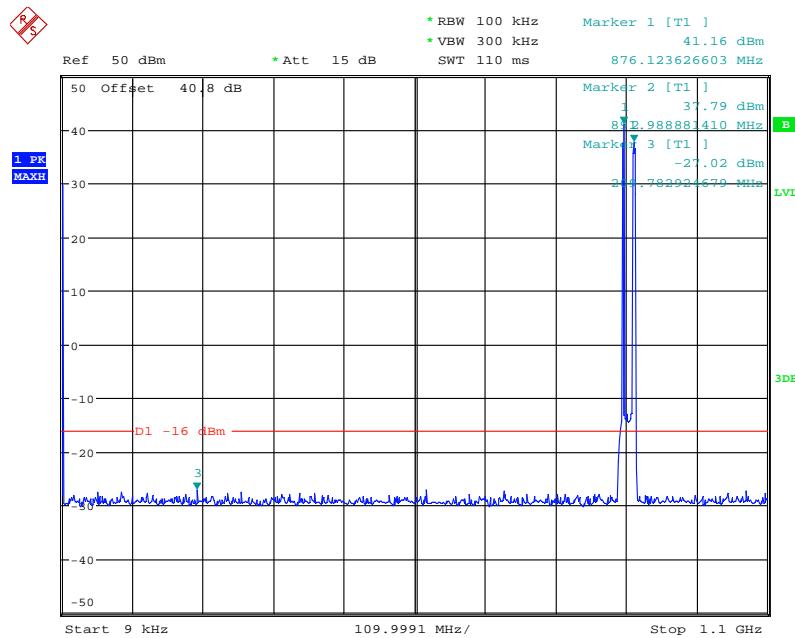
Product Service

1.1GHz to 4GHz

Date: 19.JUL.2013 16:32:36

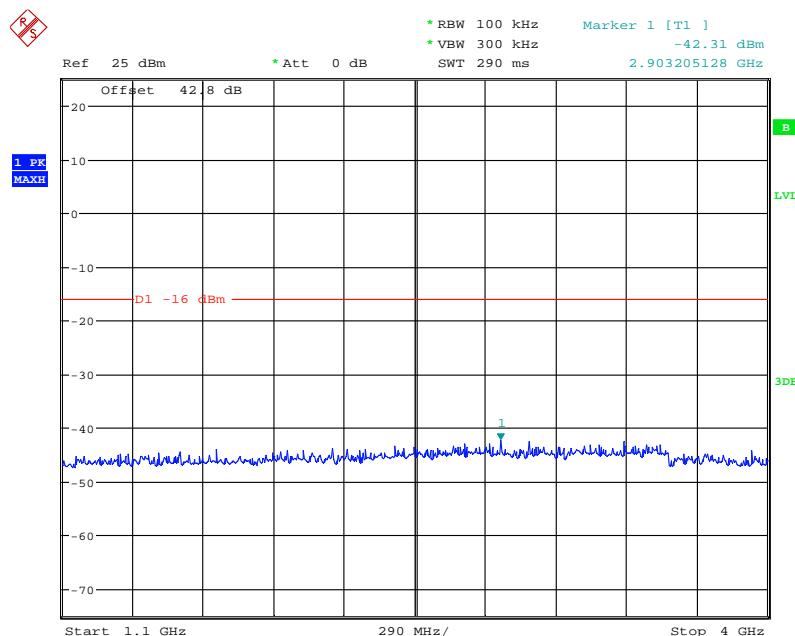
4GHz to 10GHz

Date: 19.JUL.2013 16:33:33

Configuration 1 - Mode 3 - L1.4&W9kHz to 1.1GHz

Date: 19.JUL.2013 15:03:54

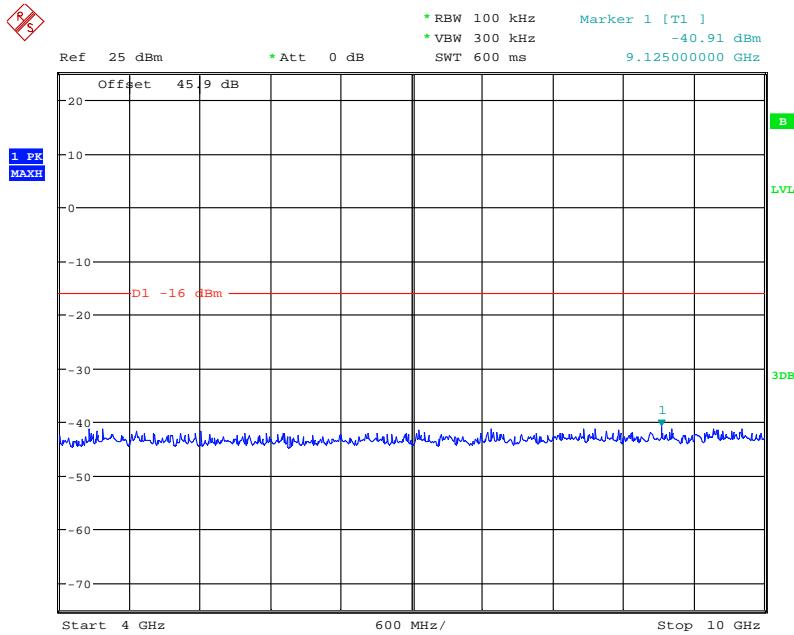
Note: The emissions beyond the limit are the operating frequencies.

1.1GHz to 4GHz

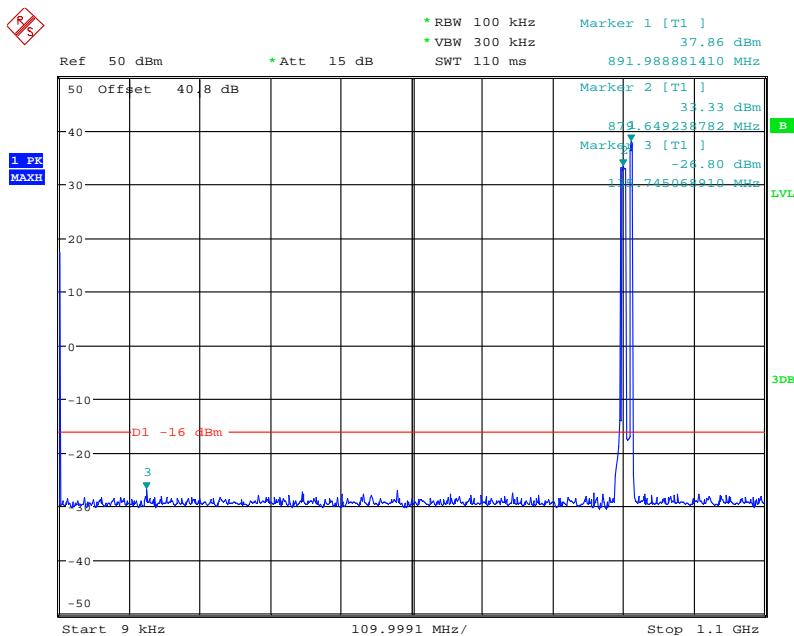
Date: 19.JUL.2013 15:07:42



Product Service

4GHz to 10GHz

Date: 19.JUL.2013 15:05:15

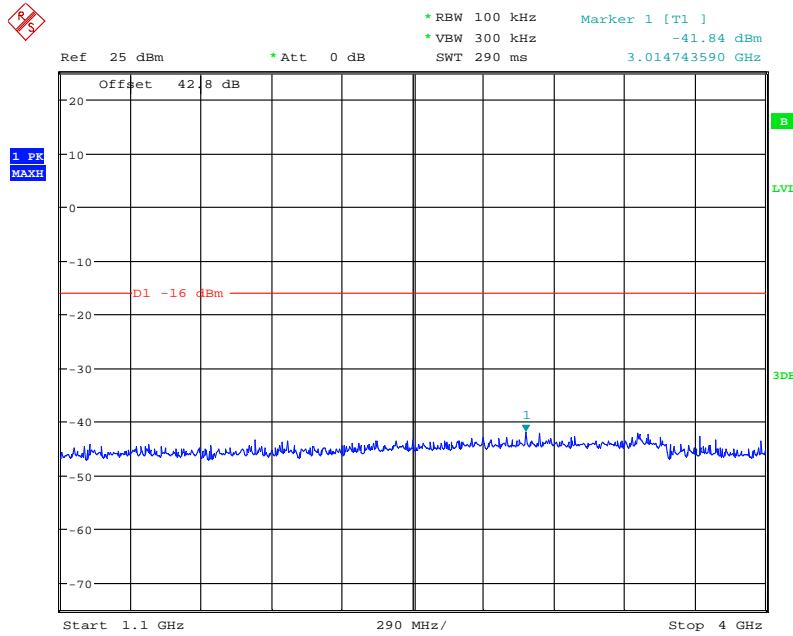
Configuration 1 - Mode 3 - L10&W9kHz to 1.1GHz

Date: 19.JUL.2013 13:51:54

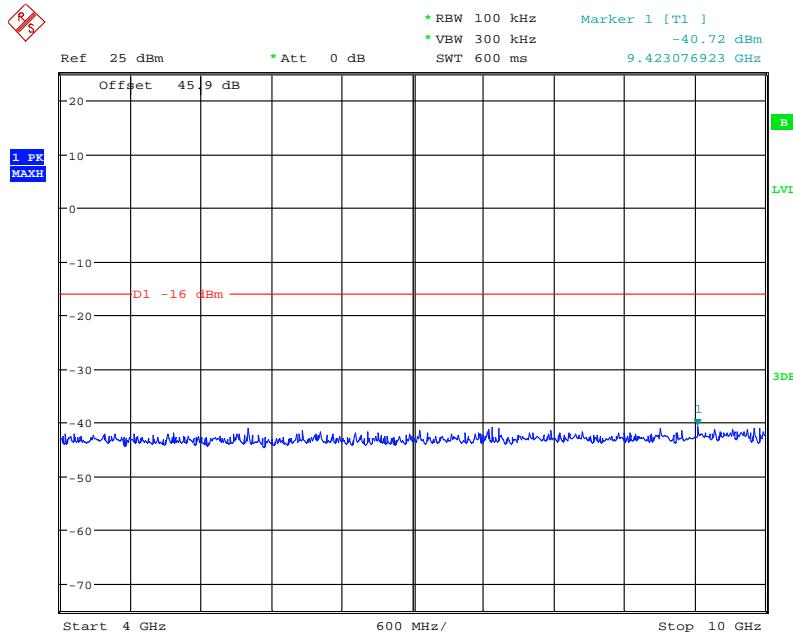
Note: The emissions beyond the limit are the operating frequencies.



Product Service

1.1GHz to 4GHz

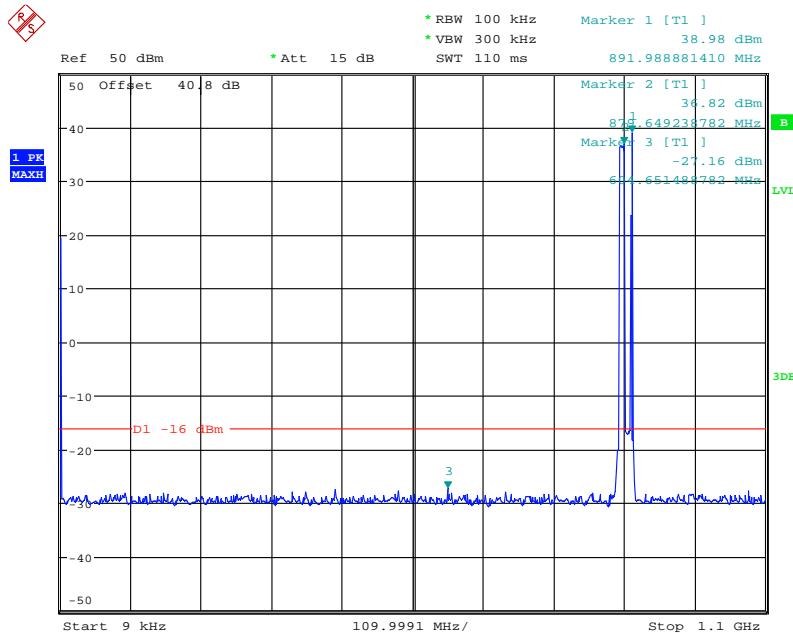
Date: 19.JUL.2013 13:48:49

4GHz to 10GHz

Date: 19.JUL.2013 13:49:41

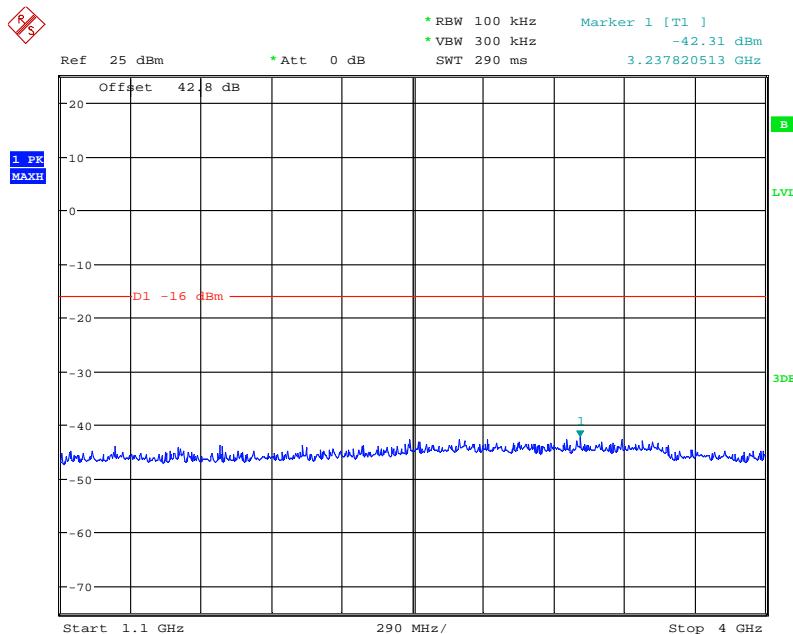


Product Service

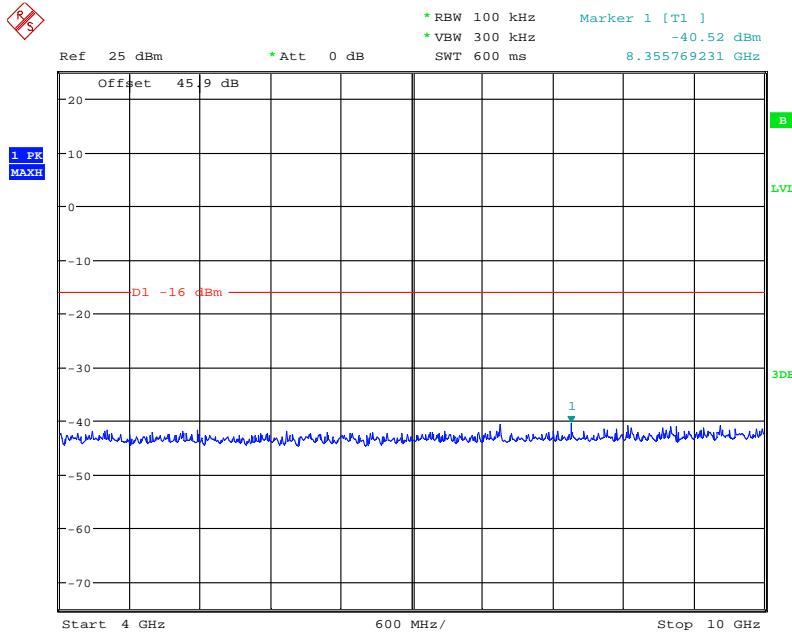
Mix Carrier(x3): 2W+1L**Configuration 1 - Mode 6 - W&W&L1.4****9kHz to 1.1GHz**

Date: 24.JUL.2013 15:04:28

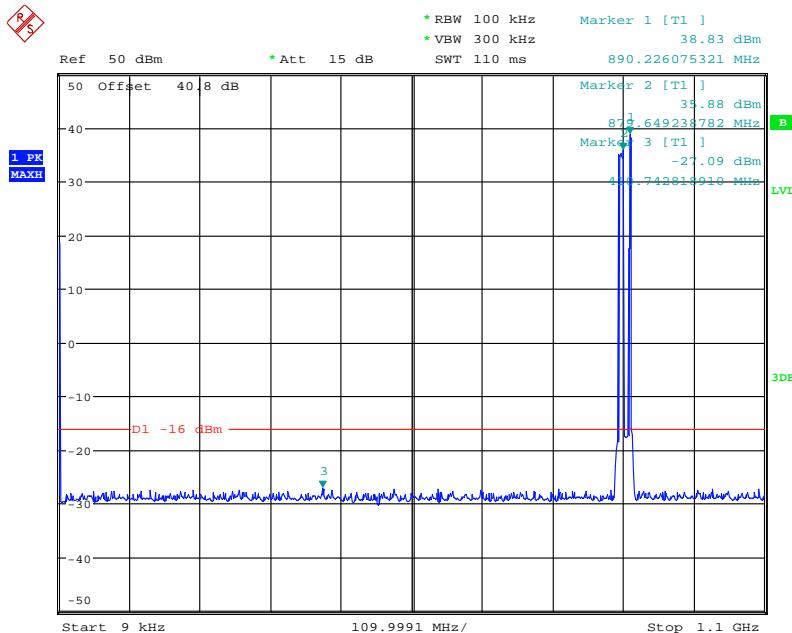
Note: The emissions beyond the limit are the operating frequencies.

1.1GHz to 4GHz

Date: 24.JUL.2013 15:06:30

4GHz to 10GHz

Date: 24.JUL.2013 15:05:36

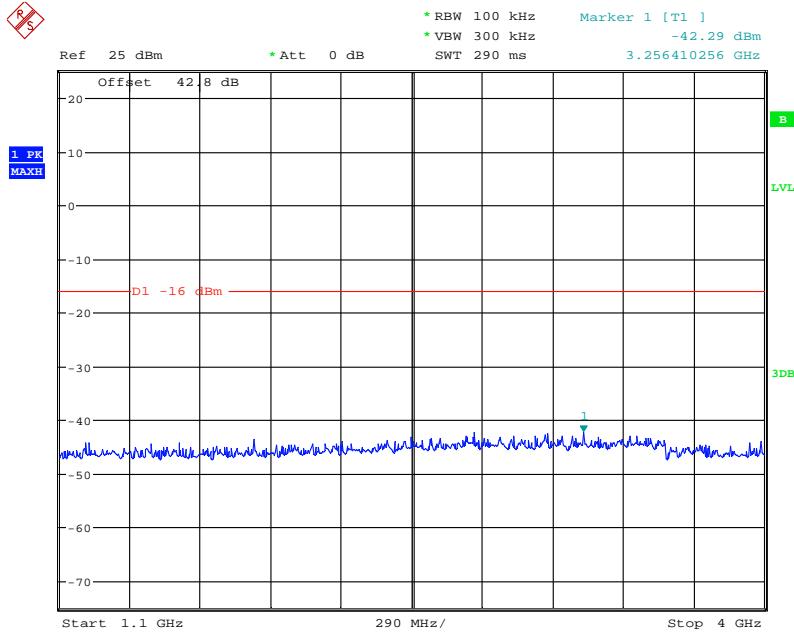
Mix Carrier(x4): 2W+2LConfiguration 1 - Mode 7 - W&W&L1.4&L1.49kHz to 1.1GHz

Date: 23.JUL.2013 15:44:31

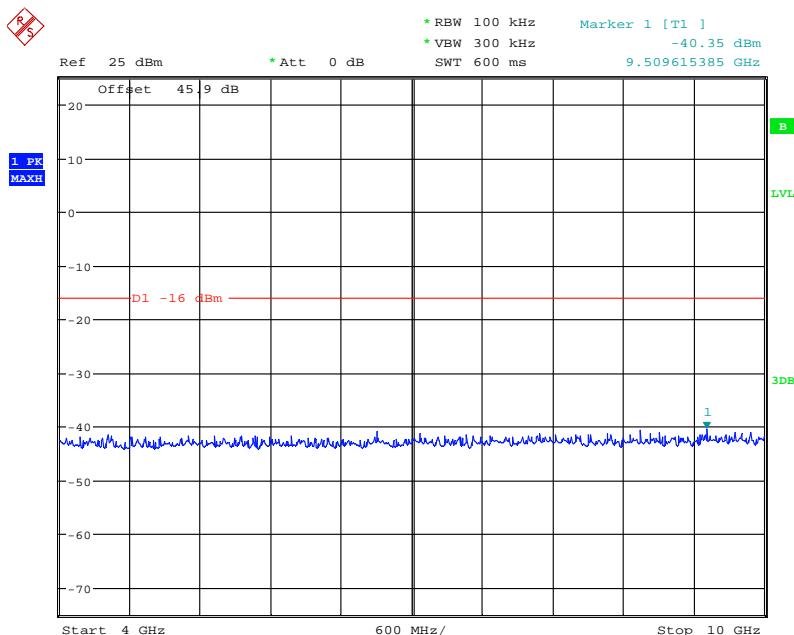
Note: The emissions beyond the limit are the operating frequencies.



Product Service

1.1GHz to 4GHz

Date: 23.JUL.2013 15:45:52

4GHz to 10GHz

Date: 23.JUL.2013 15:39:00



Product Service

Limit

The power of any emission outside the frequency band shall be attenuated below the transmitter power (P) by at least $43 + 10\log P \text{ dB} + 10\log(N_{ANT})$.

Remarks

The EUT does not exceed -16dBm at the frequency range of 9kHz to 10GHz.



2.6 RECEIVER SPURIOUS EMISSIONS

2.6.1 Specification Reference

FCC CFR 47 Part 15, Clause 15.111

2.6.2 Equipment Under Test

RRUS 11 B5 / KRC 161 285/2, S/N: CB4P587219

2.6.3 Date of Test and Modification State

19 July 2013 – Modification State 0

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC CFR 47 Part 15.

In accordance with FCC CFR 47 Part 15 Clause 15.111, the receiver spurious emissions from the antenna terminal were measured. Measurements were performed on the antenna connector RF B. The EUT was set to transmitter mode on the TX connector RF A and during the measurement the RF A was terminated with match load, (50 Ohm).

The resolution was set to 1MHz in the frequency range 9kHz to 10GHz. The spectrum analyzer detector was set to peak and trace was kept on Max Hold to give the worst case. The limit line that applies is -57dBm, 2 nanowatts in band 9kHz to 10GHz.

The maximum path loss across the measurement band was used as the reference level offset to ensure worst case.

Measurements were made from 9kHz up to 5th harmonic of the highest carrier frequency at least.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration 1
 - Mode 1 - W&L1.4
 - Mode 2 - W&L1.4
 - Mode 3 - L1.4&W



2.6.6 Environmental Conditions

19 July 2013

Ambient Temperature 23.5°C
Relative Humidity 60.5%

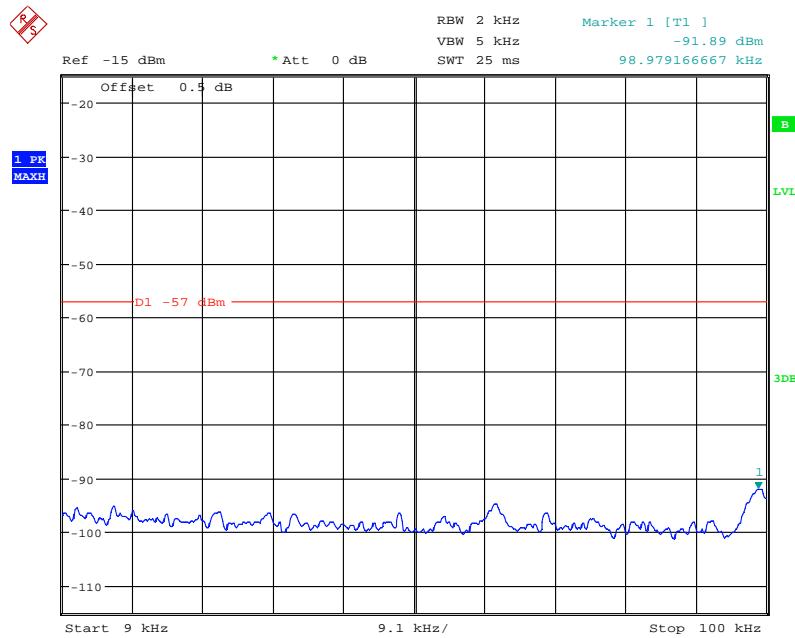
2.6.7 Test Results

For the period of test the EUT met the requirements of FCC CFR 47 Part 15 for Receiver Spurious Emissions.

The test results are shown below

Remark:

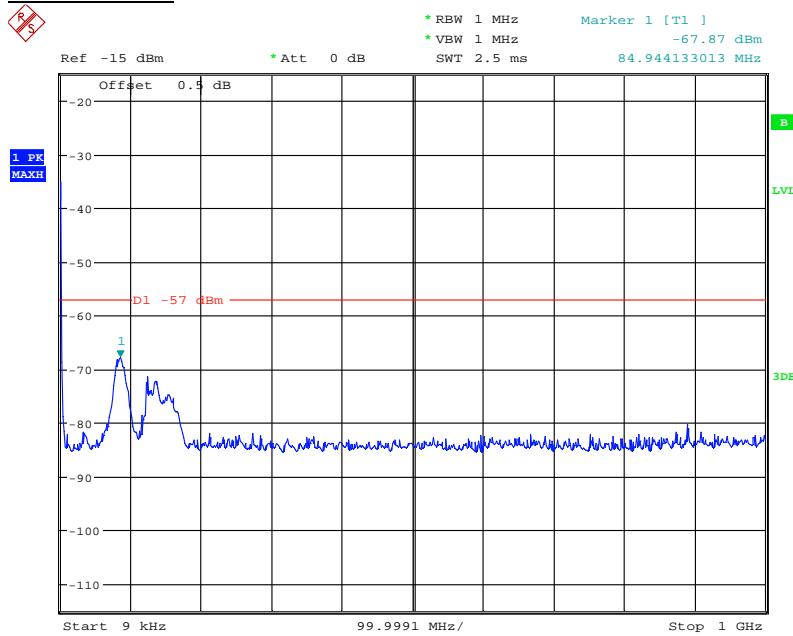
The emissions at 9kHz on the plots was not generated by the test object. A complementary measurement with a smaller Span showed that it was related to the LO feedthrough.



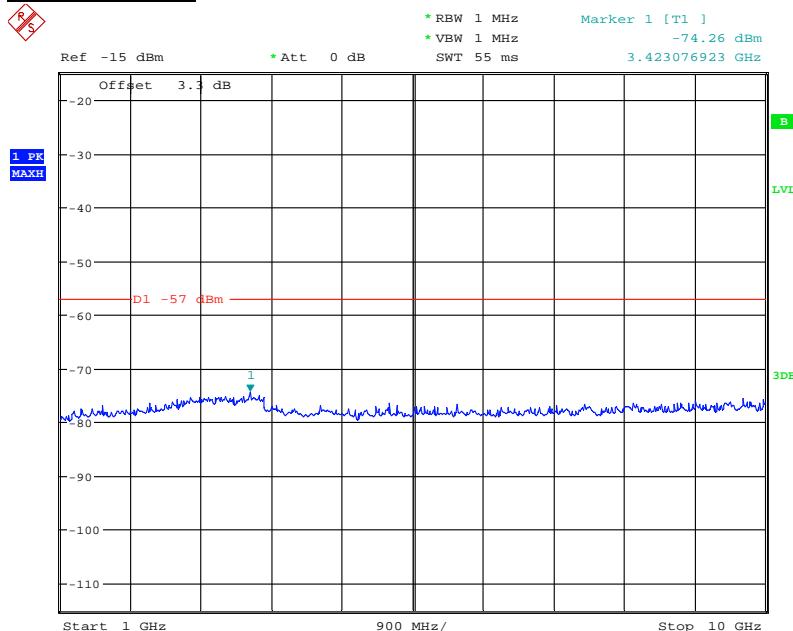
Date: 19.JUL.2013 10:41:51



Product Service

LTE (E-TM1.1) & WCDMA (QPSK)Mix Carrier(x2): 1W+1LConfiguration 1 - Mode 1 - W&L1.49kHz to 1GHz

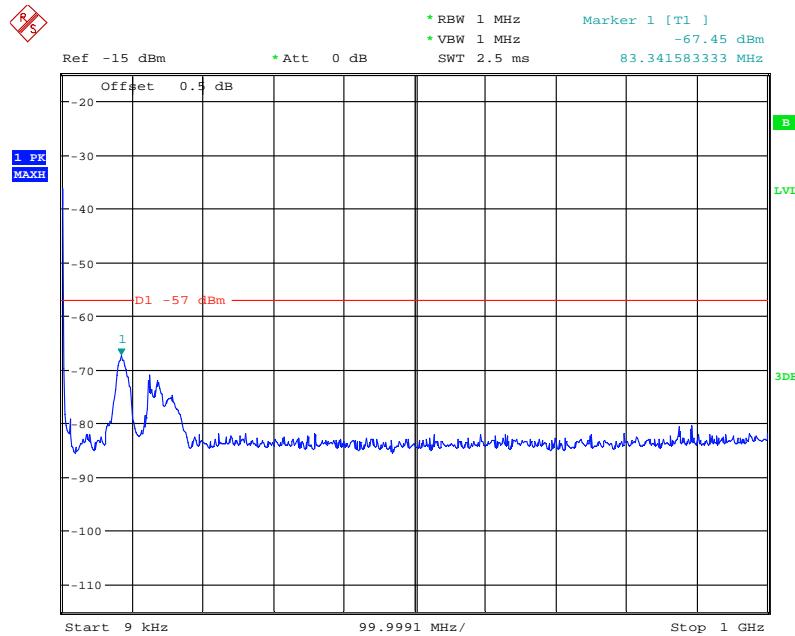
Date: 19.JUL.2013 10:40:28

1GHz to 10GHz

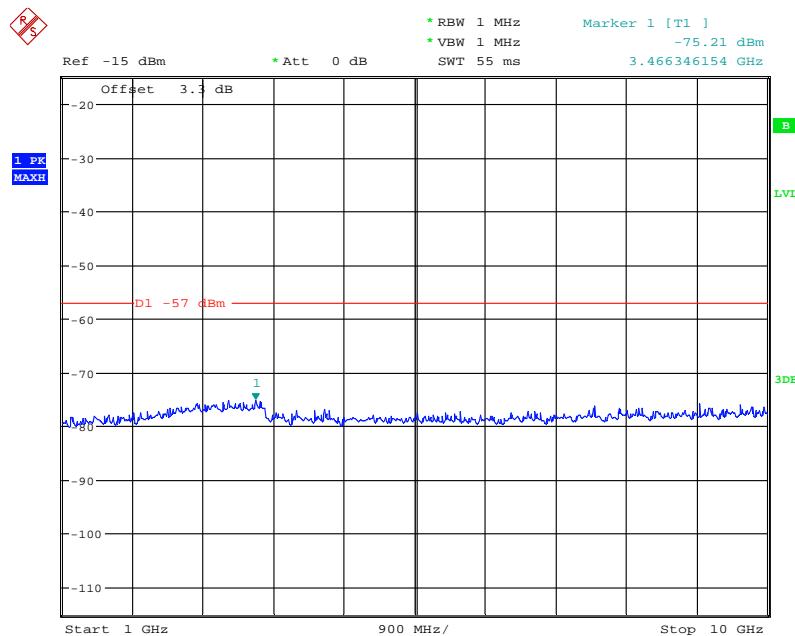
Date: 19.JUL.2013 10:39:16



Product Service

Configuration 1 - Mode 2 - W&L1.49kHz to 1GHz

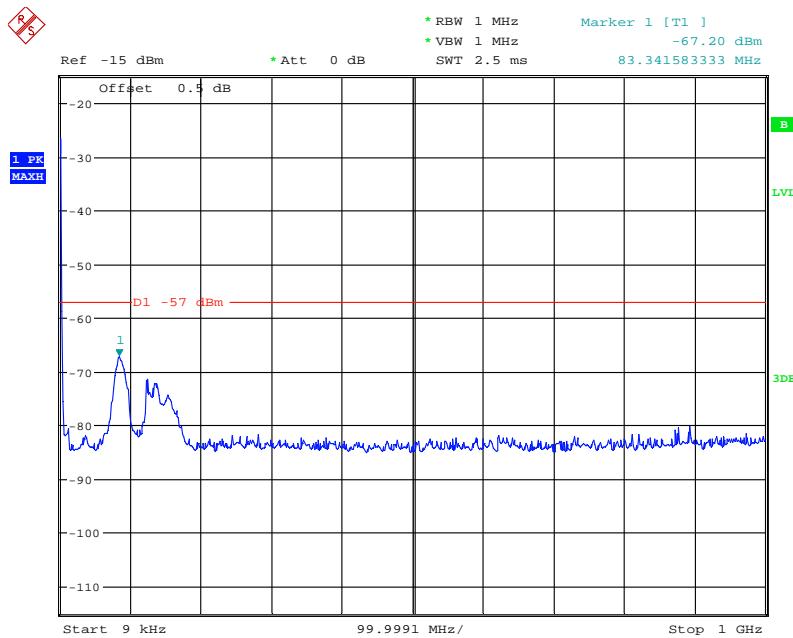
Date: 19.JUL.2013 15:48:16

1GHz to 10GHz

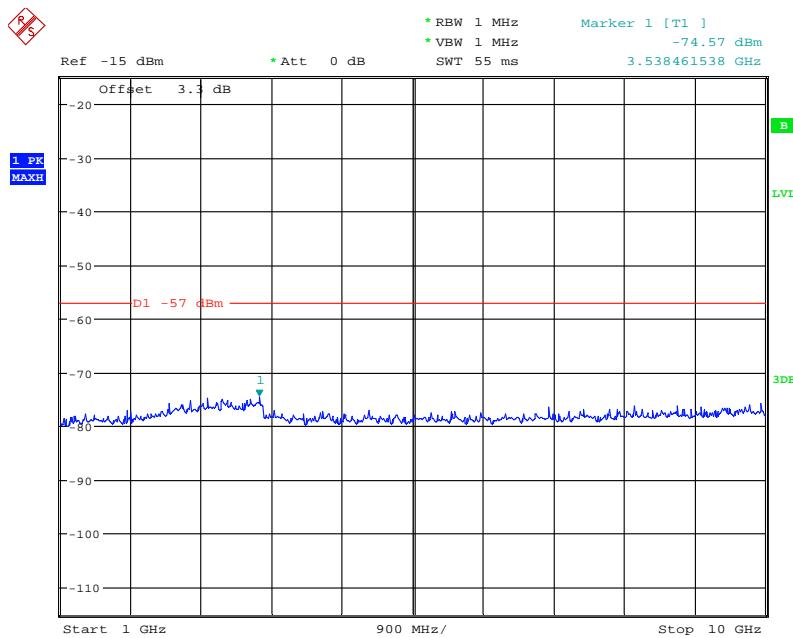
Date: 19.JUL.2013 15:49:06



Product Service

Configuration 1 - Mode 3 - L1.4&W9kHz to 1GHz

Date: 19.JUL.2013 15:09:49

1GHz to 10GHz

Date: 19.JUL.2013 15:10:45



Product Service

Limit

Receiver spurious emissions shall not exceed -57dBm / 2 nanowatts in the band 9kHz to 10GHz.

Remarks

The EUT does not exceed the limit at the frequency range of 9kHz to 10GHz.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	Serial No.	Calibration Period (months)	Calibration Due
Section 2.1, 2.2, 2.3, 2.5, 2.6 – Maximum Conducted Output Power, Peak – Average Ratio, Spurious Emissions at Antenna Terminals ($\pm 1\text{MHz}$), Conducted Spurious Emissions and Receiver Spurious Emissions.					
Spectrum Analyser	Rohde & Schwarz	FSQ26	100253	12	31-Aug-2013
Power Meter	Rohde & Schwarz	NRP2	101283	12	12-Aug-2013
Power Sensor	Rohde & Schwarz	NRP-Z51	102310	12	16-Jul-2014
Network Analyzer	Agilent	8720D	US36140166	12	06-Sep-2013
40dB Attenuator	Aeroflex / Weinschel	48-40-43-LIM	BR5020	-	O/P MON
Pass Filter	K&L	ULK 904 098/2	16	-	O/P MON
Load	Shanghai Huaxiang	TF100	09121648	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040041	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040050	-	O/P MON
Digital Multi-meter	FLUKE	179	91820401	12	13-Dec-2013
Thermo-hygrometer	AZ Instruments	8705	9151655	12	16-Dec-2013
Section 2.4 – Radiated Spurious Emissions					
Load	Shanghai Huaxiang	TF100	09121648	-	O/P MON
Load	Shanghai Huaxiang	TF100	09121605	-	O/P MON
EMI Receiver	Rohde & Schwarz	ESI 40	100015	12	19-Aug-2014
Ultra log test antenna	Rohde & Schwarz	HL562	100167	12	19-Aug-2014
Double-Ridged Waveguide Horn Antenna	Rohde & Schwarz	HF 906	100029	12	19-Aug-2014
Pyramidal Horn Antenna	EMCO	3160-09	-	-	-
Antenna master	Frankonia	MA 260	-	12	19-Aug-2014
Relay Switch Unit	Rohde & Schwarz	331.1601.31	338965002	-	TU
Semi Anechoic Chamber	Frankonia	23.18m×16.88 m×9.60m	-	12	19-Aug-2014
Power Supply	Dahua	DH1716-5D	2008040041	-	O/P MON
Power Supply	Dahua	DH1716-5D	2008040050	-	O/P MON
Digital Multimeter	FLUKE	179	91820401	12	13-Dec-2013
Thermo-hygrometer	AZ Instruments	8705	9151655	12	16-Dec-2013

O/P MON Output monitored with calibration equipment
 TU Traceability Unscheduled



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted Maximum Peak Output Power	30MHz to 10GHz Amplitude	0.5dB*
Conducted Emissions	30MHz to 40GHz Amplitude	3.0dB*
Frequency Stability	30MHz to 2GHz	<1x10 ⁻⁷
Radiated Emissions, Bilog Antenna, AOATS	30MHz to 1GHz Amplitude	5.1dB*
Radiated Emissions, Horn Antenna, AOATS	1GHz to 40GHz Amplitude	6.3dB*
Worst case error for both Time and Frequency measurement 12 parts in 10 ⁶		

* In accordance with CISPR 16-4



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service

© 2013 TÜV SÜD Product Service