



Add value.
Inspire trust.



Report On

FCC and ISED Testing of the
Ericsson Radio 4449 B5 B13, KRC 161 749/1 LTE and NB-IoT (850
MHz) Base Station in accordance with FCC CFR 47 Part 2, FCC CFR
47 Part 22, ISED RSS-GEN and ISED RSS-132

COMMERCIAL-IN-CONFIDENCE

FCC: TA8AKRC161749-1
IC: 287AB-AS1617491

PREPARED BY

Maggie Whiting
Key Account Manager

APPROVED BY

Steve Scarfe
Authorised Signatory

DATED

07 December 2022

Document 75955712 Report 06 Issue 2

December-2022



CONTENTS

Section	Page No
1	REPORT INFORMATION 2
1.1	Report Details 3
1.2	Brief Summary of Results 4
1.3	Test Rationale..... 5
1.4	Configuration Description 6
1.5	Declaration of Build Status 7
1.6	Product Information 9
1.7	Test Setup 10
1.8	Test Conditions..... 12
1.9	Deviation From The Standard 12
1.10	Modification Record 12
1.11	Additional Information 13
2	TEST DETAILS 14
2.1	Maximum Peak Output Power and Peak to Average Ratio - Conducted..... 15
2.2	Occupied Bandwidth..... 20
2.3	Band Edge 25
2.4	Transmitter Spurious Emissions..... 29
2.5	Radiated Emissions 39
3	TEST EQUIPMENT USED 46
3.1	Test Equipment Used 47
3.2	Measurement Uncertainty 49
3.3	Measurement Software Used 50
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT..... 51
4.1	Accreditation, Disclaimers and Copyright..... 52
ANNEX A	Module Lists.....A.2



SECTION 1

REPORT INFORMATION



1.1 REPORT DETAILS

Manufacturer	Ericsson AB
Address	Torshamnsgatan 23 Kista SE-16480 Stockholm Sweden
Product Name & Product Number	Radio 4449 B5 B13 - KRC 161 749/1
IC Model Name	AS1617491
Serial Number(s)	B070671229
Software Version	CXP9013268/15 Revision R89MU15
Hardware Version	R1K
Test Specification/Issue/Date	FCC CFR 47 Part 2: 2021 FCC CFR 47 Part 22: 2021 ISED RSS-GEN: Issue 5: March 2019 Amendment 1, 2021 Amendment 2 ISED RSS-132: Issue 3: 2013
Test Plan	MR7602-SP-2E _Spectrum Sharing with NB-IoT 11 Radios FCC and ISED_Rev-H
Start of Test	16-September-2022
Finish of Test	24-November-2022
Name of Engineer(s)	Neil Rousell, Roscoe Harrison
Related Document(s)	KDB 971168 D01 v02r02 KDB 662911 D01 v02r01 ICES-003:Issue 7 (2020-10) ANSI C63.26-2015

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate compliance with and FCC CFR 47 Part 2: 2021, FCC CFR 47 Part 22: 2021, ISED RSS-GEN: Issue 5: March 2019 Amendment 1, 2021 Amendment 2 ISED RSS-132: Issue 3: 2013 The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

Neil Rousell, Roscoe Harrison

This report has been amended and should be read in place of Issue 1. This report has been amended to Issue 2 to replace a typing error on Page 4.



1.2 BRIEF SUMMARY OF RESULTS

The tests that have been selected are detailed in the customer Test Plan as defined in section 1.1 of this report. The Test Plan is based on the TÜV SÜD FCC Test Plan Rationale, available on request.

A brief summary of results for each configuration, in accordance with FCC CFR 47 Part 2, FCC CFR 47 Part 22, ISSED RSS-GEN and ISSED RSS-132 is shown below.

Section	Specification Clause				Test Description	Result
	FCC CFR 47 Part 2	FCC CFR 47 Part 22	RSS-GEN	ISSED RSS-132		
2.1	2.1046	22.913 (a)	-	5.4	Maximum Peak Output Power and Peak to Average Ratio - Conducted	Pass
2.2	2.1049	22.917 (b)	6.7	5.5	Occupied Bandwidth	Pass
2.3	2.1051	22.917(b)	-	5.5	Band Edge	Pass
2.4	2.1051	22.917(b)	6.13	5.5	Transmitter Spurious Emissions	Pass
2.5	-	22.917(a)	6.13	5.5	Radiated Emissions	Pass

Testing in this Report covers only B5 LTE (850MHz)

For additional configurations and test cases not contained within this test report, refer to the following reports:

Document 75955712 Report 07 – Radio 4449 B5 B13 LTE (B13 testing only)

Document 75955712 Report 04 – Radio 4449 B5 B13 NR (B5 testing only)

Document 75955712 Report 05 – Radio 4449 B5 B13 NR (B13 testing only)



1.3 TEST RATIONALE

The tests that have been selected are detailed in the customer Test Plan as defined in section 1.1 of this report. The Test Plan is based on the TÜV SÜD FCC Test Plan Rationale, available on request.



1.4 CONFIGURATION DESCRIPTION

Config	Carrier configurations			LTE Main carrier			
	RATs	Carriers	Pout (W)	Position	BW	Freq	LTE-EARFCN
A	LTE Setup (NB IoT GB) 64 QAM	1	60	B	10	874.0	2450
				T	10	889.0	2600
				B	15	876.5	2475
				T	15	886.5	2575
				B	20	879.0	2500
				T	20	884.0	2550



1.5 DECLARATION OF BUILD STATUS

Equipment Description		
Technical Description: (Please provide a brief description of the intended use of the equipment including the technologies the product supports)		Multi-standard remote radio unit Radio 4449 B5 B13 , 4TX/ 4RX
Manufacturer:		Ericsson AB
Model:		Radio 4449 B5 B13
Part Number:		KRC 161 749/1
Hardware Version:		R1K
Software Version:		CXP 9013268/15-R89MU15
FCC ID of the product under test		TA8AKRC161749-1
IC ID of the product under test		287AB-AS1617491
Intentional Radiators		
(5) Frequency band: B5	LTE: TX (DL):869 -894 MHz , RX (UL): 824 - 849 MHz NR: TX (DL):869 -894 MHz , RX (UL): 824 - 849 MHz	
(5) Frequency band: B13	LTE: TX (DL):746 - 756MHz , RX (UL): 777 - 787MHz NR: TX (DL):746 - 756MHz , RX (UL): 777 - 787MHz	
Radio Access Technology, RAT(s): B5, B13	Single RAT : LTE, NR, NB-IoT (IB, GB) Multi RAT :LTE+ NR	
Supported Bandwidth(s) (MHz): B5	NR: 5MHz, 10MHz, 15MHz, 20MHz LTE: 5MHz, 10MHz	
Supported Bandwidth(s) (MHz) : B13	NR: 5MHz, 10MHz LTE: 5MHz, 10MHz	
Duplex mode:	FDD	
Antenna Gain (dBi)	Maximum antenna system gain (including cable loss), GANT (dBi) for the tested configurations to comply with maximum radiated output power in SRSP -503 and SRSP-518 calculated using measured and summed PSD from all 4 Ports	
Antenna Impedance(Ω)	50	
Supported modulation scheme, LTE:	QPSK, 16QAM, 64QAM, 256QAM	
Supported modulation scheme, NR:	QPSK, 16QAM, 64QAM, 256QAM	
NR SCS	15kHz	
Nominal O/P per antenna port for B5	Configuration 1	Single Carrier, Ports A, B, C, D: 1 × 40 W(46 dBm) Multi Carrier, Ports A, B, C, D: 2 × 20 W(46 dBm) Multi Carrier, Ports A, B, C, D: 3 × 13.3 W(46 dBm)
	Configuration 2	Single Carrier, Ports A , D: 1 × 60 W(47,8 dBm) Multi Carrier, Ports A , D: 2 × 30 W(47,8 dBm) Multi Carrier, Ports A , D: 3 × 20 W(47,8 dBm)
Nominal O/P per antenna port for B13	Configuration 1	Single Carrier, Ports A, B, C, D: 1 × 40 W(46 dBm) Multi Carrier, Ports A, B, C, D: 2 × 20 W(46 dBm)
	Configuration 2	Single Carrier, Ports A , D: 1 × 60 W(47,8 dBm) Multi Carrier, Ports A , D: 2 × 30 W(47,8 dBm)
Nominal output power per Antenna Port /Multi RAT - Multi carrier: B5, B13	120 W: Port A, Port D	80 W: Port B, Port C
Nominal output power per Radio	320 W	



LTE configurable channel bandwidth supported,Single RAT Single carrier, Single RAT Multi carrier and Multi RAT	B13: BW _{channel} : 5, 10MHz	B5 :BW _{channel} : 5, 10MHz
NR configurable channel bandwidth supported, Single RAT Single carrier, Single RAT Multi carrier and Multi RAT	B13: BW _{channel} : 5, 10MHz	B5: BW _{channel} : 5, 10, 15 , 20MHz
RF power Tolerance:	.+0.6/-2.5 dB	
Frequency Tolerance:	±0.1 ppm	
Maximum supported number of DL NR carrier per port	B5: 3	B13: 2
Maximum supported number of DL LTE carrier per port	B5: 3	B13: 2
Supported transmission modes:	4X4 MIMO	
Unintentional Radiators		
Highest frequency generated or used in the device or on which the device operates or tunes	Up to 10.1 Gbit/s	
Lowest frequency generated or used in the device or on which the device operates or tunes if <30MHz	.-	
Class A Digital Device (Use in commercial, industrial or business environment)	.-	
Class B Digital Device (Use in residential environment)	Class B	
DC Power Supply (Delete if Not Applicable)		
Nominal voltage:	-48V	
Extreme upper voltage:	-38.0V	
Extreme lower voltage:	-58.5V	
Max current:	32A	
Temperature		
Minimum temperature:	-40°C	
Maximum temperature:	55°C	
I hereby declare that I am entitled to sign on behalf of the manufacturer and that the information supplied is correct and complete.		
Name:	Afrah Ali sadiq	
Position held:	Regulatory Approval Engineer	
Email address:	Afrah.ali.sadiq@ericsson.com	
Telephone number:	.+46724650796	
Date:	11-Nov-2022	

No responsibility will be accepted by TÜV SÜD as to the accuracy of the information declared in this document by the manufacturer.


1.6 PRODUCT INFORMATION

1.6.1 Technical Description

The Equipment Under Test (EUT) Radio 4449 B5 B13 - KRC 161 749/1 is an Ericsson AB Radio Unit working in the public mobile service Band 5 band which provides communication connections to Band 5 network.

The EUT is declared as operating from a nominal -48V DC supply.


The Equipment Under Test (EUT) is shown in the photograph below. A full technical description can be found in the Manufacturer's documentation.

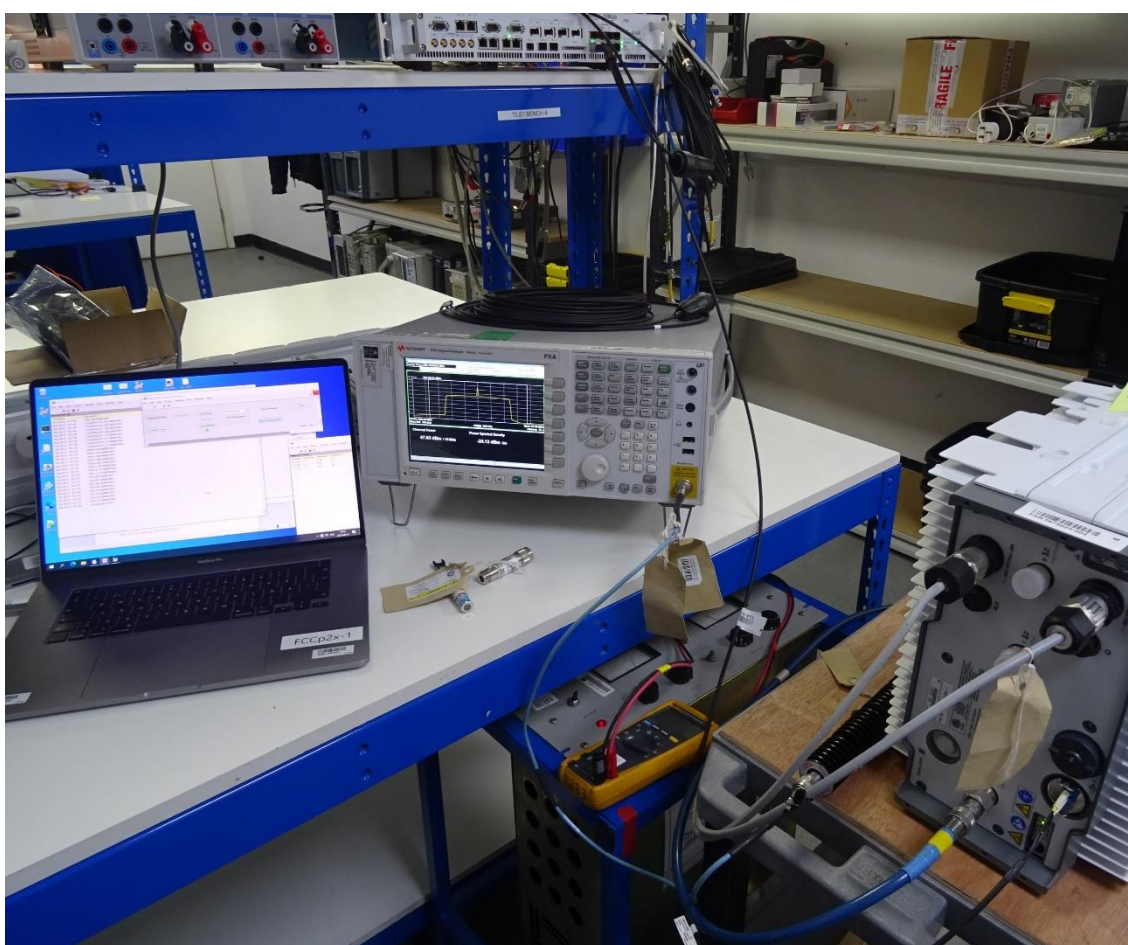


Equipment Under Test

1.7 TEST SETUP

Conducted Test Set Up

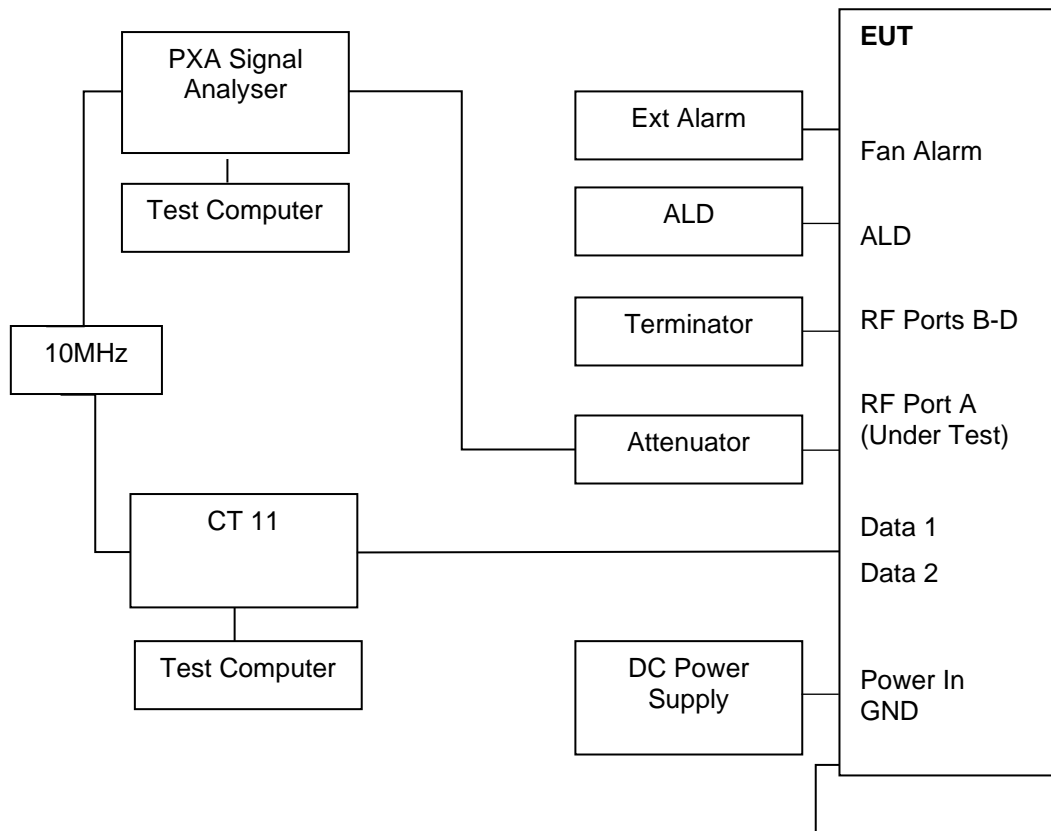

Radiated Test Set Up – Dashed line indicates equipment inside the Chamber for Radiated testing.

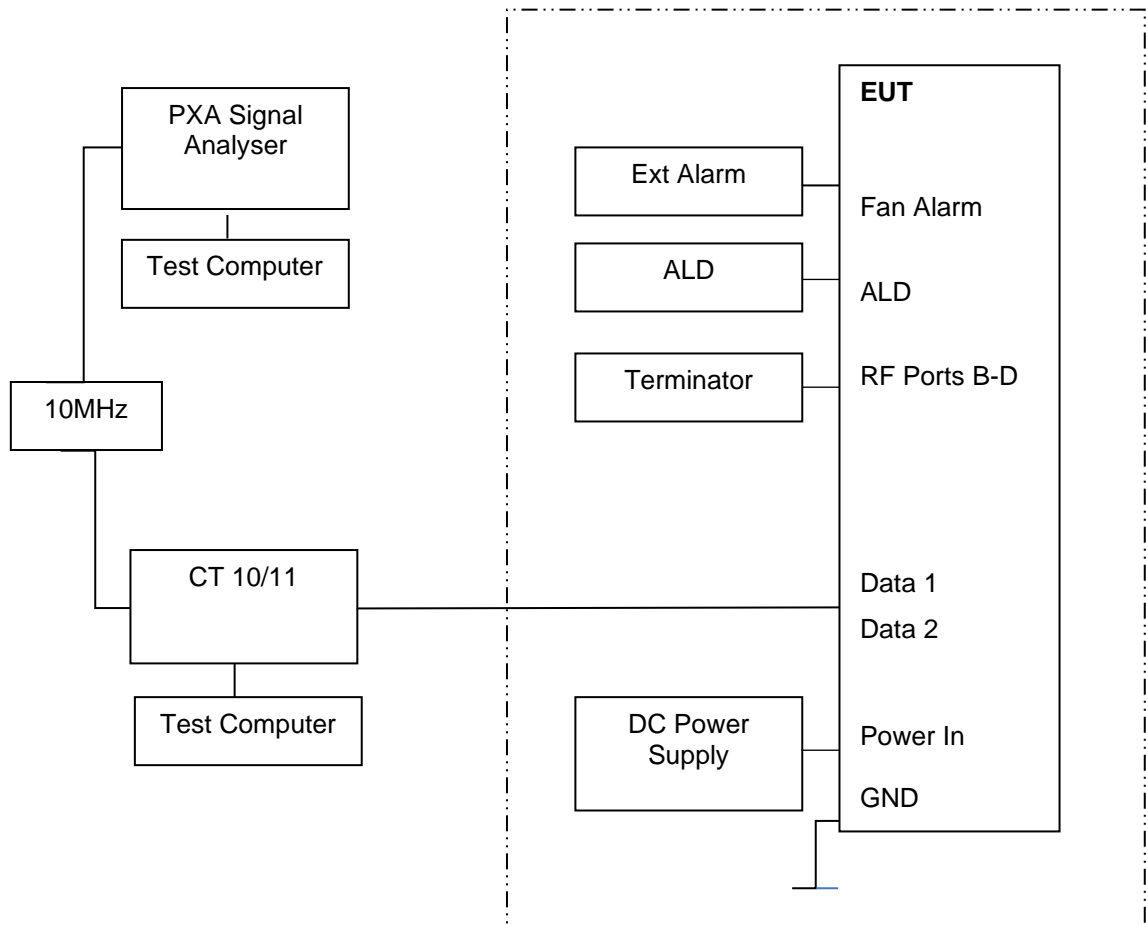



1.8 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated as described in the Test Method for each Test.

The EUT was powered from a -48V DC supply unless otherwise stated.

FCC Measurement Facility Registration Number
90987 Octagon House, Fareham Test Laboratory
Postal Address: Octagon House, Concorde Way, Fareham, Hampshire, UK, PO15 5RL

ISED Accreditation
IC#12669A Octagon House, Fareham Test Laboratory
Postal Address: Octagon House, Concorde Way, Fareham, Hampshire, UK, PO15 5RL

Under our UKAS Accreditation, TÜV SÜD conducted the following tests Octagon House, Fareham Laboratory.

Test Name	Name of Engineer(s)
Maximum Peak Output Power and Peak to Average Ratio - Conducted	Neil Rousell
Occupied Bandwidth	Neil Rousell
Band Edge	Neil Rousell
Transmitter Spurious Emissions	Neil Rousell
Radiated Emissions	Roscoe Harrison

1.9 DEVIATION FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.10 MODIFICATION RECORD

No modifications were made to the EUT during testing.



1.11 ADDITIONAL INFORMATION

This filing is for a Class 2 Permissive change to add LTE with NB-IoT to a previously certified Radio for use in the USA and Canada under the following ID's:

FCC: TA8AKRC161749-1
IC: 287AB-AS1617491

This device is electrically identical as originally certified as no hardware changes have been made

Frequency Stability has been verified at time of original certification.

This EUT uses the same port for Tx and Rx and therefore RX Spurious Emissions has not been performed. Rx Spurious Emissions have been covered by testing to FCC Part 15B, which are covered by a separate test report.

Throughout this report the power unit dBm is used. dBm is a unit of level used to indicate that a power level is expressed in decibels (dB) with reference to one milliwatt (mW). It is used as a convenient measure of absolute power because of its capability to express both very large and very small values in a short form.



SECTION 2

TEST DETAILS



2.1 MAXIMUM PEAK OUTPUT POWER AND PEAK TO AVERAGE RATIO - CONDUCTED

2.1.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.913 (a)
ISED RSS-132, Clause 5.4
FCC CFR 47 Part 2, Clause 2.1046

2.1.2 Date of Test and Modification State

16-September-2022 - Modification State 0

2.1.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.4 Test Results

Configuration 1

Maximum Output Power 47.78 dBm

Antenna	Antenna	LTE Modulation	Peak to Average Ratio (PAR) / Output Power / PSD						
			Channel Position B						
			PAR (dB)	Average Power/PSD		Total Power Port A+B+C+D		GANT* Limit 62.15dB	GANT* Limit 65.15dB
				dBm	dBm/MHz	dBm	dBm/MHz	dB	dB
A	64QAM	10.0 MHz	7.49	47.51	39.59	53.53	45.61	16.54	19.54
A	64QAM	15.0 MHz	7.47	47.65	37.75	53.67	43.77	18.38	21.38
A	64QAM	20.0 MHz	7.47	47.54	36.38	53.56	42.40	19.75	22.75


Remarks

Total Power = Measured Output Power (port A) + 10log (NANT)


Where NANT refers to the number of Ports.

* Maximum antenna system gain (including cable loss), GANT (dBi) 50 ohm, for the tested configurations, to comply with Maximum radiated output power in ISED SRSP-503, calculated using measured and summed PSD for all 4 ports.

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

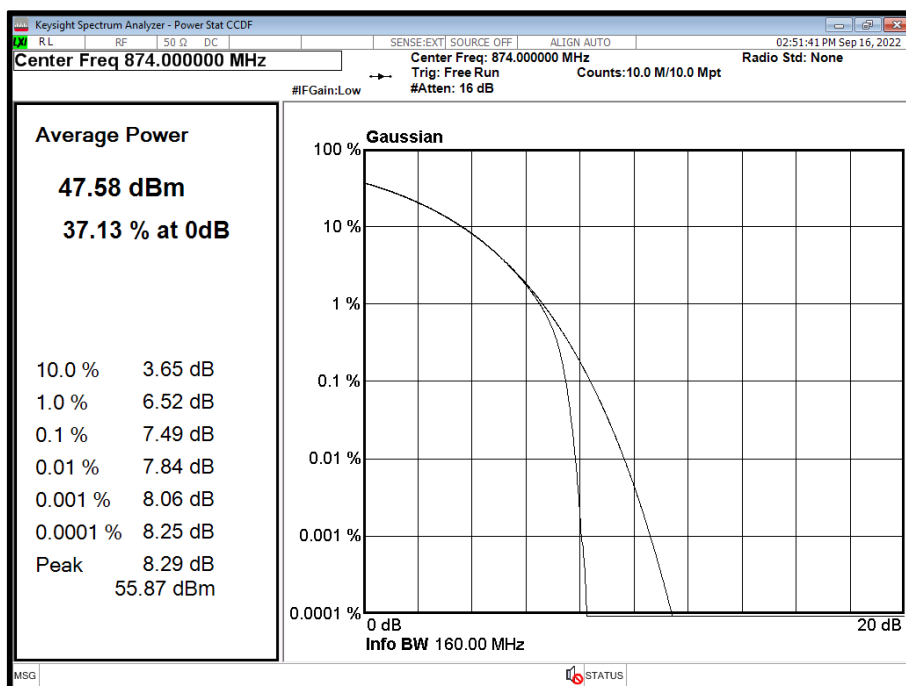


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B

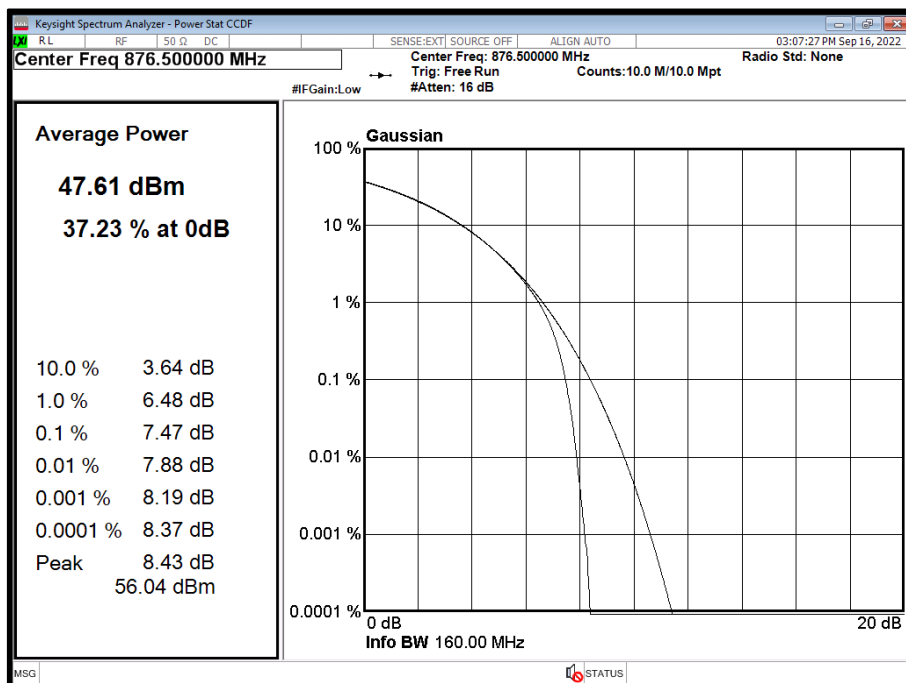



Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B

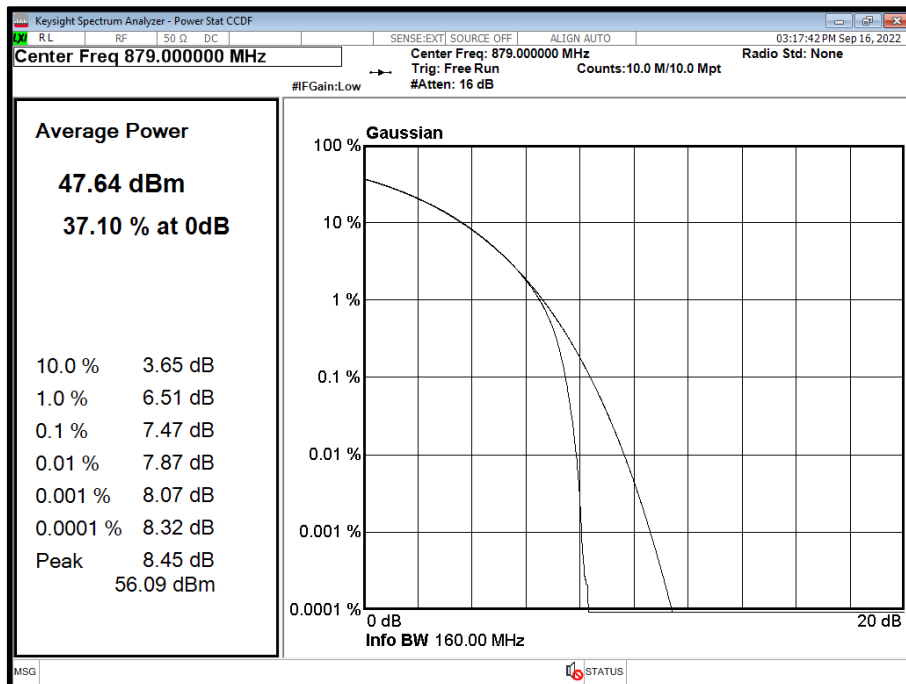

Configuration 1

Maximum Output Power 47.78 dBm

Antenna	Antenna	LTE Modulation	Peak to Average Ratio (PAR) / Output Power / PSD						
			Channel Position T						
			PAR (dB)	Average Power/PSD		Total Power Port A+B+C+D		GANT* Limit 62.15dB	G _{ANT} * Limit 65.15dB
				dBm	dBm/MHz	dBm	dBm/MHz	dB	dB
A	64QAM	10.0 MHz	7.52	47.66	39.70	53.68	45.72	16.43	19.43
A	64QAM	15.0 MHz	7.49	47.46	37.66	53.48	43.68	18.47	21.47
A	64QAM	20.0 MHz	7.48	47.69	36.38	53.71	42.40	19.75	22.75


Remarks

Total Power = Measured Output Power (port A) + 10log (NANT)


Where NANT refers to the number of Ports.

* Maximum antenna system gain (including cable loss), GANT (dBi) 50 ohm, for the tested configurations, to comply with Maximum radiated output power in ISED SRSP-503, calculated using measured and summed PSD for all 4 ports.

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

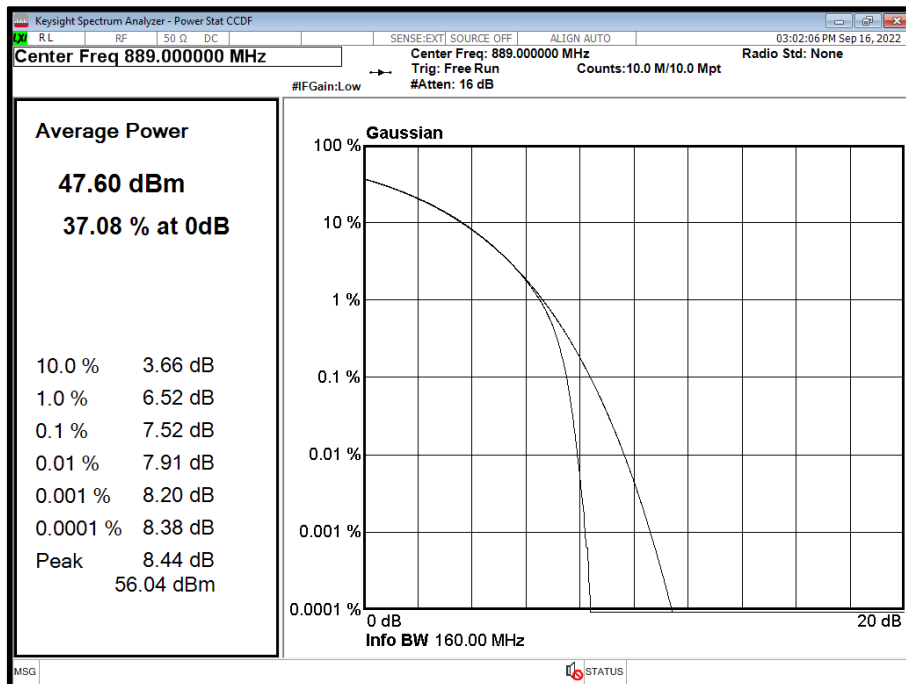


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T

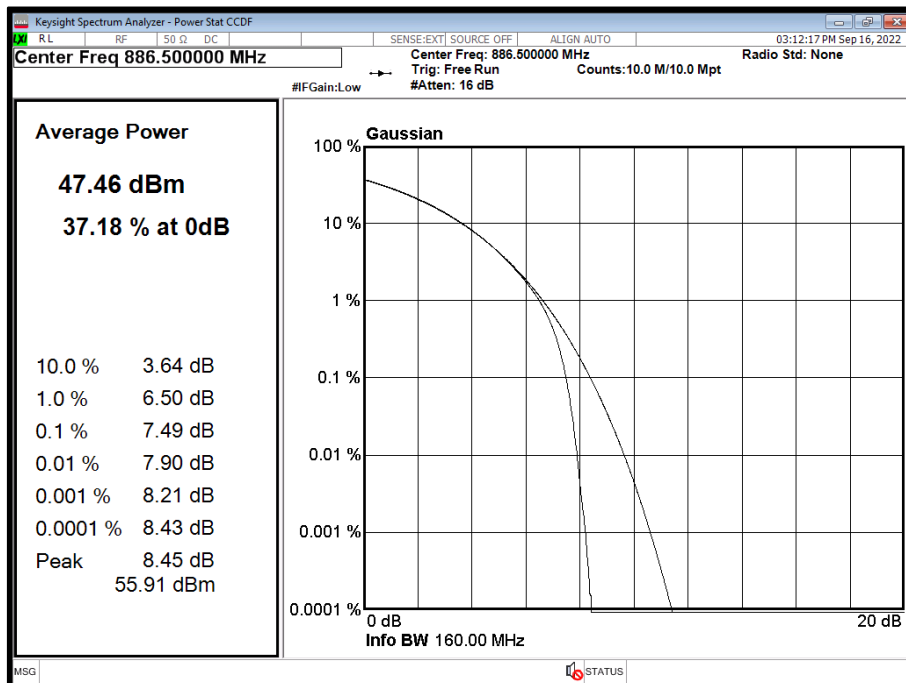



Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T

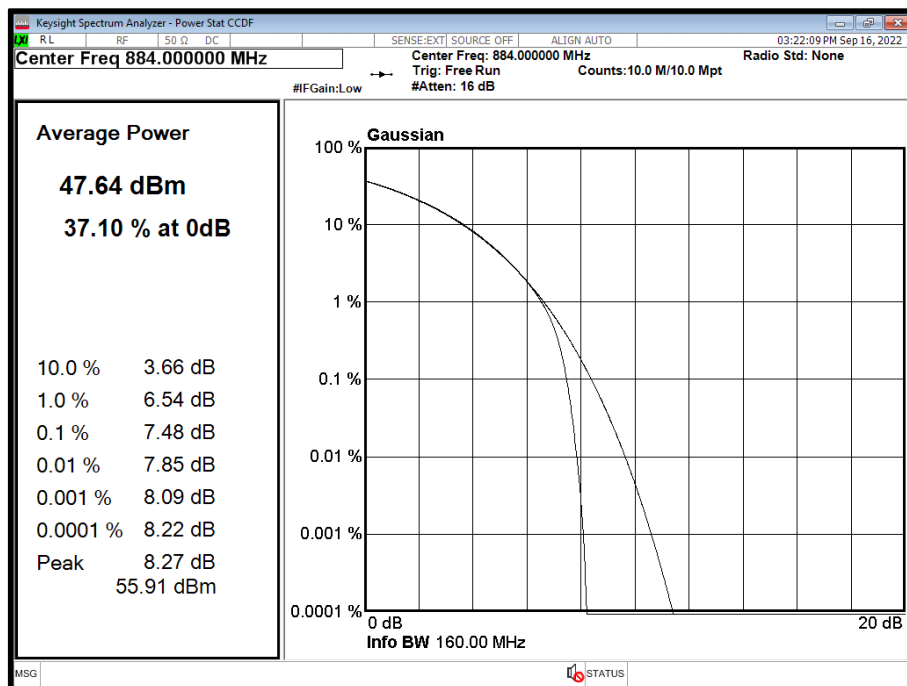

FCC Part 22.913(a) Clauses (i) & (i)

Limit	
Maximum ERP (Non-Urban)	≤ 2000 W or ≤ 800W/MHz (>72km from International Border)
	≤ 1000 W or ≤ 800W/MHz
Maximum ERP (Urban)	≤ 500 W or ≤ 400W/MHz
Peak to Average Ratio	13 dB

RSS-132 Clause 5.4

Limit	
Peak to Average Ratio	13 dB



2.2 OCCUPIED BANDWIDTH

2.2.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.917 (b)
ISED RSS-GEN, Clause 6.7
ISED RSS-132, Clause 5.5
FCC CFR 47 Part 2, Clause 2.1049

2.2.2 Date of Test and Modification State

16-September-2022 - Modification State 0

2.2.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.4 Environmental Conditions

Ambient Temperature	22.0°C
Relative Humidity	50.2%

2.2.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 4.2 and 4.3. The Spectrum Analyser RBW was configured to be at least 1% of the channel bandwidth of the carrier to be measured.

For 26 dB Bandwidth, in accordance with KDB 971168 D01, a peak detector and a trace setting of Max Hold were used. The trace was allowed to stabilise. Using the Spectrum Analyser function, the 26dB measurement result was obtained.

4.2 Occupied bandwidth – relative measurement procedure

The reference value is the highest level of the spectral envelope of the modulated signal, unless otherwise specified in an applicable rule section.

Subclause 5.4.3 of ANSI C63.26-2015 is applicable.

4.3 Occupied bandwidth – power bandwidth (99 %) measurement procedure

Subclause 5.4.4 of ANSI C63.26-2015 is applicable (wherein the recommendation is to use the 99 % power bandwidth function of a spectrum analyzer).

2.2.6 Test Results

Configuration 1


Maximum Output Power 47.78 dBm




Antenna	LTE Modulation	LTE Carrier Bandwidth	Result (kHz)					
			Channel Position B		Channel Position M		Channel Position T	
			Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth	Occupied Bandwidth	-26 dB Bandwidth
A	64QAM	10.0 MHz	9406.55	9785.00	-	-	9407.22	9772.98
A	64QAM	15.0 MHz	14027.74	14542.62	-	-	14021.25	14596.93
A	64QAM	20.0 MHz	18445.53	19345.31	-	-	18465.81	19275.80



Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

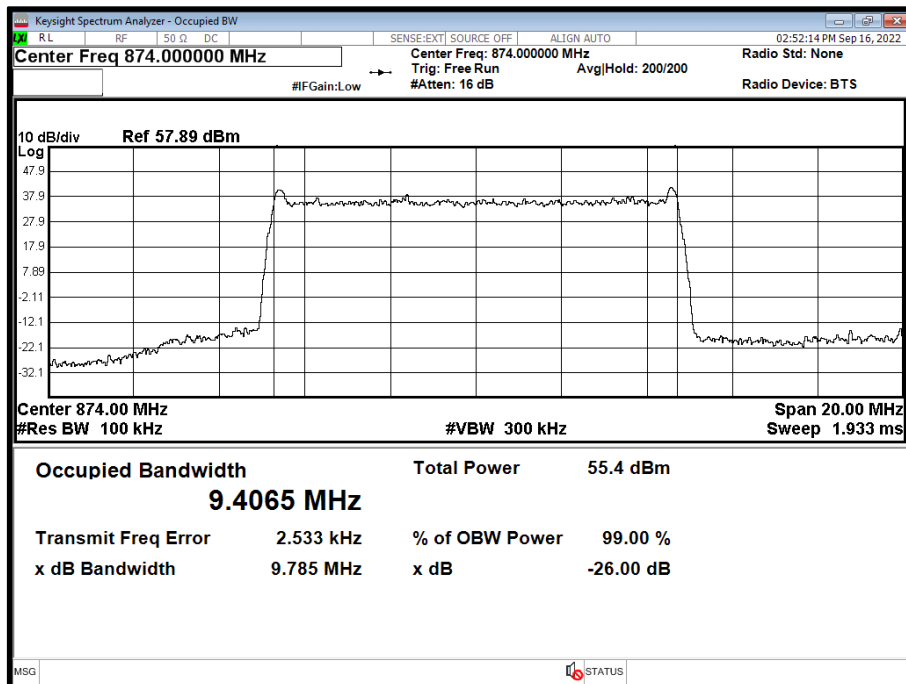


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

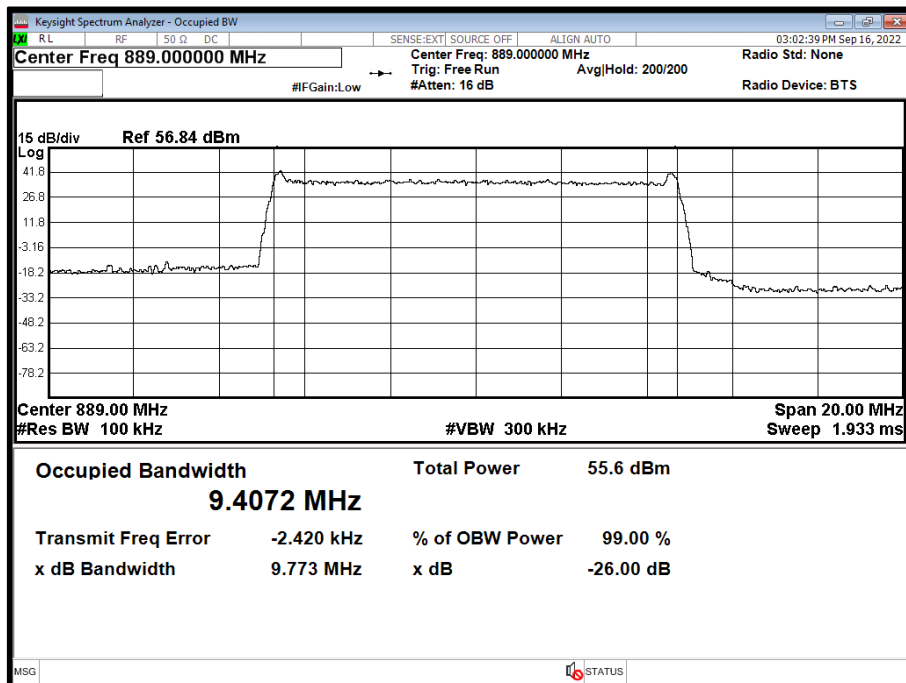




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B

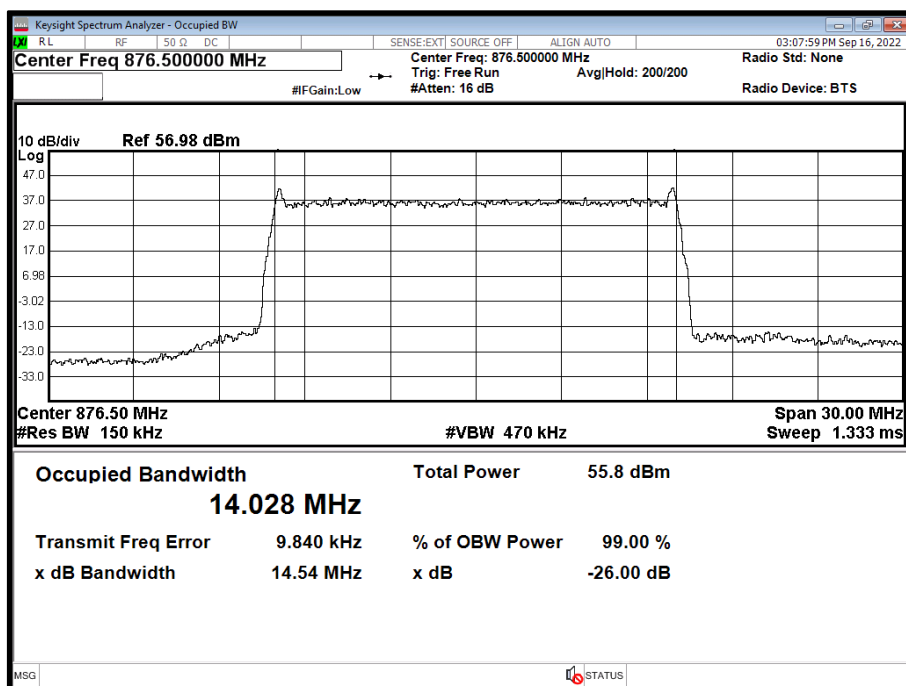


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T

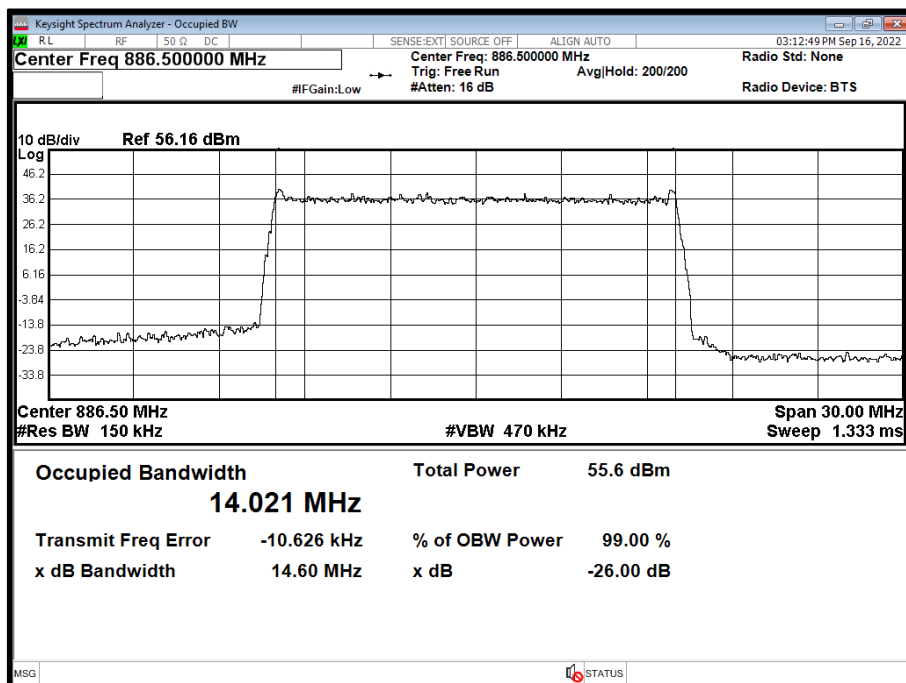




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B

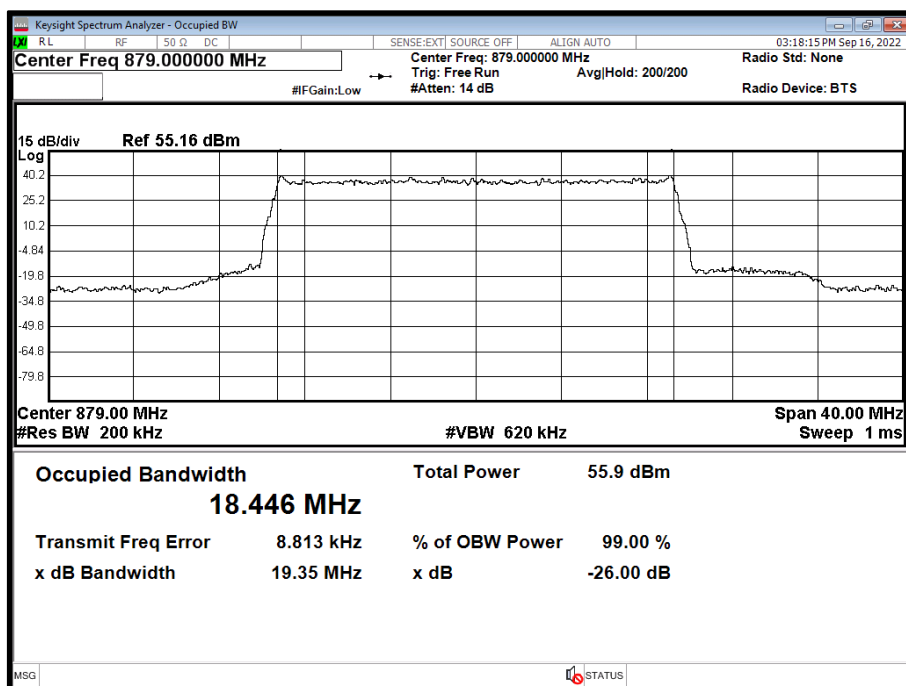

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T

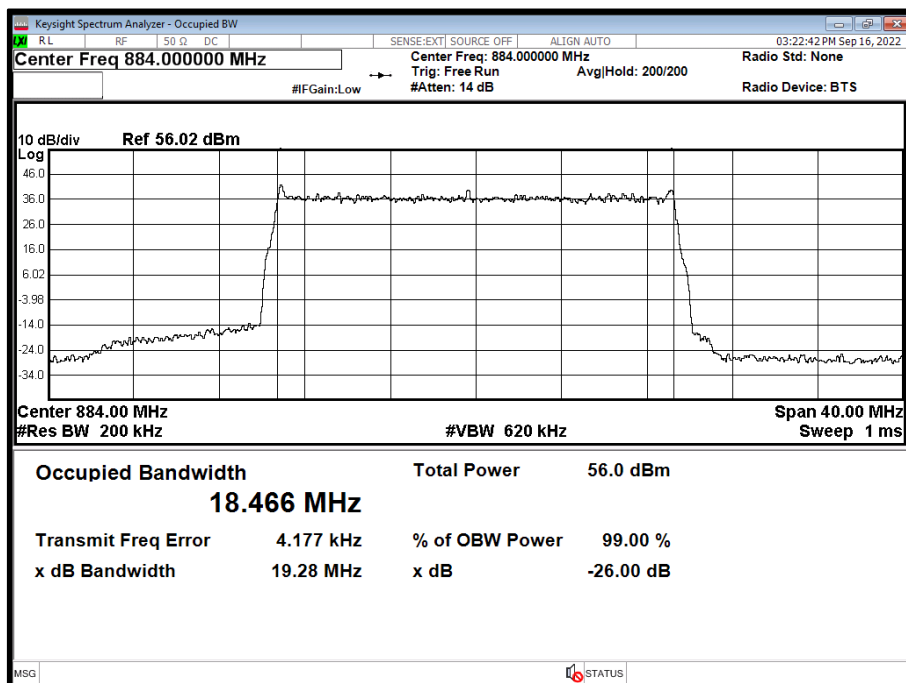



2.3 BAND EDGE

2.3.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.917(b)
ISED RSS-132, Clause 5.5
FCC CFR 47 Part 2, Clause 2.1051

2.3.2 Date of Test and Modification State

16-September-2022 - Modification State 0

2.3.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.4 Environmental Conditions

Ambient Temperature 22.0°C
Relative Humidity 50.2%

2.3.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.0.

Band Edge measurements were used an Integration Bandwidth of at least 1% of the measured 26dB Bandwidth.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \log(N)$, where N is equal to the number of MIMO antenna ports.

For single port, the limit was calculated as being $-13 \text{ dBm} - 10 * \log(4) = -19 \text{ dBm}$.


2.3.6 Test Results

Configuration 1


Maximum Output Power 47.78 dBm

Antenna	LTE Modulation	LTE Carrier Bandwidth	Band Edge (MHz)	
			Channel Position B	Channel Position T
A	64QAM	10.0 MHz	874.0	889.0
A	64QAM	15.0 MHz	876.5	886.5
A	64QAM	20.0 MHz	879.0	884.0

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B

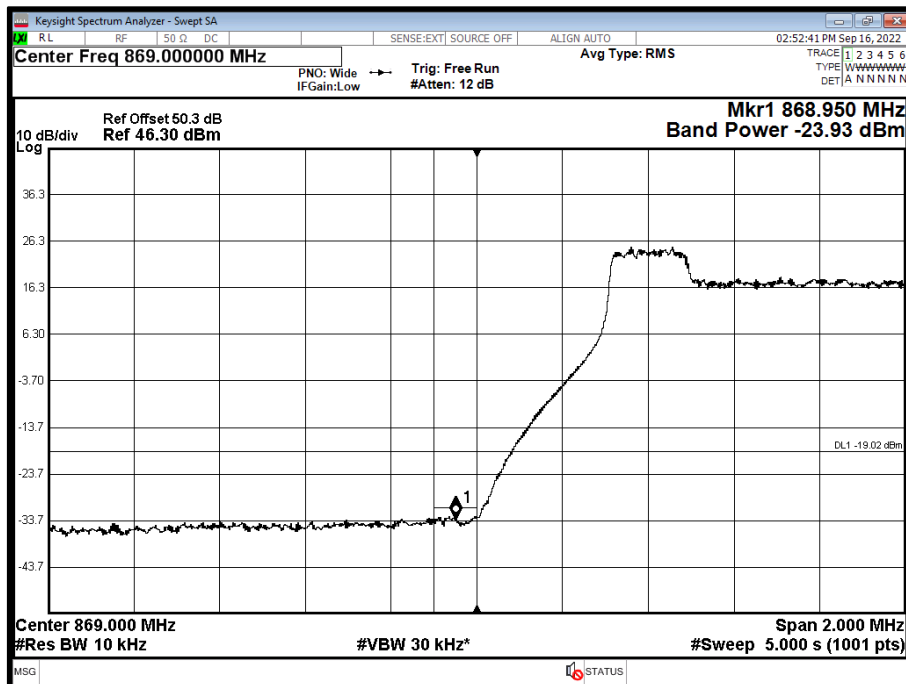


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T

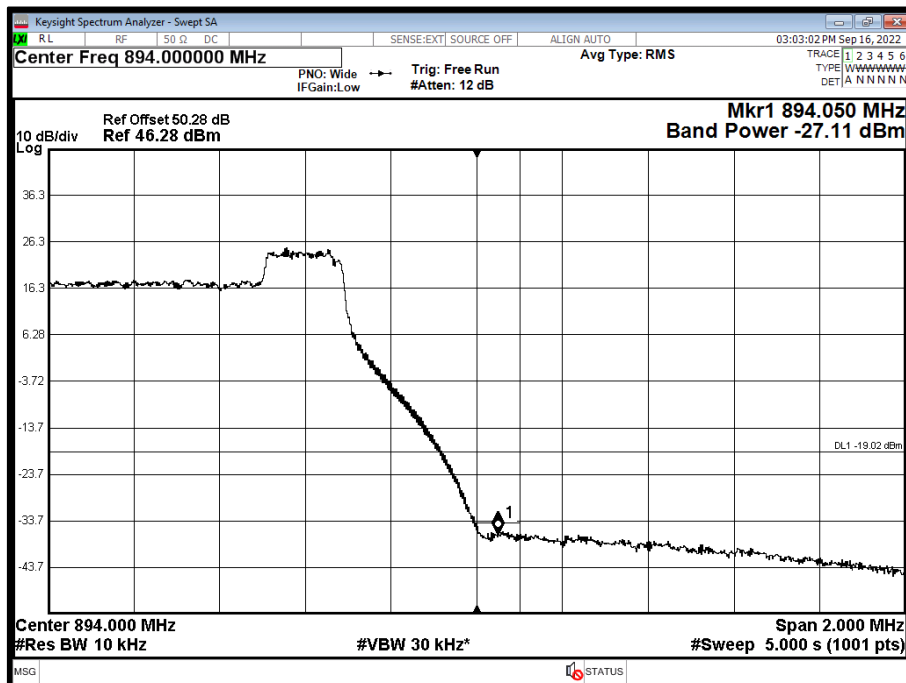




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B

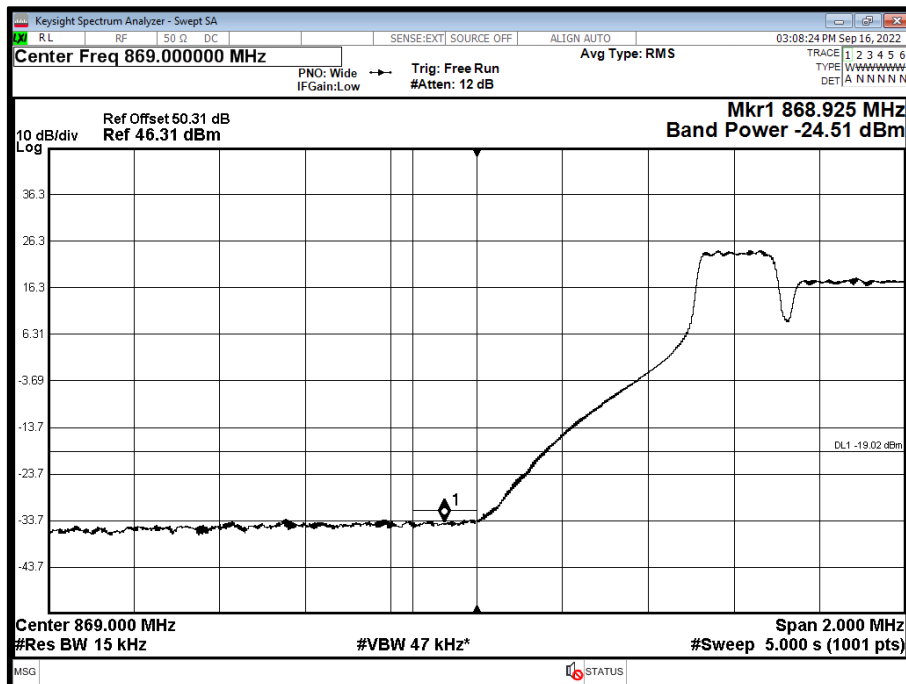


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T

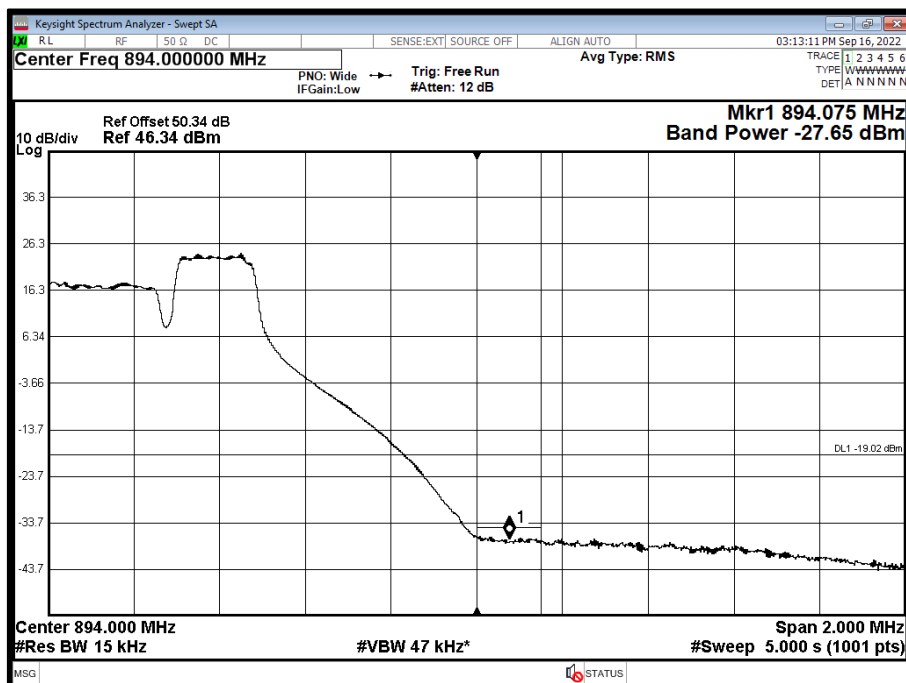




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B

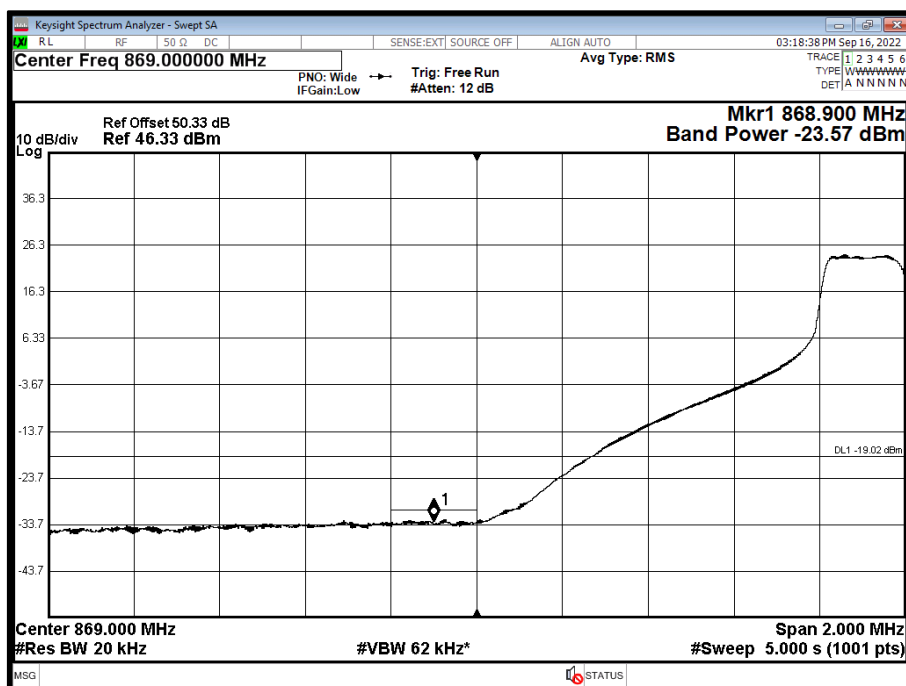

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T

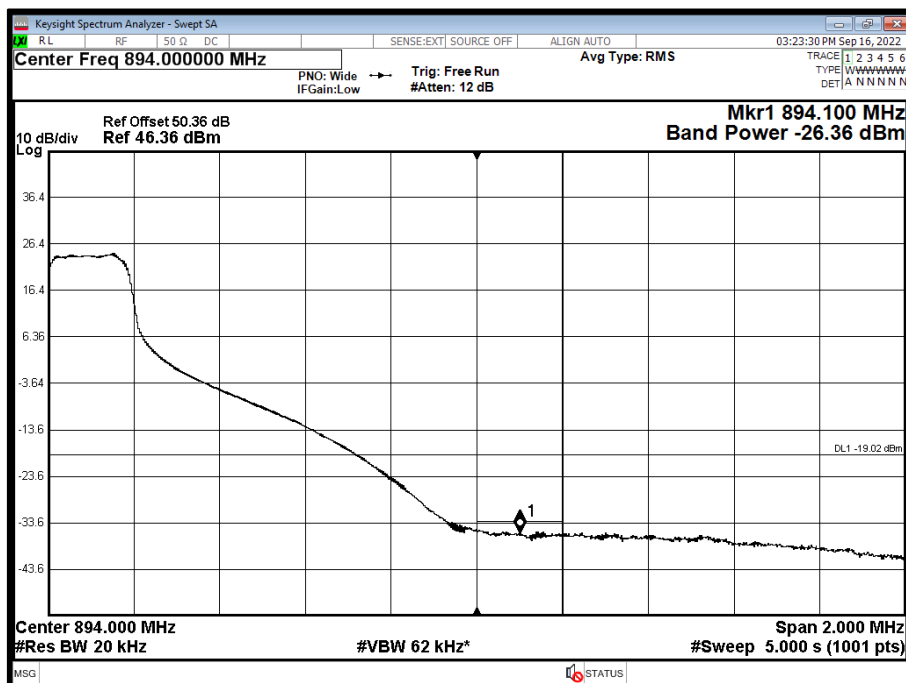

Limit	-19 dBm
-------	---------



2.4 TRANSMITTER SPURIOUS EMISSIONS

2.4.1 Specification Reference

FCC CFR 47 Part 22, Clause 22.917(b)
ISED RSS-GEN, Clause 6.13
ISED RSS-132, Clause 5.5
FCC CFR 47 Part 2, Clause 2.1051

2.4.2 Date of Test and Modification State

16-September-2022 - Modification State 0

2.4.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.4 Environmental Conditions

Ambient Temperature	22.0°C
Relative Humidity	50.2%

2.4.5 Test Method

All measurements were made in accordance with FCC KDB 971168 D01, Clause 6.1.

Each antenna port has been declared as being equivalent, therefore measurements were made on one antenna port only. To account for this, the limit was tightened by $10 * \log(N)$, where N is equal to the number of MIMO antenna ports.


For single port, the limit was calculated as being $-13 \text{ dBm} - 10 * \log(4) = -19 \text{ dBm}$.

2.4.6 Test Results


Configuration 1

Maximum Output Power 47.78 dBm

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B - Band 1 - Range 0.009 to 1200 MHz

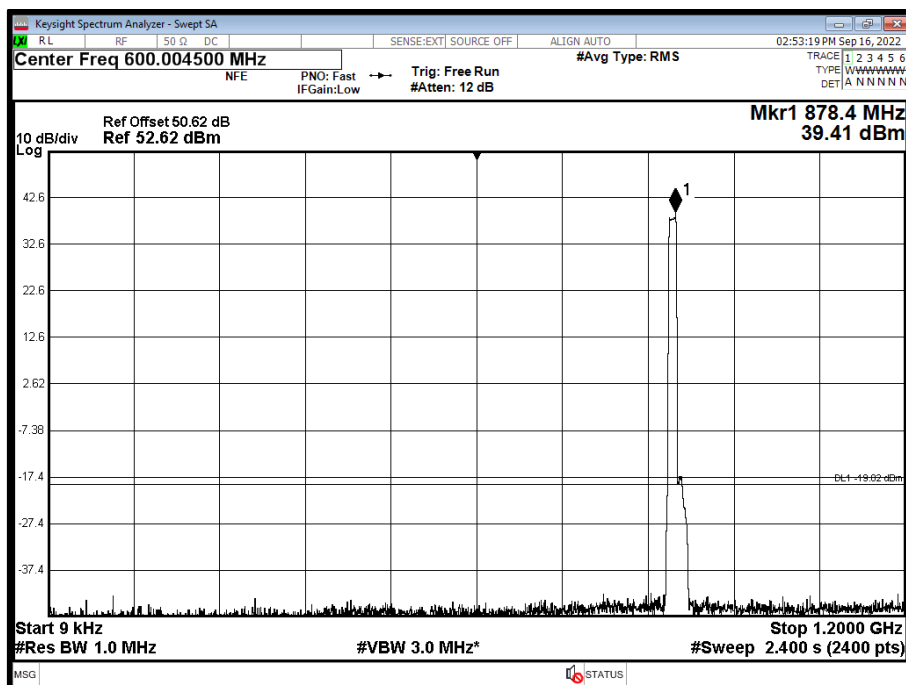


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B - Band 2.00 - Range 1200 to 4000 MHz

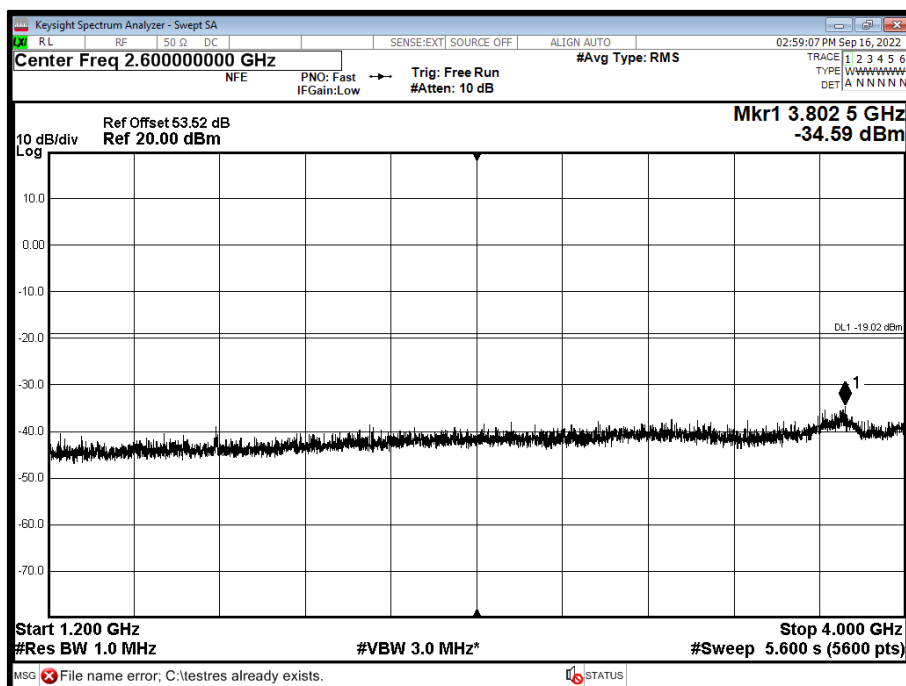





Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position B - Band 3.00 - Range 4000 to 9000 MHz

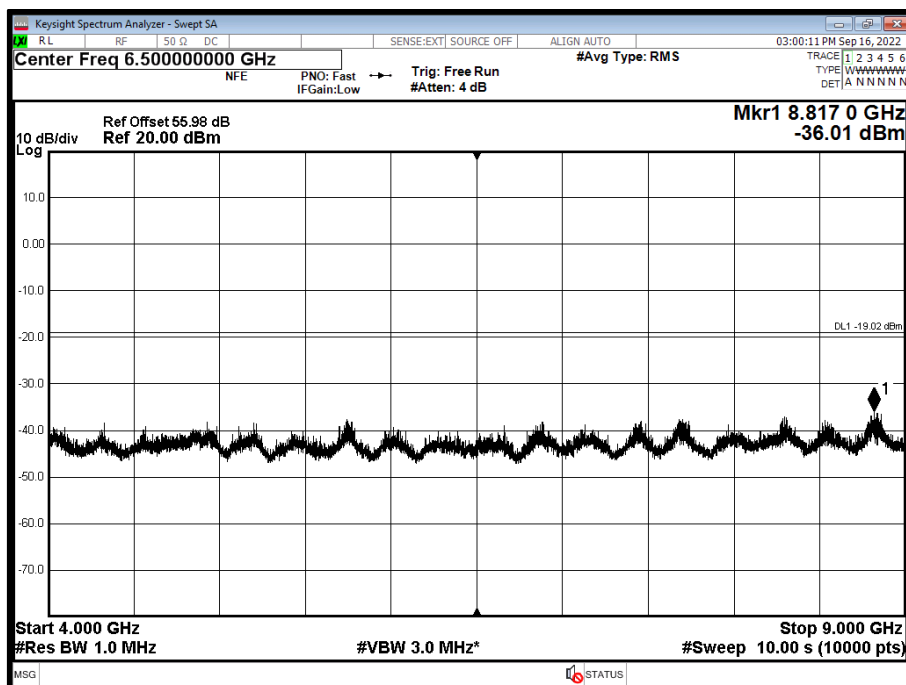


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T - Band 1 - Range 0.009 to 1200 MHz

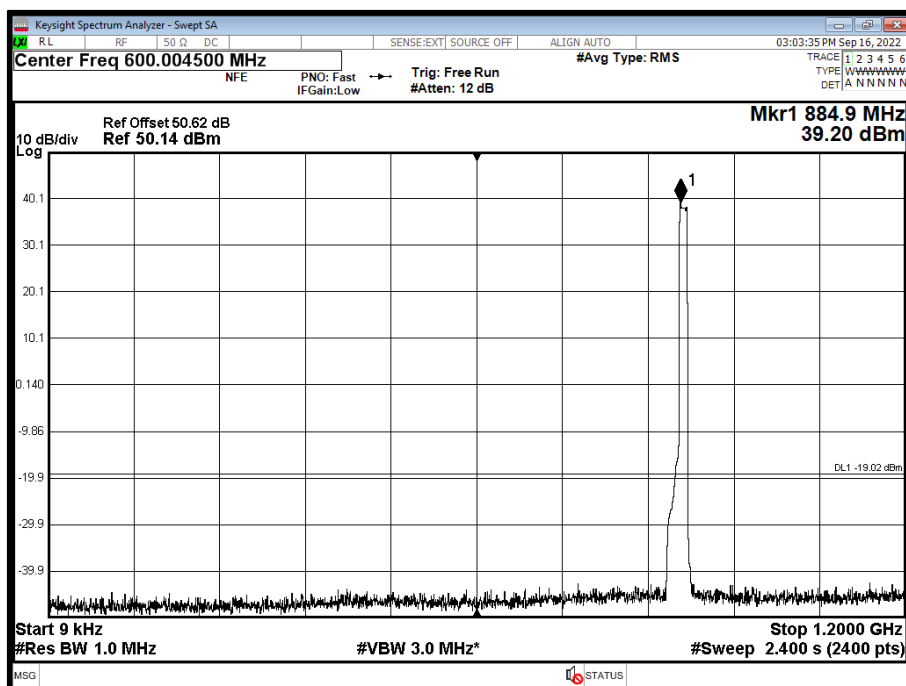

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T - Band 2.00 - Range 1200 to 4000 MHz

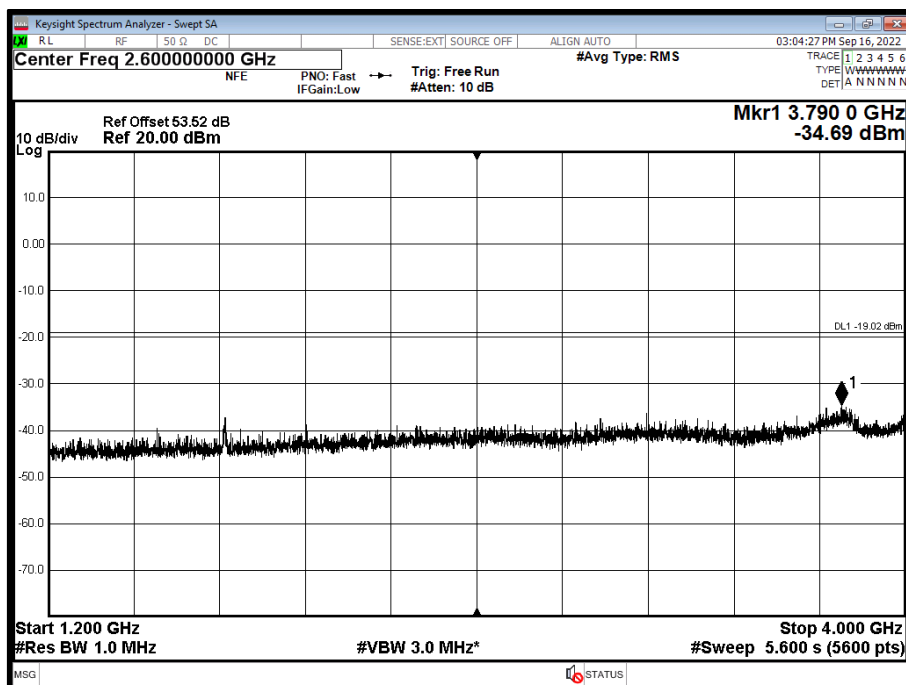


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 10.0 MHz - Channel Position T - Band 3.00 - Range 4000 to 9000 MHz

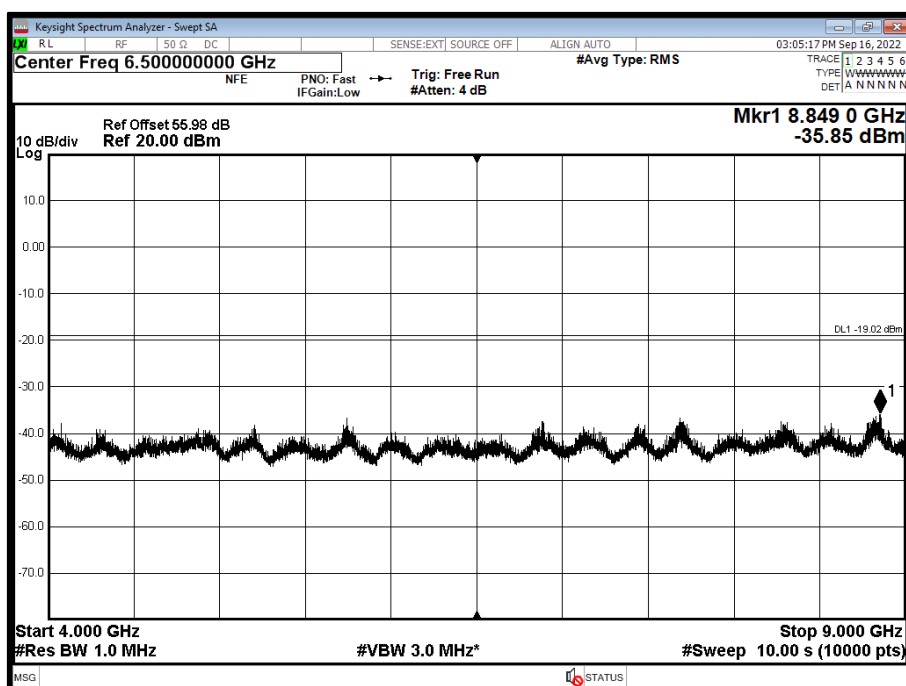




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B - Band 1 - Range 0.009 to 1200 MHz

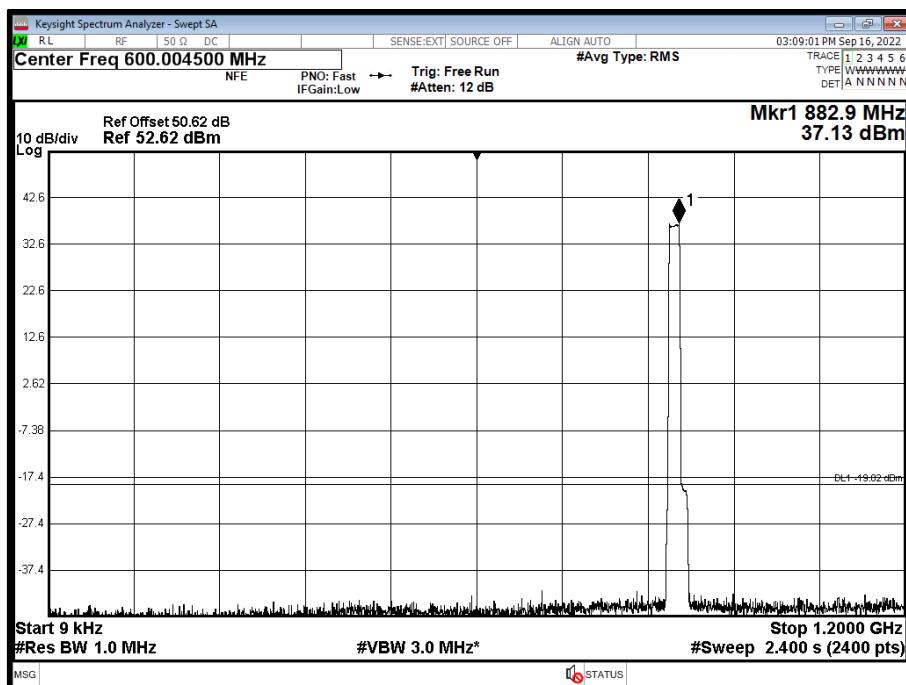


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B - Band 2.00 - Range 1200 to 4000 MHz

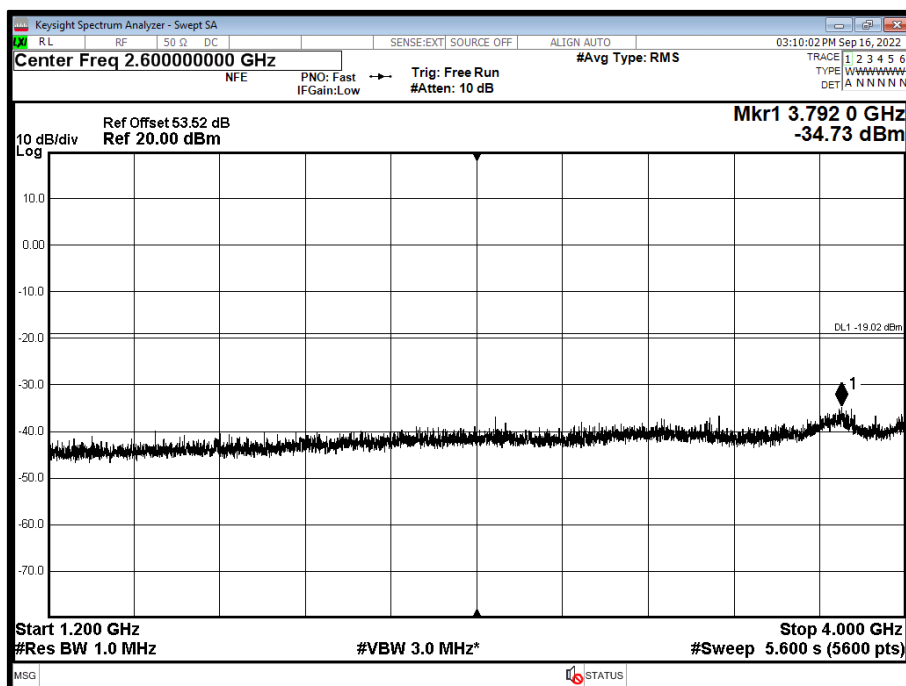




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position B - Band 3.00 - Range 4000 to 9000 MHz

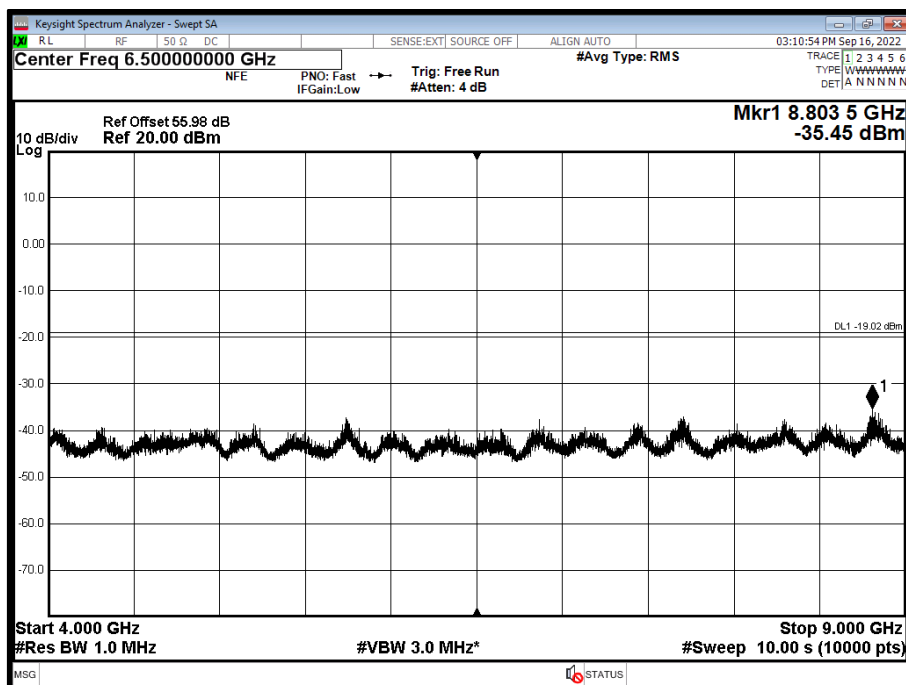


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T - Band 1 - Range 0.009 to 1200 MHz

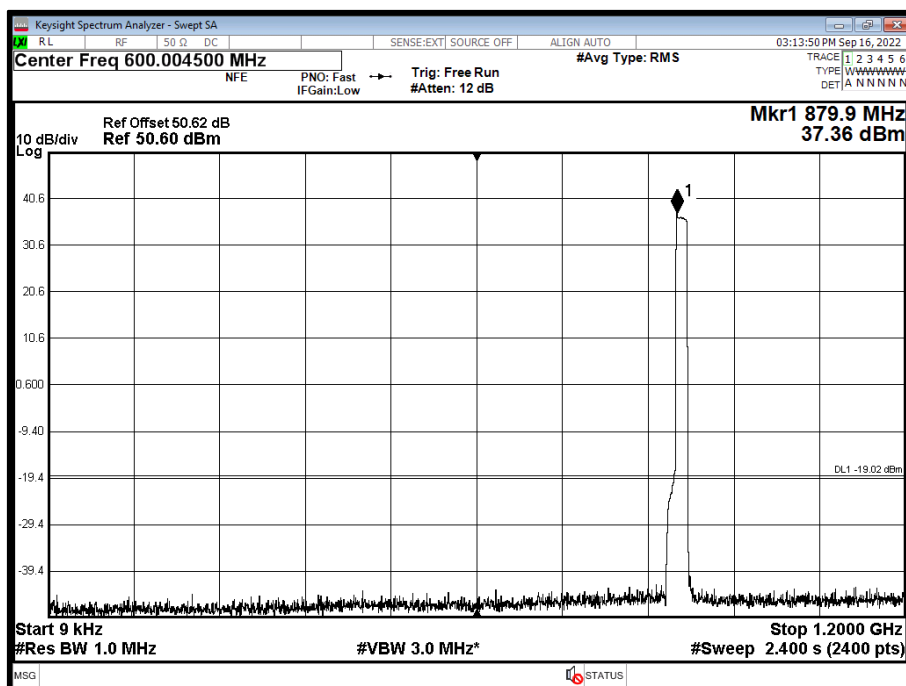





Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T - Band 2.00 - Range 1200 to 4000 MHz

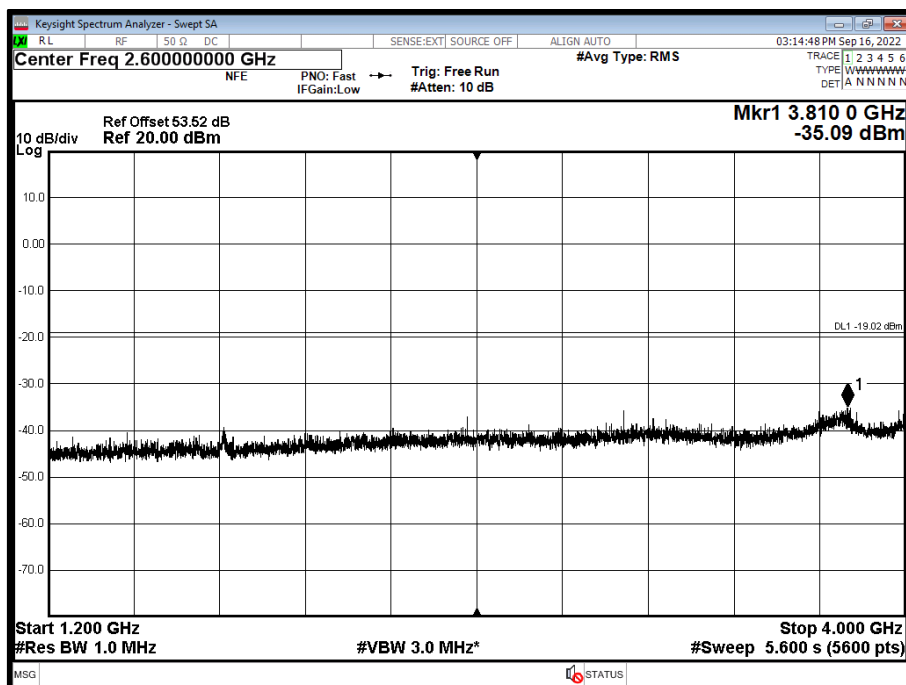


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 15.0 MHz - Channel Position T - Band 3.00 - Range 4000 to 9000 MHz

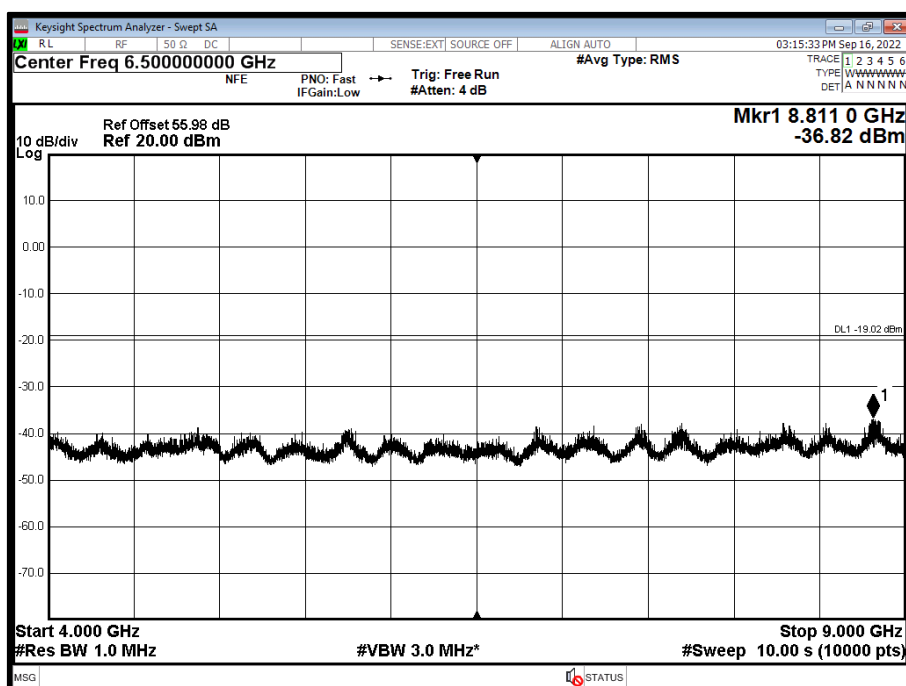

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B - Band 1 - Range 0.009 to 1200 MHz

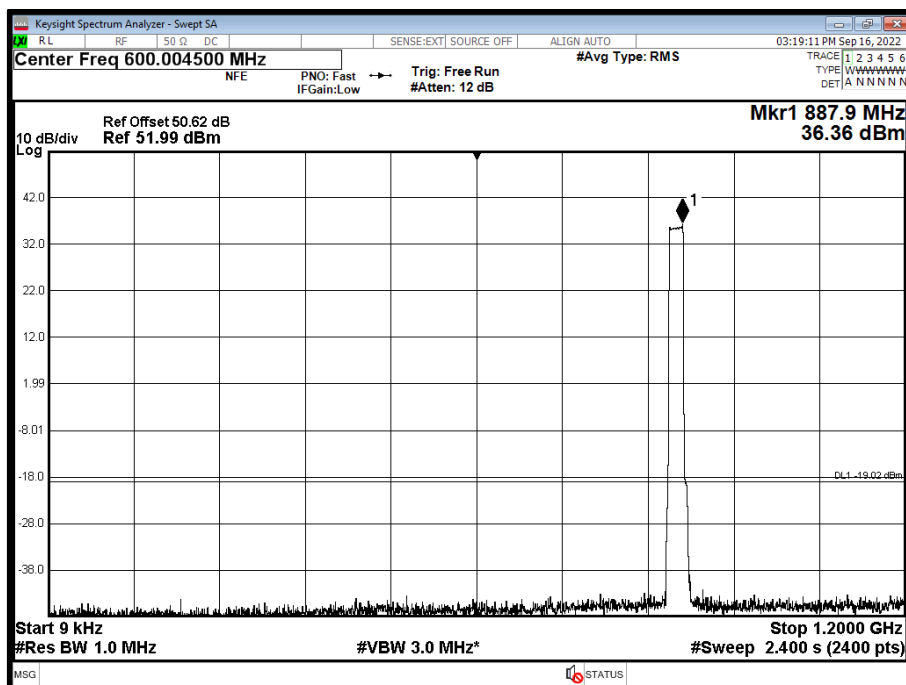


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B - Band 2.00 - Range 1200 to 4000 MHz

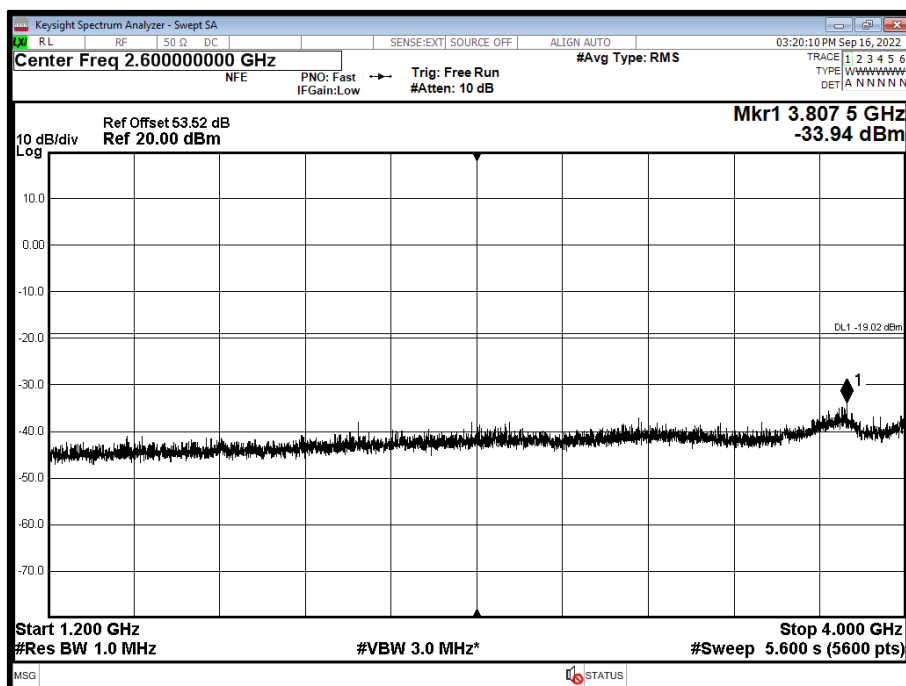




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position B - Band 3.00 - Range 4000 to 9000 MHz

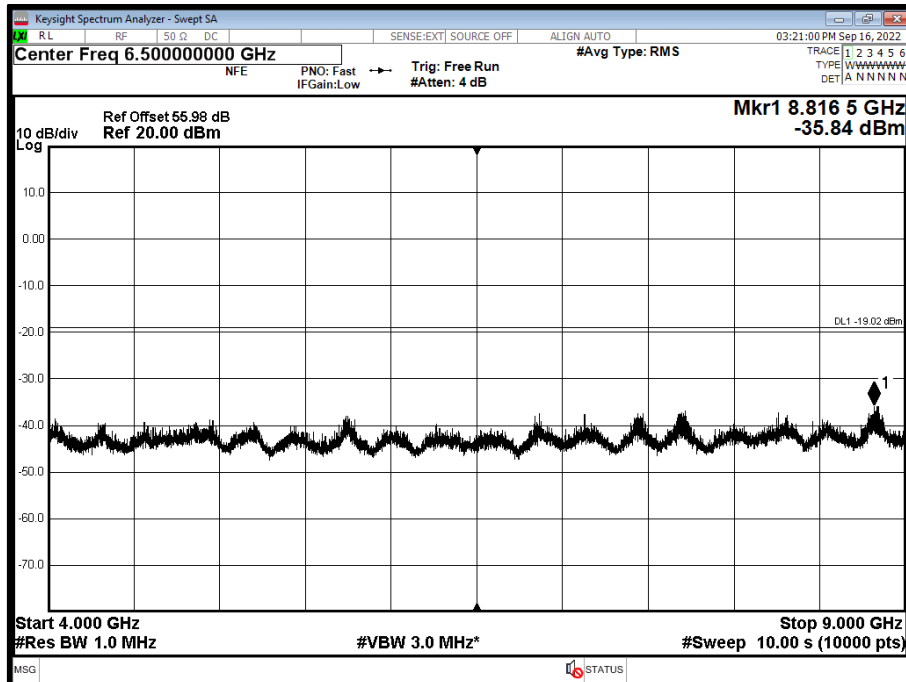


Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T - Band 1 - Range 0.009 to 1200 MHz

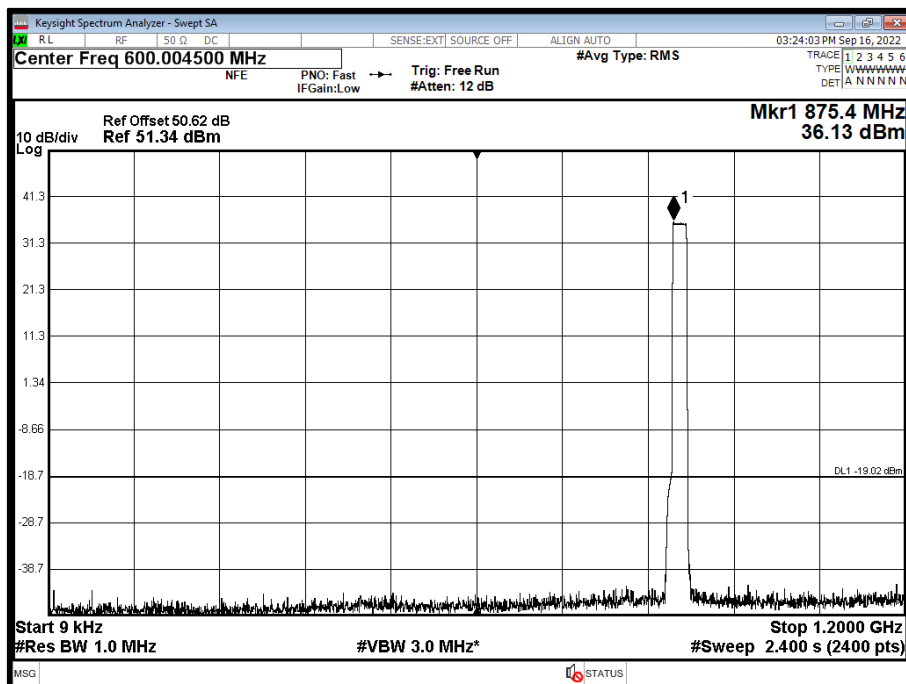




Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T - Band 2.00 - Range 1200 to 4000 MHz

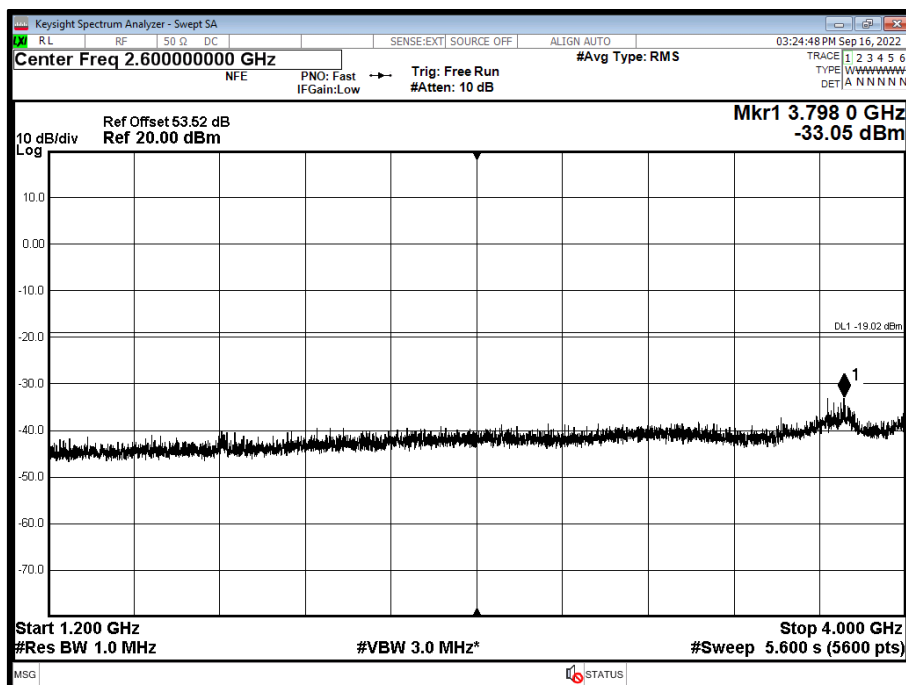

Antenna A - LTE Modulation 64QAM - LTE Carrier Bandwidth 20.0 MHz - Channel Position T - Band 3.00 - Range 4000 to 9000 MHz

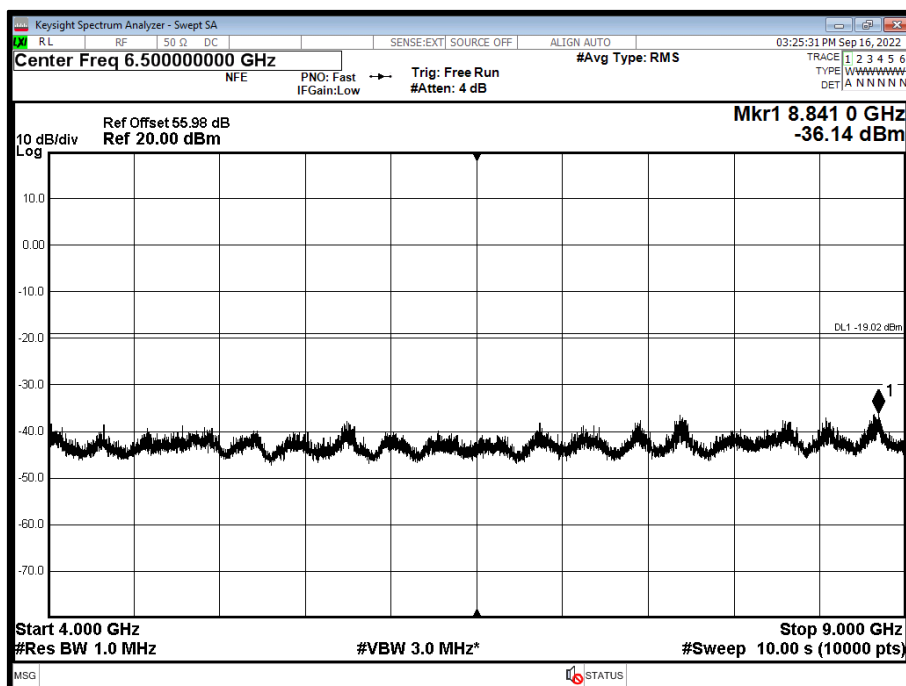

Limit	-19dBm
-------	--------



2.5 RADIATED EMISSIONS

2.5.1 Specification Reference

ISED RSS-GEN, Clause 6.13
ISED RSS-132, Clause 5.5
FCC CFR 47 Part 22, Clause 22.917(a)

2.5.2 Date of Test and Modification State

15-17 and 24-November-2022 - Modification State 0

2.5.3 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.5.4 Environmental Conditions

Ambient Temperature 17.5-18.7°C
Relative Humidity 48.6-58.4%

2.5.5 Test Method

The test was performed in accordance with ANSI C63.26 Clause 5. The EUT was configured as defined in ANSI C63.26, clause 5.5.2.3.2.

The EUT was set up on a support replicating typical installation conditions at a height of 0.8 m above the reference ground plane for measurements below 1GHz, (see setup photos) within a semi-anechoic chamber on a remotely controlled turntable. Above 1 GHz, the height was increased to 1.5 m above the reference ground plane.

2.5.6 Test Results


Configuration 1

Maximum Output Power 46.00 dBm


Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Bot - LTE&NB-IoT - B5_BW10MHz, 874.0MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

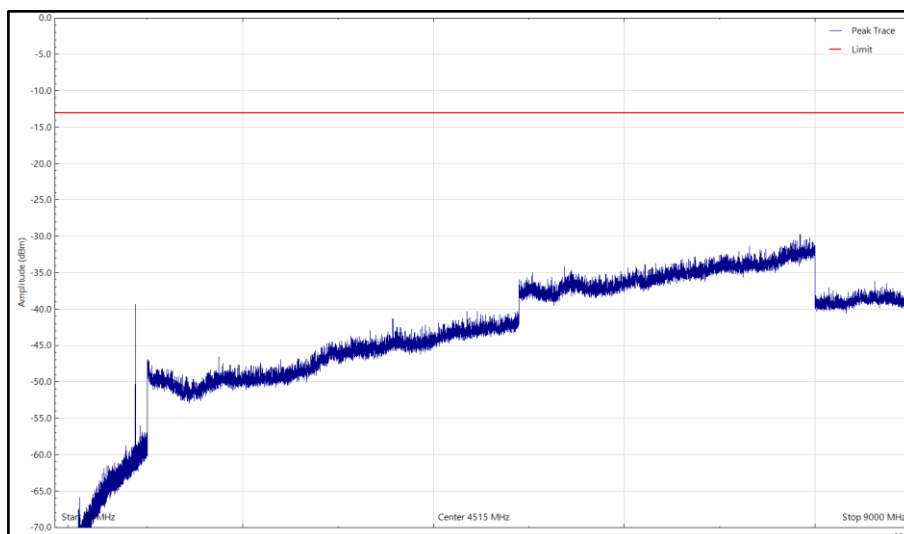

Bot - LTE&NB-IoT - B5_BW10MHz, 874.0MHz, 30 MHz to 9 GHz, Horizontal (Peak)

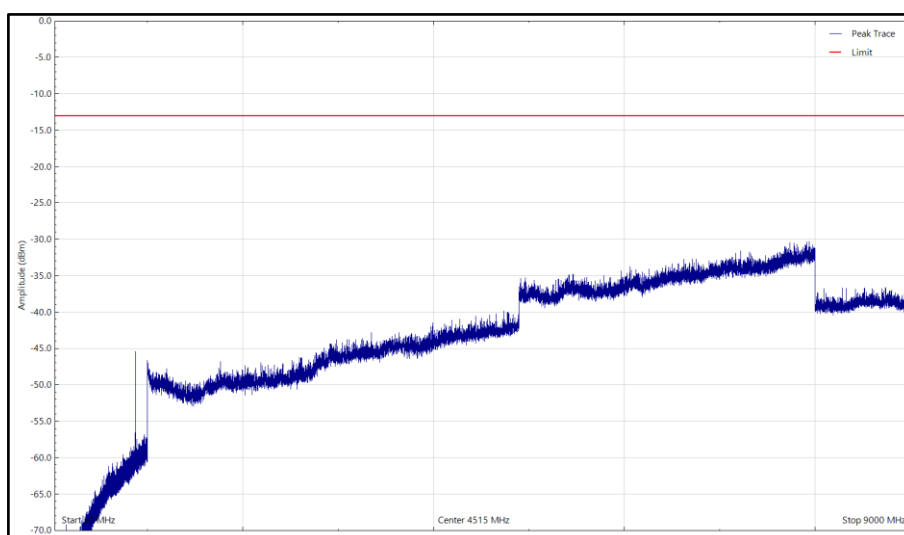


Bot - LTE&NB-IoT - B5_BW10MHz, 874.0MHz, 30 MHz to 9 GHz, Vertical (Peak)




Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Bot - LTE&NB-IoT - B5_BW15MHz, 876.5MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

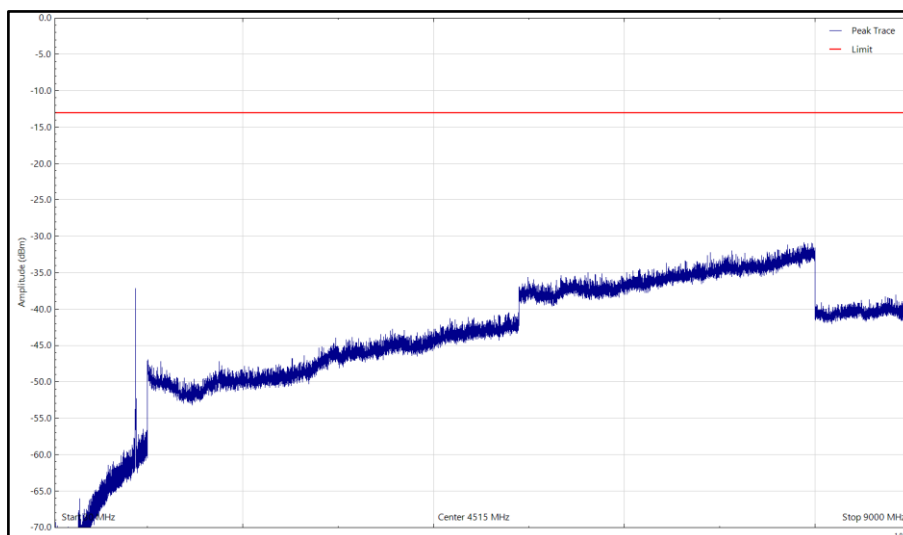

Bot - LTE&NB-IoT - B5_BW15MHz, 876.5MHz, 30 MHz to 9 GHz, Horizontal (Peak)

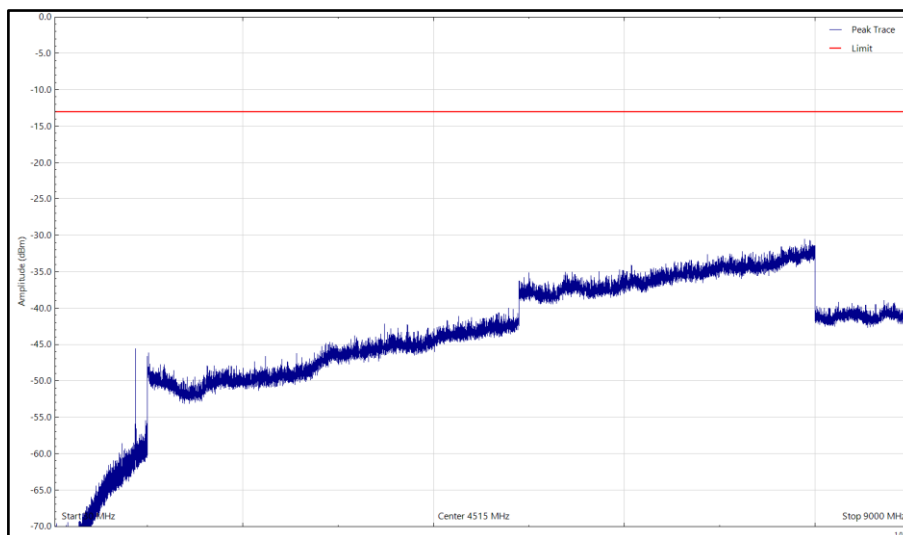


Bot - LTE&NB-IoT - B5_BW15MHz, 876.5MHz, 30 MHz to 9 GHz, Vertical (Peak)




Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Bot - LTE&NB-IoT - B5_BW20MHz, 879.0MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

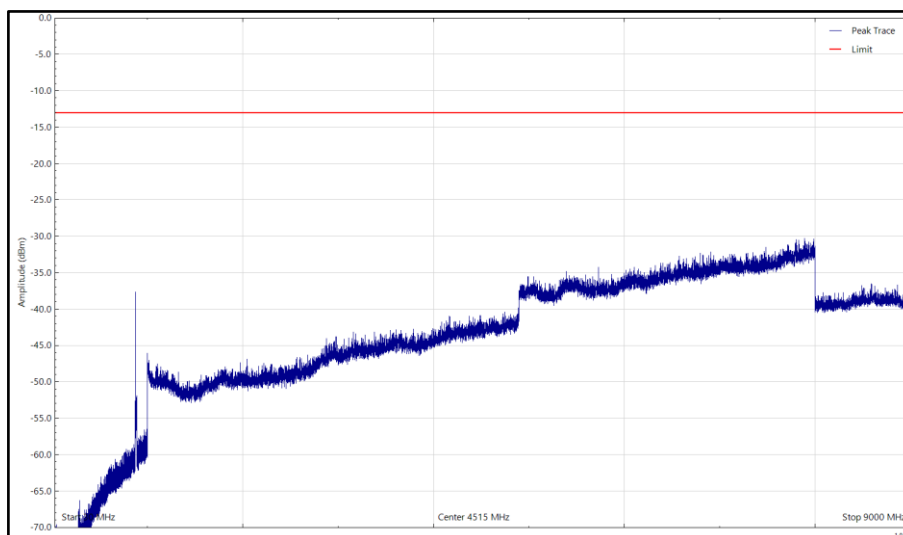

Bot - LTE&NB-IoT - B5_BW20MHz, 879.0MHz, 30 MHz to 9 GHz, Horizontal (Peak)

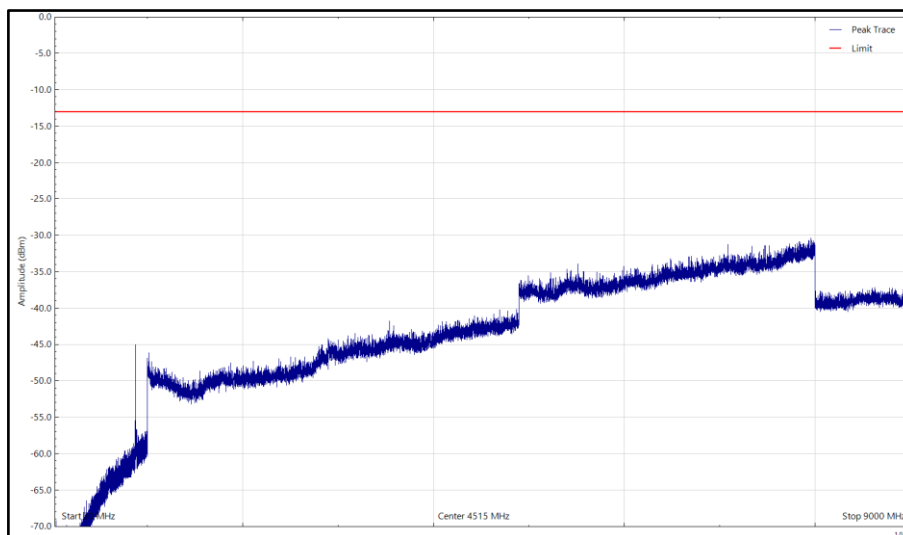


Bot - LTE&NB-IoT - B5_BW20MHz, 879.0MHz, 30 MHz to 9 GHz, Vertical (Peak)




Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Top - LTE&NB-IoT - B5_BW10MHz, 889.0MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

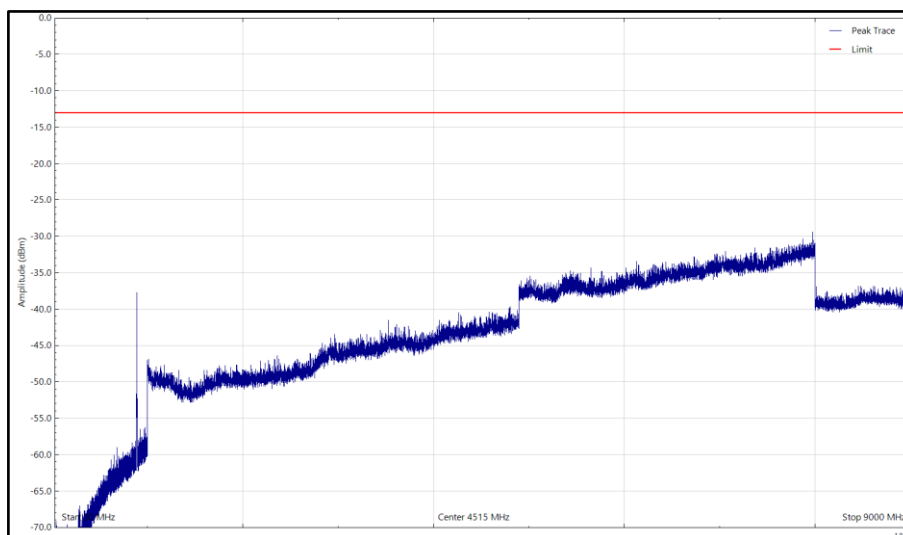

Top - LTE&NB-IoT - B5_BW10MHz, 889.0MHz, 30 MHz to 9 GHz, Horizontal (Peak)

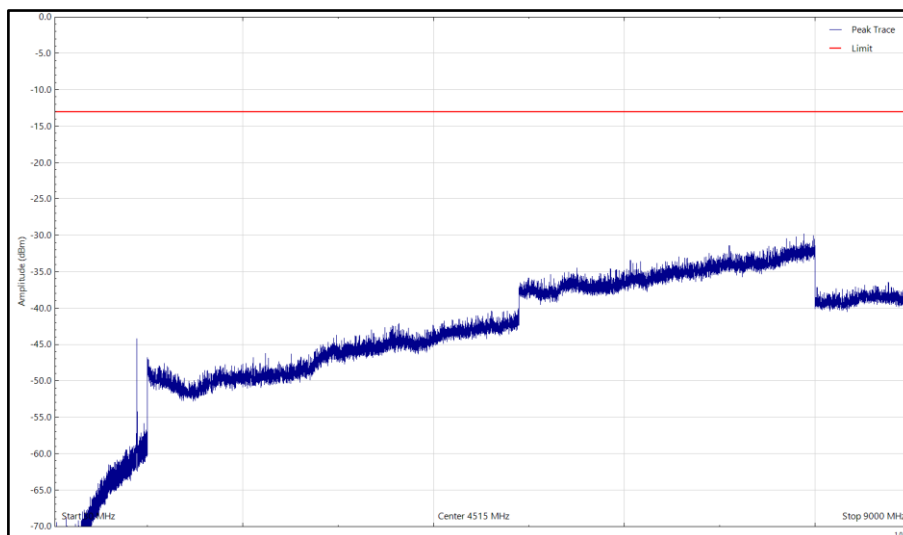


Top - LTE&NB-IoT - B5_BW10MHz, 889.0MHz, 30 MHz to 9 GHz, Vertical (Peak)


Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Top - LTE&NB-IoT - B5_BW15MHz, 886.5MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

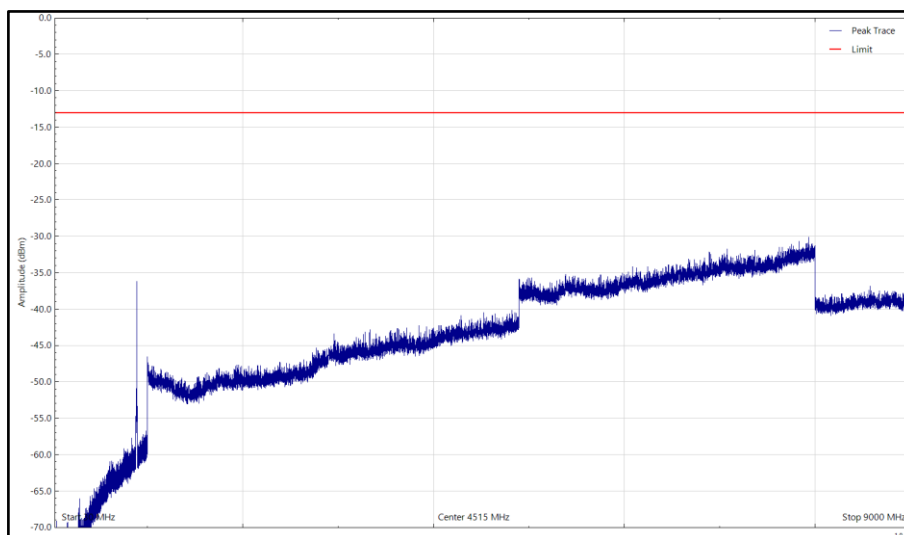

Top - LTE&NB-IoT - B5_BW15MHz, 886.5MHz, 30 MHz to 9 GHz, Horizontal (Peak)

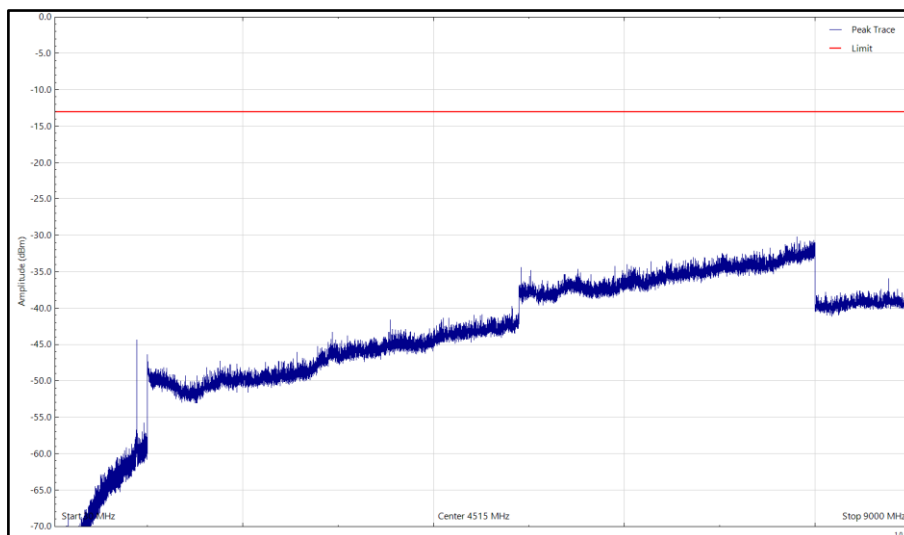


Top - LTE&NB-IoT - B5_BW15MHz, 886.5MHz, 30 MHz to 9 GHz, Vertical (Peak)




Frequency (MHz)	Level (dBm)	Limit (dBm)	Margin (dB)	Detector	Angle (°)	Height (cm)	Polarisation
*							

Top - LTE&NB-IoT - B5_BW20MHz, 884.0MHz, 30 MHz to 9 GHz

*No emissions found within 6 dB of the limit.

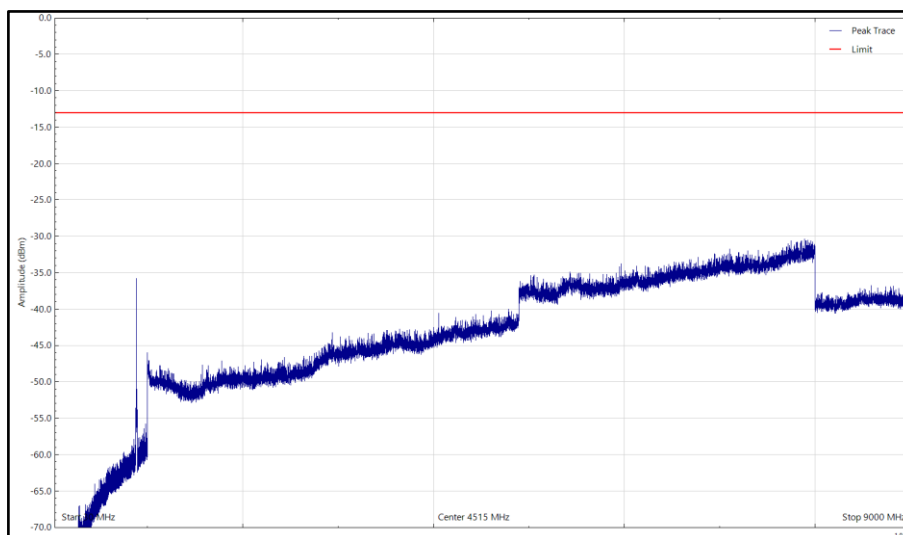

Top - LTE&NB-IoT - B5_BW20MHz, 884.0MHz, 30 MHz to 9 GHz, Horizontal (Peak)

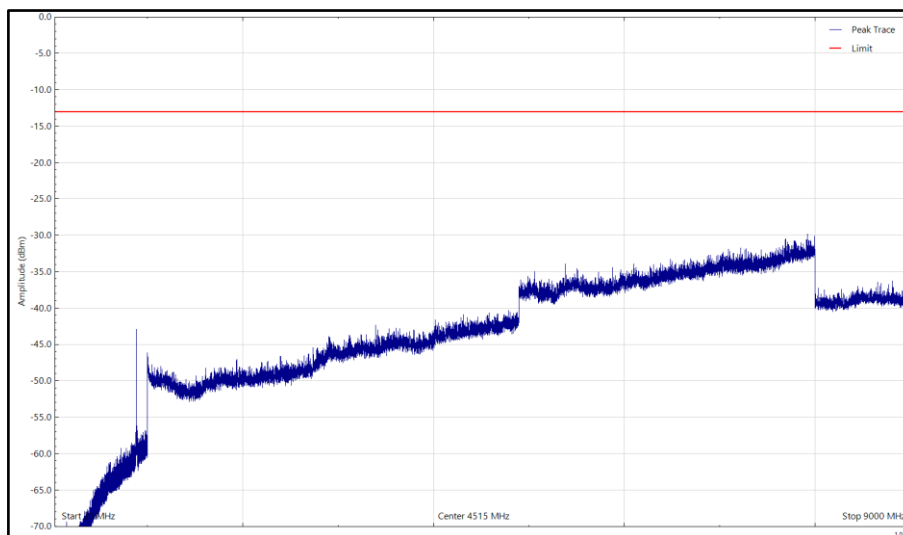

Top - LTE&NB-IoT - B5_BW20MHz, 884.0MHz, 30 MHz to 9 GHz, Vertical (Peak)

Limit	-13dBm
-------	--------



SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Maximum Peak Output Power and Peak to Average Ratio - Conducted					
Hygrometer	PCE Instruments	PCE-THB-40	5475	12	25-Apr-2023
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
Analyser	Keysight	N9030A	4654	12	24-Nov-2022
Power Supply	Farnell	H60-25	1092	-	OP-MON
Multimeter	Fluke	177	3833	12	16-Dec-2022
Attenuator	Weinschel	48-20-43-LIM	5133	12	02-Dec-2022
Attenuator	Weinschel	48-30-43-LIM	5135	12	20-Aug-2023
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	24-Feb-2023
Calibration kit	Rohde & Schwarz	ZV-Z55	4368	12	24-Feb-2023
Occupied Bandwidth					
Hygrometer	PCE Instruments	PCE-THB-40	5475	12	25-Apr-2023
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
Analyser	Keysight	N9030A	4654	12	24-Nov-2022
Power Supply	Farnell	H60-25	1092	-	OP-MON
Multimeter	Fluke	177	3833	12	16-Dec-2022
Attenuator	Weinschel	48-20-43-LIM	5133	12	02-Dec-2022
Attenuator	Weinschel	48-30-43-LIM	5135	12	20-Aug-2023
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	24-Feb-2023
Calibration kit	Rohde & Schwarz	ZV-Z55	4368	12	24-Feb-2023
Band Edge					
Hygrometer	PCE Instruments	PCE-THB-40	5475	12	25-Apr-2023
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
Analyser	Keysight	N9030A	4654	12	24-Nov-2022
Power Supply	Farnell	H60-25	1092	-	OP-MON
Multimeter	Fluke	177	3833	12	16-Dec-2022
Attenuator	Weinschel	48-20-43-LIM	5133	12	02-Dec-2022
Attenuator	Weinschel	48-30-43-LIM	5135	12	20-Aug-2023
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	24-Feb-2023
Calibration kit	Rohde & Schwarz	ZV-Z55	4368	12	24-Feb-2023
Transmitter Spurious Emissions					
Hygrometer	PCE Instruments	PCE-THB-40	5475	12	25-Apr-2023
Frequency Standard	Spectracom	SecureSync 1200-0408-0601	4393	6	01-Feb-2023
Analyser	Keysight	N9030A	4654	12	24-Nov-2022



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Power Supply	Farnell	H60-25	1092	-	OP-MON
Multimeter	Fluke	177	3833	12	16-Dec-2022
Attenuator	Weinschel	48-20-43-LIM	5133	12	02-Dec-2022
Attenuator	Weinschel	48-30-43-LIM	5135	12	20-Aug-2023
Network Analyser	Rohde & Schwarz	ZVA 40	3548	12	24-Feb-2023
Calibration kit	Rohde & Schwarz	ZV-Z55	4368	12	24-Feb-2023
HPF	Mini-Circuits	NHP 1000+	5260	12	20-Aug-2023
Radiated Emissions					
True RMS Multimeter	Fluke	79 Series III	411	12	13-Oct-2022
Power Supply (60V-50A)	Farnell	H 60/50	1056	-	TU
Screened Room (5)	Rainford	Rainford	1545	36	15-Apr-2024
Turntable Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Mast Controller	Maturo GmbH	NCD	4810	-	TU
Tilt Antenna Mast	Maturo GmbH	TAM 4.0-P	4811	-	TU
Antenna (DRG 1-10.5GHz)	Schwarzbeck	BBHA9120B	4848	12	28-May-2023
Cable (SMA to SMA, 2 m)	Junkosha	MWX221-02000AMSAMS/A	5517	12	12-Apr-2023
Cable (N-Type to N-Type, 8 m)	Junkosha	MWX221-08000NMSNMS/B	5520	12	24-Mar-2023
EMI Test Receiver	Rohde & Schwarz	ESW44	5527	12	28-Apr-2023
Hygrometer	Rotronic	Hygropalm	2404	12	18-Jul-2023
TRILOG Super Broadband Test Antenna	Schwarzbeck	VULB 9168	5942	24	03-Feb-2024
Attenuator 4dB	Pasternack	PE7074-4	6204	24	16-Jul-2024
Radiated Emissions (15-17-Nov-2022 only)					
Turntable	Maturo GmbH	TT1.5SI-2t/894/27991119	5614		TU
Chamber 12	MVG	EMC-3	5621		11-Aug-2023
Mast	Maturo GmbH	TAM 4.0-P	5613		TU
Controller	Maturo GmbH	NCD/498/2799.01	5612		TU
Coaxial cable	Teledyne	PR90-088-8MTR	5450		23-Apr-2023
Coaxial cable	Rhophase	3PS-1801A-2000-3PS	4113		27-Jan-2023
DRG Horn	Teseq	HLA	5616		27-Jul-2024
Power Supply	Farnell	H 60/50	1056		TU
Hygrometer	PCE Instruments	PCE-THB-40	5472		25-Mar-2023
Test Receiver	Rohde & Schwarz	ESU40	3506		25-Mar-2023

TU – Traceability Unscheduled

N/A – Not Applicable

O/P Mon – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Conducted Maximum Peak Output Power	9 kHz to 40 GHz Amplitude	± 1.0 dB
Conducted Emissions	9 kHz to 40 GHz Amplitude	± 3.5 dB
Occupied Bandwidth	10 MHz Bandwidth	± 16.7 kHz
	15 MHz Bandwidth	
	20 MHz Bandwidth	
Band Edge	< 3.6 GHz Amplitude	± 0.6 dB
Radiated Spurious Emissions	30 MHz to 1 GHz	± 5.2 dB
	1 GHz to 40 GHz	± 6.3 dB

Measurement Uncertainty Decision Rule

Determination of conformity with the specification limits is based on the results of the compliance measurement and does not take into account measurement instrumentation uncertainty as defined in ANSI C63.26:2015 Clause 1.3.

Risk: The uncertainty of measurement about the measured result is negligible with regard to the final pass/fail decision. The measurement result can be directly compared with the test limit to determine conformance with the requirement (compare IEC Guide 115). The level of risk to falsely accept and falsely reject items is further described in ILAC-G8



3.3 MEASUREMENT SOFTWARE USED

List of measurement software versions used for testing.

Instrument/Software	Manufacturer	Type No.	TE No.	Software Version
PXA Signal Analyser	Keysight	N9030A	4654	A 22.08
HP-VEE Software	TUV SUD	HP_VEE	N/A	V3.29
eMx	TUV SUD	N/A	N/A	V3.1.4



SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

© 2022 TÜV SÜD
TÜV SÜD

Postal Address :Octagon House, Concorde Way, Fareham, Hampshire, UK, PO15 5RL



ANNEX A

MODULE LIST



Configuration A			
Product	Product No	R-State	Serial No
Radio 4449	KRC 161 749/1	R1K	B070671229
Software Version:	CXP9013268/15	Revision:	R89MU15