



FCC PART 15, SUBPART C ISED C RSS-247, ISSUE 3, AUGUST 2023



TEST REPORT

For

Roku, Inc.

1173 Coleman Ave
San Jose, CA 95110, USA

FCC ID: TC2-R1050
IC: 5959A-R1048

Report Type: Original Report	Product Type: Streaming Player
Prepared By: Libass Thiaw RF Test Engineer	
Report Number: R2311164-247	
Report Date: 2024-04-16	
Reviewed By: Christian McCaig RF Lead Engineer	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	



Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This test report shall not be used by the customer to claim product certification, approval, or endorsement by A2LA or any agency of the United States Government or any foreign government.

* This test report may contain data and test methods that are not covered by BACL's scope of accreditation as of the test report date shown above. These items are marked within the test report text with an asterisk "*"

TABLE OF CONTENTS

1	GENERAL DESCRIPTION	5
1.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2	MECHANICAL DESCRIPTION OF EUT	5
1.3	OBJECTIVE	5
1.4	RELATED SUBMITTAL(S)/GRANT(S).....	5
1.5	TEST METHODOLOGY	6
1.6	MEASUREMENT UNCERTAINTY	6
1.7	TEST FACILITY REGISTRATIONS.....	6
1.8	TEST FACILITY ACCREDITATIONS	7
2	SYSTEM TEST CONFIGURATION	9
2.1	JUSTIFICATION	9
2.2	EUT EXERCISE SOFTWARE	9
2.3	DUTY CYCLE CORRECTION FACTOR	11
2.4	LOCAL SUPPORT EQUIPMENT	12
2.5	REMOTE SUPPORT EQUIPMENT	12
2.6	POWER SUPPLY AND LINE FILTERS	12
2.7	INTERFACE PORTS AND CABLING.....	12
3	SUMMARY OF TEST RESULTS.....	13
4	FCC §15.203 & ISEDC RSS-GEN §6.8 – ANTENNA REQUIREMENTS.....	14
4.1	APPLICABLE STANDARDS	14
4.2	ANTENNA DESCRIPTION.....	15
5	FCC §2.1091, FCC §15.247(I) & ISEDC RSS-102 – RF EXPOSURE	16
5.1	APPLICABLE STANDARDS	16
5.2	MPE PREDICTION	17
5.3	RF EXPOSURE EVALUATION FOR FCC.....	18
5.4	RF EXPOSURE EVALUATION EXEMPTION FOR IC	19
6	FCC §15.207 & ISEDC RSS-GEN §8.8 – AC LINE CONDUCTED EMISSIONS.....	20
6.1	APPLICABLE STANDARDS	20
6.2	TEST SETUP.....	20
6.3	TEST PROCEDURE	20
6.4	CORRECTED AMPLITUDE & MARGIN CALCULATION	21
6.5	TEST SETUP BLOCK DIAGRAM	21
6.6	TEST EQUIPMENT LIST AND DETAILS.....	22
6.7	TEST ENVIRONMENTAL CONDITIONS	22
6.8	SUMMARY OF TEST RESULTS	22
6.9	CONDUCTED EMISSIONS TEST PLOTS AND DATA.....	23
7	FCC §15.35(B), §15.205, §15.209, §15.247(D) & ISEDC RSS-247 §5.5, RSS-GEN §8.9, §8.10 – SPURIOUS RADIATED EMISSIONS	25
7.1	APPLICABLE STANDARDS	25
7.2	TEST SETUP.....	28
7.3	TEST PROCEDURE	28
7.4	CORRECTED AMPLITUDE AND MARGIN CALCULATION	29
7.5	TEST SETUP BLOCK DIAGRAM	30
7.6	TEST EQUIPMENT LIST AND DETAILS.....	31
7.7	TEST ENVIRONMENTAL CONDITIONS	32
7.8	SUMMARY OF TEST RESULTS	32
7.9	RADIATED EMISSIONS TEST RESULTS.....	33
8	FCC §15.247(A) (2) & ISEDC RSS-247 §5.2, RSS-GEN §6.7 – EMISSION BANDWIDTH	60
8.1	APPLICABLE STANDARDS	60
8.2	MEASUREMENT PROCEDURE.....	60

8.3	TEST SETUP BLOCK DIAGRAM	62
8.4	TEST EQUIPMENT LIST AND DETAILS.....	62
8.5	TEST ENVIRONMENTAL CONDITIONS	62
8.6	TEST RESULTS	63
9	FCC §15.247(B)(3) & ISEDC RSS-247 §5.4 – MAXIMUM OUTPUT POWER.....	64
9.1	APPLICABLE STANDARDS	64
9.2	MEASUREMENT PROCEDURE.....	64
9.3	TEST SETUP BLOCK DIAGRAM	65
9.4	TEST EQUIPMENT LIST AND DETAILS.....	65
9.5	TEST ENVIRONMENTAL CONDITIONS	65
9.6	TEST RESULTS	66
10	FCC §15.247(E) & ISEDC RSS-247 §5.2(2) – PEAK POWER SPECTRAL DENSITY	68
10.1	APPLICABLE STANDARDS	68
10.2	MEASUREMENT PROCEDURE.....	68
10.3	TEST SETUP BLOCK DIAGRAM	69
10.4	TEST EQUIPMENT LIST AND DETAILS.....	69
10.5	TEST ENVIRONMENTAL CONDITIONS	69
10.6	TEST RESULTS	70
11	FCC §15.247(D) & ISEDC RSS-247 §5.5 – SPURIOUS EMISSIONS AT ANTENNA TERMINAL AND 100 KHZ BAND EDGES	72
11.1	APPLICABLE STANDARDS	72
11.2	MEASUREMENT PROCEDURE.....	72
11.3	TEST SETUP BLOCK DIAGRAM	72
11.4	TEST EQUIPMENT LIST AND DETAILS.....	73
11.5	TEST ENVIRONMENTAL CONDITIONS	73
11.6	TEST RESULTS	73
12	APPENDIX A (NORMATIVE) – EUT TEST SETUP PHOTOGRAPHS.....	74
13	APPENDIX B (NORMATIVE) – EUT EXTERNAL PHOTOGRAPHS.....	75
14	APPENDIX C (NORMATIVE) – EUT INTERNAL PHOTOGRAPHS	76
15	APPENDIX D (NORMATIVE) – A2LA ELECTRICAL TESTING CERTIFICATE.....	77

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R2311164-247	Original Report	2024-04-16

1 General Description

1.1 Product Description for Equipment Under Test (EUT)

This test report is prepared on behalf of *Roku, Inc.*, and their product model: 4850X, FCC ID: TC2-R1050, IC: 5959A-R1048, the “EUT” as referred to in this report. The EUT has 2.4 GHz/ 5 GHz Wi-Fi and 2.4 GHz BLE/BTC capabilities.

Model Number	4850X
FCC ID	TC2-R1050
IC	5959A-R1048
Radio Type	2.4Wi-Fi, BLE
Operating Frequency	2400~2480 MHz,
Modulation	802.11b/g/n20/n40/ax20/ax40, GFSK (BLE)

1.2 Mechanical Description of EUT

The UUT measures approximately 12.5cm (L) x 12.5cm (W) x 2.2cm (H) and weighs approximately 0.15 kg.

The data gathered was from a production sample provided by Roku, Inc. with S/N: S0VT33CTFXAH

1.3 Objective

This report is prepared on behalf of *Roku, Inc.* in accordance with Part 2, Subpart J, and Part 15, Subpart C of the Federal Communication Commission’s rules and ISED RSS-247 Issue 3, August 2023.

The objective is to determine compliance with FCC Part 15.247 and ISED RSS-247 for Antenna Requirement, RF Exposure, AC Line Conducted Emissions, Radiated & Conducted Spurious Emissions, Emission Bandwidth, Maximum Output Power, Peak Power Spectral Density, and 100 kHz Band Edges.

In order to determine compliance, the manufacturer or a contracted laboratory makes measurements and takes the necessary steps to ensure that the equipment complies with the appropriate technical standards.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product may be which result in lowering the immunity should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different line filter, different power supply, harnessing and/or I/O cable changes, etc.).

1.4 Related Submittal(s)/Grant(s)

FCC Part 15, Subpart C, Equipment Class: DSS with FCC ID: TC2-R1050, IC: 5959A-R1048

FCC Part 15, Subpart E, Equipment Class: NII with FCC ID: TC2-R1050, IC: 5959A-R1048

1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247.

1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Parameter	Measurement uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±0.57 dB
Power Spectral Density, conducted	±1.48 dB
Unwanted Emissions, conducted	±1.57 dB
All emissions, radiated	±4.0 dB
AC power line Conducted Emission	±2.0 dB
Temperature	±2°C
Humidity	±5%
DC and low frequency voltages	±1.0%
Time	±2%
Duty Cycle	±3%

1.7 Test Facility Registrations

BACLs test facilities that are used to perform Radiated and Conducted Emissions tests are currently recognized by the Federal Communications Commission as Accredited with NIST Designation Number US1129.

BACL's test facilities that are used to perform Radiated and Conducted Emissions tests are currently registered with Industry Canada under Registration Numbers: 3062A-1, 3062A-2, and 3062A-3.

BACL is a Chinese Taipei Bureau of Standards Metrology and Inspection (BSMI) validated Conformity Assessment Body (CAB), under Appendix B, Phase I Procedures of the APEC Mutual Recognition Arrangement (MRA). BACL's BSMI Lab Code Number is: SL2-IN-E-1002R

BACL's test facilities that are used to perform AC Line Conducted Emissions, Telecommunications Line Conducted Emissions, Radiated Emissions from 30 MHz to 1 GHz, and Radiated Emissions from 1 GHz to 6 GHz are currently recognized as Accredited in accordance with the Voluntary Control Council for Interference [VCCI] Article 15 procedures under Registration Number A-0027.

1.8 Test Facility Accreditations

Bay Area Compliance Laboratories Corp. (BACL) is:

A- An independent, 3rd-Party, Commercial Test Laboratory accredited to ISO/IEC 17025:2017 by A2LA (Test Laboratory Accreditation Certificate Number 3297.02), in the fields of: Electromagnetic Compatibility and Telecommunications. Unless noted by an Asterisk (*) in the Compliance Matrix (See Section 3 of this Test Report), BACL's ISO/IEC 17025:2017 Scope of Accreditation includes all of the Test Method Standards and/or the Product Family Standards detailed in this Test Report..

BACL's ISO/IEC 17025:2017 Scope of Accreditation includes a comprehensive suite of EMC Emissions, EMC Immunity, Radio, RF Exposure, Safety and wireline Telecommunications test methods applicable to a wide range of product categories. These product categories include Central Office Telecommunications Equipment [including NEBS - Network Equipment Building Systems], Unlicensed and Licensed Wireless and RF devices, Information Technology Equipment (ITE); Telecommunications Terminal Equipment (TTE); Medical Electrical Equipment; Industrial, Scientific and Medical Test Equipment; Professional Audio and Video Equipment; Industrial and Scientific Instruments and Laboratory Apparatus; Cable Distribution Systems, and Energy Efficient Lighting.

B- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.03) to certify

- For the USA (Federal Communications Commission):

- 1- All Unlicensed radio frequency devices within FCC Scopes A1, A2, A3, and A4;
- 2- All Licensed radio frequency devices within FCC Scopes B1, B2, B3, and B4;
- 3- All Telephone Terminal Equipment within FCC Scope C.

- For the Canada (Industry Canada):

- 1 All Scope 1-Licence-Exempt Radio Frequency Devices;
- 2 All Scope 2-Licensed Personal Mobile Radio Services;
- 3 All Scope 3-Licensed General Mobile & Fixed Radio Services;
- 4 All Scope 4-Licensed Maritime & Aviation Radio Services;
- 5 All Scope 5-Licensed Fixed Microwave Radio Services
- 6 All Broadcasting Technical Standards (BETS) in the Category I Equipment Standards List.

- For Singapore (Info-Communications Development Authority (IDA)):

- 1 All Line Terminal Equipment: All Technical Specifications for Line Terminal Equipment – Table 1 of IDA MRA Recognition Scheme: 2011, Annex 2
2. All Radio-Communication Equipment: All Technical Specifications for Radio-Communication Equipment – Table 2 of IDA MRA Recognition Scheme: 2011, Annex 2

- For the Hong Kong Special Administrative Region:

- 1 All Radio Equipment, per KHCA 10XX-series Specifications;
- 2 All GMDSS Marine Radio Equipment, per HKCA 12XX-series Specifications;
- 3 All Fixed Network Equipment, per HKCA 20XX-series Specifications.

- For Japan:

- 1 MIC Telecommunication Business Law (Terminal Equipment):
 - All Scope A1 - Terminal Equipment for the Purpose of Calls;
 - All Scope A2 - Other Terminal Equipment
- 2 Radio Law (Radio Equipment):
 - All Scope B1 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 1 of the Radio Law
 - All Scope B2 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 2 of the Radio Law
 - All Scope B3 - Specified Radio Equipment specified in Article 38-2-2, paragraph 1, item 3 of the Radio Law

C- A Product Certification Body accredited to ISO/IEC 17065:2012 by A2LA (Product Certification Body Accreditation Certificate Number 3297.01) to certify Products to USA's Environmental Protection Agency (EPA) ENERGY STAR Product Specifications for:

- 1 Electronics and Office Equipment:
 - for Telephony (ver. 3.0)
 - for Audio/Video (ver. 3.0)
 - for Battery Charging Systems (ver. 1.1)
 - for Set-top Boxes & Cable Boxes (ver. 4.1)
 - for Televisions (ver. 6.1)
 - for Computers (ver. 6.0)
 - for Displays (ver. 6.0)
 - for Imaging Equipment (ver. 2.0)
 - for Computer Servers (ver. 2.0)
- 2 Commercial Food Service Equipment
 - for Commercial Dishwashers (ver. 2.0)
 - for Commercial Ice Machines (ver. 2.0)
 - for Commercial Ovens (ver. 2.1)
 - for Commercial Refrigerators and Freezers
- 3 Lighting Products
 - For Decorative Light Strings (ver. 1.5)
 - For Luminaires (including sub-components) and Lamps (ver. 1.2)
 - For Compact Fluorescent Lamps (CFLs) (ver. 4.3)
 - For Integral LED Lamps (ver. 1.4)
- 4 Heating, Ventilation, and AC Products
 - for Residential Ceiling Fans (ver. 3.0)
 - for Residential Ventilating Fans (ver. 3.2)
- 5 Other
 - For Water Coolers (ver. 3.0)

D- A NIST Designated Phase-I and Phase-II Conformity Assessment Body (CAB) for the following economies and regulatory authorities under the terms of the stated MRAs/Treaties:

- Australia: ACMA (Australian Communication and Media Authority) – APEC Tel MRA -Phase I;
- Canada: (Innovation, Science and Economic development Canada - ISED) Foreign Certification Body – FCB – APEC Tel MRA -Phase I & Phase II;
- Chinese Taipei (Republic of China – Taiwan):
 - o BSMI (Bureau of Standards, Metrology and Inspection) APEC Tel MRA -Phase I;
 - o NCC (National Communications Commission) APEC Tel MRA -Phase I;
- European Union:
 - o EMC Directive 2014/30/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Radio Equipment (RE) Directive 2014/53/EU US-EU EMC & Telecom MRA CAB (NB)
 - o Low Voltage Directive (LVD) 2014/35/EU
- Hong Kong Special Administrative Region: (Office of the Telecommunications Authority – OFTA) APEC Tel MRA -Phase I & Phase II
- Israel – US-Israel MRA Phase I
- Republic of Korea (Ministry of Communications - Radio Research Laboratory) APEC Tel MRA -Phase I
- Singapore: (Infocomm Media Development Authority - IMDA) APEC Tel MRA -Phase I & Phase II;
- Japan: VCCI - Voluntary Control Council for Interference US-Japan Telecom Treaty VCCI Side Letter-
- USA:
 - o ENERGY STAR Recognized Test Laboratory – US EPA
 - o Telecommunications Certification Body (TCB) – US FCC;
 - o Nationally Recognized Test Laboratory (NRTL) – US OSHA
- Vietnam: APEC Tel MRA -Phase I;

2 System Test Configuration

2.1 Justification

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v05r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

2.2 EUT Exercise Software

The exercising software used during testing was “Tera Term”, the software is compliant with the standard requirements being tested against.

Radio	Frequency	Configuration	Power Setting
2.4 GHz Wi-Fi	2412	802.11b	20.0
	2437		20.0
	2462		18.0
	2412	802.11g	14.0
	2437		20.0
	2462		14.0
	2412	802.11n20	15.0
	2437		20.0
	2462		12.0
	2412	802.11n40	12.0
	2437		20.0
	2452		12.0
	2412	802.11ax20	15.0
	2437		20.0
	2462		16.0
	2422	802.11ax40	11.5
	2437		16.0
	2452		9.00
2.4 GHz BLE	2402	1 Mbps	Default
	2440		Default
	2480		Default
	2402	2 Mbps	Default
	2440		Default
	2480		Default

Data rates used:

802.11b: 1Mbps

802.11g: 6 Mbps

802.11n: HTMCS0

802.11ax: HE1MCS0

Note: The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

2.3 Duty Cycle Correction Factor

According to KDB 558074 D01 DTS Meas Guidance v05r02 section 6.0:

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%). When continuous operation cannot be realized, then the use of sweep triggering/signal gating techniques can be utilized to ensure that measurements are made only during transmissions at the maximum power control level. Such sweep triggering/signal gating techniques will require knowledge of the minimum transmission duration (T) over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation. Sweep triggering/signal gating techniques can then be used if the measurement/sweep time of the analyzer can be set such that it does not exceed T at any time that data is being acquired (i.e., no transmitter off-time is to be considered).

Radio	Radio Mode	On Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
2.4 GHz Wi-Fi	802.11b	-	-	100	-
	802.11g	1.526	1.570	97	0.1320
	802.11n20	1.253	1.279	98	-
	802.11n40	0.5920	0.6370	93	0.3150
	802.11ax20	0.9840	0.9928	99	-
	802.11ax40	0.5180	0.5275	98	-
2.4 GHz BLE	1Mbps	0.3930	0.626	63	2.010
	2Mbps	0.2080	0.625	33	4.810

Note: Duty Cycle Correction Factor = $10 \cdot \log(1/\text{duty cycle})$

Please refer to the plots in Annex D for detailed test results.

2.4 Local Support Equipment

Manufacturer	Description	Model	Serial Number
Dell	Laptop	Latitude E7440	-

2.5 Remote Support Equipment

Manufacturer	Description	Model	Serial Number
Roku, Inc.	Debug Board	-	-

2.6 Power Supply and Line Filters

Manufacturer	Description	Model	Serial Number
Roku, Inc.	AC Adaptor	WAN002	-

2.7 Interface Ports and Cabling

Cable Description	Length (m)	From	To
USB Cable	< 1 m	Laptop	EUT
RF Cable	< 1 m	EUT	PSA

3 Summary of Test Results

FCC & ISEDC Rules	Description of Test	Results
FCC §15.203 ISEDC RSS-Gen §6.8	Antenna Requirements	Compliant
FCC §2.1091, §15.247(i) ISEDC RSS-102	RF Exposure	Compliant
FCC §15.207 ISEDC RSS-Gen §8.8	AC Line Conducted Emissions	Compliant
FCC §2.1053, §15.35(b), §15.205, §15.209, §15.247(d) ISEDC RSS-247 §5.5 ISEDC RSS-Gen §8.9, §8.10	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(2) ISEDC RSS-247 §5.2 RSS-Gen §6.7	6 dB & 99% Emission Bandwidth	Compliant
FCC §15.247(b)(3) ISEDC RSS-247 §5.4	Maximum Output Power	Compliant
FCC §15.247(e) ISEDC RSS-247 §5.2(2)	Peak Power Spectral Density	Compliant
FCC §2.1051, §15.247 (d) ISEDC RSS-247 §5.5	Spurious Emissions at Antenna Port	Compliant
FCC §2.1051, §15.247(d) ISEDC RSS-247 §5.5	100 kHz Bandwidth of Frequency Band Edges	Compliant

BACL is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Information provided by the customer, e.g., antenna gain, can affect the validity of results.

4 FCC §15.203 & ISEDC RSS-Gen §6.8 – Antenna Requirements

4.1 Applicable Standards

According to FCC §15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC §15.247 (b) (4), if transmitting antennas of directional gain greater than 6 dBi are used the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to ISEDC RSS-Gen §6.8: Transmitter Antenna

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotopically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For license-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

4.2 Antenna Description

External/Internal/ Integral	Antenna Usage	Antenna Type	Frequency Range (MHz)	Maximum Antenna Gain (dBi)
Internal	2.4 GHz Wi-Fi Ant A	Stamped metal	2412-2462	2.5
Internal	2.4 GHz Wi-Fi Ant B		2412-2462	3.1
Internal	2.4 GHz BT Ant		2402-2480	2.6

5 FCC §2.1091, FCC §15.247(i) & ISEDC RSS-102 – RF Exposure

5.1 Applicable Standards

According to FCC §15.247(i) and §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to KDB 447 498 Section (7.2), "simultaneous transmission of MPE test exclusion applies when the sum of the MPE ratios for all simultaneous transmitting antennas incorporated in a host device, based on calculated or measured field strengths or power density, is ≤ 1.0 . The MPE ratio of each antenna is determined at the minimum *test separation distance* required by the operating configurations and exposure conditions of the host device, according to the ratio of field strengths or power density to MPE limit, at the test frequency.

Limits for General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	* (100)	30
1.34-30	824/f	2.19/f	* (180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

Where: f = frequency in MHz

* = Plane-wave equivalent power density

Before equipment certification is granted, the procedure of IC RSS-102 must be followed concerning the exposure of humans to RF field.

According to ISED RSS-102 Issue 5:

2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz⁶ and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

5.2 MPE Prediction

Predication of MPE limit at a given distance, Equation from OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S = power density

P = power input to antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the center of radiation of the antenna

5.3 RF exposure evaluation for FCC

Worst Case: 802.11n40, 2437 MHz

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>22.66</u>
<u>Maximum output power at antenna input terminal (mW):</u>	<u>184.5</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2437</u>
<u>Maximum Directional Antenna Gain, typical (dBi):</u>	<u>5.82</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>3.82</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.14</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement FCC MPE limit for uncontrolled exposure. The maximum power density at the distance of 20cm is 0.14 mW/cm². Limit is 1.0 mW/cm².

Worst Case: BLE, 2402 MHz

<u>Maximum output power at antenna input terminal (dBm):</u>	<u>4.39</u>
<u>Maximum output power at antenna input terminal (mW):</u>	<u>2.75</u>
<u>Prediction distance (cm):</u>	<u>20</u>
<u>Prediction frequency (MHz):</u>	<u>2402</u>
<u>Maximum Directional Antenna Gain, typical (dBi):</u>	<u>2.6</u>
<u>Maximum Antenna Gain (numeric):</u>	<u>1.82</u>
<u>Power density of prediction frequency at 20.0 cm (mW/cm²):</u>	<u>0.001</u>
<u>FCC MPE limit for uncontrolled exposure at prediction frequency (mW/cm²):</u>	<u>1.0</u>

The device is compliant with the requirement FCC MPE limit for uncontrolled exposure. The maximum power density at the distance of 20cm is 0.001 mW/cm². Limit is 1.0 mW/cm².

Worst case colocation: BT ratio + 5Wifi ratio. $0.007/1 + 0.16/1 = 0.167 < 1$

Worst case colocation: BT ratio + 2.4Wifi ratio. $0.007/1 + 0.14/1 = 0.147 < 1$

5.4 RF exposure evaluation exemption for IC

Worst Case: 2412MHz frequency used for formula

Maximum EIRP power = 22.66dBm + 5.82 dBi = 28.48 dBm which is less than $1.31 \times 10^{-2} f^{0.6834} = 2.68 \text{ W} = 34.3 \text{ dBm}$

Therefore the RF exposure Evaluation is not required.

Worst Case: 2402MHz frequency used for formula

Maximum EIRP power = 4.39dBm + 2.6 dBi = 6.99 dBm which is less than $1.31 \times 10^{-2} f^{0.6834} = 2.68 \text{ W} = 34.3 \text{ dBm}$

Therefore the RF exposure Evaluation is not required.

Note: worst case overestimations made for antenna gain in order to show worst-case compliance.

6 FCC §15.207 & ISEDC RSS-Gen §8.8 – AC Line Conducted Emissions

6.1 Applicable Standards

As per FCC §15.207 and ISEDC RSS-Gen Section 8.8: Conducted limits

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note1}	56 to 46 ^{Note2}
0.5-5	56	46
5-30	60	50

Note1: Decreases with the logarithm of the frequency.

Note2: A linear average detector is required

6.2 Test Setup

The measurement was performed at shield room, using the setup per ANSI C63.10-2013 measurement procedure. The specification used were FCC §15.207 and ISEDC RSS-Gen §8.8 limits.

External I/O cables were draped along the edge of the test table and bundle when necessary.

The AC/DC power adapter of the EUT was connected with LISN-1 which provided 120 V / 60 Hz AC power.

6.3 Test Procedure

During the conducted emissions test, the power cord of the EUT host system was connected to the mains outlet of the LISN-1 and the power cords of support equipment were connected to LISN-2.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data were recorded in the peak, quasi-peak, and average detection mode. Quasi-Peak readings are distinguished with a “QP.” Average readings are distinguished with an “Ave”.

6.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Cable Loss (CL), the Attenuator Factor (Atten) to indicated Amplitude (Ai) reading. The basic equation is as follows:


$$CA = Ai + CL + \text{Atten}$$

For example, a corrected amplitude of 46.2 dBuV = Indicated Reading (32.5 dBuV) + Cable Loss (3.7 dB) + Attenuator (10 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

6.5 Test Setup Block Diagram

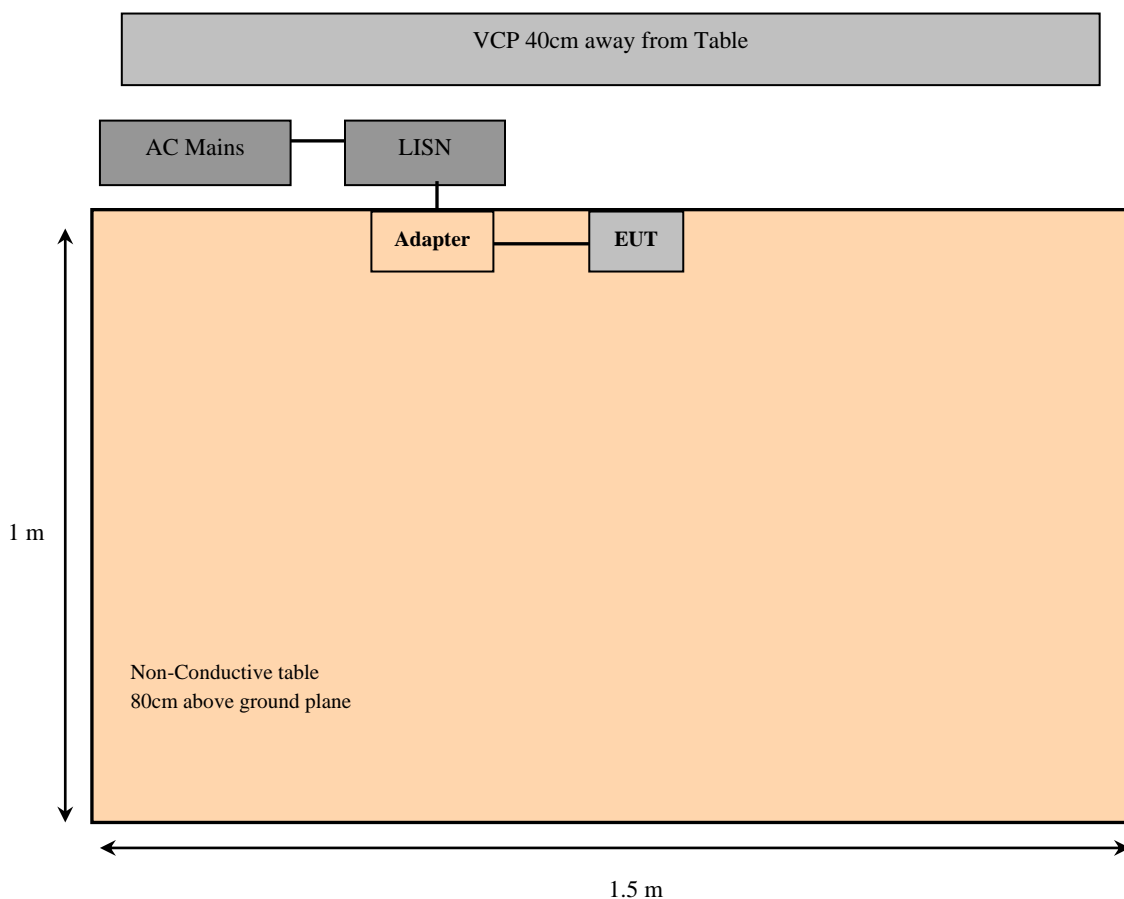

6.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
310	Rohde & Schwarz	Receiver, EMI Test	ESCI 1166.5950.03	100338	2023-05-11	1 year
680	Rohde & Schwarz	Impulse Limiter	ESH3-Z2	101964	2024-03-22	1 year
724	Solar Electronics Company	High Pass Filter	Type 7930-100	7930150202	2024-03-22	1 year
732	FCC	LISN	FCC-LISN-50-25-2-10-CISPR16	160129	2023-09-12	1 year
1425	Fairview Microwave	Micro-Coax Cable	FMC0101223-240	210241	2024-01-12	1 year
348	California Instruments	AC Power Source	5001ix-208	57079	Calibration not Required	Calibration not Required

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

6.7 Test Environmental Conditions

Temperature:	21.9 to 22.0°C
Relative Humidity:	49.6 to 50.4%
ATM Pressure:	101.9 kPa

The testing was performed by Libass Thiaw from 04-01-2024 in 5m chamber 3

6.8 Summary of Test Results

According to the recorded data in following table, the EUT complied with the FCC 15C and ISEDC RSS-Gen standard's conducted emissions limits, with the margin reading of:

Worst Mode


Worst Case – AC Line: 120 V, 60 Hz			
Margin (dB)	Frequency (MHz)	Conductor Mode (Hot/Neutral)	Range (MHz)
-11.66	0.165088	Hot	0.15 to 30

Please refer to the tables and plots in the next section for detailed test results.

6.9 Conducted Emissions Test Plots and Data


802.11b 2437MHz + BT colocation

AC Line: 120 V, 60 Hz – Hot Conductor

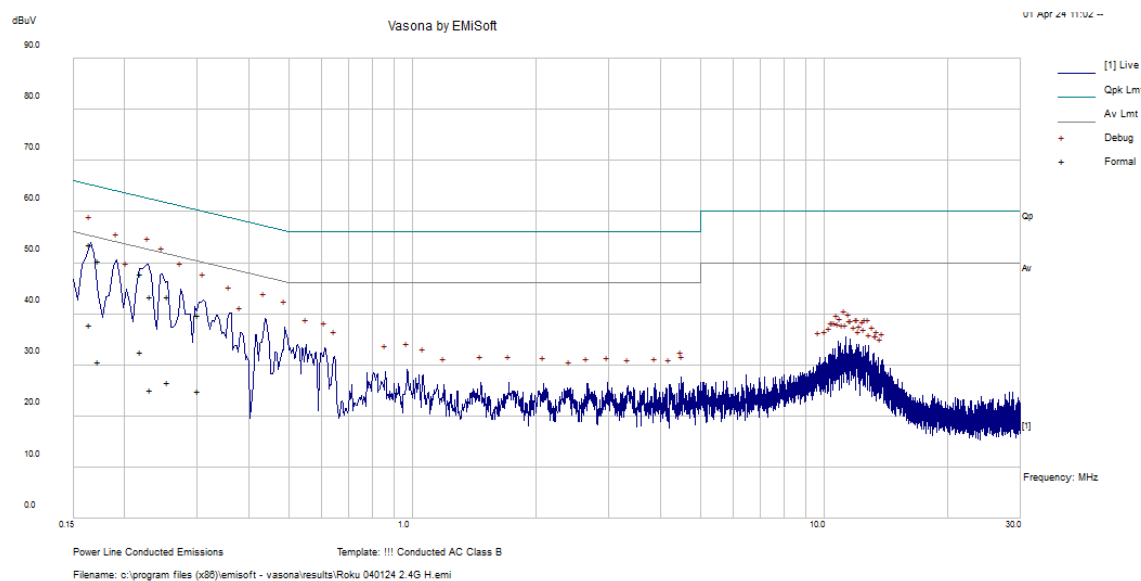

Frequency (MHz)	Ai. Reading (dBuV)	Correction Factor (dB)	Corrected Amplitude (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.165088	42.05	11.49	53.54	65.2	-11.66	QP
0.218876	36.77	11.11	47.87	62.86	-14.98	QP
0.173047	38.9	11.42	50.32	64.81	-14.49	QP
0.231647	32.36	11.05	43.41	62.39	-18.98	QP
0.255284	32.35	10.95	43.29	61.58	-18.28	QP
0.301797	28.98	10.78	39.76	60.19	-20.43	QP
0.165088	26.46	11.49	37.95	55.2	-17.25	Ave
0.218876	21.37	11.11	32.47	52.86	-20.38	Ave
0.173047	19.11	11.42	30.53	54.81	-24.28	Ave
0.231647	14.15	11.05	25.20	52.39	-27.19	Ave
0.255284	15.57	10.95	26.52	51.58	-25.06	Ave
0.301797	14.19	10.78	24.97	50.19	-25.22	Ave

AC Line (via AC/DC Adapter): 120 V, 60 Hz – Neutral Conductor

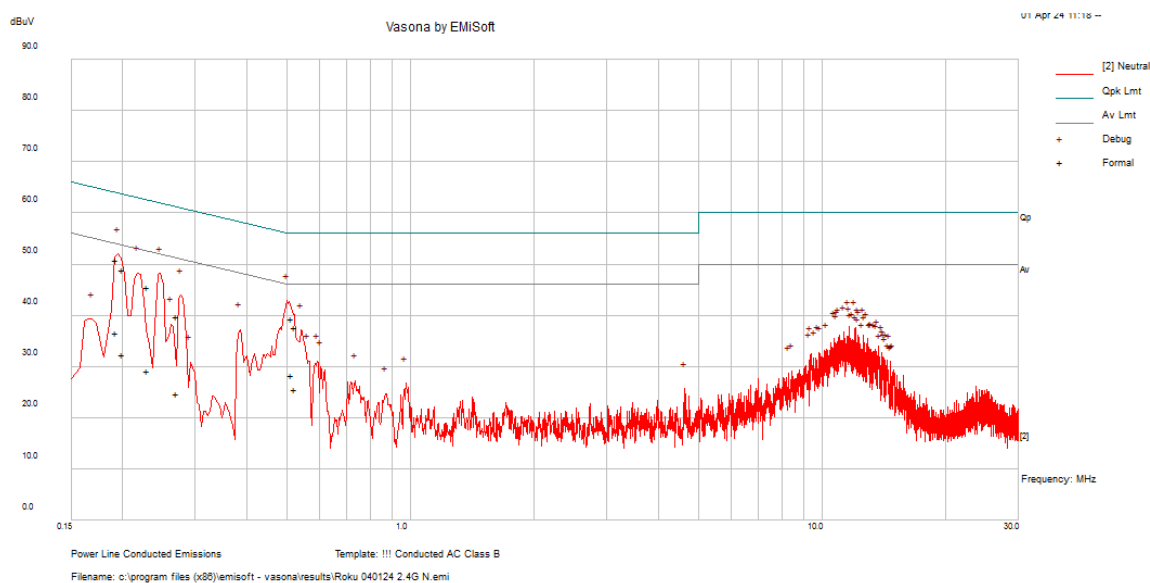

Frequency (MHz)	Ai. Reading (dBuV)	Correction Factor (dB)	Corrected Amplitude (dBμV)	Limit (dBμV)	Margin (dB)	Detector
0.192366	39.61	11.27	50.88	63.93	-13.05	QP
0.513055	28.60	10.69	39.29	56.00	-16.71	QP
0.229073	34.55	11.06	45.61	62.48	-16.87	QP
0.199365	37.61	11.22	48.83	63.64	-14.81	QP
0.270931	28.92	10.89	39.81	61.09	-21.28	QP
0.524042	26.97	10.68	37.65	56.00	-18.35	QP
0.192366	25.35	11.27	36.62	53.93	-17.31	Ave
0.513055	17.52	10.69	28.21	46.00	-17.79	Ave
0.229073	17.99	11.06	29.05	52.48	-23.43	Ave
0.199365	21.19	11.22	32.41	53.64	-21.23	Ave
0.270931	13.89	10.89	24.78	51.09	-26.31	Ave
0.524042	14.85	10.68	25.53	46.00	-20.47	Ave

7 FCC §15.35(b), §15.205, §15.209, §15.247(d) & ISEDC RSS-247 §5.5, RSS-Gen §8.9, §8.10 – Spurious Radiated Emissions

7.1 Applicable Standards

As per FCC §15.35(b): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.1905	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3332 – 3339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3345.8 – 3358	23.6 – 24.0
12.29 – 12.293	240 – 285	3600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC §15.247 (d),

in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per ISED RSS-247 §5.5,

in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

As per ISED RSS-Gen §8.9,

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field Strength (µV/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Field Strength (micro volts/meter)	Measurement Distance (meters)
9 – 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 – 1705 kHz	63.7/F (F in kHz)	30
1.705 – 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

As per ISED RSS-Gen §8.10(c),

Unwanted emissions that do not fall within the restricted frequency bands listed in table 7 shall comply either with the limits specified in the applicable RSS or with those specified in table 5 and table 6.

Table 7 – Restricted frequency bands^{Note 1}

MHz	MHz	GHz
0.090 – 0.110	149.9 – 150.05	9.0 – 9.2
0.495 – 0.505	156.52475 – 156.52525	9.3 – 9.5
2.1735 – 2.1905	156.7 – 156.9	10.6 – 12.7
3.020 – 3.026	162.0125 – 167.17	13.25 – 13.4
4.125 – 4.128	167.72 – 173.2	14.47 – 14.5
4.17725 – 4.17775	240 – 285	15.35 – 16.2
4.20725 – 4.20775	322 – 335.4	17.7 – 21.4
5.677 – 5.683	399.9 – 410	22.01 – 23.12
6.215 – 6.218	608 – 614	23.6 – 24.0
6.26775 – 6.26825	960 – 1427	31.2 – 31.8
6.31175 – 6.31225	1435 – 1626.5	36.43 – 36.5
8.291 – 8.294	1645.5 – 1646.5	Above 38.6
8.362 – 8.366	1660 – 1710	
8.37625 – 8.38675	1718.8 – 1722.2	
8.41425 – 8.41475	2200 – 2300	
12.29 – 12.293	2310 – 2390	
12.51975 – 12.52025	2483.5 – 2500	
12.57675 – 12.57725	2655 – 2900	
13.36 – 13.41	3260 – 3267	
16.42 – 16.423	3332 – 3339	
16.69475 – 16.69525	3345.8 – 3358	
16.80425 – 16.80475	3500 – 4400	
25.5 – 25.67	4500 – 5150	
37.5 – 38.25	5350 – 5460	
73 – 74.6	7250 – 7750	
74.8 – 75.2	8025 – 8500	
108 – 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

7.2 Test Setup

The radiated emissions tests were performed in the 5-meter chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC §15.247 and ISEDC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundled when necessary.

7.3 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The EUT was set 3 meter away from the testing antenna, which was varied from 1-4 meters, and the EUT was placed on a turntable, which was 0.8 meters and 1.5 meters above the ground plane for below and above 1000 MHz measurements, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna's polarity should be changed between horizontal and vertical.

The spectrum analyzer or receiver was set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 1MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz or 1/T / Sweep = Auto

7.4 Corrected Amplitude and Margin Calculation

For emissions below 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Correction Factor to the S.A. Reading. The basic equation is as follows:

$$CA = \text{S.A. Reading} + \text{Correction Factor}$$

For example, a corrected amplitude of 40.3 dBuV/m = S.A. Reading (32.5 dBuV) + Correction Factor (7.8 dB/m)

The Correction Factor is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) together. This calculation is done in the measurement software, and reported in the test result section. The basic equation is as follows:

$$\text{Correction Factor} = AF + CL + \text{Atten} - Ga$$

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

For emission above 1 GHz,

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + \text{Atten} - Ga$$


For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

7.5 Test Setup Block Diagram

30 MHz to 1 GHz

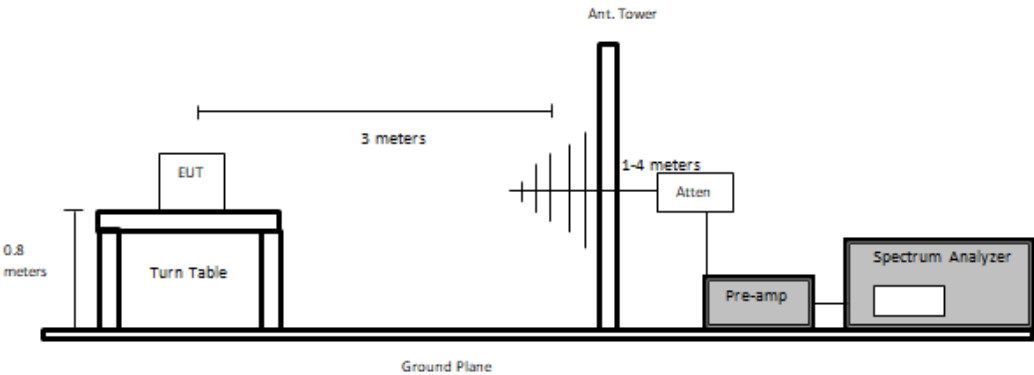

Above 1 GHz

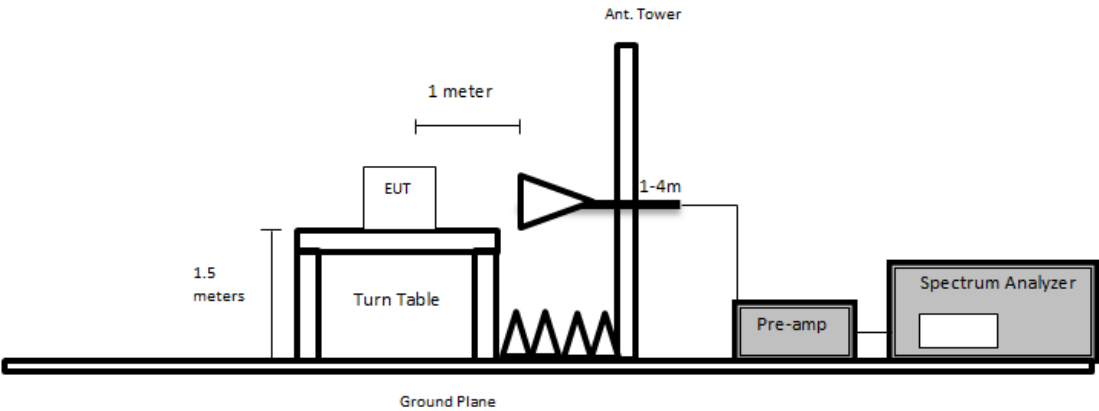

7.6 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
310	Rohde & Schwarz	EMI Test Receiver 9 KHZ to 3 GHZ	ESCI 1166.5950.03	100338	2023-05-11	1 year
624	Agilent	Spectrum Analyzer	E4446A	MY48250238	2023-05-12	1 year
327	Sunol Sciences	System Controller	SC110V	122303-1	N/R	N/R
1075	Sunol Sciences	Boresight Tower	TLT3	050119-7	N/R	N/R
1388	Sunol Sciences	Flush Mount Turntable	FM	112005-2	N/R	N/R
316	Sonoma Instruments	Preamplifier	317	260406	2023-09-26	6 months
321	Sunol Sciences	Biconilog Antenna	JB3	A020106-2; 1504	2023-12-18	2 years
1186	Pasternack	Coaxial Cable, RG214	PE3062- 1050CM	N/A	2023-10-03	6 months
1245	-	6dB Attenuator	PE7390-6	01182018A	2023-12-18	2 years
1246	Hewlet Packard	RF Limiter	11867A	01734	2023-04-13	1 year
1248	Pasternack	RG214 COAX Cable	PE3062	N/A	2023-10-04	6 months
1249	Time Microwave	LMR-400 Cable Dc-3 GHz	AE13684	2k80612-5 6fts	2023-10-09	6 months
658	HP/ Agilent	Pre Amplifier	8449B OPT HO2	3008A01103	2023-12-01	6 months
1192	ETS Lindgren	Horn Antenna	3117	00218973	2022-09-29	2 years
1247	Uti flex	Micro - Coax	N/A	N/A	2023-12-01	6 months
1353	RFMW	2.92mm 10ft RF Cable DC to 40 GHz	P1CA- 29M29M- F150-120	N/A	2023-01-24	13 months
672	Micro-Tronics	2.4-2.6 GHz Notch Filter	BRM50701	160	2023-03-09	1 year
91	Wisewave	Horn Antenna	ARH-4223-02	10555-02	2022-03-08	2 years
827	AH Systems	Preamplifier	PAM 1840 VH	170	2023-11-08	6 months
1329	Pasternack	2.92 mm short coaxial cable	PE360-12	N/A	2023-11-28	6 months

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 "A2LA Policy on Metrological Traceability".

7.7 Test Environmental Conditions

Temperature:	20 – 22.5°C
Relative Humidity:	55%
ATM Pressure:	101.85 kPa

The testing was performed by Arturo Reyes from 2024-01-18 to 2024-01-22, 2024-02-20, 2024-02-27, and 2024-03-04 to 2024-03-06 in 5m chamber 3.

7.8 Summary of Test Results

According to the data hereinafter, the EUT complied with the FCC Part 15.209, 15.247 and ISERC RSS-247 standards’ radiated emissions limits, and had the worst margin of:

Worst Case – Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Configuration
-1.17	30.00	Vertical	802.11b, 2437

Please refer to the tables and plots in the next section for detailed test results.


7.9 Radiated Emissions Test Results

Note: Pre-scans were performed on all shown configurations in order to determine worst-case results. Following this, a formal scan was performed on the worst-case detailed below


Note: worst-case performed on worst configs per modulation family. Both ports evaluated for Wifi configs.

1) 30 MHz – 1 GHz, Measured at 3 meters

Worst Case: GFSK(LE), 2440 MHz

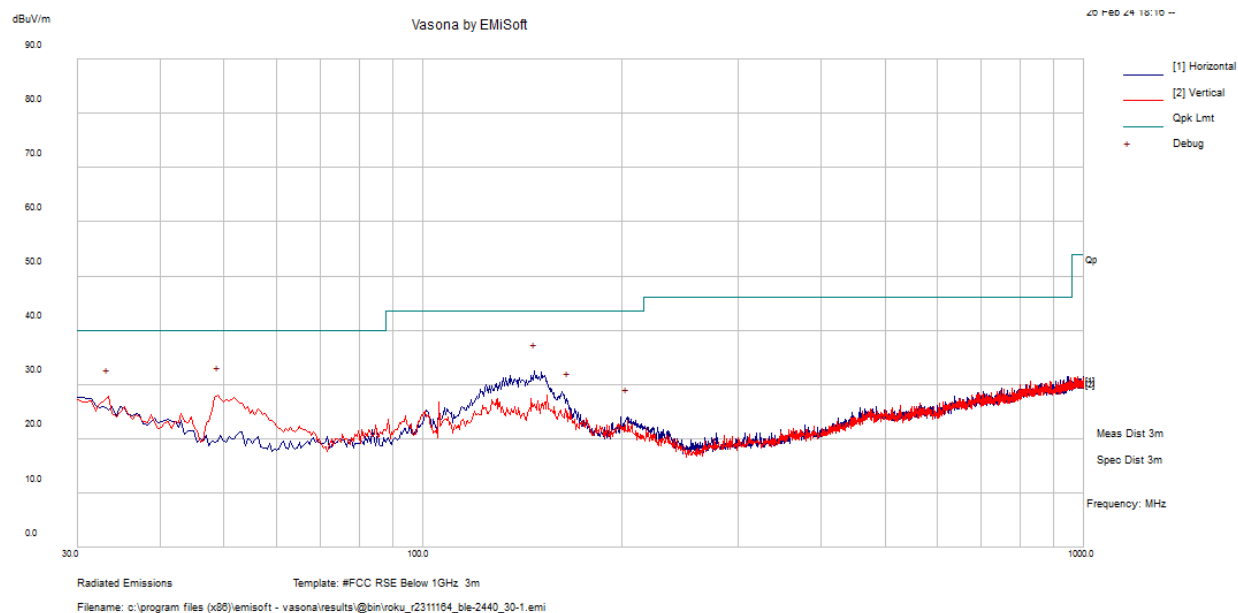


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBuV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBuV/m)	Margin (dB)	Detector
50.1285	46.84	-22.48	24.36	152	V	332	40	-15.64	QP
135.58425	41.74	-16.03	25.71	250	H	326	43.5	-17.79	QP
31.222	31.38	-10.57	20.81	229	H	316	40	-19.19	QP
164.55575	38.08	-17.34	20.74	211	H	7	43.5	-22.76	QP
202.32275	36.46	-17.59	18.87	136	H	254	43.5	-24.63	QP
970.4405	27.69	-3.55	24.14	179	H	298	54	-29.86	QP

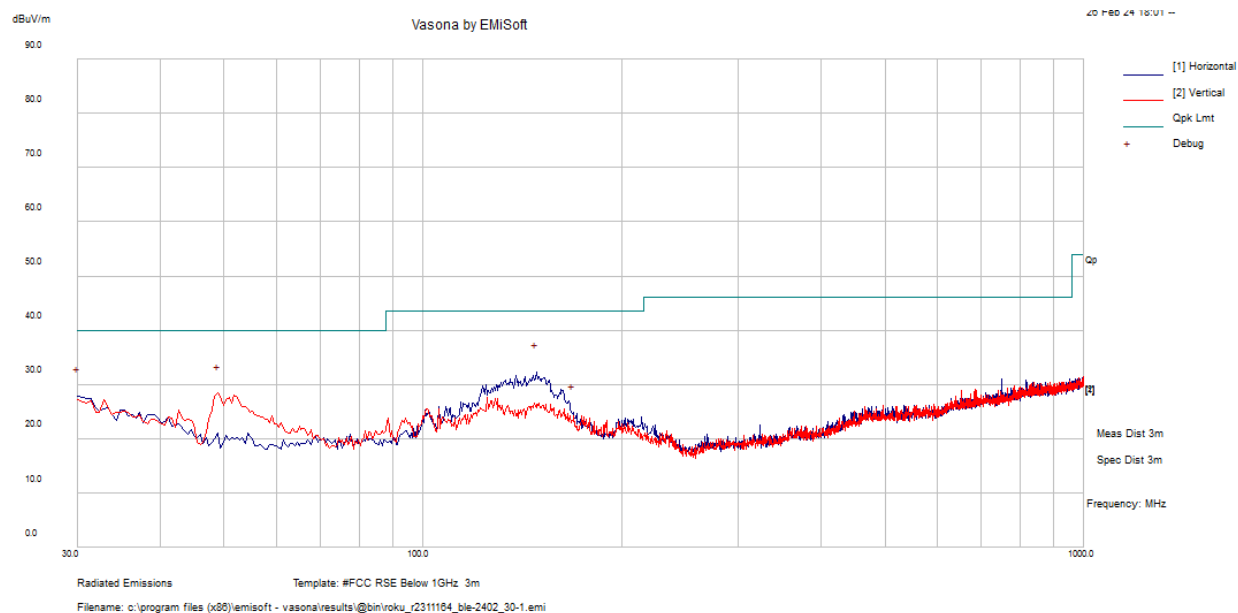GFSK(LE), 2402 MHz


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
148.34	49.21	-16.87	32.34	200.00	H	360.00	43.50	-11.16	Peak
48.92	50.43	-22.04	28.39	100.00	V	360.00	40.00	-11.61	Peak
30.00	37.34	-9.50	27.84	200.00	H	360.00	40.00	-12.16	Peak
168.71	42.33	-17.60	24.73	300.00	H	360.00	43.50	-18.77	Peak
43.58	40.78	-17.39	23.39	200.00	V	360.00	40.00	-16.61	Peak
203.15	40.15	-17.82	22.33	200.00	V	360.00	46.00	-23.67	Peak

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.

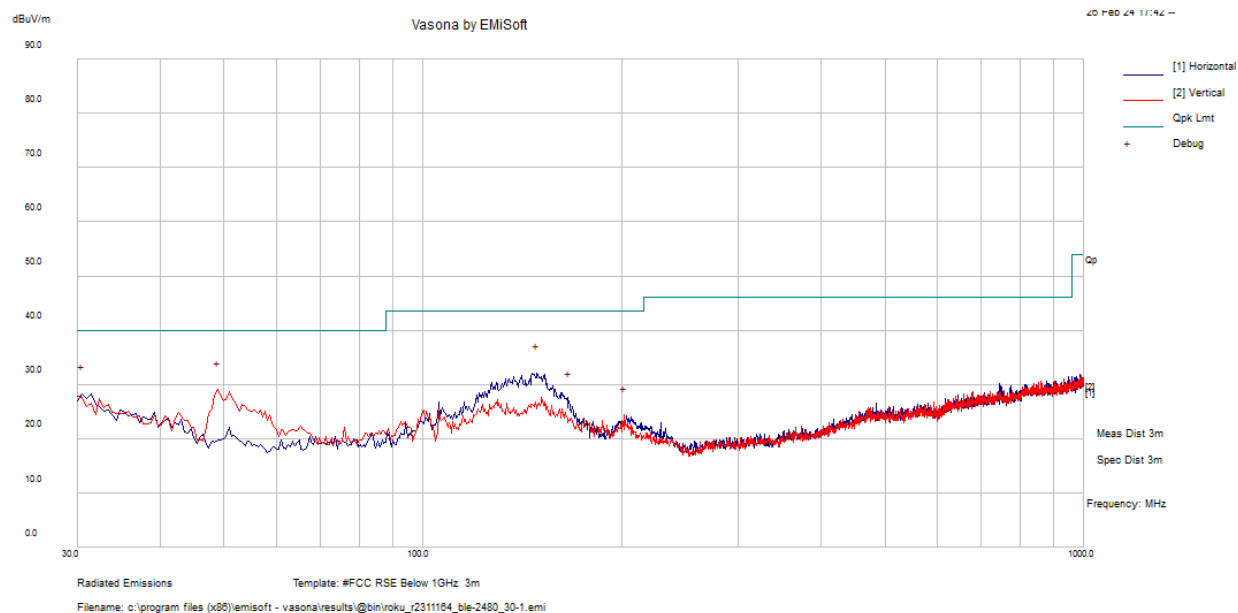GFSK(LE), 2480 MHz


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
48.92	51.04	-22.04	29.00	100.00	V	360.00	40.00	-11.00	Peak
148.83	48.99	-16.88	32.11	300.00	H	360.00	43.50	-11.39	Peak
30.49	38.22	-9.93	28.29	300.00	H	360.00	40.00	-11.71	Peak
166.29	44.42	-17.44	26.98	300.00	H	360.00	43.50	-16.52	Peak
201.69	41.75	-17.40	24.35	300.00	V	360.00	43.50	-19.15	Peak
43.58	42.45	-19.04	23.41	100.00	V	360.00	40.00	-16.59	Peak

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.

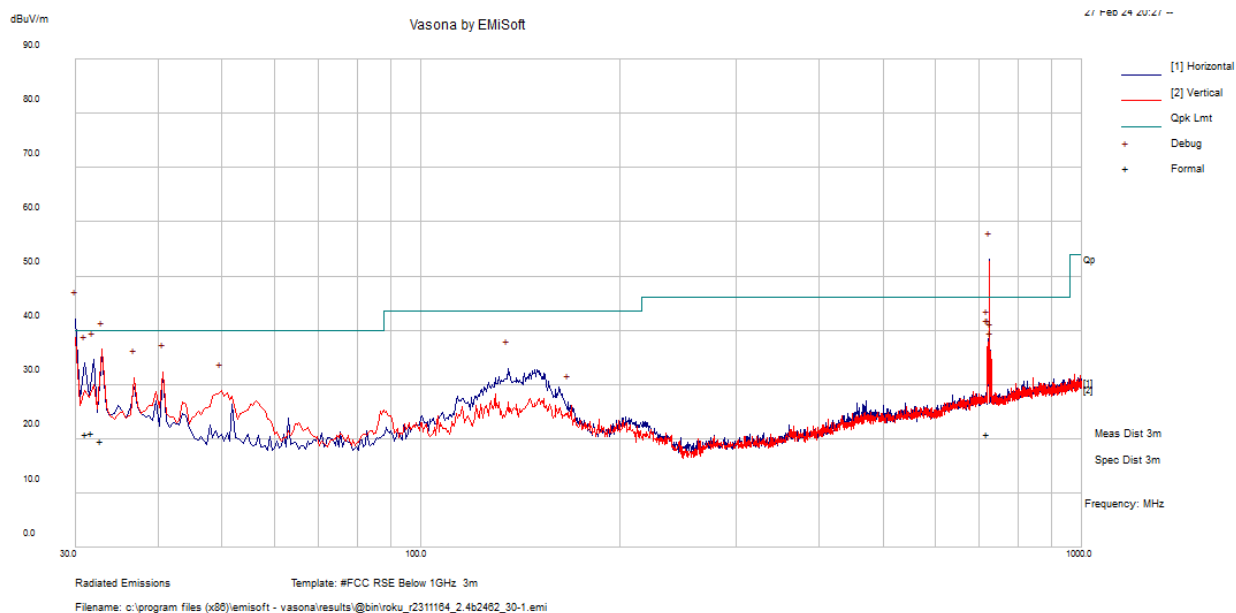Worst Case: 802.11b, 2462 MHz

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
723.78625	27.75	-6.61	21.14	134	H	307	46	-24.86	QP
30	35.72	-9.5	26.22	167	H	307	40	-13.78	QP
32.81425	31.41	-11.74	19.67	246	V	105	40	-20.33	QP
31.71475	31.95	-10.95	21	297	H	25	40	-19	QP
32.81425	31.41	-11.74	19.67	246	V	105	40	-20.33	QP
31.71475	31.95	-10.95	21	297	H	25	40	-19	QP


802.11b, 2412 MHz

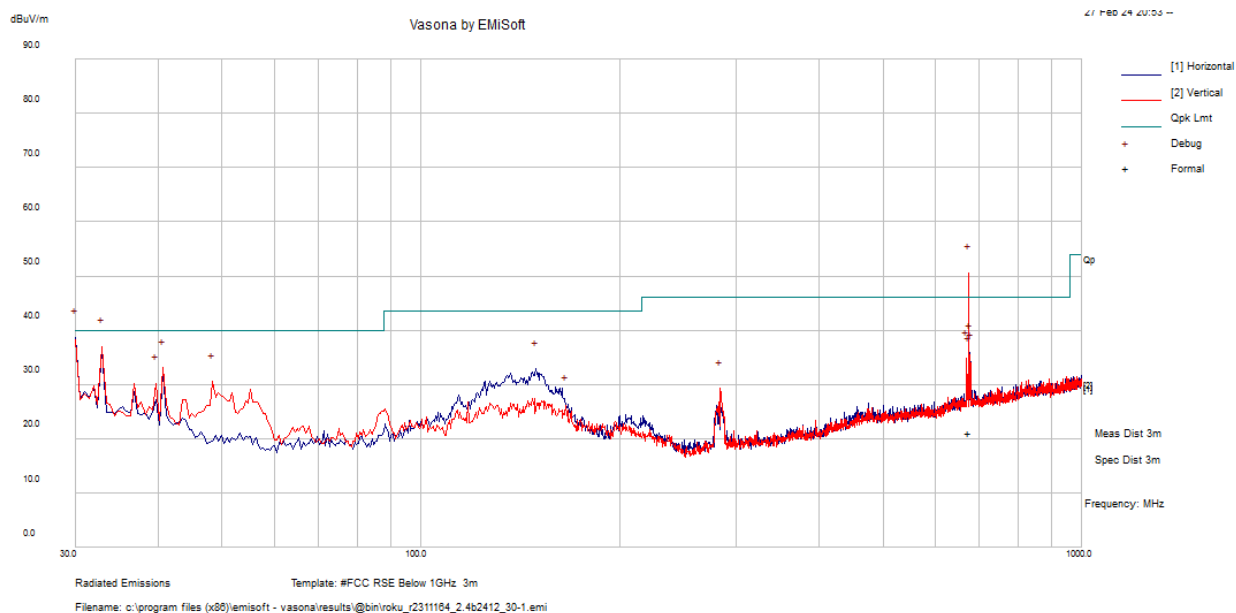

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
30.00	48.21	-9.50	38.71	100.00	H	360.00	40.00	-1.29	Peak
32.91	48.76	-11.81	36.95	100.00	V	360.00	40.00	-3.05	Peak
40.67	49.99	-16.97	33.02	100.00	V	360.00	40.00	-6.98	Peak
48.43	52.30	-21.79	30.51	100.00	V	360.00	40.00	-9.49	Peak
39.70	46.39	-16.28	30.11	100.00	V	360.00	40.00	-9.89	Peak
673.86	48.35	-7.24	41.11	103.00	V	284.00	46.00	-4.89	QP

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.


802.11b, 2437 MHz + BT colocation

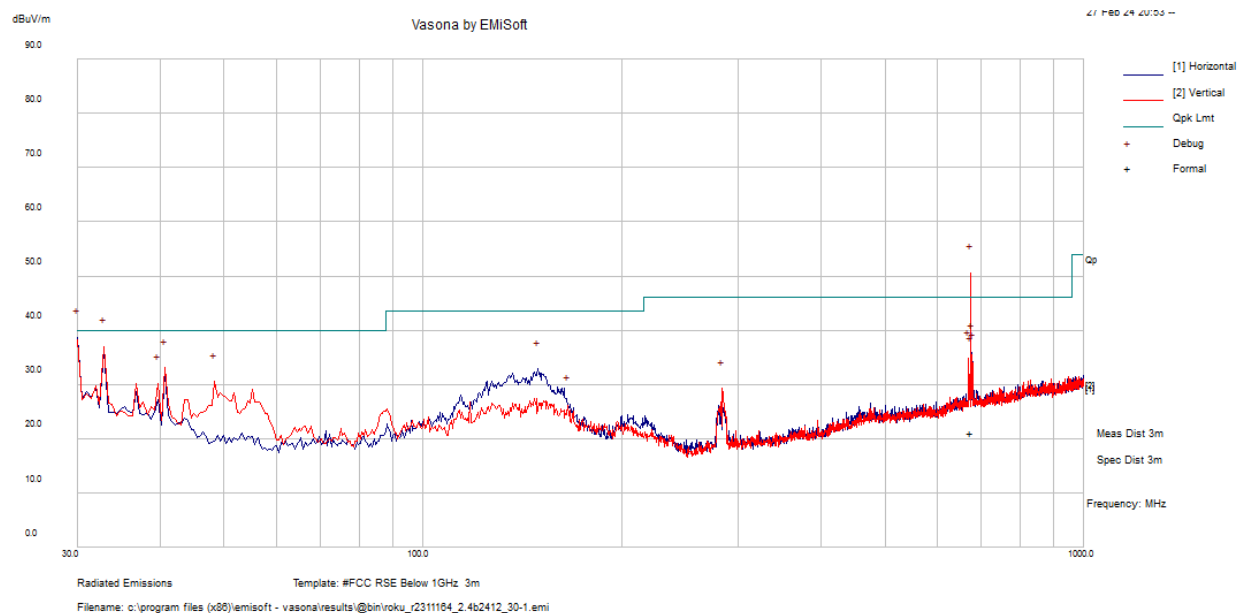

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
30.00	48.33	-9.50	38.83	100.00	V	360.00	40.00	-1.17	Peak
32.91	47.31	-11.81	35.50	100.00	V	360.00	40.00	-4.50	Peak
40.67	49.03	-16.97	32.06	100.00	V	360.00	40.00	-7.94	Peak
702.70	43.69	-6.66	37.03	100.00	V	360.00	46.00	-8.97	Peak
694.94	42.96	-6.71	36.25	100.00	V	360.00	46.00	-9.75	Peak
698.815	48.91	-6.68	42.23	100	V	360	46	-3.77	QP

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.


802.11g, 2412 MHz

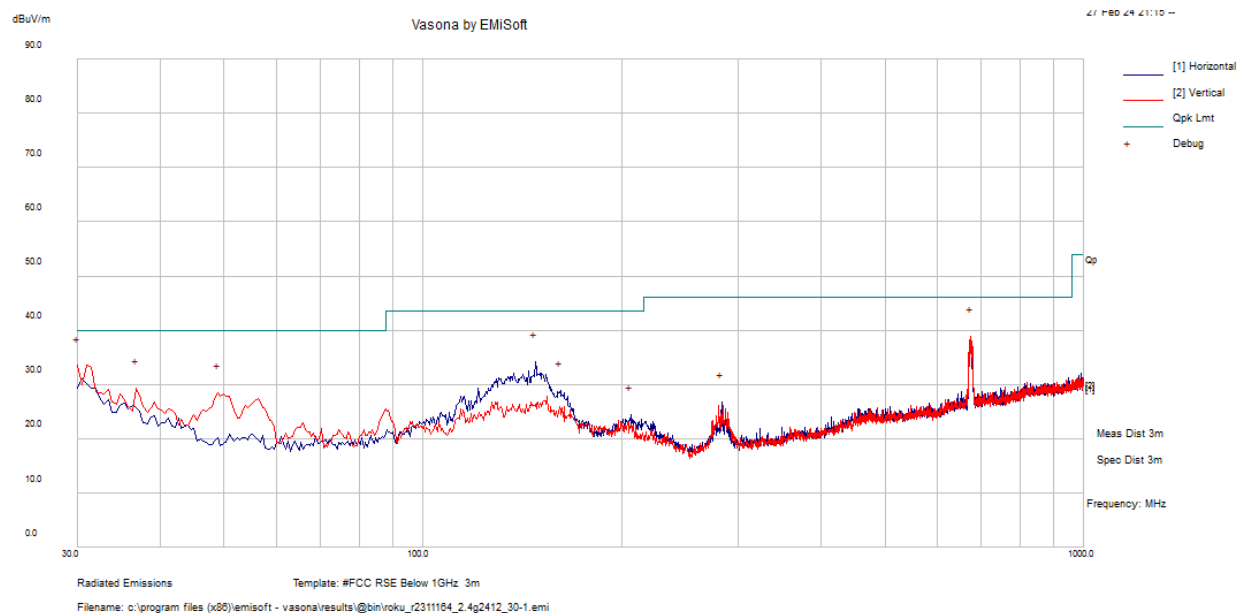

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
30.00	43.01	-9.50	33.51	100.00	V	360.00	40.00	-6.49	Peak
674.08	46.08	-7.24	38.84	100.00	V	360.00	46.00	-7.16	Peak
147.86	51.07	-16.86	34.21	200.00	H	360.00	43.50	-9.29	Peak
36.79	43.47	-14.10	29.37	100.00	V	360.00	40.00	-10.63	Peak
48.92	50.54	-22.04	28.50	100.00	V	360.00	40.00	-11.50	Peak
161.44	46.14	-17.21	28.93	300.00	H	360.00	43.50	-14.57	Peak

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.


802.11g, 2437 MHz

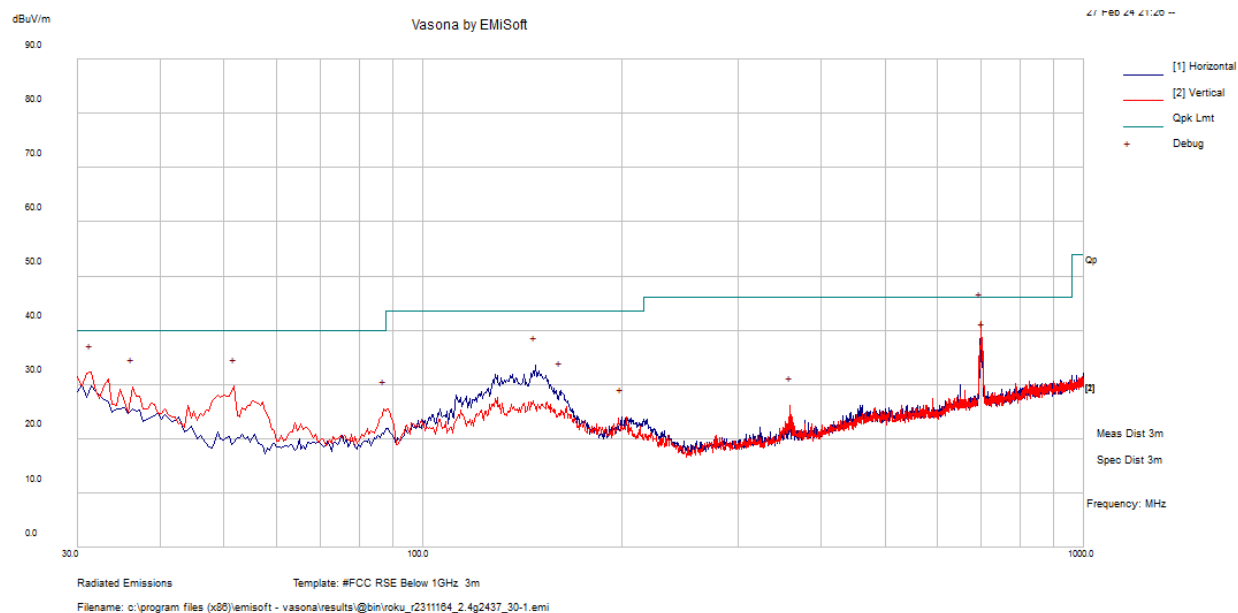

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
698.33	48.34	-6.69	41.65	100.00	V	360.00	46.00	-4.35	Peak
31.46	42.96	-10.75	32.21	100.00	V	360.00	40.00	-7.79	Peak
703.18	42.86	-6.66	36.20	100.00	V	360.00	46.00	-9.80	Peak
147.86	50.37	-16.86	33.51	200.00	H	360.00	43.50	-9.99	Peak
51.83	52.38	-22.74	29.64	100.00	V	360.00	40.00	-10.36	Peak
36.31	43.31	-13.79	29.52	100.00	V	360.00	40.00	-10.48	Peak

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.

802.11g, 2462 MHz

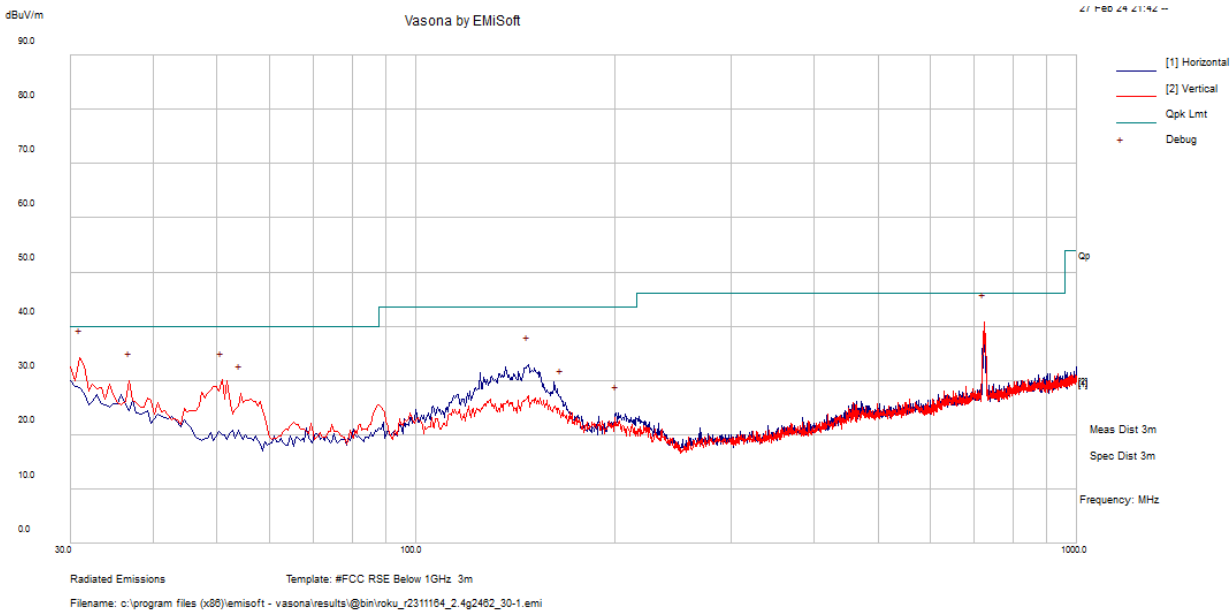

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
723.55	47.43	-6.62	40.81	100.00	V	360.00	46.00	-5.19	Peak
30.97	44.59	-10.37	34.22	100.00	V	360.00	40.00	-5.78	Peak
50.86	52.68	-22.60	30.08	100.00	V	360.00	40.00	-9.92	Peak
36.79	44.10	-14.10	30.00	100.00	V	360.00	40.00	-10.00	Peak
147.86	49.76	-16.86	32.90	200.00	H	360.00	43.50	-10.60	Peak
54.25	50.69	-23.01	27.68	100.00	V	360.00	40.00	-12.32	Peak

Note: Peak measurement is used to compare to quasi-peak limit to show compliance.


FCC/IC Limits for 1 GHz to 26.5 GHz				
Applicability	(dBm)	(uV/m at 3meters)	(dBuV/m at 3meters)	(dBuV/m at 1meter) ²
Restricted Band Average Limit	-	500	54	63.54
Restricted Band Peak Limit ¹	-	-	74	83.54

Note¹: Restricted Band Peak Limit is defined to be 20dB higher than Average Limit.

Note²: Limits at 1 meter are determined by applying a Distance correction factor accounts for extrapolation from 1 meters to 3 meters. Formula used is as follows: $20 \cdot \log(3\text{meters}/1\text{meter}) = 9.54$ (According to ANSI C63.10-2013 Section 9.4)

2) 1 GHz – 18 GHz, Measured at 1 meter


GFSK(LE), 2402 MHz

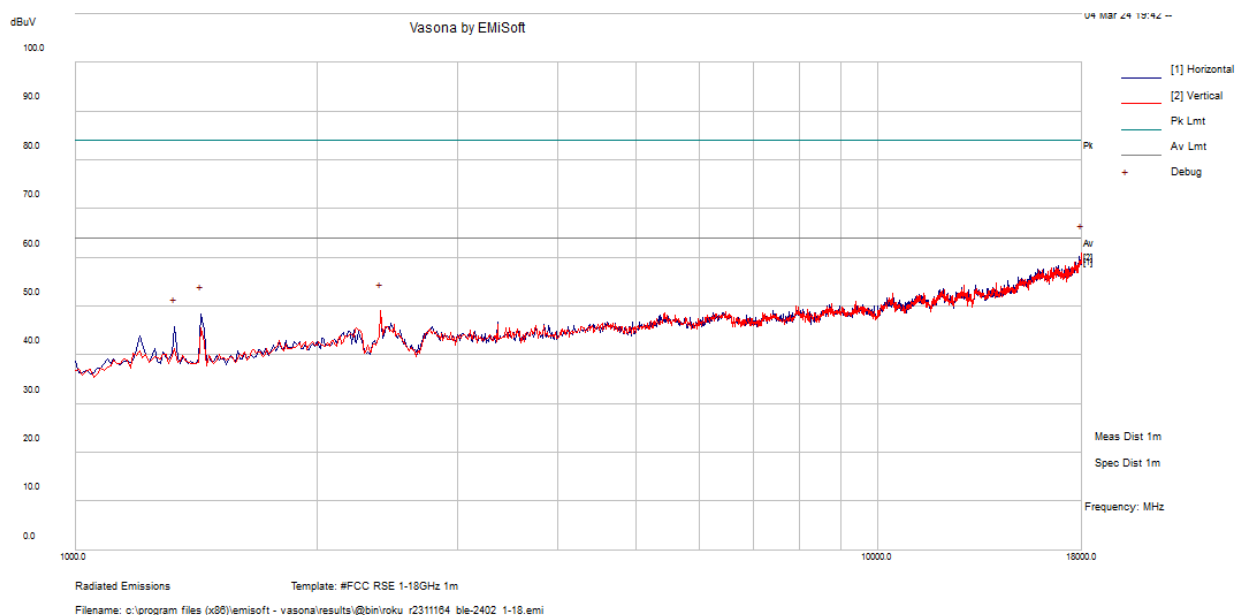

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
18000	46.05	14.99	61.04	200	V	360	63.54	-2.5	Peak

Note: Peak measurement is used to compare to the average limit.


GFSK(LE), 2440 MHz

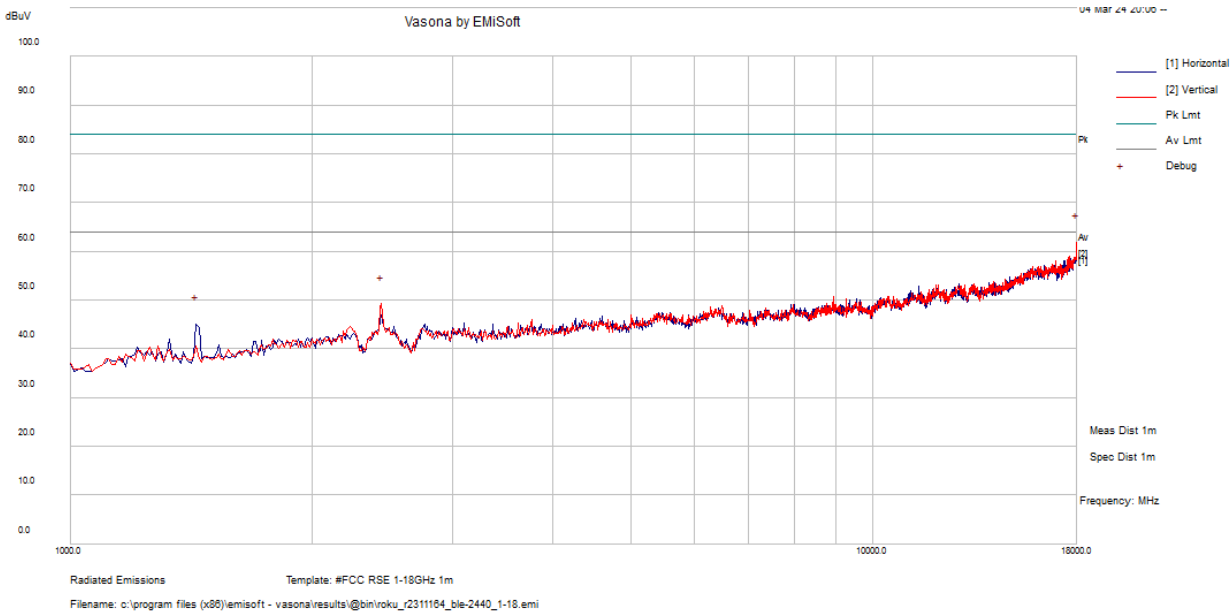

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
17978.75	46.96	14.85	61.81	200	V	360	63.54	-1.73	Peak

Note: Peak measurement is used to compare to the average limit.


GFSK(LE), 2480 MHz

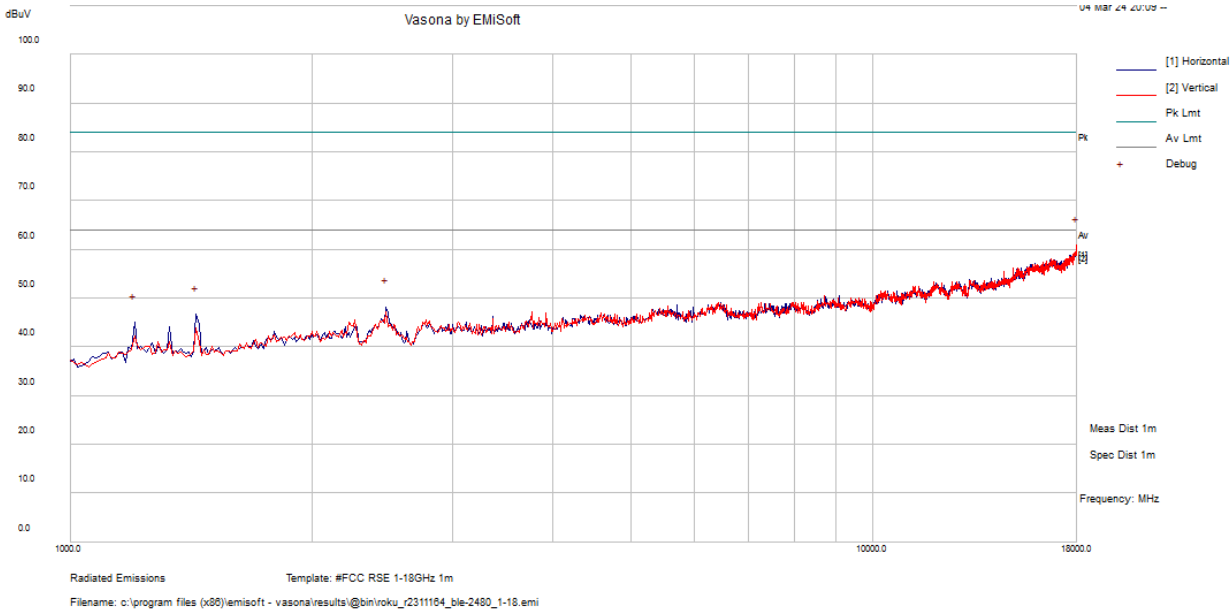

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
17978.75	45.92	14.85	60.77	100	V	360	63.54	-2.77	Peak

Note: Peak measurement is used to compare to the average limit.


802.11b, 2412 MHz

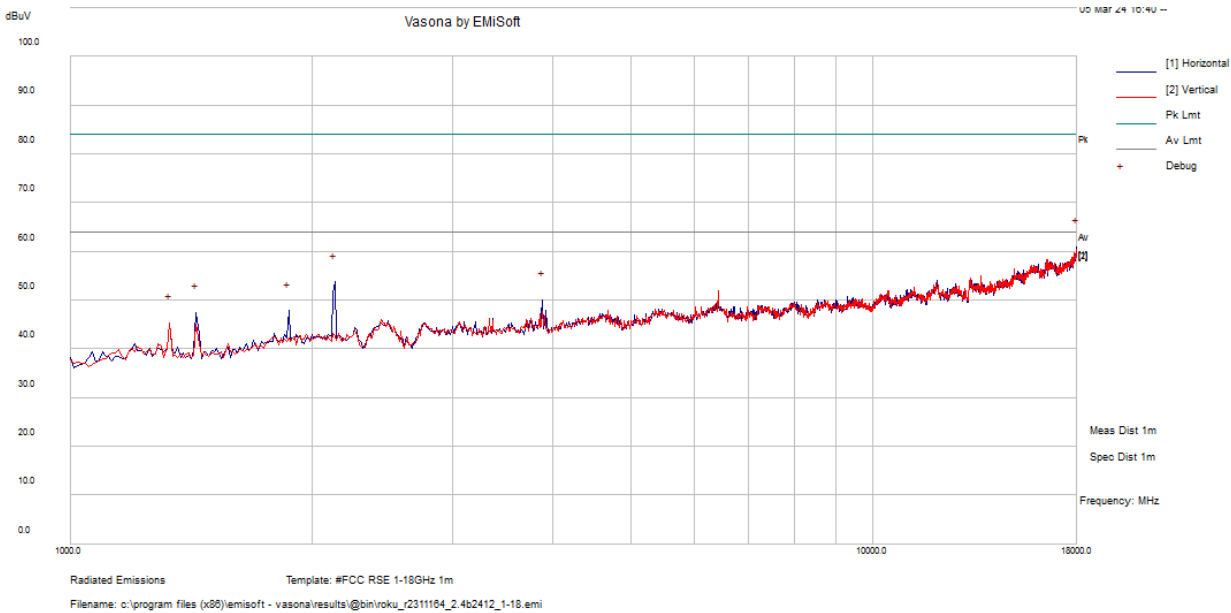

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
17989.375	46.07	14.92	60.99	200	H	360	63.54	-2.55	Peak

Note: Peak measurement is used to compare to the average limit.


802.11b, 2437 MHz+ BT colocation

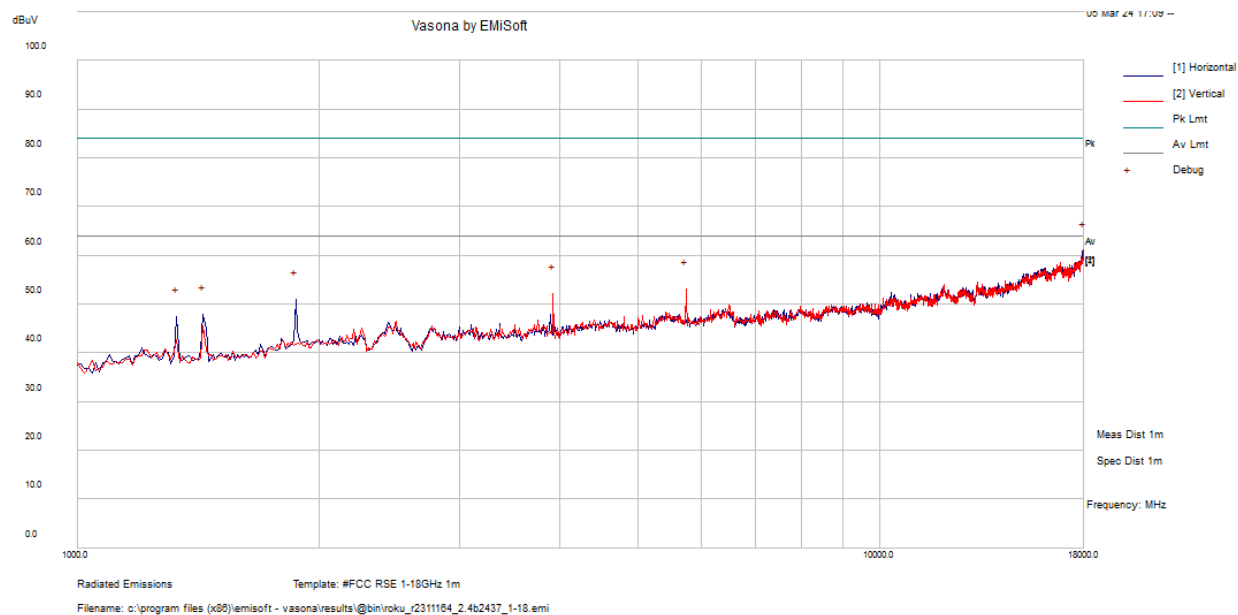

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
17989.375	45.96	14.92	60.88	300	H	360	63.54	-2.47	Peak

Note: Peak measurement is used to compare to the average limit.


802.11b, 2462 MHz

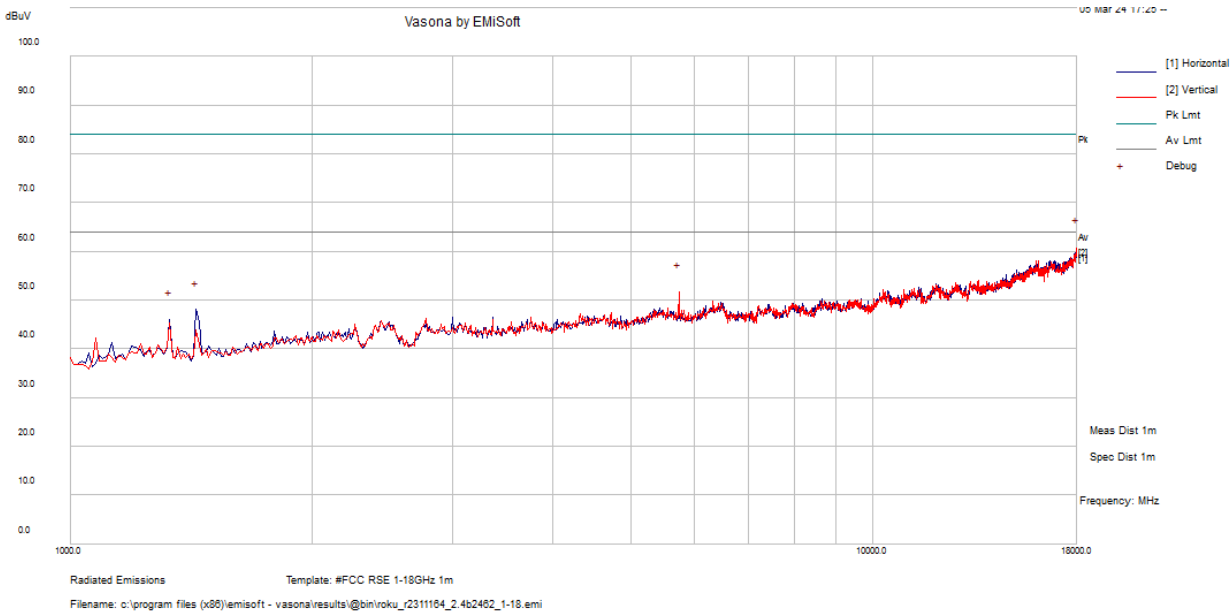

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
18000	45.9	14.99	60.89	100	V	360	63.54	-2.65	Peak

Note: Peak measurement is used to compare to the average limit.


802.11g, 2412 MHz

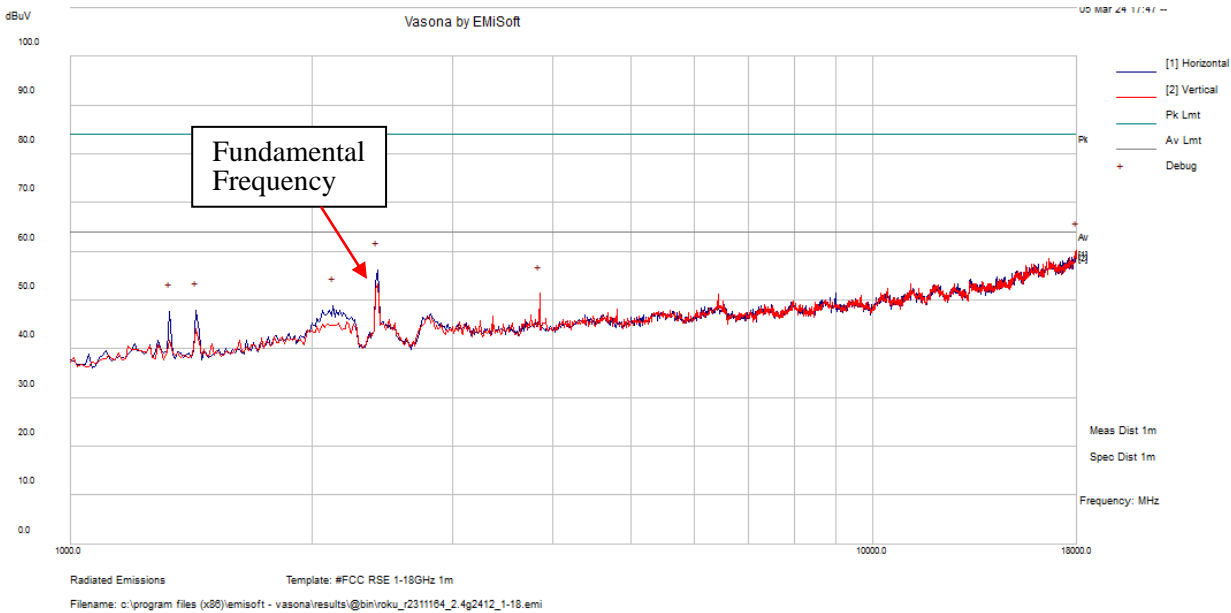

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
18000	45.36	14.99	60.35	100	H	360	63.54	-3.19	Peak

Note: Peak measurement is used to compare to the average limit.


802.11g, 2437 MHz

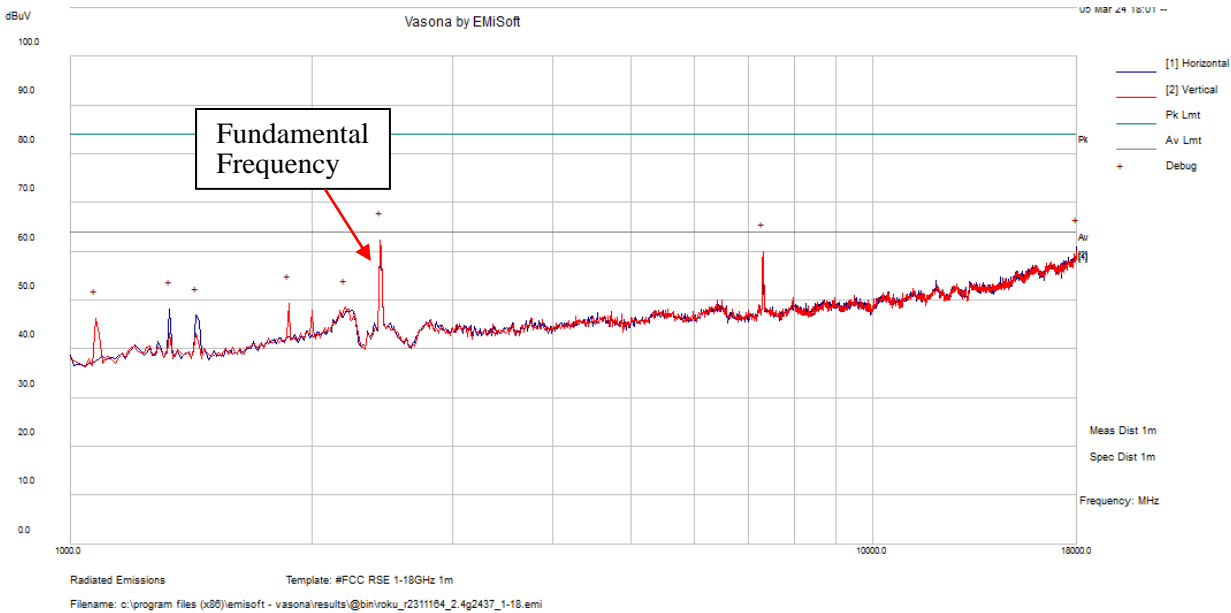

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
17989.375	46.04	14.92	60.96	200	H	360	63.54	-2.58	Peak

Note: Peak measurement is used to compare to the average limit.

802.11g, 2462 MHz

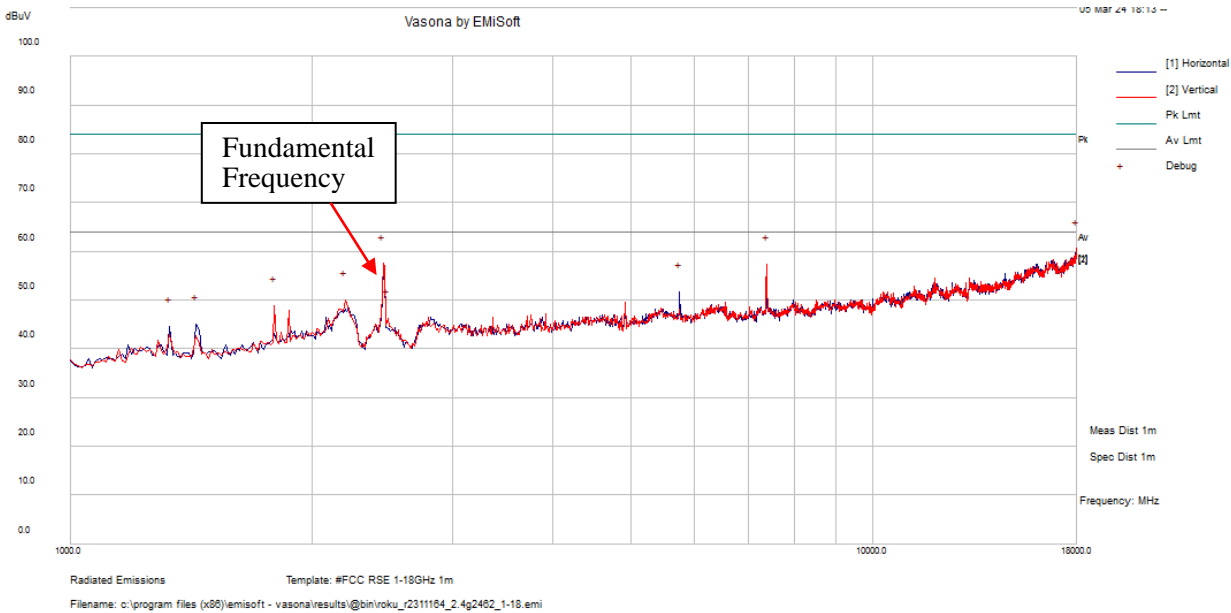


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
17989.375	45.68	14.92	60.6	100	V	360	63.54	-2.94	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.

3) 18 GHz – 26.5 GHz, Measured at 1 meter


GFSK(LE), 2402 MHz

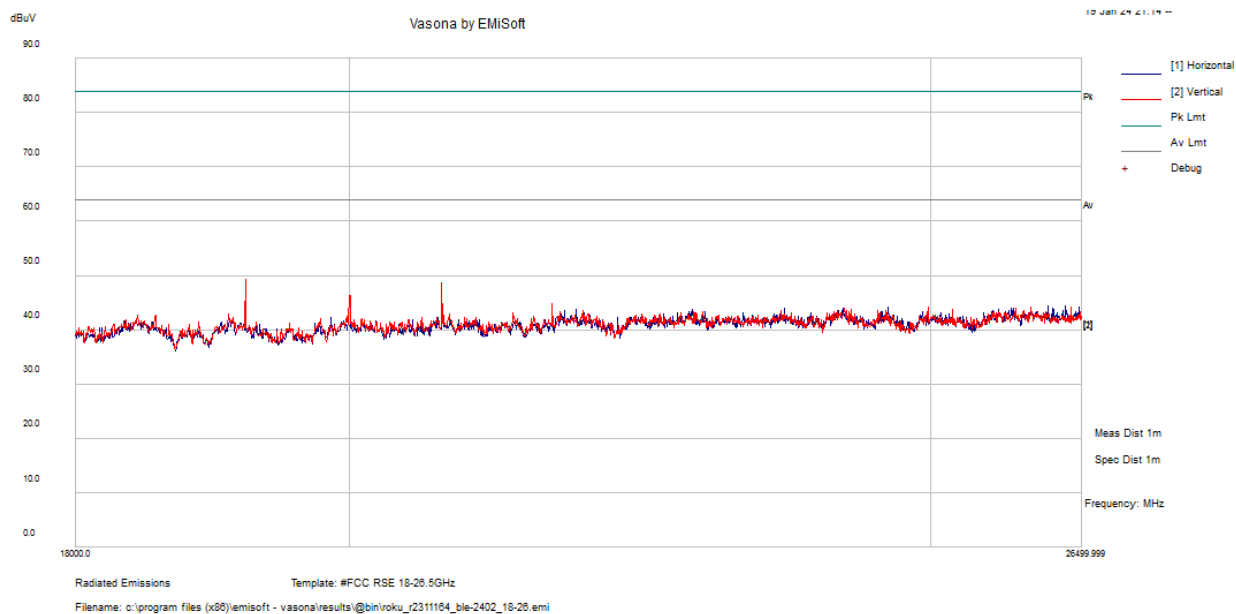

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
20720	46.6577	2.0263	48.684	200	V	360	63.54	-14.856	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.


GFSK(LE), 2440 MHz

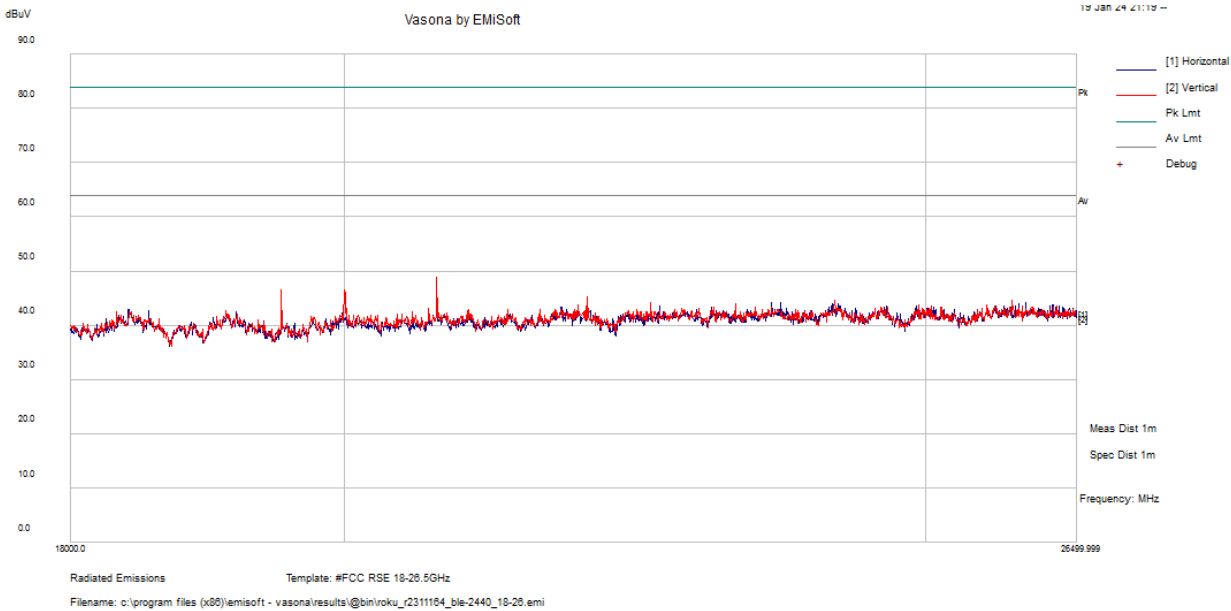

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
20720	46.8267	2.0263	48.853	200	V	360	63.54	-14.687	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.


GFSK(LE), 2480 MHz

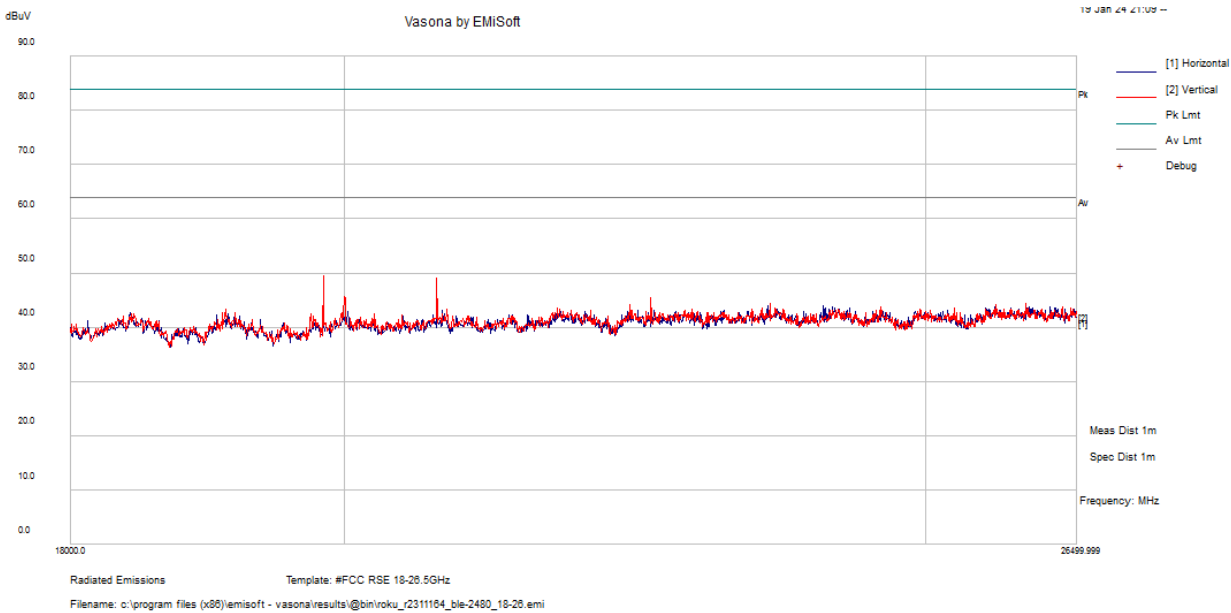

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBµV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBµV/m)	Margin (dB)	Detector
20720	47.1117	2.0263	49.138	200	V	360	63.54	-14.402	Peak


Note: Peak measurement is used to compare to the average limit to show compliance.

802.11b, 2412 MHz

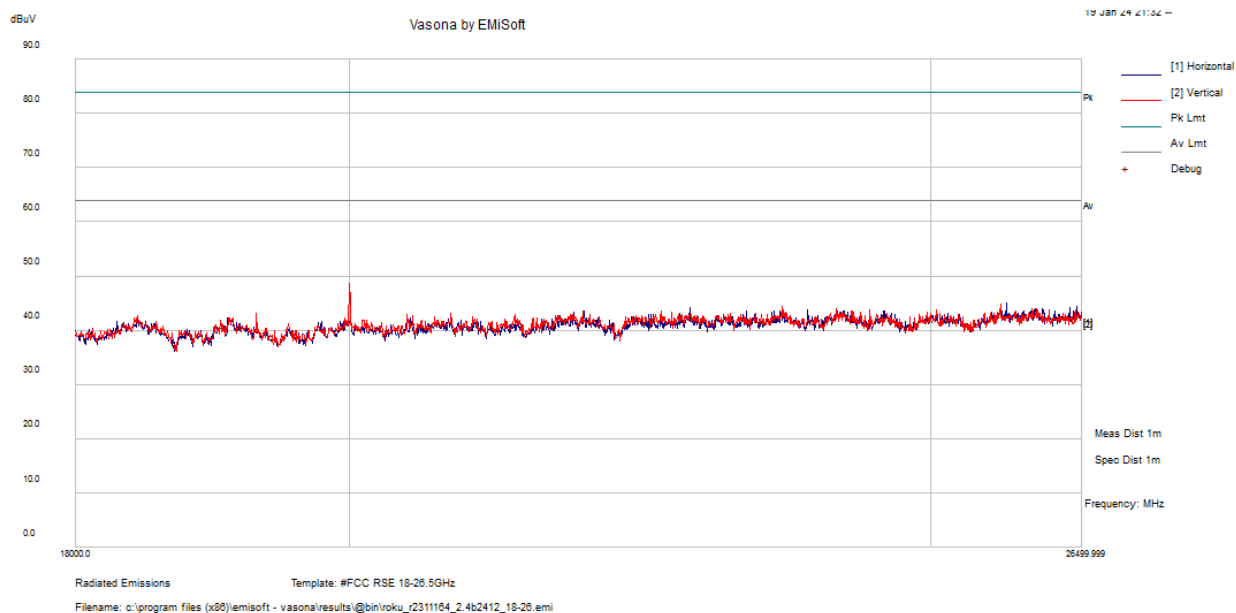


Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
20002.812	44.6265	1.0215	45.648	200	V	360	63.54	-17.892	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.

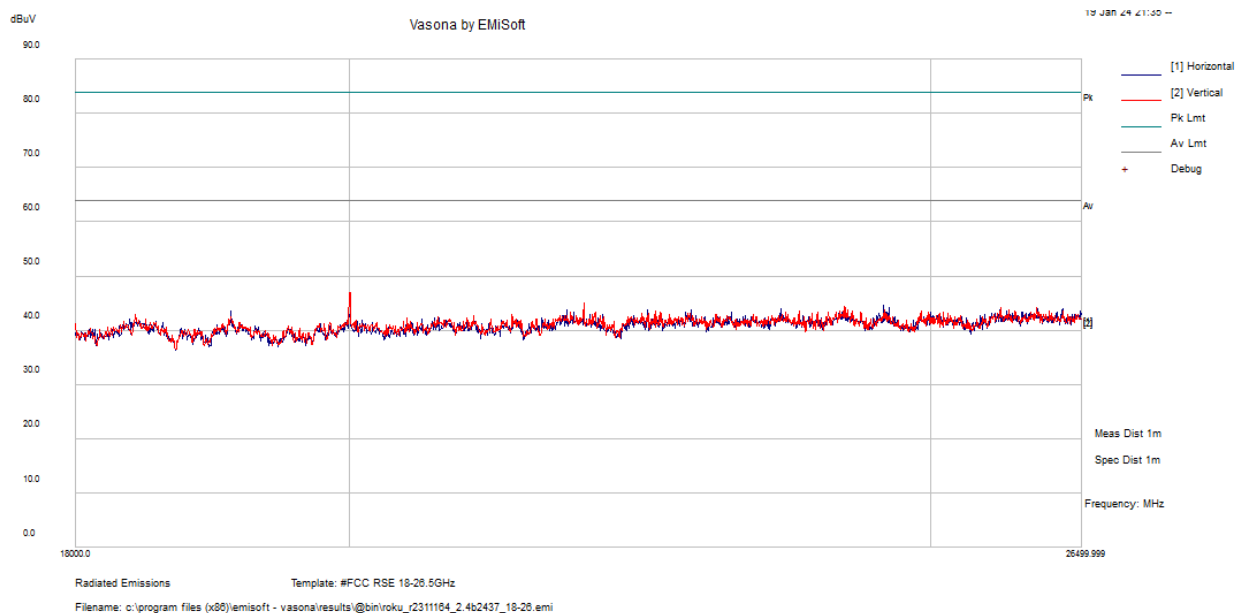802.11b, 2437 MHz+ BT colocation

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
20002.812	45.9645	1.0215	46.986	200	V	360	63.54	-16.554	Peak


Note: Peak measurement is used to compare to the average limit to show compliance.

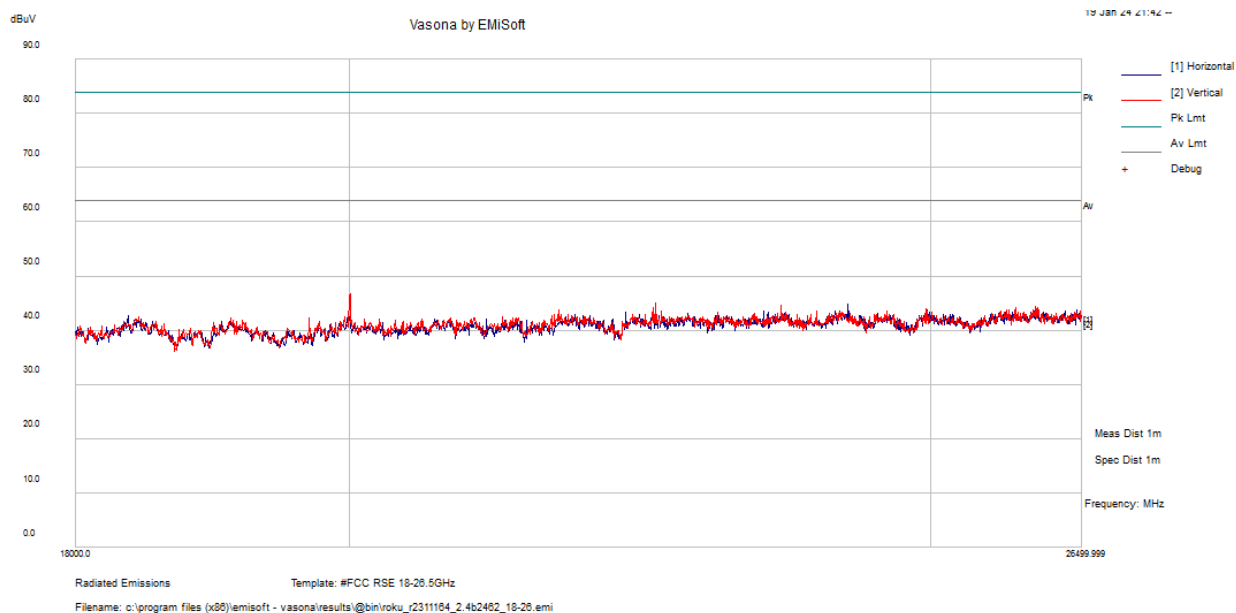802.11b, 2462 MHz

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
20002.812	45.7585	1.0215	46.78	200	V	360	63.54	-16.76	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.


802.11g, 2412 MHz

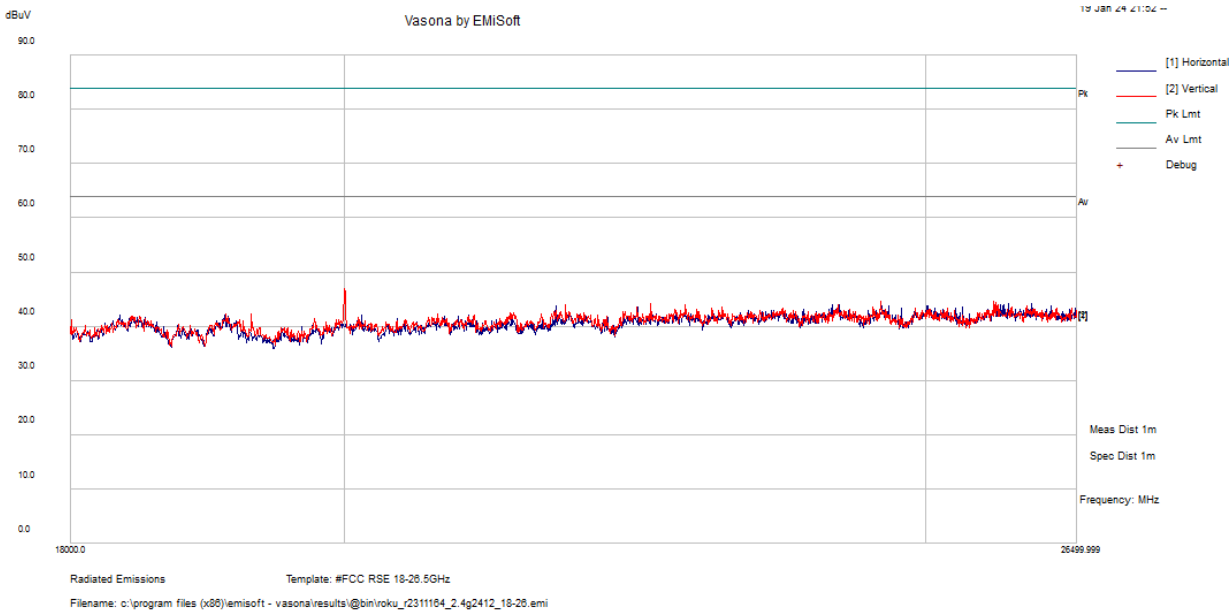

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
19997.5	45.8705	1.0215	46.892	200	V	360	63.54	-16.648	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.


802.11g, 2437 MHz

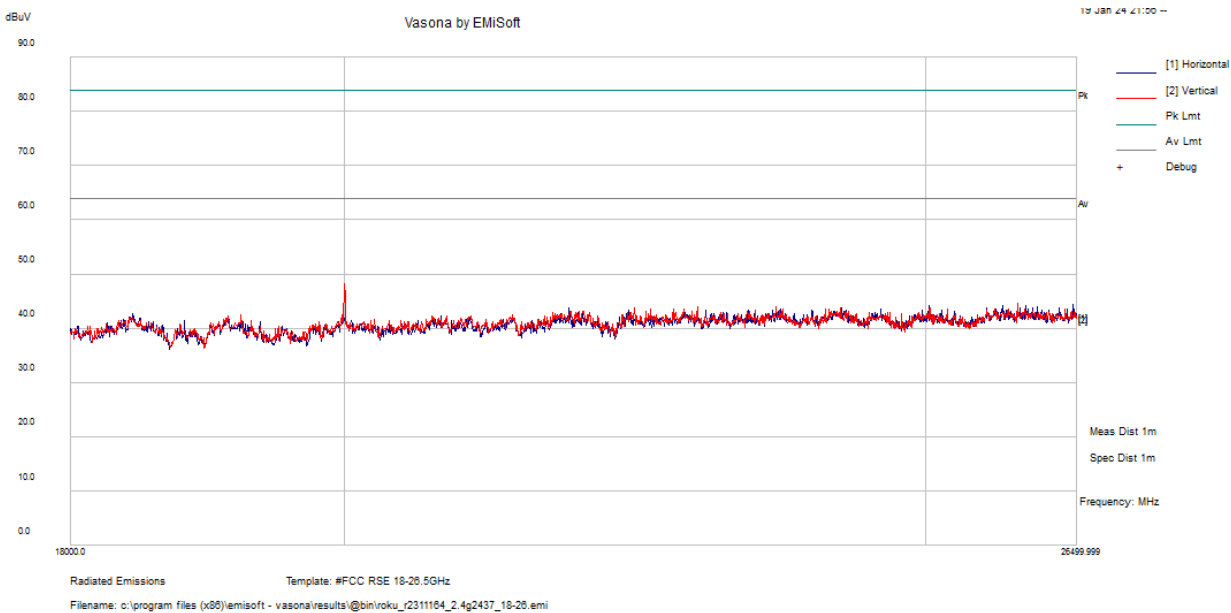

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
19997.5	47.2725	1.0215	48.294	200	V	360	63.54	-15.246	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.

802.11g, 2462 MHz

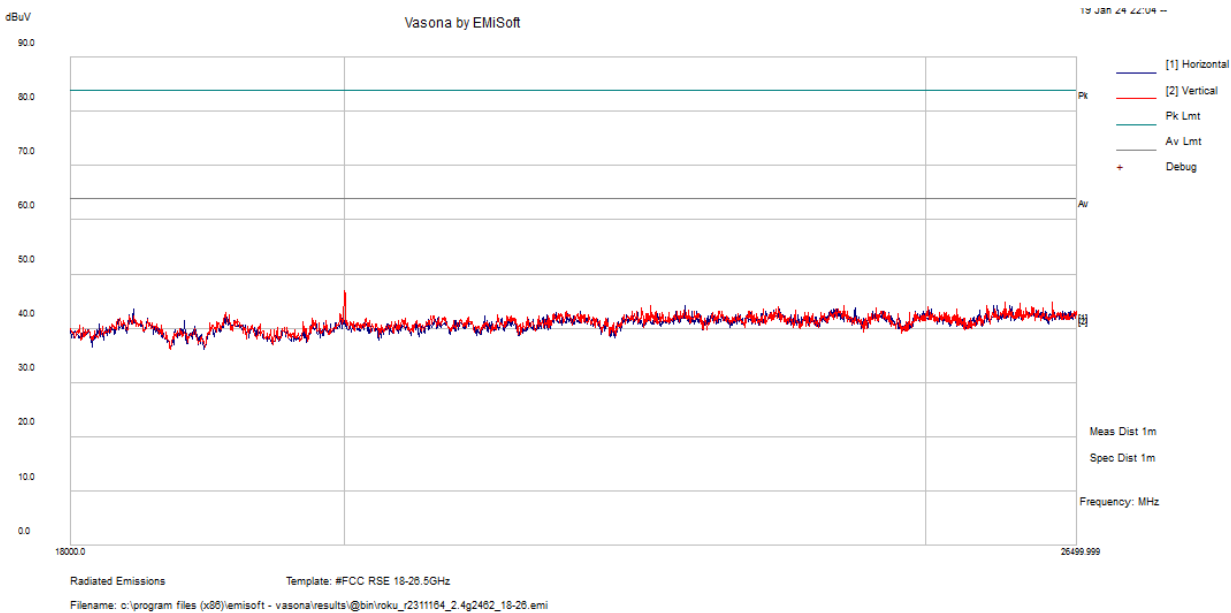

Frequency (MHz)	S.A. Reading (dBuV)	Correction Factor (dB/m)	Corrected Amplitude (dBμV/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dBμV/m)	Margin (dB)	Detector
19997.5	45.9595	1.0215	46.981	200	V	360	63.54	-16.559	Peak

Note: Peak measurement is used to compare to the average limit to show compliance.

8 FCC §15.247(a) (2) & ISEDC RSS-247 §5.2, RSS-Gen §6.7 – Emission Bandwidth

8.1 Applicable Standards

According to FCC §15.247(a) (2) and ISEDC RSS-247 §5.2: the minimum 6 dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8: DTS bandwidth.

As per ANSI C63.10 Clause 11.8: DTS bandwidth

One of the following procedures may be used to determine the modulated DTS bandwidth.

Option 1:

- a. Set RBW = 100 kHz.
- b. Set the VBW $\geq [3 \times \text{RBW}]$.
- c. Detector = peak.
- d. Trace mode = max hold.
- e. Sweep = auto couple.
- f. Allow the trace to stabilize.
- g. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 00206 dB relative to the maximum level measured in the fundamental emission.

Option 2:

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW $\geq 3 \times \text{RBW}$, and peak detector with maximum hold) is implemented by the instrumentation function.

When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be ≥ 6 dB.


As per the ANSI 63.10 Clause 6.9.3: Occupied Bandwidth

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a. The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b. The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- c. Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- d. Step a) through step c) might require iteration to adjust within the specified range.
- e. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

- f. Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g. If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h. The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

8.3 Test Setup Block Diagram

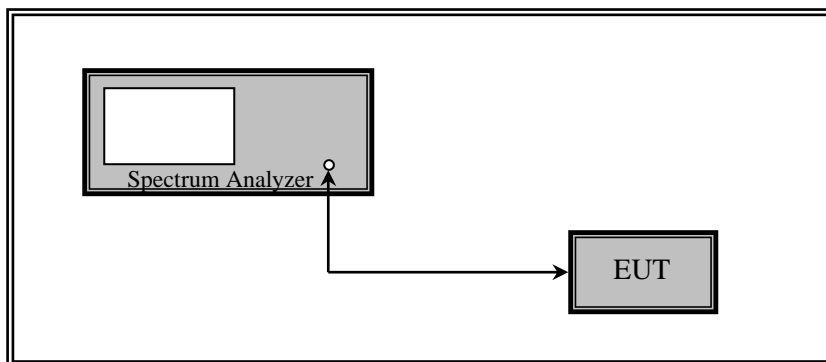

8.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
624	Agilent	Spectrum Analyzer	E4446A	MY48250238	05-12-2023	1 year

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

8.5 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Libass Thiaw from 02/20/2024 to 02/27/2024 at RF test site.

8.6 Test Results

2.4 GHz Wi-Fi

Channel	Frequency (MHz)	99% OBW (MHz)		6 dB OBW (MHz)		6 dB OBW Limit (kHz)	Result
		Antenna A	Antenna B	Antenna A	Antenna B		
802.11b							
Low	2412	13.841	13.886	10.160	10.139	≥ 500	Pass
Middle	2437	13.943	13.974	10.141	10.127	≥ 500	Pass
High	2462	13.902	13.934	10.156	10.160	≥ 500	Pass
802.11g							
Low	2412	16.197	16.247	14.482	14.917	≥ 500	Pass
Middle	2437	16.211	16.412	14.000	15.149	≥ 500	Pass
High	2462	16.197	16.282	15.095	11.490	≥ 500	Pass
802.11n20							
Low	2412	17.315	17.342	14.022	13.748	≥ 500	Pass
Middle	2437	17.368	17.498	15.107	15.157	≥ 500	Pass
High	2462	17.510	17.340	15.068	11.461	≥ 500	Pass
802.11n40							
Low	2422	35.711	35.668	33.814	34.088	≥ 500	Pass
Middle	2437	37.098	35.880	35.161	33.875	≥ 500	Pass
High	2452	35.559	35.673	31.552	34.025	≥ 500	Pass
802.11ax20							
Low	2412	18.555	18.576	15.222	13.922	≥ 500	Pass
Middle	2437	18.560	18.574	15.157	13.910	≥ 500	Pass
High	2462	18.482	18.526	15.140	12.736	≥ 500	Pass
802.11ax40							
Low	2422	37.166	37.234	30.199	34.008	≥ 500	Pass
Middle	2437	37.315	37.297	35.196	35.112	≥ 500	Pass
High	2452	49.064	37.190	34.006	35.165	≥ 500	Pass

2.4 GHz BLE

Channel	Frequency (MHz)	6 dB OBW (MHz)		99% OBW (MHz)		6 dB OBW Limit (kHz)	Result
		1 Mbps	2 Mbps	1 Mbps	2 Mbps		
Low	2402	0.511	1.16	1.01	2.03	≥ 500	Pass
Middle	2440	0.661	1.08	1.03	2.06	≥ 500	Pass
High	2480	0.668	1.15	1.04	2.07	≥ 500	Pass

Please refer to Annex A for detailed test results.

9 FCC §15.247(b)(3) & ISEDC RSS-247 §5.4 – Maximum Output Power

9.1 Applicable Standards

According to FCC §15.247(b)(3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247 §5.4: For DTS employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

9.2 Measurement Procedure


The measurements are based on ANSI C63.10-2013, Section 11.9.2.2.2.

11.9.2.2.2 Method AVGSA-1

Method AVGSA-1 uses trace averaging with the EUT transmitting at full power throughout each sweep. The procedure for this method is as follows:

- a. Set span to at least 1.5 times the OBW.
- b. Set RBW = 1% to 5% of the OBW, not to exceed 1 MHz.
- c. Set VBW $\geq [3 \times \text{RBW}]$.
- d. Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\leq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- e. Sweep time = auto.
- f. Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g. If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at the maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no OFF intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run."
- h. Trace average at least 100 traces in power averaging (rms) mode.
- i. Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

9.3 Test Setup Block Diagram

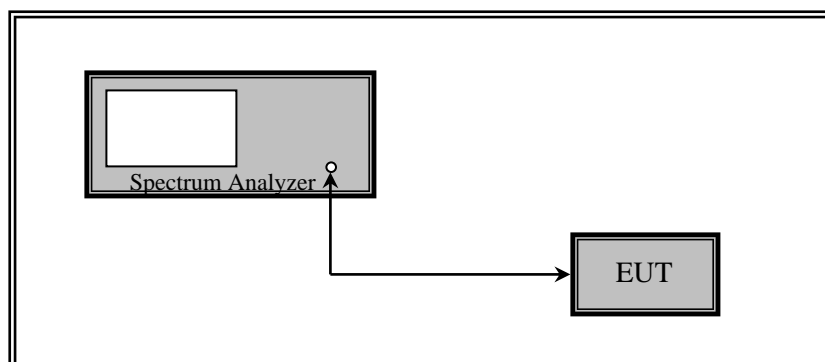

9.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
624	Agilent	Spectrum Analyzer	E4446A	MY48250238	05-12-2023	1 year

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp.* attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.

9.5 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Libass Thiaw from 02/20/2024 to 02/27/2024 at RF test site.

9.6 Test Results

2.4 GHz Wi-Fi

Channel	Frequency (MHz)	Conducted Output Power (dBm)		Total Power (dBm)	FCC/IC Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
		ANT A	ANT B				
802.11b							
Low	2412	14.830	15.590	-	<30	18.690	<36
Middle	2437	18.650	19.510	-	<30	22.610	<36
High	2462	17.100	17.640	-	<30	20.740	<36
802.11g							
Low	2412	13.020	14.030	-	<30	17.130	<36
Middle	2437	18.920	20.000	-	<30	23.100	<36
High	2462	13.030	13.910	-	<30	17.010	<36
802.11n20							
Low	2412	13.750	14.700	17.261	<30	23.081	<36
Middle	2437	18.720	19.560	22.171	<30	27.991	<36
High	2462	10.910	11.570	14.263	<30	20.083	<36
802.11n40							
Low	2422	11.230	12.010	14.648	<30	20.468	<36
Middle	2437	19.360	19.940	22.670	<30	28.49	<36
High	2452	11.320	12.020	14.694	<30	20.514	<36
802.11ax20							
Low	2412	13.630	14.440	17.064	<30	22.884	<36
Middle	2437	16.280	17.320	19.841	<30	25.661	<36
High	2462	14.480	15.500	18.030	<30	23.85	<36
802.11ax40							
Low	2422	9.4500	10.060	12.776	<30	18.596	<36
Middle	2437	15.170	15.760	18.485	<30	24.305	<36
High	2452	8.0300	8.680	11.377	<30	17.197	<36

Note: SISO Antenna gains for Ant A and Ant B are 2.5 [dBi] and 3.1 [dBi] respectively

Note: For MIMO Antenna gain, $dBi = 10 \log[(10^{(Ant A \text{ gain [dBi]}/20)} + 10^{(Ant B \text{ gain [dBi]}/20)})^2 / \text{Number of Antennas}] = 5.82$

Note: $EIRP [dBm] = \text{Conducted Output Power [dBm]} + \text{Antenna Gain [dBi]}$

Note: EIRP for SISO modes was measured at the antennas conducting the highest output power

Note: For EIRP limit, $dBm = 10 \log(\text{Power [mW]}/1mW) = 10 \log(4000mW/1mW) = 36dBm$

Note: Duty Cycle correction factor has already been added to the measurements.

Note: 802.11g DCCF = 0.132, 802.11n40 DCCF = 0.315

2.4 GHz BLE

Channel	Frequency (MHz)	Antenna Gain (dBi)	Conducted Output Power (dBm)		Output Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Result
			1 Mbps	2 Mbps				
Low	2402	2.6	4.38	4.39	30	6.99	<36	Pass
Middle	2440	2.6	4.05	4.09	30	6.69	<36	Pass
High	2480	2.6	3.71	3.77	30	6.37	<36	Pass

Note: The EIRP evaluated in the BLE table above uses the highest conducted output power to calculate EIRP

Note: EIRP [dBm] = Conducted Output Power [dBm]+Antenna Gain [dBi]

Note: For eirp limit, dBm=10log(Power[mW]/1mW)=10log(4000mW/1mW)=36dBm

Please refer to Annex B for detailed test results.

10 FCC §15.247(e) & ISEDC RSS-247 §5.2(2) – Peak Power Spectral Density

10.1 Applicable Standards

According to ECFR §15.247(e) and RSS-247 §5.2 (2) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

10.2 Measurement Procedure

The measurements are based on FCC KDB 558074 D01 DTS Meas Guidance v05r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.4: Maximum power spectral density level in the fundamental emission.


As per ANSI C63.10 Clause 11.10: Maximum power spectral density level in the fundamental emission

Some regulatory requirements specify a conducted PSD limit within the DTS bandwidth during any time interval of continuous transmission.⁸⁸ Such specifications require that the same method as used to determine the conducted output power shall be used to determine the power spectral density. If maximum peak conducted output power was measured, then the peak PSD procedure 11.10.2 (method PKPSD) shall be used. If maximum conducted output power was measured, then one of the average PSD procedures shall be used, as applicable based on the following criteria (the peak PSD procedure is also an acceptable option):

Method PKPSD (peak PSD): The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

- a. Set analyzer center frequency to DTS channel center frequency.
- b. Set the span to 1.5 times the DTS bandwidth.
- c. Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d. Set the VBW $\geq [3 \times \text{RBW}]$.
- e. Detector = peak.
- f. Sweep time = auto couple.
- g. Trace mode = max hold.
- h. Allow trace to fully stabilize.
- i. Use the peak marker function to determine the maximum amplitude level within the RBW.
- j. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

10.3 Test Setup Block Diagram

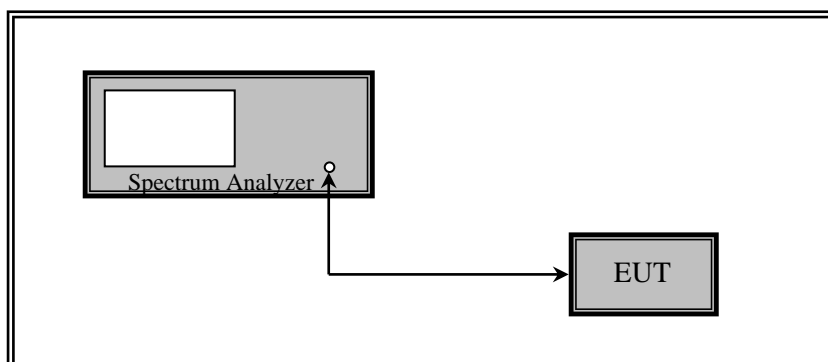

10.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
624	Agilent	Spectrum Analyzer	E4446A	MY48250238	05-12-2023	1 year

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

10.5 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Libass Thiaw from 02/20/2024 to 02/27/2024 at RF test site.

10.6 Test Results

2.4 GHz Wi-Fi

Channel	Frequency (MHz)	PSD (dBm/10kHz)		Total PSD (dBm/10kHz)	Limit (dBm/3kHz)
		Antenna A	Antenna B		
802.11b					
Low	2412	-4.000	-2.660	-	8
Middle	2437	-0.330	0.720	-	8
High	2462	-2.450	-1.170	-	8
802.11g					
Low	2412	-7.230	-6.520	-	8
Middle	2437	-0.790	-0.030	-	8
High	2462	-7.210	-6.360	-	8
802.11n20					
Low	2412	-6.290	-5.590	-2.920	8
Middle	2437	-0.440	0.650	3.150	8
High	2462	-8.650	-7.760	-5.170	8
802.11n40					
Low	2422	-11.9	-10.15	-7.930	8
Middle	2437	-2.380	-1.730	0.970	8
High	2452	-11.1	-11.81	-8.430	8
802.11ax20					
Low	2412	-6.090	-4.900	-2.440	8
Middle	2437	-0.840	-0.440	2.370	8
High	2462	-5.280	-5.100	-2.180	8
802.11ax40					
Low	2422	-15.13	-13.57	-11.27	8
Middle	2437	-8.140	-7.550	-4.820	8
High	2452	-15.73	-14.89	-12.28	8

Note: The EUT passed with stringent RBW of 10 kHz, thus complied with FCC and IC RBW requirement of 3 kHz.

2.4 GHz BLE

Channel	Frequency (MHz)	PSD (dBm/10kHz)		Limit (dBm/3kHz)
		1 Mbps	2 Mbps	
Low	2402	-5.55	-6.44	<8
Middle	2440	-5.32	-5.81	<8
High	2480	-5.83	-7.00	<8

Note: The EUT passed with stringent RBW of 10 kHz, thus complied with FCC and IC RBW requirement of 3 kHz.

Fully Loaded Compared to RU PSD for ax20 modes

RU Power Setting	Frequency (MHz)	Fully Loaded PSD (dBm/10kHz)		Total Fully Loaded (dBm/10kHz)	Partial PSD (dBm/10kHz)		Total Partial (dBm/10kHz)
		ANT A	ANT B		ANT A	ANT B	
RU 26							
8	2412	-6.09	-4.90	-2.44	-5.97	-5.73	-2.84
13	2437	-0.84	-0.44	2.37	-1.60	-0.34	2.09
8	2462	-5.28	-5.1	-2.18	-5.80	-5.60	-2.69
RU 52							
7	2412	-6.09	-4.90	-2.44	-7.19	-8.35	-4.72
12	2437	-0.84	-0.44	2.37	-2.22	-1.16	1.35
7	2462	-5.28	-5.10	-2.18	-6.94	-5.57	-3.19
RU 106							
7	2412	-6.09	-4.90	-2.44	-6.96	-6.21	-3.56
12	2437	-0.84	-0.44	2.37	-2.62	-1.44	1.02
7	2462	-5.28	-5.1	-2.18	-6.32	-5.66	-2.97

Note: confirmed that OOB evaluated and partial loaded RU produced higher margins than fully loaded

Please refer to Annex C and Annex H for detailed test results.

11 FCC §15.247(d) & ISEDC RSS-247 §5.5 – Spurious Emissions at Antenna Terminal and 100 kHz Band Edges

11.1 Applicable Standards

According to FCC §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emissions limits specified in §15.209(a) see §15.205(c).

According to ISEDC RSS-247 §5.5. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

11.2 Measurement Procedure

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW = 100 kHz


VBW = 300 kHz

Sweep = coupled

Detector function = peak

Trace = max hold

11.3 Test Setup Block Diagram

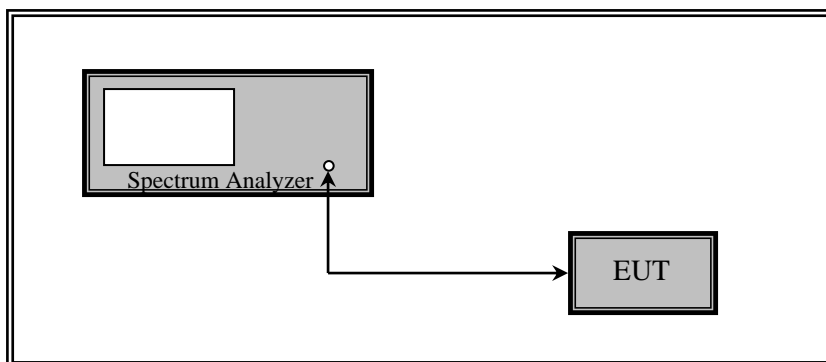

11.4 Test Equipment List and Details

BACL No.	Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
624	Agilent	Spectrum Analyzer	E4446A	MY48250238	05-12-2023	1 year

Note¹: cables, attenuators and notch filters included in the test set-up were checked each time before testing.

Statement of Traceability: *BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to NIST or to another internationally recognized National Metrology Institute (NMI), and were compliant with the latest version of A2LA policy P102 “A2LA Policy on Metrological Traceability”.*

11.5 Test Environmental Conditions

Temperature:	22°C
Relative Humidity:	53%
ATM Pressure:	101.5 kPa

The testing was performed by Libass Thiaw from 02/20/2024 to 02/27/2024 at RF test site

11.6 Test Results

Please refer to Annexes E, F, and G for detailed test results.

12 Appendix A (Normative) – EUT Test Setup Photographs

Please refer to the attachment.

13 Appendix B (Normative) – EUT External Photographs

Please refer to the attachment.

14 Appendix C (Normative) – EUT Internal Photographs

Please refer to the attachment.

15 Appendix D (Normative) – A2LA Electrical Testing Certificate



Please follow the web link below for a full ISO 17025 scope.

<https://www.a2la.org/scopepdf/3297-02.pdf>

--- END OF REPORT ---