



BUREAU VERITAS

Test Report No.: RF160927N056



TEST REPORT



Applicant	TP-LINK TECHNOLOGIES CO., LTD.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Manufacturer or Supplier	TP-LINK TECHNOLOGIES CO., LTD.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Product	300Mbps Wireless N Ceiling Mount Access Point
Brand Name	TP-LINK
Model	CAP300
Additional Model & Model Difference	N/A
Date of tests	Apr. 07, 2016 ~ May 22, 2016

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Harry Li Project Engineer / EMC Department	Approved by Glyn He Supervisor/ EMC Department
	 Date: Nov. 08, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 6

 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 9

 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 9

3.3 DUTY CYCLE OF TEST SIGNAL11

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 12

3.5 DESCRIPTION OF SUPPORT UNITS..... 12

4 TEST TYPES AND RESULTS..... 13

4.1 CONDUCTED EMISSION MEASUREMENT 13

 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 13

 4.1.2 TEST INSTRUMENTS..... 13

 4.1.3 TEST PROCEDURES 14

 4.1.4 DEVIATION FROM TEST STANDARD 14

 4.1.5 TEST SETUP 15

 4.1.6 EUT OPERATING CONDITIONS 15

 4.1.7 TEST RESULTS 16

4.2 RADIATED EMISSION MEASUREMENT 18

 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 18

 4.2.2 TEST INSTRUMENTS..... 19

 4.2.3 TEST PROCEDURES 20

 4.2.4 DEVIATION FROM TEST STANDARD 20

 4.2.5 TEST SETUP 21

 4.2.6 EUT OPERATING CONDITIONS 21

 4.2.7 TEST RESULTS 22

4.3 6DB BANDWIDTH MEASUREMENT 36

 4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 36

 4.3.2 TEST INSTRUMENTS..... 36

 4.3.3 TEST PROCEDURE..... 36

 4.3.4 DEVIATION FROM TEST STANDARD 36



4.3.5	TEST SETUP	37
4.3.6	EUT OPERATING CONDITIONS	37
4.3.7	TEST RESULTS	38
4.4	CONDUCTED OUTPUT POWER	42
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	42
4.4.2	TEST SETUP	42
4.4.3	TEST INSTRUMENTS	42
4.4.4	TEST PROCEDURES	43
4.4.5	DEVIATION FROM TEST STANDARD	43
4.4.6	EUT OPERATING CONDITIONS	43
4.4.7	TEST RESULTS	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	46
4.5.2	TEST SETUP	46
4.5.3	TEST INSTRUMENTS	46
4.5.4	TEST PROCEDURE	46
4.5.5	DEVIATION FROM TEST STANDARD	46
4.5.6	EUT OPERATING CONDITION	47
4.5.7	TEST RESULTS	47
4.6	OUT OF BAND EMISSION MEASUREMENT	51
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	51
4.6.2	TEST SETUP	51
4.6.3	TEST INSTRUMENTS	51
4.6.4	TEST PROCEDURE	51
4.6.5	DEVIATION FROM TEST STANDARD	52
4.6.6	EUT OPERATING CONDITION	52
4.6.7	TEST RESULTS	53
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	65
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	66



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160407N028	Original release	May 22, 2016
RF160927N056	Based on the original report RF160407N028 changed the model no. and replace adapter, add one of the function switch, It need to retested radiated emission below 1GHz and conducted emission after engineer evaluated.	Nov. 08, 2016



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.67dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.84dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	300Mbps Wireless N Ceiling Mount Access Point
MODEL NO.	CAP300
FCC ID	TE7CAP300
NOMINAL VOLTAGE	DC 9V from adaptor Support 802.3af PoE
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
AVERAGE POWER	28.00dBm (Measured Average Power)
ANTENNA TYPE	Integral Antenna; 3.2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT incorporates a MIMO function. Physically, the EUT provides two transmitters and two receivers.

MODULATION MODE	FUNCTION
802.11b	2TX/2RX
802.11g	2TX/2RX
802.11n (HT20)	2TX/2RX
802.11n (HT40)	2TX/2RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 160927N056) for detailed product photo.
5. Model CAP300 is identical with the test model EAP115 except the model no, replace adapter and the switch for trading purpose.



6. The EUT can be powered by adapter as list as attach:

ADAPTER 1	
BRAND:	TP-LINK
MODEL:	T090060-2B1
INPUT:	AC 100-240V, 50/60Hz 0.3A Max.
OUTPUT:	DC 9V, 0.6A
DC LINE:	Unshielded, Non-detachable, 1.5m.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	Powered by adaptor with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) Link

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11g	1 to 11	1	OFDM	BPSK	6.0	X



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	X

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 55%RH	DC 9V From Adapter	Sen He
RE≥1G	25deg. C, 55%RH	DC 9V From Adapter	Sen He
PLC	20deg. C, 56%RH	DC 9V From Adapter	Sen He
APCM	20deg. C, 55%RH	DC 9V From Adapter	Harry Li

3.3 DUTY CYCLE OF TEST SIGNAL

Chain 0:

Duty cycle of test signal is 100 %

Chain 1:

Duty cycle of test signal is 100 %



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C, Section 15.247**
- KDB 558074 D01 DTS Meas Guidance v03r05**
- KDB 662911 D01 v02r01**
- ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	5P2PM2X	12400120329	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 0.8m; DC Line: Unshielded, Undetachable 1.8m
2	RJ45 Line: Unshielded, Detachable 1.5m



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101588	Jan. 22,16	Jan. 21,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

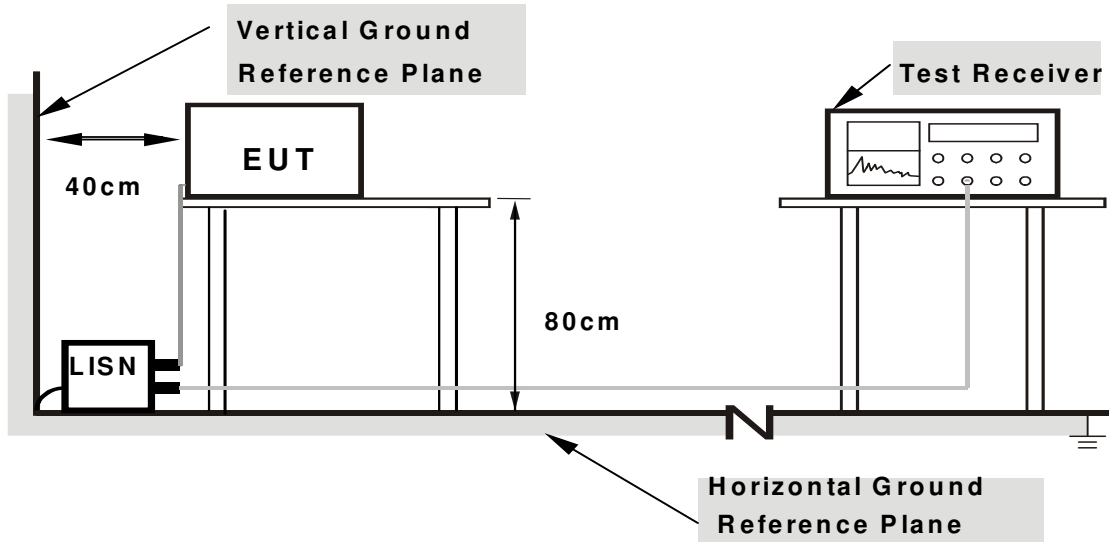

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: WIFI link mode

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.62193	10.3	38.25	26.49	48.55	36.79	56	46	-7.45	-9.21
2	0.64705	10.3	37.87	27.55	48.17	37.85	56	46	-7.83	-8.15
3	10.7925	10.51	40.61	31.72	51.12	42.23	60	50	-8.88	-7.77
4	11.8927	10.52	40.89	32.35	51.41	42.87	60	50	-8.59	-7.13
5	13.3575	10.53	41.16	32.92	51.69	43.45	60	50	-8.31	-6.55
6	16.2285	10.57	40.86	33.66	51.43	44.23	60	50	-8.57	-5.77

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

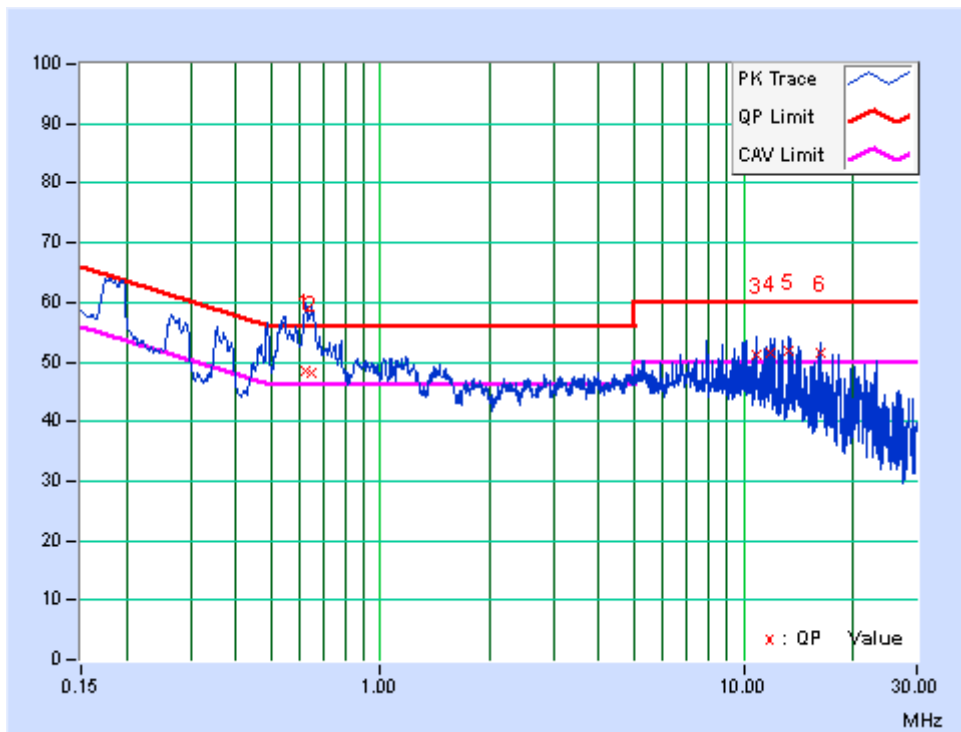




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.62193	9.94	30.41	21.19	40.35	31.13	56	46	-15.65	-14.87
2	10.7925	10.40	41.02	28.94	51.42	39.34	60	50	-8.58	-10.66
3	11.89275	10.44	43.05	30.32	53.49	40.76	60	50	-6.51	-9.24
4	13.3575	10.48	43.36	31.76	53.84	42.24	60	50	-6.16	-7.76
5	16.2285	10.54	41.85	33.78	52.39	44.32	60	50	-7.61	-5.68
6	23.127	10.72	40.60	32.22	51.32	42.94	60	50	-8.68	-7.06

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

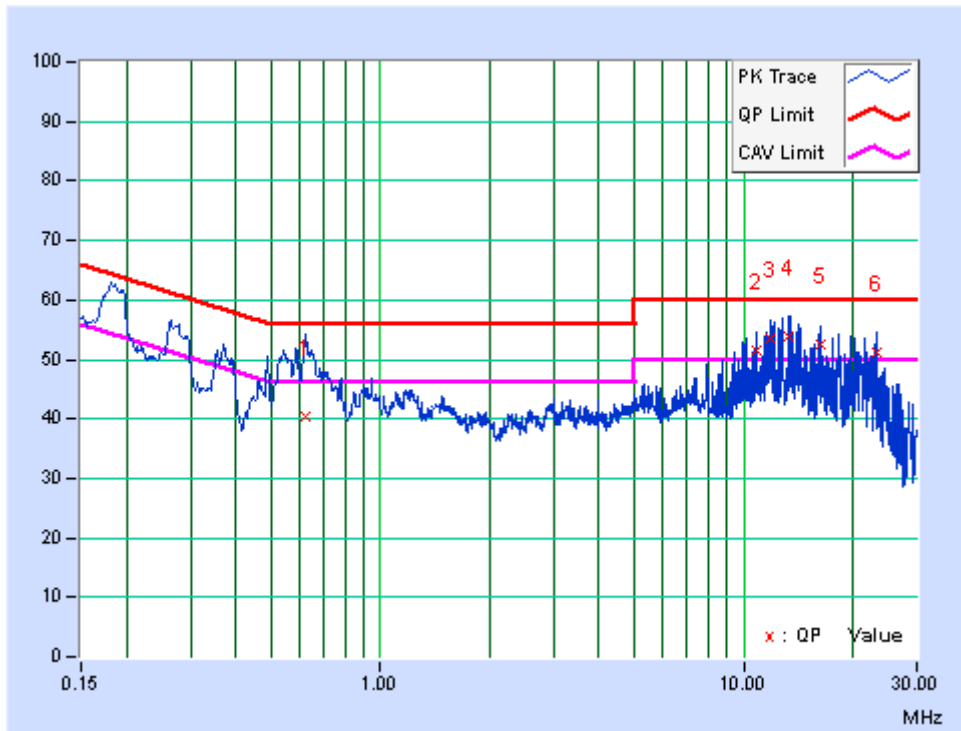



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 30, 14	May 29, 16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 494399.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

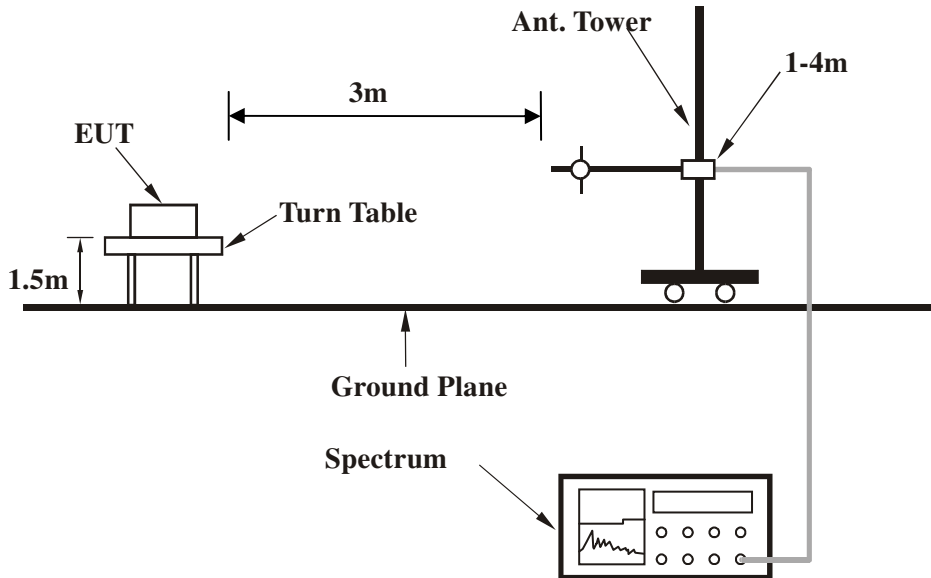

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	266.59	20.75	46	-25.25	100	0	33.94	-13.19
2	351.71	23.51	46	-22.49	100	0	34.35	-10.84
3	390.69	28.61	46	-17.39	100	0	38.12	-9.51
4	413.57	25.34	46	-20.66	100	0	34.00	-8.66
5	562.17	26.02	46	-19.98	100	0	29.93	-3.91
6	658.92	26.39	46	-19.61	100	0	29.73	-3.34

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

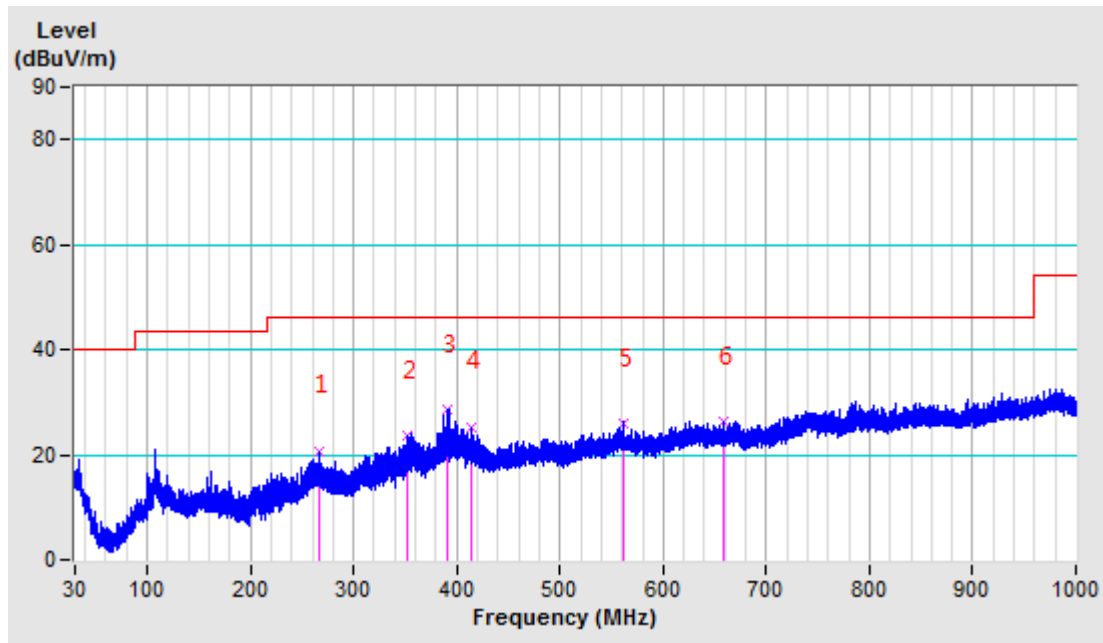




CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	32.97	32.04	40.00	-7.96	100	0	44.28	-12.24
2	107.48	24.55	43.50	-18.95	100	0	42.38	-17.83
3	161.95	21.95	43.50	-21.55	100	0	39.23	-17.28
4	390.99	25.37	46.00	-20.63	100	0	34.85	-9.48
5	559.41	25.59	46.00	-20.41	100	0	29.39	-3.80
6	870.60	33.33	46.00	-12.67	100	0	32.39	0.94

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

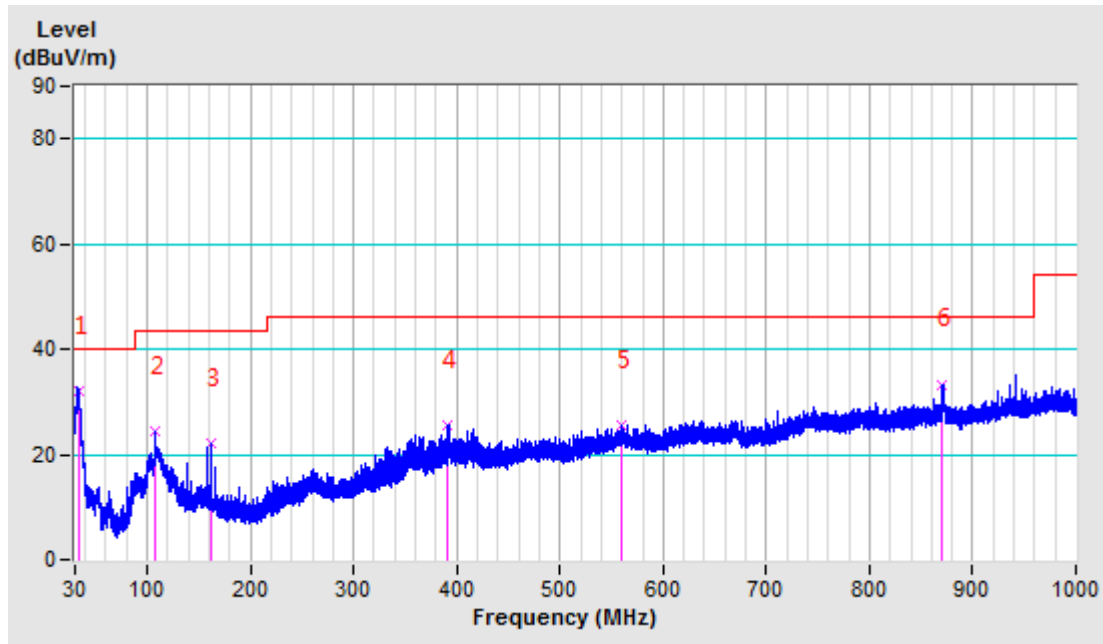



ABOVE 1GHz DATA
802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	112.2 PK			1.53 H	276	75.02	37.21
2	*2412.00	104.0 AV			1.53 H	276	66.83	37.21
3	2390.00	59.6 PK	74.0	-14.4	1.08 H	142	22.42	37.15
4	2390.00	48.8 AV	54.0	-5.2	1.08 H	142	11.62	37.15
5	4824.00	47.5 PK	74.0	-26.5	1.04 H	278	40.94	6.59
6	4824.00	33.8 AV	54.0	-20.2	1.04 H	278	27.23	6.59
7	#7236.00	55.6 PK	82.2	-26.6	1.02 H	242	43.34	12.28
8	#7236.00	41.9 AV	74.0	-32.1	1.02 H	242	29.59	12.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	116.1 PK			1.12 V	254	78.91	37.21
2	*2412.00	106.4 AV			1.12 V	254	69.23	37.21
3	2390.00	64.6 PK	74.0	-9.4	1.15 V	327	27.46	37.15
4	2390.00	53.1 AV	54.0	-0.9	1.15 V	327	15.97	37.15
5	4824.00	47.3 PK	74.0	-26.7	1.08 V	42	40.71	6.59
6	4824.00	34.9 AV	54.0	-19.1	1.08 V	42	28.31	6.59
7	#7236.00	54.9 PK	86.1	-31.2	1.02 V	223	42.63	12.28
8	#7236.00	40.8 AV	76.4	-35.6	1.02 V	223	28.56	12.28

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	118.9 PK			1.52 H	263	81.60	37.29
2	*2437.00	110.1 AV			1.52 H	263	72.80	37.29
3	2390.00	65.6 PK	74.0	-8.4	1.08 H	46	28.40	37.15
4	2390.00	49.8 AV	54.0	-4.2	1.08 H	46	12.63	37.15
5	2483.50	63.8 PK	74.0	-10.2	1.02 H	217	26.40	37.43
6	2483.50	48.6 AV	54.0	-5.4	1.02 H	217	11.20	37.43
7	4874.00	48.0 PK	74.0	-26.0	1.01 H	122	41.29	6.73
8	4874.00	35.9 AV	54.0	-18.1	1.01 H	122	29.17	6.73
9	7311.00	56.4 PK	74.0	-17.6	1.00 H	41	43.99	12.42
10	7311.00	40.0 AV	54.0	-14.0	1.00 H	41	27.61	12.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	123.5 PK			1.28 V	62	86.20	37.29
2	*2437.00	112.2 AV			1.28 V	62	74.92	37.29
3	2390.00	68.4 PK	74.0	-5.6	1.42 V	163	31.20	37.15
4	2390.00	53.4 AV	54.0	-0.6	1.42 V	163	16.25	37.15
5	2483.50	65.3 PK	74.0	-8.7	1.02 V	41	27.90	37.43
6	2483.50	52.4 AV	54.0	-1.6	1.02 V	41	14.96	37.43
7	4874.00	48.3 PK	74.0	-25.7	1.12 V	218	41.53	6.73
8	4874.00	36.8 AV	54.0	-17.2	1.12 V	218	30.11	6.73
9	7311.00	56.3 PK	74.0	-17.7	1.02 V	23	43.88	12.42
10	7311.00	40.9 AV	54.0	-13.1	1.02 V	23	28.47	12.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	116.0 PK			1.52 H	339	78.62	37.37
2	*2462.00	106.6 AV			1.52 H	339	69.21	37.37
3	2483.50	64.0 PK	74.0	-10.0	1.47 H	39	26.60	37.43
4	2483.50	52.4 AV	54.0	-1.6	1.47 H	39	14.99	37.43
5	4924.00	46.9 PK	74.0	-27.1	1.02 H	87	39.97	6.88
6	4924.00	34.3 AV	54.0	-19.7	1.02 H	87	27.38	6.88
7	7386.00	56.2 PK	74.0	-17.8	1.00 H	214	43.64	12.57
8	7386.00	40.7 AV	54.0	-13.3	1.00 H	214	28.17	12.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	118.0 PK			1.52 V	248	80.63	37.37
2	*2462.00	107.4 AV			1.52 V	248	70.02	37.37
3	2483.50	67.4 PK	74.0	-6.6	1.02 V	36	30.00	37.43
4	2483.50	53.8 AV	54.0	-0.2	1.02 V	36	16.39	37.43
5	4924.00	48.2 PK	74.0	-25.8	1.02 V	5	41.35	6.88
6	4924.00	35.7 AV	54.0	-18.3	1.02 V	5	28.78	6.88
7	7386.00	56.8 PK	74.0	-17.2	1.00 V	87	44.27	12.57
8	7386.00	41.1 AV	54.0	-12.9	1.00 V	87	28.55	12.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	112.6 PK			1.94 H	225	75.36	37.21
2	*2412.00	103.4 AV			1.94 H	225	66.14	37.21
3	2390.00	63.6 PK	74.0	-10.4	1.27 H	214	26.47	37.15
4	2390.00	52.2 AV	54.0	-1.8	1.27 H	214	15.01	37.15
5	4824.00	48.1 PK	74.0	-25.9	1.05 H	46	41.53	6.59
6	4824.00	36.3 AV	54.0	-17.7	1.05 H	46	29.73	6.59
7	#7236.00	56.9 PK	82.6	-25.7	1.00 H	263	44.64	12.28
8	#7236.00	41.7 AV	73.4	-31.7	1.00 H	263	29.46	12.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	116.8 PK			1.28 V	44	79.60	37.21
2	*2412.00	105.6 AV			1.28 V	44	68.36	37.21
3	2390.00	65.8 PK	74.0	-8.2	1.66 V	207	28.60	37.15
4	2390.00	53.2 AV	54.0	-0.8	1.66 V	207	16.06	37.15
5	4824.00	46.6 PK	74.0	-27.4	1.02 V	222	40.04	6.59
6	4824.00	35.3 AV	54.0	-18.7	1.02 V	222	28.70	6.59
7	#7236.00	56.4 PK	86.8	-30.4	1.12 V	27	44.14	12.28
8	#7236.00	41.0 AV	75.6	-34.6	1.12 V	27	28.74	12.28

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.9 PK			1.63 H	39	82.60	37.29
2	*2437.00	109.1 AV			1.63 H	39	71.79	37.29
3	2390.00	65.8 PK	74.0	-8.2	1.11 H	44	28.60	37.15
4	2390.00	51.5 AV	54.0	-2.5	1.11 H	44	14.36	37.15
5	2483.50	63.7 PK	74.0	-10.3	1.32 H	241	26.30	37.43
6	2483.50	51.8 AV	54.0	-2.2	1.32 H	241	14.33	37.43
7	4874.00	47.0 PK	74.0	-27.0	1.02 H	262	40.22	6.73
8	4874.00	35.1 AV	54.0	-18.9	1.02 H	262	28.40	6.73
9	7311.00	55.9 PK	74.0	-18.1	1.02 H	263	43.45	12.42
10	7311.00	41.0 AV	54.0	-13.0	1.02 H	263	28.61	12.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	122.9 PK			1.88 V	97	85.60	37.29
2	*2437.00	113.5 AV			1.88 V	97	76.24	37.29
3	2390.00	68.7 PK	74.0	-5.3	1.02 V	52	31.50	37.15
4	2390.00	53.4 AV	54.0	-0.6	1.02 V	52	16.22	37.15
5	2483.50	64.7 PK	74.0	-9.3	1.54 V	88	27.25	37.43
6	2483.50	52.5 AV	54.0	-1.5	1.54 V	88	15.10	37.43
7	4874.00	48.2 PK	74.0	-25.8	1.09 V	216	41.47	6.73
8	4874.00	36.4 AV	54.0	-17.6	1.09 V	216	29.66	6.73
9	7311.00	57.4 PK	74.0	-16.6	1.02 V	21	45.00	12.42
10	7311.00	42.2 AV	54.0	-11.8	1.02 V	21	29.74	12.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.0 PK			1.82 H	172	75.60	37.37
2	*2462.00	104.2 AV			1.82 H	172	66.87	37.37
3	2483.50	63.0 PK	74.0	-11.0	1.42 H	211	25.60	37.43
4	2483.50	53.1 AV	54.0	-0.9	1.42 H	211	15.62	37.43
5	4924.00	48.2 PK	74.0	-25.8	1.03 H	325	41.33	6.88
6	4924.00	35.3 AV	54.0	-18.7	1.03 H	325	28.41	6.88
7	7386.00	57.5 PK	74.0	-16.5	1.00 H	128	44.91	12.57
8	7386.00	42.3 AV	54.0	-11.7	1.00 H	128	29.69	12.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.0 PK			2.01 V	328	79.60	37.37
2	*2462.00	106.3 AV			2.01 V	328	68.92	37.37
3	2483.50	67.1 PK	74.0	-6.9	1.62 V	214	29.70	37.43
4	2483.50	53.7 AV	54.0	-0.3	1.62 V	214	16.28	37.43
5	4924.00	47.0 PK	74.0	-27.0	1.02 V	216	40.15	6.88
6	4924.00	35.9 AV	54.0	-18.1	1.02 V	216	29.06	6.88
7	7386.00	56.2 PK	74.0	-17.8	1.02 V	216	43.66	12.57
8	7386.00	41.0 AV	54.0	-13.0	1.02 V	216	28.45	12.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11n 20MHz

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	111.9 PK			1.02 H	222	74.69	37.21
2	*2412.00	102.2 AV			1.02 H	222	65.02	37.21
3	2390.00	62.6 PK	74.0	-11.4	1.08 H	4	25.44	37.15
4	2390.00	51.8 AV	54.0	-2.2	1.08 H	4	14.62	37.15
5	4824.00	46.6 PK	74.0	-27.4	1.02 H	2	40.03	6.59
6	4824.00	35.2 AV	54.0	-18.8	1.02 H	2	28.63	6.59
7	#7236.00	56.1 PK	81.9	-25.8	1.02 H	62	43.83	12.28
8	#7236.00	40.8 AV	72.2	-31.4	1.02 H	62	28.48	12.28

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	115.9 PK			1.98 V	52	78.67	37.21
2	*2412.00	107.2 AV			1.98 V	52	69.99	37.21
3	2390.00	66.8 PK	74.0	-7.2	1.54 V	8	29.60	37.15
4	2390.00	53.5 AV	54.0	-0.5	1.54 V	8	16.31	37.15
5	4824.00	48.6 PK	74.0	-25.4	1.08 V	239	42.02	6.59
6	4824.00	36.3 AV	54.0	-17.7	1.08 V	239	29.70	6.59
7	#7236.00	57.4 PK	85.9	-28.5	1.00 V	185	45.14	12.28
8	#7236.00	42.0 AV	77.2	-35.2	1.00 V	185	29.75	12.28

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.7 PK			1.69 H	36	80.36	37.29
2	*2437.00	109.2 AV			1.69 H	36	71.87	37.29
3	2390.00	64.8 PK	74.0	-9.2	1.02 H	21	27.60	37.15
4	2390.00	52.3 AV	54.0	-1.7	1.02 H	21	15.11	37.15
5	2483.50	62.3 PK	74.0	-11.7	1.24 H	217	24.90	37.43
6	2483.50	51.4 AV	54.0	-2.6	1.24 H	217	14.01	37.43
7	4874.00	47.9 PK	74.0	-26.1	1.02 H	214	41.19	6.73
8	4874.00	36.3 AV	54.0	-17.7	1.02 H	214	29.60	6.73
9	7311.00	56.7 PK	74.0	-17.3	1.02 H	222	44.27	12.42
10	7311.00	41.0 AV	54.0	-13.0	1.02 H	222	28.60	12.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	119.9 PK			1.29 V	107	82.60	37.29
2	*2437.00	110.8 AV			1.29 V	107	73.49	37.29
3	2390.00	68.4 PK	74.0	-5.6	1.88 V	136	31.26	37.15
4	2390.00	53.6 AV	54.0	-0.4	1.88 V	136	16.42	37.15
5	2483.50	56.0 PK	74.0	-18.0	1.03 V	62	18.60	37.43
6	2483.50	52.0 AV	54.0	-2.0	1.03 V	62	14.58	37.43
7	4874.00	47.8 PK	74.0	-26.2	1.05 V	81	41.09	6.73
8	4874.00	35.3 AV	54.0	-18.7	1.05 V	81	28.53	6.73
9	7311.00	55.9 PK	74.0	-18.1	1.00 V	258	43.52	12.42
10	7311.00	41.1 AV	54.0	-12.9	1.00 V	258	28.64	12.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.6 PK			1.33 H	325	77.20	37.37
2	*2462.00	104.3 AV			1.33 H	325	66.94	37.37
3	2483.50	64.5 PK	74.0	-9.5	1.06 H	211	27.02	37.43
4	2483.50	51.4 AV	54.0	-2.6	1.06 H	211	14.01	37.43
5	4924.00	46.9 PK	74.0	-27.1	1.06 H	9	40.03	6.88
6	4924.00	35.8 AV	54.0	-18.2	1.06 H	9	28.88	6.88
7	7386.00	56.6 PK	74.0	-17.4	1.00 H	47	44.06	12.57
8	7386.00	41.2 AV	54.0	-12.8	1.00 H	47	28.61	12.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.0 PK			1.18 V	77	79.60	37.37
2	*2462.00	107.4 AV			1.18 V	77	70.05	37.37
3	2483.50	67.4 PK	74.0	-6.6	1.92 V	216	29.96	37.43
4	2483.50	53.6 AV	54.0	-0.4	1.92 V	216	16.17	37.43
5	4924.00	48.2 PK	74.0	-25.8	1.28 V	147	41.28	6.88
6	4924.00	36.3 AV	54.0	-17.7	1.28 V	147	29.38	6.88
7	7386.00	56.7 PK	74.0	-17.3	1.00 V	236	44.17	12.57
8	7386.00	41.2 AV	54.0	-12.8	1.00 V	236	28.65	12.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n 40MHz

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2422.00	106.3 PK			1.44 H	61	69.02	37.24
2	*2422.00	97.4 AV			1.44 H	61	60.17	37.24
3	2390.00	65.8 PK	74.0	-8.2	1.21 H	86	28.60	37.15
4	2390.00	52.2 AV	54.0	-1.8	1.21 H	86	15.03	37.15
5	4844.00	48.0 PK	74.0	-26.0	1.02 H	214	41.38	6.65
6	4844.00	35.1 AV	54.0	-18.9	1.02 H	214	28.46	6.65
7	7266.00	56.9 PK	74.0	-17.1	1.02 H	88	44.61	12.33
8	7266.00	41.2 AV	54.0	-12.8	1.02 H	88	28.86	12.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2422.00	109.8 PK			1.68 V	10	72.60	37.24
2	*2422.00	100.7 AV			1.68 V	10	63.47	37.24
3	2390.00	69.8 PK	74.0	-4.2	1.44 V	246	32.60	37.15
4	2390.00	53.6 AV	54.0	-0.4	1.44 V	246	16.42	37.15
5	4844.00	48.0 PK	74.0	-26.0	1.00 V	58	41.37	6.65
6	4844.00	35.7 AV	54.0	-18.3	1.00 V	58	29.01	6.65
7	7266.00	55.9 PK	74.0	-18.1	1.01 V	47	43.61	12.33
8	7266.00	40.7 AV	54.0	-13.3	1.01 V	47	28.41	12.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	111.2 PK			1.71 H	49	73.90	37.29
2	*2437.00	101.5 AV			1.71 H	49	64.18	37.29
3	2390.00	64.8 PK	74.0	-9.2	1.11 H	228	27.60	37.15
4	2390.00	52.3 AV	54.0	-1.7	1.11 H	228	15.12	37.15
5	2483.50	63.2 PK	74.0	-10.8	1.20 H	36	25.80	37.43
6	2483.50	52.1 AV	54.0	-1.9	1.20 H	36	14.69	37.43
7	4874.00	47.6 PK	74.0	-26.4	1.00 H	258	40.88	6.73
8	4874.00	35.8 AV	54.0	-18.2	1.00 H	258	29.09	6.73
9	7311.00	56.0 PK	74.0	-18.0	1.06 H	92	43.60	12.42
10	7311.00	41.2 AV	54.0	-12.8	1.06 H	92	28.75	12.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	114.0 PK			1.12 V	285	76.66	37.29
2	*2437.00	104.2 AV			1.12 V	285	66.89	37.29
3	2390.00	67.3 PK	74.0	-6.7	1.24 V	22	30.11	37.15
4	2390.00	53.3 AV	54.0	-0.7	1.24 V	22	16.18	37.15
5	2483.50	63.5 PK	74.0	-10.5	1.08 V	74	26.10	37.43
6	2483.50	52.1 AV	54.0	-1.9	1.08 V	74	14.62	37.43
7	4874.00	47.0 PK	74.0	-27.0	1.02 V	58	40.22	6.73
8	4874.00	35.0 AV	54.0	-19.0	1.02 V	58	28.25	6.73
9	7311.00	55.7 PK	74.0	-18.3	1.00 V	222	43.32	12.42
10	7311.00	40.6 AV	54.0	-13.4	1.00 V	222	28.19	12.42

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	110.1 PK			1.99 H	219	72.74	37.34
2	*2452.00	101.2 AV			1.99 H	219	63.88	37.34
3	2483.50	64.8 PK	74.0	-9.2	1.83 H	352	27.40	37.43
4	2483.50	52.1 AV	54.0	-1.9	1.83 H	352	14.67	37.43
5	4904.00	48.3 PK	74.0	-25.7	1.02 H	215	41.44	6.82
6	4904.00	36.4 AV	54.0	-17.6	1.02 H	215	29.57	6.82
7	7356.00	57.2 PK	74.0	-16.8	1.01 H	147	44.65	12.51
8	7356.00	42.0 AV	54.0	-12.0	1.01 H	147	29.48	12.51

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	112.9 PK			1.84 V	21	75.60	37.34
2	*2452.00	103.4 AV			1.84 V	21	66.03	37.34
3	2483.50	67.5 PK	74.0	-6.5	1.02 V	233	30.04	37.43
4	2483.50	53.7 AV	54.0	-0.3	1.02 V	233	16.22	37.43
5	4904.00	47.1 PK	74.0	-26.9	1.02 V	214	40.29	6.82
6	4904.00	35.3 AV	54.0	-18.7	1.02 V	214	28.50	6.82
7	7356.00	55.9 PK	74.0	-18.1	1.00 V	22	43.35	12.51
8	7356.00	40.3 AV	54.0	-13.7	1.00 V	22	27.77	12.51

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 27,15	May 26,16
Power Sensor	Keysight	U2021XA	MY55060018	May 27,15	May 26,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP

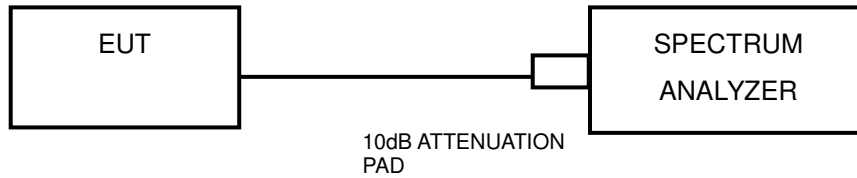

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.07	10.08	0.5	PASS
6	2437	10.08	10.10	0.5	PASS
11	2462	10.09	9.61	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.15	15.16	0.5	PASS
6	2437	15.15	15.16	0.5	PASS
11	2462	15.15	15.16	0.5	PASS



802.11n 20MHz


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.16	15.17	0.5	PASS
6	2437	15.15	15.15	0.5	PASS
11	2462	15.15	15.14	0.5	PASS

802.11n 40MHz

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	33.90	33.92	0.5	PASS
6	2437	33.95	33.94	0.5	PASS
9	2452	33.89	33.85	0.5	PASS




CHAIN 0

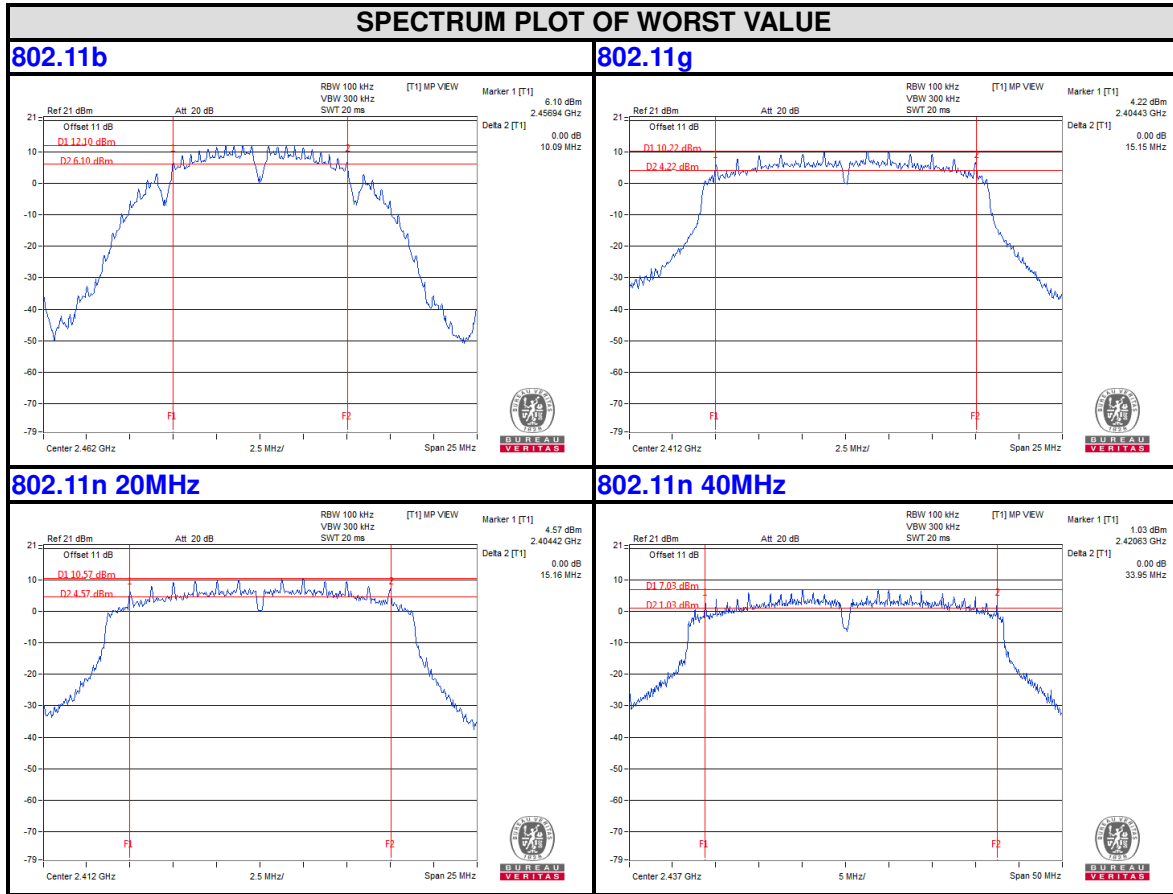



CHAIN 1

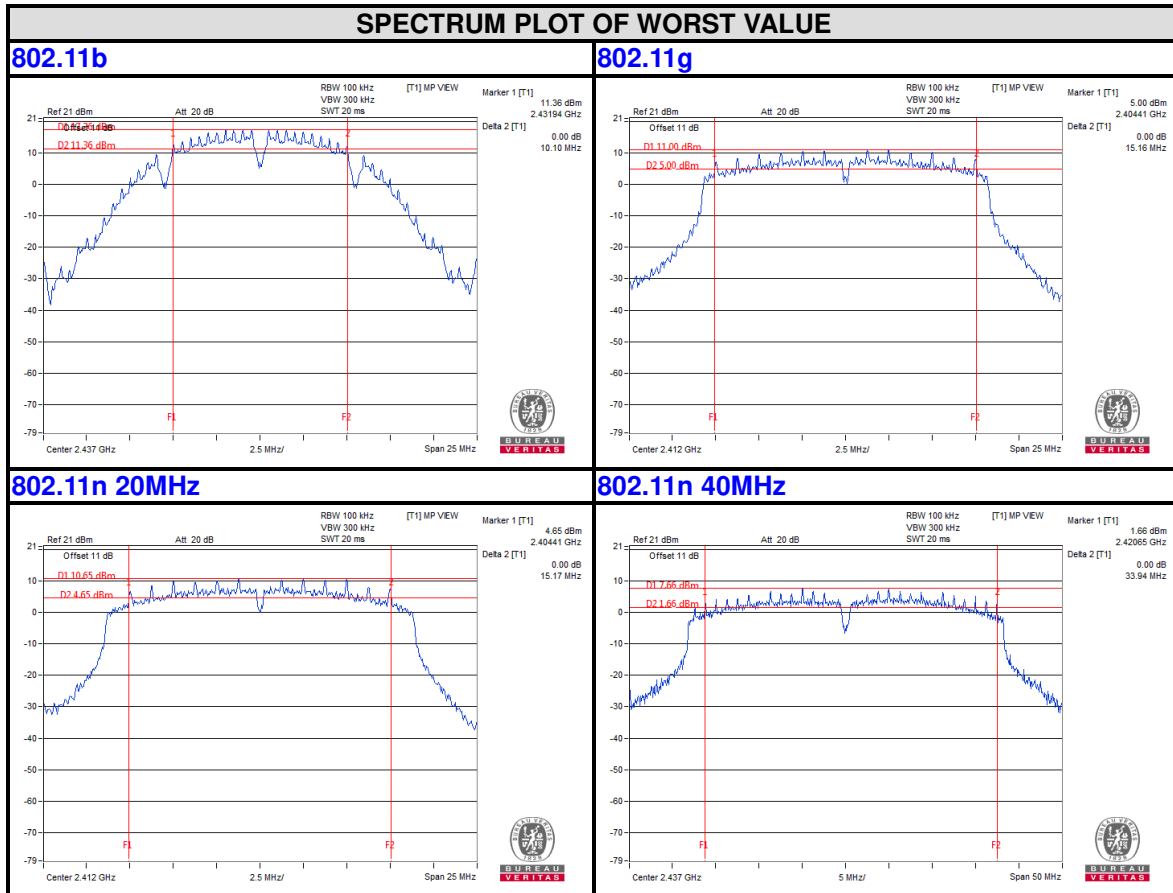




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.4.2 TEST SETUP

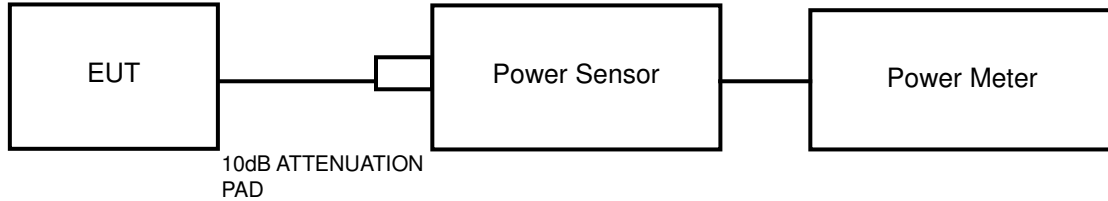

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 27,15	May 26,16
Power Sensor	Keysight	U2021XA	MY55060018	May 27,15	May 26,16
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.4.4 TEST PROCEDURES

An Average power sensor was used on the output port of the EUT. An Average power meter was used to read the response of the Average power sensor. Record the Average power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

802.11b

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	20.63	20.77	115.611	119.399	235.010	23.71	30	PASS
6	2437	24.97	25.01	314.051	316.957	631.008	28.00	30	PASS
11	2462	21.97	22.04	157.398	159.956	317.354	25.02	30	PASS

802.11g

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	21.05	21.17	127.350	130.918	258.268	24.12	30	PASS
6	2437	24.80	24.95	301.995	312.608	614.603	27.89	30	PASS
11	2462	22.12	22.21	162.930	166.341	329.271	25.18	30	PASS



802.11n 20MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	20.71	20.79	117.761	119.950	237.711	23.76	30	PASS
6	2437	24.63	24.70	290.402	295.121	585.523	27.68	30	PASS
11	2462	21.81	21.92	151.705	155.597	307.302	24.88	30	PASS

802.11n 40MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
3	2422	16.81	17.08	47.973	51.050	99.023	19.96	30	PASS
6	2437	20.13	20.27	103.039	106.414	209.453	23.21	30	PASS
9	2452	19.46	19.63	88.308	91.833	180.141	22.56	30	PASS




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 10 kHz.
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.



4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-8.49	3.01	-5.48	7.79	PASS
	6	2437	-1.80	3.01	1.21	7.79	PASS
	11	2462	-7.00	3.01	-3.99	7.79	PASS
1	1	2412	-7.93	3.01	-4.92	7.79	PASS
	6	2437	-2.17	3.01	0.84	7.79	PASS
	11	2462	-6.98	3.01	-3.97	7.79	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $3.2\text{dBi} + 10\log(2) = 6.21$, so the limit about power density need to reduce 0.21dB.

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-9.80	3.01	-6.79	7.79	PASS
	6	2437	-3.59	3.01	-0.58	7.79	PASS
	11	2462	-8.30	3.01	-5.29	7.79	PASS
1	1	2412	-8.61	3.01	-5.60	7.79	PASS
	6	2437	-3.54	3.01	-0.53	7.79	PASS
	11	2462	-7.40	3.01	-4.39	7.79	PASS

NOTE:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $3.2\text{dBi} + 10\log(2) = 6.21$, so the limit about power density need to reduce 0.21dB.



802.11n 20MHz

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-10.23	3.01	-7.22	7.79	PASS
	6	2437	-4.32	3.01	-1.31	7.79	PASS
	11	2462	-8.48	3.01	-5.47	7.79	PASS
1	1	2412	-9.58	3.01	-6.57	7.79	PASS
	6	2437	-4.33	3.01	-1.32	7.79	PASS
	11	2462	-8.51	3.01	-5.50	7.79	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $3.2\text{dBi} + 10\log(2) = 6.21$, so the limit about power density need to reduce 0.21dB.

802.11n 40MHz


TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	3	2422	-16.23	3.01	-13.22	7.79	PASS
	6	2437	-12.31	3.01	-9.30	7.79	PASS
	9	2452	-12.85	3.01	-9.84	7.79	PASS
1	3	2422	-15.43	3.01	-12.42	7.79	PASS
	6	2437	-11.87	3.01	-8.86	7.79	PASS
	9	2452	-13.06	3.01	-10.05	7.79	PASS

NOTE:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain = $3.2\text{dBi} + 10\log(2) = 6.21$, so the limit about power density need to reduce 0.21dB.




CHAIN 0

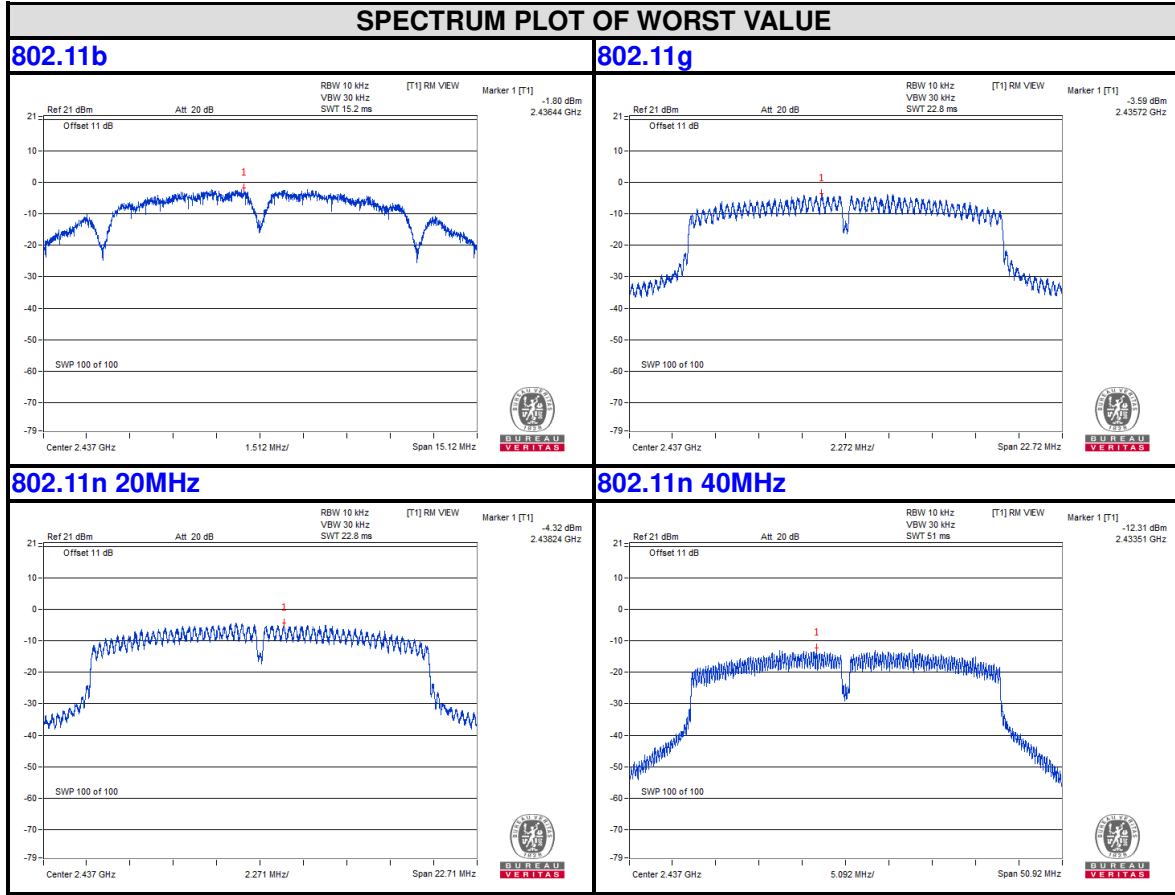



CHAIN 1

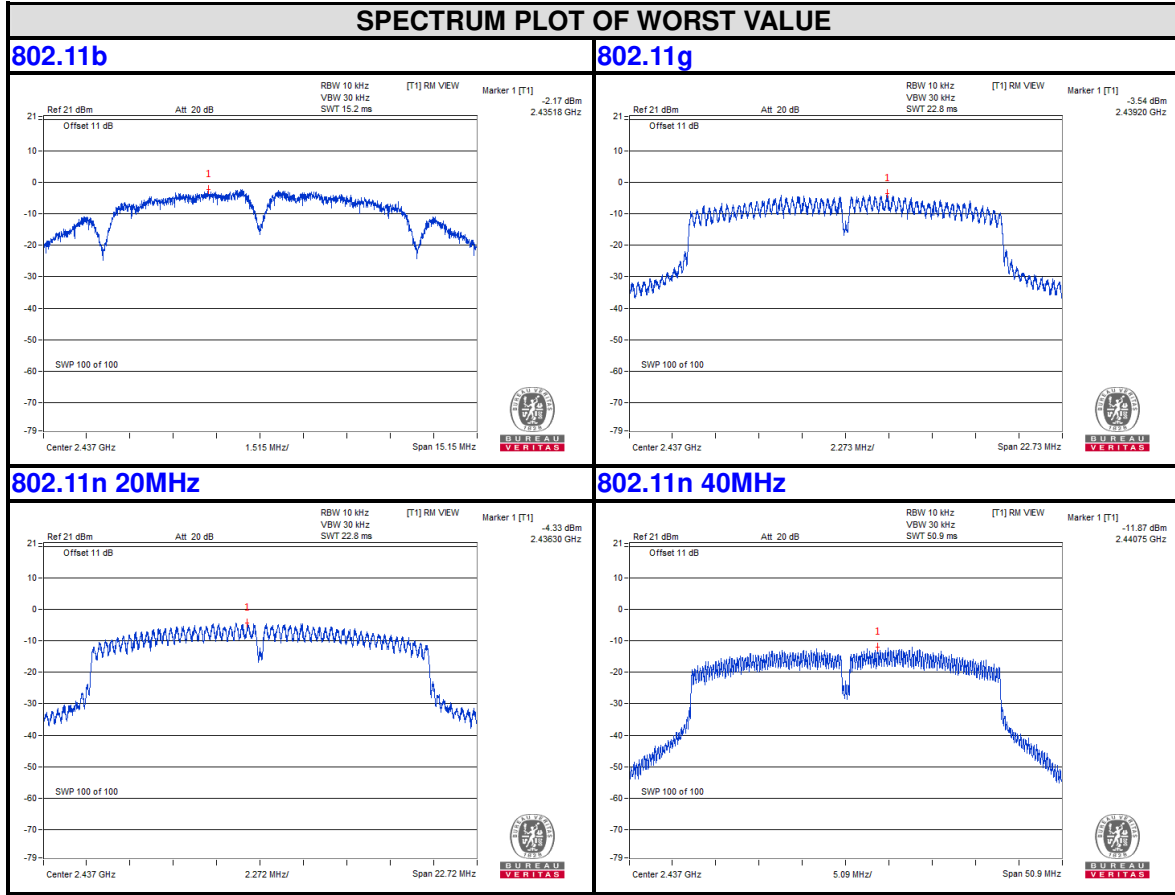




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

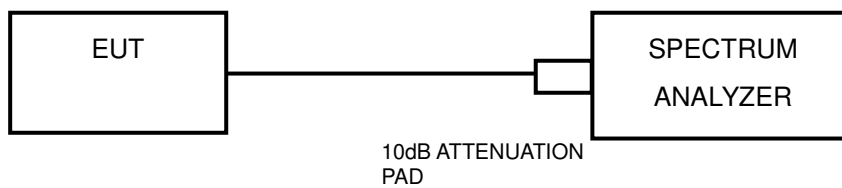

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6





4.6.7 TEST RESULTS



802.11b

CHAIN 0



CH 1

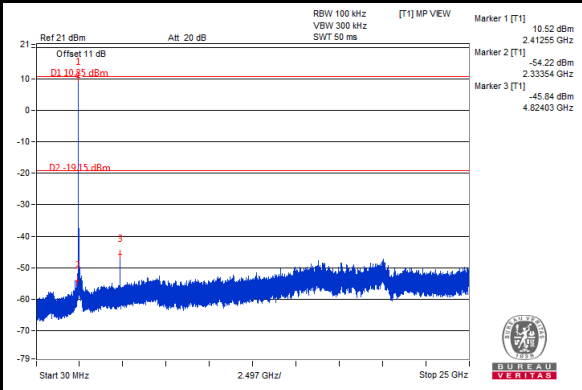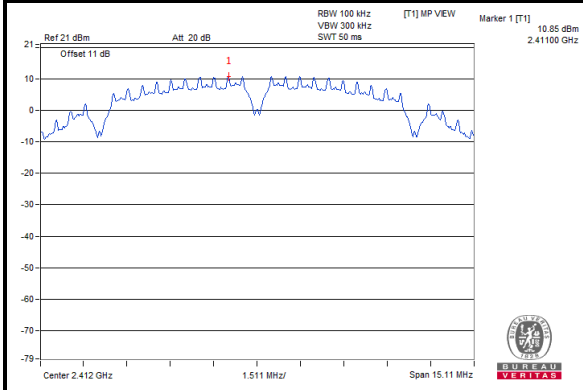

CH 6

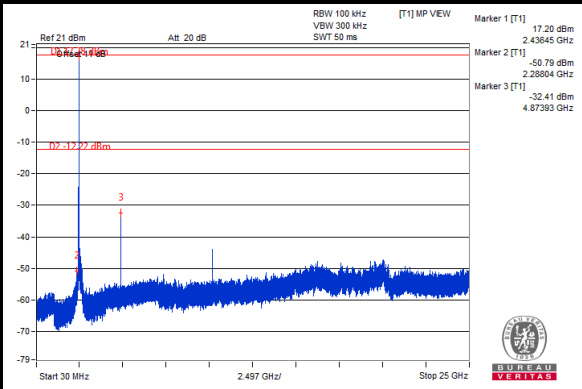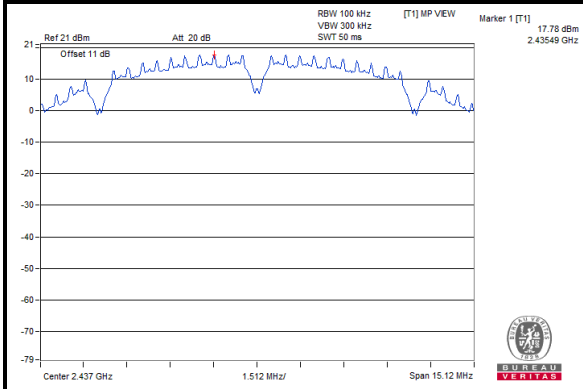

CH 11

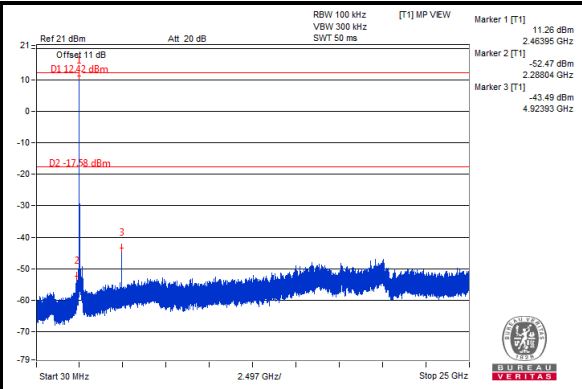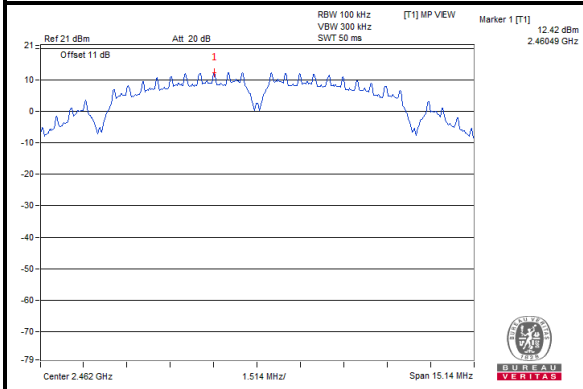





**BUREAU
VERITAS**



Test Report No.: RF160927N056

CHAIN 1



CH 1

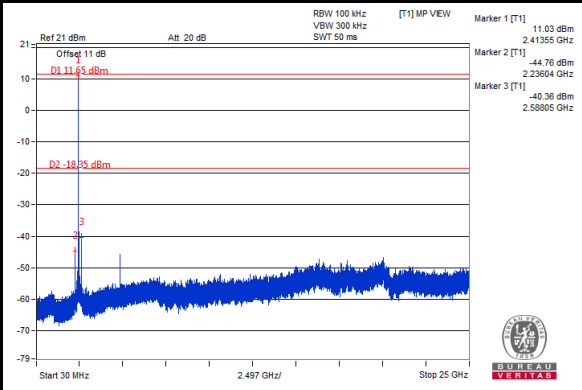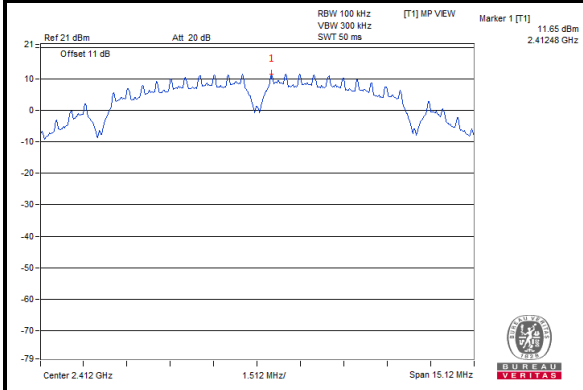

CH 6

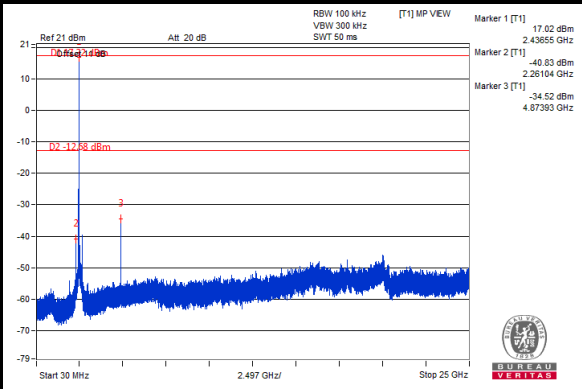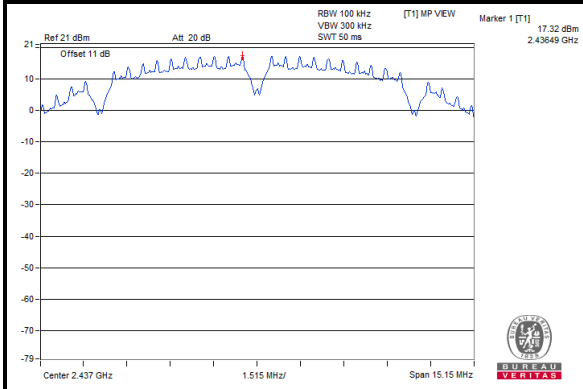

CH 11

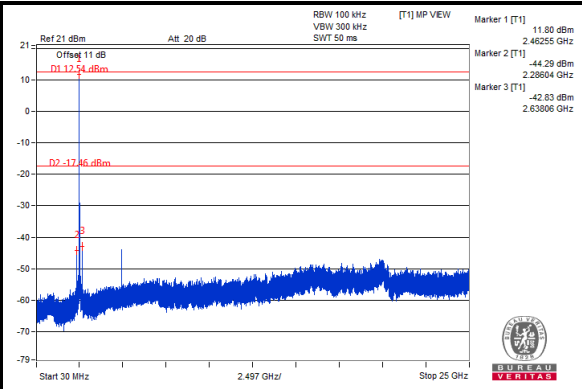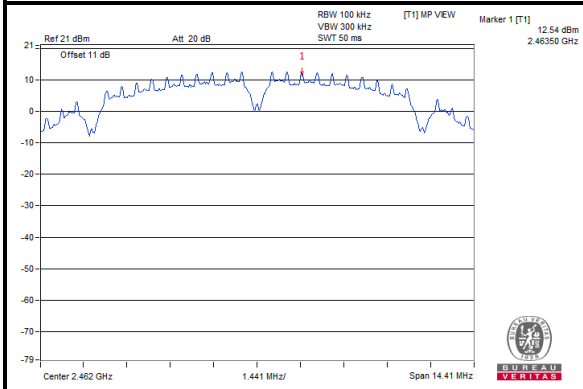







Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





802.11g
CHAIN 0
CH 1

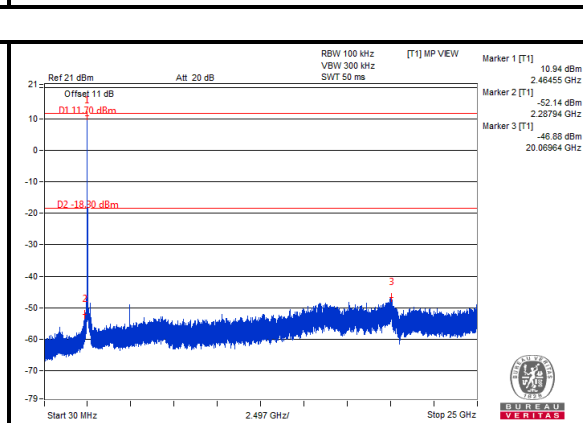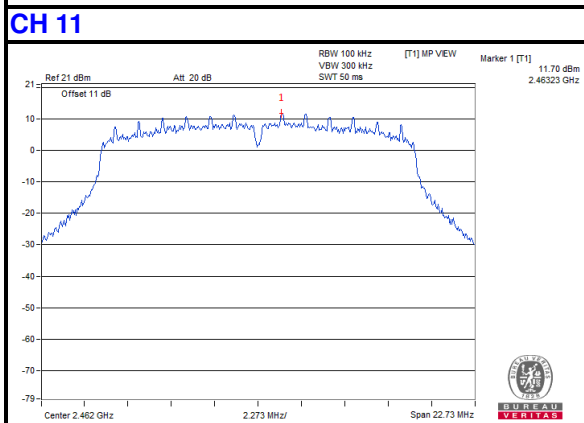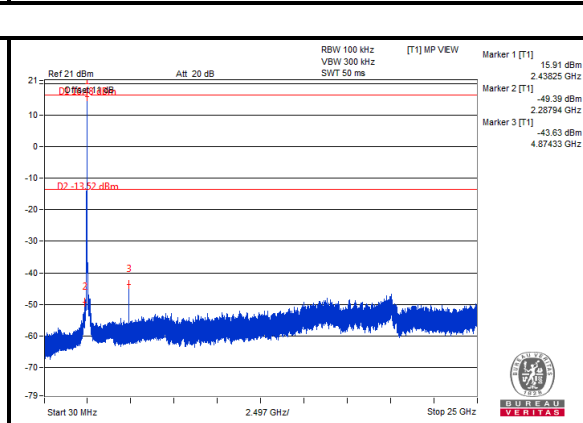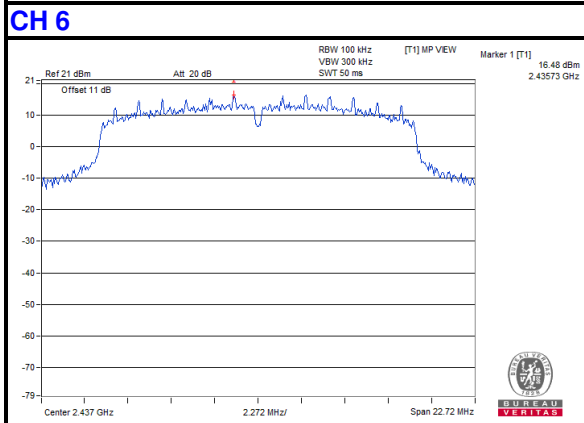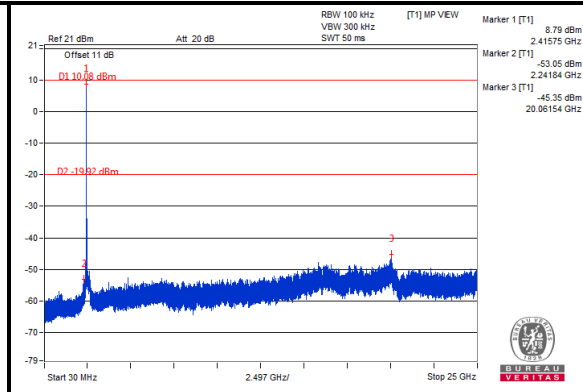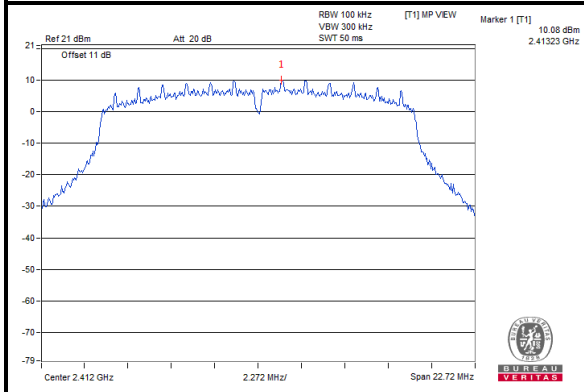





CHAIN 1



CH 1

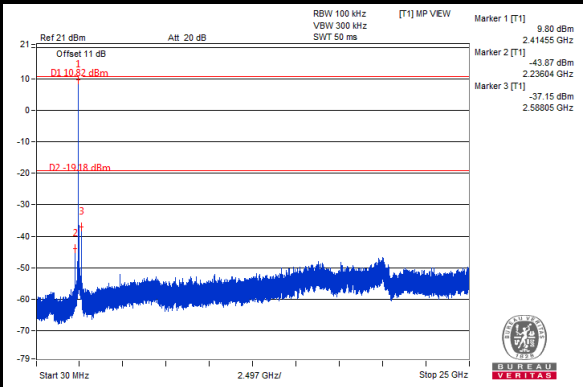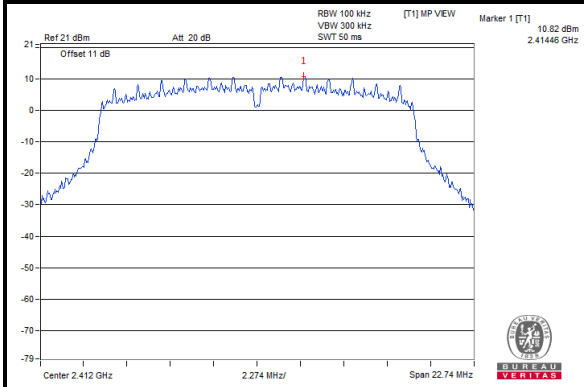

CH 6

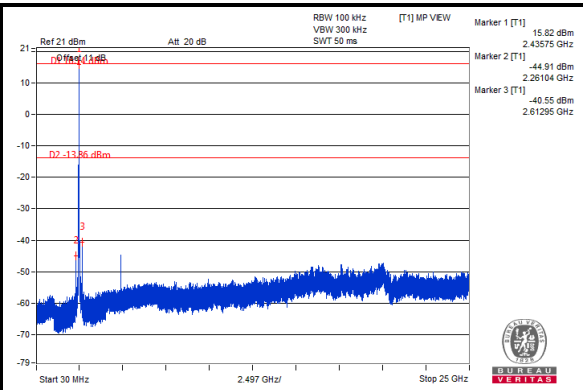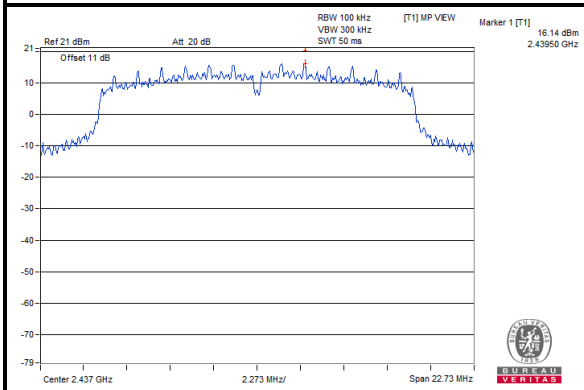

CH 11

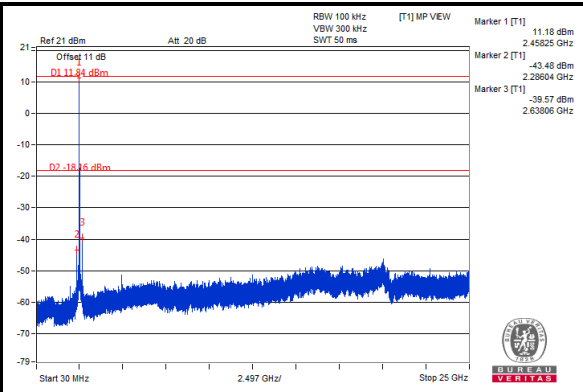
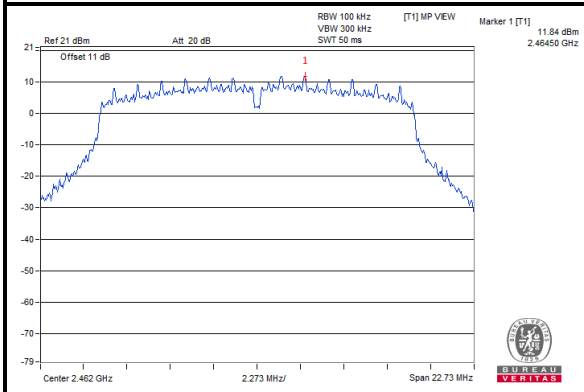






802.11n 20MHz

CHAIN 0



CH 1

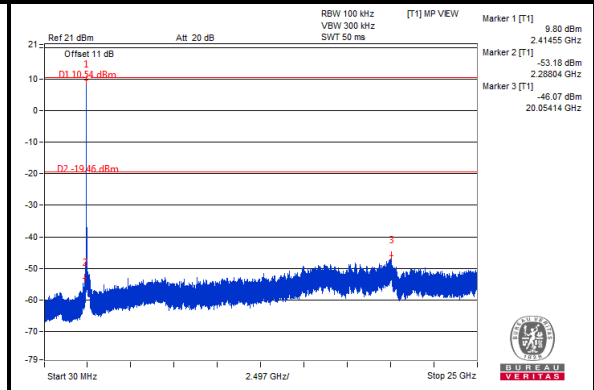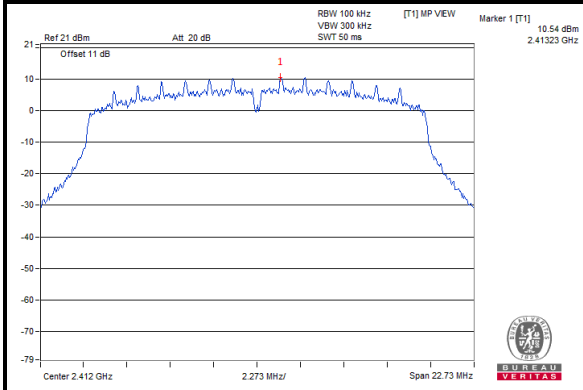

CH 6

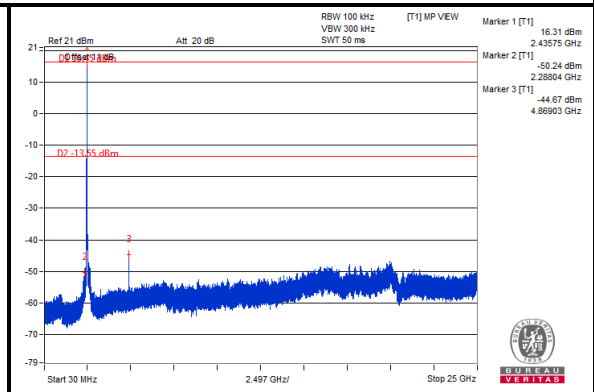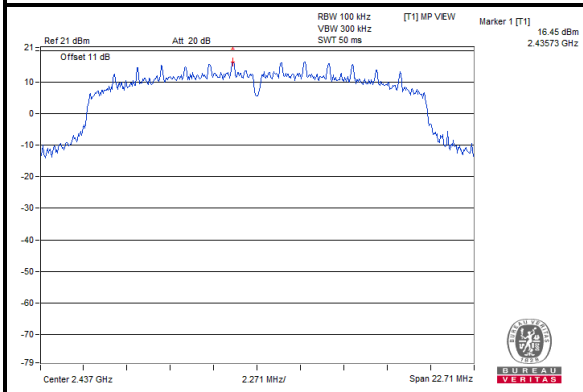

CH 11

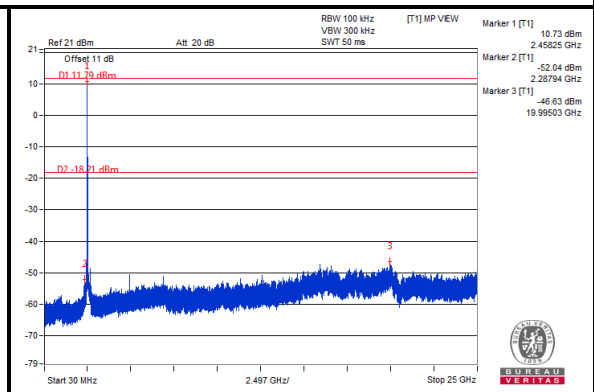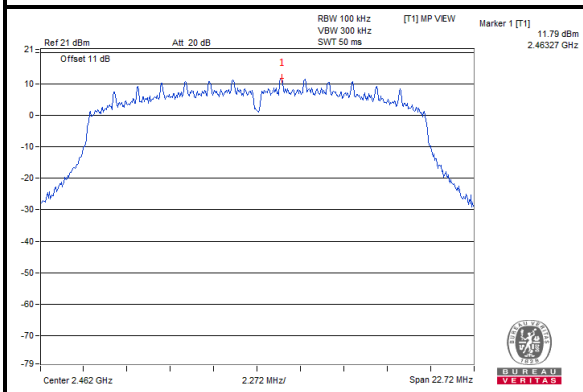




BUREAU VERITAS


Test Report No.: RF160927N056

CHAIN 1


CH 1

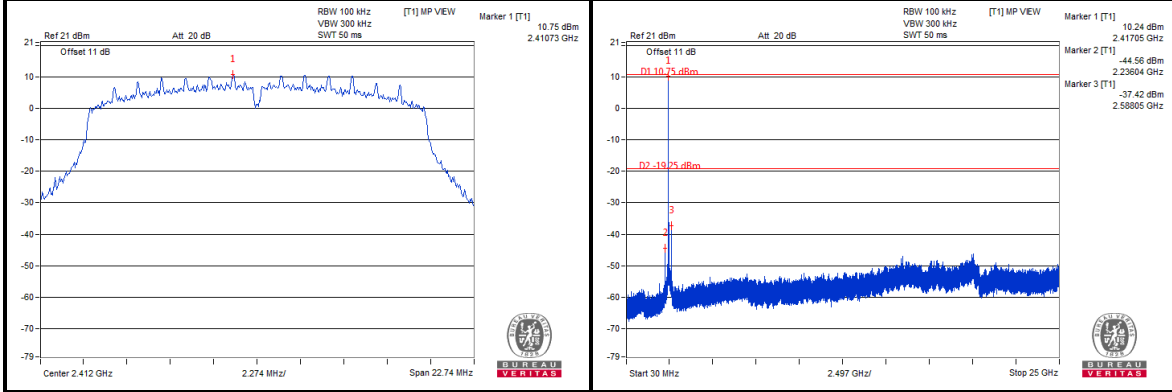

CH 6

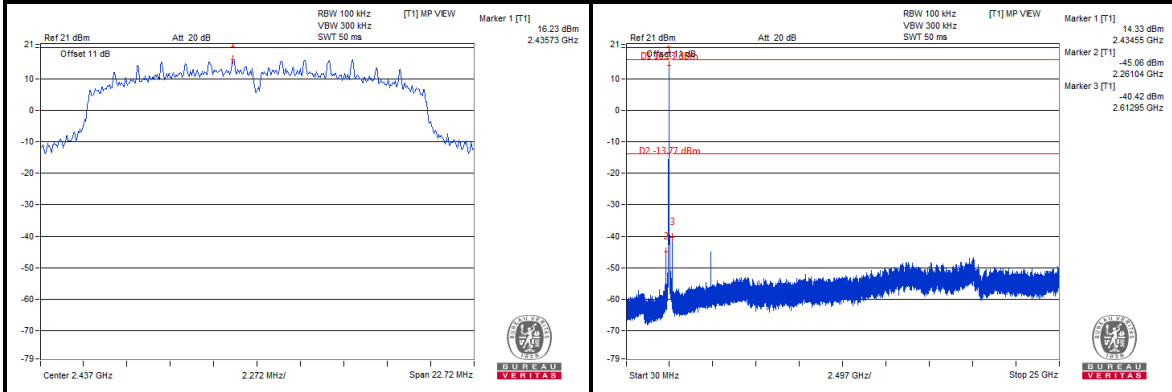

CH 11


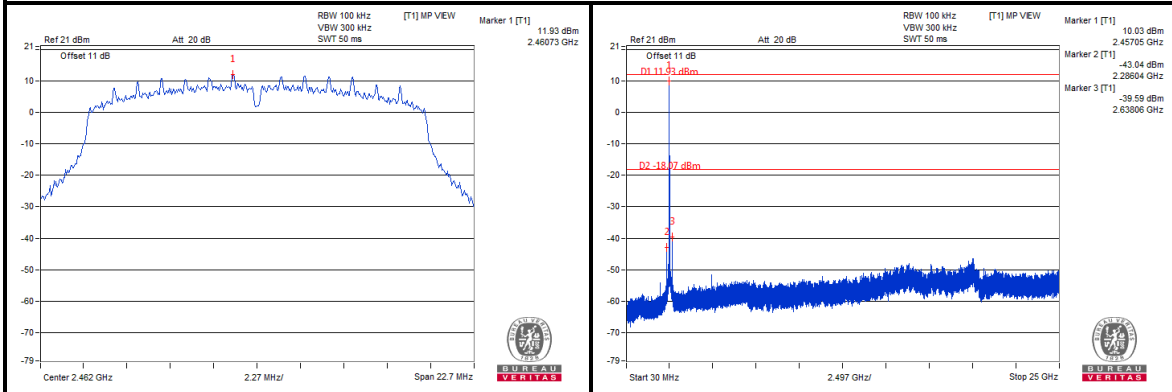






802.11n 40MHz

CHAIN 0



CH 3

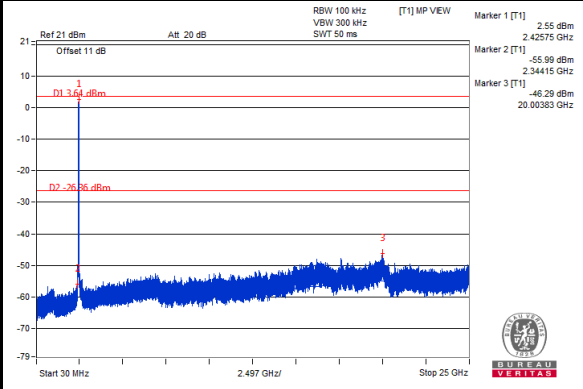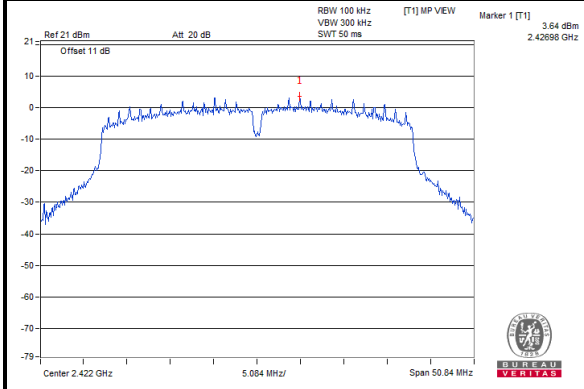

CH 6

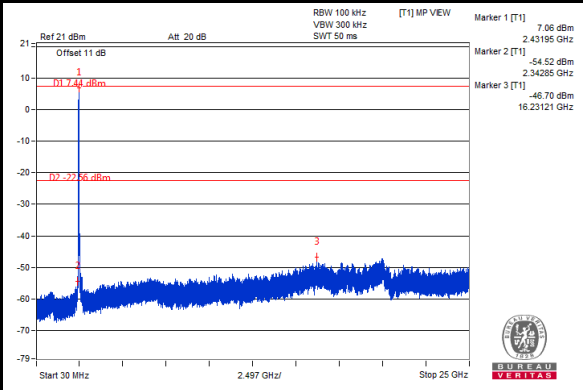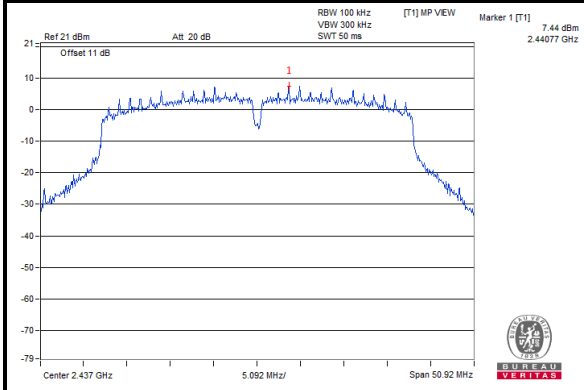



CH 9

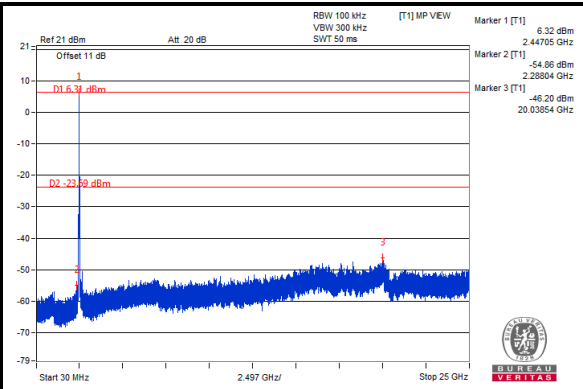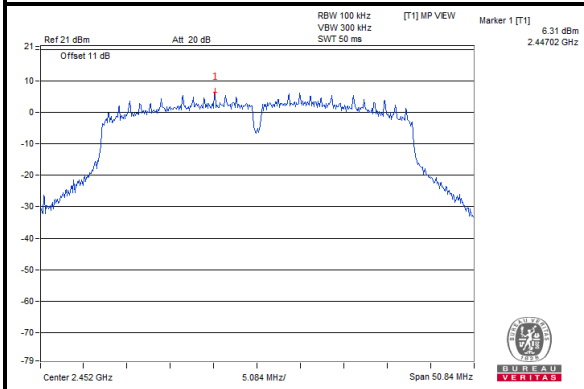





CHAIN 1



CH 3

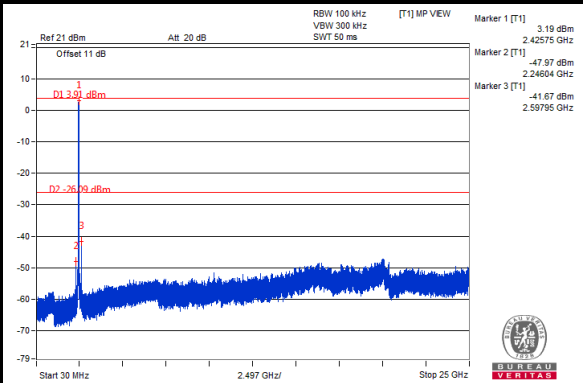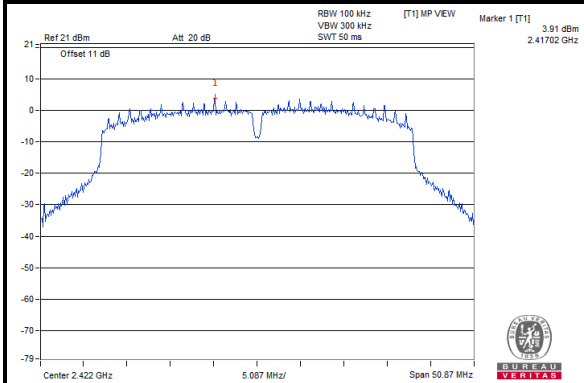

CH 6

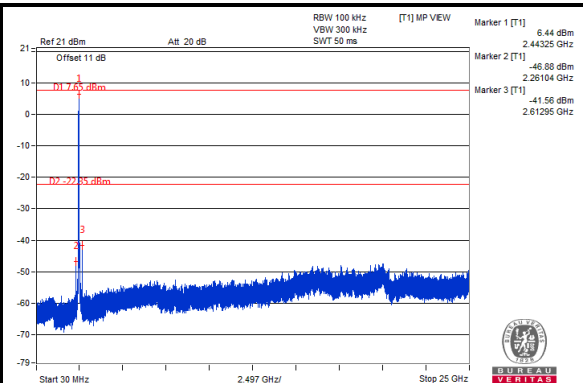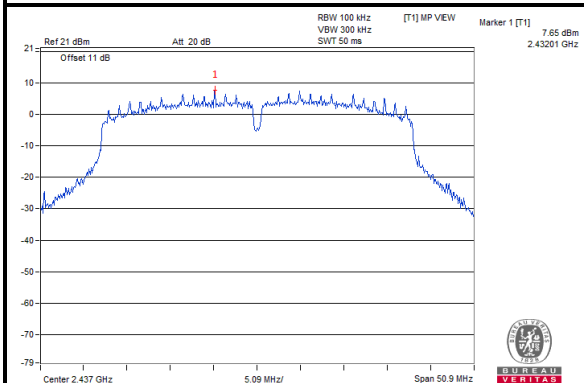

CH 9

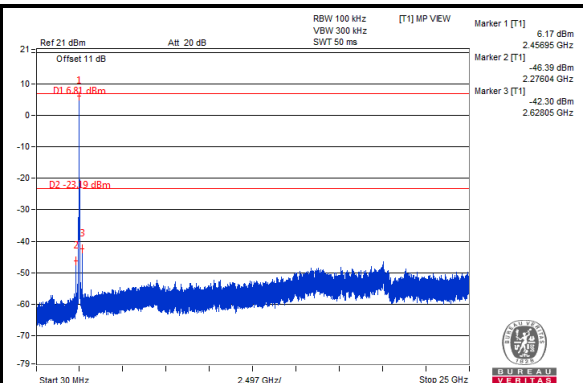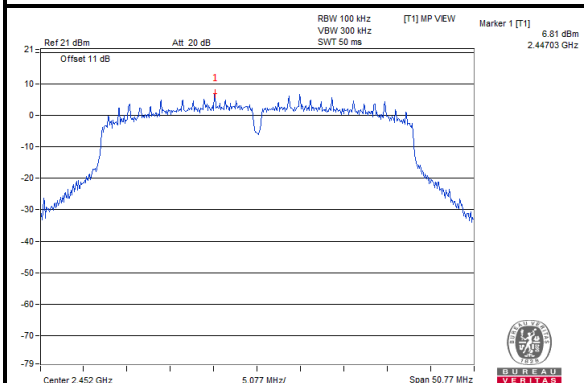





802.11b

CHAIN 0

CH 1 Band edge

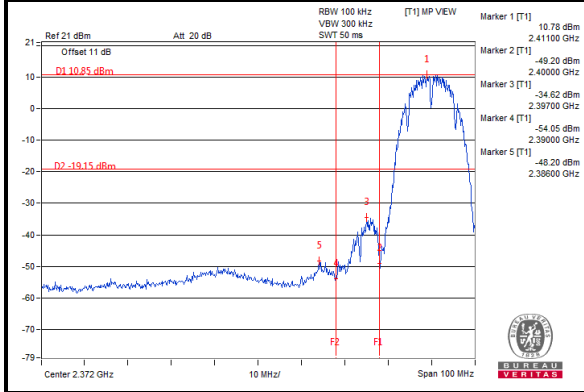


CH 11 Band edge

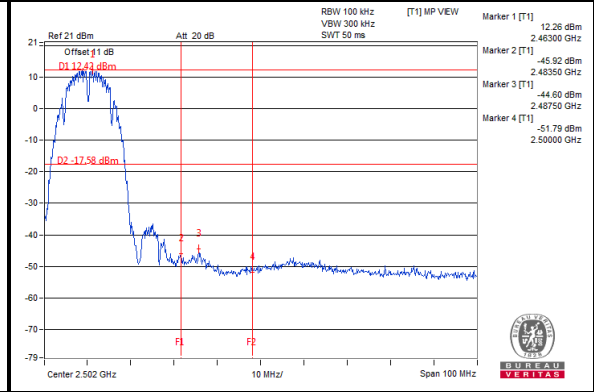


CHAIN 1

CH 1 Band edge

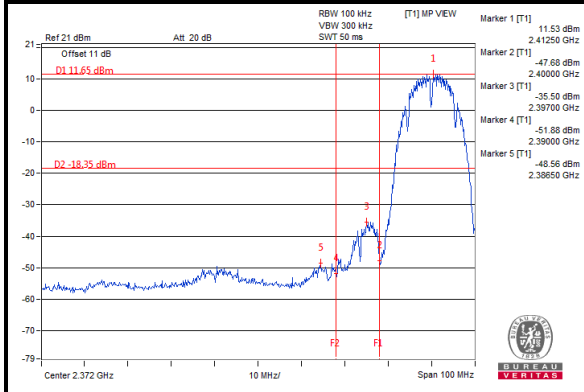

CH 11 Band edge

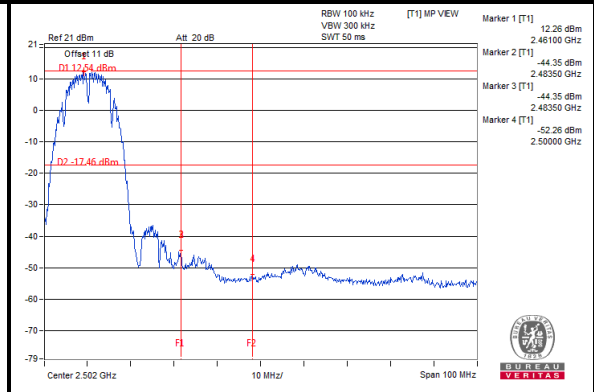





802.11g

CHAIN 0

CH 1 Band edge

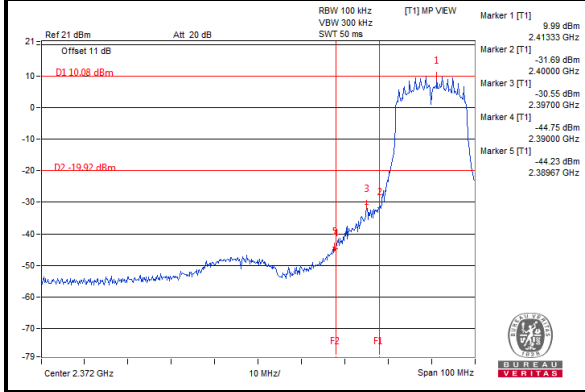


CH 11 Band edge

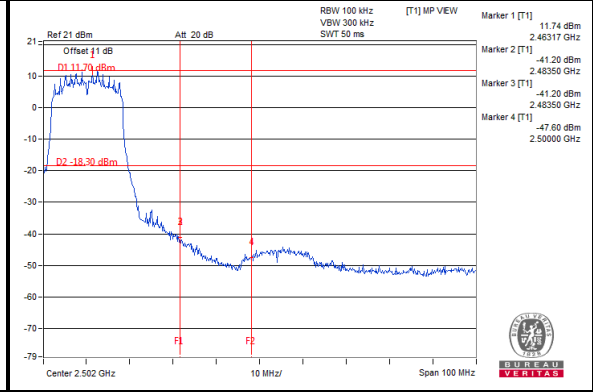


CHAIN 1

CH 1 Band edge

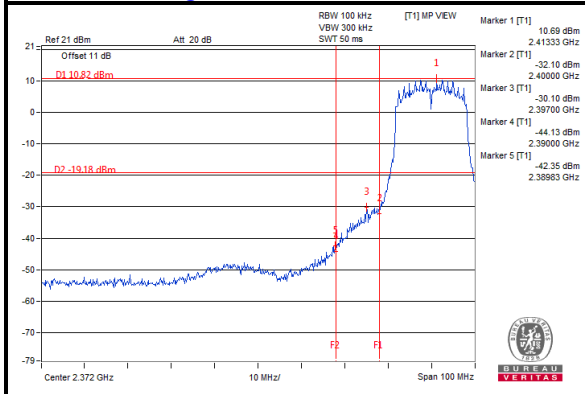

CH 11 Band edge

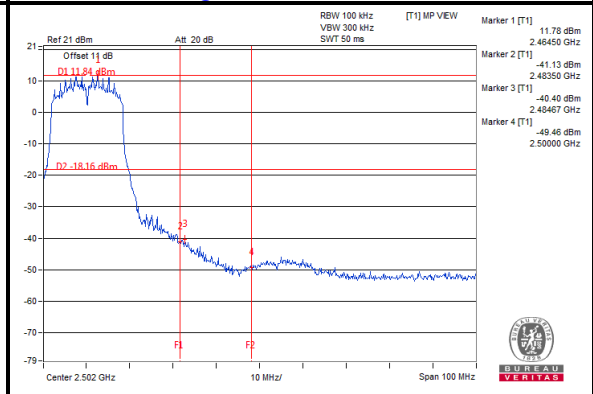





802.11n 20MHz

CHAIN 0

CH 1 Band edge

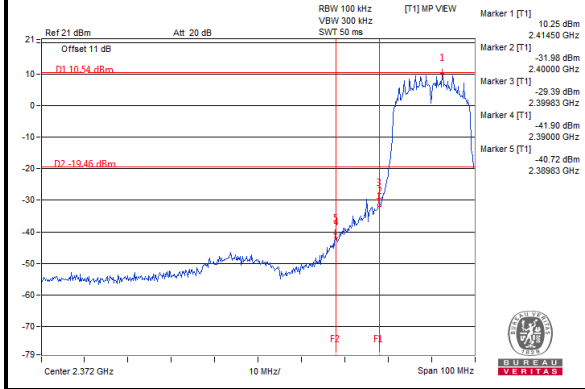


CH 11 Band edge

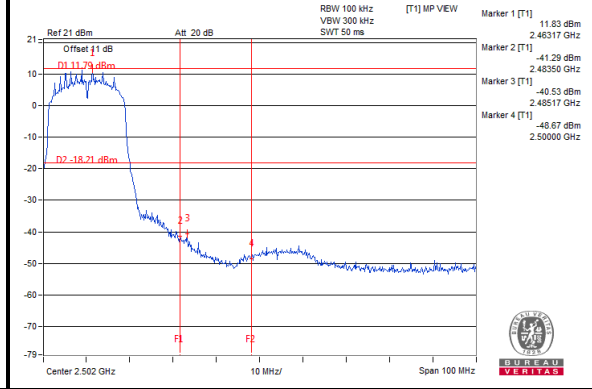


CHAIN 1

CH 1 Band edge

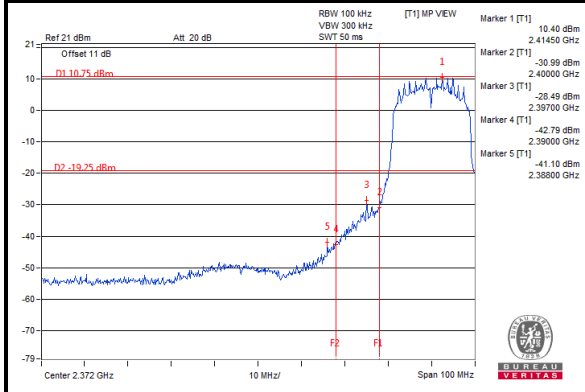


CH 11 Band edge

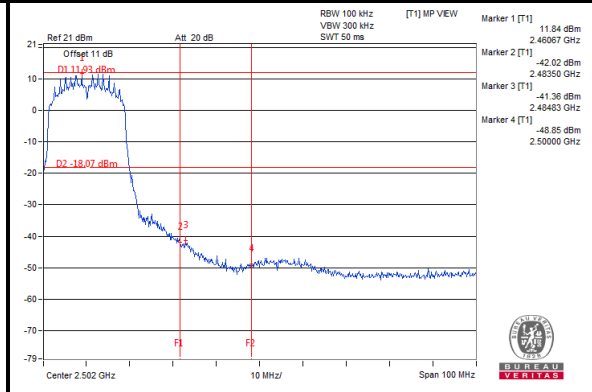




802.11n 40MHz

CHAIN 0

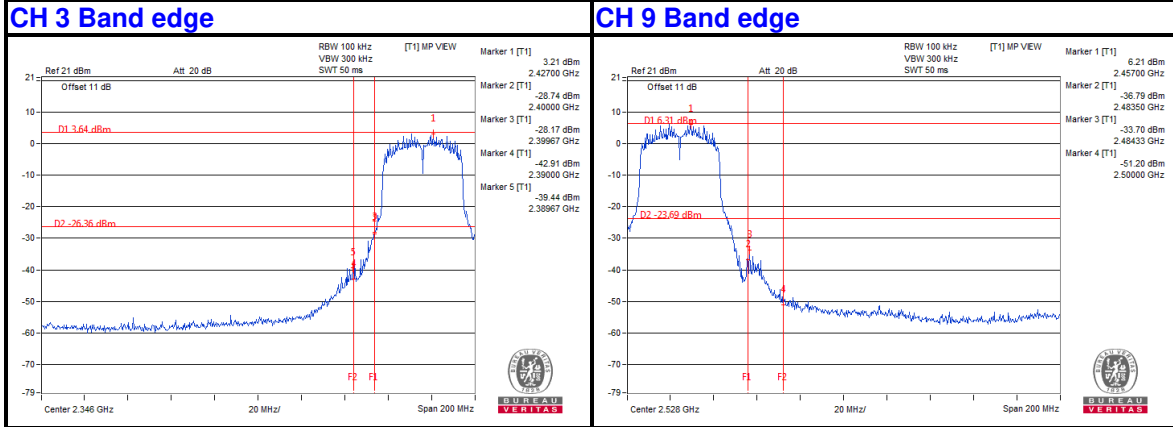

CHAIN 1

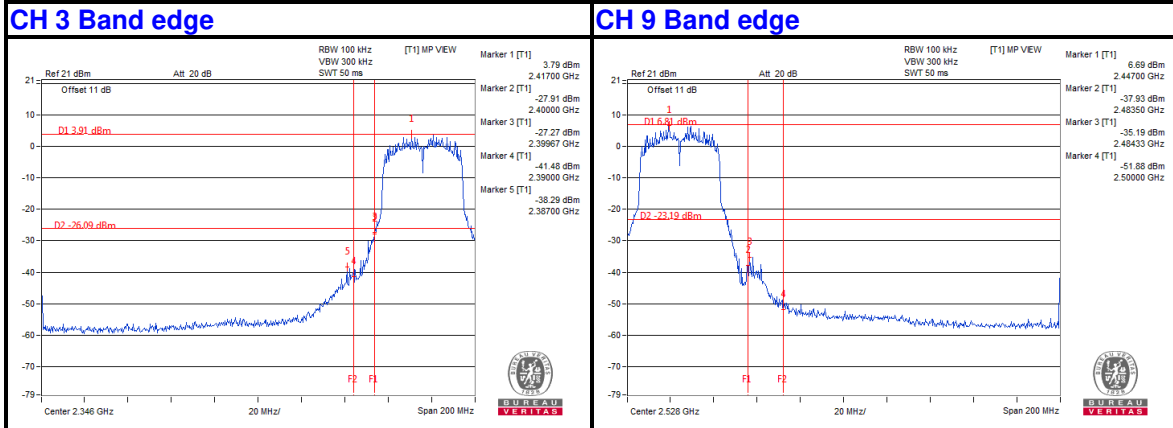



BUREAU Test Report No.: RF160927N056
VERITAS

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



BUREAU Test Report No.: RF160927N056
VERITAS

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---