

Supplemental “Transmit Simultaneously” Test Report

Report No.: RF150408C04-2

FCC ID: TE7RE580

Test Model: RE580D

Received Date: Apr. 08, 2015

Test Date: May 04 to Aug. 24, 2015

Issued Date: Oct. 22, 2015

Applicant: TP-LINK TECHNOLOGIES CO., LTD.

Address: Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park,Shennan Rd, Nanshan, Shenzhen,China

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan R.O.C.

Test Location (3): E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300, Taiwan R.O.C.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies

Table of Contents

| | |
|--|-----------|
| Release Control Record | 3 |
| 1 Certificate of Conformity | 4 |
| 2 Summary of Test Results | 5 |
| 2.1 Measurement Uncertainty | 5 |
| 2.2 Modification Record | 5 |
| 3 General Information | 6 |
| 3.1 General Description of EUT | 6 |
| 3.2 Test Mode Applicability and Tested Channel Detail | 9 |
| 3.3 Duty Cycle of Test Signal | 11 |
| 3.4 Description of Support Units | 12 |
| 3.4.1 Configuration of System under Test | 12 |
| 3.5 General Description of Applied Standards | 13 |
| 4 Test Types and Results | 14 |
| 4.1 Radiated Emission and Bandedge Measurement | 14 |
| 4.1.1 Limits of Radiated Emission and Bandedge Measurement | 14 |
| 4.1.2 Test Instruments | 15 |
| 4.1.3 Test Procedures | 17 |
| 4.1.4 Deviation from Test Standard | 17 |
| 4.1.5 Test Setup | 18 |
| 4.1.6 EUT Operating Conditions | 18 |
| 4.1.7 Test Results | 19 |
| 4.2 Conducted Emission Measurement | 21 |
| 4.2.1 Limits of Conducted Emission Measurement | 21 |
| 4.2.2 Test Instruments | 21 |
| 4.2.3 Test Procedures | 22 |
| 4.2.4 Deviation from Test Standard | 22 |
| 4.2.5 Test Setup | 22 |
| 4.2.6 EUT Operating Conditions | 22 |
| 4.2.7 Test Results | 23 |
| 4.3 Conducted Out of Band Emission Measurement | 25 |
| 4.3.1 Limits of Conducted Out of Band Emission Measurement | 25 |
| 4.3.2 Test Setup | 25 |
| 4.3.3 Test Instruments | 25 |
| 4.3.4 Test Procedure | 25 |
| 4.3.5 Deviation from Test Standard | 25 |
| 4.3.6 EUT Operating Condition | 25 |
| 4.3.7 Test Results | 25 |
| 5 Pictures of Test Arrangements | 27 |
| Appendix – Information on the Testing Laboratories | 28 |



A D T

Release Control Record

| Issue No. | Description | Date Issued |
|---------------|-------------------|---------------|
| RF150408C04-2 | Original release. | Oct. 22, 2015 |

1 Certificate of Conformity

Product: AC1900 Wi-Fi Range Extender

Brand: TP-LINK

Test Model: RE580D

Sample Status: PROTOTYPE


Applicant: TP-LINK TECHNOLOGIES CO., LTD.

Test Date: May 04 to Aug. 24, 2015

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)
ANSI C63.10:2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Oct. 22, 2015
Lori Chung / Specialist

Approved by :  , **Date:** Oct. 22, 2015
May Chen / Manager

2 Summary of Test Results

| 47 CFR FCC Part 15, Subpart C (SECTION 15.247) | | | |
|--|--|--------|--|
| FCC Clause | Test Item | Result | Remarks |
| 15.207 | AC Power Conducted Emission | PASS | Meet the requirement of limit. Minimum passing margin is -5.47dB at 0.15781MHz. |
| 15.205 / 15.209 / 15.247(d) | Radiated Emissions and Band Edge Measurement | PASS | Meet the requirement of limit. Minimum passing margin is -4.3dB at 40.04MHz & 63.85MHz. |

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| Measurement | Frequency | Expended Uncertainty (k=2) (±) |
|------------------------------------|----------------|--------------------------------|
| Conducted Emissions at mains ports | 150kHz ~ 30MHz | 2.86 dB |
| Radiated Emissions up to 1 GHz | 30MHz ~ 1GHz | 5.37 dB |
| Radiated Emissions above 1 GHz | 1GHz ~ 6GHz | 3.65 dB |
| | 6GHz ~ 18GHz | 3.88 dB |
| | 18GHz ~ 40GHz | 4.11 dB |

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

| | |
|-----------------------|---|
| Product | AC1900 Wi-Fi Range Extender |
| Brand | TP-LINK |
| Test Model | RE580D |
| Status of EUT | PROTOTYPE |
| Power Supply Rating | 12Vdc from power adapter |
| Modulation Type | CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac/11n mode |
| Modulation Technology | DSSS, OFDM |
| Transfer Rate | 802.11b: up to 11Mbps 802.11g/a: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1300Mbps |
| Operating Frequency | For 15.407 5.18 ~ 5.24GHz |
| | For 15.247 (2.4GHz) 2.412 ~ 2.462GHz |
| | For 15.247 (5GHz) 5.745 ~ 5.825GHz |
| Number of Channel | For 15.407 4 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) |
| | For 15.247 (2.4GHz) 11 for 802.11b, 802.11g, 802.11n (HT20) 7 for 802.11n (HT40) |
| | For 15.247 (5GHz) 5 for 802.11a, 802.11n (HT20), 802.11ac (VHT20) 2 for 802.11n (HT40), 802.11ac (VHT40) 1 for 802.11ac (VHT80) |

| | |
|---------------------|--|
| Output Power | For 15.407 CDD Mode: 802.11a: 129.773mW 802.11ac (VHT20): 97.538mW 802.11ac (VHT40): 79.62mW 802.11ac (VHT80): 50.159mW Beamforming Mode: 802.11ac (VHT20): 91.869mW 802.11ac (VHT40): 78.347mW 802.11ac (VHT80): 48.68mW |
| | For 15.247 (2.4GHz) CDD Mode: 802.11b: 944.994mW 802.11g: 905.754mW 802.11n (HT20): 985.832mW 802.11n (HT40): 183.341mW For 15.247 (5GHz) CDD Mode: 802.11a: 941.704mW 802.11ac (VHT20): 929.132mW 802.11ac (VHT40): 939.727mW 802.11ac (VHT80): 325.598mW Beamforming Mode: 802.11ac (VHT20): 922.803mW 802.11ac (VHT40): 918.936mW 802.11ac (VHT80): 326.978mW |
| Antenna Type | Refer to Note |
| Antenna Connector | Refer to Note |
| Accessory Device | Adapter x 1 |
| Data Cable Supplied | NA |

Note:

- 2.4GHz and 5GHz technology can transmit at same time.
- The antennas provided to the EUT, please refer to the following table:

| Transmitter Circuit | Brand | Model | Antenna Gain (dBi) | Frequency range (GHz to GHz) | Antenna Type | Connector Type |
|---------------------|-------|-------|--------------------|------------------------------|--------------|----------------|
| Chain (0) | NA | NA | 1.59 | 2.4-2.4835 | Dipole | RP-SMA-F |
| | | | 1.03 | 5.15-5.25 | | |
| | | | 1.43 | 5.725-5.850 | | |
| Chain (1) | NA | NA | 1.59 | 2.4-2.4835 | Dipole | RP-SMA-F |
| | | | 1.03 | 5.15-5.25 | | |
| | | | 1.43 | 5.725-5.850 | | |
| Chain (2) | NA | NA | 1.59 | 2.4-2.4835 | Dipole | RP-SMA-F |
| | | | 1.03 | 5.15-5.25 | | |
| | | | 1.43 | 5.725-5.850 | | |

- The EUT must be supplied with a power adapter as following table:

| Brand Name | Model No. | Spec. |
|----------------------------|---------------|--|
| Ten Pao International Inc. | S040EU1200250 | Input: 100-240V~, 1.2A Max., 50/60Hz Output: 12V, 2500mA DC output cable: 1.5m, unshielded |

- The EUT incorporates a MIMO function.

| 2.4GHz Band | | | |
|------------------|-----------------|-----------------------|-----|
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11b | 1 ~ 11Mbps | 3TX | 3RX |
| 802.11g | 6 ~ 54Mbps | 3TX | 3RX |
| 802.11n (HT20) | MCS 0~7 | 3TX | 3RX |
| | MCS 8~15 | 3TX | 3RX |
| | MCS 16~23 | 3TX | 3RX |
| 802.11n (HT40) | MCS 0~7 | 3TX | 3RX |
| | MCS 8~15 | 3TX | 3RX |
| | MCS 16~23 | 3TX | 3RX |
| 5GHz Band | | | |
| MODULATION MODE | DATA RATE (MCS) | TX & RX CONFIGURATION | |
| 802.11a | 6 ~ 54Mbps | 3TX | 3RX |
| 802.11n (HT20) | MCS 0~7 | 3TX | 3RX |
| | MCS 8~15 | 3TX | 3RX |
| | MCS 16~23 | 3TX | 3RX |
| 802.11n (HT40) | MCS 0~7 | 3TX | 3RX |
| | MCS 8~15 | 3TX | 3RX |
| | MCS 16~23 | 3TX | 3RX |
| 802.11ac (VHT20) | MCS 0~8, Nss=1 | 3TX | 3RX |
| | MCS 0~8, Nss=2 | 3TX | 3RX |
| | MCS 0~9, Nss=3 | 3TX | 3RX |
| 802.11ac (VHT40) | MCS 0~9, Nss=1 | 3TX | 3RX |
| | MCS 0~9, Nss=2 | 3TX | 3RX |
| | MCS 0~9, Nss=3 | 3TX | 3RX |
| 802.11ac (VHT80) | MCS 0~9, Nss=1 | 3TX | 3RX |
| | MCS 0~9, Nss=2 | 3TX | 3RX |
| | MCS 0~9, Nss=3 | 3TX | 3RX |

Note:

- All of modulation mode support beamforming function except 2.4GHz band and 5GHz band (802.11a) modulation mode.

- The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 Test Mode Applicability and Tested Channel Detail

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|----|-------------|
| | RE≥1G | RE<1G | PLC | OB | |
| - | √ | √ | √ | √ | - |

Where **RE≥1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

OB: Conducted Out-Band Emission Measurement

NOTE:

- The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane** (for below 1GHz) and **X-plane** (for above 1GHz).

Radiated Emission Test (Above 1GHz):

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| CDD Mode | | | | | |
|--|-------------------|----------------|-----------------------|-----------------|------------------|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
| 2.4GHz (802.11n (HT20)) + 5GHz (802.11a) | 1 to 11 | 6 | OFDM | BPSK | 6.5 |
| | 149 to 157 | 157 | OFDM | BPSK | 6 |

Radiated Emission Test (Below 1GHz):

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| CDD Mode | | | | | |
|--|-------------------|----------------|-----------------------|-----------------|------------------|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
| 2.4GHz (802.11n (HT20)) + 5GHz (802.11a) | 1 to 11 | 6 | OFDM | BPSK | 6.5 |
| | 149 to 157 | 157 | OFDM | BPSK | 6 |

Power Line Conducted Emission Test:

- ☒ Following channel(s) was (were) selected for the final test as listed below.

| CDD Mode | | | | | |
|--|-------------------|----------------|-----------------------|-----------------|------------------|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
| 2.4GHz (802.11n (HT20)) + 5GHz (802.11a) | 1 to 11 | 6 | OFDM | BPSK | 6.5 |
| | 149 to 157 | 157 | OFDM | BPSK | 6 |

Conducted Out-Band Emission Measurement:
☒ Following channel(s) was (were) selected for the final test as listed below.

| CDD Mode | | | | | |
|--|-------------------|----------------|-----------------------|-----------------|------------------|
| MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | DATA RATE (Mbps) |
| 2.4GHz (802.11n (HT20)) + 5GHz (802.11a) | 1 to 11 | 6 | OFDM | BPSK | 6.5 |
| | 149 to 157 | 157 | OFDM | BPSK | 6 |

Test Condition:


| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|--------------|------------|
| RE \geq 1G | 23deg. C, 68%RH | 120Vac, 60Hz | Tim Ho |
| RE<1G | 22deg. C, 65%RH | 120Vac, 60Hz | Weiwei Lo |
| PLC | 25deg. C, 70%RH | 120Vac, 60Hz | Mike Hsieh |
| OB | 25deg. C, 60%RH | 120Vac, 60Hz | Andy Ho |

3.3 Duty Cycle of Test Signal

Duty cycle of test signal is $\geq 98\%$, duty factor is not required.

2.4GHz_802.11n (HT20): Duty cycle = 1.915 ms/1.941 ms = 0.987

5GHz Band_802.11a: Duty cycle = 2.062 ms/2.086 ms = 0.988

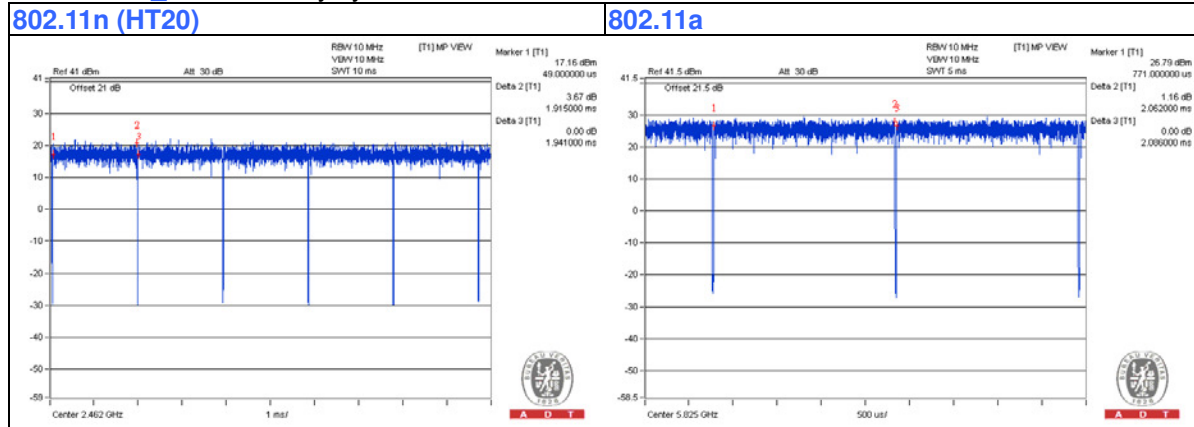

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


| ID | Product | Brand | Model No. | Serial No. | FCC ID | Remarks |
|----|-------------------|-------|-----------|---------------|---------|-----------------|
| A. | Notebook Computer | DELL | PP32LA | GSLB32S | FCC DoC | Provided by Lab |
| B. | HUB | ZyXEL | ES-116P | S060H02000215 | FCC DoC | Provided by Lab |

Note:

1. All power cords of the above support units are non-shielded (1.8m).

| ID | Descriptions | Qty. | Length (m) | Shielding (Yes/No) | Cores (Qty.) | Remarks |
|----|--------------|------|------------|--------------------|--------------|--------------------|
| 1. | DC | 1 | 1.5 | No | 0 | Supplied by Client |
| 2. | RJ-45 | 1 | 10 | No | 0 | Provided by Lab |
| 3. | RJ-45 | 3 | 10 | No | 0 | Provided by Lab |

3.4.1 Configuration of System under Test

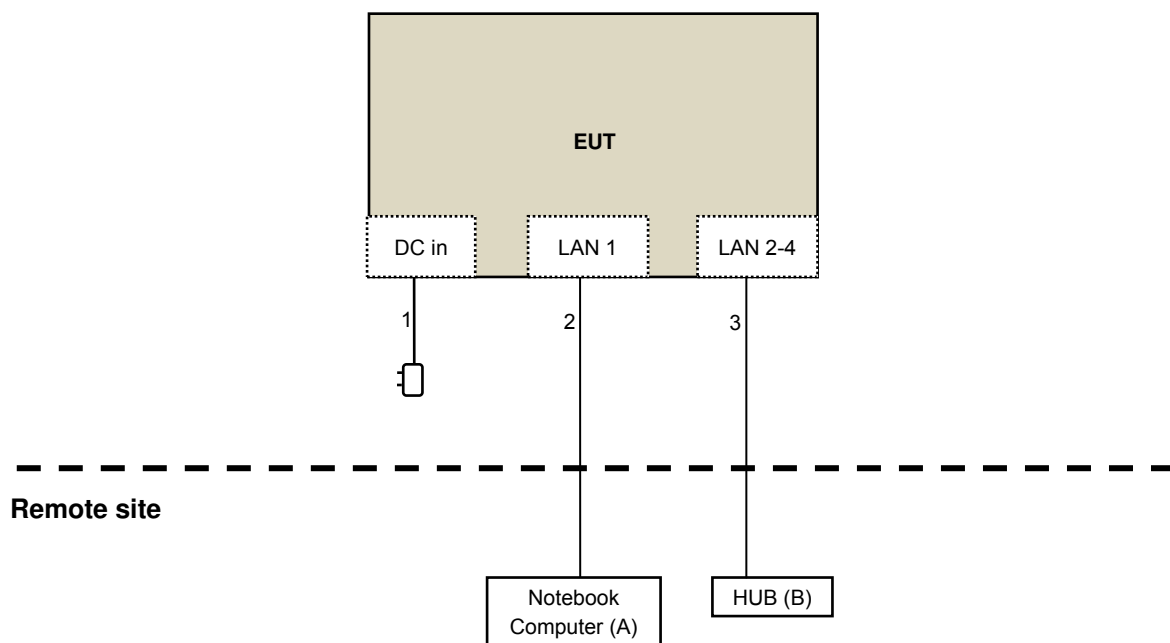

3.5 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 30dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 Test Instruments

For Above 1GHz:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------------|--------------------------|---|-----------------|------------------|
| Test Receiver Agilent | N9038A | MY51210105 | July 24, 2015 | July 23, 2016 |
| Horn_Antenna AISI | AIH.8018 | 000032009111 0 | Feb. 09, 2015 | Feb. 08, 2016 |
| Pre-Amplifier Agilent | 8449B | 3008A02578 | June 23, 2015 | June 22, 2016 |
| RF Cable | NA | 131205 131216 131217 SNMY23684/ 4 | Jan. 16, 2015 | Jan. 15, 2016 |
| Spectrum Analyzer R&S | FSV40 | 100964 | June 26, 2015 | June 25, 2016 |
| Pre-Amplifier SPACEK LABS | SLKKa-48-6 | 9K16 | Dec. 12, 2014 | Dec. 11, 2015 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | 9170-424 | Feb. 05, 2015 | Feb. 04, 2016 |
| RF Cable | NA | 329751/4 RF104-204 | Dec. 11, 2014 | Dec. 10, 2015 |
| Software | ADT_Radiated _V8.7.07 | NA | NA | NA |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |
| Spectrum Analyzer R&S | FSP 40 | 100060 | May 08, 2015 | May 07, 2016 |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The VCCI Site Registration No. is G-137.
5. The CANADA Site Registration No. is IC 7450H-2.
6. Tested Date: July 30 to Aug. 24, 2015

For Below 1GHz:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|------------------|------------------------------|-----------------|------------------|
| Test Receiver Agilent | N9038A | MY51210105 | July 21, 2014 | July 20, 2015 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2 B | AMP-ZFL-03 | Nov. 12, 2014 | Nov. 11, 2015 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-360 | Feb. 06, 2015 | Feb. 05, 2016 |
| RF Cable | 8D-FB | CHGCAB-001-1 CHGCAB-001-2 | Oct. 04, 2014 | Oct. 03, 2015 |
| | RF-141 | CHGCAB-004 | Oct. 04, 2014 | Oct. 03, 2015 |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. G.
3. The FCC Site Registration No. is 966073.
4. The CANADA Site Registration No. is IC 7450H-2.
5. Tested Date: May 26, 2015

4.1.3 Test Procedures

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. For emission measurements above 1 GHz, the EUT shall be placed at a height of 1.5 m above the ground at 3 meter chamber room for test
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
5. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
6. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

<Frequency Range below 1GHz>

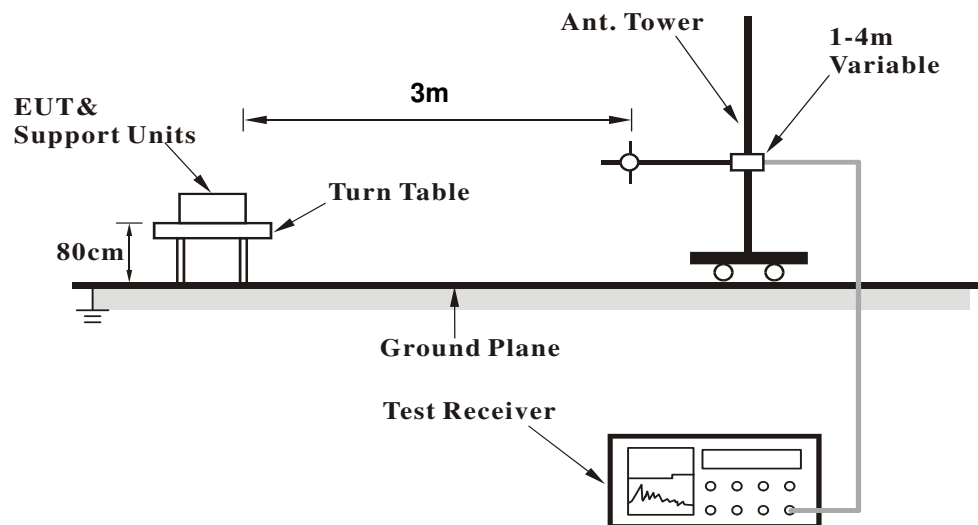

<Frequency Range above 1GHz>

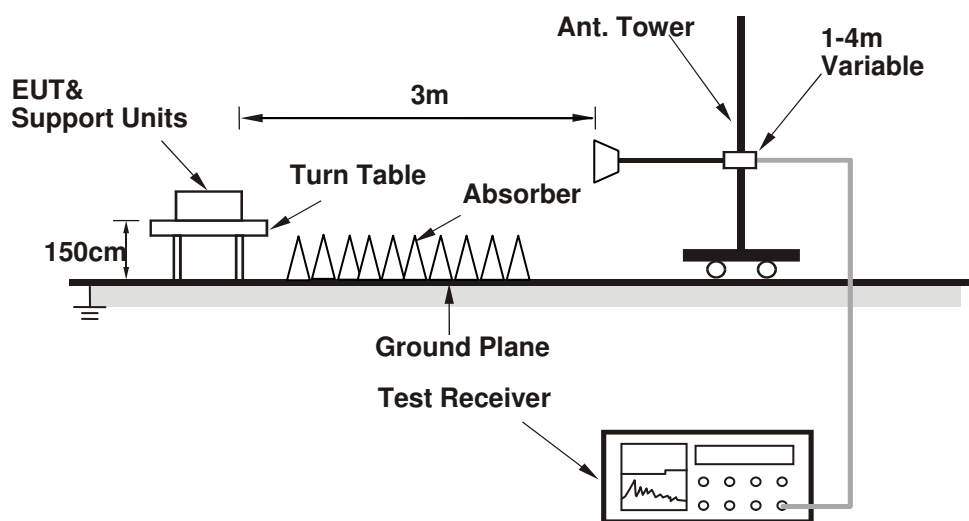

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

1. Connect the EUT with the support unit A (Notebook Computer) which is placed on remote site.
2. Controlling software (MTool_2.0.1.1.exe) has been activated to set the EUT on specific status.

4.1.7 Test Results

Above 1GHz Data:

| | | | |
|------------------------|--------------|--------------------------|---------------------------|
| FREQUENCY RANGE | 1GHz ~ 40GHz | DETECTOR FUNCTION | Peak (PK) Average (AV) |
|------------------------|--------------|--------------------------|---------------------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4874.00 | 50.8 PK | 74.0 | -23.2 | 1.81 H | 138 | 43.55 | 7.25 |
| 2 | 4874.00 | 38.9 AV | 54.0 | -15.1 | 1.81 H | 138 | 31.65 | 7.25 |
| 3 | 7311.00 | 58.4 PK | 74.0 | -15.6 | 1.93 H | 193 | 43.95 | 14.45 |
| 4 | 7311.00 | 46.8 AV | 54.0 | -7.2 | 1.93 H | 193 | 32.35 | 14.45 |
| 5 | 11570.00 | 57.6 PK | 74.0 | -16.4 | 1.39 H | 243 | 42.40 | 15.20 |
| 6 | 11570.00 | 47.4 AV | 54.0 | -6.6 | 1.39 H | 243 | 32.20 | 15.20 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 4874.00 | 50.3 PK | 74.0 | -23.7 | 1.84 V | 145 | 43.05 | 7.25 |
| 2 | 4874.00 | 38.6 AV | 54.0 | -15.4 | 1.84 V | 145 | 31.35 | 7.25 |
| 3 | 7311.00 | 60.8 PK | 74.0 | -13.2 | 2.05 V | 142 | 46.35 | 14.45 |
| 4 | 7311.00 | 47.9 AV | 54.0 | -6.1 | 2.05 V | 142 | 33.45 | 14.45 |
| 5 | 11570.00 | 59.5 PK | 74.0 | -14.5 | 1.83 V | 142 | 44.30 | 15.20 |
| 6 | 11570.00 | 49.5 AV | 54.0 | -4.5 | 1.83 V | 142 | 34.30 | 15.20 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

Below 1GHz Data:

| | | | |
|------------------------|------------|--------------------------|-----------------|
| FREQUENCY RANGE | Below 1GHz | DETECTOR FUNCTION | Quasi-Peak (QP) |
|------------------------|------------|--------------------------|-----------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | |
|---|-------------|-------------------------|----------------|-------------|--------------------|----------------------|------------------|--------------------------|
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 40.05 | 28.4 QP | 40.0 | -11.6 | 1.26 H | 179 | 41.89 | -13.50 |
| 2 | 98.65 | 29.4 QP | 43.5 | -14.2 | 1.69 H | 244 | 47.29 | -17.94 |
| 3 | 192.15 | 36.7 QP | 43.5 | -6.8 | 1.66 H | 273 | 52.45 | -15.79 |
| 4 | 263.19 | 36.8 QP | 46.0 | -9.2 | 1.43 H | 199 | 50.31 | -13.49 |
| 5 | 498.80 | 27.8 QP | 46.0 | -18.2 | 1.55 H | 221 | 34.68 | -6.86 |
| 6 | 940.25 | 31.5 QP | 46.0 | -14.5 | 1.26 H | 172 | 30.02 | 1.47 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | |
| NO. | FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA HEIGHT (m) | TABLE ANGLE (Degree) | RAW VALUE (dBuV) | CORRECTION FACTOR (dB/m) |
| 1 | 40.04 | 35.7 QP | 40.0 | -4.3 | 1.53 V | 281 | 49.16 | -13.50 |
| 2 | 63.85 | 35.7 QP | 40.0 | -4.3 | 1.43 V | 221 | 49.88 | -14.16 |
| 3 | 193.01 | 33.5 QP | 43.5 | -10.0 | 1.30 V | 195 | 49.34 | -15.81 |
| 4 | 279.53 | 34.3 QP | 46.0 | -11.7 | 1.38 V | 27 | 46.91 | -12.65 |
| 5 | 608.46 | 28.1 QP | 46.0 | -18.0 | 1.43 V | 79 | 31.99 | -3.94 |
| 6 | 940.20 | 31.1 QP | 46.0 | -14.9 | 1.43 V | 225 | 29.59 | 1.47 |

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

| Frequency (MHz) | Conducted Limit (dBuV) | |
|-----------------|------------------------|---------|
| | Quasi-peak | Average |
| 0.15 - 0.5 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30.0 | 60 | 50 |

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-------------------------|------------|-----------------|------------------|
| Test Receiver ROHDE & SCHWARZ | ESCS 30 | 847124/029 | Oct. 22, 2014 | Oct. 21, 2015 |
| Line-Impedance Stabilization Network (for EUT) SCHWARZBECK | NSLK-8127 | 8127-522 | Sep. 15, 2014 | Sep. 14, 2015 |
| Line-Impedance Stabilization Network (for Peripheral) ROHDE & SCHWARZ | ENV216 | 100071 | Nov. 10, 2014 | Nov. 09, 2015 |
| RF Cable (JYBAO) | 5D-FB | COCCAB-001 | Mar. 09, 2015 | Mar. 08, 2016 |
| 50 ohms Terminator | N/A | EMC-03 | Sep. 22, 2014 | Sep. 21, 2015 |
| 50 ohms Terminator | N/A | EMC-02 | Sep. 30, 2014 | Sep. 29, 2015 |
| Software ADT | BV ADT_Cond_V7.3.7.3 | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: May 04, 2015

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

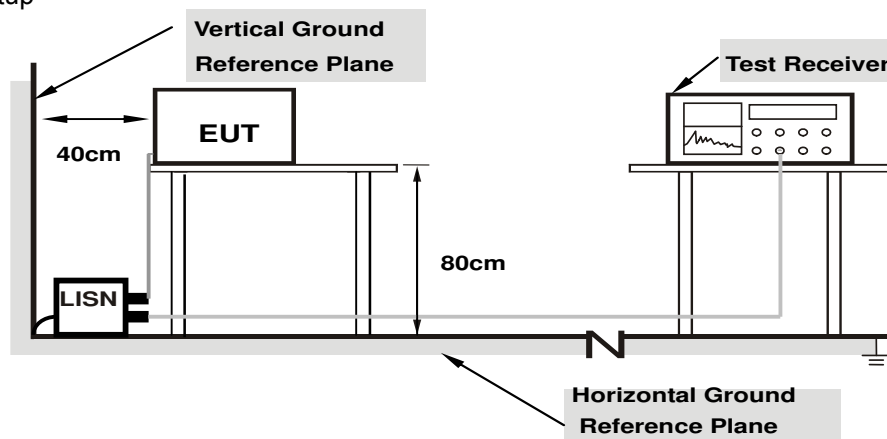

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.


4.2.7 Test Results

| Phase | Line (L) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|----------|-------------------|--------------------------------|
|-------|----------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. Factor | Reading Value [dB (uV)] | | Emission Level [dB (uV)] | | Limit [dB (uV)] | | Margin (dB) | |
|----|----------------|-----------------|----------------------------|-------|-----------------------------|-------|--------------------|-------|----------------|--------|
| | | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| | | | | | | | | | | |
| 1 | 0.15000 | 0.08 | 58.51 | 43.87 | 58.59 | 43.95 | 66.00 | 56.00 | -7.41 | -12.05 |
| 2 | 0.18906 | 0.09 | 52.48 | 38.53 | 52.57 | 38.62 | 64.08 | 54.08 | -11.51 | -15.46 |
| 3 | 0.47422 | 0.10 | 41.22 | 33.38 | 41.32 | 33.48 | 56.44 | 46.44 | -15.12 | -12.96 |
| 4 | 1.83594 | 0.16 | 31.77 | 24.28 | 31.93 | 24.44 | 56.00 | 46.00 | -24.07 | -21.56 |
| 5 | 11.27344 | 0.48 | 25.56 | 19.88 | 26.04 | 20.36 | 60.00 | 50.00 | -33.96 | -29.64 |
| 6 | 17.13672 | 0.63 | 24.67 | 19.40 | 25.30 | 20.03 | 60.00 | 50.00 | -34.70 | -29.97 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

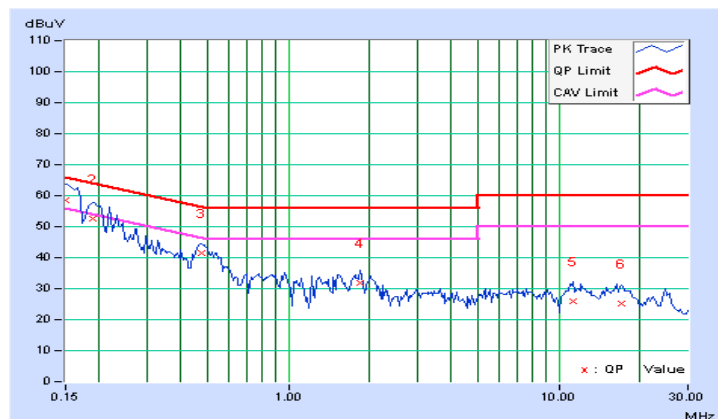


| | | | |
|-------|-------------|-------------------|--------------------------------|
| Phase | Neutral (N) | Detector Function | Quasi-Peak (QP) / Average (AV) |
|-------|-------------|-------------------|--------------------------------|

| No | Freq. [MHz] | Corr. | Reading Value | | Emission Level | | Limit | | Margin | |
|----|----------------|--------|---------------|-------|----------------|-------|-----------|-------|--------|--------|
| | | Factor | [dB (uV)] | | [dB (uV)] | | [dB (uV)] | | (dB) | |
| | | (dB) | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. | Q.P. | AV. |
| 1 | 0.15781 | 0.08 | 60.03 | 48.13 | 60.11 | 48.21 | 65.58 | 55.58 | -5.47 | -7.37 |
| 2 | 0.17734 | 0.08 | 51.29 | 33.39 | 51.37 | 33.47 | 64.61 | 54.61 | -13.24 | -21.14 |
| 3 | 0.20078 | 0.08 | 53.46 | 42.12 | 53.54 | 42.20 | 63.58 | 53.58 | -10.04 | -11.38 |
| 4 | 0.48203 | 0.10 | 42.31 | 33.75 | 42.41 | 33.85 | 56.30 | 46.30 | -13.89 | -12.45 |
| 5 | 1.80469 | 0.16 | 31.35 | 24.22 | 31.51 | 24.38 | 56.00 | 46.00 | -24.49 | -21.62 |
| 6 | 12.86328 | 0.54 | 26.59 | 20.78 | 27.13 | 21.32 | 60.00 | 50.00 | -32.87 | -28.68 |

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

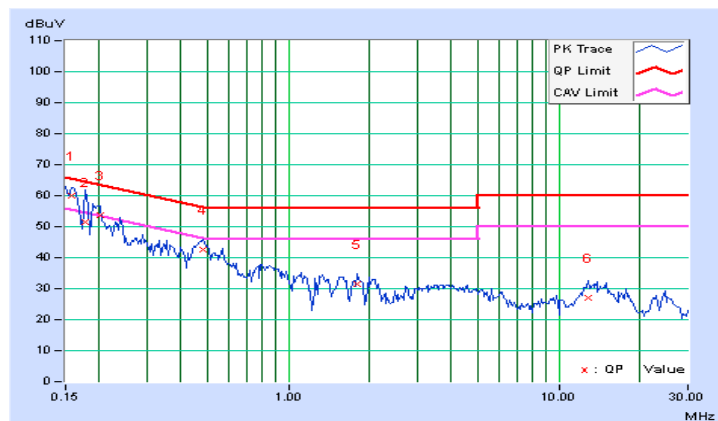


4.3 Conducted Out of Band Emission Measurement

4.3.1 Limits of Conducted Out of Band Emission Measurement

Below 30dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep = auto couple.
5. Trace Mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum amplitude level.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition


Same as Item 4.3.6

4.3.7 Test Results


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 30dB offset below D1. It shows compliance with the requirement.

2.4GHz 802.11n (HT20) CH 6 + 5GHz 802.11a CH 157


Chain 0

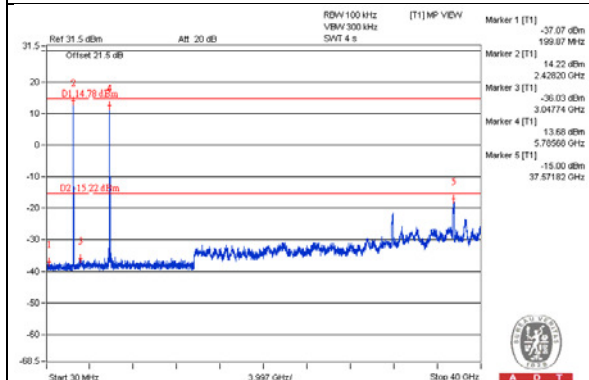

Chain 1

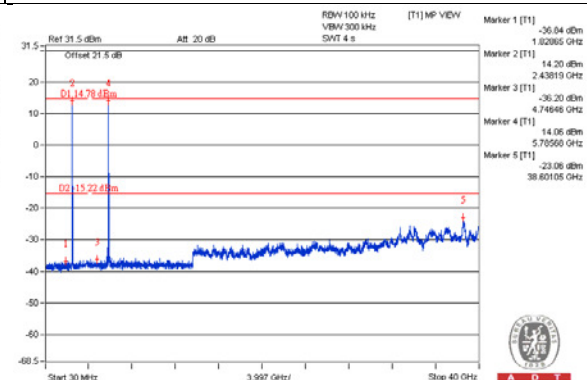

Chain 2

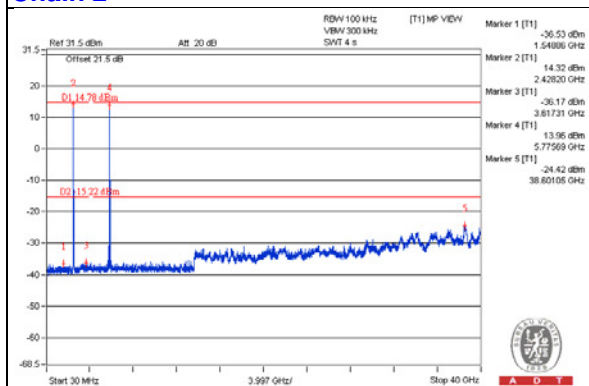

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information on the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---