



**BUREAU
VERITAS**

Test Report No.: RF160926N068



Test Lab
Cert 2951.01

TEST REPORT



Applicant	TP-Link Technologies Co., Ltd.
Address	Building 24(floors1, 3, 4, 5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Manufacturer or Supplier	TP-Link Technologies Co., Ltd.
Address	Building 24(floors1, 3, 4, 5) and 28(floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Product	450Mbps Wireless N Access Point
Brand Name	TP-Link
Model	TL-WA901ND
Additional Model & Model Difference	N/A
Date of tests	Dec. 12, 2016 ~ Jan. 16, 2017

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Harry Li Project Engineer/ EMC Department	Approved by Glyn He Supervisor/ EMC Department
	 Date: Jan. 23, 2017

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 7

 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 8

 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 8

3.3 DUTY CYCLE OF TEST SIGNAL 10

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS.....11

3.5 DESCRIPTION OF SUPPORT UNITS.....11

4 TEST TYPES AND RESULTS..... 12

4.1 CONDUCTED EMISSION MEASUREMENT 12

 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 12

 4.1.2 TEST INSTRUMENTS..... 12

 4.1.3 TEST PROCEDURES 13

 4.1.4 DEVIATION FROM TEST STANDARD 13

 4.1.5 TEST SETUP 14

 4.1.6 EUT OPERATING CONDITIONS 14

 4.1.7 TEST RESULTS 15

4.2 RADIATED EMISSION MEASUREMENT 17

 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 17

 4.2.2 TEST INSTRUMENTS..... 18

 4.2.3 TEST PROCEDURES 19

 4.2.4 DEVIATION FROM TEST STANDARD 19

 4.2.5 TEST SETUP 20

 4.2.6 EUT OPERATING CONDITIONS 21

 4.2.7 TEST RESULTS 22

4.3 6DB BANDWIDTH MEASUREMENT 44

 4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 44

 4.3.2 TEST INSTRUMENTS..... 44

 4.3.3 TEST PROCEDURE..... 44

 4.3.4 DEVIATION FROM TEST STANDARD 44



4.3.5	TEST SETUP	45
4.3.6	EUT OPERATING CONDITIONS	45
4.3.7	TEST RESULTS	46
4.4	CONDUCTED OUTPUT POWER	51
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	51
4.4.2	TEST SETUP	51
4.4.3	TEST INSTRUMENTS.....	51
4.4.4	TEST PROCEDURES	52
4.4.5	DEVIATION FROM TEST STANDARD	52
4.4.6	EUT OPERATING CONDITIONS	52
4.4.7	TEST RESULTS	53
4.5	POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.2	TEST SETUP	55
4.5.3	TEST INSTRUMENTS.....	55
4.5.4	TEST PROCEDURE.....	55
4.5.5	DEVIATION FROM TEST STANDARD	55
4.5.6	EUT OPERATING CONDITION	56
4.5.7	TEST RESULTS	56
4.6	OUT OF BAND EMISSION MEASUREMENT	61
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	61
4.6.2	TEST SETUP	61
4.6.3	TEST INSTRUMENTS.....	61
4.6.4	TEST PROCEDURE.....	61
4.6.5	DEVIATION FROM TEST STANDARD	62
4.6.6	EUT OPERATING CONDITION	62
4.6.7	TEST RESULTS	63
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	79
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	80



**BUREAU
VERITAS**

Test Report No.: RF160926N068

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160926N068	Original release	Jan. 23, 2017



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.93dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	450Mbps Wireless N Access Point
MODEL NO.	TL-WA901ND
FCC ID	TE7WA901NDV5
NOMINAL VOLTAGE	DC 9V From Adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
AVERAGE POWER	22.28dBm (Measured Average Power)
ANTENNA TYPE	Dipole Antenna; 4.32dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	N/A

NOTE:

1. The EUT have MIMO function. Physically, the EUT provides 3 completed transmitters and 3 receivers.

MODULATION MODE	FUNCTION
802.11b	3TX/3RX
802.11g	3TX/3RX
802.11n (HT20)	3TX/3RX
802.11n (HT40)	3TX/3RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 160926N068) for detailed product photo.
5. The EUT was powered by the following adapters:

ADAPTER	
BRAND:	TP-Link
MODEL:	T090085-2B1
INPUT:	AC 100-240V, 50/60hz 0.3A Max.
OUTPUT:	DC 9V, 0.85A
CABLE:	Unshielded, Detachable, 1.5m.No core



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	Powered by Adapter with WIFI function

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) Link

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11g	1 to 11	1	OFDM	BPSK	6.0	X



RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 3, 6, 9,11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 3, 6, 9,11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 3, 6, 9,11	OFDM	BPSK	6.5	X
802.11n HT40	3 to 9	3, 4, 6, 8, 9	OFDM	BPSK	13.5	X

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	24deg. C, 55%RH	DC 9V From Adapter	Harry Li
RE≥1G	24deg. C, 55%RH	DC 9V From Adapter	Harry Li
PLC	20deg. C, 56%RH	DC 9V From Adapter	Robert Cheng
APCM	20deg. C, 55%RH	DC 9V From Adapter	Robert Cheng

3.3 DUTY CYCLE OF TEST SIGNAL

Chain 0:

Duty cycle of test signal is 100 %

Chain 1:

Duty cycle of test signal is 100 %

Chain 2:

Duty cycle of test signal is 100 %



3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 DTS Meas Guidance v03r05

KDB 662911 D01 v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(DoC). The test report has been issued separately.

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	VOSTRO230	357PV2X	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
2	AC Line : Unshielded, Detachable 1.5m RJ45 Line : Unshielded, Detachable 1 m,10m;



4 TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 04,17	Jan. 03,18
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

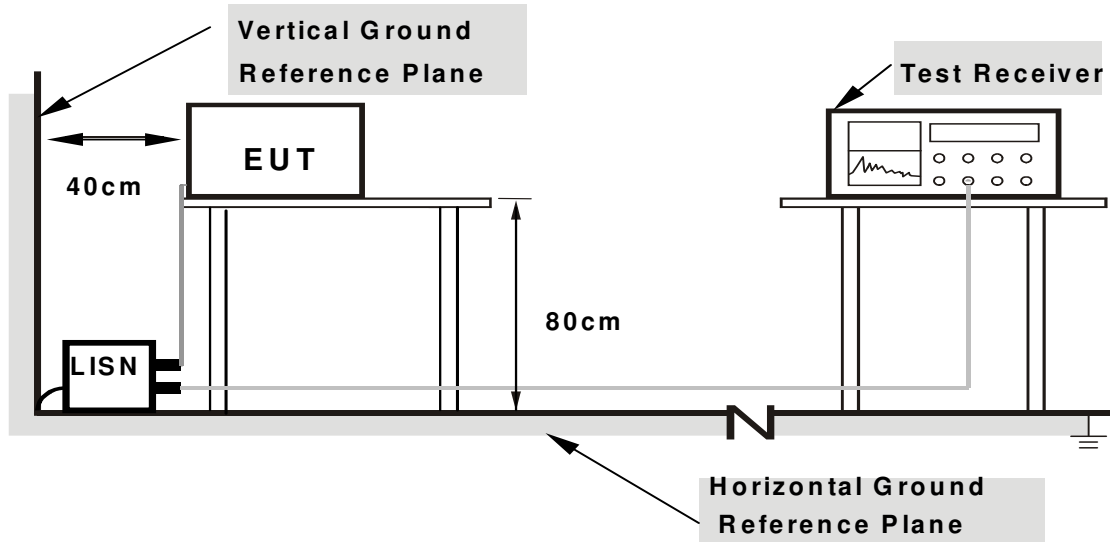

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: WIFI link

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.73725	10.32	37.12	21.54	47.44	31.86	56.00	46.00	-8.56	-14.14
2	10.24350	10.50	38.86	30.16	49.36	40.66	60.00	50.00	-10.64	-9.34
3	10.79250	10.51	39.86	31.00	50.37	41.51	60.00	50.00	-9.63	-8.49
4	11.89275	10.52	39.94	31.96	50.46	42.48	60.00	50.00	-9.54	-7.52
5	13.35750	10.53	39.59	32.85	50.12	43.38	60.00	50.00	-9.88	-6.62
6	16.22850	10.57	37.86	31.46	48.43	42.03	60.00	50.00	-11.57	-7.97

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

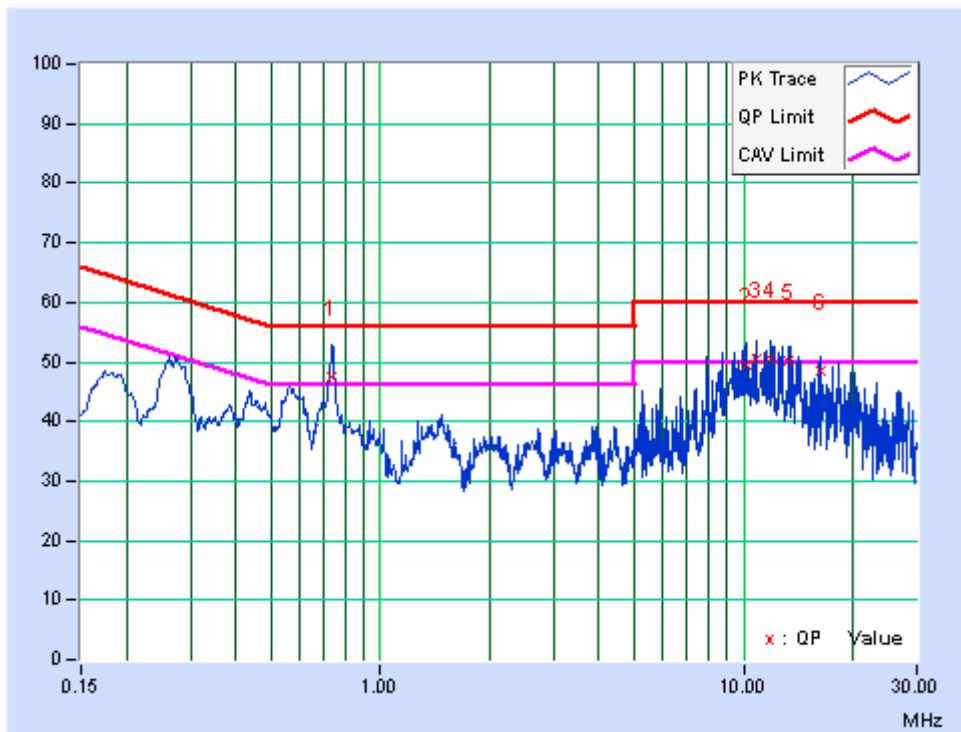




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.73448	9.96	26.01	8.39	35.97	18.35	56.00	46.00	-20.03	-27.65
2	11.89275	10.44	38.30	26.11	48.74	36.55	60.00	50.00	-11.26	-13.45
3	13.35750	10.48	38.42	26.92	48.90	37.40	60.00	50.00	-11.10	-12.60
4	14.21250	10.51	36.18	25.53	46.69	36.04	60.00	50.00	-13.31	-13.96
5	18.24225	10.56	37.13	30.71	47.69	41.27	60.00	50.00	-12.31	-8.73
6	23.12925	10.72	34.61	26.74	45.33	37.46	60.00	50.00	-14.67	-12.54

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

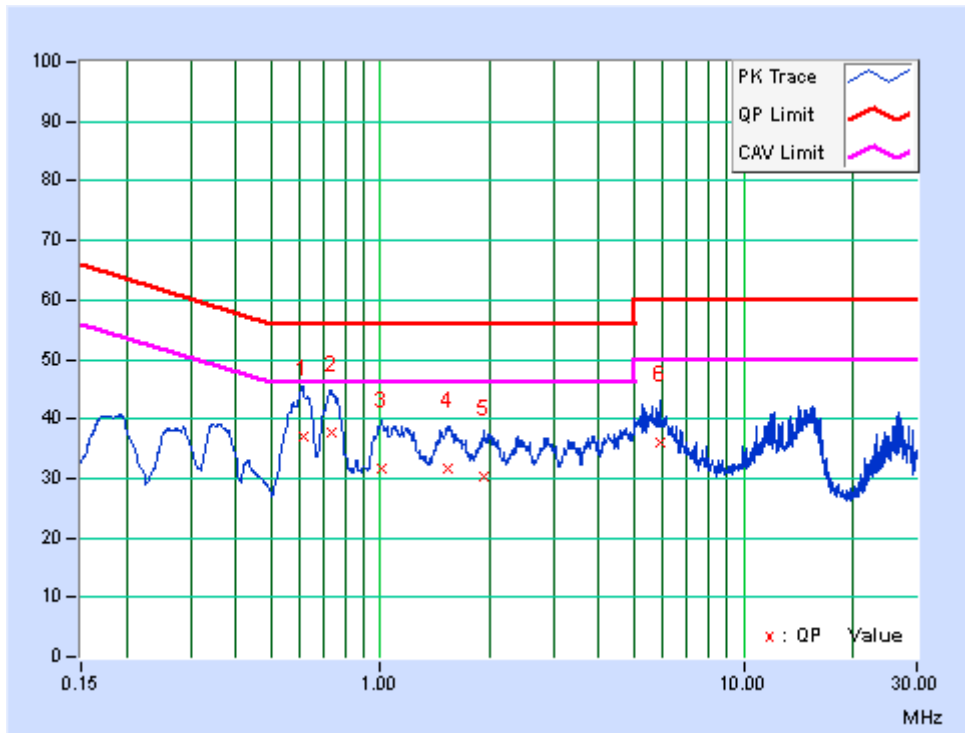



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**4.2.2 TEST INSTRUMENTS**

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 16	Aug. 07, 17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 04,16	Nov. 03,17
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug. 08,16	Aug. 07,17

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments are 12, 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 502831.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.


4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




4.2.5 TEST SETUP

Below 1GHz test setup

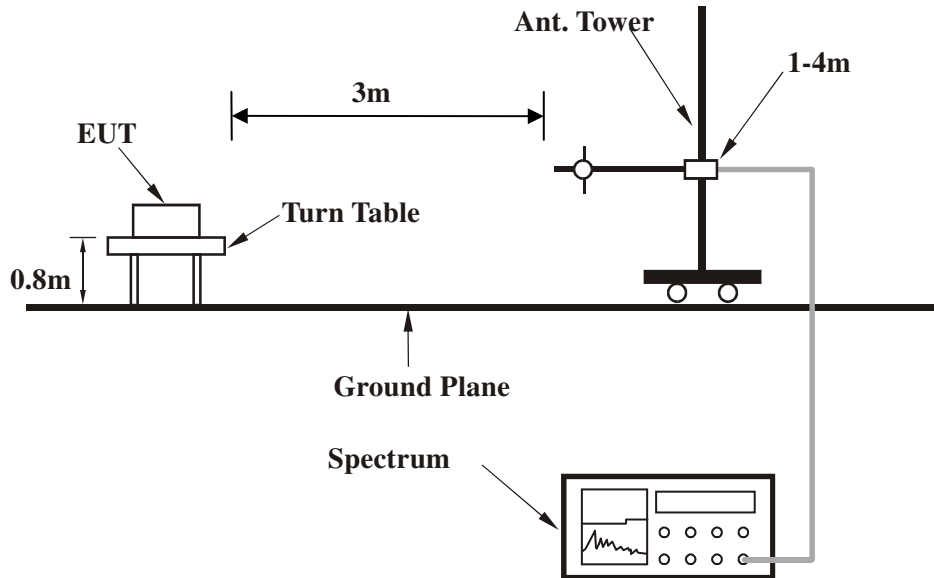

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

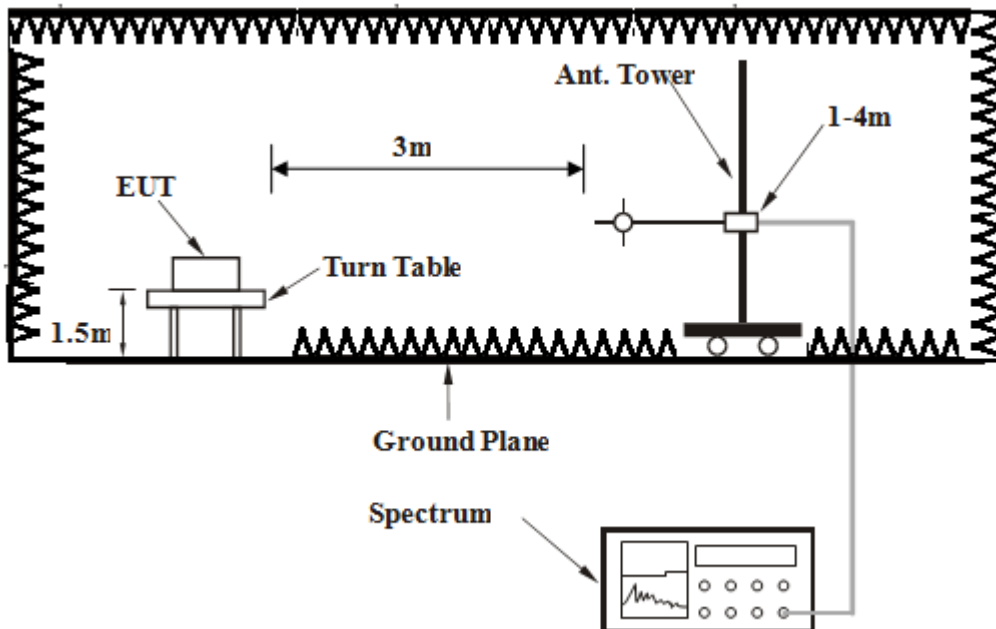

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF160926N068

4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	62.33	22.03 QP	40.00	-17.97	2.00 H	27	46.30	-24.27
2	93.26	27.06 QP	43.50	-16.44	2.00 H	155	45.89	-18.83
3	204.32	27.85 QP	43.50	-15.65	2.00 H	86	47.05	-19.20
4	399.72	41.66 QP	46.00	-4.34	2.00 H	351	50.38	-8.72
5	499.54	33.19 QP	46.00	-12.81	2.00 H	224	39.98	-6.79
6	874.88	35.31 QP	46.00	-10.69	2.00 H	295	34.65	0.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

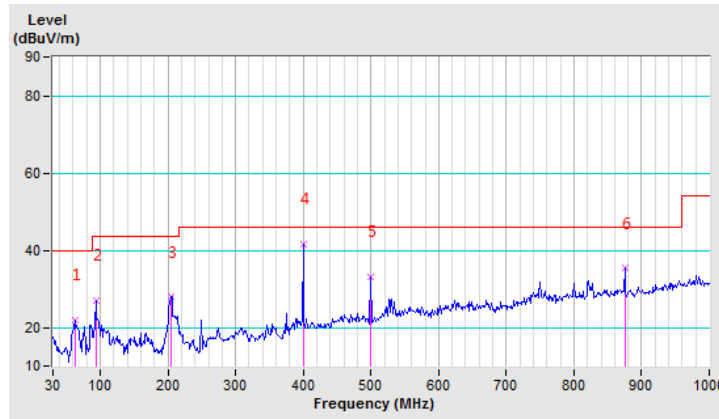



**BUREAU
VERITAS**


Test Report No.: RF160926N068

CHANNEL	Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	63.74	36.62 QP	40.00	-3.38	2.00 V	181	60.88	-24.26
2	97.48	37.94 QP	43.50	-5.56	2.00 V	201	56.50	-18.56
3	399.72	40.99 QP	46.00	-5.01	2.00 V	6	49.71	-8.72
4	800.38	40.49 QP	46.00	-5.51	2.00 V	74	41.02	-0.53
5	821.46	42.96 QP	46.00	-3.04	2.00 V	291	43.65	-0.69
6	874.88	41.81 QP	46.00	-4.19	2.00 V	0	41.15	0.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

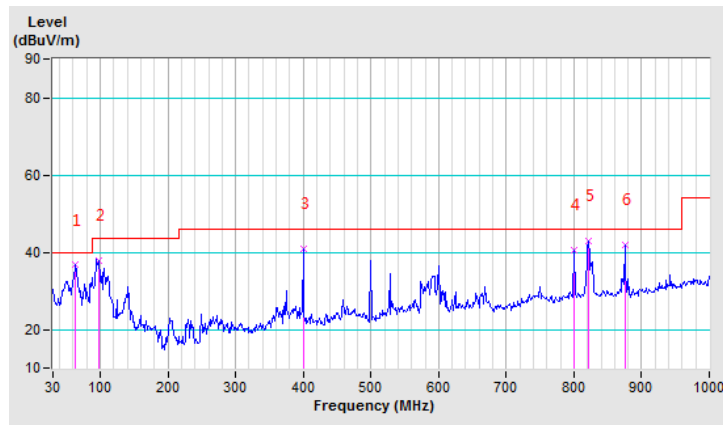



**BUREAU
VERITAS**

Test Report No.: RF160926N068

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.70 PK	74.00	-15.30	1.20 H	278	19.98	38.72
2	2390.00	46.32 AV	54.00	-7.68	1.20 H	278	7.60	38.72
3	*2412.00	107.66 PK			1.23 H	278	68.86	38.80
4	*2412.00	104.27 AV			1.23 H	278	65.47	38.80
5	4824.00	46.17 PK	74.00	-27.83	3.41 H	224	3.09	43.08
6	4824.00	39.16 AV	54.00	-14.84	3.41 H	224	-3.92	43.08
7	#7236.00	46.01 PK	74.00	-27.99	1.55 H	208	-1.42	47.43
8	#7236.00	37.17 AV	54.00	-16.83	1.55 H	208	-10.26	47.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.75 PK	74.00	-6.25	1.70 V	98	29.03	38.72
2	2390.00	53.89 AV	54.00	-0.11	1.70 V	98	15.17	38.72
3	*2412.00	114.61 PK			1.74 V	98	75.81	38.80
4	*2412.00	112.32 AV			1.74 V	98	73.52	38.80
5	4824.00	52.94 PK	74.00	-21.06	1.92 V	264	9.86	43.08
6	4824.00	48.56 AV	54.00	-5.44	1.92 V	264	5.48	43.08
7	#7236.00	46.24 PK	74.00	-27.76	1.31 V	122	-1.19	47.43
8	#7236.00	39.07 AV	54.00	-14.93	1.31 V	122	-8.36	47.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.86 PK	74.00	-17.14	2.13 H	44	18.14	38.72
2	2390.00	47.33 AV	54.00	-6.67	2.13 H	44	8.61	38.72
3	*2437.00	109.08 PK			2.12 H	44	70.19	38.89
4	*2437.00	106.52 AV			2.12 H	44	67.63	38.89
5	2483.50	55.61 PK	74.00	-18.39	1.44 H	203	16.55	39.06
6	2483.50	45.09 AV	54.00	-8.91	1.44 H	203	6.03	39.06
7	4874.00	46.24 PK	74.00	-27.76	3.71 H	140	3.09	43.15
8	4874.00	39.98 AV	54.00	-14.02	3.71 H	140	-3.17	43.15
9	7311.00	46.39 PK	74.00	-27.61	2.45 H	153	-1.13	47.52
10	7311.00	37.92 AV	54.00	-16.08	2.45 H	153	-9.60	47.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	61.25 PK	74.00	-12.75	2.13 V	278	22.53	38.72
2	2390.00	50.48 AV	54.00	-3.52	2.13 V	278	11.76	38.72
3	*2437.00	116.93 PK			2.29 V	270	78.04	38.89
4	*2437.00	114.52 AV			2.29 V	270	75.63	38.89
5	2483.50	59.74 PK	74.00	-14.26	2.27 V	146	20.68	39.06
6	2483.50	48.11 AV	54.00	-5.89	2.27 V	146	9.05	39.06
7	4874.00	56.48 PK	74.00	-17.52	3.17 V	162	13.33	43.15
8	4874.00	53.01 AV	54.00	-0.99	3.17 V	162	9.86	43.15
9	7311.00	46.30 PK	74.00	-27.70	2.84 V	201	-1.22	47.52
10	7311.00	38.12 AV	54.00	-15.88	2.84 V	201	-9.40	47.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.71 PK			2.71 H	92	69.73	38.98
2	*2462.00	105.59 AV			2.71 H	92	66.61	38.98
3	2483.50	56.73 PK	74.00	-17.27	1.43 H	90	17.67	39.06
4	2483.50	45.10 AV	54.00	-8.90	1.43 H	90	6.04	39.06
5	4924.00	50.14 PK	74.00	-23.86	3.64 H	17	6.92	43.22
6	4924.00	47.59 AV	54.00	-6.41	3.64 H	17	4.37	43.22
7	7386.00	46.24 PK	74.00	-27.76	1.93 H	168	-1.36	47.60
8	7386.00	40.15 AV	54.00	-13.85	1.93 H	168	-7.45	47.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.95 PK			1.24 V	174	78.97	38.98
2	*2462.00	114.20 AV			1.24 V	174	75.22	38.98
3	2483.50	66.07 PK	74.00	-7.93	1.22 V	22	27.01	39.06
4	2483.50	53.73 AV	54.00	-0.27	1.22 V	22	14.67	39.06
5	4924.00	51.17 PK	74.00	-22.83	1.70 V	55	7.95	43.22
6	4924.00	47.13 AV	54.00	-6.87	1.70 V	55	3.91	43.22
7	7386.00	48.14 PK	74.00	-25.86	2.95 V	147	0.54	47.60
8	7386.00	40.02 AV	54.00	-13.98	2.95 V	147	-7.58	47.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.23 PK	74.00	-8.77	1.75 H	62	26.51	38.72
2	2390.00	48.76 AV	54.00	-5.24	1.75 H	62	10.04	38.72
3	*2412.00	107.94 PK			1.75 H	62	69.14	38.80
4	*2412.00	101.92 AV			1.75 H	62	63.12	38.80
5	4824.00	50.14 PK	74.00	-23.86	1.77 H	204	7.06	43.08
6	4824.00	43.17 AV	54.00	-10.83	1.77 H	204	0.09	43.08
7	#7236.00	46.56 PK	74.00	-27.44	3.04 H	241	-0.87	47.43
8	#7236.00	39.31 AV	54.00	-14.69	3.04 H	241	-8.12	47.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.61 PK	74.00	-1.39	1.64 V	357	33.89	38.72
2	2390.00	53.29 AV	54.00	-0.71	1.64 V	357	14.57	38.72
3	*2412.00	117.67 PK			1.82 V	354	78.87	38.80
4	*2412.00	111.44 AV			1.82 V	354	72.64	38.80
5	4824.00	52.14 PK	74.00	-21.86	3.20 V	244	9.06	43.08
6	4824.00	47.21 AV	54.00	-6.79	3.20 V	244	4.13	43.08
7	#7236.00	46.17 PK	74.00	-27.83	2.55 V	103	-1.26	47.43
8	#7236.00	36.56 AV	54.00	-17.44	2.55 V	103	-10.87	47.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



BUREAU
VERITAS

Test Report No.: RF160926N068

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.88 PK	74.00	-15.12	1.77 H	310	20.16	38.72
2	2390.00	48.89 AV	54.00	-5.11	1.77 H	310	10.17	38.72
3	*2437.00	110.94 PK			2.42 H	310	72.05	38.89
4	*2437.00	103.78 AV			2.42 H	310	64.89	38.89
5	2483.50	57.25 PK	74.00	-16.75	2.61 H	275	18.19	39.06
6	2483.50	47.12 AV	54.00	-6.88	2.61 H	275	8.06	39.06
7	4874.00	49.13 PK	74.00	-24.87	2.01 H	71	5.98	43.15
8	4874.00	42.79 AV	54.00	-11.21	2.01 H	71	-0.36	43.15
9	7311.00	47.22 PK	74.00	-26.78	2.91 H	354	-0.30	47.52
10	7311.00	39.91 AV	54.00	-14.09	2.91 H	354	-7.61	47.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.80 PK	74.00	-4.20	1.90 V	356	31.08	38.72
2	2390.00	53.24 AV	54.00	-0.76	1.90 V	356	14.52	38.72
3	*2437.00	122.05 PK			2.12 V	14	83.16	38.89
4	*2437.00	114.30 AV			2.12 V	14	75.41	38.89
5	2483.50	64.02 PK	74.00	-9.98	1.62 V	350	24.96	39.06
6	2483.50	50.63 AV	54.00	-3.37	1.62 V	350	11.57	39.06
7	4874.00	53.17 PK	74.00	-20.83	2.62 V	124	10.02	43.15
8	4874.00	48.55 AV	54.00	-5.45	2.62 V	124	5.40	43.15
9	7311.00	50.11 PK	74.00	-23.89	1.75 V	308	2.59	47.52
10	7311.00	42.80 AV	54.00	-11.20	1.75 V	308	-4.72	47.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.60 PK			2.01 H	174	69.62	38.98
2	*2462.00	99.29 AV			2.01 H	174	60.31	38.98
3	2483.50	61.77 PK	74.00	-12.23	2.06 H	344	22.71	39.06
4	2483.50	45.64 AV	54.00	-8.36	2.06 H	344	6.58	39.06
5	4924.00	46.12 PK	74.00	-27.88	1.16 H	356	2.90	43.22
6	4924.00	36.87 AV	54.00	-17.13	1.16 H	356	-6.35	43.22
7	7386.00	45.74 PK	74.00	-28.26	2.14 H	71	-1.86	47.60
8	7386.00	36.52 AV	54.00	-17.48	2.14 H	71	-11.08	47.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	117.03 PK			2.16 V	257	78.05	38.98
2	*2462.00	108.69 AV			2.16 V	257	69.71	38.98
3	2483.50	73.69 PK	74.00	-0.31	2.81 V	196	34.63	39.06
4	2483.50	53.33 AV	54.00	-0.67	2.81 V	196	14.27	39.06
5	4924.00	48.04 PK	74.00	-25.96	1.71 V	352	4.82	43.22
6	4924.00	42.75 AV	54.00	-11.25	1.71 V	352	-0.47	43.22
7	7386.00	46.04 PK	74.00	-27.96	1.66 V	253	-1.56	47.60
8	7386.00	39.12 AV	54.00	-14.88	1.66 V	253	-8.48	47.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11n (HT20)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.56 PK	74.00	-16.44	3.17 H	142	18.84	38.72
2	2390.00	44.79 AV	54.00	-9.21	3.17 H	142	6.07	38.72
3	*2412.00	103.25 PK			3.17 H	142	64.45	38.80
4	*2412.00	92.52 AV			3.17 H	142	53.72	38.80
5	4824.00	45.71 PK	74.00	-28.29	1.02 H	33	2.63	43.08
6	4824.00	36.00 AV	54.00	-18.00	1.02 H	33	-7.08	43.08
7	#7236.00	46.70 PK	74.00	-27.30	3.41 H	200	-0.73	47.43
8	#7236.00	39.22 AV	54.00	-14.78	3.41 H	200	-8.21	47.43

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	70.86 PK	74.00	-3.14	1.21 V	162	32.14	38.72
2	2390.00	53.32 AV	54.00	-0.68	1.21 V	162	14.60	38.72
3	*2412.00	113.34 PK			1.20 V	163	74.54	38.80
4	*2412.00	103.97 AV			1.20 V	163	65.17	38.80
5	4824.00	49.19 PK	74.00	-24.81	2.71 V	44	6.11	43.08
6	4824.00	40.60 AV	54.00	-13.40	2.71 V	44	-2.48	43.08
7	#7236.00	45.45 PK	74.00	-28.55	3.00 V	257	-1.98	47.43
8	#7236.00	36.02 AV	54.00	-17.98	3.00 V	257	-11.41	47.43

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.01 PK	74.00	-15.99	1.70 H	271	19.29	38.72
2	2390.00	46.73 AV	54.00	-7.27	1.70 H	271	8.01	38.72
3	*2437.00	110.75 PK			2.25 H	271	71.86	38.89
4	*2437.00	101.64 AV			2.25 H	271	62.75	38.89
5	2483.50	57.79 PK	74.00	-16.21	2.01 H	72	18.73	39.06
6	2483.50	45.10 AV	54.00	-8.90	2.01 H	72	6.04	39.06
7	4874.00	46.14 PK	74.00	-27.86	1.00 H	301	2.99	43.15
8	4874.00	40.21 AV	54.00	-13.79	1.00 H	301	-2.94	43.15
9	7311.00	46.21 PK	74.00	-27.79	2.57 H	144	-1.31	47.52
10	7311.00	36.71 AV	54.00	-17.29	2.57 H	144	-10.81	47.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.14 PK	74.00	-7.86	1.77 V	188	27.42	38.72
2	2390.00	53.14 AV	54.00	-0.86	1.77 V	188	14.42	38.72
3	*2437.00	121.44 PK			1.00 V	188	82.55	38.89
4	*2437.00	111.26 AV			1.00 V	188	72.37	38.89
5	2483.50	60.85 PK	74.00	-13.15	1.42 V	203	21.79	39.06
6	2483.50	52.89 AV	54.00	-1.11	1.42 V	203	13.83	39.06
7	4874.00	51.13 PK	74.00	-22.87	3.12 V	295	7.98	43.15
8	4874.00	45.27 AV	54.00	-8.73	3.12 V	295	2.12	43.15
9	7311.00	47.14 PK	74.00	-26.86	1.00 V	154	-0.38	47.52
10	7311.00	39.05 AV	54.00	-14.95	1.00 V	154	-8.47	47.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.30 PK			2.14 H	51	68.32	38.98
2	*2462.00	96.11 AV			2.14 H	51	57.13	38.98
3	2483.50	58.71 PK	74.00	-15.29	2.14 H	51	19.65	39.06
4	2483.50	45.85 AV	54.00	-8.15	2.14 H	51	6.79	39.06
5	4874.00	38.02 AV	54.00	-15.98	1.44 H	242	-5.13	43.15
6	4924.00	47.15 PK	74.00	-26.85	1.44 H	242	3.93	43.22
7	7386.00	46.62 PK	74.00	-27.38	2.55 H	147	-0.98	47.60
8	7386.00	38.51 AV	54.00	-15.49	2.55 H	147	-9.09	47.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	114.79 PK			2.04 V	301	75.81	38.98
2	*2462.00	105.19 AV			2.04 V	301	66.21	38.98
3	2483.50	70.46 PK	74.00	-3.54	2.03 V	301	31.40	39.06
4	2483.50	53.68 AV	54.00	-0.32	2.03 V	301	14.62	39.06
5	4924.00	47.01 AV	54.00	-6.99	2.75 V	314	3.79	43.22
6	4924.00	40.23 PK	74.00	-33.77	2.75 V	314	-2.99	43.22
7	7386.00	46.24 PK	74.00	-27.76	1.51 V	276	-1.36	47.60
8	7386.00	39.04 AV	54.00	-14.96	1.51 V	276	-8.56	47.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



802.11n 40MHz

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.64 PK	74.00	-13.36	1.55 H	229	21.92	38.72
2	2390.00	47.81 AV	54.00	-6.19	1.55 H	229	9.09	38.72
3	*2422.00	97.41 PK			1.55 H	229	58.58	38.83
4	*2422.00	88.10 AV			1.55 H	229	49.27	38.83
5	4844.00	46.02 PK	74.00	-27.98	1.01 H	216	2.91	43.11
6	4844.00	34.01 AV	54.00	-19.99	1.01 H	216	-9.10	43.11
7	7266.00	45.57 PK	74.00	-28.43	1.17 H	104	-1.90	47.47
8	7266.00	34.32 AV	54.00	-19.68	1.17 H	104	-13.15	47.47
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	65.62 PK	74.00	-8.38	1.51 V	232	26.90	38.72
2	2390.00	53.07 AV	54.00	-0.93	1.51 V	232	14.35	38.72
3	*2422.00	109.32 PK			2.01 V	134	70.49	38.83
4	*2422.00	101.54 AV			2.01 V	134	62.71	38.83
5	4844.00	46.12 PK	74.00	-27.88	2.16 V	77	3.01	43.11
6	4844.00	39.53 AV	54.00	-14.47	2.16 V	77	-3.58	43.11
7	7266.00	45.40 PK	74.00	-28.60	1.93 V	65	-2.07	47.47
8	7266.00	34.19 AV	54.00	-19.81	1.93 V	65	-13.28	47.47

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.



BUREAU VERITAS

Test Report No.: RF160926N068

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.89 PK	74.00	-15.11	1.48 H	51	20.17	38.72
2	2390.00	45.11 AV	54.00	-8.89	1.48 H	51	6.39	38.72
3	*2437.00	102.01 PK			1.55 H	204	63.12	38.89
4	*2437.00	92.98 AV			1.55 H	204	54.09	38.89
5	2483.50	58.23 PK	74.00	-15.77	2.01 H	74	19.17	39.06
6	2483.50	44.07 AV	54.00	-9.93	2.01 H	74	5.01	39.06
7	4874.00	46.70 PK	74.00	-27.30	1.91 H	306	3.55	43.15
8	4874.00	35.71 AV	54.00	-18.29	1.91 H	306	-7.44	43.15
9	7311.00	47.83 PK	74.00	-26.17	1.24 H	205	0.31	47.52
10	7311.00	36.01 AV	54.00	-17.99	1.24 H	205	-11.51	47.52

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.89 PK	74.00	-6.11	1.61 V	159	29.17	38.72
2	2390.00	52.35 AV	54.00	-1.65	1.61 V	159	13.63	38.72
3	*2437.00	115.19 PK			1.82 V	201	76.30	38.89
4	*2437.00	104.40 AV			1.82 V	201	65.51	38.89
5	2483.50	65.68 PK	74.00	-8.32	1.83 V	24	26.62	39.06
6	2483.50	51.16 AV	54.00	-2.84	1.83 V	24	12.10	39.06
7	4874.00	45.82 PK	74.00	-28.18	1.31 V	54	2.67	43.15
8	4874.00	34.17 AV	54.00	-19.83	1.31 V	54	-8.98	43.15
9	7311.00	48.14 PK	74.00	-25.86	1.66 V	324	0.62	47.52
10	7311.00	37.91 AV	54.00	-16.09	1.66 V	324	-9.61	47.52

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.14 PK			1.32 H	92	62.20	38.94
2	*2452.00	97.21 AV			1.32 H	92	58.27	38.94
3	2483.50	58.23 PK	74.00	-15.77	1.32 H	92	19.17	39.06
4	2483.50	45.79 AV	54.00	-8.21	1.32 H	92	6.73	39.06
5	4904.00	45.02 PK	74.00	-28.98	1.00 H	152	1.83	43.19
6	4904.00	32.14 AV	54.00	-21.86	1.00 H	152	-11.05	43.19
7	7356.00	46.07 PK	74.00	-27.93	1.26 H	320	-1.50	47.57
8	7356.00	33.10 AV	54.00	-20.90	1.26 H	320	-14.47	47.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.75 PK			2.04 V	141	69.81	38.94
2	*2452.00	102.09 AV			2.04 V	141	63.15	38.94
3	2483.50	71.51 PK	74.00	-2.49	2.04 V	17	32.45	39.06
4	2483.50	53.01 AV	54.00	-0.99	2.04 V	17	13.95	39.06
5	4904.00	46.12 PK	74.00	-27.88	1.75 V	344	2.93	43.19
6	4904.00	34.17 AV	54.00	-19.83	1.75 V	344	-9.02	43.19
7	7356.00	46.07 PK	74.00	-27.93	1.04 V	291	-1.50	47.57
8	7356.00	32.43 AV	54.00	-21.57	1.04 V	291	-15.14	47.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



For client's request:

Additional band edge emission test for adjacent channel

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	59.99 PK	74	-14.01	1.00 H	203	21.27	38.72
2	#2390	49.31 AV	54	-4.69	1.00 H	203	10.59	38.72
3	*2422	108.34 PK			1.00 H	203	69.51	38.83
4	*2422	101.79 AV			1.00 H	203	62.96	38.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	61.76 PK	74	-12.24	1.00 H	203	23.04	38.72
2	#2390	53.68 AV	54	-0.32	1.00 H	203	14.96	38.72
3	*2422	114.83 PK			1.00 H	203	76.00	38.83
4	*2422	106.96 AV			1.00 H	203	68.13	38.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " # ": The radiated frequency is out of the restricted band.
6. " * * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	107.49 PK			1.02 H	213	68.55	38.94
2	*2452	103.29 AV			1.02 H	213	64.35	38.94
3	#2483.5	59.59 PK	74	-17.41	1.02 H	213	20.53	39.06
4	#2483.5	48.18 AV	54	-5.82	1.02 H	213	9.12	39.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	115.45 PK			1.02 H	213	76.51	38.94
2	*2452	110.98 AV			1.02 H	213	72.04	38.94
3	#2483.5	59.85 PK	74	-14.15	1.02 H	213	20.79	39.06
4	#2483.5	53.23 AV	54	-0.77	1.02 H	213	14.17	39.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

802.11g

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	55.65 PK	74	-18.35	1.00 H	203	16.93	38.72
2	#2390	43.84 AV	54	-10.16	1.00 H	203	5.12	38.72
3	*2422	108.10 PK			1.00 H	203	69.27	38.83
4	*2422	102.86 AV			1.00 H	203	64.03	38.83
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	65.23 PK	74	-8.77	1.00 H	203	26.51	38.72
2	#2390	53.24 AV	54	-0.76	1.00 H	203	14.52	38.72
3	*2422	117.65 PK			1.00 H	203	78.82	38.83
4	*2422	113.36 AV			1.00 H	203	74.53	38.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	110.50 PK			1.02 H	213	71.56	38.94
2	*2452	101.58 AV			1.02 H	213	62.64	38.94
3	#2483.5	58.87 PK	74	-15.13	1.02 H	213	19.81	39.06
4	#2483.5	45.97 AV	54	-8.03	1.02 H	213	6.91	39.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	117.68 PK			1.02 H	213	78.74	38.94
2	*2452	109.85 AV			1.02 H	213	70.91	38.94
3	#2483.5	65.07 PK	74	-8.93	1.02 H	213	26.01	39.06
4	#2483.5	53.49 AV	54	-0.51	1.02 H	213	14.43	39.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

802.11n (HT20)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	57.26 PK	74	-16.74	1.00 H	203	18.54	38.72
2	#2390	46.86 AV	54	-7.14	1.00 H	203	8.14	38.72
3	*2422	104.93 PK			1.00 H	203	66.10	38.83
4	*2422	95.82 AV			1.00 H	203	56.99	38.83

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	62.45 PK	74	-11.55	1.00 H	203	23.73	38.72
2	#2390	52.71 AV	54	-1.09	1.00 H	203	13.99	38.72
3	*2422	114.84 PK			1.00 H	203	76.01	38.83
4	*2422	104.05 AV			1.00 H	203	65.22	38.83

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BUREAU VERITAS

Test Report No.: RF160926N068

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	107.88 PK			1.02 H	213	68.94	38.94
2	*2452	97.82 AV			1.02 H	213	58.88	38.94
3	#2483.5	57.77 PK	74	-16.23	1.02 H	213	18.71	39.06
4	#2483.5	45.27 AV	54	-9.73	1.02 H	213	6.21	39.06

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452	115.46 PK			1.02 H	213	76.52	38.94
2	*2452	107.87 AV			1.02 H	213	68.93	38.94
3	#2483.5	64.60 PK	74	-9.40	1.02 H	213	25.54	39.06
4	#2483.5	52.95 AV	54	-1.05	1.02 H	213	13.89	39.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

802.11n (HT40)

CHANNEL	TX Channel 4	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	60.78 PK	74	-13.22	1.00 H	203	22.06	38.72
2	#2390	46.86 AV	54	-7.14	1.00 H	203	8.14	38.72
3	*2427	102.57 PK			1.00 H	203	63.71	38.86
4	*2427	91.69 AV			1.00 H	203	52.83	38.86

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#2390	68.56 PK	74	-5.44	1.00 H	203	29.84	38.72
2	#2390	53.09 AV	54	-0.91	1.00 H	203	14.37	38.72
3	*2427	110.69 PK			1.00 H	203	71.83	38.86
4	*2427	101.41 AV			1.00 H	203	62.55	38.86

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

CHANNEL	TX Channel 8	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	99.13 PK			1.52 H	231	61.03	38.86
2	*2447.00	90.63 AV			1.52 H	231	52.53	38.86
3	#2483.50	59.15 PK	74.00	-14.85	1.52 H	231	20.96	39.06
4	#2483.50	47.88 AV	54.00	-5.12	1.52 H	231	9.69	39.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2447.00	102.41 PK			1.02 H	213	63.55	38.86
2	*2447.00	95.9 AV			1.02 H	213	57.04	38.86
3	2483.50	62.83 PK	74	-11.17	1.02 H	213	23.77	39.06
4	2483.50	53.10 AV	54	-0.90	1.02 H	213	14.04	39.06

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " # ": The radiated frequency is out of the restricted band.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 13, 16	Oct.12, 17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 04,16	Nov. 03,17
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17
Agile Signal Generator	Agilent	8645A	Agilent	Aug.08, 16	Aug.07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.08, 16	Aug.07, 17

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP

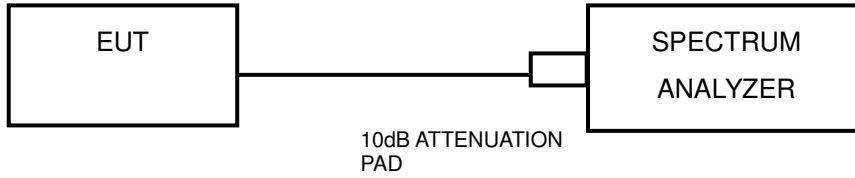

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	7.08	7.09	7.08	0.5	PASS
6	2437	7.09	7.07	7.08	0.5	PASS
11	2462	7.08	7.09	7.09	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	15.13	15.10	15.16	0.5	PASS
6	2437	15.14	15.15	15.14	0.5	PASS
11	2462	15.13	15.12	15.13	0.5	PASS



802.11n 20MHz

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
1	2412	15.15	15.10	15.11	0.5	PASS
6	2437	15.13	15.15	15.35	0.5	PASS
11	2462	15.14	15.15	15.14	0.5	PASS

802.11n 40MHz


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)			MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2		
3	2422	32.63	32.61	33.83	0.5	PASS
6	2437	30.12	31.36	30.10	0.5	PASS
9	2452	32.63	31.37	31.37	0.5	PASS



BUREAU VERITAS

Test Report No.: RF160926N068

CHAIN 0

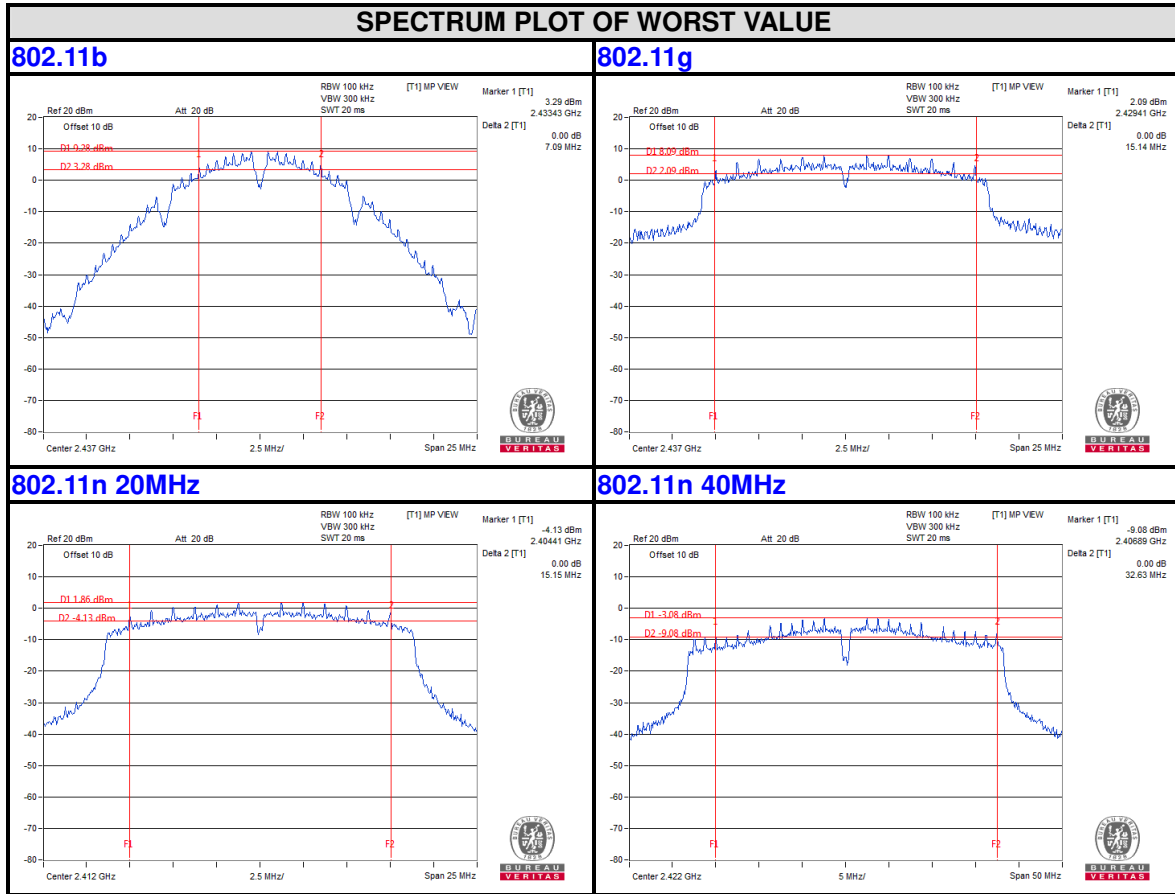

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF160926N068

CHAIN 1

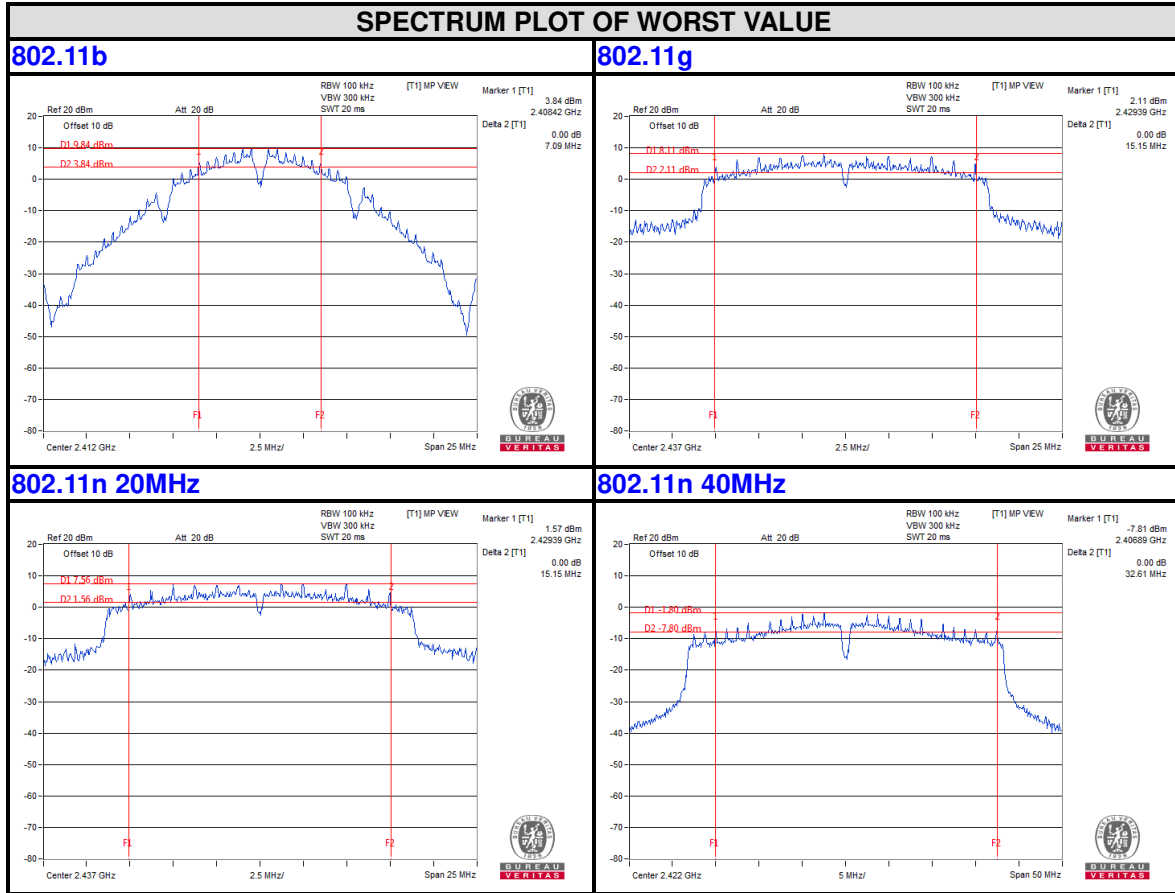

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF160926N068

CHAIN 2

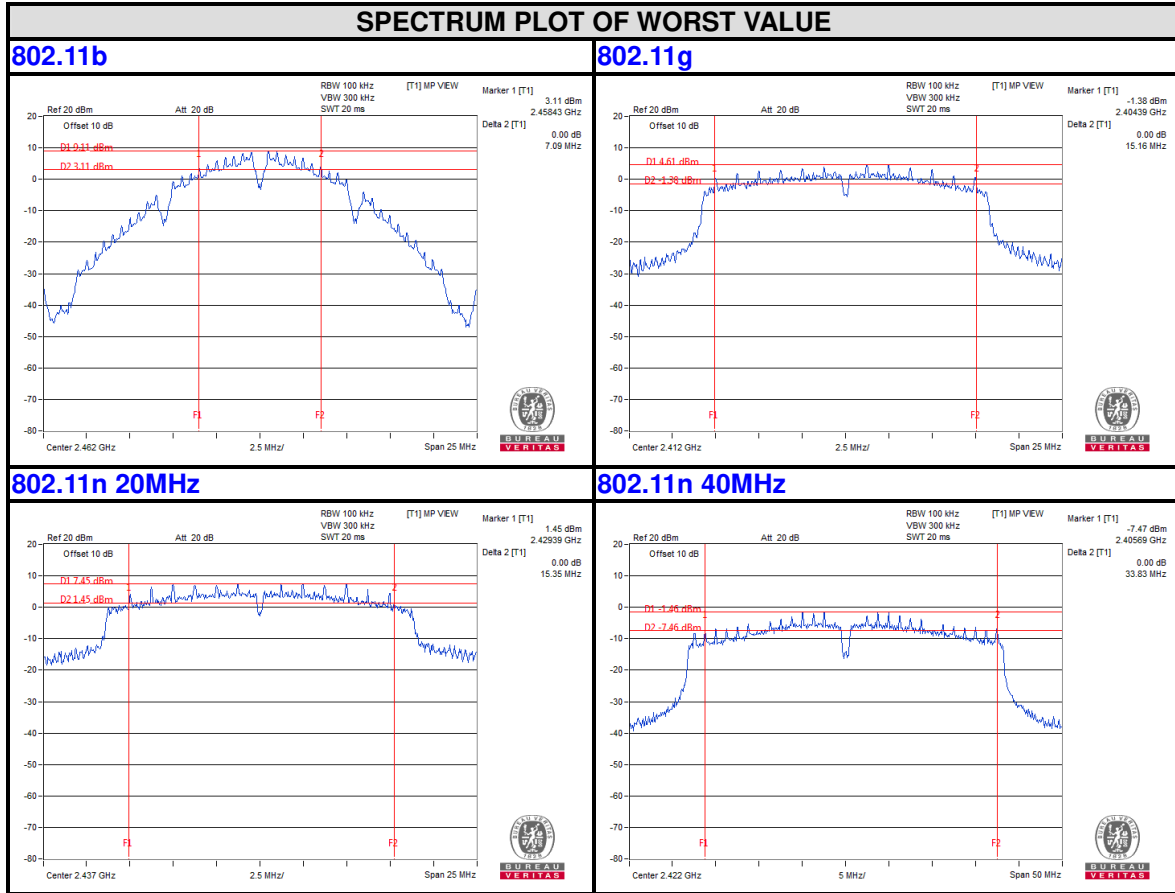

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.4.2 TEST SETUP

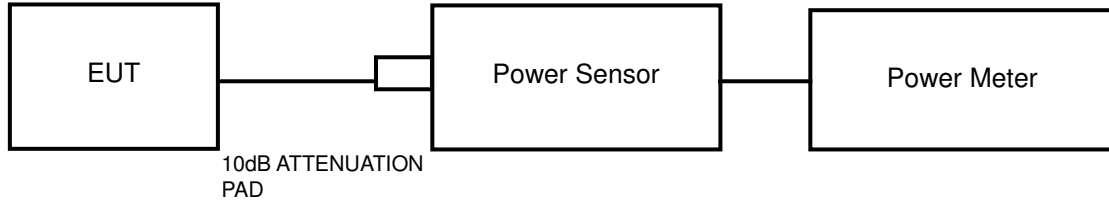

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 04,16	May 03,17
Power Sensor	Keysight	U2021XA	MY55060018	May 04,16	May 03,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 13, 16	Oct.12, 17
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 04,16	Nov. 03,17
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 04,16	Nov. 03,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 04,16	Nov. 03,17
Agile Signal Generator	Agilent	8645A	Agilent	Aug.08, 16	Aug.07, 17
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 16	Apr. 21, 17
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Aug.08, 16	Aug.07, 17

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



**BUREAU
VERITAS**

Test Report No.: RF160926N068

4.4.4 TEST PROCEDURES

An Average power sensor was used on the output port of the EUT. An Average power meter was used to read the response of the Average power sensor. Record the Average power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

802.11b

CHAN.	FREQ. (MHz)	AVG. POWER (dBm)			AVG. POWER (mW)			TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	16.01	15.87	15.96	39.902	38.637	39.446	117.985	20.72	30	PASS
6	2437	15.94	15.97	15.88	39.264	39.537	38.726	117.527	20.70	30	PASS
11	2462	16.12	15.94	15.86	40.926	39.264	38.548	118.738	20.75	30	PASS

802.11g

CHAN.	FREQ. (MHz)	AVG. POWER (dBm)			AVG. POWER (mW)			TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	12.46	12.37	12.43	17.62	17.258	17.498	52.376	17.19	30	PASS
6	2437	17.59	17.43	17.51	57.412	55.335	56.364	169.111	22.28	30	PASS
11	2462	14.01	13.82	13.89	25.177	24.099	24.491	73.767	18.68	30	PASS



802.11n 20MHz

CHAN.	FREQ. (MHz)	AVG. POWER (dBm)			AVG. POWER (mW)			TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2				
1	2412	11.47	11.40	11.52	14.028	13.804	14.191	42.023	16.23	30	PASS
6	2437	17.47	17.42	17.46	55.847	55.208	55.719	166.774	22.22	30	PASS
11	2462	12.52	12.59	12.37	17.865	18.155	17.258	53.278	17.27	30	PASS

802.11n 40MHz

CHAN.	FREQ. (MHz)	AVG. POWER (dBm)			AVG. POWER (mW)			TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2	CHAIN 0	CHAIN 1	CHAIN 2				
3	2422	8.31	8.36	8.23	6.776	6.855	6.653	20.284	13.07	30	PASS
6	2437	12.54	12.49	12.46	17.947	17.742	17.62	53.309	17.27	30	PASS
9	2452	8.71	8.61	8.64	7.43	7.261	7.311	22.002	13.42	30	PASS




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 3 kHz.
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.



4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=3) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-5.27	4.77	-0.50	4.91	PASS
	6	2437	-4.74	4.77	0.03	4.91	PASS
	11	2462	-5.51	4.77	-0.74	4.91	PASS
1	1	2412	-4.04	4.77	0.72	4.91	PASS
	6	2437	-4.64	4.77	0.13	4.91	PASS
	11	2462	-5.14	4.77	-0.37	4.91	PASS
2	1	2412	-4.37	4.77	0.40	4.91	PASS
	6	2437	-4.99	4.77	-0.22	4.91	PASS
	11	2462	-5.43	4.77	-0.66	4.91	PASS

Remark: Due ANT gain more than 6dBi, so limit 8dBm change to:
 $8 - [(4.32 + 4.77) - 6] = 8 - 3.09 = 4.91 \text{ dBm}$

802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=3) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-10.26	4.77	-5.49	4.91	PASS
	6	2437	-6.17	4.77	-1.40	4.91	PASS
	11	2462	-9.54	4.77	-4.77	4.91	PASS
1	1	2412	-9.37	4.77	-4.60	4.91	PASS
	6	2437	-5.45	4.77	-0.68	4.91	PASS
	11	2462	-9.24	4.77	-4.47	4.91	PASS
2	1	2412	-8.85	4.77	-4.08	4.91	PASS
	6	2437	-5.74	4.77	-0.97	4.91	PASS
	11	2462	-8.71	4.77	-3.94	4.91	PASS

Remark: Due ANT gain more than 6dBi, so limit 8dBm change to:
 $8 - [(4.32 + 4.77) - 6] = 8 - 3.09 = 4.91 \text{ dBm}$



802.11n 20MHz

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=3) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	1	2412	-12.34	4.77	-7.57	4.91	PASS
	6	2437	-5.64	4.77	-0.87	4.91	PASS
	11	2462	-9.55	4.77	-4.78	4.91	PASS
1	1	2412	-10.27	4.77	-5.50	4.91	PASS
	6	2437	-6.84	4.77	-2.07	4.91	PASS
	11	2462	-10.99	4.77	-6.22	4.91	PASS
2	1	2412	-9.53	4.77	-4.76	4.91	PASS
	6	2437	-6.29	4.77	-1.52	4.91	PASS
	11	2462	-10.13	4.77	-5.36	4.91	PASS

Remark: Due ANT gain more than 6dBi, so limit 8dBm change to:
 $8 - [(4.32 + 4.77) - 6] = 8 - 3.09 = 4.91 \text{ dBm}$

802.11n 40MHz

TX chain	Channel	Freq. (MHz)	PSD (dBm/3KHz)	10 log (N=3) dB	TOTAL PSD (dBm/3KHz)	Limit (dBm/3KHz)	PASS /FAIL
0	3	2422	-18.44	4.77	-13.67	4.91	PASS
	6	2437	-13.81	4.77	-9.04	4.91	PASS
	9	2452	-16.54	4.77	-11.77	4.91	PASS
1	3	2422	-15.74	4.77	-10.97	4.91	PASS
	6	2437	-13.16	4.77	-8.39	4.91	PASS
	9	2452	-17.52	4.77	-12.75	4.91	PASS
2	3	2422	-15.79	4.77	-11.02	4.91	PASS
	6	2437	-13.65	4.77	-8.88	4.91	PASS
	9	2452	-16.11	4.77	-11.34	4.91	PASS

Remark: Due ANT gain more than 6dBi, so limit 8dBm change to:
 $8 - [(4.32 + 4.77) - 6] = 8 - 3.09 = 4.91 \text{ dBm}$




**BUREAU
VERITAS**

Test Report No.: RF160926N068


CHAIN 0

SPECTRUM PLOT OF WORST VALUE


802.11b

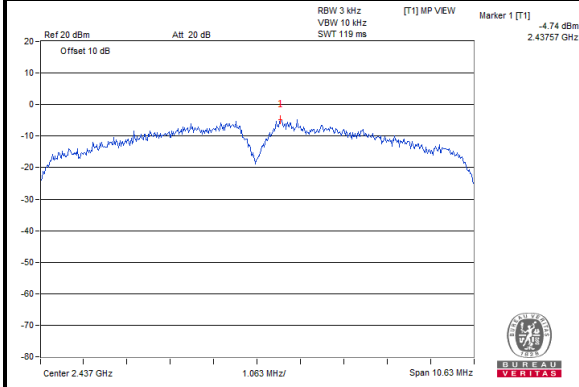


802.11g

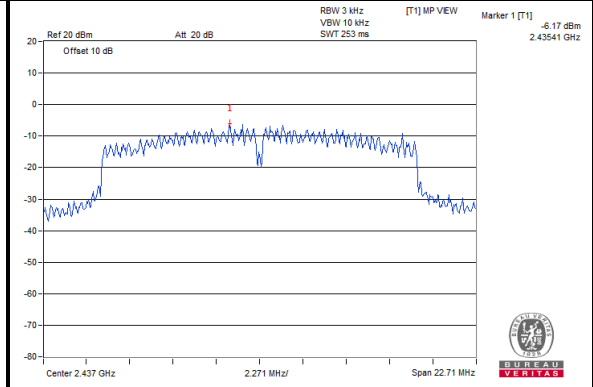

802.11n 20MHz

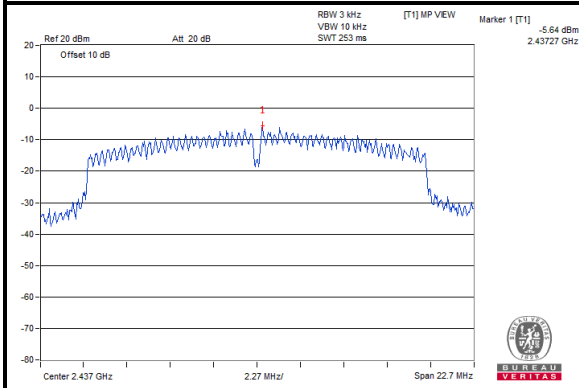

802.11n 40MHz

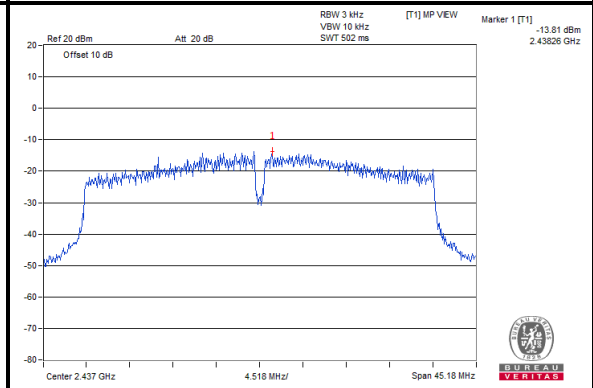




BUREAU VERITAS

Test Report No.: RF160926N068

CHAIN 1

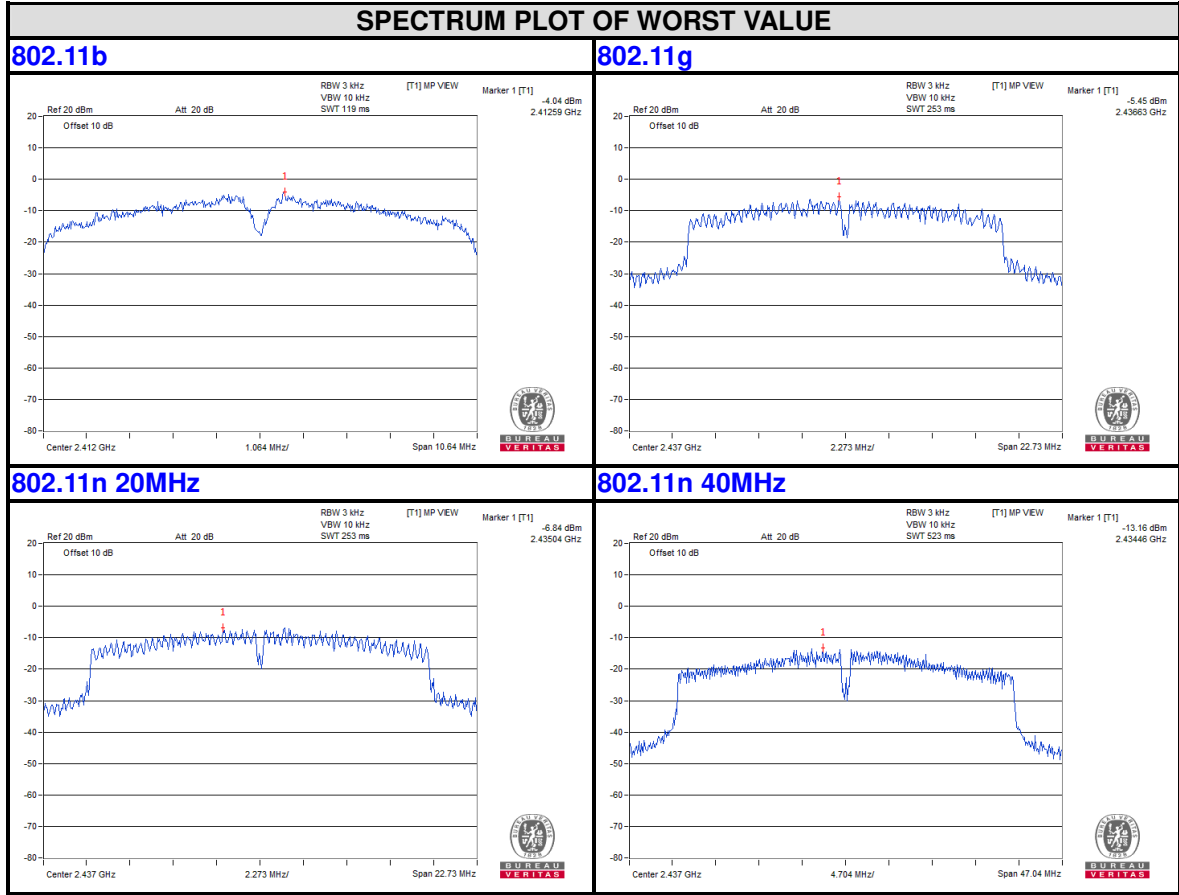

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



BUREAU VERITAS

Test Report No.: RF160926N068

CHAIN 2

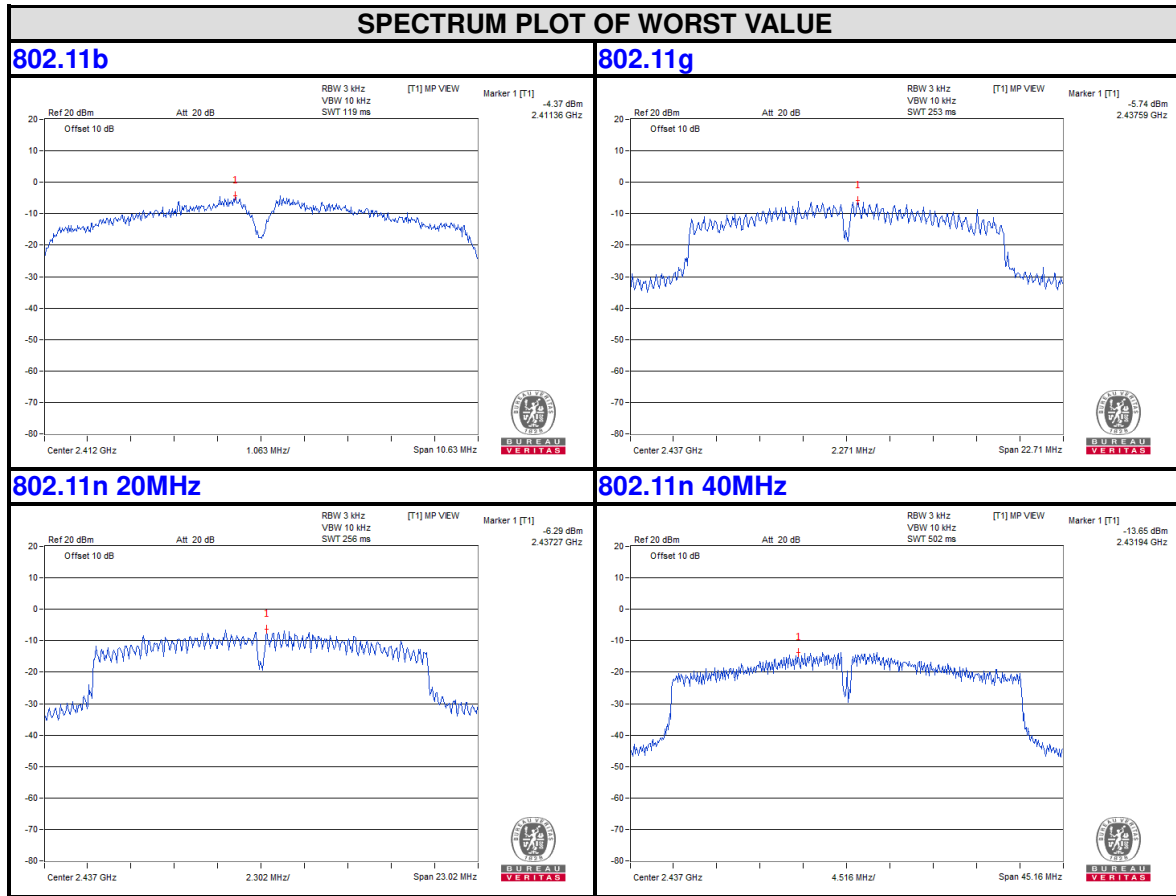

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

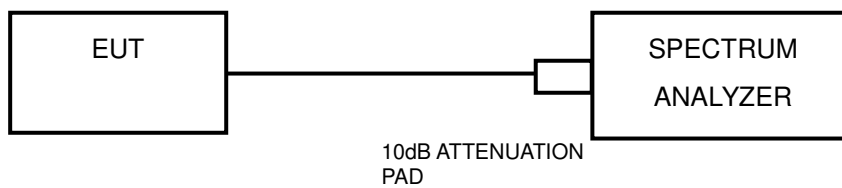

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6



BUREAU VERITAS


Test Report No.: RF160926N068

4.6.7 TEST RESULTS


802.11b

CHAIN 0


CH 1

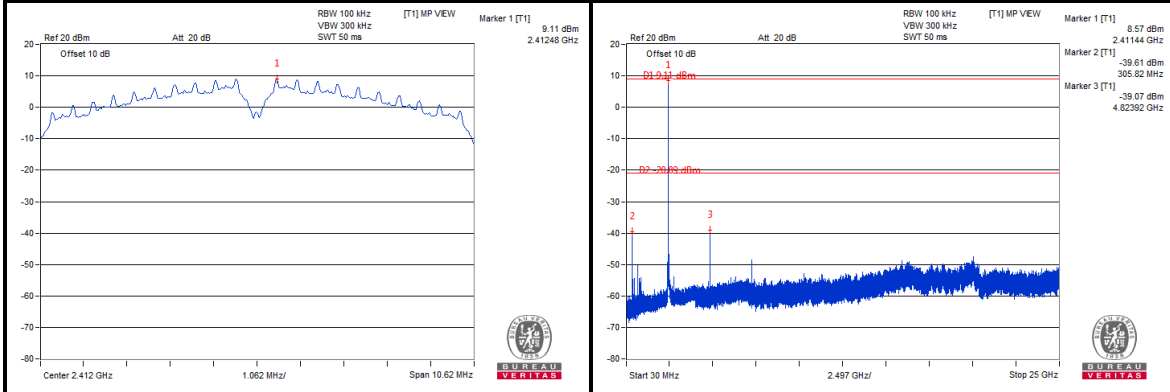

CH 6

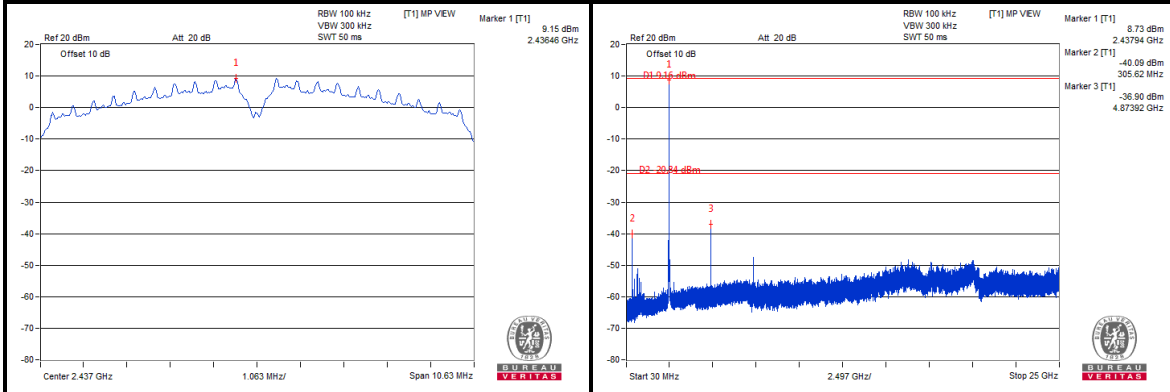

CH 11

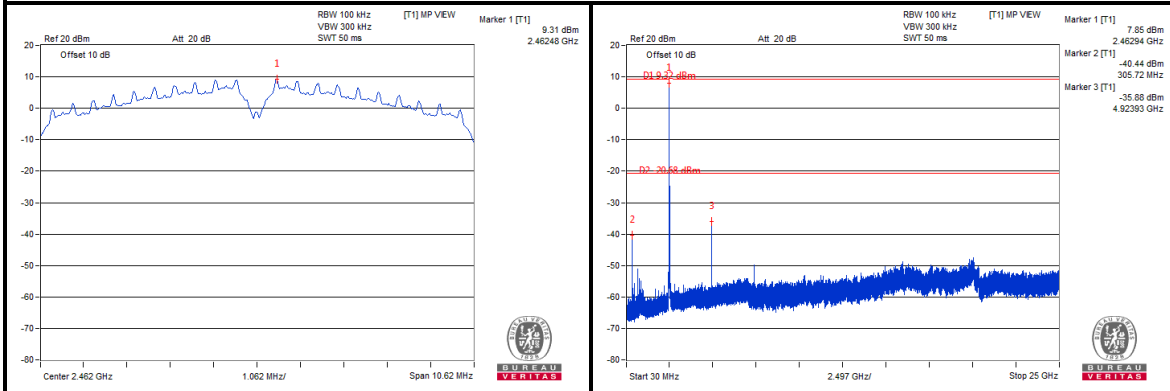





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 1



CH 1

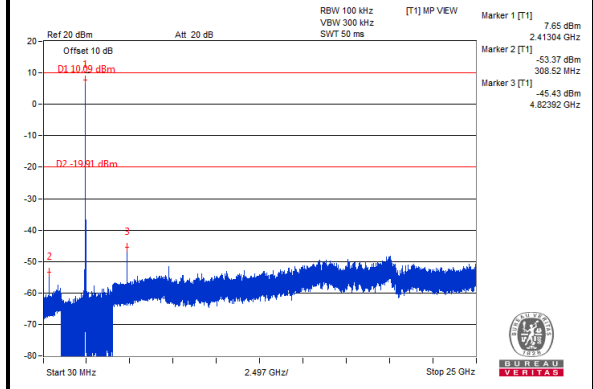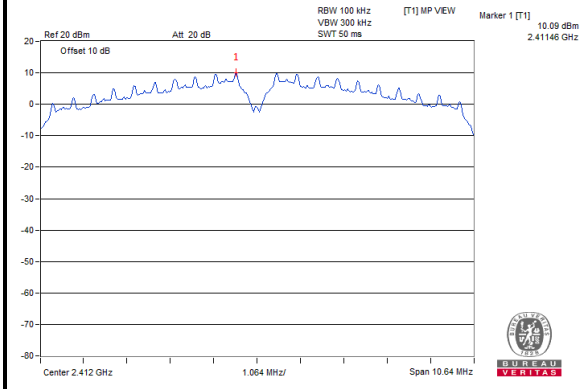

CH 6

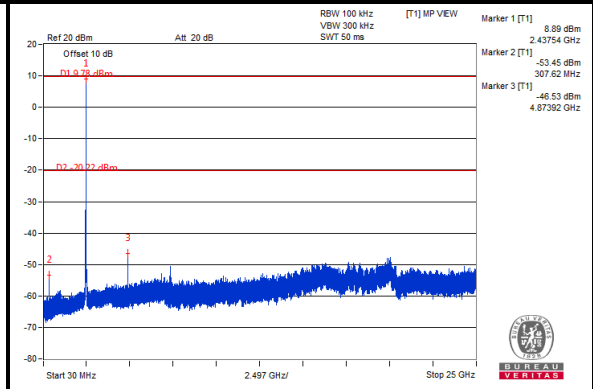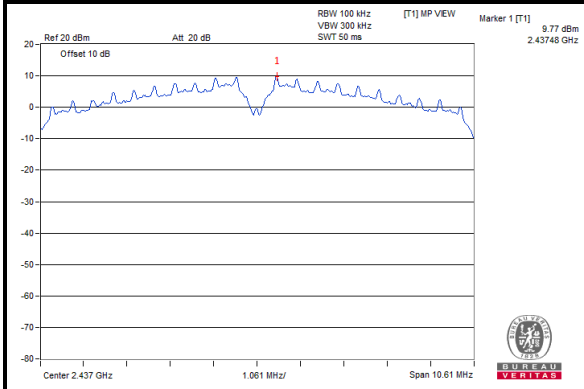

CH 11

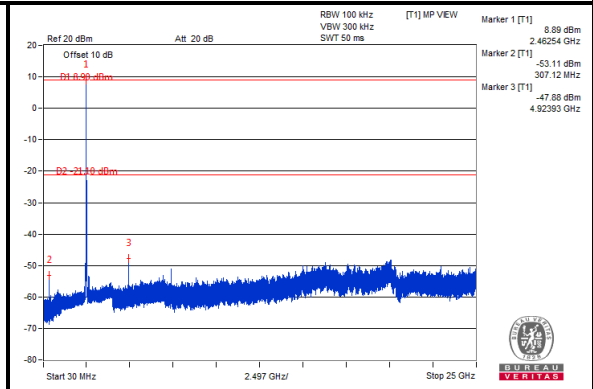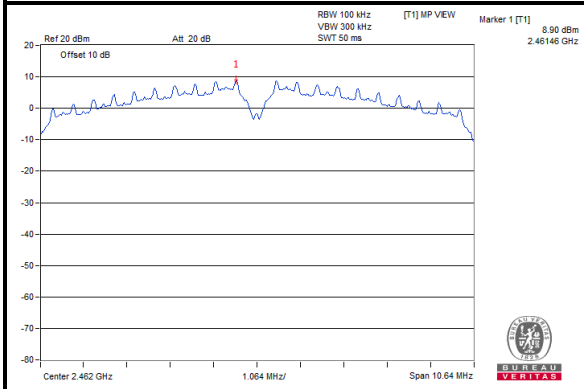

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 2



CH 1

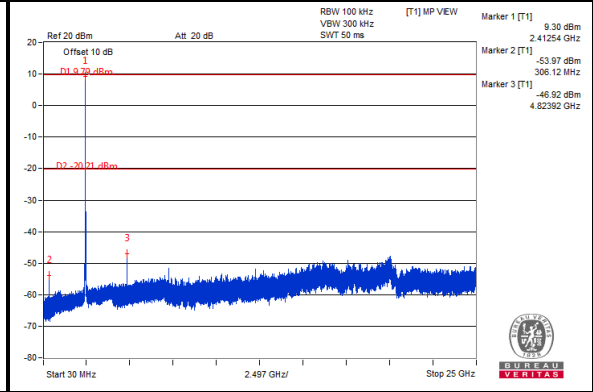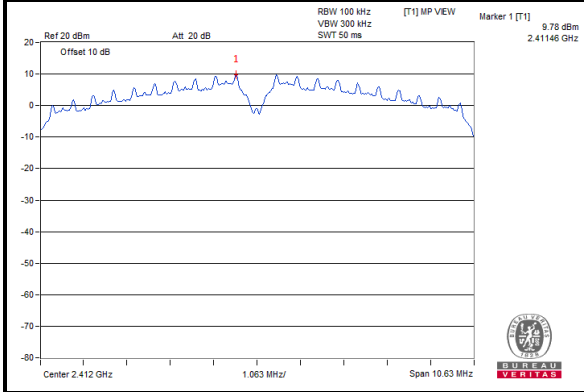

CH 6

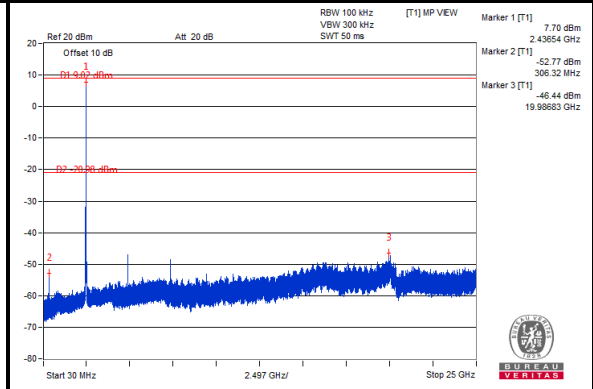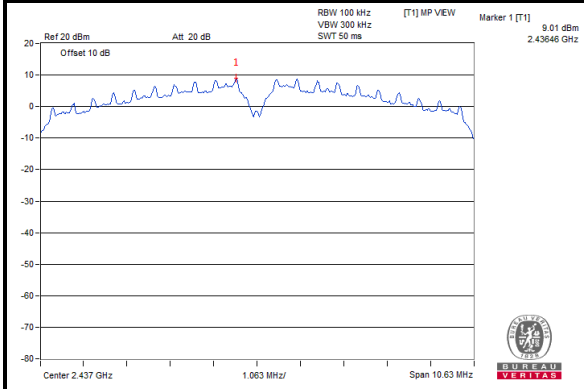

CH 11

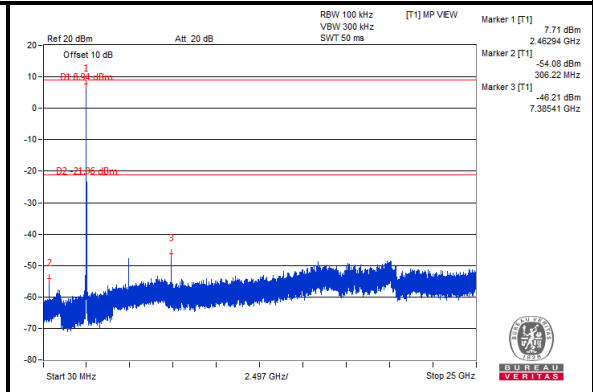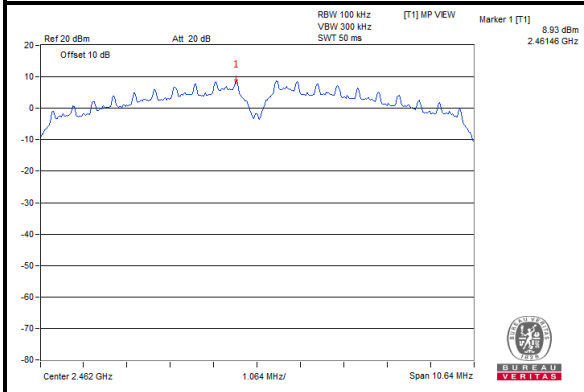

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU VERITAS

Test Report No.: RF160926N068


802.11g

CHAIN 0


CH 1

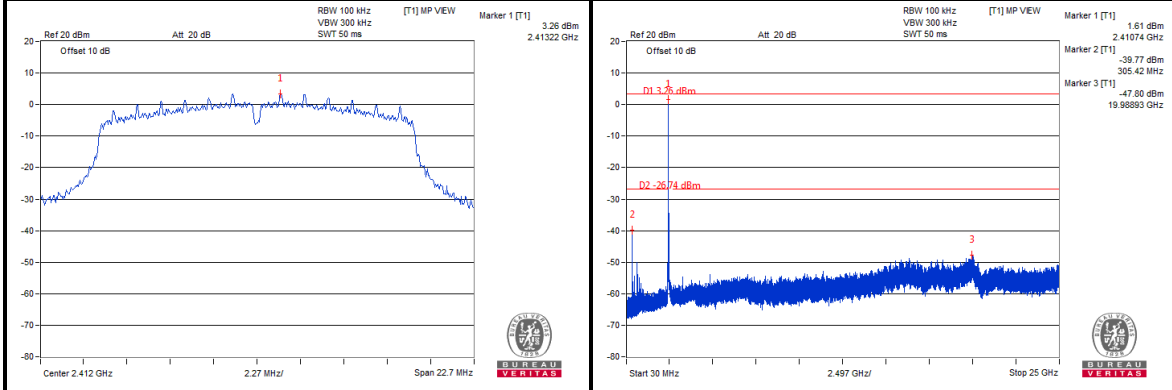

CH 6

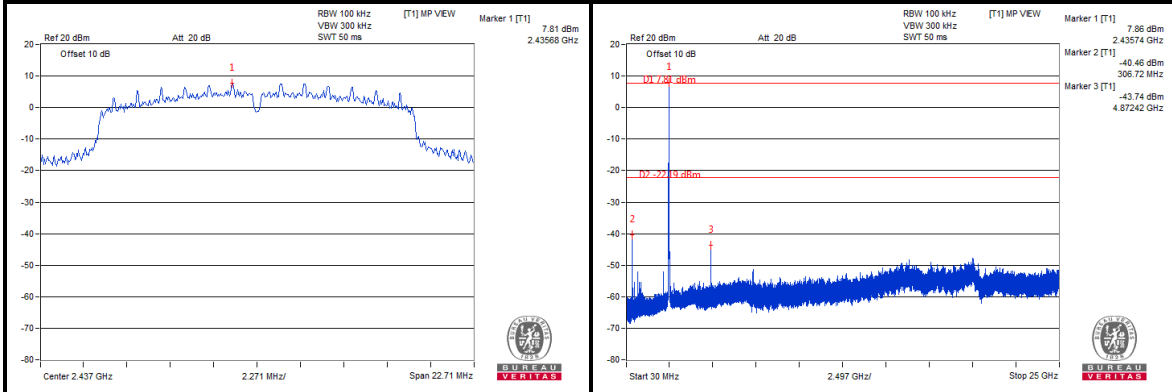

CH 11

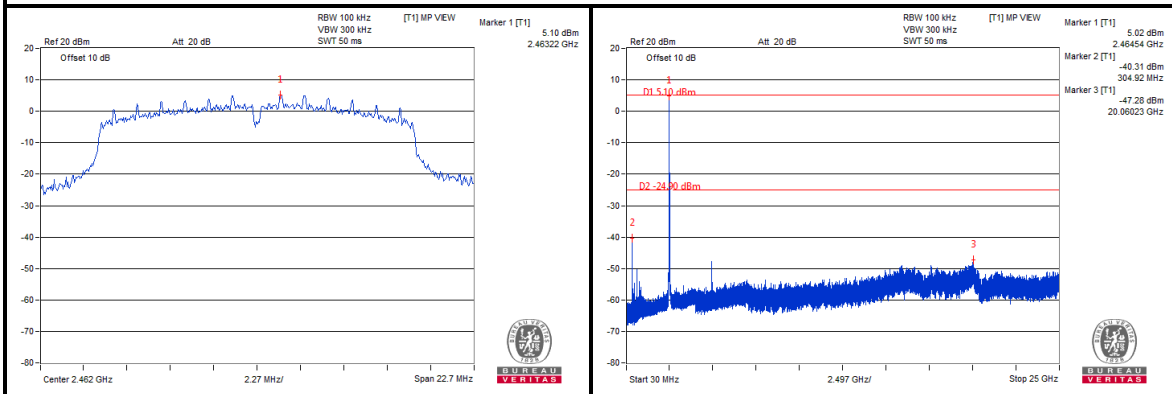





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 1



CH 1

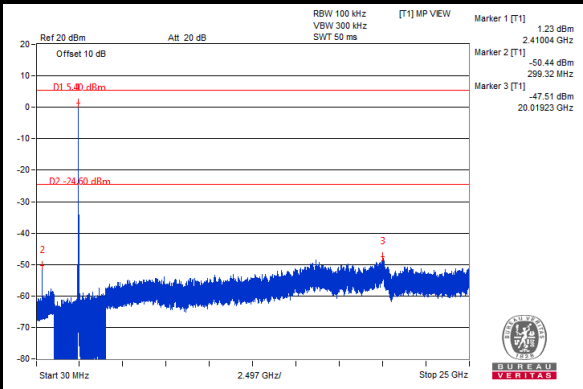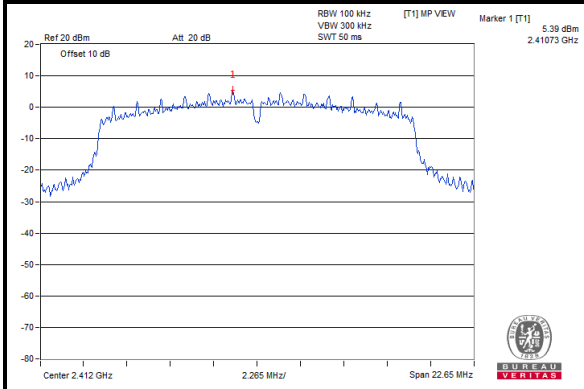

CH 6

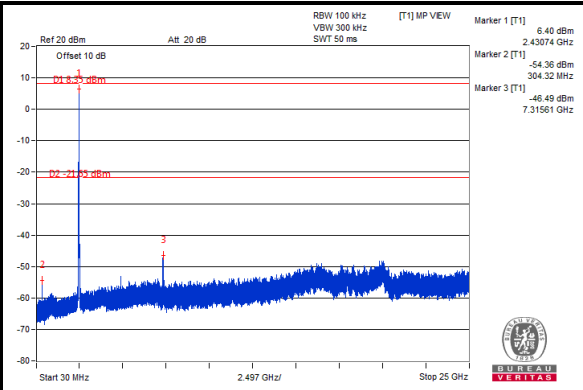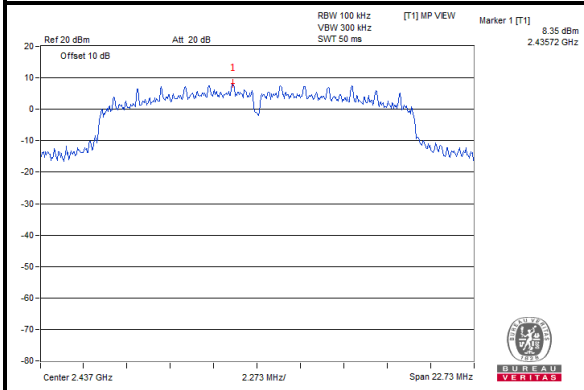

CH 11

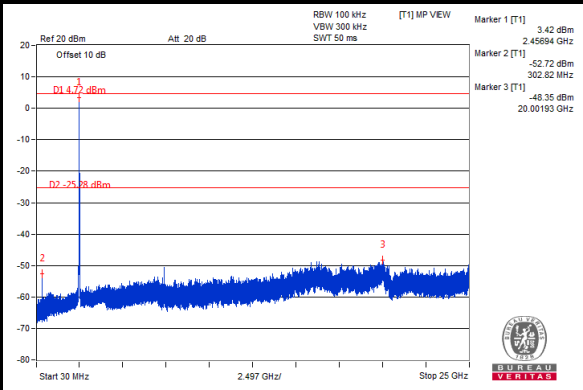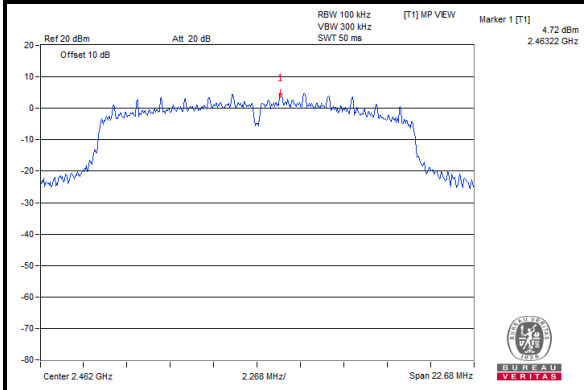





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 2



CH 1

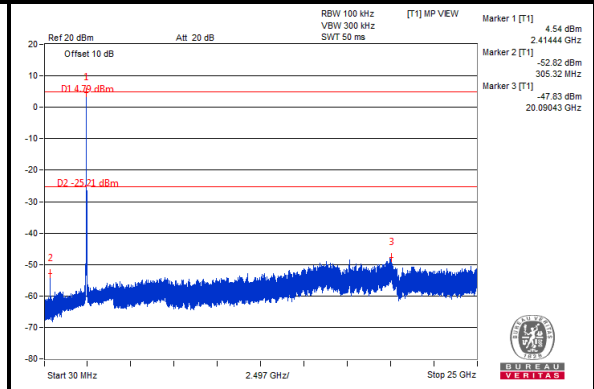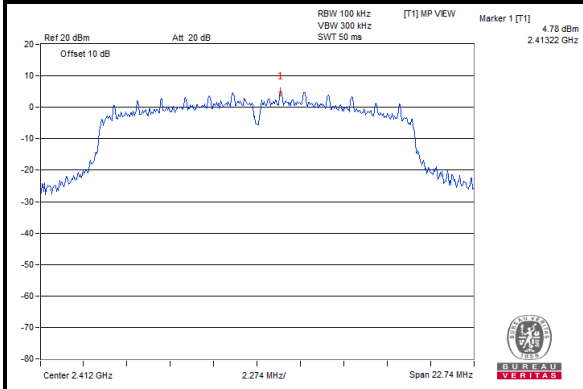

CH 6

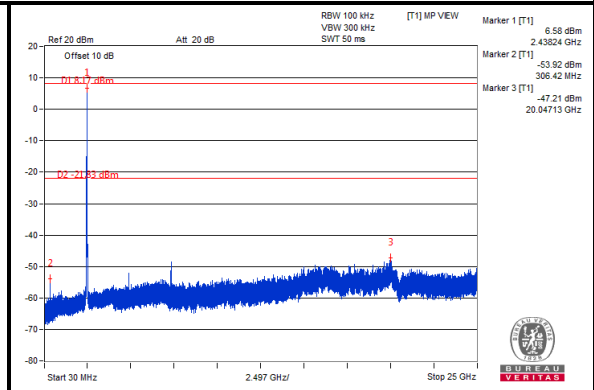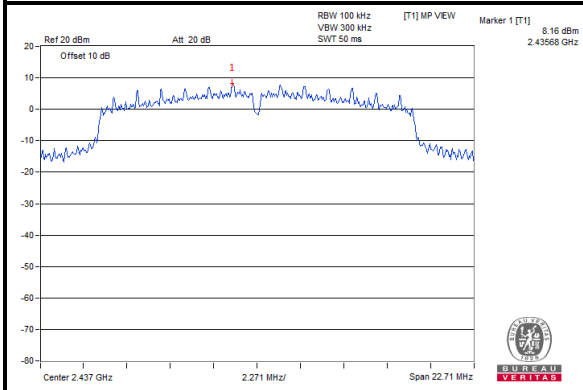

CH 11

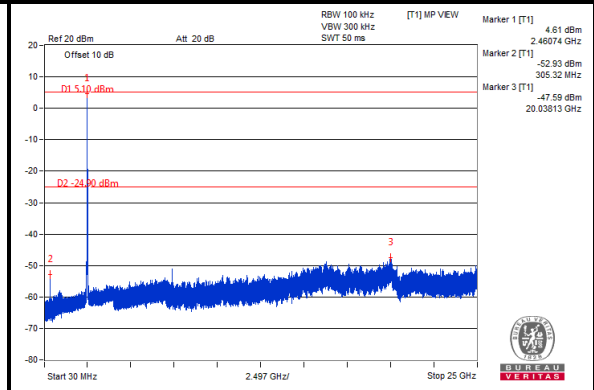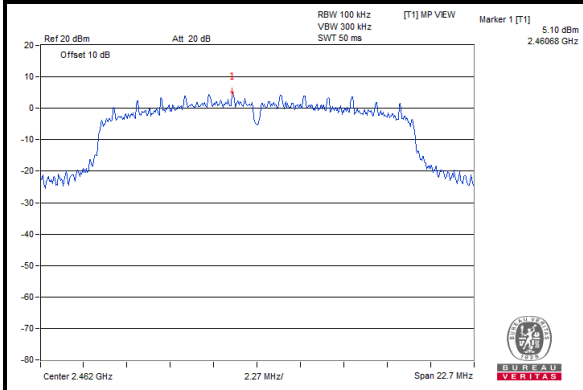

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS

Test Report No.: RF160926N068



802.11n 20MHz

CHAIN 0



CH 1

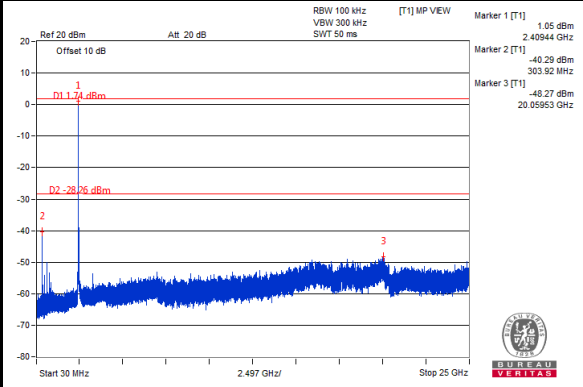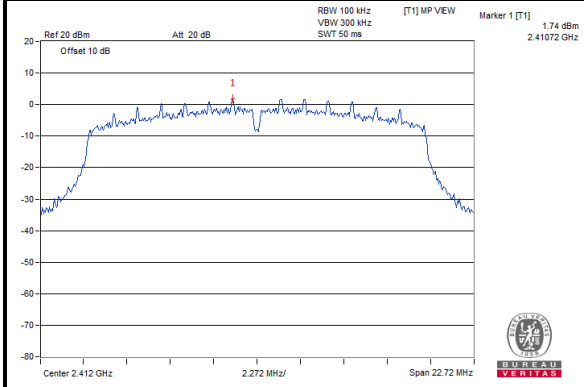

CH 6

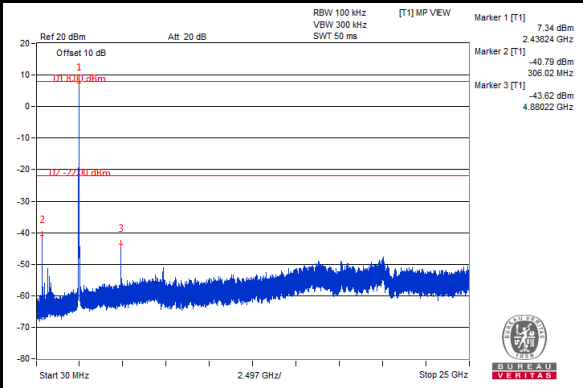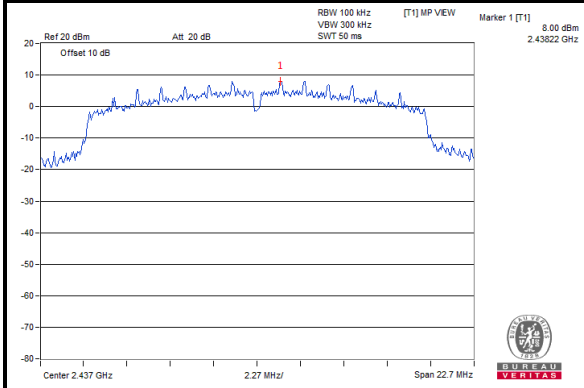

CH 11

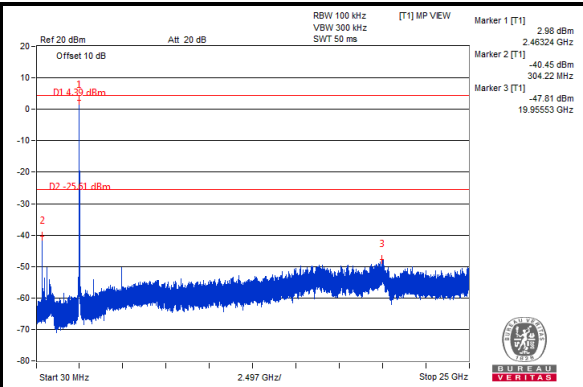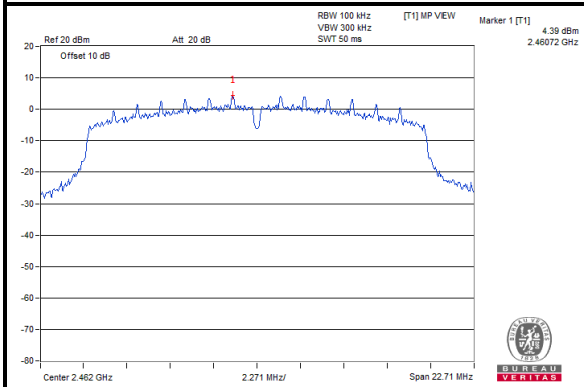




BUREAU VERITAS


Test Report No.: RF160926N068

CHAIN 1


CH 1

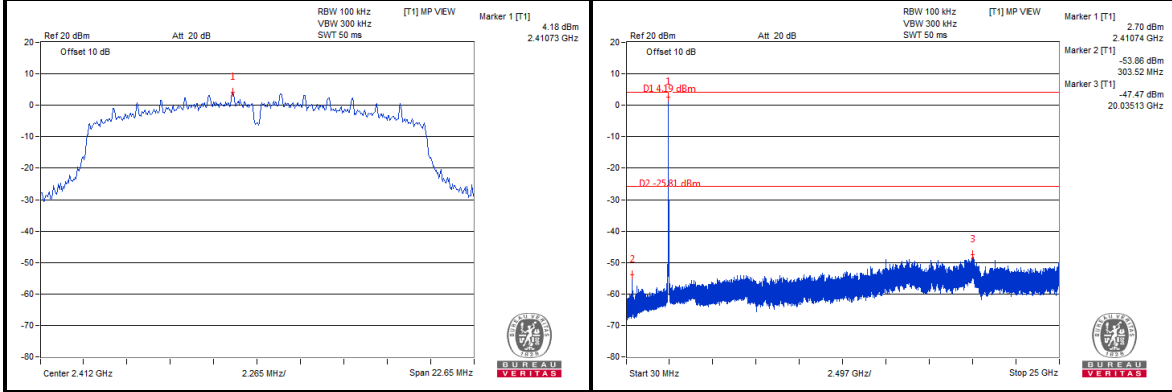

CH 6

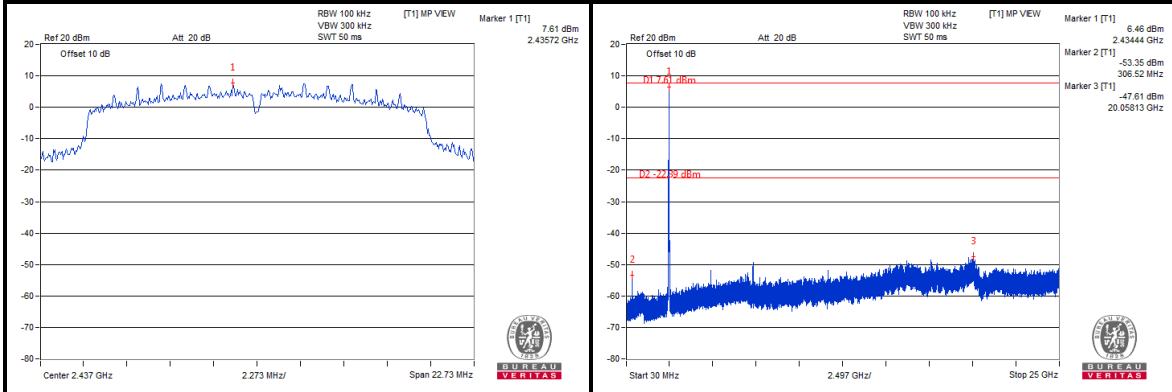

CH 11

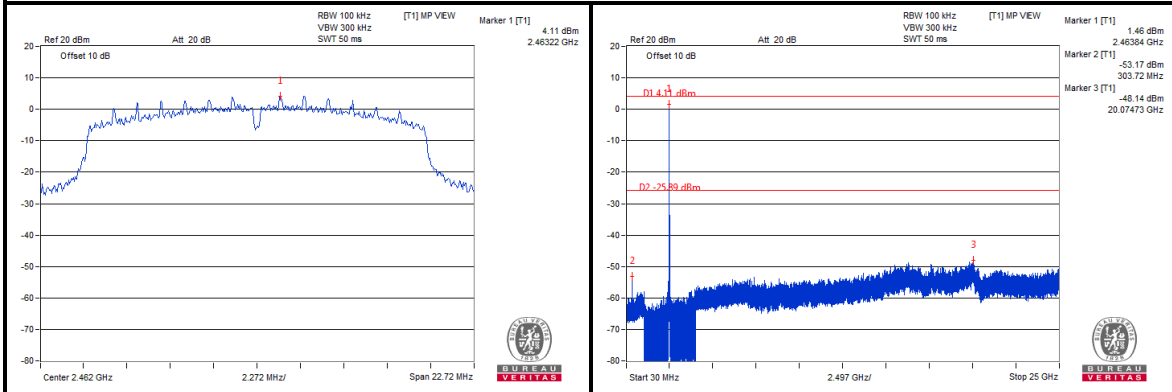

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU VERITAS


Test Report No.: RF160926N068

CHAIN 2


CH 1

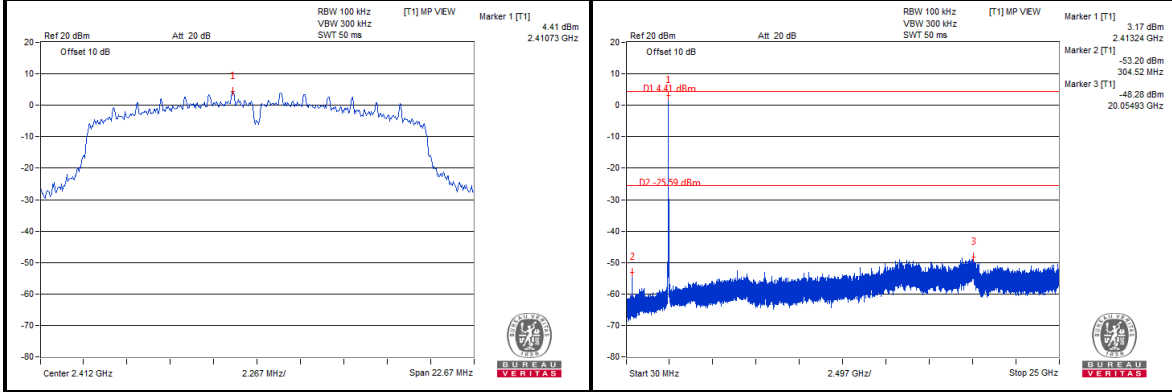

CH 6

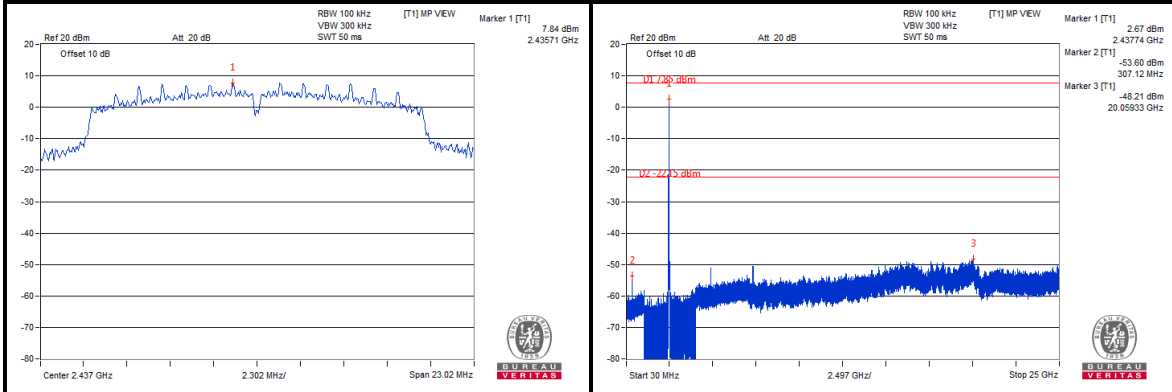

CH 11

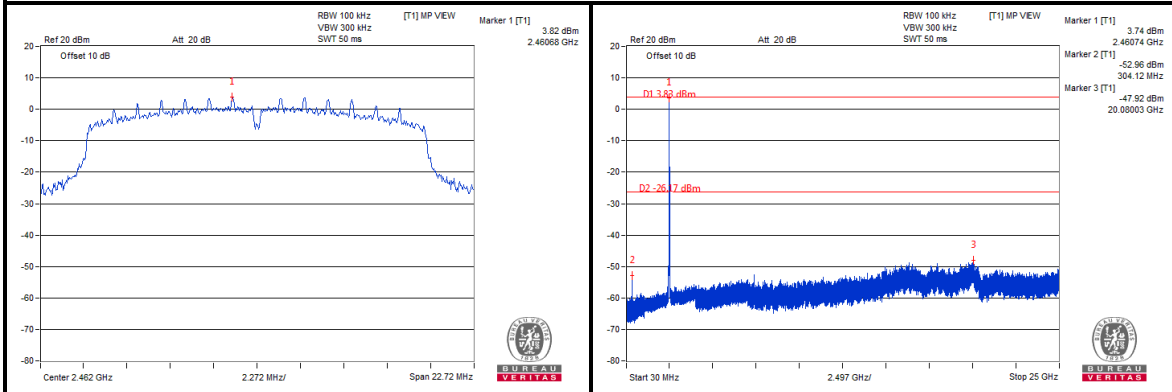

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS

Test Report No.: RF160926N068



802.11n 40MHz

CHAIN 0



CH 3

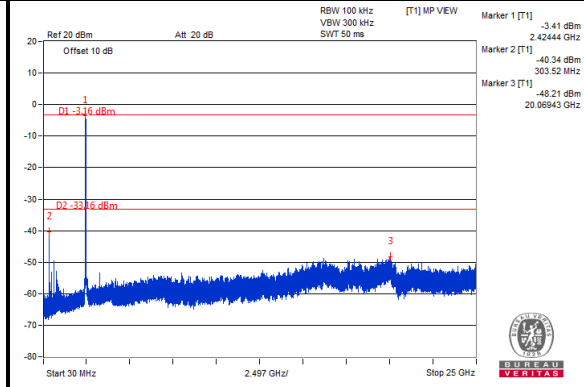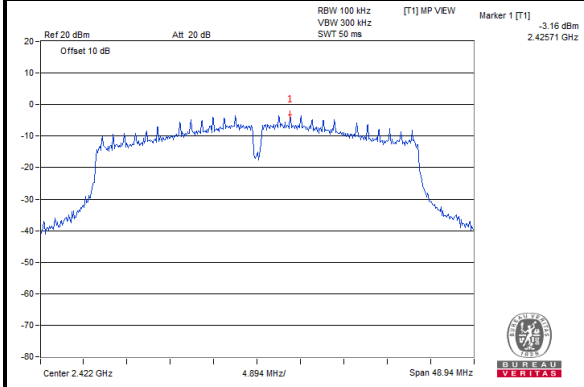

CH 6

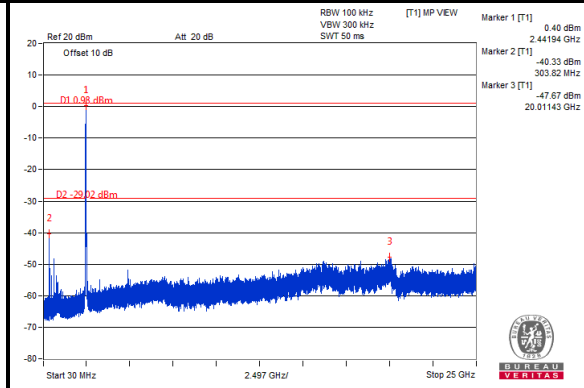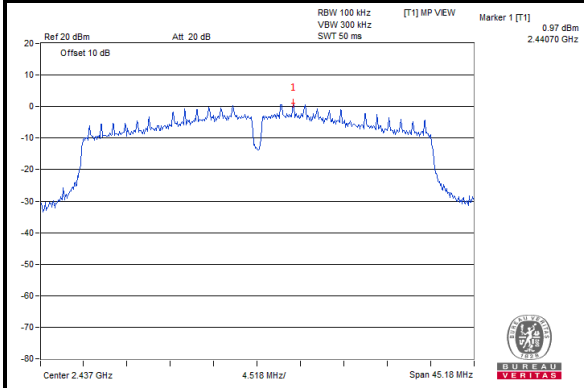

CH 9

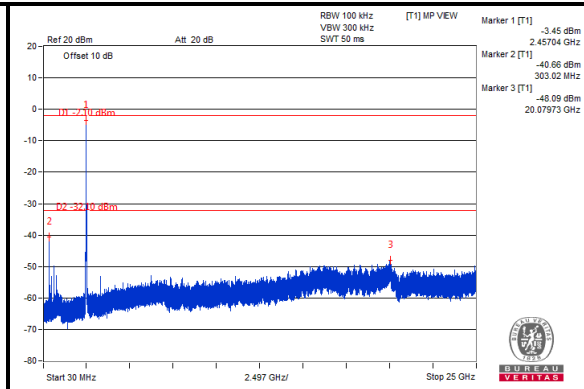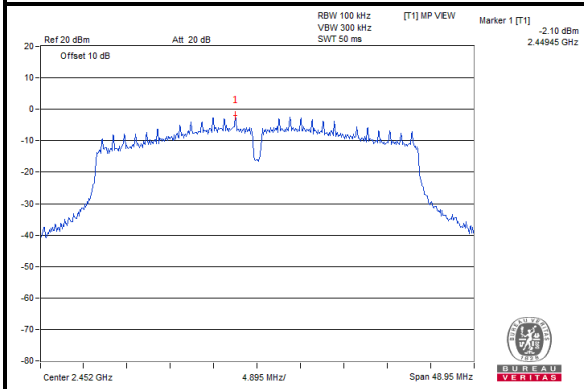





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 1



CH 3

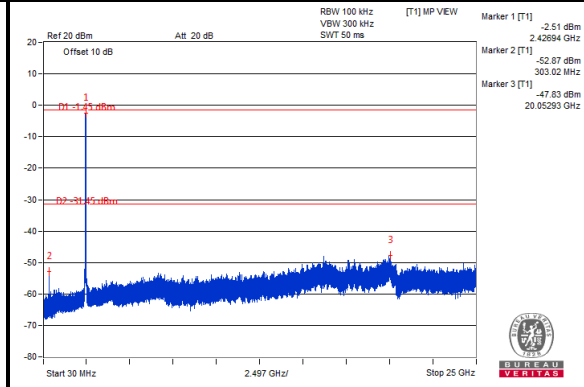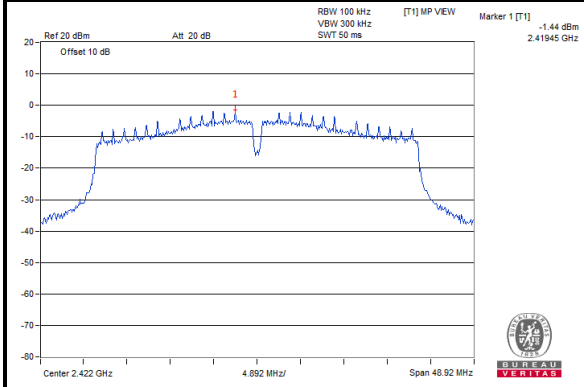

CH 6

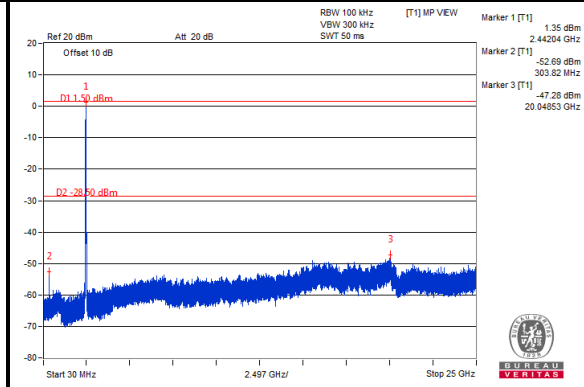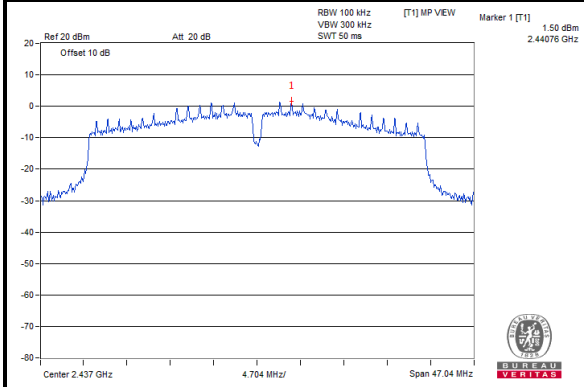

CH 9

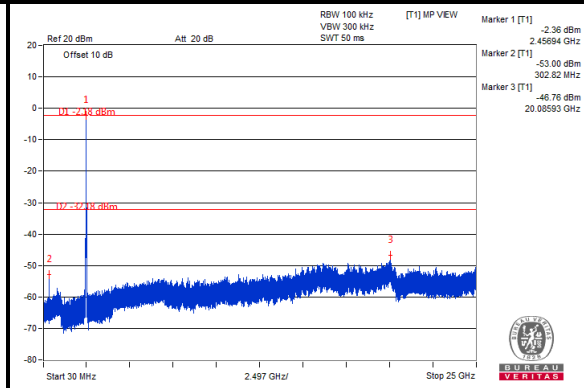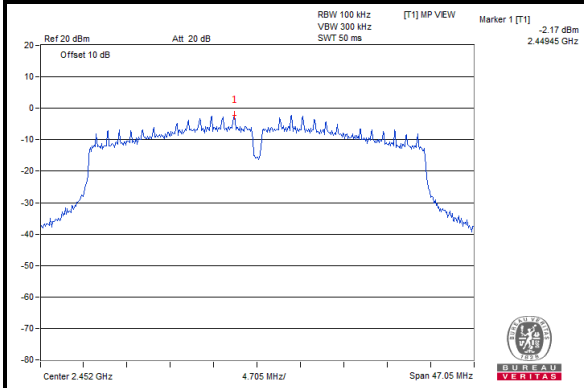

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com





BUREAU VERITAS



Test Report No.: RF160926N068

CHAIN 2



CH 3

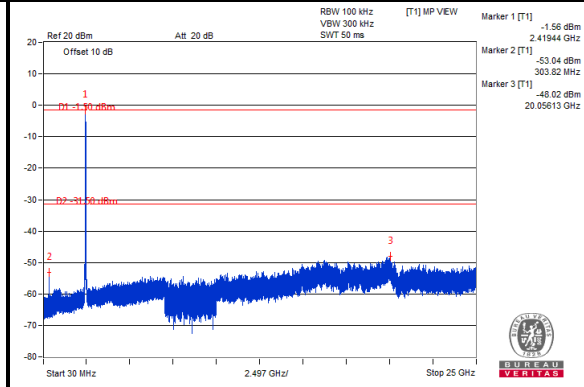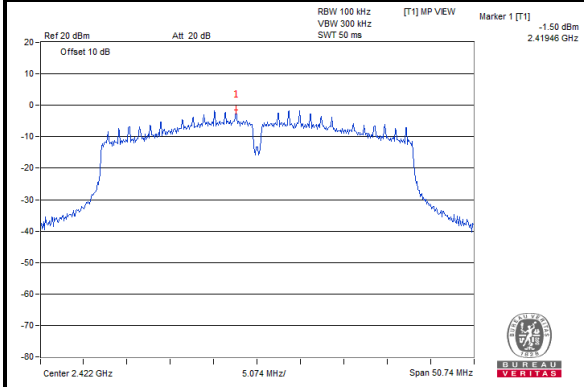

CH 6

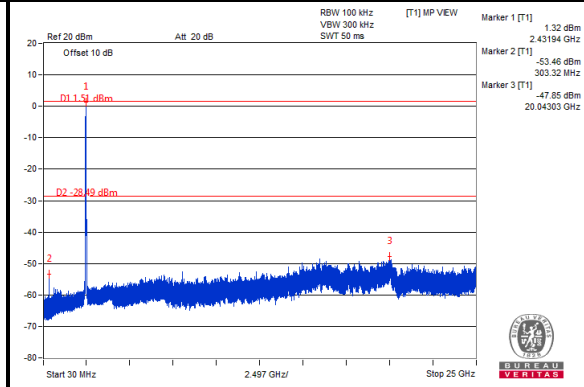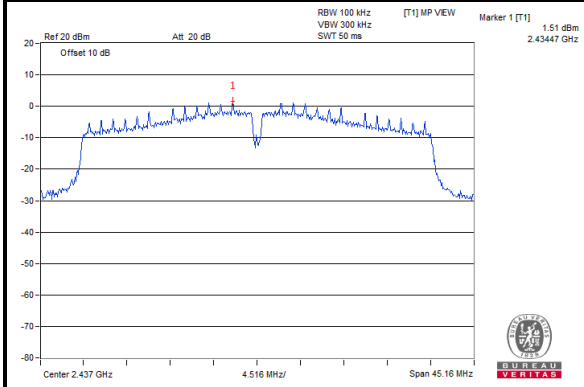

CH 9

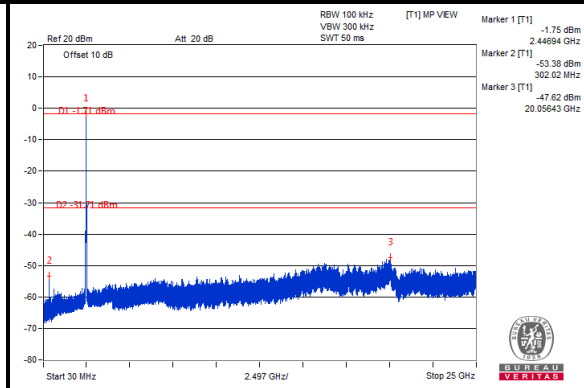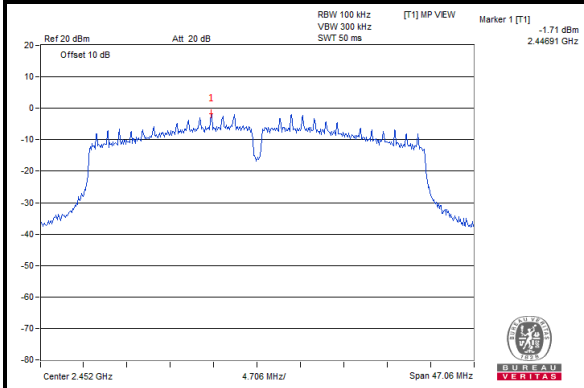

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU VERITAS

Test Report No.: RF160926N068


802.11b

CHAIN 0

CH 1 Band edge

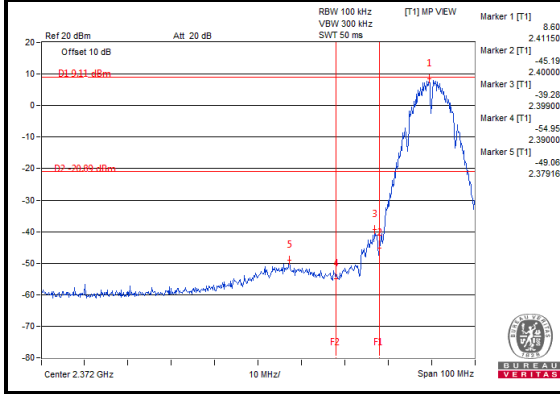


CH 11 Band edge

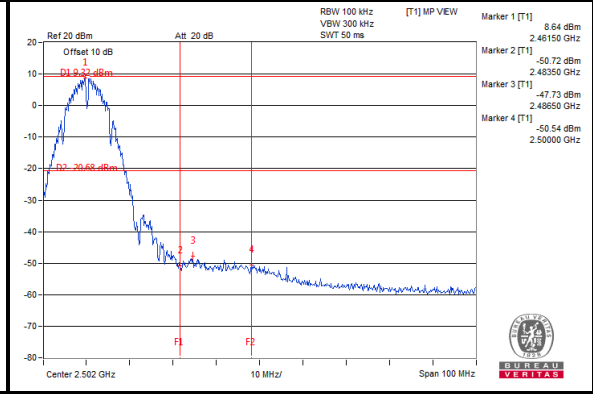


CHAIN 1

CH 1 Band edge

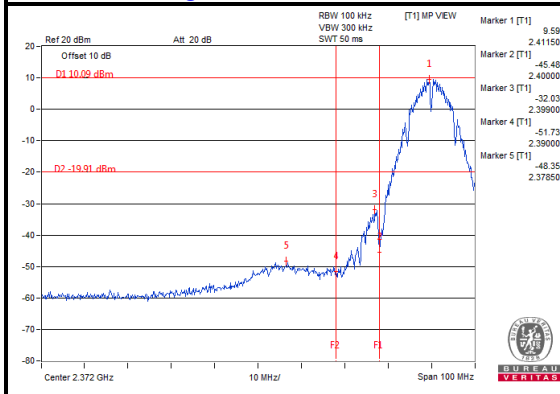


CH 11 Band edge

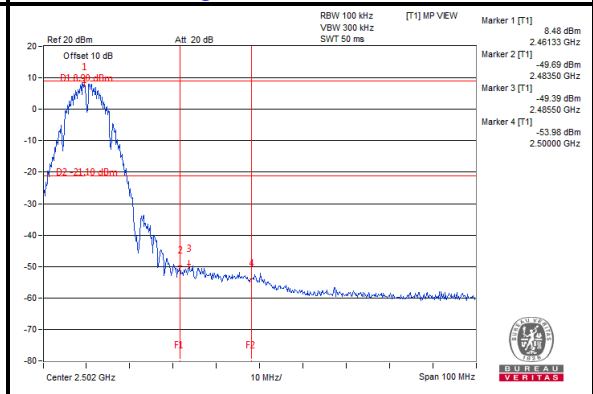


CHAIN 2

CH 1 Band edge

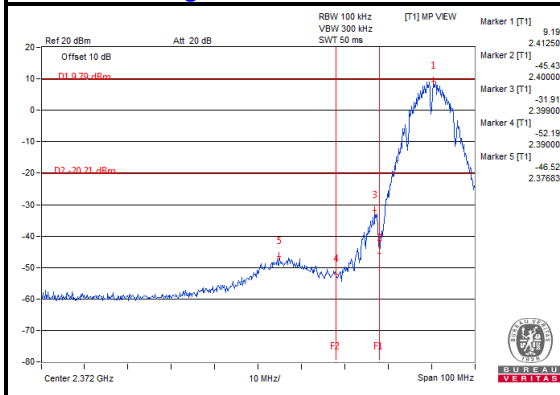

CH 11 Band edge

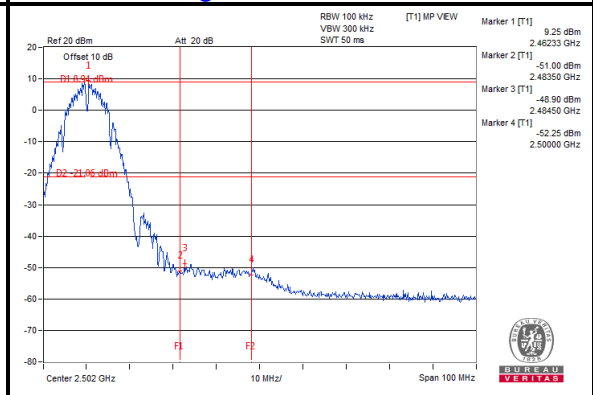

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU VERITAS

Test Report No.: RF160926N068


802.11g

CHAIN 0

CH 1 Band edge

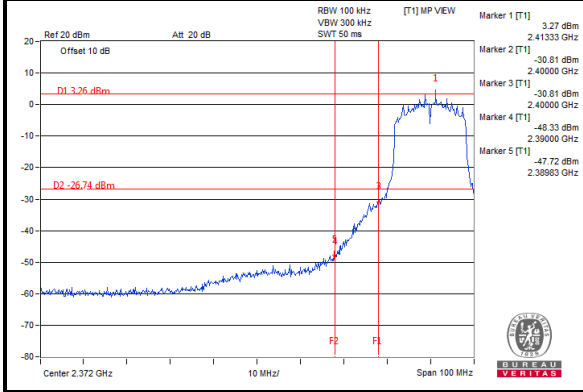


CH 11 Band edge

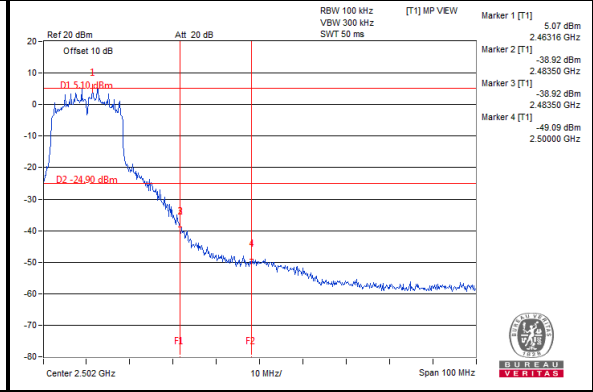


CHAIN 1

CH 1 Band edge

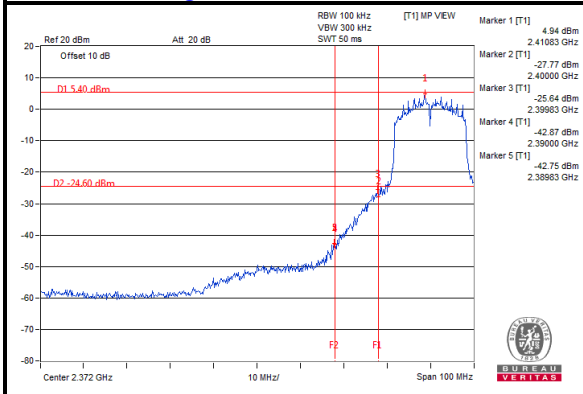


CH 11 Band edge

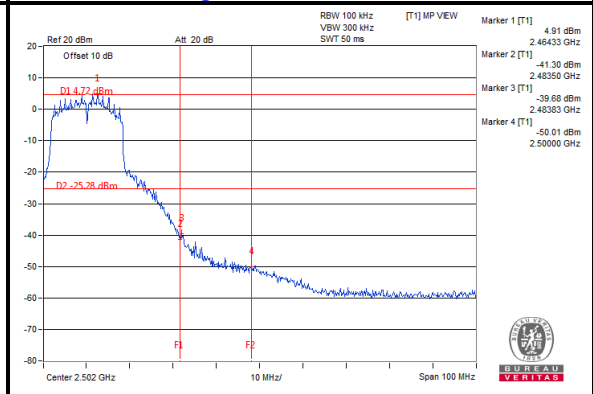


CHAIN 2

CH 1 Band edge

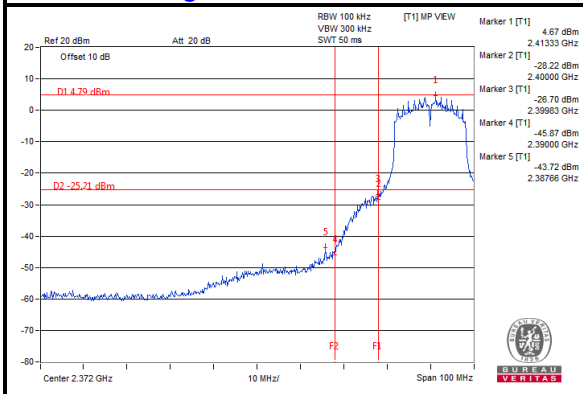

CH 11 Band edge

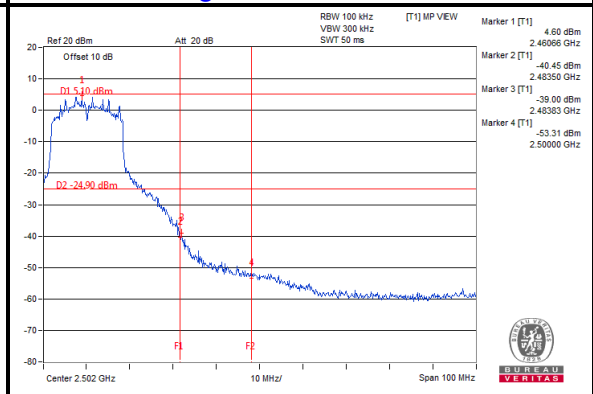




BUREAU VERITAS

Test Report No.: RF160926N068


802.11n 20MHz

CHAIN 0

CH 1 Band edge

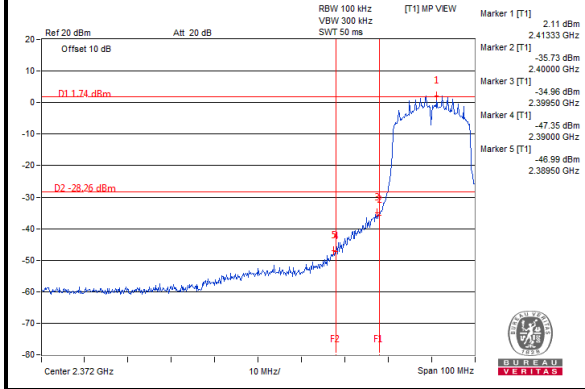


CH 11 Band edge

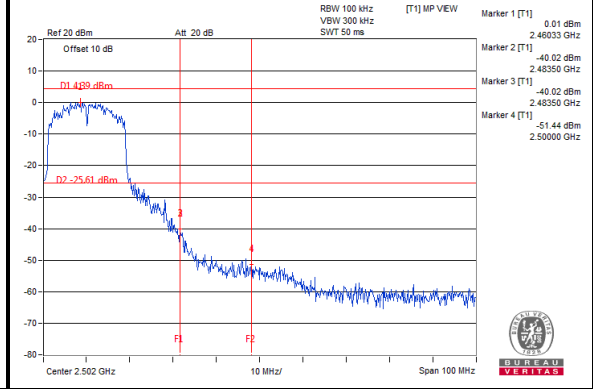


CHAIN 1

CH 1 Band edge

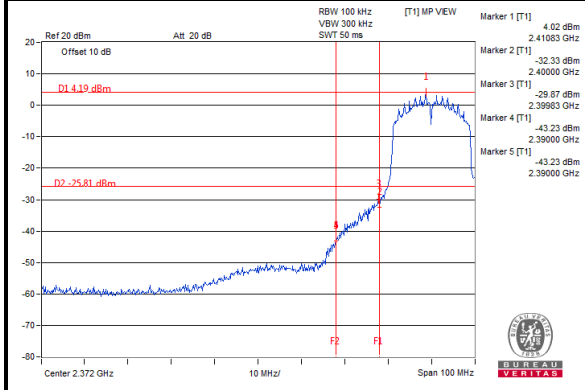


CH 11 Band edge

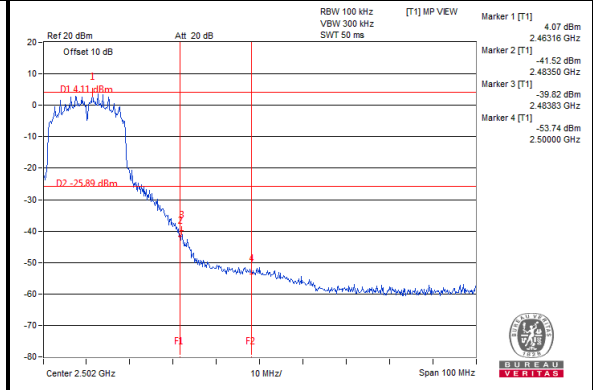


CHAIN 2

CH 1 Band edge

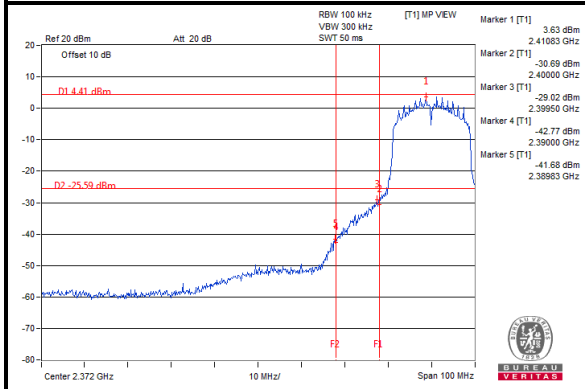

CH 11 Band edge

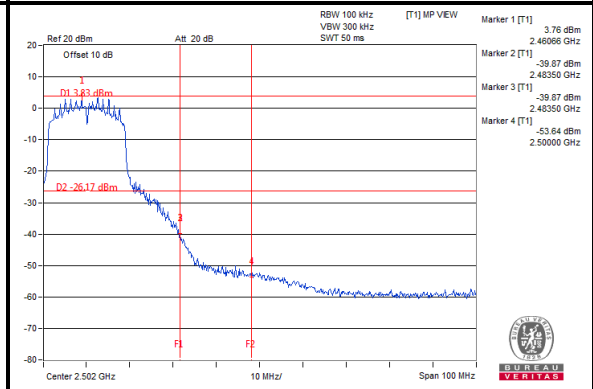

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




BUREAU VERITAS

Test Report No.: RF160926N068


802.11n 40MHz

CHAIN 0

CH 3 Band edge

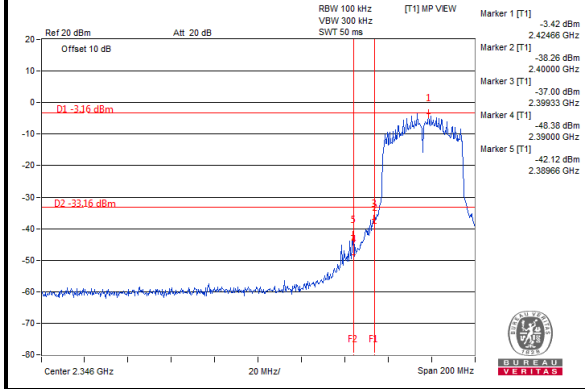


CH 9 Band edge

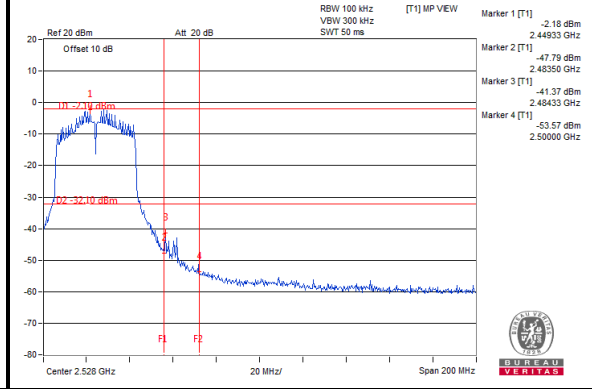


CHAIN 1

CH 3 Band edge

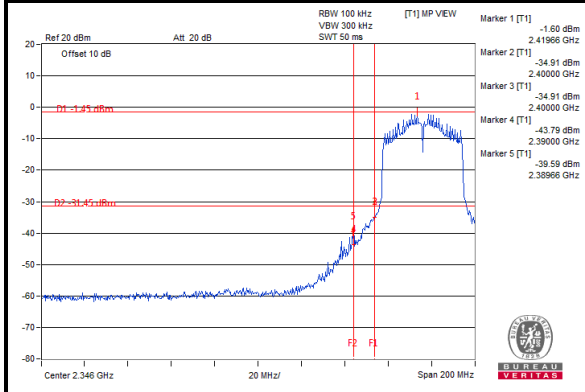


CH 9 Band edge

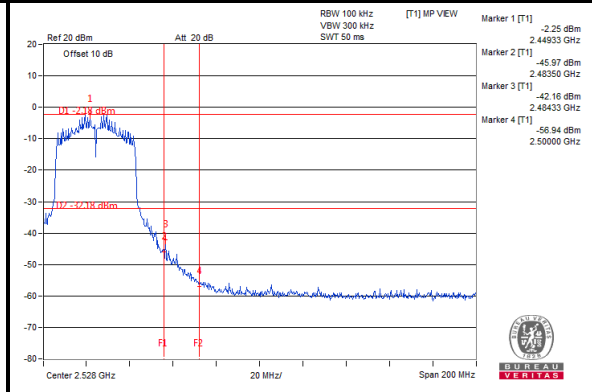


CHAIN 2

CH 3 Band edge

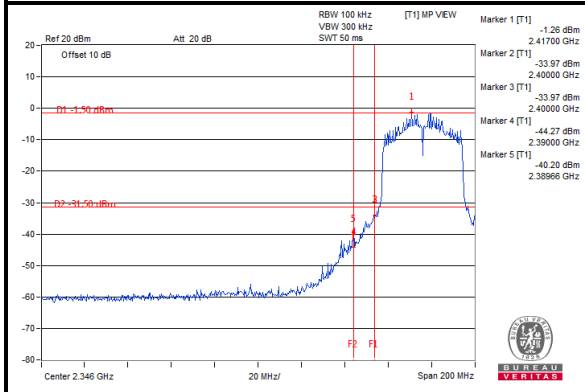

CH 9 Band edge

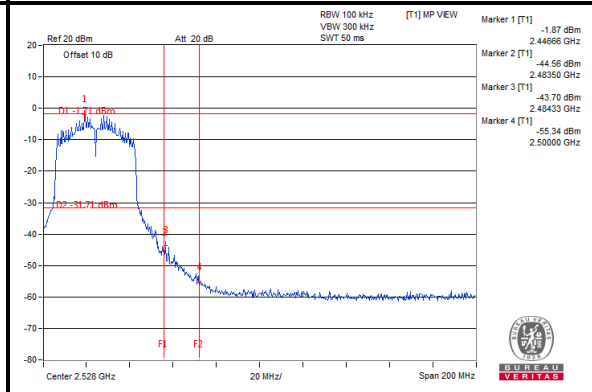

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie
Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF160926N068

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: RF160926N068

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---