



# TEST REPORT

Applicant	TP-LINK TECHNOLOGIES CO., LTD.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China

Manufacturer or Supplier	TP-LINK TECHNOLOGIES CO., LTD.
Address	Building 24 (floors 1,3,4,5) and 28 (floors1-4) Central Science and Technology Park, Shennan Rd, Nanshan, Shenzhen, China
Product	300Mbps Wireless N Router
Brand Name	TP-LINK
Model	TL-WR845N
Additional Model & Model Difference	N/A
Date of tests	Feb. 22, 2016 ~ Mar. 11, 2016

The tests have been carried out according to the requirements of the following standard:

**FCC Part 15, Subpart C, Section 15.247**

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Tested by Harry Li Project Engineer/ EMC Department	Approved by Chris Chen Manager / EMC Department
	Date: Mar. 11, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



# TABLE OF CONTENTS

**RELEASE CONTROL RECORD ..... 4**

**1 SUMMARY OF TEST RESULTS..... 5**

**2 MEASUREMENT UNCERTAINTY ..... 5**

**3 GENERAL INFORMATION ..... 6**

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 7

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST ..... 8

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 8

3.3 DUTY CYCLE OF TEST SIGNAL ..... 10

3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS..... 11

3.5 DESCRIPTION OF SUPPORT UNITS..... 11

**4 TEST TYPES AND RESULTS..... 12**

4.1 CONDUCTED EMISSION MEASUREMENT ..... 12

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT ..... 12

4.1.2 TEST INSTRUMENTS..... 12

4.1.3 TEST PROCEDURES ..... 13

4.1.4 DEVIATION FROM TEST STANDARD ..... 13

4.1.5 TEST SETUP..... 14

4.1.6 EUT OPERATING CONDITIONS..... 14

4.1.7 TEST RESULTS ..... 15

4.2 RADIATED EMISSION MEASUREMENT ..... 17

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT ..... 17

4.2.2 TEST INSTRUMENTS..... 18

4.2.3 TEST PROCEDURES ..... 19

4.2.4 DEVIATION FROM TEST STANDARD ..... 19

4.2.5 TEST SETUP..... 20

4.2.6 EUT OPERATING CONDITIONS..... 21

4.2.7 TEST RESULTS ..... 22

4.3 6DB BANDWIDTH MEASUREMENT..... 36

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT ..... 36

4.3.2 TEST INSTRUMENTS..... 36

4.3.3 TEST PROCEDURE..... 36

4.3.4 DEVIATION FROM TEST STANDARD ..... 36



4.3.5	TEST SETUP .....	37
4.3.6	EUT OPERATING CONDITIONS .....	37
4.3.7	TEST RESULTS .....	38
4.4	CONDUCTED OUTPUT POWER .....	42
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT .....	42
4.4.2	TEST SETUP .....	42
4.4.3	TEST INSTRUMENTS.....	42
4.4.4	TEST PROCEDURES .....	43
4.4.5	DEVIATION FROM TEST STANDARD .....	43
4.4.6	EUT OPERATING CONDITIONS .....	43
4.4.7	TEST RESULTS .....	44
4.5	POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT .....	46
4.5.2	TEST SETUP .....	46
4.5.3	TEST INSTRUMENTS.....	46
4.5.4	TEST PROCEDURE .....	46
4.5.5	DEVIATION FROM TEST STANDARD .....	46
4.5.6	EUT OPERATING CONDITION .....	47
4.5.7	TEST RESULTS .....	47
4.6	OUT OF BAND EMISSION MEASUREMENT .....	51
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT .....	51
4.6.2	TEST SETUP .....	51
4.6.3	TEST INSTRUMENTS.....	51
4.6.4	TEST PROCEDURE .....	51
4.6.5	DEVIATION FROM TEST STANDARD .....	52
4.6.6	EUT OPERATING CONDITION .....	52
4.6.7	TEST RESULTS .....	53
<b>5</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION .....</b>	<b>65</b>
<b>6</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>66</b>



**BUREAU**  
**VERITAS**

Test Report No.: RF160122N030

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF160122N030	Original release	Mar. 11, 2016



# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Unique antenna connector is used

# 2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.67dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	4.84dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	300Mbps Wireless N Router
<b>MODEL NO.</b>	TL-WR845N
<b>FCC ID</b>	TE7WR845N
<b>NOMINAL VOLTAGE</b>	DC 9V From Adapter Input AC 100-240V 50/60Hz
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS, OFDM
<b>OPERATING FREQUENCY</b>	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
<b>AVERAGE POWER</b>	22.34dBm (Measured Average Power)
<b>ANTENNA TYPE</b>	Dipole Antenna; 4.0dBi gain
<b>I/O PORTS</b>	Refer to user's manual
<b>CABLE SUPPLIED</b>	N/A

**NOTE:**

1. The EUT incorporates a MIMO function. Physically, the EUT provides two transmitters and two receivers.

MODULATION MODE	FUNCTION
802.11b	2TX/2RX
802.11g	2TX/2RX
802.11n (HT20)	2TX/2RX
802.11n (HT40)	2TX/2RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 160122N030) for detailed product photo.
5. The EUT was powered by the following adapters:

ADAPTER	
BRAND:	TP-LINK
MODEL:	T090060-2B1
INPUT:	AC 100-240V, 50/60Hz
OUTPUT:	DC 9V, 0.6A
CABLE:	UnShielded, Non-Detachable, 1.5m



### 3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



### 3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

### 3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	<b>Powered by AC 120V with WIFI function</b>

Where **RE<1G**: Radiated Emission below 1GHz      **RE≥1G**: Radiated Emission above 1GHz  
**PLC**: Power Line Conducted Emission      **APCM**: Antenna Port Conducted Measurement

**NOTE**: No need to concern of Conducted Emission due to the EUT is powered by battery.

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) Link

#### **RADIATED EMISSION TEST (BELOW 1GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11g	1 to 11	1	OFDM	BPSK	6.0	X





**RADIATED EMISSION TEST (ABOVE 1GHz):**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0	X
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	X

**BANDEDGE MEASUREMENT:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5



**ANTENNA PORT CONDUCTED MEASUREMENT:**

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	CCK	DBPSK	1.0
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	26deg. C, 67%RH	DC 9V From Adapter	Sen He
RE≥1G	26deg. C, 67%RH	DC 9V From Adapter	Sen He
PLC	20deg. C, 56%RH	DC 9V From Adapter	Sen He
APCM	20deg. C, 55%RH	DC 9V From Adapter	Blue Zheng

**3.3 DUTY CYCLE OF TEST SIGNAL**

**Chain 0:**

Duty cycle of test signal is 100 %

**Chain 1:**

Duty cycle of test signal is 100 %



### 3.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

- FCC Part 15, Subpart C, Section 15.247**
- 558074 D01 DTS Meas Guidance v03r04**
- ANSI C63.10-2013**

All test items have been performed and recorded as per the above standards.

**NOTE:** It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B(DoC). The test report has been issued separately.

### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	N/A	N/A	N/A	N/A	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	N/A



## 4 TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
  3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

#### 4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	100962	Jan. 08,16	Jan. 07,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Apr. 25,15	Apr. 24,16
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 25,15	Apr. 24,16
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
  2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

#### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.1.5 TEST SETUP

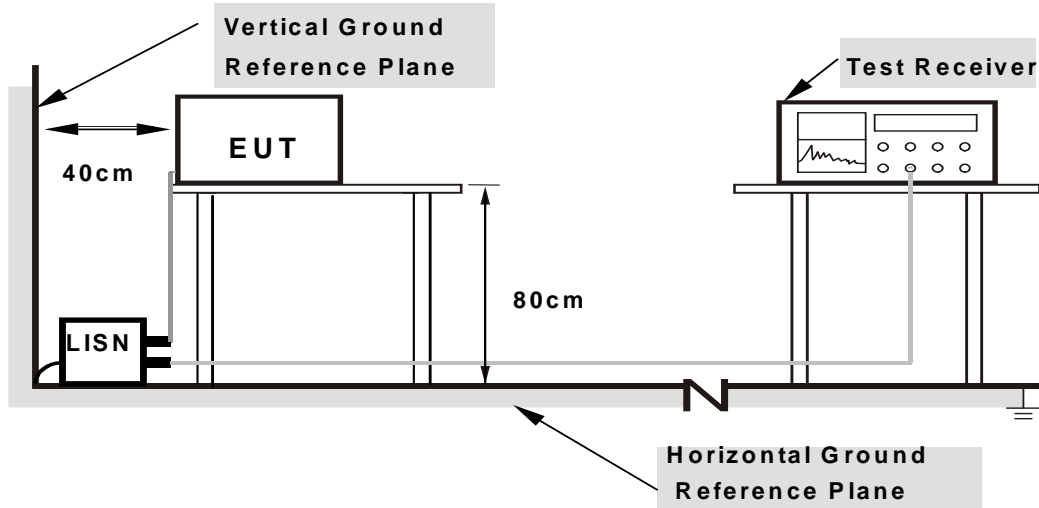

- Note:**
- 1.Support units were connected to second LISN.
  - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

#### 4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




### 4.1.7 TEST RESULTS

**CONDUCTED WORST-CASE DATA: WIFI link**

<b>PHASE</b>	Line	<b>6dB BANDWIDTH</b>	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.27891	9.86	26.64	15.02	36.5	24.88	60.85	50.85	-24.35	-25.97
2	0.59141	9.9	32.34	23.2	42.24	33.1	56	46	-13.76	-12.9
3	0.66172	9.91	36.62	26.54	46.53	36.45	56	46	-9.47	-9.55
<b>4</b>	<b>0.99766</b>	<b>9.94</b>	<b>35.82</b>	<b>26.6</b>	<b>45.76</b>	<b>36.54</b>	<b>56</b>	<b>46</b>	<b>-10.24</b>	<b>-9.46</b>
5	8.11328	10.11	25.98	12.72	36.09	22.83	60	50	-23.91	-27.17
6	9.42969	10.12	25.02	11.68	35.14	21.8	60	50	-24.86	-28.2

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

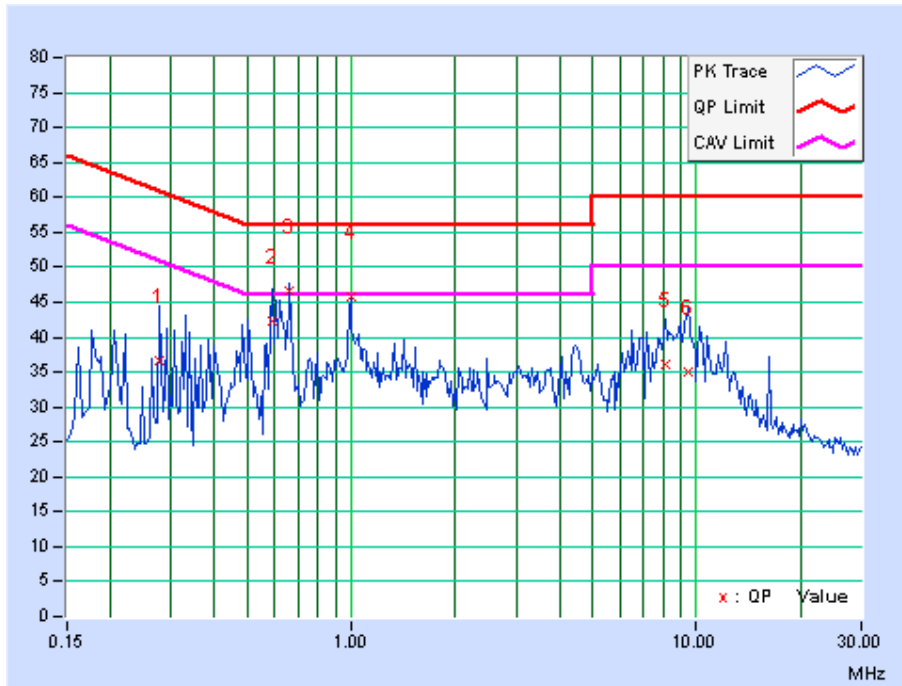




<b>PHASE</b>	Neutral	<b>6dB BANDWIDTH</b>	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.61094	9.56	32.68	22.56	42.24	32.12	56	46	-13.76	-13.88
2	0.66563	9.57	32.16	22.42	41.73	31.99	56	46	-14.27	-14.01
3	1.27344	9.61	28.36	16.48	37.97	26.09	56	46	-18.03	-19.91
4	2.19531	9.64	28.14	16.64	37.78	26.28	56	46	-18.22	-19.72
5	7.20313	9.78	20.26	11.56	30.04	21.34	60	50	-29.96	-28.66
6	8.66406	9.83	25.9	15.26	35.73	25.09	60	50	-24.27	-24.91

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
  2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
  3. The emission levels of other frequencies were very low against the limit.
  4. Margin value = Emission level - Limit value
  5. Correction factor = Insertion loss + Cable loss
  6. Emission Level = Correction Factor + Reading Value.

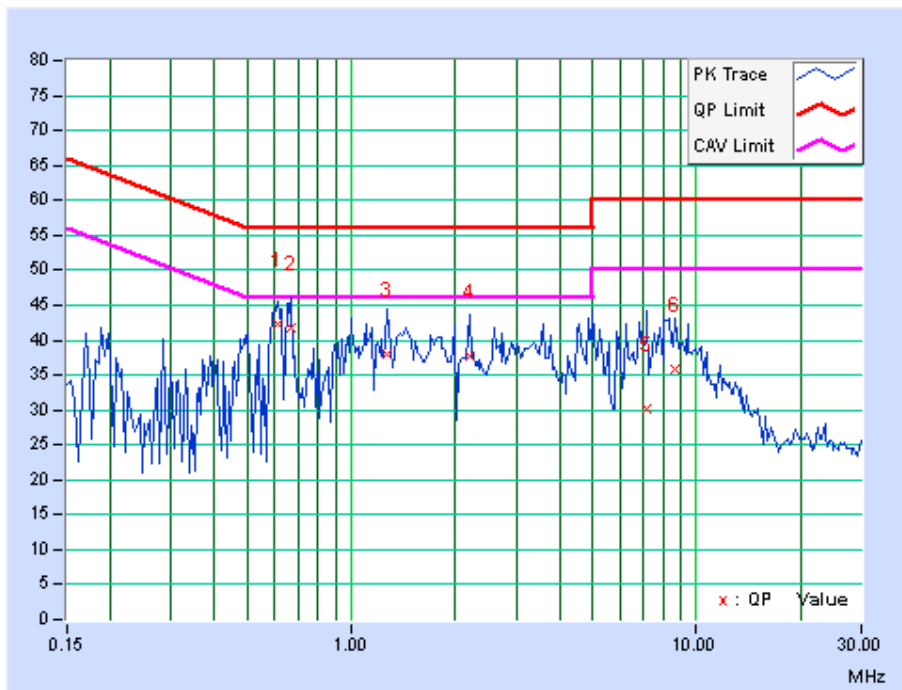





## 4.2 RADIATED EMISSION MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 27,15	Apr. 26, 16
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 23,15	Apr. 22, 16
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,16
GPS Generator+ Antenna	TOJOIN	GNSS-5000A	E1-010119	Aug. 08, 14	Aug. 07, 16
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 19,14	Apr. 18,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Jan. 21,14	Jan. 20,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,15	Apr. 24,16
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

**NOTE:**

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 494399.



#### 4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground (above 1GHz) and 0.8 meters above the ground (Below 1GHz) at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

#### NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.


#### 4.2.4 DEVIATION FROM TEST STANDARD

No deviation.




#### 4.2.5 TEST SETUP

Above 1GHz

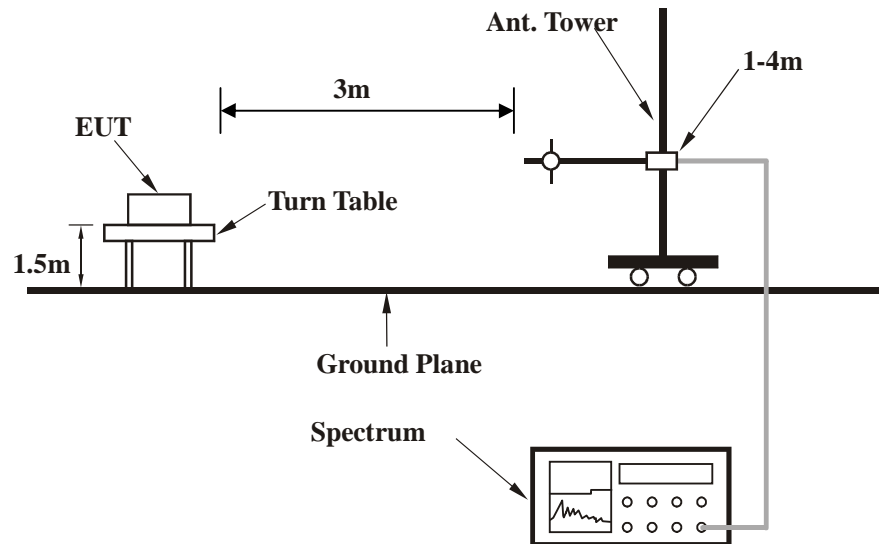

Below 1GHz

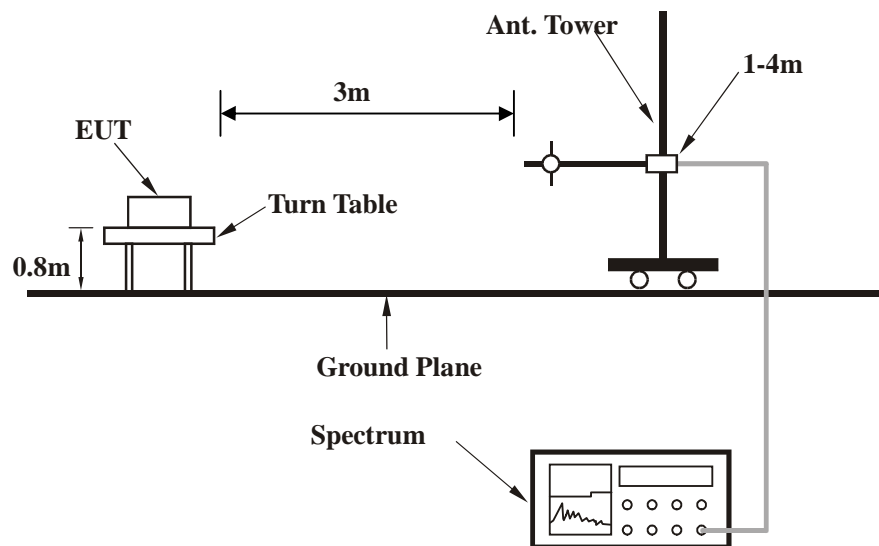

For the actual test configuration, please refer to the attached file (Test Setup Photo).



**BUREAU VERITAS** Test Report No.: RF160122N030

#### 4.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



### 4.2.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:


802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	124.97	24.48	43.50	-19.02	200	122	42.58	-18.10
2	156.23	27.52	43.50	-15.98	150	107	46.14	-18.62
3	187.47	22.43	43.50	-21.07	100	271	42.66	-20.23
4	245.28	20.61	46.00	-25.39	150	303	37.49	-16.88
5	391.11	31.26	46.00	-14.74	100	204	42.77	-11.51
6	782.13	38.75	46.00	-7.25	100	51	40.74	-1.99

#### REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

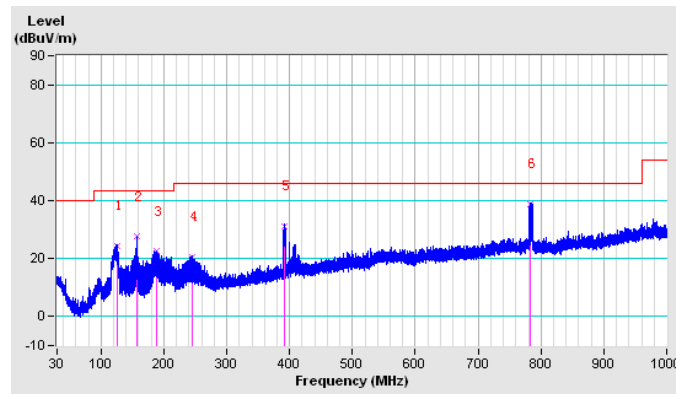




<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.33	24.54	40.00	-15.46	100	22	37.48	-12.94
2	122.41	27.00	43.50	-16.50	200	155	45.15	-18.15
3	259.35	26.05	46.00	-19.95	200	341	41.03	-14.98
4	317.16	22.15	46.00	-23.85	200	278	36.06	-13.91
5	391.95	33.12	46.00	-12.88	100	134	44.53	-11.41
6	587.02	38.90	46.00	-7.10	100	355	44.52	-5.62

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

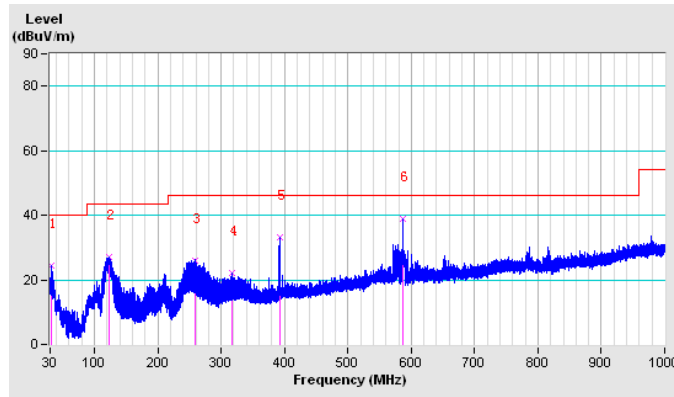



**ABOVE 1GHz DATA**  
**802.11b**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	104.0 PK			1.42 H	162	66.80	37.21
2	*2412.00	99.8 AV			1.42 H	162	62.60	37.21
3	2390.00	56.1 PK	74.0	-17.9	1.24 H	292	18.90	37.15
4	2390.00	43.4 AV	54.0	-10.6	1.24 H	292	6.20	37.15
5	4824.00	46.9 PK	74.0	-27.1	1.25 H	162	38.48	8.46
6	4824.00	38.9 AV	54.0	-15.1	1.25 H	162	30.48	8.46
7	#7236.00	53.8 PK	74.0	-20.2	1.04 H	216	42.12	11.68
8	#7236.00	43.9 AV	69.8	-25.9	1.04 H	216	32.22	11.68

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	114.6 PK			1.21 V	105	77.40	37.21
2	*2412.00	111.0 AV			1.21 V	105	73.80	37.21
3	2390.00	58.8 PK	74.0	-15.2	1.32 V	324	21.60	37.15
4	2390.00	53.4 AV	54.0	-0.6	1.32 V	324	16.20	37.15
5	4824.00	58.4 PK	74.0	-15.6	1.02 V	314	49.94	8.46
6	4824.00	52.6 AV	54.0	-1.4	1.02 V	314	44.14	8.46
7	#7236.00	51.5 PK	84.6	-33.1	1.00 V	112	39.82	11.68
8	#7236.00	41.0 AV	81.0	-40.0	1.00 V	112	29.32	11.68

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.7 PK			1.72 H	216	68.40	37.29
2	*2437.00	102.1 AV			1.72 H	216	64.80	37.29
3	2390.00	53.6 PK	74.0	-20.4	1.08 H	42	16.40	37.15
4	2390.00	44.1 AV	54.0	-9.9	1.08 H	42	6.90	37.15
5	2483.50	51.6 PK	74.0	-22.4	1.01 H	116	14.20	37.43
6	2483.50	43.3 AV	54.0	-10.7	1.01 H	116	5.90	37.43
7	4874.00	51.4 PK	74.0	-22.6	1.01 H	225	42.93	8.50
8	4874.00	43.0 AV	54.0	-11.0	1.01 H	225	34.53	8.50
9	4874.00	46.8 AV	54.0	-7.2	1.01 H	225	38.30	8.50
10	7311.00	53.3 PK	74.0	-20.7	1.00 H	47	41.68	11.62

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.9 PK			1.25 V	12	79.60	37.29
2	*2437.00	112.1 AV			1.25 V	12	74.80	37.29
3	2390.00	55.8 PK	74.0	-18.2	1.00 V	199	18.60	37.15
4	2390.00	45.4 AV	54.0	-8.6	1.00 V	199	8.20	37.15
5	2483.50	53.8 PK	74.0	-20.2	1.02 V	55	16.40	37.43
6	2483.50	44.5 AV	54.0	-9.5	1.02 V	55	7.10	37.43
7	4874.00	55.7 PK	74.0	-18.3	1.04 V	71	47.20	8.50
8	4874.00	53.2 AV	54.0	-0.8	1.04 V	71	44.70	8.50
9	7311.00	51.9 PK	74.0	-22.1	1.01 V	214	40.28	11.62
10	7311.00	42.0 AV	54.0	-12.0	1.01 V	214	30.38	11.62

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.2 PK			1.06 H	141	65.80	37.37
2	*2462.00	98.8 AV			1.06 H	141	61.40	37.37
3	2483.50	55.0 PK	74.0	-19.0	1.02 H	214	17.60	37.43
4	2483.50	44.9 AV	54.0	-9.1	1.02 H	214	7.50	37.43
5	4924.00	52.6 PK	74.0	-21.4	1.02 H	22	44.05	8.55
6	4924.00	47.4 AV	54.0	-6.6	1.02 H	22	38.85	8.55
7	7386.00	55.6 PK	74.0	-18.4	1.02 H	22	44.03	11.57
8	7386.00	45.9 AV	54.0	-8.1	1.02 H	22	34.33	11.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	115.2 PK			1.42 V	188	77.80	37.37
2	*2462.00	110.6 AV			1.42 V	188	73.20	37.37
3	2483.50	61.3 PK	74.0	-12.7	1.02 V	179	23.90	37.43
4	2483.50	53.6 AV	54.0	-0.4	1.02 V	179	16.20	37.43
5	4924.00	57.3 PK	74.0	-16.7	1.00 V	23	48.75	8.55
6	4924.00	51.6 AV	54.0	-2.4	1.00 V	23	43.05	8.55
7	7386.00	52.4 PK	74.0	-21.6	1.02 V	216	40.83	11.57
8	7386.00	42.9 AV	54.0	-11.1	1.02 V	216	31.33	11.57

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



802.11g

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	106.9 PK			1.41 H	105	69.70	37.21
2	*2412.00	99.4 AV			1.41 H	105	62.20	37.21
3	2390.00	62.6 PK	74.0	-11.4	1.74 H	122	25.40	37.15
4	2390.00	50.5 AV	54.0	-3.5	1.74 H	122	13.30	37.15
5	4824.00	52.6 PK	74.0	-21.4	1.02 V	54	44.14	8.46
6	4824.00	43.2 AV	54.0	-10.8	1.02 V	54	34.74	8.46
7	#7236.00	50.1 PK	76.9	-26.8	1.00 V	199	38.42	11.68
8	#7236.00	38.9 AV	69.4	-30.5	1.00 V	199	27.22	11.68

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	115.5 PK			1.66 V	112	78.30	37.21
2	*2412.00	110.3 AV			1.66 V	112	73.10	37.21
3	2390.00	65.8 PK	74.0	-8.2	1.24 V	175	28.60	37.15
4	2390.00	53.4 AV	54.0	-0.6	1.24 V	175	16.20	37.15
5	4824.00	52.6 PK	74.0	-21.4	1.02 V	54	44.14	8.46
6	4824.00	43.2 AV	54.0	-10.8	1.02 V	54	34.74	8.46
7	#7236.00	50.1 PK	85.5	-35.4	1.00 V	199	38.42	11.68
8	#7236.00	38.9 AV	80.3	-41.4	1.00 V	199	27.22	11.68

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	107.4 PK			1.62 H	219	70.10	37.29
2	*2437.00	104.1 AV			1.62 H	219	66.80	37.29
3	2390.00	54.8 PK	74.0	-19.2	1.00 H	11	17.60	37.15
4	2390.00	46.1 AV	54.0	-7.9	1.00 H	11	8.90	37.15
5	2483.50	58.2 PK	74.0	-15.8	1.02 H	216	20.80	37.43
6	2483.50	46.6 AV	54.0	-7.4	1.02 H	216	9.20	37.43
7	4874.00	50.2 PK	74.0	-23.8	1.02 H	26	41.70	8.50
8	4874.00	39.6 AV	54.0	-14.4	1.02 H	26	31.10	8.50
9	7321.00	49.5 PK	74.0	-24.5	1.02 H	5	37.88	11.62
10	7321.00	37.9 AV	54.0	-16.1	1.02 H	5	26.28	11.62

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	116.9 PK			1.24 V	288	79.60	37.29
2	*2437.00	112.9 AV			1.24 V	288	75.60	37.29
3	2390.00	57.5 PK	74.0	-16.5	1.21 V	302	20.30	37.15
4	2390.00	50.1 AV	54.0	-3.9	1.21 V	302	12.90	37.15
5	2483.50	65.7 PK	74.0	-8.3	1.02 V	211	28.30	37.43
6	2483.50	53.3 AV	54.0	-0.7	1.02 V	211	15.90	37.43
7	4874.00	51.2 PK	74.0	-22.8	1.02 V	214	42.70	8.50
8	4874.00	42.6 AV	54.0	-11.4	1.02 V	214	34.10	8.50
9	7321.00	50.9 PK	74.0	-23.1	1.00 V	4	39.28	11.62
10	7321.00	40.2 AV	54.0	-13.8	1.00 V	4	28.58	11.62

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 11	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.0 PK			1.84 H	129	67.60	37.37
2	*2462.00	99.7 AV			1.84 H	129	62.30	37.37
3	2483.50	53.9 PK	74.0	-20.1	1.02 H	251	16.50	37.43
4	2483.50	44.5 AV	54.0	-9.5	1.02 H	251	7.10	37.43
5	4924.00	51.2 PK	74.0	-22.8	1.00 H	11	42.65	8.55
6	4924.00	39.6 AV	54.0	-14.4	1.00 H	11	31.05	8.55
7	7386.00	49.9 PK	74.0	-24.1	1.00 H	116	38.33	11.57
8	7386.00	37.4 AV	54.0	-16.6	1.00 H	116	25.83	11.57

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.6 PK			1.17 V	46	76.20	37.37
2	*2462.00	110.3 AV			1.17 V	46	72.90	37.37
3	2483.50	65.9 PK	74.0	-8.1	1.21 V	203	28.50	37.43
4	2483.50	53.5 AV	54.0	-0.5	1.21 V	203	16.10	37.43
5	4924.00	51.6 PK	74.0	-22.4	1.02 V	211	43.05	8.55
6	4924.00	40.6 AV	54.0	-13.4	1.02 V	211	32.05	8.55
7	7386.00	50.3 PK	74.0	-23.7	1.00 V	136	38.73	11.57
8	7386.00	38.4 AV	54.0	-15.6	1.00 V	136	26.83	11.57

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



**802.11n 20MHz**

<b>CHANNEL</b>	TX Channel 1	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	105.6 PK			1.94 H	122	68.40	37.21
2	*2412.00	96.4 AV			1.94 H	122	59.20	37.21
3	2390.00	55.7 PK	74.0	-18.3	1.21 H	322	18.50	37.15
4	2390.00	46.3 AV	54.0	-7.7	1.21 H	322	9.10	37.15
5	4824.00	49.7 PK	74.0	-24.3	1.02 H	214	41.24	8.46
6	4824.00	38.6 AV	54.0	-15.4	1.02 H	214	30.14	8.46
7	#7236.00	48.6 PK	75.6	-27.0	1.00 H	122	36.92	11.68
8	#7236.00	37.6 AV	66.4	-28.8	1.00 H	122	25.92	11.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2412.00	115.1 PK			1.21 V	175	77.90	37.21
2	*2412.00	105.6 AV			1.21 V	175	68.40	37.21
3	2390.00	67.5 PK	74.0	-6.5	1.06 V	294	30.30	37.15
4	2390.00	53.5 AV	54.0	-0.5	1.06 V	294	16.30	37.15
5	4824.00	53.2 PK	74.0	-20.8	1.02 V	54	44.74	8.46
6	4824.00	42.6 AV	54.0	-11.4	1.02 V	54	34.14	8.46
7	#7236.00	50.1 PK	85.1	-35.0	1.00 V	129	38.42	11.68
8	#7236.00	39.6 AV	75.6	-36.0	1.00 V	129	27.92	11.68

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	106.7 PK			1.15 H	227	69.40	37.29
2	*2437.00	97.5 AV			1.15 H	227	60.20	37.29
3	2390.00	57.6 PK	74.0	-16.4	1.02 H	214	20.40	37.15
4	2390.00	48.4 AV	54.0	-5.6	1.02 H	214	11.20	37.15
5	2483.50	55.0 PK	74.0	-19.0	1.05 H	88	17.60	37.43
6	2483.50	46.7 AV	54.0	-7.3	1.05 H	88	9.30	37.43
7	4874.00	48.4 PK	74.0	-25.6	1.00 H	125	39.90	8.50
8	4874.00	39.4 AV	54.0	-14.6	1.00 H	125	30.90	8.50
9	7321.00	49.4 PK	74.0	-24.6	1.04 H	72	37.78	11.62
10	7321.00	37.6 AV	54.0	-16.4	1.04 H	72	25.98	11.62

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	117.9 PK			1.42 V	36	80.60	37.29
2	*2437.00	108.9 AV			1.42 V	36	71.60	37.29
3	2390.00	64.8 PK	74.0	-9.2	1.00 V	136	27.60	37.15
4	2390.00	53.3 AV	54.0	-0.7	1.00 V	136	16.10	37.15
5	2483.50	62.5 PK	74.0	-11.5	1.04 V	44	25.10	37.43
6	2483.50	50.7 AV	54.0	-3.3	1.04 V	44	13.30	37.43
7	4874.00	52.1 PK	74.0	-21.9	1.00 V	360	43.60	8.50
8	4874.00	43.1 AV	54.0	-10.9	1.00 V	360	34.60	8.50
9	7321.00	50.1 PK	74.0	-23.9	1.00 V	87	38.48	11.62
10	7321.00	40.7 AV	54.0	-13.3	1.00 V	87	29.08	11.62

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.1 PK			1.39 H	208	65.70	37.37
2	*2462.00	93.3 AV			1.39 H	208	55.90	37.37
3	2483.50	58.0 PK	74.0	-16.0	1.06 H	66	20.60	37.43
4	2483.50	45.3 AV	54.0	-8.7	1.06 H	66	7.90	37.43
5	4924.00	51.6 PK	74.0	-22.4	1.03 H	62	43.05	8.55
6	4924.00	40.9 AV	54.0	-13.1	1.03 H	62	32.35	8.55
7	7386.00	49.9 PK	74.0	-24.1	1.03 H	22	38.33	11.57
8	7386.00	36.8 AV	54.0	-17.2	1.03 H	22	25.23	11.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	113.6 PK			1.25 V	63	76.20	37.37
2	*2462.00	105.5 AV			1.25 V	63	68.10	37.37
3	2483.50	68.6 PK	74.0	-5.4	1.09 V	213	31.20	37.43
4	<b>2483.50</b>	<b>53.8 AV</b>	<b>54.0</b>	<b>-0.2</b>	<b>1.09 V</b>	<b>213</b>	<b>16.40</b>	<b>37.43</b>
5	4924.00	52.8 PK	74.0	-21.2	1.02 V	222	44.25	8.55
6	4924.00	40.9 AV	54.0	-13.1	1.02 V	222	32.35	8.55
7	7386.00	50.1 PK	74.0	-23.9	1.00 V	175	38.53	11.57
8	7386.00	40.7 AV	54.0	-13.3	1.00 V	175	29.13	11.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.





**802.11n 40MHz**

<b>CHANNEL</b>	TX Channel 3	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2422.00	101.4 PK			1.84 H	63	64.20	37.24
2	*2422.00	93.3 AV			1.84 H	63	56.10	37.24
3	2390.00	60.9 PK	74.0	-13.1	1.06 H	7	23.70	37.15
4	2390.00	50.0 AV	54.0	-4.0	1.06 H	7	12.80	37.15
5	4844.00	41.6 PK	74.0	-32.4	1.07 H	89	33.13	8.47
6	4844.00	31.8 AV	54.0	-22.2	1.07 H	89	23.33	8.47
7	7266.00	45.5 PK	74.0	-28.5	1.00 H	113	33.83	11.67
8	7266.00	32.9 AV	54.0	-21.1	1.00 H	113	21.23	11.67

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2422.00	110.8 PK			1.55 V	229	73.60	37.24
2	*2422.00	102.1 AV			1.55 V	229	64.90	37.24
3	2390.00	66.8 PK	74.0	-7.2	1.84 V	114	29.60	37.15
4	2390.00	53.3 AV	54.0	-0.7	1.84 V	114	16.19	37.15
5	4844.00	42.9 PK	74.0	-31.1	1.22 V	114	34.43	8.47
6	4844.00	30.1 AV	54.0	-23.9	1.22 V	114	21.63	8.47
7	7266.00	47.0 PK	74.0	-27.0	1.02 V	42	35.32	11.67
8	7266.00	35.3 AV	54.0	-18.7	1.02 V	42	23.61	11.67

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 6	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.9 PK			1.02 H	153	67.60	37.29
2	*2437.00	96.1 AV			1.02 H	153	58.80	37.29
3	2390.00	55.8 PK	74.0	-18.2	1.21 H	22	18.60	37.15
4	2390.00	45.1 AV	54.0	-8.9	1.21 H	22	7.90	37.15
5	2483.50	54.8 PK	74.0	-19.2	1.00 H	113	17.40	37.43
6	2483.50	45.0 AV	54.0	-9.0	1.00 H	113	7.52	37.43
7	4874.00	42.6 PK	74.0	-31.4	1.02 H	211	34.10	8.50
8	4874.00	30.1 AV	54.0	-23.9	1.02 H	211	21.60	8.50
9	7321.00	46.5 PK	74.0	-27.5	1.00 H	12	34.88	11.62
10	7321.00	33.9 AV	54.0	-20.1	1.00 H	12	22.28	11.62

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.5 PK			1.82 V	216	75.20	37.29
2	*2437.00	104.0 AV			1.82 V	216	66.70	37.29
3	2390.00	66.1 PK	74.0	-7.9	1.24 V	136	28.90	37.15
4	2390.00	53.4 AV	54.0	-0.6	1.24 V	136	16.20	37.15
5	2483.50	65.0 PK	74.0	-9.0	1.02 V	211	27.60	37.43
6	2483.50	53.3 AV	54.0	-0.7	1.02 V	211	15.82	37.43
7	4874.00	42.8 PK	74.0	-31.2	1.02 V	62	34.30	8.50
8	4874.00	30.7 AV	54.0	-23.3	1.02 V	62	22.20	8.50
9	7321.00	46.6 PK	74.0	-27.4	1.02 V	212	34.98	11.62
10	7321.00	37.3 AV	54.0	-16.7	1.02 V	212	25.68	11.62

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



<b>CHANNEL</b>	TX Channel 9	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 25GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	99.6 PK			1.42 H	325	62.30	37.34
2	*2452.00	90.9 AV			1.42 H	325	53.60	37.34
3	2483.50	59.0 PK	74.0	-15.0	1.20 H	6	21.60	37.43
4	2483.50	48.7 AV	54.0	-5.3	1.20 H	6	11.22	37.43
5	4904.00	45.6 PK	74.0	-28.4	1.02 H	214	37.07	8.53
6	4904.00	31.2 AV	54.0	-22.8	1.02 H	214	22.67	8.53
7	7356.00	48.3 PK	74.0	-25.7	1.00 H	11	36.71	11.59
8	7356.00	32.6 AV	54.0	-21.4	1.00 H	11	21.01	11.59

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	108.9 PK			1.24 V	105	71.60	37.34
2	*2452.00	98.1 AV			1.24 V	105	60.80	37.34
3	2483.50	69.0 PK	74.0	-5.0	1.26 V	118	31.60	37.43
<b>4</b>	<b>2483.50</b>	<b>53.7 AV</b>	<b>54.0</b>	<b>-0.3</b>	<b>1.26 V</b>	<b>118</b>	<b>16.27</b>	<b>37.43</b>
5	4904.00	44.3 PK	74.0	-29.7	1.00 V	116	35.77	8.53
6	4904.00	30.4 AV	54.0	-23.6	1.00 V	116	21.87	8.53
7	7356.00	46.6 PK	74.0	-27.4	1.01 V	124	35.01	11.59
8	7356.00	35.8 AV	54.0	-18.2	1.01 V	124	24.21	11.59

**REMARKS:**

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " \* ": Fundamental frequency.



### 4.3 6dB BANDWIDTH MEASUREMENT

#### 4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

#### 4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,16	Feb. 17,17
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,16	Feb. 17,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

#### 4.3.3 TEST PROCEDURE


1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) ≥ 3 x RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.3.5 TEST SETUP

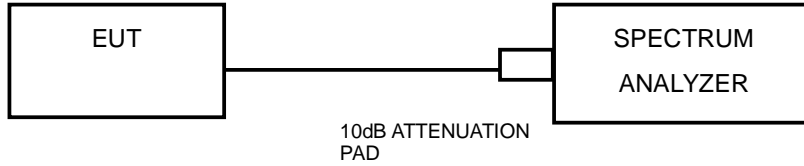

#### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.3.7 TEST RESULTS

##### 802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.05	9.08	0.5	PASS
6	2437	10.08	9.60	0.5	PASS
11	2462	10.06	9.61	0.5	PASS

##### 802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.16	15.11	0.5	PASS
6	2437	14.47	14.21	0.5	PASS
11	2462	15.13	15.06	0.5	PASS



802.11n 20MHz


CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	15.16	15.14	0.5	PASS
6	2437	15.13	15.07	0.5	PASS
11	2462	15.15	15.15	0.5	PASS

802.11n 40MHz

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	35.13	33.41	0.5	PASS
6	2437	33.89	31.49	0.5	PASS
9	2452	35.04	31.49	0.5	PASS



**CHAIN 0**

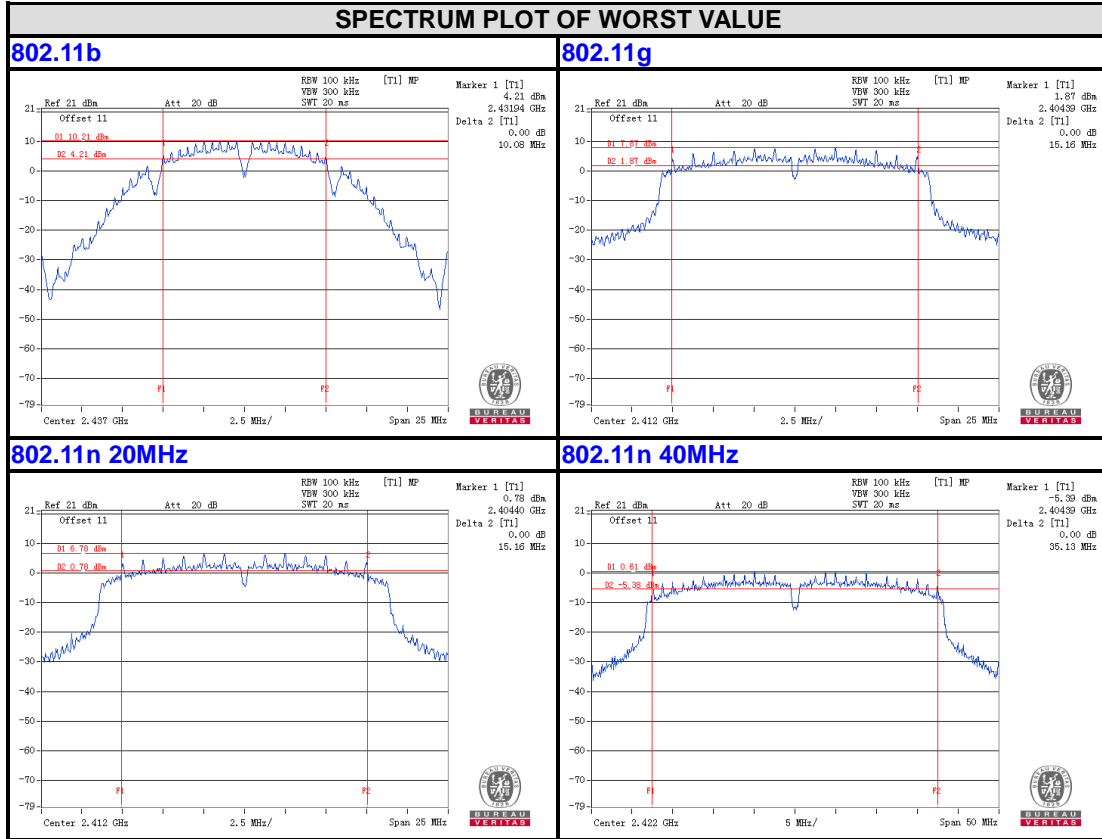






BUREAU VERITAS

Test Report No.: RF160122N030

CHAIN 1

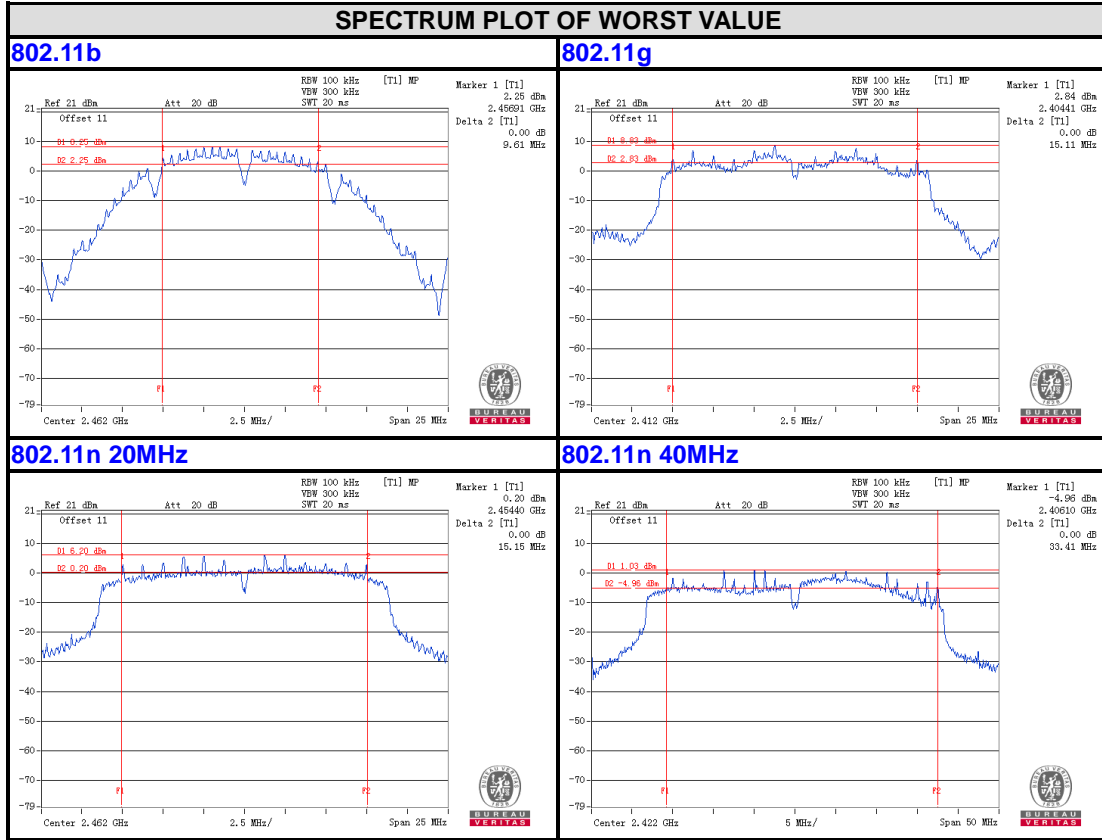

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




### 4.4 CONDUCTED OUTPUT POWER

#### 4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

#### 4.4.2 TEST SETUP

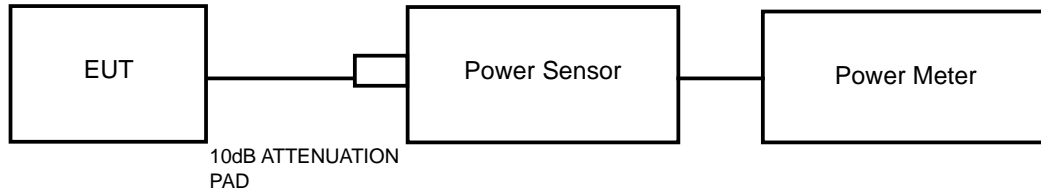

#### 4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	Feb. 18,16	Feb. 17,17
Power Sensor	Keysight	U2021XA	MY55060018	Feb. 18,16	Feb. 17,17
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 12, 15	Oct.11, 16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.07,15	Sep. 06,16
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 28,15	Nov. 27,16
Signal Analyzer	Rohde & Schwarz	FSV7	102331	Nov. 05,15	Nov. 04,16
Signal Generator	Agilent	N5183A	MY50140980	Nov. 05,15	Nov. 04,16
ESG Vector Signal Generator	Agilent	E4438C	MY49072505	Apr. 22, 15	Apr. 21, 16
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	Sep. 01,15	Aug. 31,16

**NOTE:**

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



#### 4.4.4 TEST PROCEDURES

An Average power sensor was used on the output port of the EUT. An Average power meter was used to read the response of the Average power sensor. Record the Average power level.

#### 4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



#### 4.4.7 TEST RESULTS

##### 802.11b

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	18.87	18.65	77.090	73.282	150.372	21.77	30	PASS
6	2437	19.62	18.89	91.622	77.446	169.068	22.28	30	PASS
11	2462	18.91	17.89	77.804	61.518	139.322	21.44	30	PASS

##### 802.11g

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	18.31	17.87	67.764	61.235	128.999	21.11	30	PASS
6	2437	19.54	19.11	89.950	81.470	<b>171.420</b>	<b>22.34</b>	30	PASS
11	2462	16.91	16.46	49.091	44.259	93.350	19.70	30	PASS



802.11n 20MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
1	2412	16.41	16.52	43.752	44.875	88.627	19.48	30	PASS
6	2437	19.42	19.23	87.498	83.753	171.251	22.34	30	PASS
11	2462	16.20	15.36	41.687	34.356	76.043	18.81	30	PASS

802.11n 40MHz

CHAN.	FREQ (MHz)	AVG. POWER (dBm)		AVG. POWER (mW)		TOTAL POWER (mW)	TOTAL POWER (dBm)	AVG. POWER LIMIT (W)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 0	CHAIN 1				
3	2422	13.96	13.95	24.889	24.831	49.720	16.97	30	PASS
6	2437	17.28	16.71	53.456	46.881	100.337	20.01	30	PASS
9	2452	13.54	13.20	22.594	20.893	43.487	16.38	30	PASS




## 4.5 POWER SPECTRAL DENSITY MEASUREMENT

### 4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

### 4.5.2 TEST SETUP

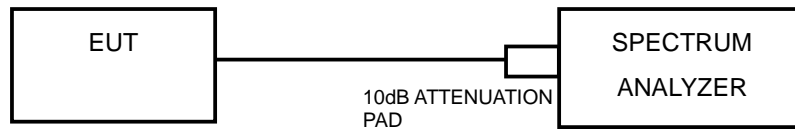

### 4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to at least 1.5 times the OBW.
- c) Set RBW to: 10 kHz.
- d) Set VBW  $\geq 3 \times$  RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep  $\geq 2 \times$  span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

### 4.5.5 DEVIATION FROM TEST STANDARD

No deviation.



#### 4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

#### 4.5.7 TEST RESULTS

##### 802.11b

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-9.07	3.01	-6.06	6.99	PASS
	6	2437	-9.06	3.01	-6.05	6.99	PASS
	11	2462	-10.36	3.01	-7.35	6.99	PASS
1	1	2412	-9.74	3.01	-6.73	6.99	PASS
	6	2437	-9.64	3.01	-6.63	6.99	PASS
	11	2462	-11.29	3.01	-8.28	6.99	PASS

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.0\text{dBi} + 10\log(2) = 7.01$ , so the limit about the power density needed to reduce.

##### 802.11g

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-12.20	3.01	-9.19	6.99	PASS
	6	2437	-10.28	3.01	-7.27	6.99	PASS
	11	2462	-13.69	3.01	-10.68	6.99	PASS
1	1	2412	-11.51	3.01	-8.50	6.99	PASS
	6	2437	-10.55	3.01	-7.54	6.99	PASS
	11	2462	-13.43	3.01	-10.42	6.99	PASS

Note:

- Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
- Directional gain =  $4.0\text{dBi} + 10\log(2) = 7.01$ , so the limit about the power density needed to reduce.



**802.11n 20MHz**

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	1	2412	-13.90	3.01	-10.89	6.99	PASS
	6	2437	-10.80	3.01	-7.79	6.99	PASS
	11	2462	-14.42	3.01	-11.41	6.99	PASS
1	1	2412	-13.47	3.01	-10.46	6.99	PASS
	6	2437	-11.07	3.01	-8.06	6.99	PASS
	11	2462	-15.21	3.01	-12.20	6.99	PASS

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4.0\text{dBi} + 10\log(2) = 7.01$ , so the limit about the power density needed to reduce.

**802.11n 40MHz**

TX chain	Channel	Freq. (MHz)	PSD (dBm)	10 log (N=2) dB	TOTAL PSD (dBm)	Limit (dBm)	PASS /FAIL
0	3	2422	-19.44	3.01	-16.43	6.99	PASS
	6	2437	-16.14	3.01	-13.13	6.99	PASS
	9	2452	-19.56	3.01	-16.55	6.99	PASS
1	3	2422	-18.40	3.01	-15.39	6.99	PASS
	6	2437	-14.98	3.01	-11.97	6.99	PASS
	9	2452	-19.49	3.01	-16.48	6.99	PASS

Note:

1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain =  $4.0\text{dBi} + 10\log(2) = 7.01$ , so the limit about the power density needed to reduce.






**BUREAU  
VERITAS**

Test Report No.: RF160122N030

**CHAIN 0**

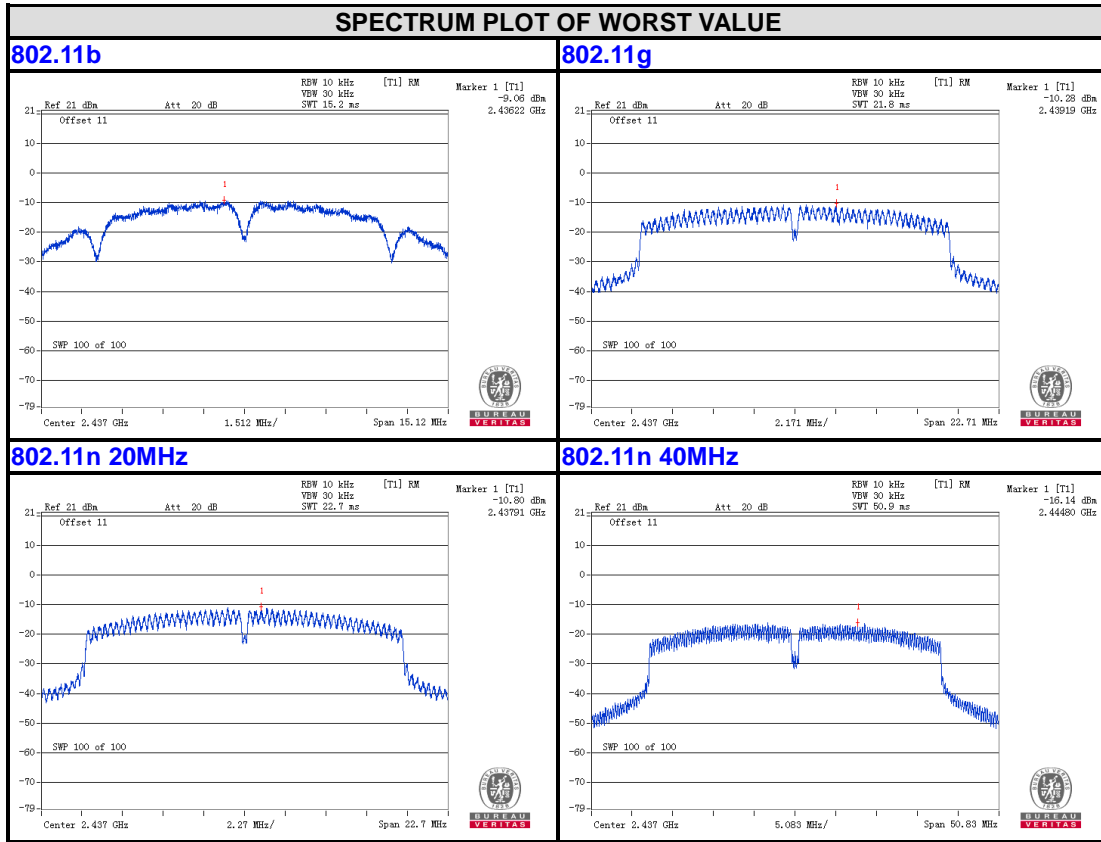

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China


Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**BUREAU  
VERITAS**

Test Report No.: RF160122N030

**CHAIN 1**

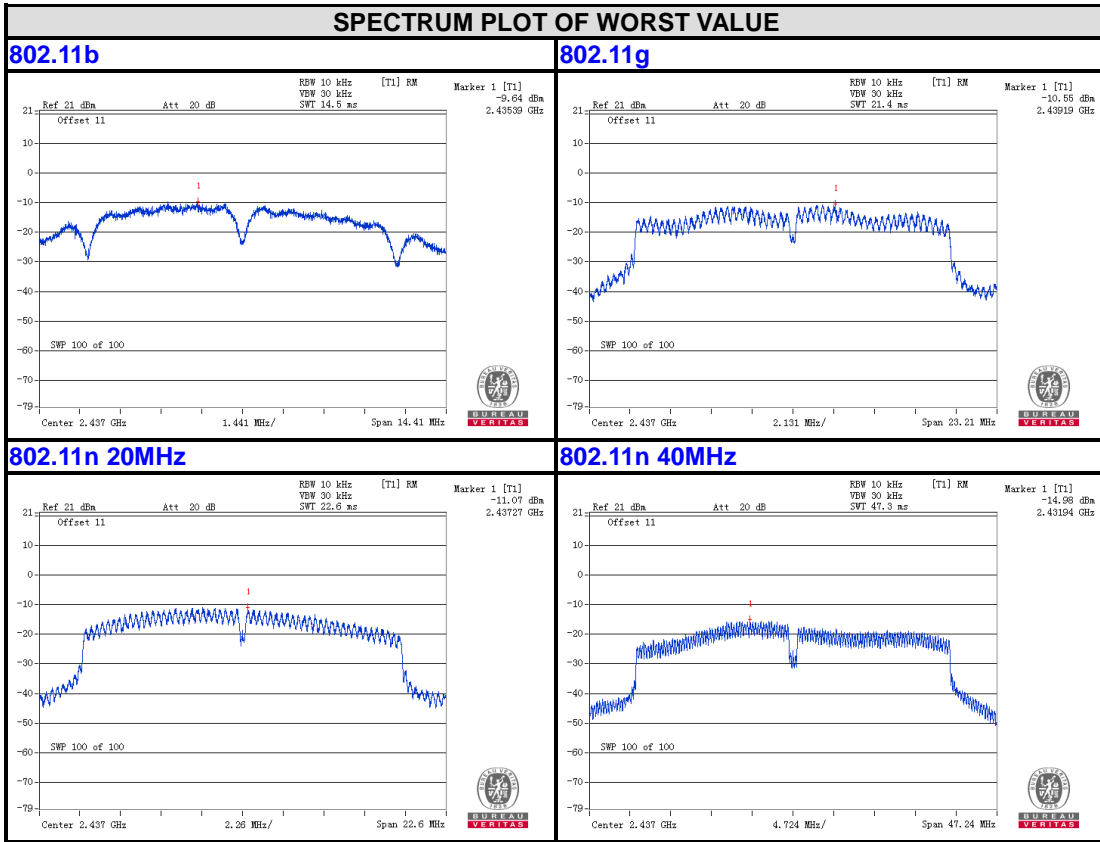

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




## 4.6 OUT OF BAND EMISSION MEASUREMENT

### 4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below  $-20\text{dB}$  of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

### 4.6.2 TEST SETUP

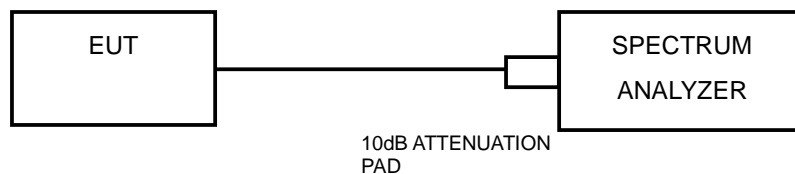

### 4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

### 4.6.4 TEST PROCEDURE

#### Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW  $\geq$  300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



### Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW  $\geq$  300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

#### 4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

#### 4.6.6 EUT OPERATING CONDITION


Same as item 4.3.6



### 4.6.7 TEST RESULTS

802.11b

CHAIN 0

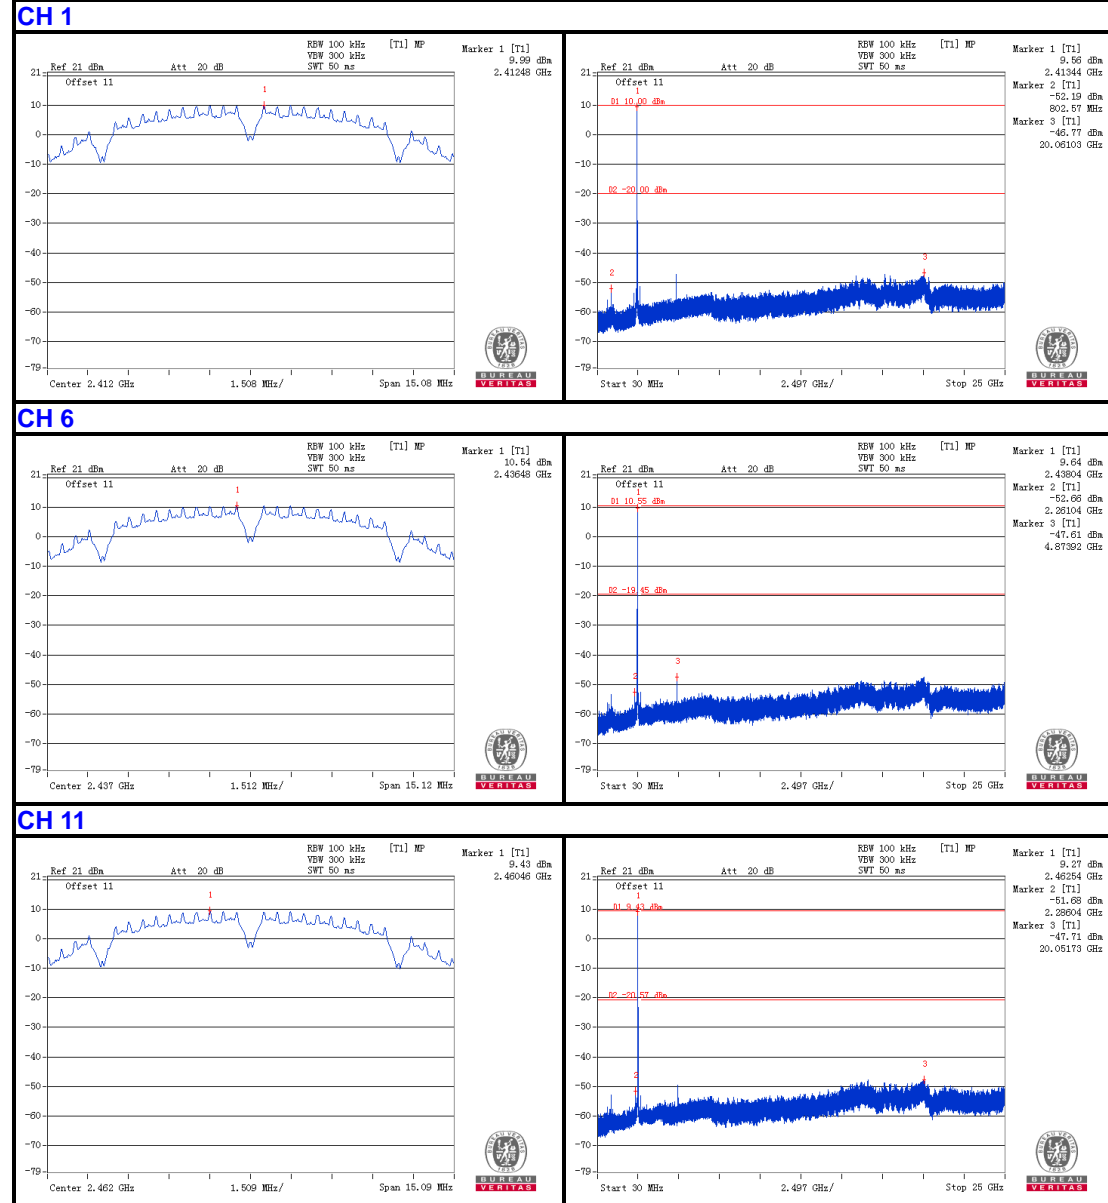





BUREAU VERITAS

Test Report No.: RF160122N030


CHAIN 1

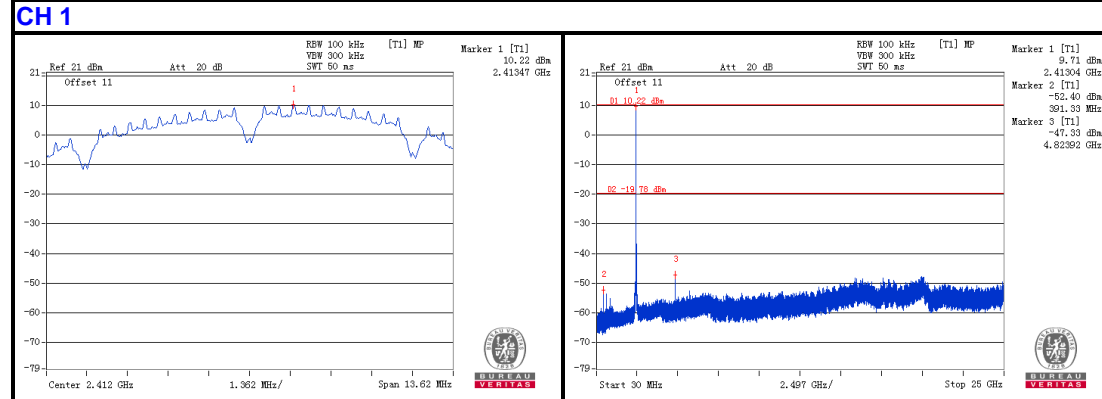

CH 6

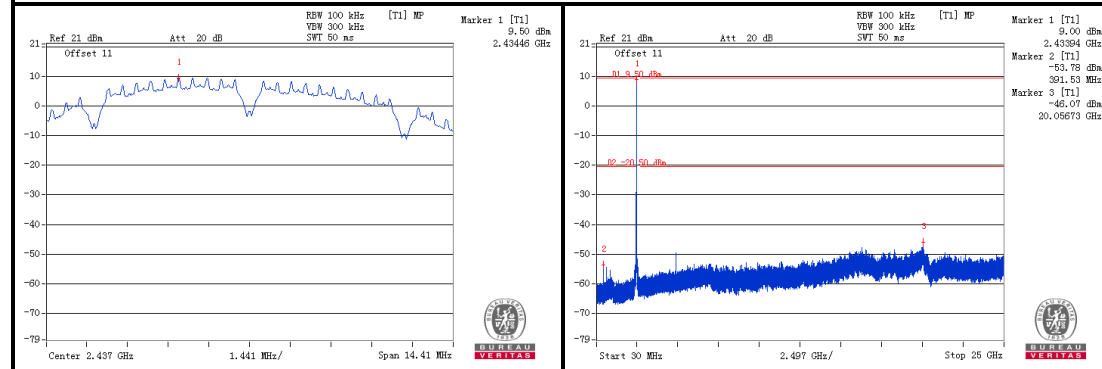

CH 11

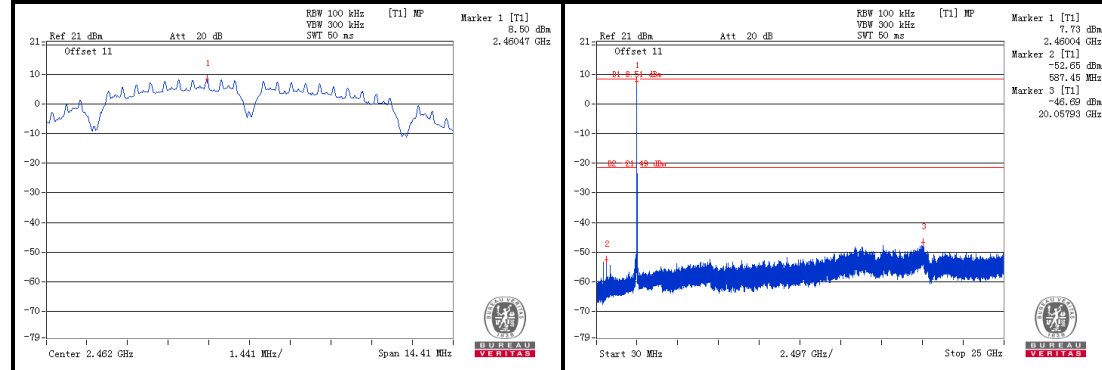

Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)




BUREAU VERITAS

Test Report No.: RF160122N030


802.11g

CHAIN 0


CH 1

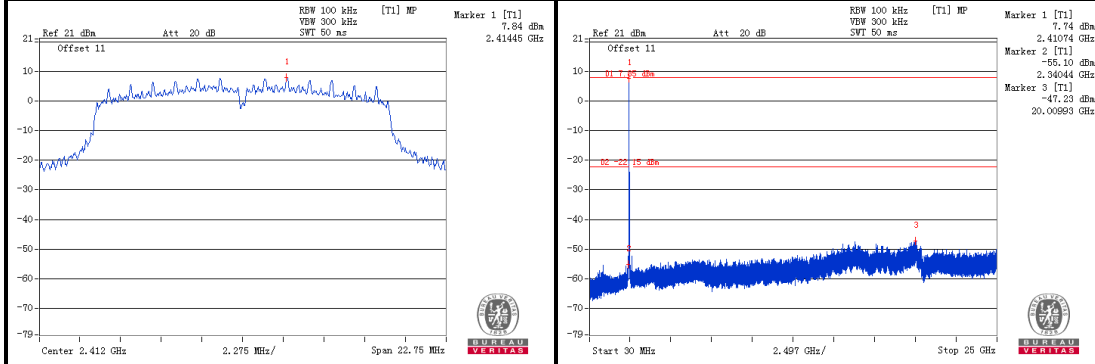

CH 6

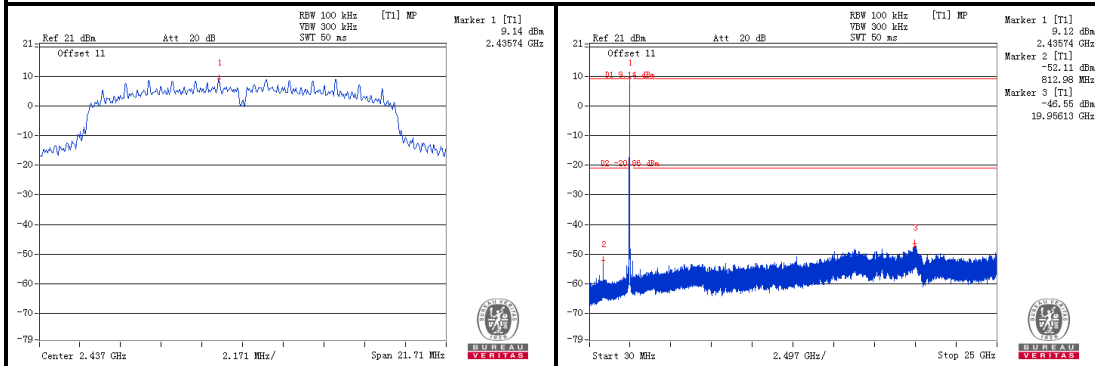

CH 11

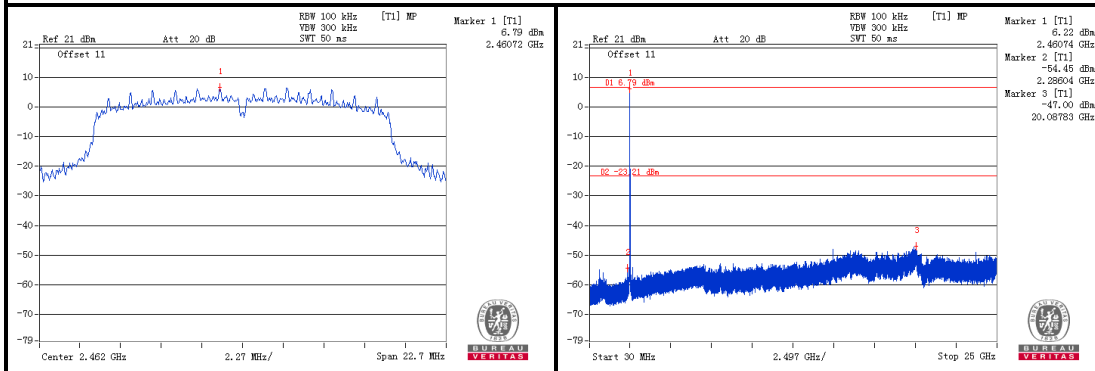




Bureau Veritas Shenzhen Co., Ltd.  
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd., Houjie  
Town, Dongguan City,  
Guangdong 523942, China

Tel: +86 769 8593 5656  
Fax: +86 769 8593 1080  
Email: [customerservice.dg@cn.bureauveritas.com](mailto:customerservice.dg@cn.bureauveritas.com)



**CHAIN 1**

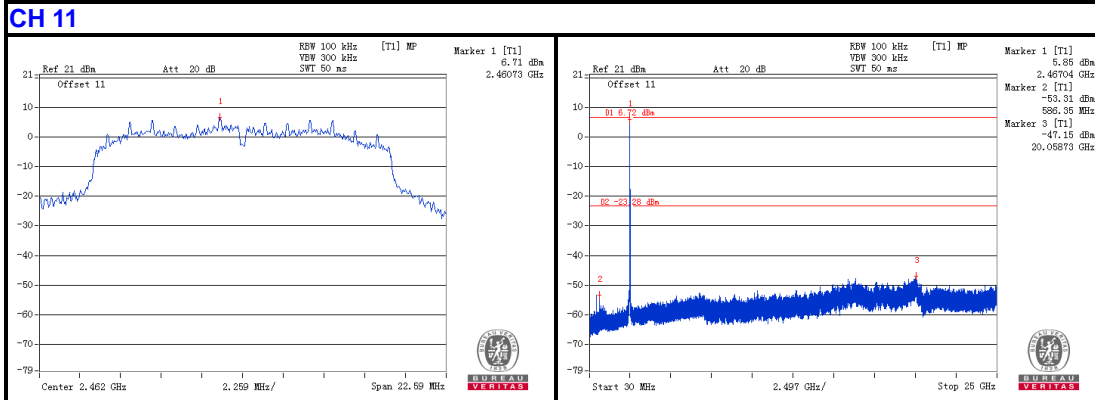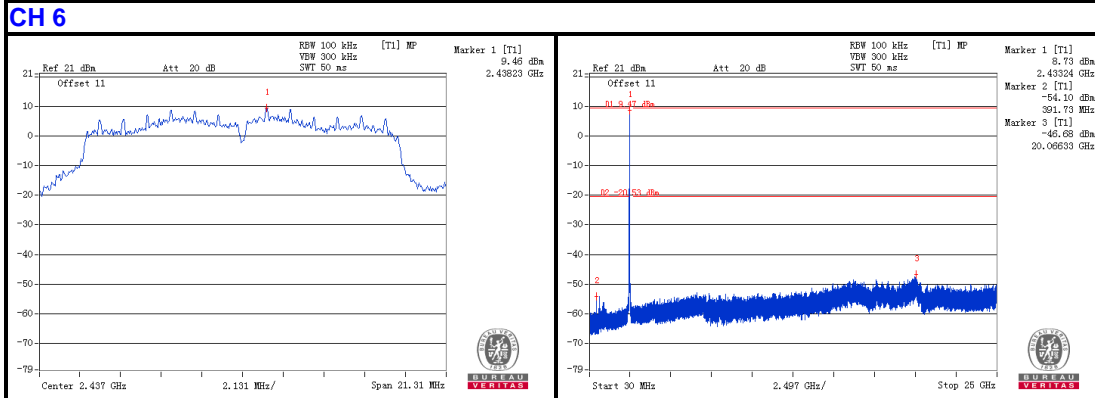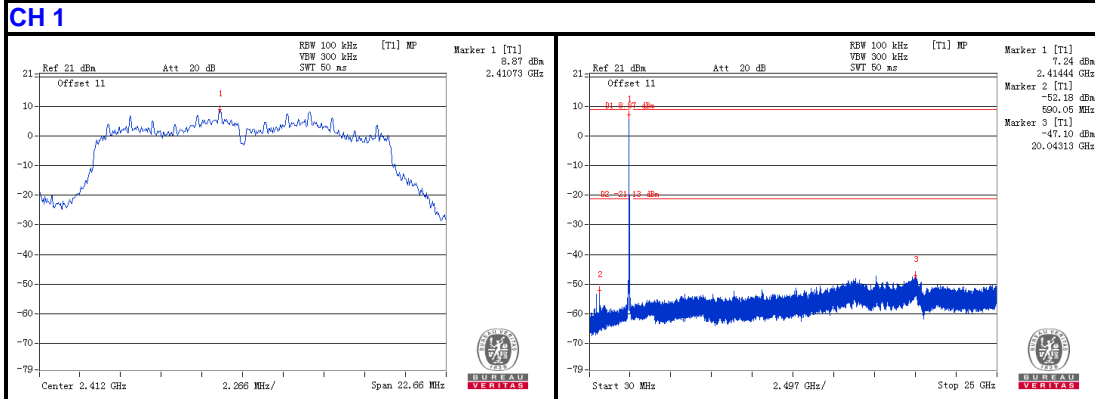







802.11n 20MHz

CHAIN 0


CH 1

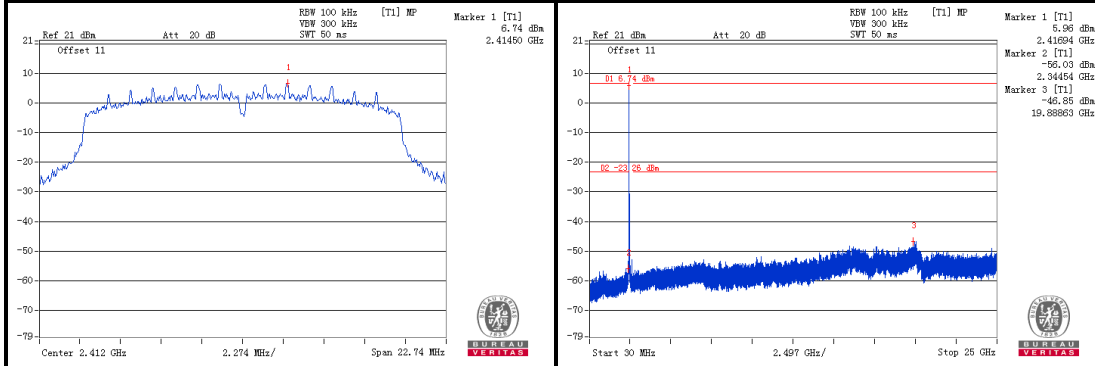

CH 6

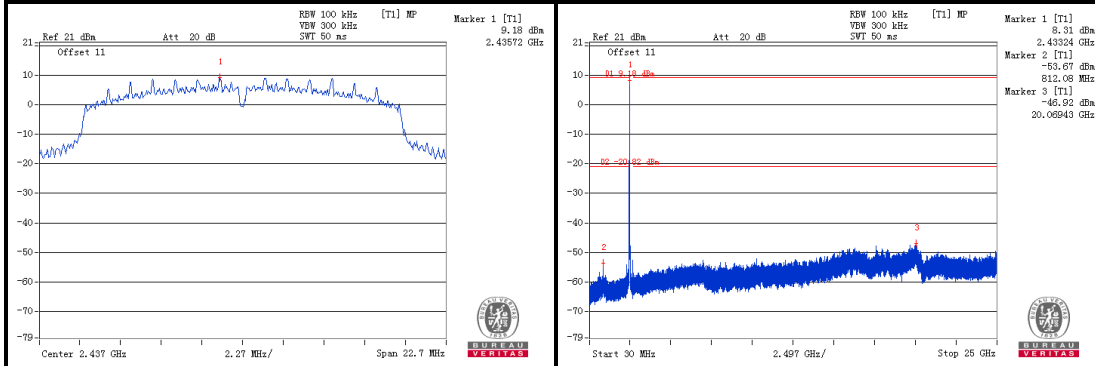


CH 11

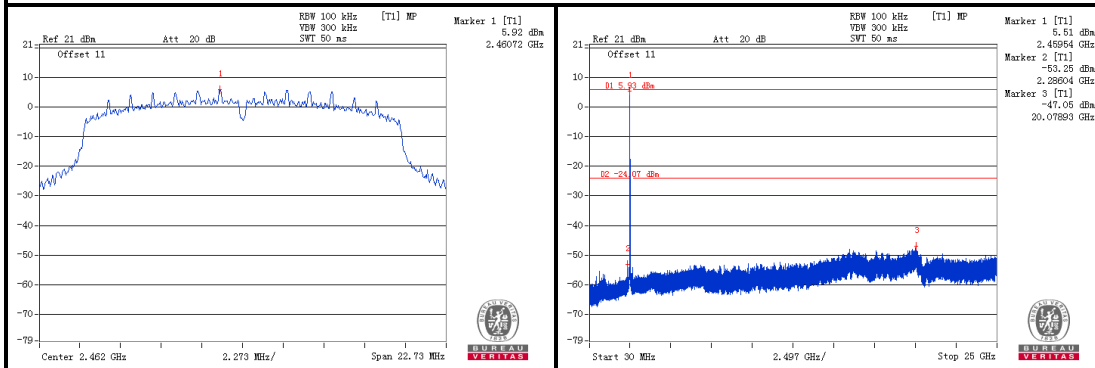





**CHAIN 1**

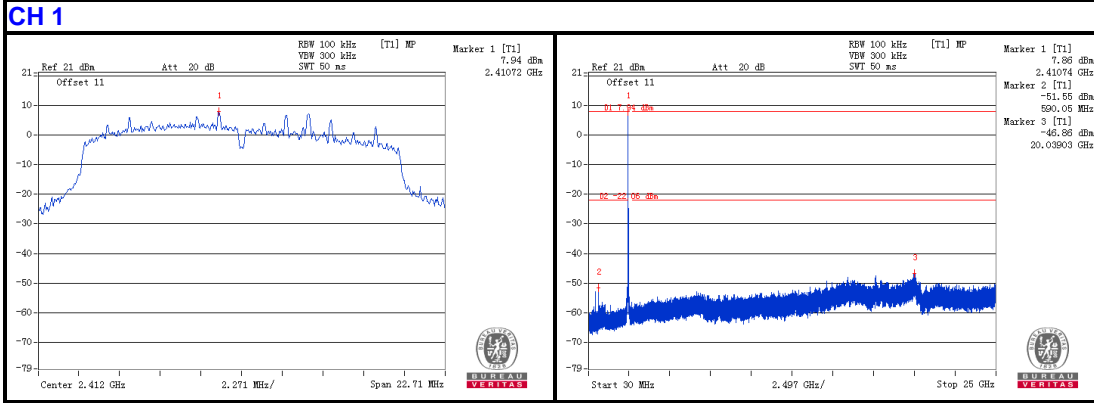

**CH 6**

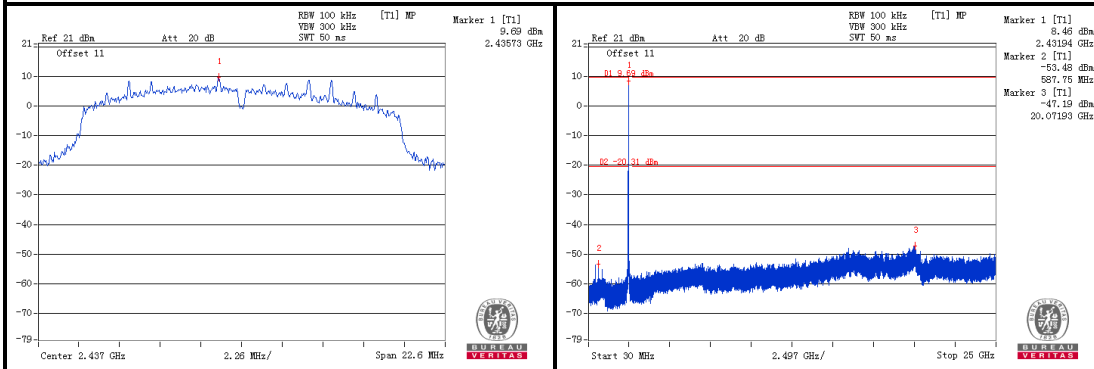

**CH 11**

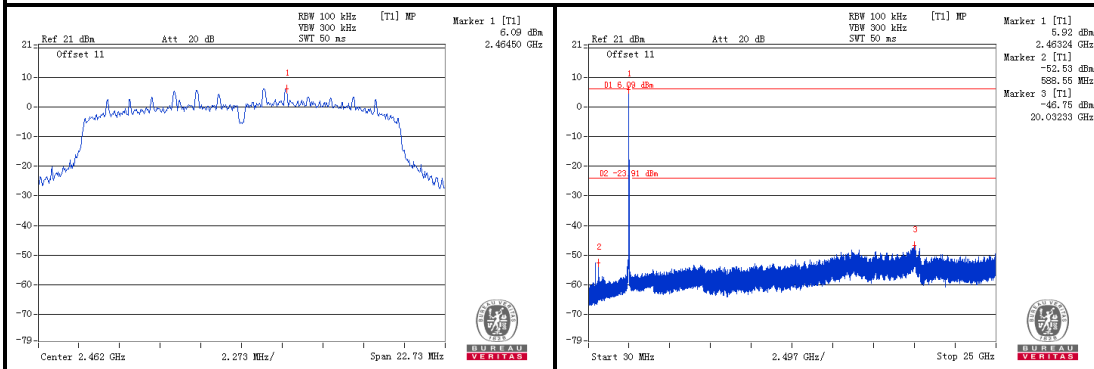





802.11n 40MHz

CHAIN 0


CH 3

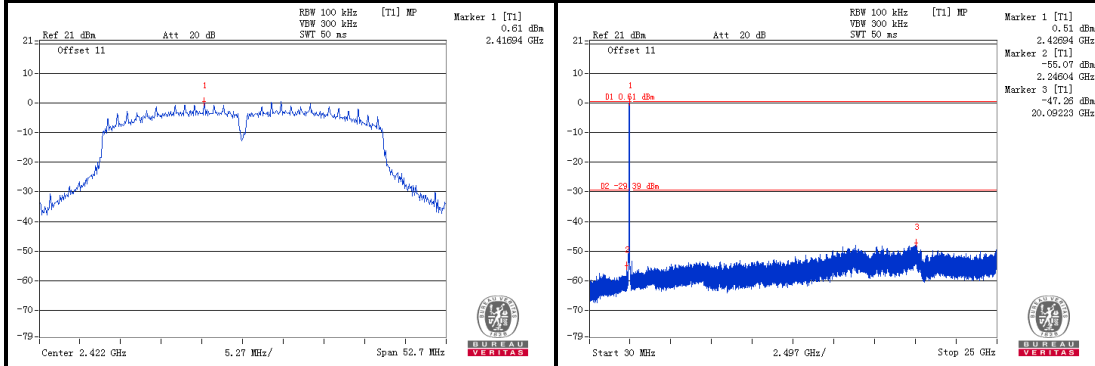

CH 6

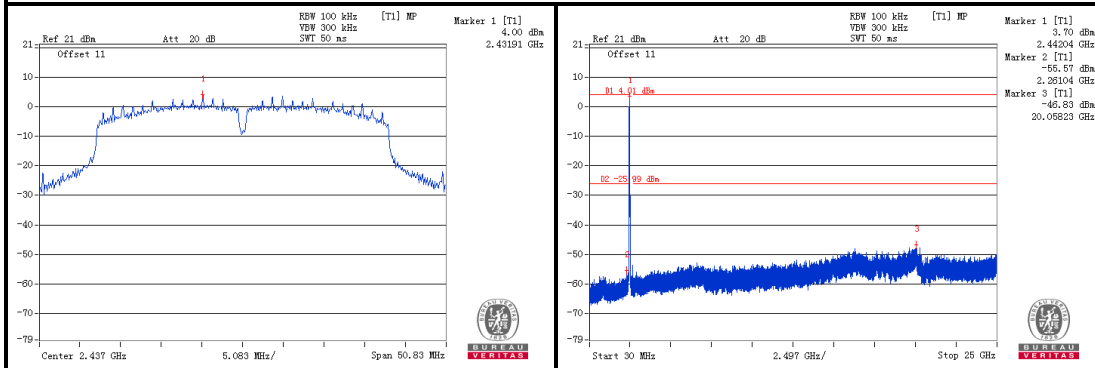


CH 9

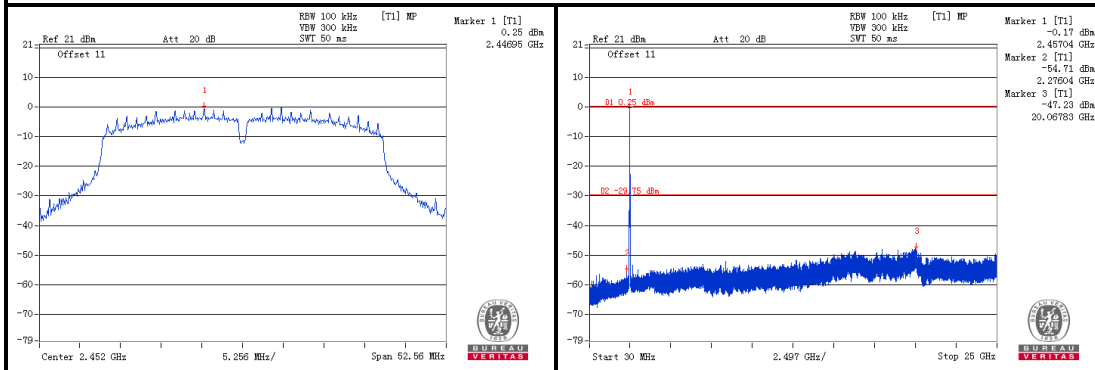




**CHAIN 1**

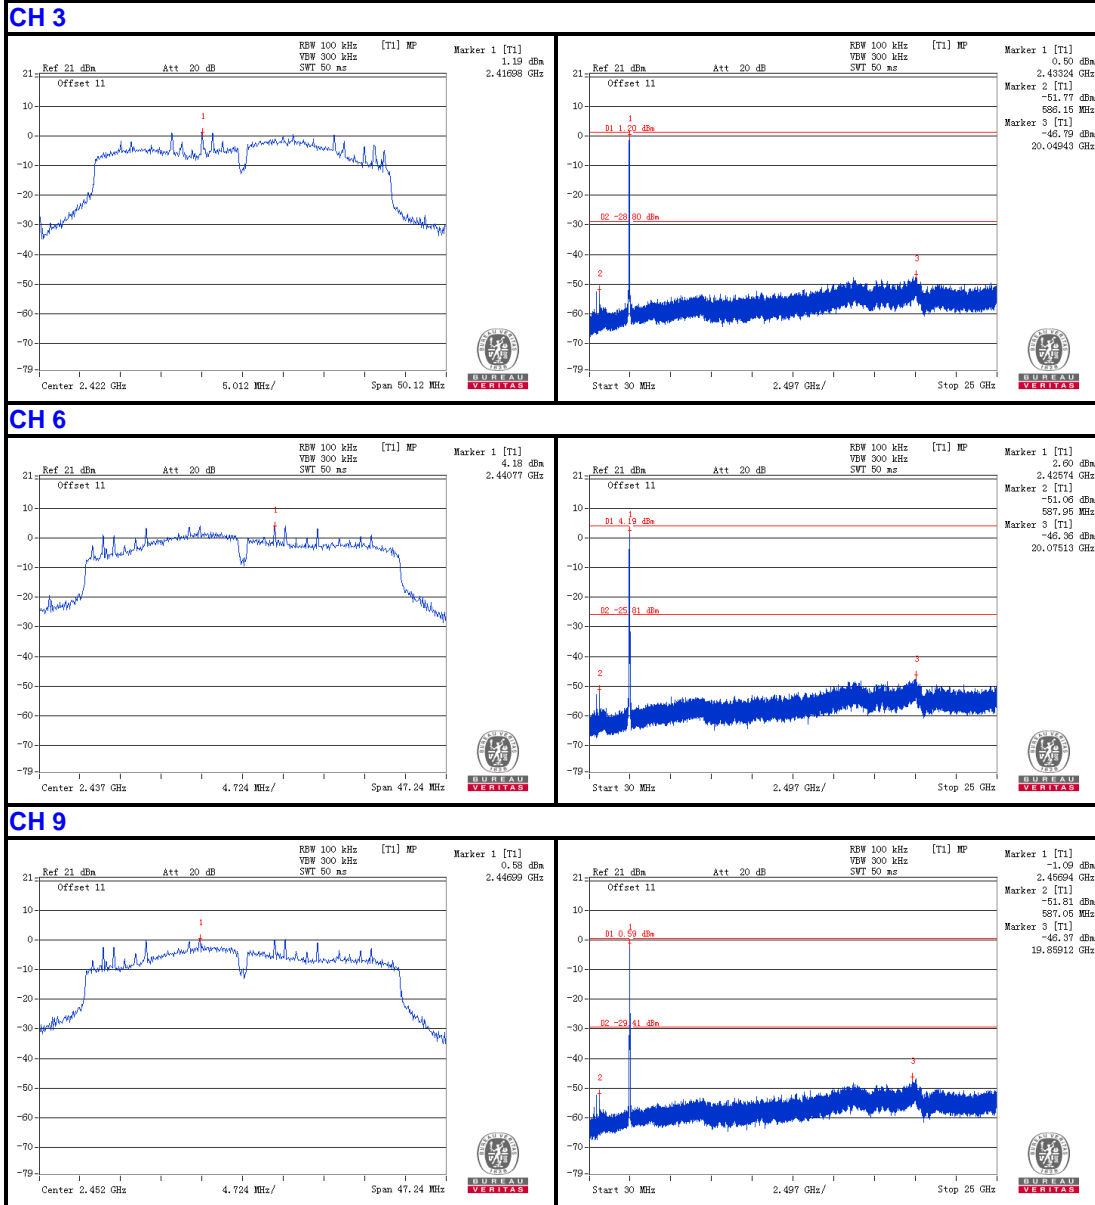




802.11b

CHAIN 0

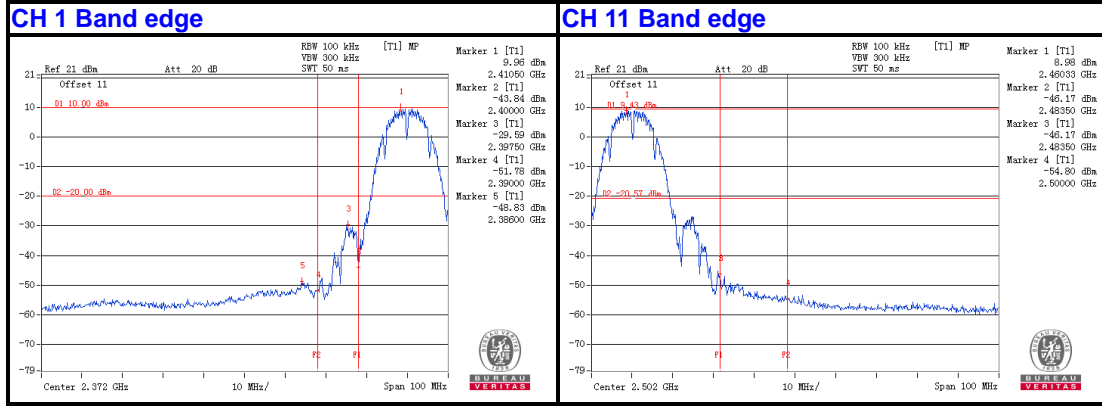


CHAIN 1

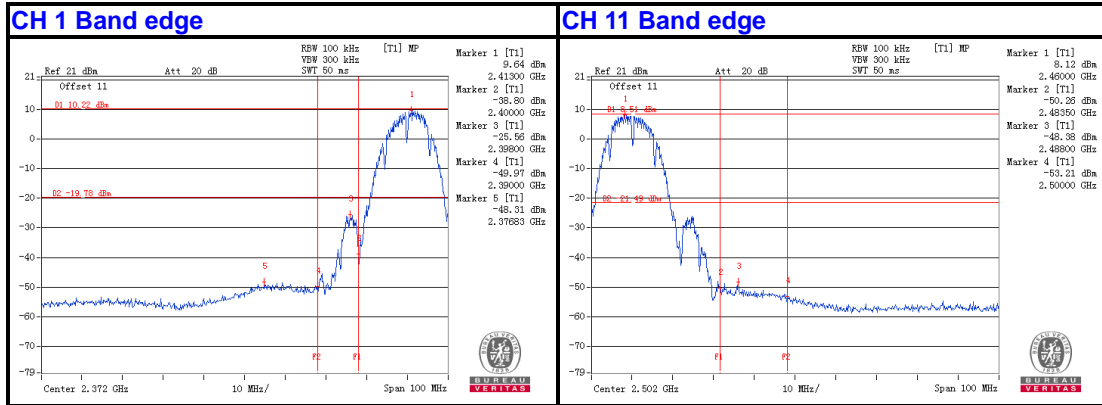




802.11g

CHAIN 0

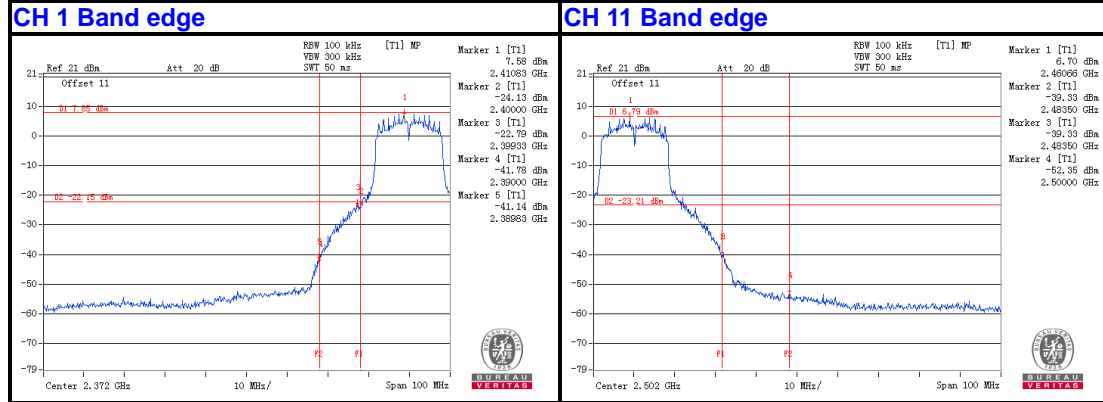

CHAIN 1

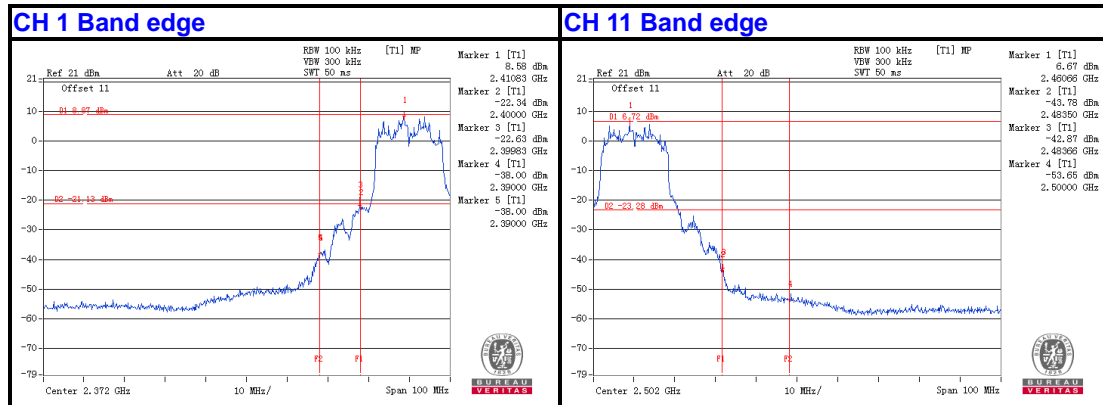





802.11n 20MHz

CHAIN 0

CH 1 Band edge

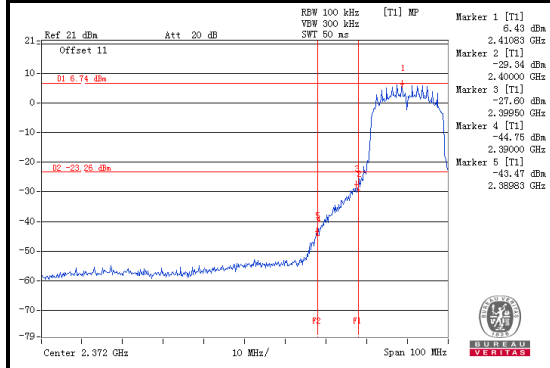


CH 11 Band edge

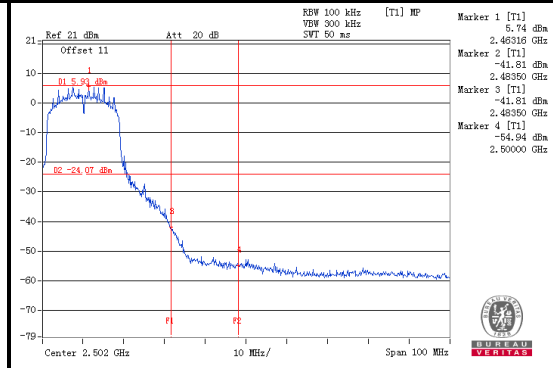


CHAIN 1

CH 1 Band edge

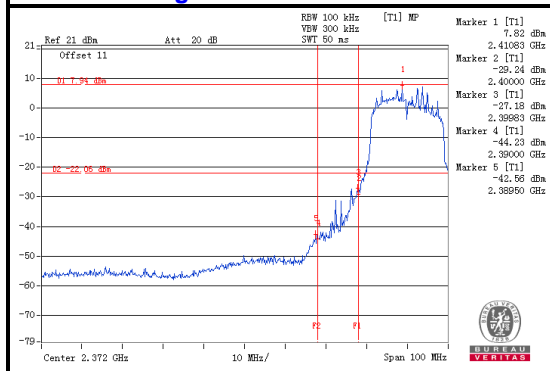

CH 11 Band edge

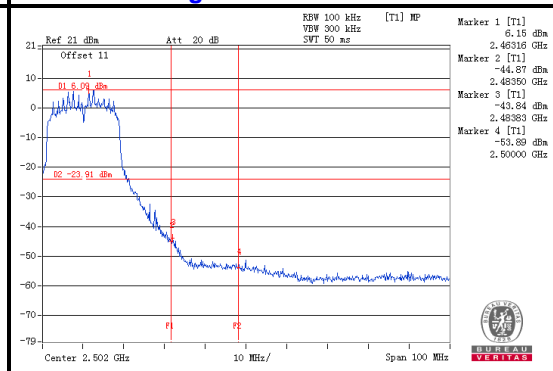





802.11n 40MHz

CHAIN 0

CH 3 Band edge

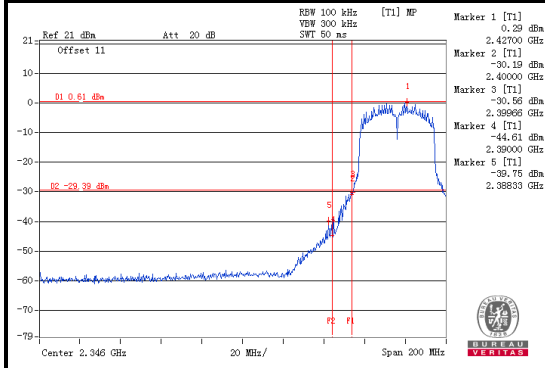


CH 9 Band edge

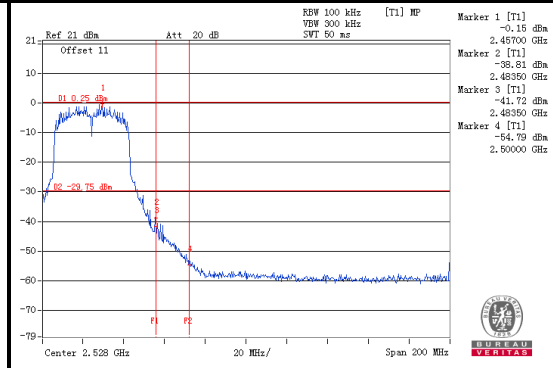


CHAIN 1

CH 3 Band edge

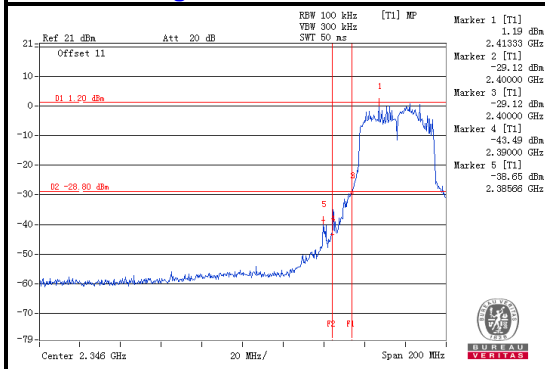

CH 9 Band edge

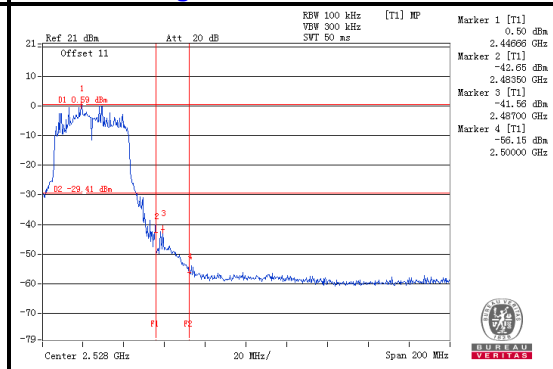





**BUREAU** Test Report No.: RF160122N030  
**VERITAS**

## 5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU** Test Report No.: RF160122N030  
**VERITAS**

## **6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No any modifications are made to the EUT by the lab during the test.

**---END---**