



BUREAU
VERITAS

Test Report No.: RF2012WSZ0038-2



TEST REPORT

Applicant	FKA Distributing Co., LLC
Address	3000 N. Pontiac Trail, Commerce Township, Michigan, 48390, United States

Manufacturer or Supplier	Wonders Technology Co., Ltd
Address	4/F, 3rd Buildings, Tower A, Tian'an Yungu Cloud Park, Xuegang North Road, Bantian Avenue, Shenzhen 518129, China
Product	JAM TWS Sport
Brand Name	N/A
Model	HX-EP525A
Additional Model & Model Difference	N/A
Date of tests	Dec. 10, 2020~ Jan. 10, 2020

the tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Aaron Liang Project Engineer / EMC Department	Approved by David Huang Supervisor / EMC Department
	Date: Jan. 11, 2021

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT 6

3.2 DESCRIPTION OF TEST MODES 7

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST 7

3.2.2. Test Mode Applicability and tested channel detail 7

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS 9

3.4 DESCRIPTION OF SUPPORT UNITS 9

4 TEST TYPES AND RESULTS..... 10

4.1 RADIATED EMISSION MEASUREMENT 10

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT 10

4.1.2 TEST INSTRUMENTS.....11

4.1.3 TEST PROCEDURES 12

4.1.4 DEVIATION FROM TEST STANDARD 13

4.1.5 TEST SETUP 13

4.1.6 EUT OPERATING CONDITIONS 14

4.1.7 TEST RESULTS 15

4.2 6dB BANDWIDTH MEASUREMENT..... 23

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT 23

4.2.2 TEST INSTRUMENTS..... 23

4.2.3 TEST PROCEDURE 24

4.2.4 DEVIATION FROM TEST STANDARD 24

4.2.5 TEST SETUP 25

4.2.6 EUT OPERATING CONDITIONS 25

4.2.7 TEST RESULTS 26

4.3 CONDUCTED OUTPUT POWER..... 28

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT 28

4.3.2 TEST SETUP 28

4.3.3 TEST INSTRUMENTS..... 28

4.3.4 TEST PROCEDURES 29



4.3.5	DEVIATION FROM TEST STANDARD	29
4.3.6	EUT OPERATING CONDITIONS	29
4.3.7	TEST RESULTS	29
4.3.7.1	MAXIMUM PEAK OUTPUT POWER	29
4.3.7.2	AVERAGE OUTPUT POWER (FOR REFERENCE)	30
4.4	POWER SPECTRAL DENSITY MEASUREMENT	31
4.4.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	31
4.4.2	TEST SETUP	31
4.4.3	TEST INSTRUMENTS	31
4.4.4	TEST PROCEDURE	31
4.4.5	DEVIATION FROM TEST STANDARD	31
4.4.6	EUT OPERATING CONDITION	31
4.4.7	TEST RESULTS	32
4.5	OUT OF BAND EMISSION MEASUREMENT	34
4.5.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	34
4.5.2	TEST SETUP	34
4.5.3	TEST INSTRUMENTS	34
4.5.4	TEST PROCEDURE	34
4.5.5	DEVIATION FROM TEST STANDARD	35
4.5.6	EUT OPERATING CONDITION	35
4.5.7	TEST RESULTS	36
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	42
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	43



**BUREAU
VERITAS**

Test Report No.: RF2012WSZ0038-2

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF2012WSZ0038-2	Original release	Jan. 11, 2021



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	N/A	Powered from battery
15.205 15.209	Radiated Emission	PASS	Meet the requirement of limit.
15.247(d)	Out of band Emission Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Radiated emissions	9kHz~30MHz	2.16dB
	30MHz ~ 1GMHz	3.74dB
	1GHz ~ 18GHz	4.66dB
	18GHz ~ 40GHz	4.67dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k = 2.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	JAM TWS Sport
MODEL NO.	HX-EP525A
ADDITIONAL MODELS	N/A
FCC ID	TG3-HXEP525AL
NOMINAL VOLTAGE	Earphone: DC 3.7V from Li-ion battery or DC 5V from charging case Charging case: DC 5V from USB
MODULATION TECHNOLOGY	DTS
MODULATION TYPE	BT-LE(GFSK)
OPERATING FREQUENCY	2402-2480MHz
PEAK OUTPUT POWER	0.721mW (Max. Measured)
ANTENNA TYPE	Ceramic Antenna, with 0dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB Line: Unshielded, Detachable 30cm

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
3. Please refer to the EUT photo document (Reference No.: 2012WSZ0038) for detailed product photo.
4. When the EUT charging that wireless function can't working, the charging mode was tested in the FCC Part 15B(sDOC) report.(report no.: FS2012WSZ0038)



3.2 DESCRIPTION OF TEST MODES

40 channels are provided for BT-LE(GFSK):

CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)	CHANNEL	FREQ. (MHZ)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE<1G	RE≥1G	PLC	APCM	
A	√	√	-	√	DC 3.7V from Full Battery

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.



RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	39	DTS	BT-LE	1
BT-LE	0 to 39	39	DTS	BT-LE	2

For the test results, only the worst case was shown in test report.

RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0,19, 39	DTS	BT-LE	1
BT-LE	0 to 39	0,19, 39	DTS	BT-LE	2

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
BT-LE	0 to 39	0, 19, 39	DTS	BT-LE	1
BT-LE	0 to 39	0,19, 39	DTS	BT-LE	2

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	24deg. C, 53%RH	DC 3.7V from Full Battery	Aaron Liang
RE≥1G	25deg. C, 55%RH	DC 3.7V from Full Battery	Aaron Liang
PLC	N/A	N/A	N/A
APCM	22deg. C, 55%RH	DC 3.7V from Full Battery	Aaron Liang



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

Note: All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Computer	lenove	E40-30	MP05R4Z1	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	USB Line: Unshielded, Detachable 1m



4 TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESL6	1300.5001K06 -100262-eQ	Mar. 24, 20	Mar. 24, 21
Bilog Antenna	Sunol Sciences	JB6	A110712	Jul. 21, 20	Jul. 21, 21
Active Antenna	CMO-POWER	AL-130	121031	Jun. 30, 20	Jun. 30, 21
Signal Amplifier	HP	8447E	443008	Mar. 24, 20	Mar. 24, 21
Signal and Spectrum Analyzer	R&S	FSV40	101094	Mar. 19, 20	Mar. 19, 21
MXA signal analyzer	Agilent	N9020A	MY49100060	Mar. 24, 20	Mar. 24, 21
Horn Antenna	COM-POWER	AH-118	71259	Apr. 17, 20	Apr. 17, 21
Horn Antenna	COM-POWER	AH-118	71283	Jul. 21, 20	Jul. 21, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170147	May 10, 20	May 10, 21
SHF-EHF Horn	Schwarzbeck	BBHA9170	BBHA9170242	May 10, 20	May 10, 21
AMPLIFIER	EM Electornic Corporation	EM01G26G	60613	Mar. 24, 20	Mar. 24, 21
Pre-amplifier	Rohde&Schwarz	SCU40	100437	Oct. 17, 20	Oct. 16, 21
3m Semi-anechoic Chamber	SAEMC	9m*6m*6m	N/A	Oct. 18,18	Oct. 17, 21
Test Software	EZ-EMC	ICP-03A1	N/A	N/A	N/A

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months (Except 3m Semi-anechoic Chamber). And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above1GHz if tested.
4. The FCC Site Registration No. is 535293.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
- 4.All modes of operation were investigated and the worst-case emissions are reported.
- 5.The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.




4.1.4 DEVIATION FROM TEST STANDARD


No deviation.

4.1.5 TEST SETUP

Below 30MHz test setup

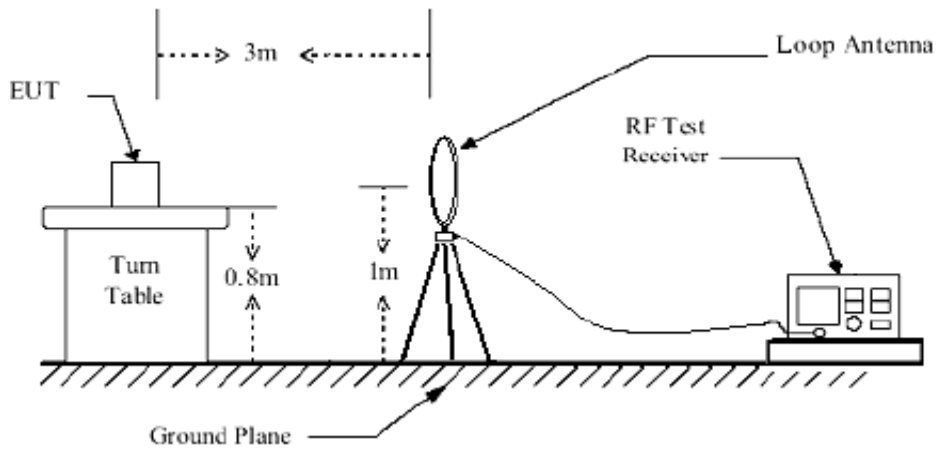


Below 1GHz test setup

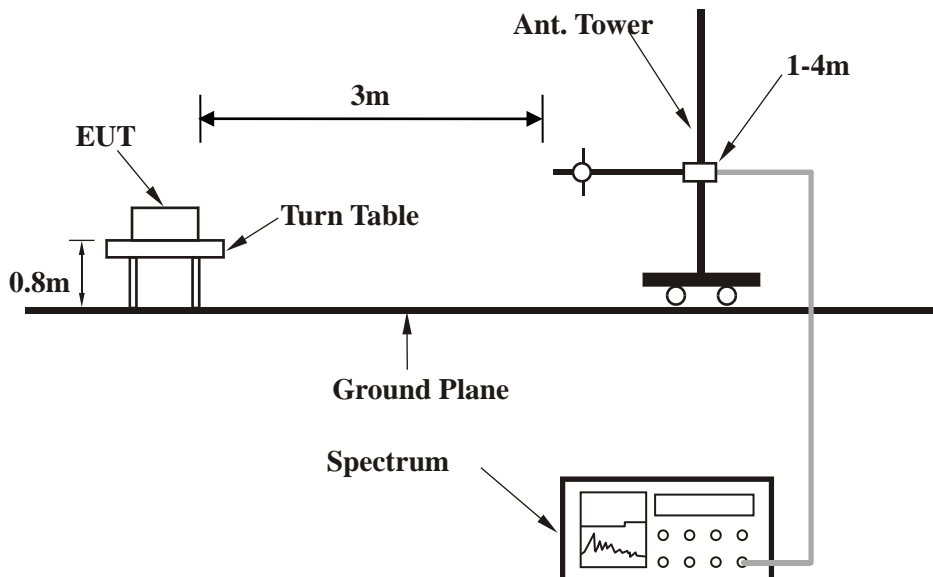

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).



Above 1GHz test setup

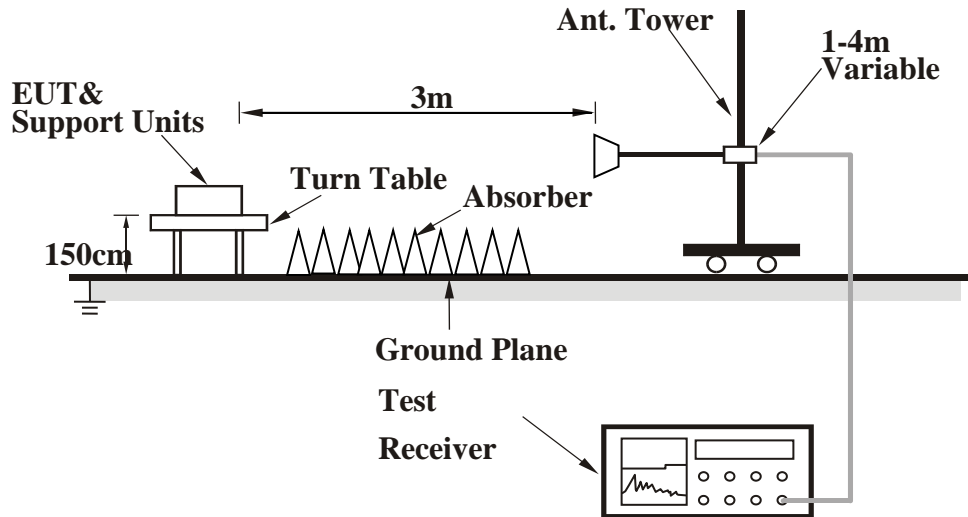

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed them on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



4.1.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


BT-LE GFSK (2 Mbps)

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	31.3992	28.13	20.22	21.63	0.43	27.15	40.00	-12.85	200	170
2	68.6310	28.12	7.87	21.62	0.76	15.13	40.00	-24.87	100	170
3	125.8864	27.50	13.47	21.66	1.13	20.44	43.50	-23.06	200	347
4	291.0360	26.98	13.49	21.97	1.78	20.28	46.00	-25.72	100	283
5	506.4791	27.96	17.75	22.02	2.29	25.98	46.00	-20.02	100	266
6	790.6188	30.06	21.27	21.72	2.94	32.55	46.00	-13.45	100	351

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

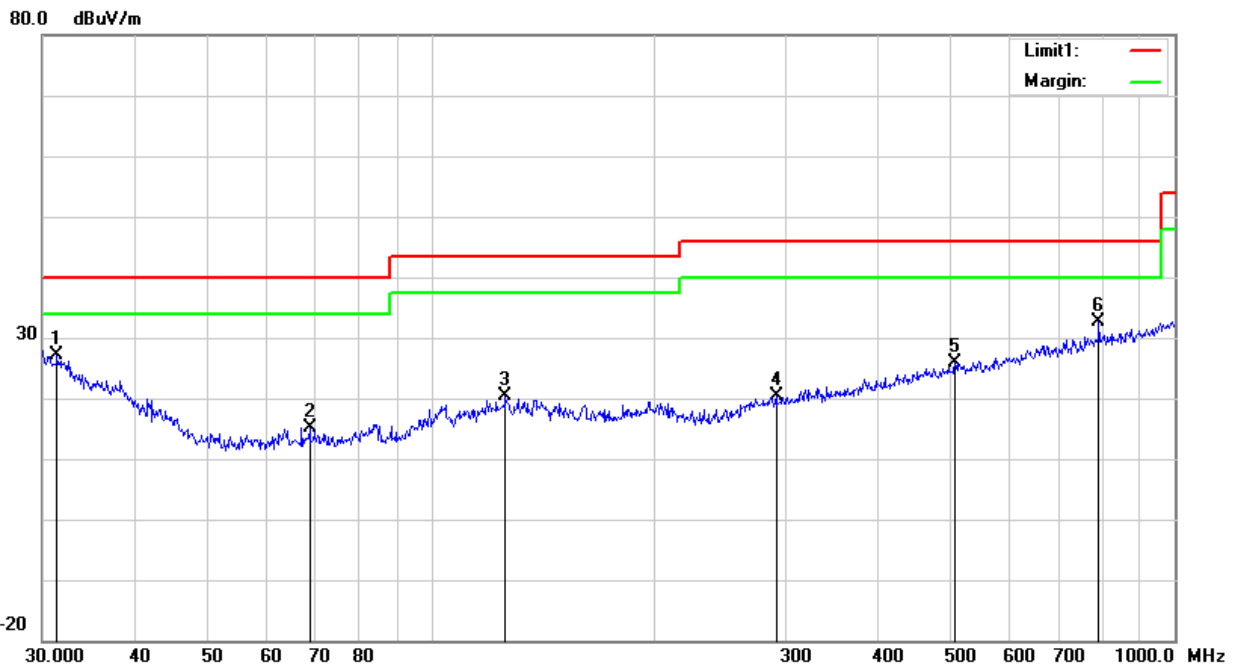




CHANNEL	TX Channel 39	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 m										
No.	Frequency (MHz)	Reading (dBuV/m)	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	31.0706	29.11	20.45	21.63	0.43	28.36	40.00	-11.64	100	154
2	48.8429	35.69	8.60	21.62	0.58	23.25	40.00	-16.75	100	94
3	140.8351	27.39	12.93	21.69	1.19	19.82	43.50	-23.68	200	316
4	339.5888	27.68	14.23	22.00	1.91	21.82	46.00	-24.18	100	112
5	645.1195	28.76	19.62	21.96	2.61	29.03	46.00	-16.97	100	30
6	962.1623	28.15	22.75	21.43	3.33	32.80	54.00	-21.20	200	311

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)-Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. 9KHz~30MHz have been test and test data more than 20dB margin.
5. Margin value = Emission level – Limit value.

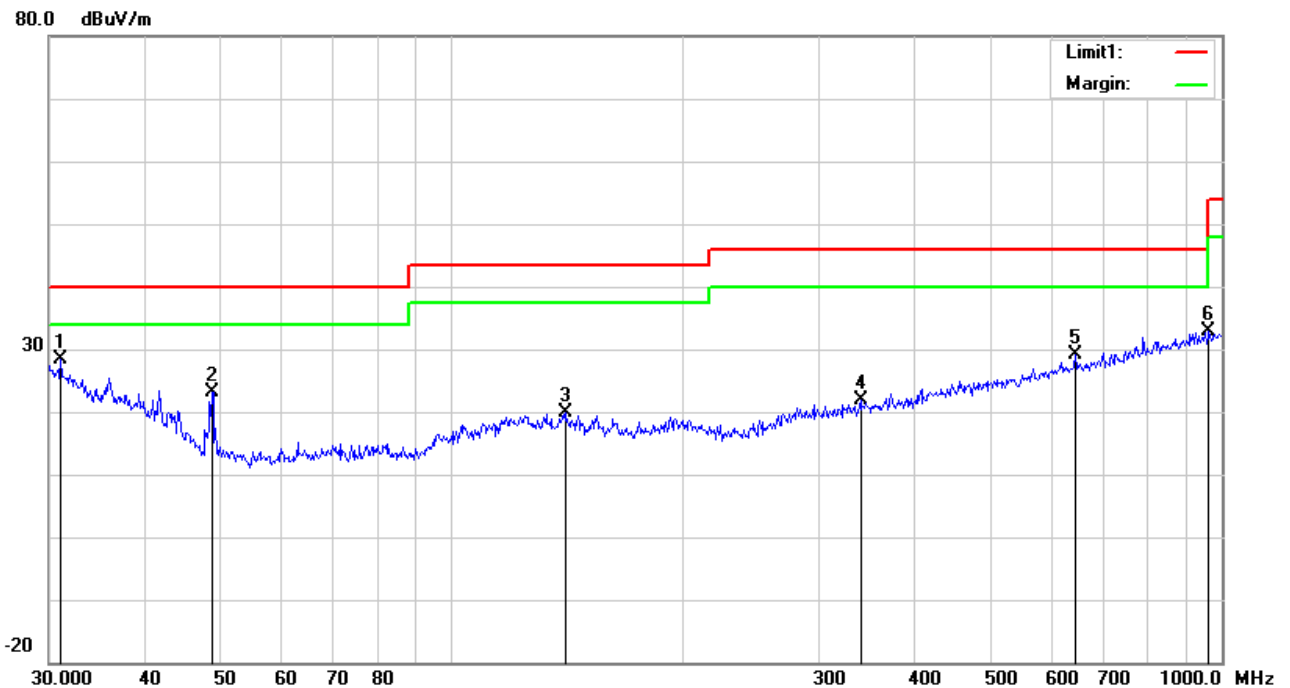



ABOVE 1GHz TEST DATA:

BT-LE GFSK (1 Mbps)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2383.59	44.08 PK	74	-29.92	103	255	55.46	-11.38
2	2383.59	35.99 AV	54	-18.01	103	255	47.37	-11.38
3	*2402	89.76 PK			115	170	101.14	-11.38
4	*2402	89.47 AV			115	170	100.85	-11.38
5	4804	48.36 PK	74	-25.64	155	193	54.43	-6.07
6	4804	39.29 AV	54	-14.71	155	193	45.36	-6.07
7	7206	52.36 PK	74	-21.64	142	281	52.07	0.29
8	7206	43.2 AV	54	-10.8	142	281	42.91	0.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	((dB/m)
1	2384.03	43.27 PK	74	-30.73	127	302	54.65	-11.38
2	2384.03	33.56 AV	54	-20.44	127	302	44.94	-11.38
3	*2402	85.76 PK			151	140	97.14	-11.38
4	*2402	85.98 AV			151	140	97.36	-11.38
5	4804	46.83 PK	74	-27.17	153	19	52.9	-6.07
6	4804	38.41 AV	54	-15.59	153	19	44.48	-6.07
7	7206	52.5 PK	74	-21.5	155	295	52.21	0.29
8	7206	42.31 AV	54	-11.69	155	295	42.02	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	89.46 PK			188	297	100.84	-11.38
2	*2440	89.39 AV			188	297	100.77	-11.38
3	4880	46.32 PK	74	-27.68	120	291	52.39	-6.07
4	4880	44.9 AV	54	-9.1	120	291	50.97	-6.07
5	7320	53.78 PK	74	-20.22	245	261	53.49	0.29
6	7320	42.33 AV	54	-11.67	245	261	42.04	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	87.38 PK			210	271	98.76	-11.38
2	*2440	87.36 AV			210	271	98.74	-11.38
3	4880	50.55 PK	74	-23.45	126	293	56.62	-6.07
4	4880	46.91 AV	54	-7.09	126	293	52.98	-6.07
5	7320	51.43 PK	74	-22.57	120	84	51.14	0.29
6	7320	42.04 AV	54	-11.96	120	84	41.75	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2483.5	47.49 PK	74	-26.51	114	88	58.87	-11.38
2	2483.5	40.78 AV	54	-13.22	114	88	52.16	-11.38
3	*2480	87.59 PK			206	179	98.97	-11.38
4	*2480	86.75 AV			206	179	98.13	-11.38
5	4960	47.23 PK	74	-26.77	154	250	53.3	-6.07
6	4960	39.96 AV	54	-14.04	154	250	46.03	-6.07
7	7440	50.99 PK	74	-23.01	200	232	50.7	0.29
8	7440	42.55 AV	54	-11.45	200	232	42.26	0.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	((dB/m)
1	2483.5	48.88 PK	74	-25.12	121	102	60.26	-11.38
2	2483.5	41.69 AV	54	-12.31	121	102	53.07	-11.38
3	*2480	88.19 PK			201	208	99.57	-11.38
4	*2480	87.82 AV			201	208	99.2	-11.38
5	4960	47.19 PK	74	-26.81	178	233	53.26	-6.07
6	4960	39.83 AV	54	-14.17	178	233	45.9	-6.07
7	7440	51.88 PK	74	-22.12	248	42	51.59	0.29
8	7440	42.08 AV	54	-11.92	248	42	41.79	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BT-LE GFSK (2 Mbps)

CHANNEL	TX Channel 0	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2390	44.06 PK	74	-29.94	202	239	55.44	-11.38
2	2390	34.14 AV	54	-19.86	202	239	45.52	-11.38
3	*2402	86.31 PK			101	210	97.69	-11.38
4	*2402	85.19 AV			101	210	96.57	-11.38
5	4804	47.68 PK	74	-26.32	150	104	53.75	-6.07
6	4804	40.76 AV	54	-13.24	150	104	46.83	-6.07
7	7206	52.94 PK	74	-21.06	146	79	52.65	0.29
8	7206	43.73 AV	54	-10.27	146	79	43.44	0.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	((dB/m)
1	2381.92	43.47 PK	74	-30.53	228	341	54.85	-11.38
2	2381.92	33.06 AV	54	-20.94	228	341	44.44	-11.38
3	*2402	82.52 PK			113	21	93.9	-11.38
4	*2402	81.85 AV			113	21	93.23	-11.38
5	4804	47.22 PK	74	-26.78	188	182	53.29	-6.07
6	4804	38.22 AV	54	-15.78	188	182	44.29	-6.07
7	7206	53.61 PK	74	-20.39	149	343	53.32	0.29
8	7206	43.7 AV	54	-10.3	149	343	43.41	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



CHANNEL	TX Channel 19	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	87.13 PK			178	290	97.51	-11.38
2	*2440	85.06 AV			178	290	96.44	-11.38
3	4880	47.72 PK	74	-26.28	100	71	53.79	-6.07
4	4880	42.32 AV	54	-11.68	100	71	48.39	-6.07
5	7320	53.12 PK	74	-20.88	152	292	52.83	0.29
6	7320	42.46 AV	54	-11.54	152	292	42.17	0.29
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	*2440	83.88 PK			207	295	95.26	-11.38
2	*2440	82.07 AV			207	295	93.45	-11.38
3	4880	47.21 PK	74	-26.79	217	223	53.28	-6.07
4	4880	38.37 AV	54	-15.63	217	223	44.44	-6.07
5	7320	52.44 PK	74	-21.56	136	234	52.15	0.29
6	7320	44.23 AV	54	-9.77	136	234	43.94	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	(dB/m)
1	2483.5	45.86 PK	74	-28.14	149	97	57.24	-11.38
2	2483.5	39.12 AV	54	-14.88	149	97	50.5	-11.38
3	*2480	85.48 PK			237	289	96.86	-11.38
4	*2480	84.27 AV			237	289	95.65	-11.38
5	4960	49.32 PK	74	-24.68	112	268	55.39	-6.07
6	4960	42.99 AV	54	-11.01	112	268	49.06	-6.07
7	7440	52.36 PK	74	-21.64	206	59	52.07	0.29
8	7440	43.6 AV	54	-10.4	206	59	43.31	0.29

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	FREQ.	Emission Level	Limit	Margin	Height	Degree	Raw Value	Correction Factor
	(MHz)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)	(dBuV)	((dB/m)
1	2483.5	44.84 PK	74	-29.16	135	176	56.22	-11.38
2	2483.5	36.45 AV	54	-17.55	135	176	47.83	-11.38
3	*2480	82.75 PK			245	120	94.13	-11.38
4	*2480	82.16 AV			245	120	93.54	-11.38
5	4960	47.97 PK	74	-26.03	108	145	54.04	-6.07
6	4960	39.75 AV	54	-14.25	108	145	45.82	-6.07
7	7440	52.09 PK	74	-21.91	215	232	51.8	0.29
8	7440	44.22 AV	54	-9.78	215	232	43.93	0.29

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Gain (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.2 6dB BANDWIDTH MEASUREMENT

4.2.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 28, 19	Dec. 27, 20
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 27, 20	Dec. 26, 21
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24, 20	Mar. 24, 21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24, 20	Mar. 24, 21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 20	Dec. 17, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30, 20	Mar. 30, 21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24, 20	Mar. 24, 21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27, 20	Mar. 27, 21

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.2.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

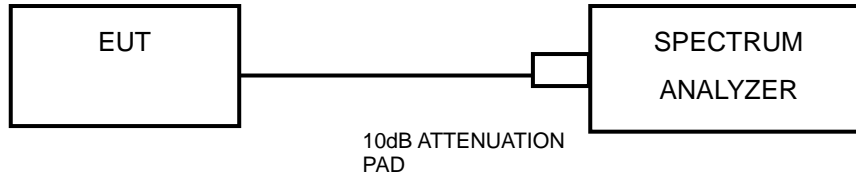

4.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




4.2.7 TEST RESULTS

BT-LE GFSK (1 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.504	0.5	PASS
19	2440	0.508	0.5	PASS
39	2480	0.500	0.5	PASS

WORSE PLOT

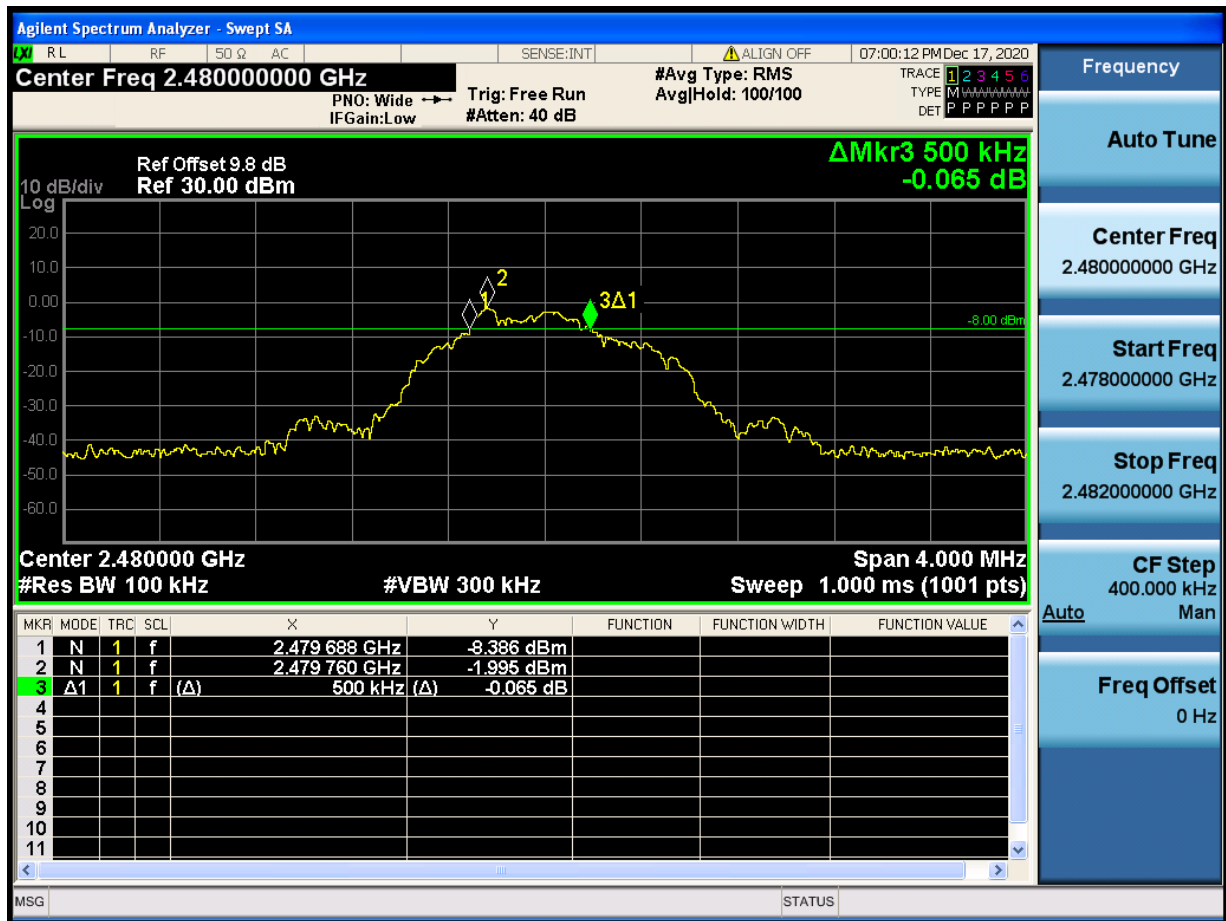



**BUREAU
VERITAS**

Test Report No.: RF2012WSZ0038-2

BT-LE GFSK (2 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	0.848	0.5	PASS
19	2440	0.840	0.5	PASS
39	2480	0.808	0.5	PASS

WORSE PLOT



Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com




4.3 CONDUCTED OUTPUT POWER

4.3.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.3.2 TEST SETUP

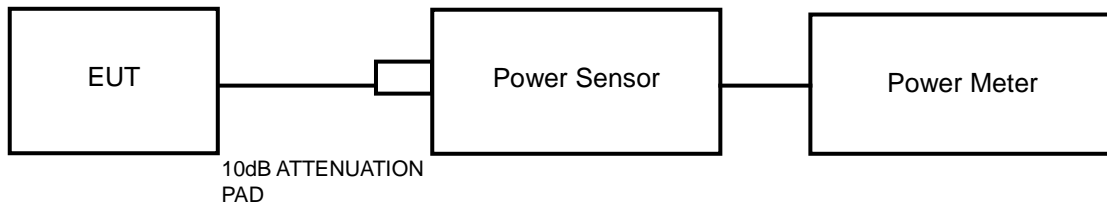

4.3.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 28, 19	Dec. 27, 20
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75	Dec. 27, 20	Dec. 26, 21
MXA VEXTOR SIGNAL	Agilent	n5182a	MY50140530	Mar. 24, 20	Mar. 24, 21
MXA signal analyzer	Agilent	n9020a	MY49100060	Mar. 24, 20	Mar. 24, 21
RF Control Unit	Tonscend	JS0806-2	188060112	Mar. 24, 20	Mar. 24, 21
Signal Generation	Agilent	E4421B	US40051152	Dec. 18, 20	Dec. 17, 21
DC Power Supply	Agilent	E3640A	MY40004013	Mar. 30, 20	Mar. 30, 21
Programmable Temperature & Humidity Chamber	Hongjin	HYC-TH-225 DH	DG-180746	Mar. 24, 20	Mar. 24, 21
Test System	Tonscend	JS 1120-3	N/A	N/A	N/A
Power Splitter	Weinschel	1580-1	TL177	Mar. 27, 20	Mar. 27, 21

NOTE:1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



4.3.4 TEST PROCEDURES

A peak sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.3.5 DEVIATION FROM TEST STANDARD

No deviation.

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

4.3.7.1 MAXIMUM PEAK OUTPUT POWER

BT-LE GFSK (1 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	-1.99	0.632	1	PASS
19	2440	-1.42	0.721	1	PASS
39	2480	-1.64	0.685	1	PASS

BT-LE GFSK (2 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
0	2402	-1.91	0.644	1	PASS
19	2440	-1.46	0.714	1	PASS
39	2480	-1.48	0.711	1	PASS



4.3.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

BT-LE GFSK (1 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	-3.12
19	2440	-3.15
39	2480	-2.67

BT-LE GFSK (2 Mbps)

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)
0	2402	-4.30
19	2440	-3.70
39	2480	-3.93




4.4 POWER SPECTRAL DENSITY MEASUREMENT

4.4.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.4.2 TEST SETUP

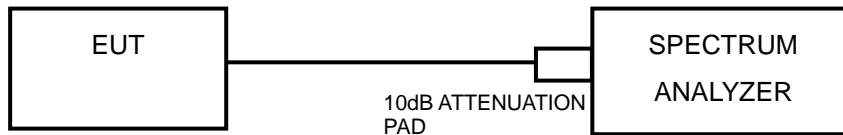

4.4.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.4.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.4.7 TEST RESULTS

BT-LE GFSK (1 Mbps)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-20.648	8	PASS
19	2440	-20.207	8	PASS
39	2480	-20.167	8	PASS

WORSE PLOT






**BUREAU
VERITAS**

Test Report No.: RF2012WSZ0038-2

BT-LE GFSK (2 Mbps)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	2402	-23.379	8	PASS
19	2440	-22.869	8	PASS
39	2480	-22.882	8	PASS

WORSE PLOT

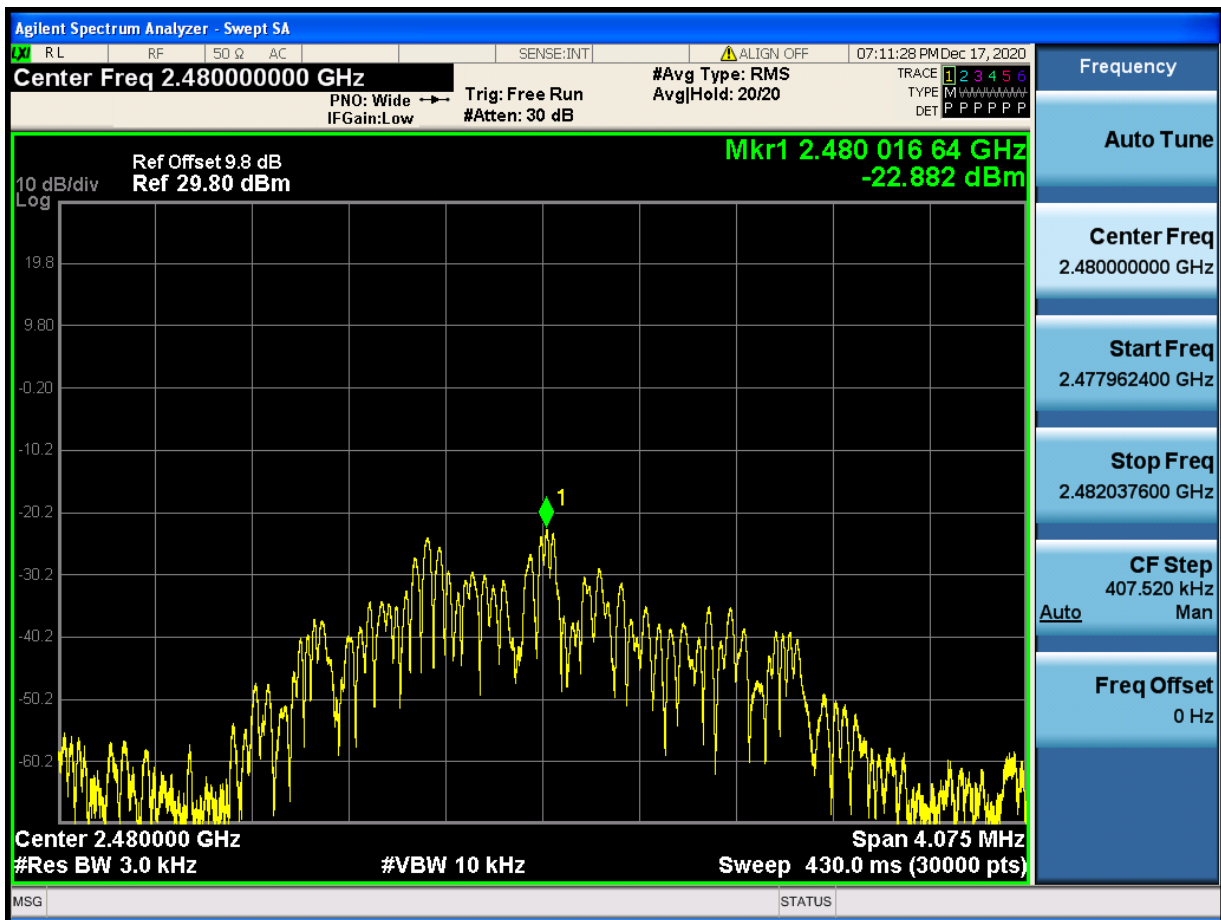

**Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.**

Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com




4.5 OUT OF BAND EMISSION MEASUREMENT

4.5.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.5.2 TEST SETUP

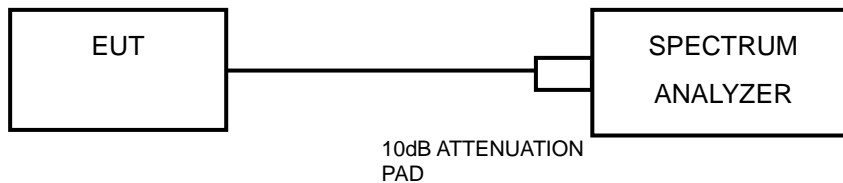

4.5.3 TEST INSTRUMENTS

Refer to section 4.3.3 to get information of above instrument.

4.5.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.




BUREAU VERITAS

Test Report No.: RF2012WSZ0038-2

4.5.7 TEST RESULTS

BT-LE GFSK (1 Mbps)

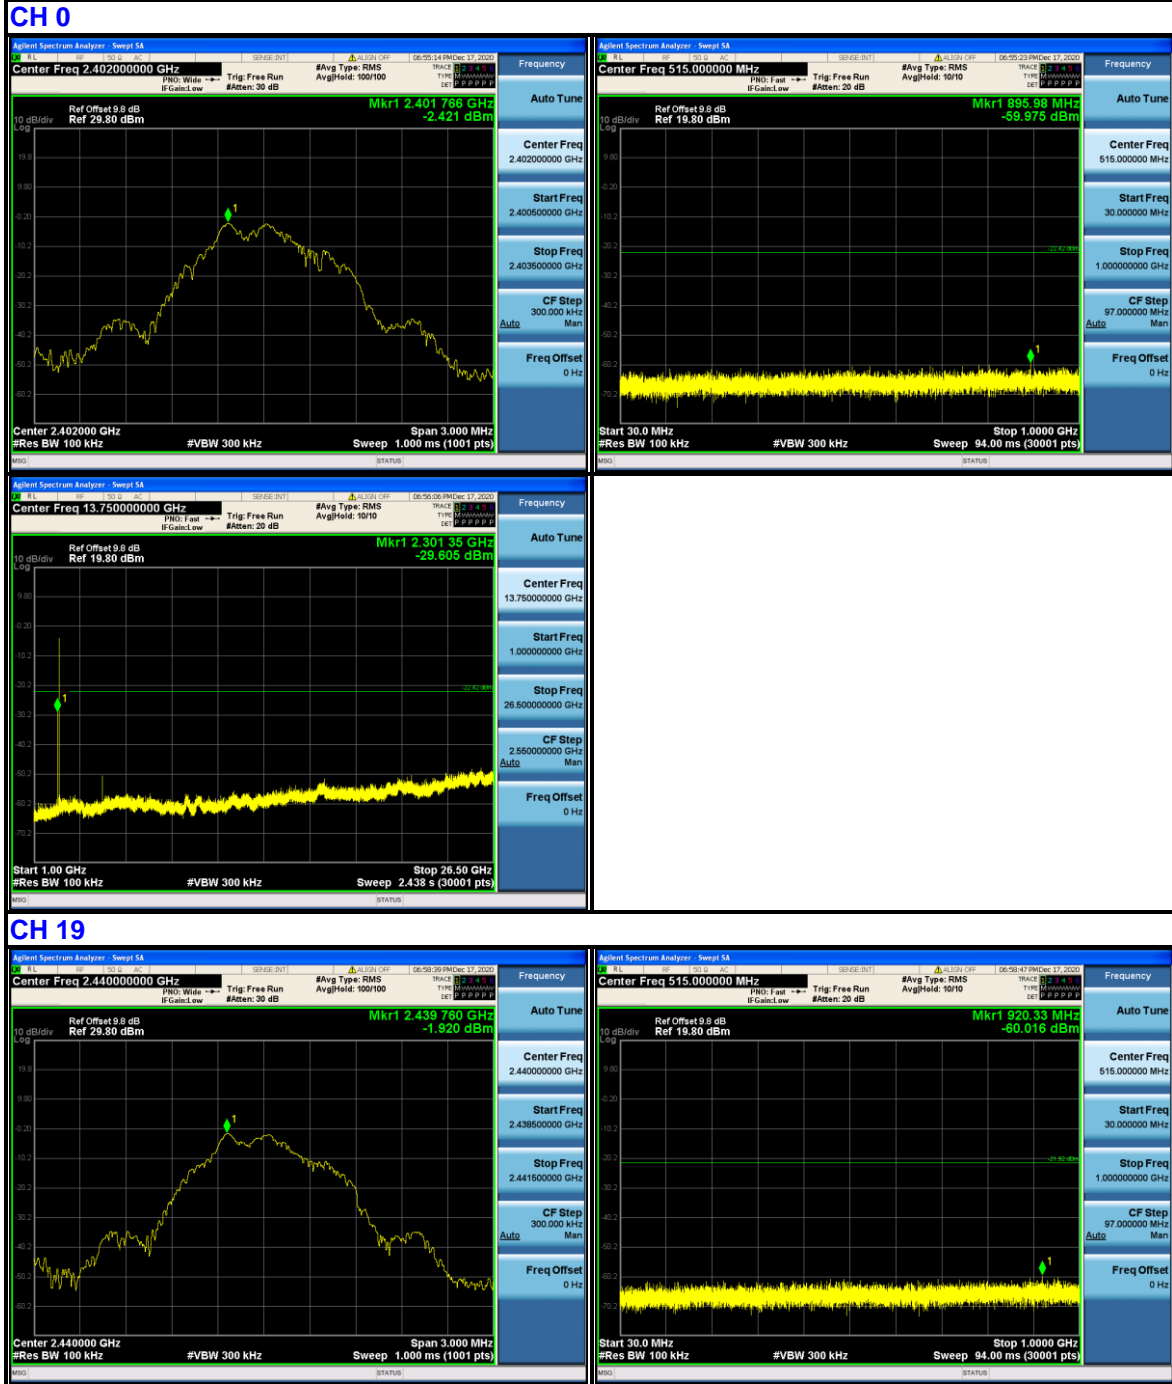

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.


Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com





BUREAU VERITAS

Test Report No.: RF2012WSZ0038-2

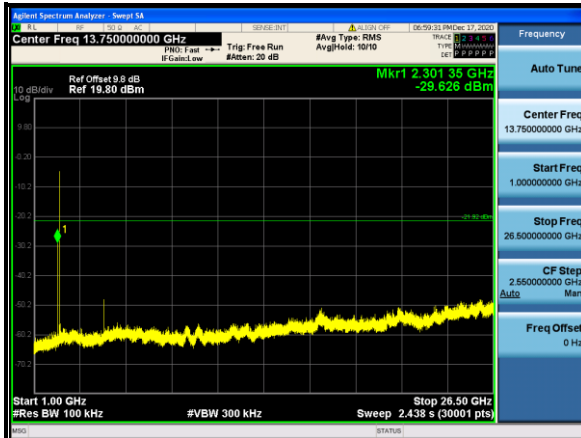

Parameter	Value
Center Freq	13.75000000 GHz
Start Freq	1.00000000 GHz
Stop Freq	26.50000000 GHz
CF Step	2.55000000 GHz
Freq Offset	0 Hz

CH 39

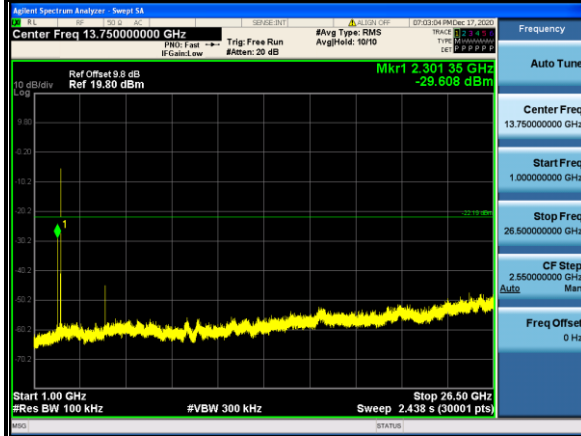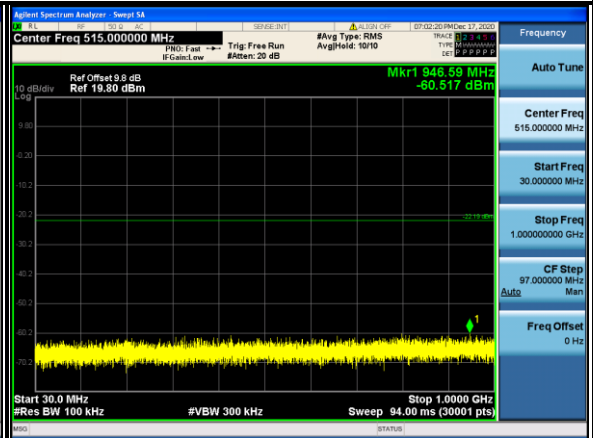

Parameter	Value
Center Freq	13.75000000 GHz
Start Freq	1.00000000 GHz
Stop Freq	26.50000000 GHz
CF Step	2.55000000 GHz
Freq Offset	0 Hz

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.


Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF2012WSZ0038-2

Band Edge:

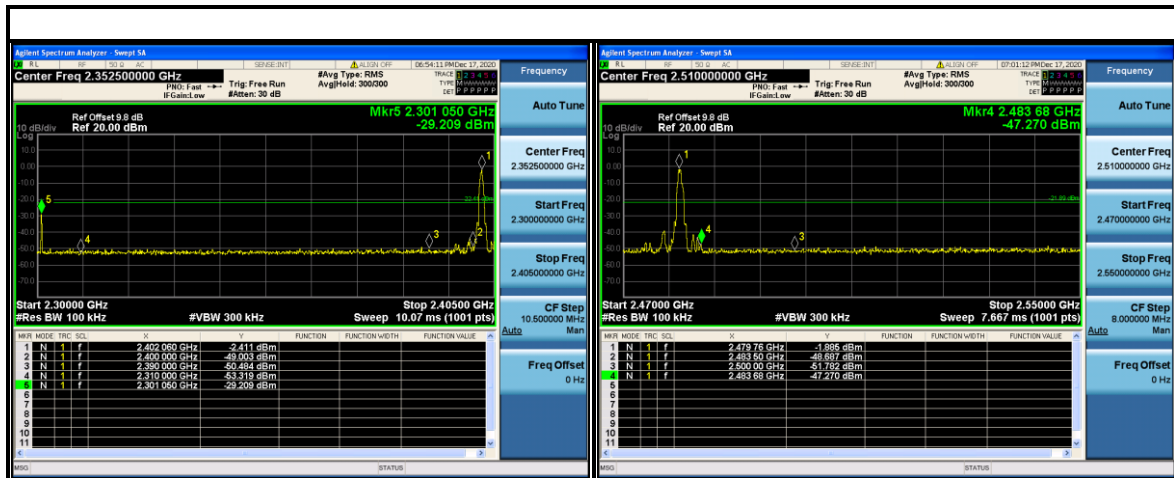

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology
Park, South Side of Zhoushi Road, Bao'an District,
Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com





BUREAU VERITAS


Test Report No.: RF2012WSZ0038-2

BT-LE GFSK (2 Mbps)

CH 0

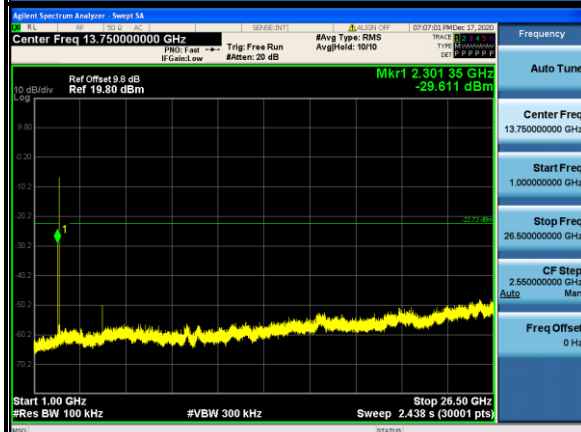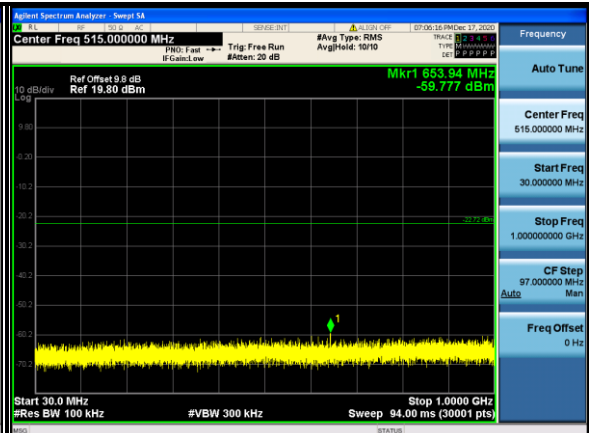


CH 19

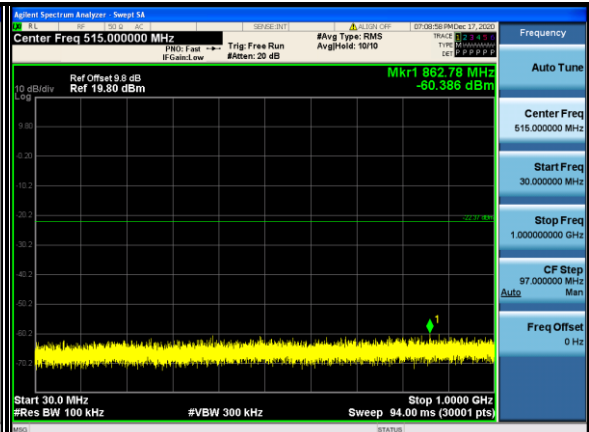

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.



Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com

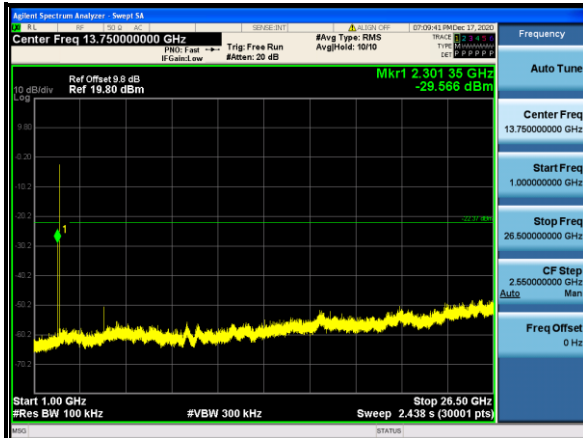

Parameter	Value
Auto Tune	Auto Tune
Center Freq	13.750000000 GHz
Start Freq	1.000000000 GHz
Stop Freq	26.500000000 GHz
CF Step	2.550000000 GHz Auto Man
Freq Offset	0 Hz

CH 39

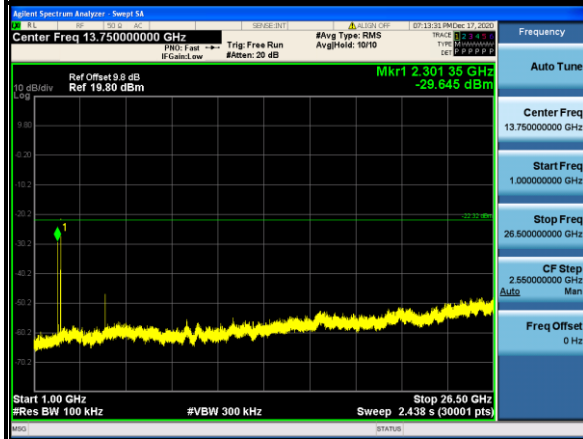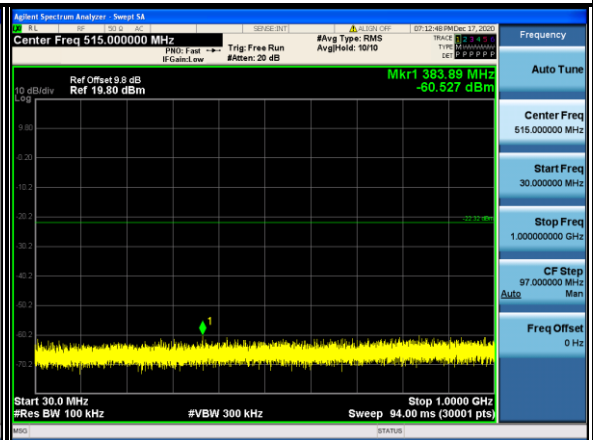


Parameter	Value
Auto Tune	Auto Tune
Center Freq	13.750000000 GHz
Start Freq	1.000000000 GHz
Stop Freq	26.500000000 GHz
CF Step	2.550000000 GHz Auto Man
Freq Offset	0 Hz



BUREAU VERITAS

Test Report No.: RF2012WSZ0038-2

Band Edge:

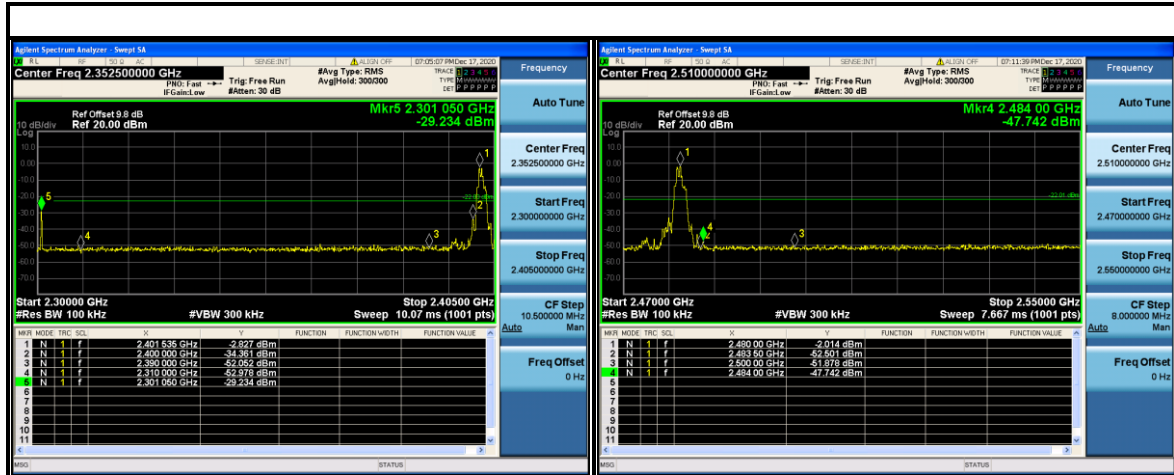

Bureau Veritas (Shenzhen)
Consumer Products Services Co., Ltd.

Zone A, Floor 1, Building 2, Wan Ye Long Technology Park, South Side of Zhoushi Road, Bao'an District, Shenzhen Guangdong, 518108, China.

Tel: +86-755-26014629 Ext.800
Email: customerservice.sz@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: RF2012WSZ0038-2

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---