

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

EQUIPMENT UNDER TEST :
APPARECCHIO IN PROVA :

USB ELECTRONIC KEY
MODEL: STARSIGN BIO TOKEN 3.1 M

REFERENCE STANDARDS :
NORME DI RIFERIMENTO :

FCC 47 CFR Part 15

CUSTOMER:

RICHIEDENTE:

- **Dept. / Firm :** **GIESECKE & DEVRIENT GMBH**
Ente / Società:
- **Mr.:** **Walter Hinz**
Sig.:
- **Address:** **PRINZREGENTENSTRASSE 159 – 81677 MUNCHEN – GERMANY**
Indirizzo:
- **Tel. :** **++49 89 4119-1906** • **Telefax** **++49 89 4119-1905** • **E-mail:** **walter.hinz@gi-de.com**
Telefono : *Fax :* *e-mail*

Site of test execution: **Via Campagna, 92 - 22020 Gaggino Faloppio (CO)**
Località esecuzione prove:

Date of test samples receipt: **14/05/2007**
Data ricevimento campioni:

Date of start test: **14/05/2007**
Data inizio prove:



Date of end test: **14/05/2007**
Data fine prove:

Witness to the test:
Presenti alle prove:

Signature of the engineers:
Firma esecutore prove:

Approved by:
Approvato da:

Sig. Gianluca Maffioli
Sig. Nicola Albergati



.....
Massimo Maltempi

.....
G. Molteni

The test results recorded in this Test Report are exclusively referred to the tested samples.

I risultati del presente rapporto di prova si riferiscono esclusivamente al campione sottoposto a prova.

Reproduction of this EMC-Test Report in whole or in part is prohibited without the written authorization of the Laboratory Director

La riproduzione di questo Rapporto in modo parziale o totale è PROIBITO senza l'autorizzazione scritta della Direzione del Laboratorio

0. CONTENTS

	Page	Rev	Date
0. CONTENTS	2	0	14/05/07
1. TECHNICAL INFORMATION OF EQUIPMENT UNDER TEST (EUT)	3	0	14/05/07
1.1 Identification	3	0	14/05/07
1.2 Technical data	3	0	14/05/07
1.3 Modifications incorporated in E.U.T.	3	0	14/05/07
1.4 Derived models	4	0	14/05/07
1.5 Auxiliary equipment	5	0	14/05/07
2. TEST CONDITIONS	6	0	14/05/07
2.1 Operating test modes and test conditions	6	0	14/05/07
2.2 Test overview	6	0	14/05/07
3. REFERENCE STANDARD FOR PERFORMED TESTS	7	0	14/05/07
4. Summary of test results	8	0	14/05/07
4.1 Emission tests	8	0	14/05/07
5. TEST RESULTS	9	0	14/05/07
6. EUT TECHNICAL DOCUMENTATION	17	0	14/05/07
6.1 Wiring diagrams	17	0	14/05/07
6.2 Technical manual	Errore. Il segnalibro non è definito.	0	14/05/07
6.3 Photographic documentation	18	0	14/05/07

1. TECHNICAL INFORMATION OF EQUIPMENT UNDER TEST (EUT)

1.1 Identification

Brand name: GIESECKE & DEVRIENT GmbH
Manufacturer: EUTRONSEC S.P.A.
Equipment : USB KEY
Model name or No. : STARSIGN BIO TOKEN 3.1 M
Serial number : Not present
FCC ID : TIJ-BTM31
Country of manufacturer: ITALY

1.2 Technical data

FCC class: Unintentional radiators, Class B
Supply voltage: +5 V dc supplied by USB PC connector
Input Power / Current : 250 mA max.
Maximum internal frequency generated by EUT Oscillator: 24 MHz; Data Exchange Rate:480Mbit/s
Typical usage : Document encrypting and storing
EUT single or system: Single
EUT dimensions : 8,4 x 4,0 x 1,7 cm

1.3 Modifications incorporated in E.U.T.

The following items are the modifications introduced in the equipment under test :

- None

1.4 Derived models

On each product it is also possible to mount one memory chip having different size: minimum 128MB, maximum 2GB.

Considerations:

- the worst-case model was determined as follow:

Every key differs in quantity of memory and the FCC said that the devices has to be "electrically identical" as required by Rule Part 2.924.

The different NAND Flash Memories It is possible to note that there is NOT a worst case, because:

- 1) the packages are the same
- 2) the transfer protocol are the same even if there is different memory sizes. It always transfers "eight byte" each time in "four cycle" transfer protocol (see memory specifications in TCF).
- 3) So, even if they have different memory sizes, the clock is the same, the data communication (between micro and memory) is always the same. This implies that disturbances are the same.

- the test data was taken on the model with 2 GB memory chip;

- the reported test data is representative of all models of the device.

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

1.5 Ports identification

This section contains descriptions of all signal ports and AC/DC power input/output ports, the length and the type of the cable provided by manufacturer needed for the tests.

Moreover it is specified if the ports are ever or optionally connected.

Port		Description	Connection
1	Enclosure	Plastic case	*****
2	AC power input/output ports	Line not present	*****
3	DC power input/output ports	+5 V dc supplied by USB PC connector	USB PC connector (Pin 1,4)
4	Signals ports	USB Communication	USB PC connector (Pin 2,3)
<i>Note: During the tests all cables must be what provided the manufacturer or the same that used in the real employment of the EUT.</i>			

1.6 Auxiliary equipment

- Personal Computer Compaq EV0 N1020V

2. TEST CONDITIONS

2.1 Operating test modes and test conditions

The equipment has been tested according to the operative conditions described in the user/installation manual provided by the manufacturer and by following reference standards :

Reference Standard:

- FCC Part 15, Subpart B

In the following table there are the operating conditions adopted during tests identified by an indicator (#.) at which has been referred the item “Operating condition of the equipment under test” of all technical sheets of the tests (see Section 4)

Operating condition	Description
#1	<i>Electronic key is connected directly by USB port to PC. One test program is available, as stimulus, to verify the encrypting and data storing properties.</i>

2.2 Test overview

The appliance is classified as “*unintentional radiator*” in conformity to FCC Part 15 Sub. B §15.109, §15.107 , and it is subject to “*Certification*” procedure.

The application is mainly used as document encrypting and data storing.

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

3. REFERENCE STANDARD FOR PERFORMED TESTS

<i>Reference standard :</i>	<i>Title :</i>
FCC Part 15 part A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)
FCC Part 15 part B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)
ANSI C63.4	American National Standard for Methods of Measuring of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz – 40 GHz

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

4. SUMMARY OF TEST RESULTS

4.1 Emission tests

Port		Phenomena	Basic standard	Operating condition ¹	Result
1	Enclosure	Radiated emission	FCC Part 15 § 15 109	#1	Within the limit
2	AC mains Input ports	RF Disturbance voltage: • continuous	FCC Part 15 § 15 107	#1	Within the limit
3	Antenna terminals	Antenna power conduction limits for receivers	FCC Part 15 §15 111	Not applicable ²	

¹ Ref. Tab. of Section 2

² Applicable only to equipments which have an external antenna connector

5. TEST RESULTS

RADIATED EMISSION 30 - 4000 MHZ	10
EMISSION OF MAINS TERMINAL DISTURBANCE VOLTAGE	14

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

**TEST
1.****RADIATED EMISSION 30 - 4000 MHZ****REFERENCE
DOCUMENT**

FCC PART 15 subpart B

- **TEST LOCATION:** Semi-anechoic chamber
- **TEST EQUIPMENT USED FOR TEST:** EMI receiver Rohde & Schwarz Mod. ESMI
Chase Antenna Mod. CBL 6111 A
Log-periodica Broadband Antenna mod. HL025
- **TESTED PORT:** Enclosure
- **EMISSION LIMITS:** Acc. to Section 15.109 of reference document
- **UNCERTAINTY OF MEASURE:** Combined uncertainty = ± 1.75 dB
Total uncertainty = $(k=2) \pm 3.5$ dB

TEST CONDITIONS:		MEASURED
Ambient temperature :	15 - 35 °C	23,5 $\pm$ 3 °C
Ambient humidity :	25 - 75 %rH	39 $\pm$ 5 %rH
Pressure :	85 - 106 kPa (860 mbar - 1060 mbar)	950 $\pm$ 50 mbar
Voltage :		+5 V dc USB

OPERATING CONDITION (Rif. Section. 2) : #1**RESULT: WITHIN THE LIMIT**

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

SCAN TABLE : “Radiated Emission”

Unit: dB μ V/m

Detector : Mode:

Curve1: MaxPeak ClearWrite

Curve2: -- ClearWrite

Subrange1:

Start Frequency: 30.0 MHz

Step Size: 80 kHz

Stop Frequency: 4000.0 MHz

IF Bandwidth: 120 kHz

Measure Time: 0.01 sec.

Receiver: ESXI

Probe Transducer: CHASE_6111_PRC

Signal Path: Path 4

System Transducer: RFin2-CP1/X11

Scan Mode: Lin

Add. Transducer: W71.01

Tracking Gen.: Off

Input: 2 DC

Preamplifier: 10 dB

Demodulation: FM Broad

RF att.: Coupled

Volume: 0.0%

Ref. Level: -50 dBm

Squelch: --

Min. RF att.: 0 dBm

Option: None

Autorange: On

Curve 1: On

Repetition: Single


Curve 2: Off

Stop Mark: On

Stop Message: On

Text: Connect antenna

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

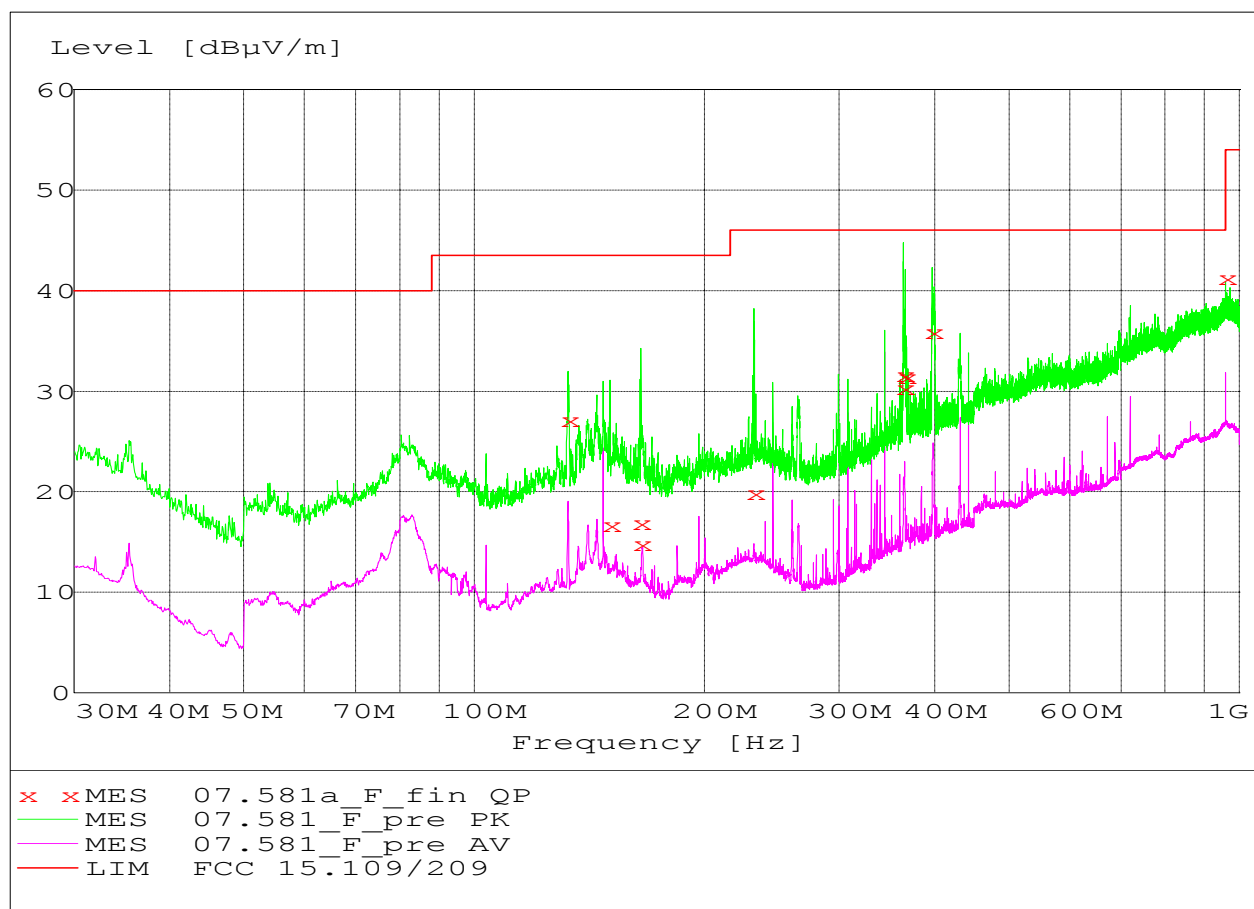

Final measurement in QP detector

Frequency MHz	Level dBμV/m	Transd dB	Limit dBμV/m	Margin dB	Height cm	Azimuth deg	Polarisation
132.60000 0	27.10	14.30	40.00	12.90	112.0	61.00	VERTICAL
150.52000 0	16.70	13.60	40.00	23.30	130.0	28.00	VERTICAL
164.76000 0	16.90	12.50	40.00	23.10	156.0	17.00	VERTICAL
165.16000 0	14.80	12.50	40.00	25.20	163.0	80.00	VERTICAL
231.88000 0	19.90	13.80	47.00	27.10	101.0	0.00	VERTICAL
363.84000 0	31.60	18.60	47.00	15.40	227.0	82.00	HORIZONTAL
364.24000 0	30.30	18.60	47.00	16.70	260.0	0.00	HORIZONTAL
365.92000 0	31.40	18.60	47.00	15.60	122.0	35.00	VERTICAL

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

396.96000 0	35.90	19.70	47.00	11.10	314.0	86.00	HORIZONTAL
960.08000 0	41.30	30.20	47.00	5.70	175.0	90.00	VERTICAL

No significant disturbance in the range 1-4 GHz

**TEST
2.****EMISSION OF MAINS TERMINAL DISTURBANCE VOLTAGE****REFERENCE
DOCUMENT**

FCC PART 15 subpart B

- **TEST LOCATION:** Semianechoic chamber
- **TEST EQUIPMENT USED FOR TEST:** EMI receiver Rohde & Schwarz Mod. ESMI
Artificial Network Rohde & Schwarz Mod. ESH3-Z5

- **TESTED PORT:** AC mains
- **FREQUENCY RANGE:** 0.15 - 30 MHz
- **EMISSION LIMITS:** Acc. to reference document 15.107
- **MEASUREMENT UNCERTAINTY:** Total uncertainty (k=2) ± 2.5 dB

TEST CONDITIONS:		MEASURED
Ambient temperature :	15 - 35 °C	24 $\pm$ 3 °C
Ambient humidity :	25 - 75 %rH	40 $\pm$ 5 %rH
Pressure :	85 - 106 kPa (860 mbar - 1060 mbar)	950 $\pm$ 50 mbar
Voltage :		98 Vac $\pm$ 3%

OPERATING CONDITION (Rif. Section. 2) : #1**RESULT: Within the limits**

SCAN TABLE : Voltage Mains

Unit : dB μ V

	<u>Detector :</u>	<u>Mode :</u>
Curve 1:	MaxPeak	ClearWrite
Curve 2:	Average	ClearWrite

Start Frequency :	150.0 kHz		
Stop Frequency :	30.0 MHz	IF Bandwidth :	9 kHz
Measure Time :	10.0 ms	Step size :	6 kHz


Receiver :	ESMI	Transducer :	ESH3-Z5_PRC
Signal Path :	Path 3	System Transducer :	Rfin1-CP2/X11
Meas. Mode :	Lin	Add. Transd. 1 :	W71.03
Tracking Generator :	Off	Add. Transd. 2 :	None
Input :	1AC	Add. Transd. 3 :	None

Preamplifier :	10 dB	Demodulation :	FM Broad
RF Att. :	Coupled	Volume :	0 %
Ref. Level :	-10 dBm	Squelch :	--
Min. RF Att. :	0 dB	Option :	None
IF Att. :	0 dB		
Autorange :	On		

Curve 1 :	On	Repetition :	Single
Curve 2 :	On	Stop Mark :	On
		Stop Message :	On
		Stop Message :	Connect EUT

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

- With EUT powered by a Personal Computer Compaq EV0 N1020V

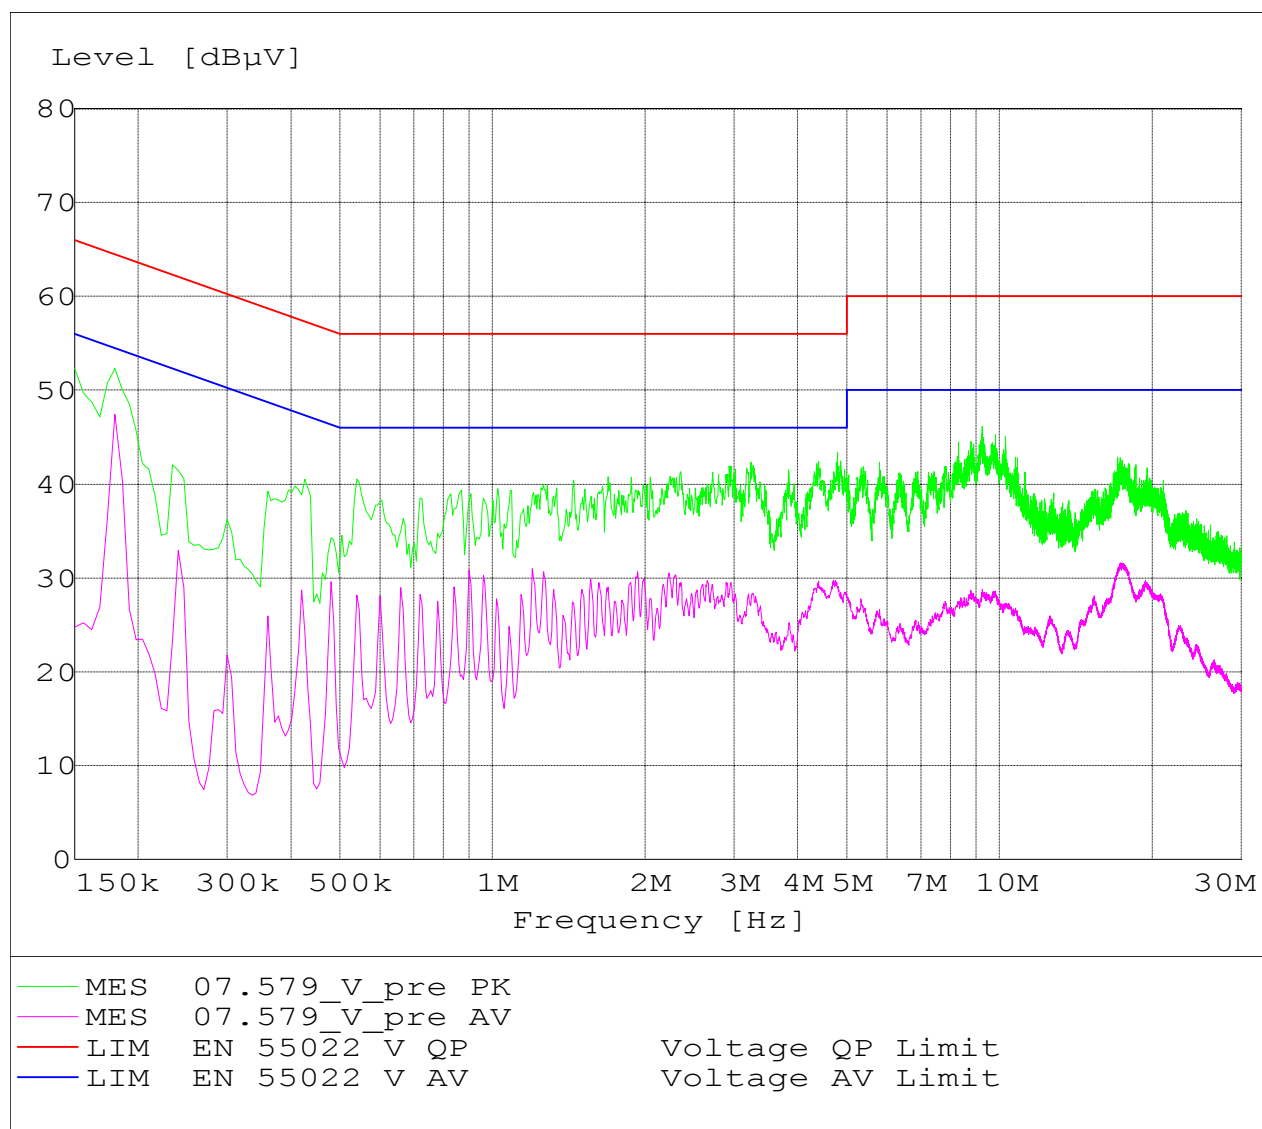

6. EUT TECHNICAL DOCUMENTATION

6.1 Wiring diagrams

	<i>Document reference (n., edition, date, ...)</i>
WIRING DIAGRAM	Not applicable
Schematics	BioToken-Sch-01-v2.2-Schema elettrico
PCB	BioToken-Pcb-01-topografico pcb rel. e
BOM	<i>BioToken-BOM-01-V1.0</i>




6.2 Technical manual

	<i>Document reference (n., edition, date, ...)</i>
USER MANUAL	StarSign Bio Token 3.1 M - Ed.7-2007 Reference Manual
TEST PLAN	1467-00-SDT-10R1.0

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

6.3 Photographic documentation

PHOTO No. 1 – EQUIPMENT UNDER TEST

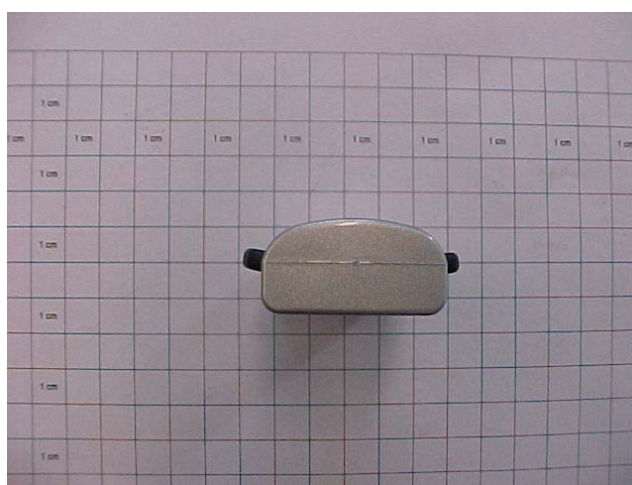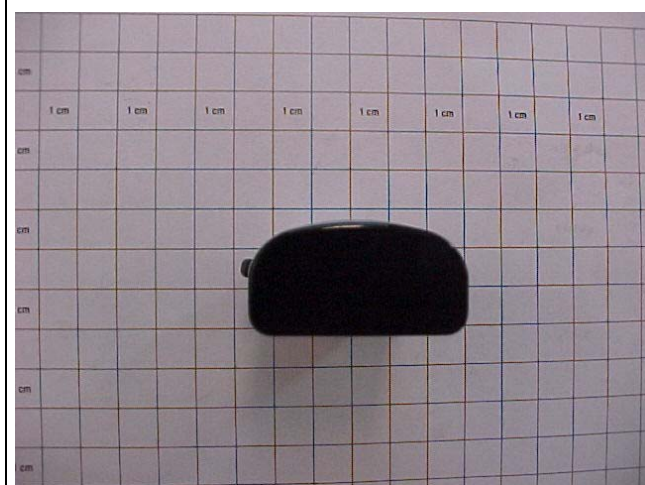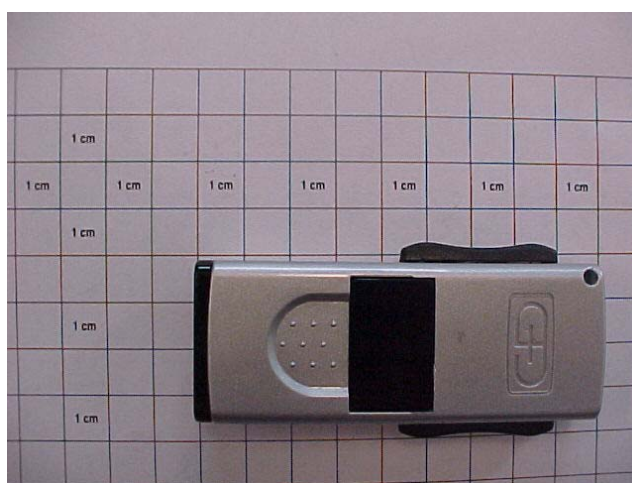

Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

PHOTO No. 2 – EQUIPMENT UNDER TEST



Prima Ricerca & SviluppoSrl soggetta a direzione e coordinamento da parte della Giovanni Maspero & C. S.p.A. – C.I. 02634780130
Sede legale : 22100 Tavernola (CO) Via Conciliazione, 1 Cod. FISC. e N. R.I. CO 02635860139
Sede operativa : Laboratori Via Campagna, 92 22020 Faloppio fraz. Gaggino (CO) Tel. +39 03135000.11 Fax +39 031991309

PHOTO No. 3 – SET-UP FOR EMISSION RADIATED TEST

