


### 7.10.4. Test Result

Site: SR2	Time: 2015/05/14 - 15:52
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode1	

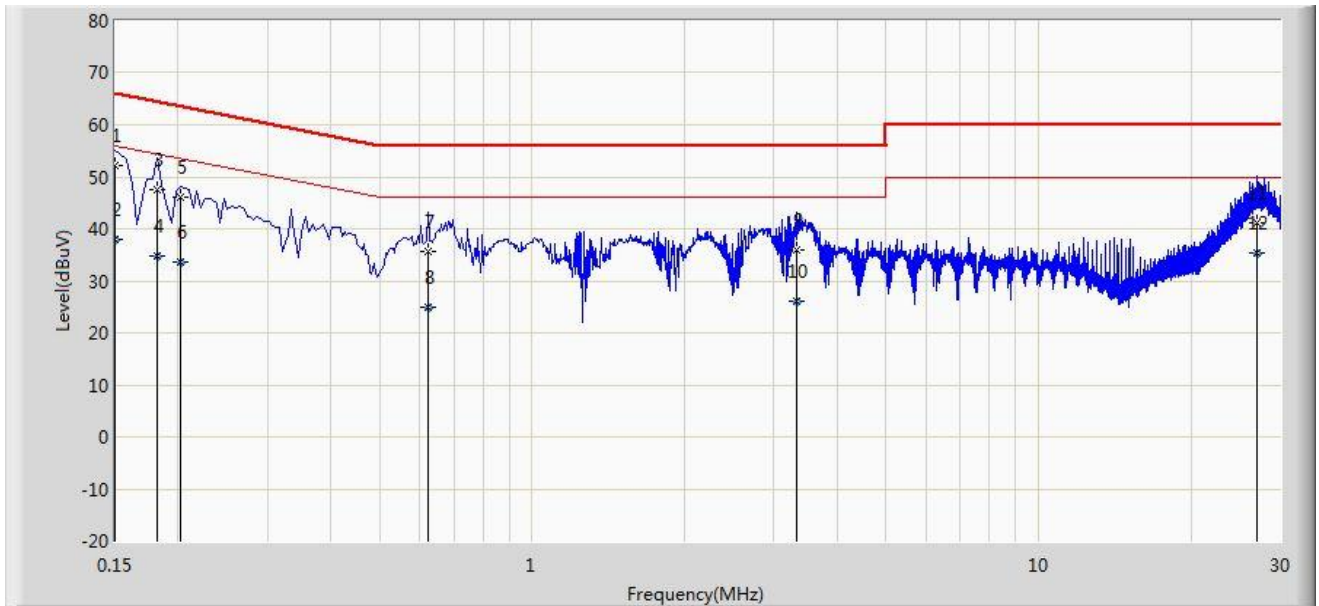


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.150	52.218	41.049	-13.782	66.000	11.168	QP
2			0.150	37.894	26.726	-18.106	56.000	11.168	AV
3			0.182	47.678	37.629	-16.716	64.394	10.048	QP
4			0.182	34.903	24.855	-19.491	54.394	10.048	AV
5			0.202	46.231	36.238	-17.297	63.528	9.993	QP
6			0.202	33.630	23.637	-19.898	53.528	9.993	AV
7			0.622	35.724	25.620	-20.276	56.000	10.103	QP
8			0.622	24.968	14.865	-21.032	46.000	10.103	AV
9			3.322	36.042	26.148	-19.958	56.000	9.895	QP
10			3.322	25.997	16.102	-20.003	46.000	9.895	AV
11			26.926	41.209	30.970	-18.791	60.000	10.239	QP
12			26.926	35.343	25.104	-14.657	50.000	10.239	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2015/05/14 - 16:02
Limit: FCC_Part15.207_CE_AC Power	Engineer: Roy Cheng
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: 802.11ac Dual Band Module	Power: AC 120V/60Hz
Note: Mode1	

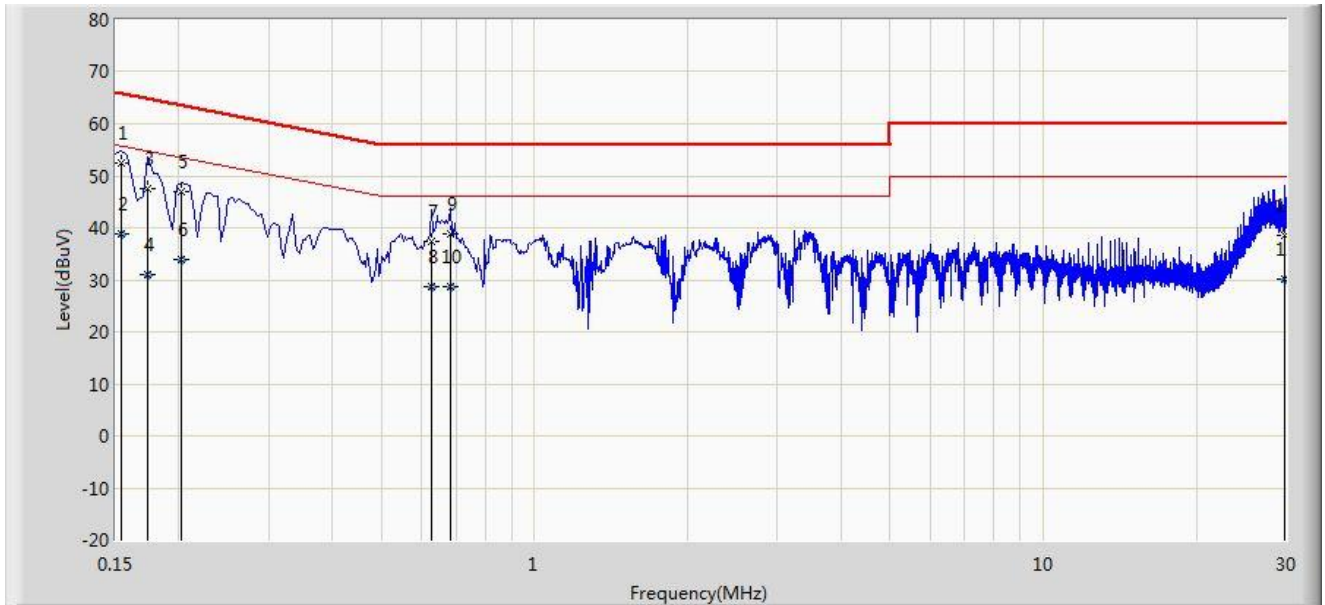

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		*	0.154	52.533	41.817	-13.248	65.781	10.716	QP
2			0.154	38.749	28.033	-17.033	55.781	10.716	AV
3			0.174	47.468	37.411	-17.300	64.767	10.057	QP
4			0.174	31.158	21.101	-23.610	54.767	10.057	AV
5			0.202	46.861	36.853	-16.667	63.528	10.008	QP
6			0.202	33.977	23.969	-19.551	53.528	10.008	AV
7			0.626	37.433	27.316	-18.567	56.000	10.117	QP
8			0.626	28.768	18.651	-17.232	46.000	10.117	AV
9			0.682	38.720	28.635	-17.280	56.000	10.085	QP
10			0.682	28.777	18.692	-17.223	46.000	10.085	AV
11			29.706	38.570	28.134	-21.430	60.000	10.436	QP
12			29.706	30.198	19.762	-19.802	50.000	10.436	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

## 8. CONCLUSION

The data collected relate only the item(s) tested and show that the **802.11ac Dual Band Module**  
**FCC ID: TK4WLE900VX** is in compliance with Part 15E of the FCC Rules.

\_\_\_\_\_ The End \_\_\_\_\_