

FCC 47 CFR PART 15 SUBPART C**TEST REPORT****for****Wireless Kitchen Thermometer****Model: ET-733, ET-734BGE****Brand: N/A****Test Report Number:****C180918Z01-RP1**

Issued for

Maverick Industries, Inc.**94 Mayfield Avenue Edison, New Jersey 08837, U.S.A**

Issued By

GRG Metrology & Test (Shenzhen) Co., Ltd.Building 10-1, Mingkeda Logistics Park, No.18, Huanguan South
Road, Guanlan, Bao'an District, Shenzhen, Guangdong, China

TEL: 86-755-28055000

FAX: 86-755-28055221

E-Mail: service@ccssz.com

Issued Date: September 27, 2018



Certificate Number: 2861.01

Note: This report shall not be reproduced except in full, without the written approval of GRG Metrology & Test (Shenzhen) Co., Ltd. This document may be altered or revised by GRG Metrology & Test (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test result of this report relate only to the tested sample identified in this report.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	September 27, 2018	Initial Issue	ALL	Sabrina Wang

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION	5
3. TEST METHODOLOGY	6
3.1 DESCRIPTION OF TEST MODES	6
4. FACILITIES AND ACCREDITATIONS	10
4.1 FACILITIES	10
4.2 ACCREDITATIONS	10
4.3 MEASUREMENT UNCERTAINTY	10
5. SETUP OF EQUIPMENT UNDER TEST	7
5.1 SETUP CONFIGURATION OF EUT	7
5.2 SUPPORT EQUIPMENT	7
6. FCC PART 15.231 REQUIREMENTS.....	11
6.1 20 DB BANDWIDTH	11
6.2 LIMIT OF TRANSMISSION TIME	13
6.3 DUTY CYCLE	15
6.4 RADIATED EMISSIONS.....	18
6.5 POWERLINE CONDUCTED EMISSIONS.....	26

1 TEST RESULT CERTIFICATION

Product	Wireless Kitchen Thermometer
Model	ET-733, ET-734BGE
Brand	N/A
Tested	September 18~27, 2018
Applicant	Maverick Industries, Inc. 94 Mayfield Avenue Edison, New Jersey 08837, U.S.A
Manufacturer	Maverick Industries, Inc. 94 Mayfield Avenue Edison, New Jersey 08837, U.S.A

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted
DEVIATION FROM APPLICABLE STANDARD	
None	

We hereby certify that:

The above equipment was tested by GRG Metrology & Test (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.209 and Part 15.231.

The test results of this report relate only to the tested sample identified in this report.

Approved by:

Eve Wang
Supervisor of EMC Dept.
GRG Metrology & Test (Shenzhen) Co., Ltd.

Reviewed by:

Nancy Fu
Supervisor of Report Dept.
GRG Metrology & Test (Shenzhen) Co., Ltd.

2 EUT DESCRIPTION

Product	Wireless Kitchen Thermometer
Model	ET-733, ET-734BGE
Brand	N/A
Model Difference	The two models have same TX/RX circuit design on PCBA but have different housing on receiver only.
Power Supply	DC 1.5V*2(supplied by dry cell)
Frequency Range	433.92 MHz
Transmit Power	Peak: 75.64dBuV/m (Max.) Average: 65.21dBuV/m (Max.)
Modulation Technique	ASK
Number of Channels	1 Channel
Antenna Designation	spring antenna with -1.5dBi gain (Max)
Temperature Range	0°C + 50°C
Hardware Version	V0
Software Version	V1.02

Remark: This submittal(s) (test report) is intended for FCC ID: TKCET-733 filing to comply with Section 15.209 and 15.231 of the FCC Part 15, Subpart C Rules.

3 TEST METHODOLOGY

3.1. DESCRIPTION OF TEST MODES

The EUT has been tested under engineering test mode condition and the EUT staying in continuous transmitting mode.

The following test mode(s) were scanned during the preliminary test below 1G:

Conducted emissions	
Test Mode	Description
1	N/A
Not applicable, since the EUT powered by the DC power source.	

Radiated Emission	
Test Mode	Description
1	Continuously Transmitting
The worst test results were recorded in the report.	

Above 1G, TX mode with the highest data rate (worst case) are chosen for full testing.

4 SETUP OF EQUIPMENT UNDER TEST

4.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

4.2. SUPPORT EQUIPMENT

No	Equipment	Model	Serial No.	FCC ID	Brand	Data Cable	Power Cord
1.	Battery*2	R6PUN	N/A	N/A	Panasonic	N/A	N/A
2	Wireless Kitchen Thermometer	MAV227	N/A	N/A	N/A	N/A	N/A

Remark:

Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.3. TEST INSTRUMENTS

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
LISN(EUT)	ROHDE&SCHWARZ	ENV216	101543-WX	01/27/2018	01/26/2019
LISN	EMCO	3825/2	8901-1459	01/27/2018	01/26/2019
Temp. / Humidity Meter	VICTOR	HTC-1	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	EZ-EMC/ CCS-3A1-CE			

Radiated Emission Test Site 966 (2)					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019
EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100783	01/27/2018	01/26/2019
Amplifier	EMEC	EM330	060661	01/27/2018	01/26/2019
High Noise Amplifier	Agilent	8449B	3008A01838	01/27/2018	01/26/2019
Loop Antenna	COM-POWER	AL-130	121044	01/30/2018	01/29/2019
Bilog Antenna	SCHAFFNER	CBL6143	5082	02/21/2018	02/20/2019
Horn Antenna	SCHWARZBECK	BBHA9120	D286	01/27/2018	01/26/2019
Board-Band Horn Antenna	Schwarzbeck	BBHA 9170	9170-497	01/24/2018	01/23/2019
Turn Table	N/A	N/A	N/A	N.C.R	N.C.R
Antenna Tower	SUNOL	TLT2	N/A	N.C.R	N.C.R
Controller	Sunol Sciences	SC104V	022310-1	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
Temp. / Humidity Meter	Anymetre	JR913	N/A	01/29/2018	01/28/2019
Test S/W	FARAD	LZ-RF / CCS-SZ-3A2			

20dB Bandwidth					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Limit of Transmission Time					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Duty Cycle					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
Spectrum Analyzer	Agilent	N9010A	MY52221469	01/27/2018	01/26/2019

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R = No Calibration Request.

5 FACILITIES AND ACCREDITATIONS

5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at **Building 10-1, Mingkeda Logistics Park, No.18, Huanguan South Road, Guanlan, Bao'an District, Shenzhen, Guangdong, China**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
China	CNAS

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI(C-4815,R-4320,T-2317, G-10624)
Canada	INDUSTRY CANADA

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccssz.com>

5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Uncertainty
Radiated Emission, 30 to 200 MHz Test Site : 966(2)	+/-3.6880dB
Radiated Emission, 200 to 1000 MHz Test Site : 966(2)	+/-3.6695dB
Radiated Emission, 1 to 8 GHz	+/-5.1782dB
Radiated Emission, 8 to 18 GHz	+/-5.2173dB
Conducted Emissions	+/-3.6836dB
Band Width	178kHz
Peak Output Power MU	+/-1.906dB
Band Edge MU	+/-0.182dB
Channel Separation MU	416.178Hz
Duty Cycle MU	0.054ms
Frequency Stability MU	226Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.


6 FCC PART 15.231 REQUIREMENTS

6.1. 20 DB BANDWIDTH

6.1.1. LIMIT

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.

6.1.2. TEST CONFIGURATION

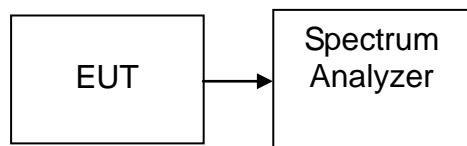


6.1.3. TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW is set to 10 kHz and VBW is set 30kHz.

6.1.4. TEST RESULTS

No non-compliance noted.

Frequency (MHz)	20 dB Bandwidth (MHz)	Limit (MHz)	Result
433.92	0.054	1.0848	PASS

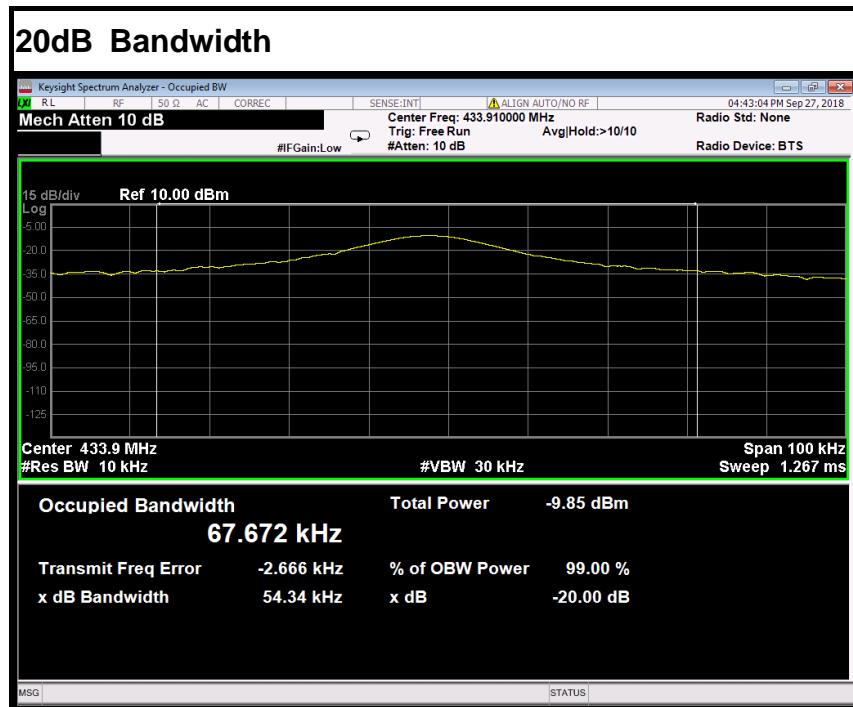


6.2. LIMIT OF TRANSMISSION TIME

6.2.1. LIMIT

According to 15.231 (e) Devices operated under the provisions of this paragraph shall be provided with a means for automatically limiting operation so that the duration of each transmission shall not be greater than one second and the silent period between transmissions shall be at least 30 times the duration of the transmission but in no case less than 10 seconds.

6.2.2. TEST CONFIGURATION

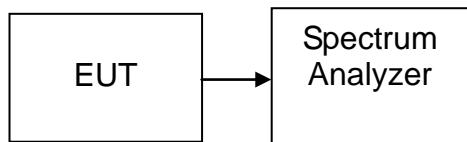

6.2.3. TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The spectrum analyzer center frequency is set to the transmitter frequency. The RBW and VBW are set to 1MHz.

6.2.4. TEST RESULTS

No non-compliance noted


Frequency (MHz)	Transmission Time (s)	Limit (s)	Result
433.92	0.385	1	Pass

Frequency (MHz)	Silent Period (s)	Limit (s)	Result
433.92	12	10	Pass

Limit: 1. >30 times of the transmission = $30*0.385 =11.55$ s

(only relevant if greater than 10s)

2. >10 s

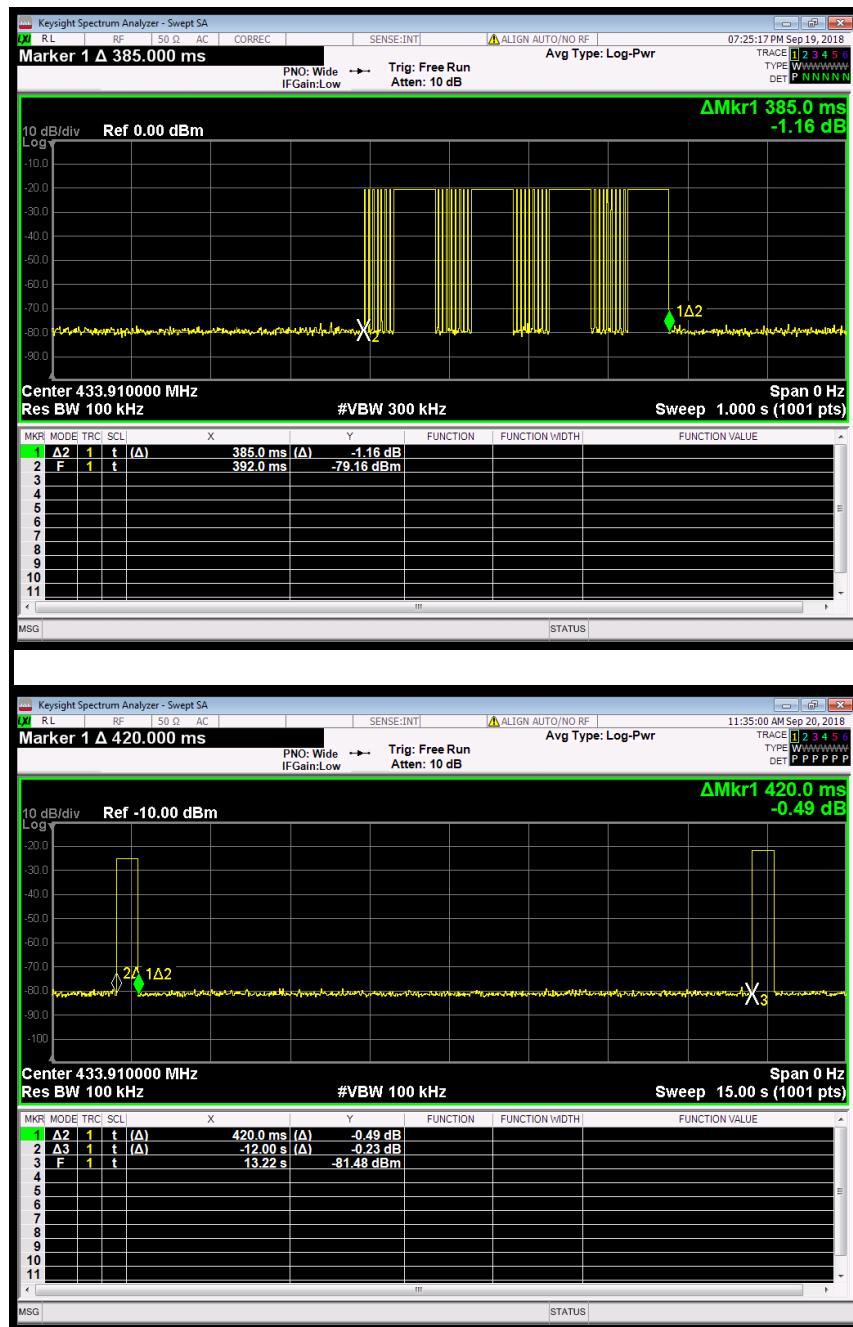
Test Plot

6.3. DUTY CYCLE

6.3.1. LIMIT

Nil (No dedicated limit specified in the Rules)

6.3.2. TEST CONFIGURATION

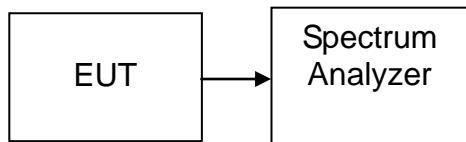

6.3.3. TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Adjust Sweep = 20ms
5. Repeat above procedures until all frequency measured were complete.


6.3.4. TEST RESULTS


No non-compliance noted

Test Data

*Duty Cycle Correction Factor = $20 \cdot \log(1/x) = 20 \cdot \log(1/0.301) = 10.43$
[$X = (7 \cdot 0.312\text{ms} + 40 \cdot 0.532\text{ms} + 24 \cdot 0.276\text{ms}) / 100\text{ms} = 0.301\text{s}]$*

Test Plot

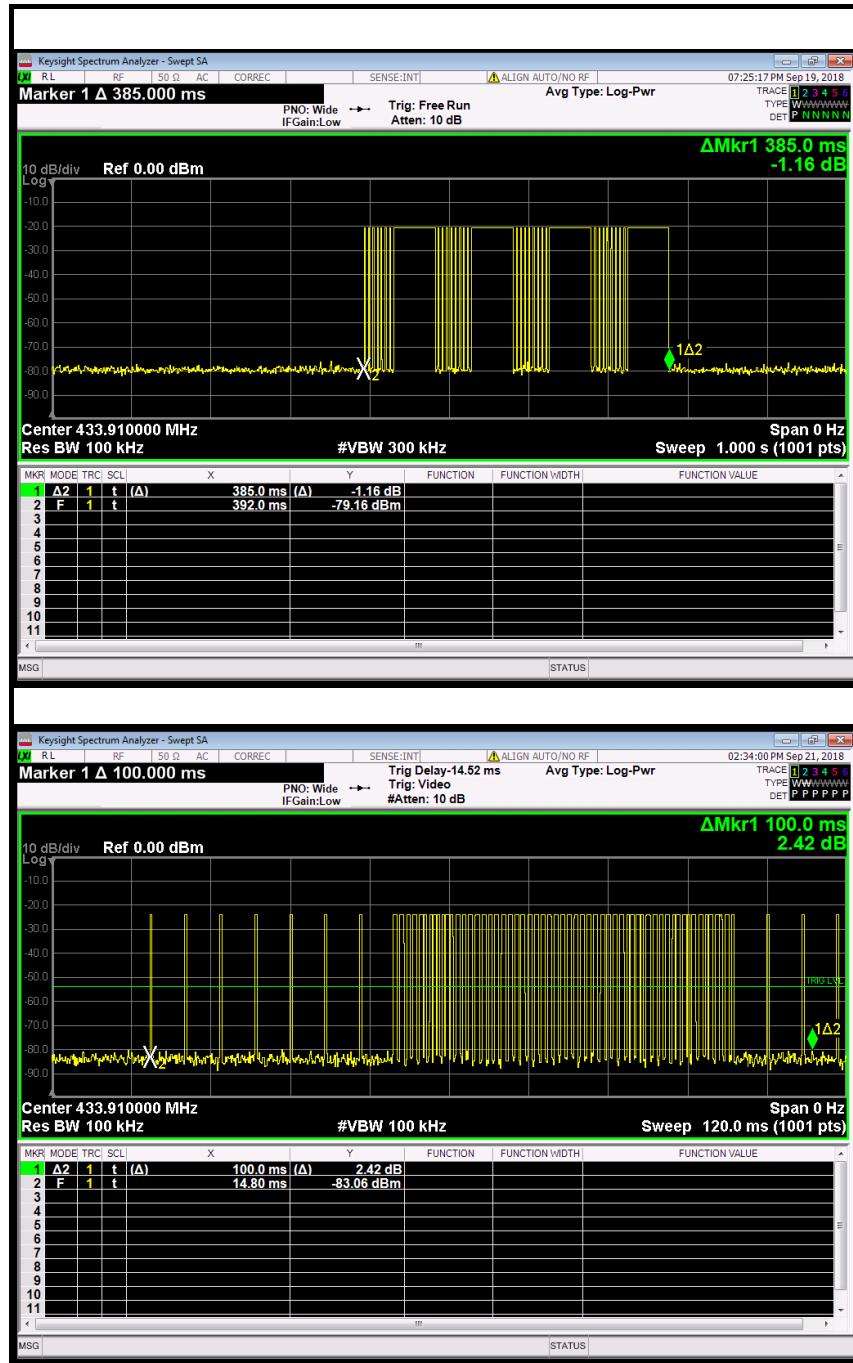

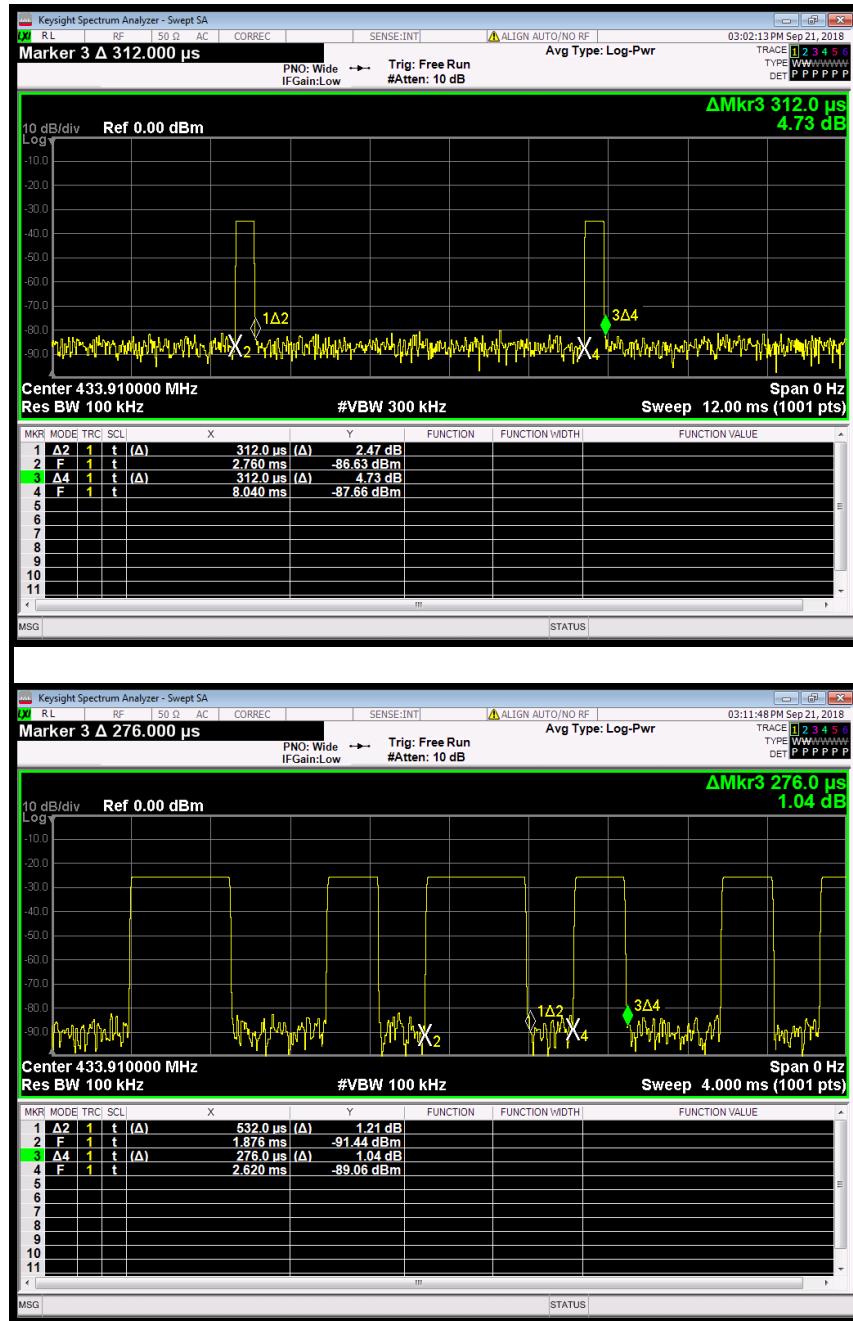

6.4. RADIATED EMISSIONS

6.4.1. LIMIT

According to §15.231 (e) Intentional radiators may operate at a periodic rate exceeding that specified in paragraph (a) of this section and may be employed for any type of operation, including operation prohibited in paragraph (a) of this section, provided the intentional radiator complies with the provisions of paragraphs (b) through (d) of this section, except the field strength table in paragraph (b) of this section is replaced by the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emission (microvolts/meter)
40.66-40.70	1,000	100
70-130	500	50
130-174	500 to 1,500 ¹	50 to 150 ¹
174-260	1,500	150
260-470	1,500 to 5,000 ¹	150 to 500 ¹
Above 470	5,000	500

1. ** linear interpolations

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174 MHz, $\mu\text{V/m}$ at 3 meters = $56.81818(F) - 6136.3636$; for the band 260-470 MHz, $\mu\text{V/m}$ at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

6.4.2. TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m or 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO


(b) AVERAGE: RBW=1MHz / VBW=1/T / Sweep=AUTO


7. Repeat above procedures until the measurements for all frequencies are complete.

6.4.3. TEST CONFIGURATION

Below 30MHz

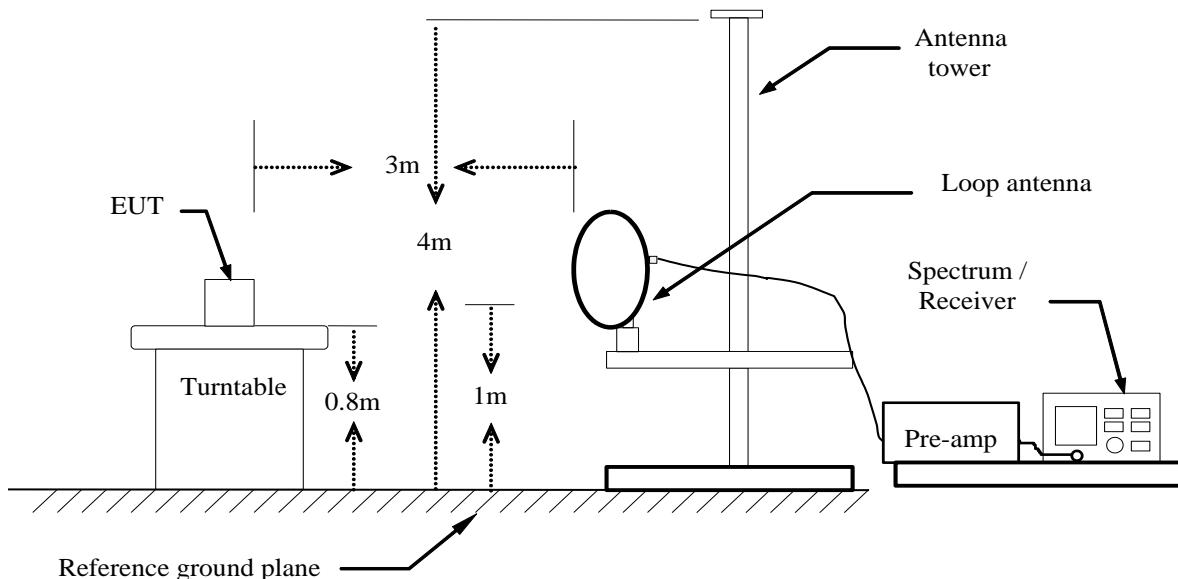

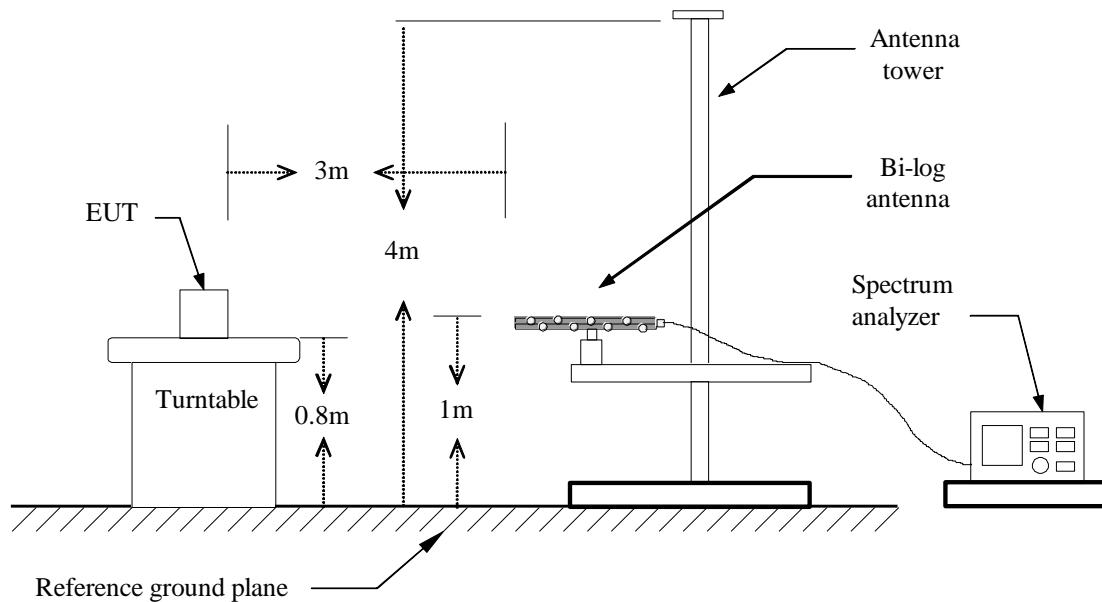Below 1 GHz

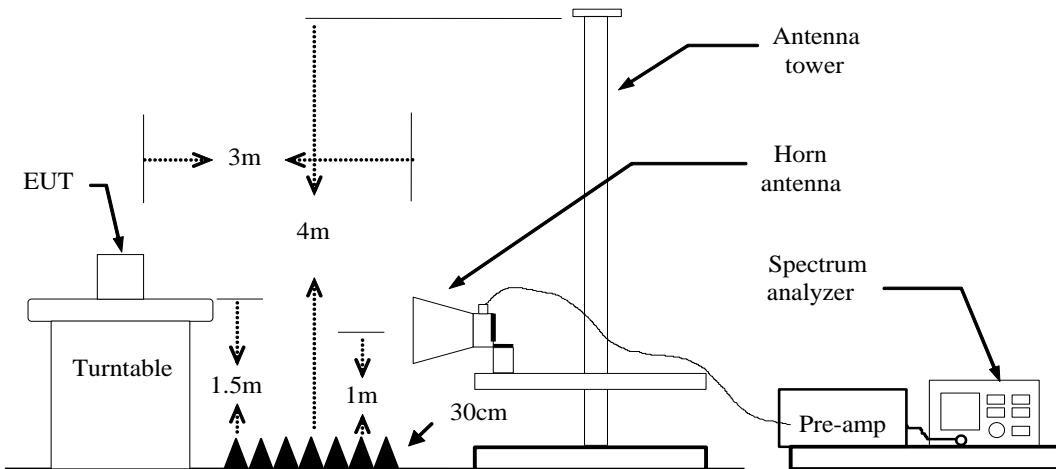Above 1 GHz

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

6.4.4. DATA SAMPLE**Below 1GHz**

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXX.XXXX	37.47	-16.41	21.06	40.00	-18.94	V	QP

Above 1GHz

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
XXXX.XXXX	55.54	4.56	60.10	74.00	-13.90	V	Peak
XXXX.XXXX	29.66	4.56	34.22	54.00	-19.78	V	AVG

Frequency (MHz)

= Emission frequency in MHz

Reading (dBuV)

= Uncorrected Analyzer / Receiver reading

Correction Factor (dB/m)

= Antenna factor + Cable loss – Amplifier gain

Result (dBuV/m)

= Reading (dBuV) + Corr. Factor (dB/m)

Limit (dBuV/m)

= Limit stated in standard

Margin (dB)

= Result (dBuV/m) – Limit (dBuV/m)

Q.P.

= Quasi-peak Reading

Peak

= Peak Reading

AVG

= Average Reading

6.4.5. TEST RESULTS


Temp. & Humidity	24°C, 52%	Test By	Darry Wu
Polarization	Vertical / Horizontal	Test Date	2018/09/21
Test Mode	TX		

Fundamental:

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
433.92	84.73	-9.19	75.54	92.87	-17.33	V	Peak
433.92	74.30	-9.19	65.11	92.87	-27.76	V	AVG
433.92	84.83	-9.19	75.64	92.87	-17.23	H	Peak
433.92	74.40	-9.19	65.21	92.87	-27.66	H	AVG


Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
868.0800	59.40	-2.49	56.91	72.87	-15.96	V	peak
868.0800	48.97	-2.49	46.48	72.87	-26.39	V	AVG
868.0800	54.05	-2.49	51.56	72.87	-21.31	H	peak
868.0800	43.62	-2.49	41.13	72.87	-31.74	H	AVG

Temp. & Humidity	24°C, 52%	Test By	Darry Wu
Polarization	Vertical	Test Date	2018/09/21
Test Mode	TX		

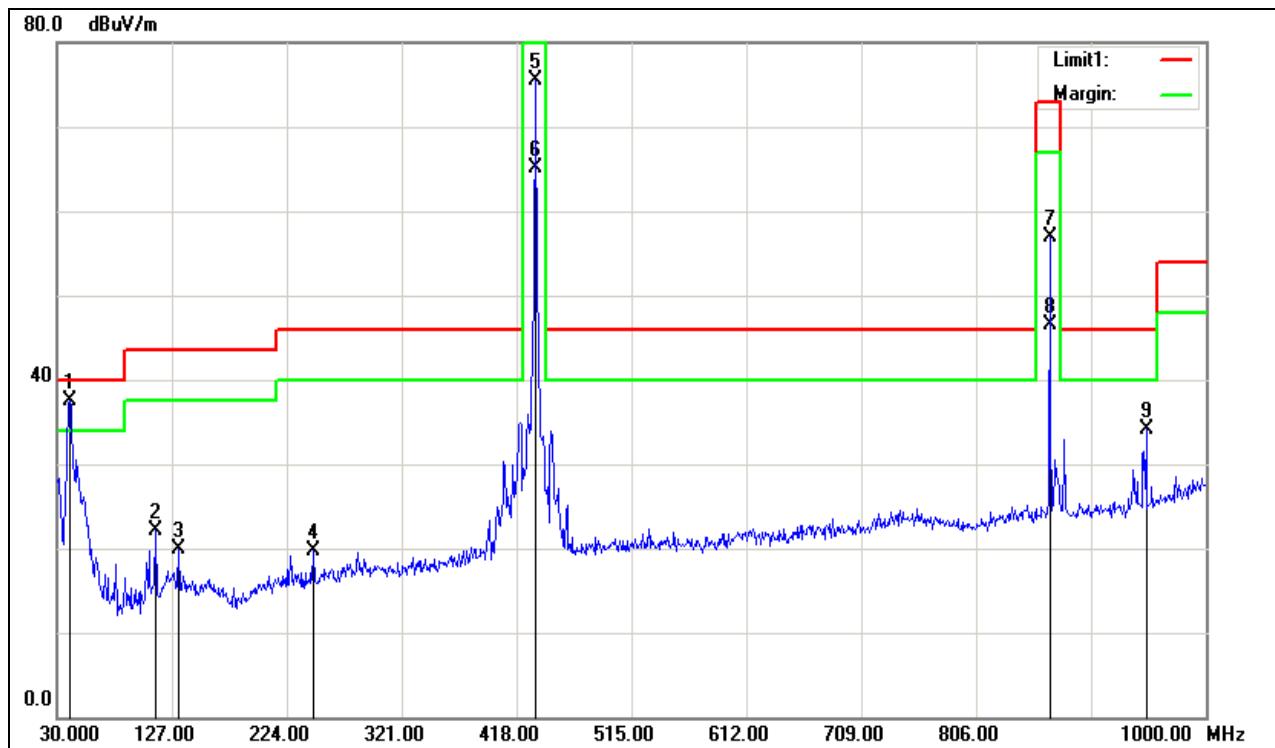

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
40.6700	48.91	-11.35	37.56	40.00	-2.44	
113.4200	35.51	-13.37	22.14	43.50	-21.36	QP
132.8200	32.24	-12.34	19.90	43.50	-23.60	QP
246.3100	30.51	-10.83	19.68	46.00	-26.32	QP
433.5200	84.73	-9.19	75.54	92.87	-17.33	Peak
433.5200	74.30	-9.19	65.11	92.87	-27.76	AVG
868.0800	59.40	-2.49	56.91	72.87	-15.96	Peak
868.0800	48.97	-2.49	46.48	72.87	-26.39	AVG
949.5600	35.32	-1.17	34.15	46.00	-11.85	QP

Temp. & Humidity	24°C, 52%	Test By	Darry Wu
Polarization	Horizontal	Test Date	2018/09/21
Test Mode	TX		

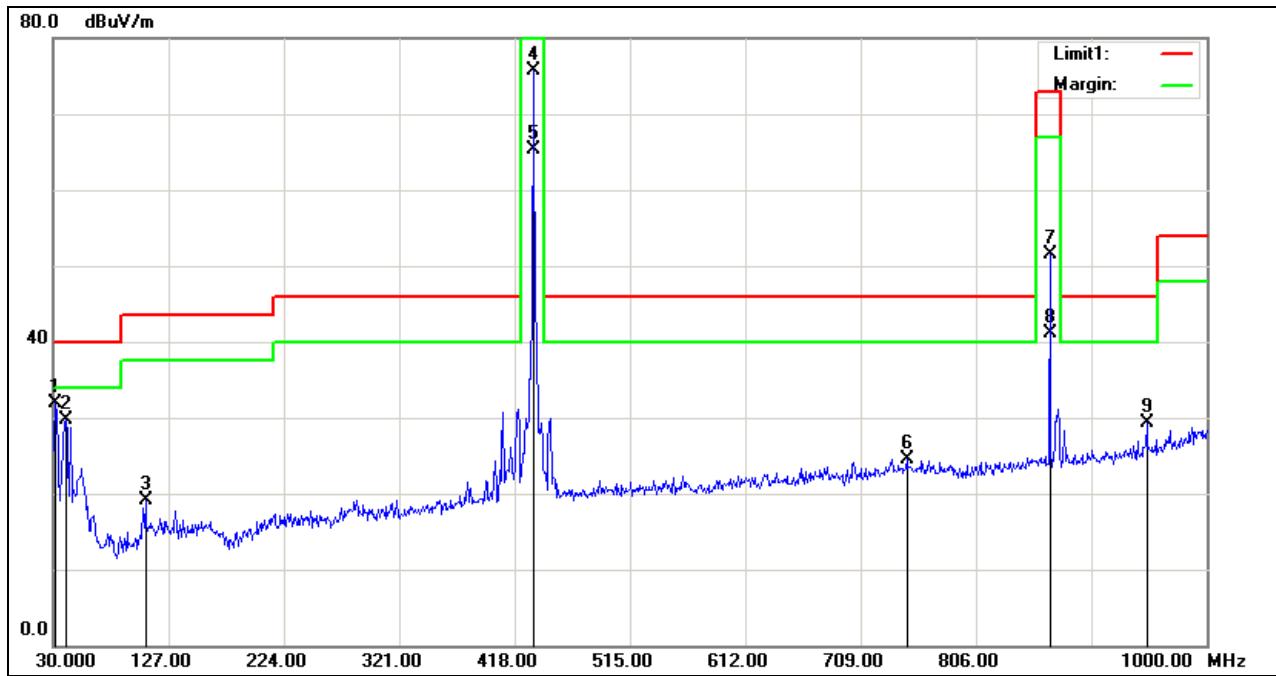

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
31.9400	43.38	-11.45	31.93	40.00	-8.07	QP
40.6700	41.03	-11.35	29.68	40.00	-10.32	QP
107.6000	32.80	-13.70	19.10	43.50	-24.40	QP
433.5200	84.83	-9.19	75.64	92.87	-17.23	Peak
433.5200	74.40	-9.19	65.21	92.87	-27.66	AVG
747.8000	28.12	-3.53	24.59	46.00	-21.41	QP
868.0800	54.05	-2.49	51.56	72.87	-21.31	Peak
868.0800	43.62	-2.49	41.13	72.87	-31.74	AVG
949.5600	30.56	-1.17	29.39	46.00	-16.61	QP

Remark: AVG = peak - duty factor

Notes:

1. Measuring frequencies from 9KHz to the 1000MHz.
2. Radiated emissions measured in frequency range from 9KHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.

Above 1 GHz

Temp. & Humidity	24°C, 52%	Test By	Darry Wu
Polarization	Vertical / Horizontal	Test Date	2018/09/21
Test Mode	TX		

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Pole (V/H)	Remark
1484.000	46.39	-6.91	39.48	74.00	-34.52	V	peak
2520.000	44.74	-2.22	42.52	74.00	-31.48	V	peak
2924.000	44.56	-1.50	43.06	74.00	-30.94	V	peak
3240.000	42.82	-0.96	41.86	74.00	-32.14	V	peak
3828.000	43.08	0.86	43.94	74.00	-30.06	V	peak
4360.000	43.15	2.86	46.01	74.00	-27.99	V	peak
1212.000	47.04	-7.75	39.29	74.00	-34.71	H	peak
1776.000	50.54	-6.32	44.22	74.00	-29.78	H	peak
3036.000	43.81	-1.30	42.51	74.00	-31.49	H	peak
3784.000	43.97	0.68	44.65	74.00	-29.35	H	peak
3904.000	45.22	1.18	46.40	74.00	-27.60	H	peak
4780.000	42.86	4.26	47.12	74.00	-26.88	H	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Spectrum Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
 - b. AVG=peak- duty factor.

6.5. POWERLINE CONDUCTED EMISSIONS

6.5.1. LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

6.5.2. TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.5.3. TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

6.5.4. TEST RESULTS

Not applicable (Since the EUT is powered by dry cell)