



No. 1 Workshop, M-10, Middle section, Science & Technology Park,

Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053

Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com

Report No.: SZEM161100951501

Page: 1 of 29

# FCC REPORT

**Application No:** SZEM1611009515CR (SGS GZ No.:GZEM1611007607CR)  
**Applicant:** Minwa Electronics Co., Ltd.  
**Manufacturer:** Minwa Electronics Co.  
**Factory:** Minwa China (Huizhou) Electronics Co.Ltd  
**Product Name:** Remote control  
**Model No.(EUT):** MWRC01EL  
**Trade Mark:** MW  
**FCC ID:** TKQMWRC01EL  
**Standards:** 47 CFR Part 15, Subpart C (2015)  
**Date of Receipt:** 2016-11-15  
**Date of Test:** 2016-11-16 to 2016-11-18  
**Date of Issue:** 2016-11-22

<b>Test Result:</b>	<b>PASS *</b>
---------------------	---------------

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



# SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch

Report No.: SZEM161100951501  
Page: 2 of 29

## 1 Version

<b>Revision Record</b>				
<b>Version</b>	<b>Chapter</b>	<b>Date</b>	<b>Modifier</b>	<b>Remark</b>
00		2016-11-22		Original

<b>Authorized for issue by:</b>			
<b>Tested By</b>			2016-11-18
	<hr/>		<hr/>
	<b>(Bill Chen) /Project Engineer</b>		<b>Date</b>
<b>Checked By</b>			2016-11-22
	<hr/>		<hr/>
	<b>(Eric Fu) /Reviewer</b>		<b>Date</b>



**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 3 of 29

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203	ANSI C63.10(2013)	PASS
<b>Field Strength of the Fundamental Signal</b>	47 CFR Part 15, Subpart C Section 15.231 (b)	ANSI C63.10(2013)	PASS
<b>Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.231 (b)/15.209	ANSI C63.10(2013)	PASS
<b>20dB Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.231 (c)	ANSI C63.10(2013)	PASS
<b>Dwell Time</b>	47 CFR Part 15, Subpart C Section 15.231 (a)	ANSI C63.10(2013)	PASS



### 3 Contents

	Page
<b>1 VERSION .....</b>	<b>2</b>
<b>2 TEST SUMMARY .....</b>	<b>3</b>
<b>3 CONTENTS .....</b>	<b>4</b>
<b>4 GENERAL INFORMATION.....</b>	<b>5</b>
4.1 CLIENT INFORMATION .....	5
4.2 GENERAL DESCRIPTION OF EUT .....	5
4.3 TEST ENVIRONMENT AND MODE .....	6
4.4 DESCRIPTION OF SUPPORT UNITS .....	6
4.5 TEST LOCATION .....	6
4.6 TEST FACILITY .....	7
4.7 DEVIATION FROM STANDARDS .....	7
4.8 ABNORMALITIES FROM STANDARD CONDITIONS .....	7
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	7
4.10 MEASUREMENT UNCERTAINTY .....	8
4.11 EQUIPMENT LIST .....	9
<b>5 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>11</b>
5.1 ANTENNA REQUIREMENT .....	11
5.2 SPURIOUS EMISSIONS .....	12
5.2.1 <i>Duty Cycle</i> .....	12
5.2.2 <i>Spurious Emissions</i> .....	14
5.3 20dB BANDWIDTH .....	21
5.4 DWELL TIME.....	23
<b>6 PHOTOGRAPHS - TEST SETUP .....</b>	<b>25</b>
6.1 RADIATED EMISSION.....	25
6.2 RADIATED SPURIOUS EMISSION.....	25
<b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>	<b>26-29</b>



## 4 General Information

### 4.1 Client Information

Applicant:	Minwa Electronics Co., Ltd.
Address of Applicant:	22 Floor, Far East Finance Centre, 16 Harcourt Road, Admiralty, Hong Kong
Manufacturer:	Minwa Electronics Co., Ltd
Address of Manufacturer:	22 Floor, Far East Finance Centre, 16 Harcourt Road, Admiralty, Hong Kong
Factory:	Minwa China (Huizhou) Electronics Co., Ltd
Address of Factory:	Huizhou Industrial Park, Minwa(Dalian)Industrial Park, Ruhu Town, Huicheng, Huizhou, 516169 Guangdong,China

### 4.2 General Description of EUT

Name:	Remote control
Model No.:	MWRCAC01
Trade Mark :	MW
Frequency Range:	315MHz
Modulation Type:	ASK
Antenna Type:	Helical
Antenna Gain:	2dBi
Power Supply:	12V DC (12V x 1"L1028" Size Battery)



### 4.3 Test Environment and Mode

<b>Operating Environment:</b>	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1015mbar
<b>Test mode:</b>	
Transmitting mode:	Keep the EUT in transmitting mode with modulation.

### 4.4 Description of Support Units

The EUT has been tested independent unit.

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.



#### 4.10 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 <sup>-8</sup>
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.75dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
9	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
10	Temperature test	1 °C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%





**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 9 of 29

#### 4.11 Equipment List

RF connected test						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
2	Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
3	Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
4	Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in Chamber						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2016-10-09	2017-10-09
3	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01
4	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17
5	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13




**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 10 of 29

<b>RE in Chamber</b>						
<b>Item</b>	<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Inventory No.</b>	<b>Cal. Date (yyyy-mm-dd)</b>	<b>Cal. Due date (yyyy-mm-dd)</b>
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
6	Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
7	Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
8	Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
9	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A


## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
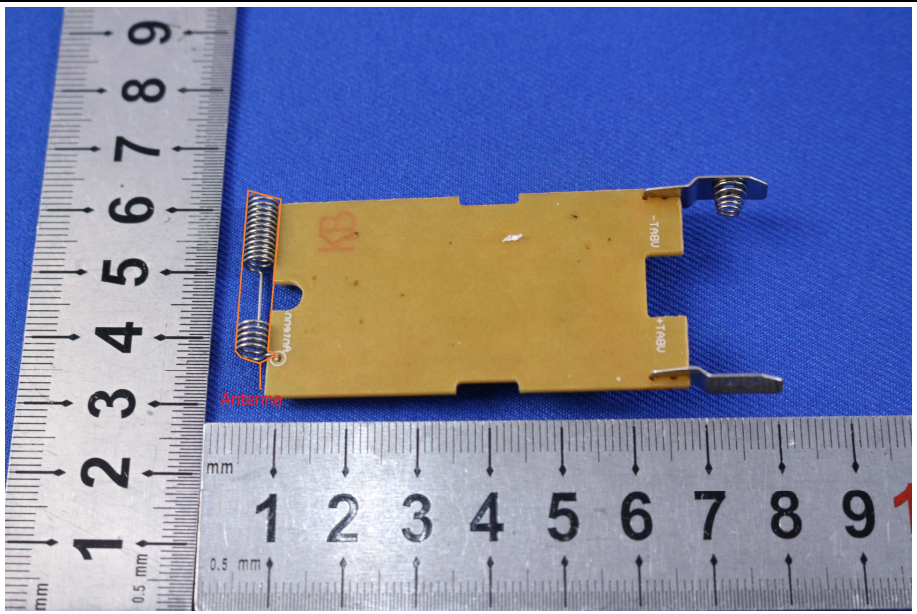
<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203
<p>15.203 requirement:</p> <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p>	
<b>EUT Antenna:</b>	
<p>The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2dBi.</p>	


## 5.2 Spurious Emissions

### 5.2.1 Duty Cycle

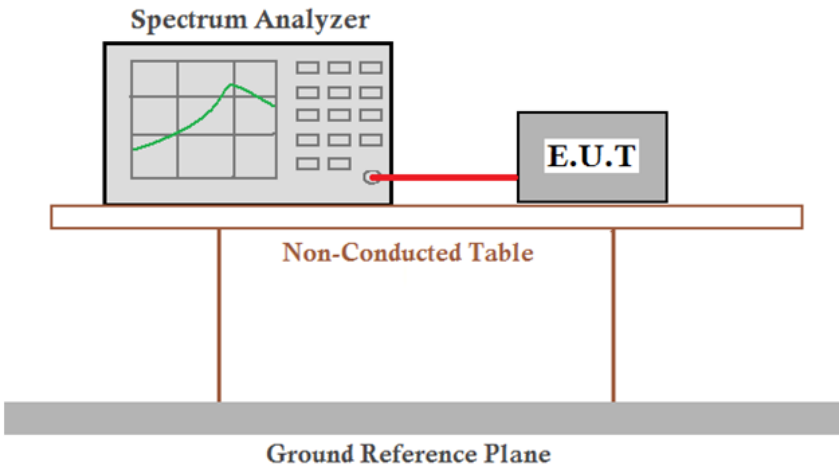Test Requirement:	47 CFR Part 15C Section 15.35 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Limit:	N/A
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass



Test plot as follows:  
Duty cycle numbers

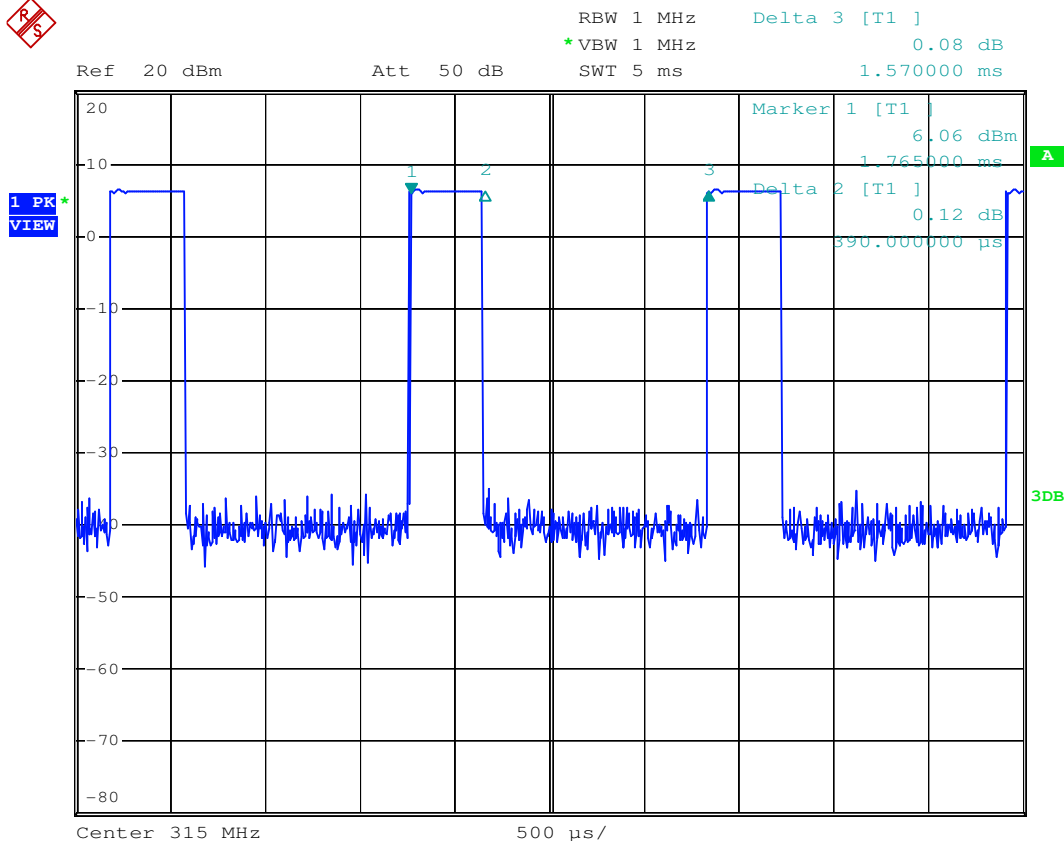



**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 14 of 29

**5.2.2 Spurious Emissions**

Test Requirement:	47 CFR Part 15C Section 15.231(b) and 15.209				
Test Method:	ANSI C63.10: 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber) 3m (Fully-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit: (Spurious Emissions)	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
Limit: (Field strength of the fundamental signal)	Frequency	Limit (dBuV/m @3m)		Remark	
	315MHz	75.62		Average Value	
		95.62		Peak Value	

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> <li>The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.</li> </ol>
<p>Test Setup:</p>	

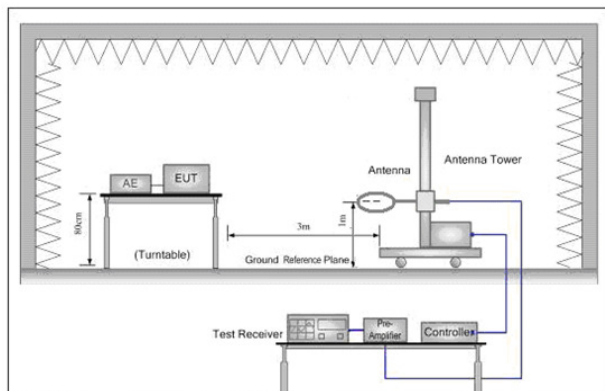


Figure 1. Below 30MHz

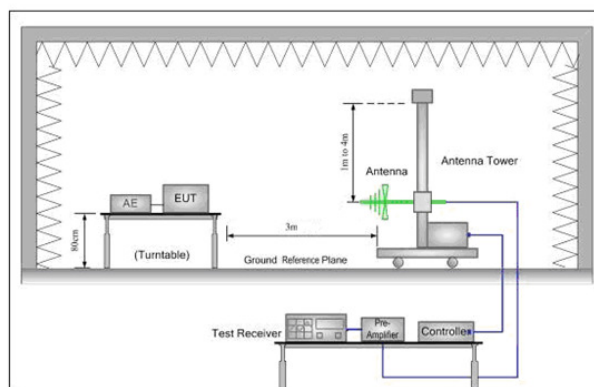


Figure 2. 30MHz to 1GHz

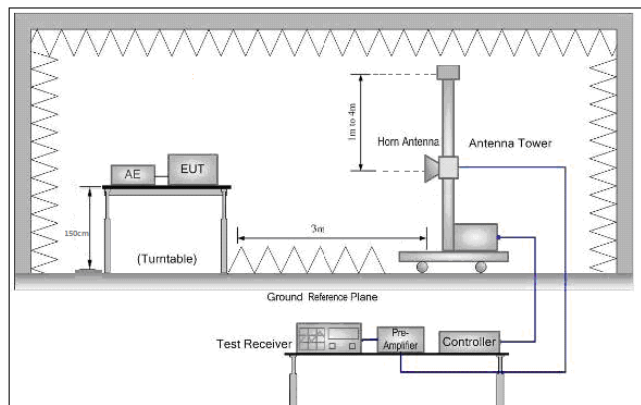


Figure 3. Above 1 GHz

Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

## Measurement Data

### 5.2.2.1 Field Strength Of The Fundamental Signal

Peak value:								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamplifier Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
315	1.95	14.46	26.52	91.36	81.25	95.62	-14.37	Horizontal
315	1.95	14.46	26.52	90.94	80.83	95.62	-14.79	Vertical

Average value:	
Calculate Formula:	Average value=Peak value + PDCF
	PDCF=20 log(Duty cycle)
	Duty cycle= T on time / T period
Test data:	Ton time =0.39ms
	T period =1.57ms
	PDCF =-12.10





**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 17 of 29


Average value:

Frequency (MHz)	PDCF	Peak Level (dBuV/m)	Average Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
315	-12.10	81.25	69.15	75.62	-6.47	Horizontal
315		80.83	68.73	75.62	-6.89	Vertical



5.2.2.2 Spurious Emissions

Test mode:	Transmitter mode	Polarization:	Vertical
------------	------------------	---------------	----------

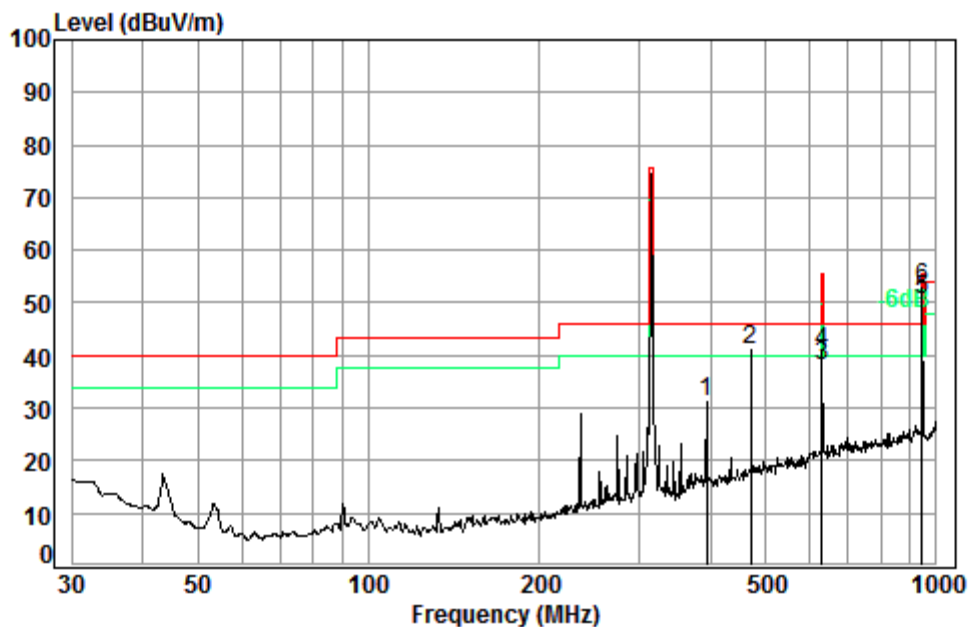

Condition: 3m VERTICAL

Job No. : 09517CR

Test mode: a


	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	393.47	2.18	16.22	27.09	39.74	31.05	46.00	-14.95
2 pp	472.18	2.50	17.70	27.56	48.54	41.18	46.00	-4.82
3	629.48	2.76	20.52	27.50	42.40	38.18	55.62	-17.44
4	629.48	2.76	20.52	27.50	44.89	40.67	75.62	-34.95
5 av	945.44	3.65	23.30	26.58	50.13	50.50	55.62	-5.12
6 pk	945.44	3.65	23.30	26.58	52.66	53.03	75.62	-22.59



**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**

Report No.: SZEM161100951501  
Page: 19 of 29

Test mode:	Transmitter mode	Polarization:	Horizontal
------------	------------------	---------------	------------

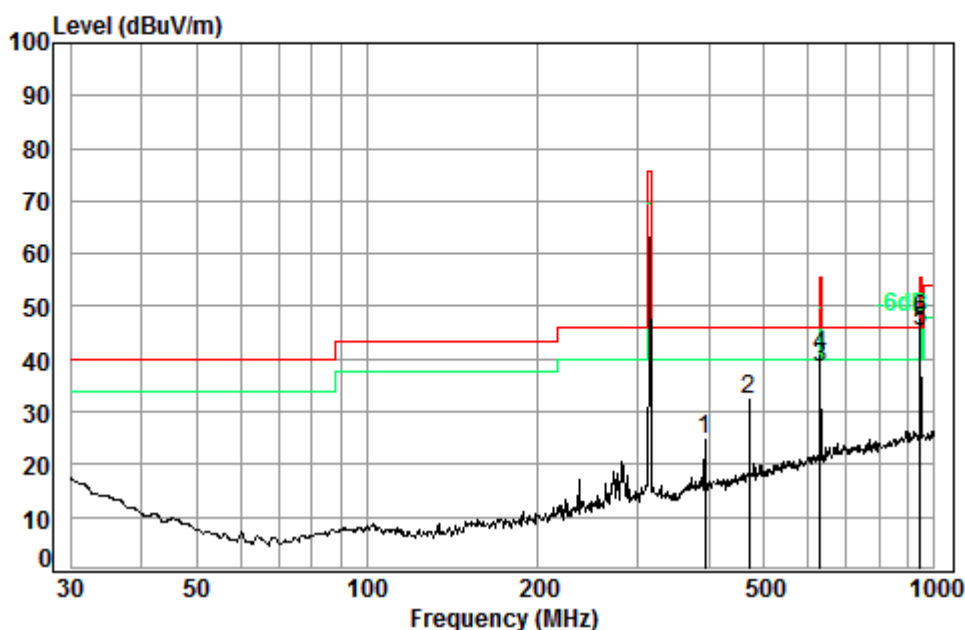

Condition: 3m HORIZONTAL  
Job No. : 09517CR  
Test mode: a

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Limit Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	393.47	2.18	16.22	27.09	33.54	24.85	46.00	-21.15
2	472.18	2.50	17.70	27.56	39.73	32.37	46.00	-13.63
3	629.48	2.76	20.52	27.50	42.58	38.36	55.62	-17.26
4	629.48	2.76	20.52	27.50	45.00	40.78	75.62	-34.84
5 pp	945.44	3.65	23.30	26.58	44.86	45.23	55.62	-10.39
6 pk	945.44	3.65	23.30	26.58	47.31	47.68	75.62	-27.94

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's Instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



**SGS-CSTC Standards Technical Services Ltd.  
Shenzhen Branch**


Report No.: SZEM161100951501  
Page: 20 of 29

Above 1GHz								
Peak value:								
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
1222.640	24.59	4.11	38.03	42.53	33.20	74	-40.80	Vertical
1528.376	25.93	4.51	38.06	43.68	36.06	74	-37.94	Vertical
1900.001	27.44	4.91	38.09	43.86	38.12	74	-35.88	Vertical
2465.705	29.30	5.39	38.15	44.50	41.04	74	-32.96	Vertical
3177.738	31.64	6.07	38.30	43.48	42.89	74	-31.11	Vertical
3773.753	32.99	6.53	38.60	43.48	44.40	74	-29.60	Vertical
1260.503	24.77	4.17	38.03	42.23	33.14	74	-40.86	Horizontal
1549.712	26.03	4.53	38.06	42.86	35.36	74	-38.64	Horizontal
1886.876	27.40	4.90	38.09	44.72	38.93	74	-35.07	Horizontal
2247.000	28.63	5.22	38.13	43.83	39.55	74	-34.45	Horizontal
2981.421	31.24	5.91	38.20	42.63	41.58	74	-32.42	Horizontal
3696.090	32.77	6.46	38.56	42.78	43.45	74	-30.55	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Pre-amplifier Factor
- 2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

### 5.3 20dB Bandwidth

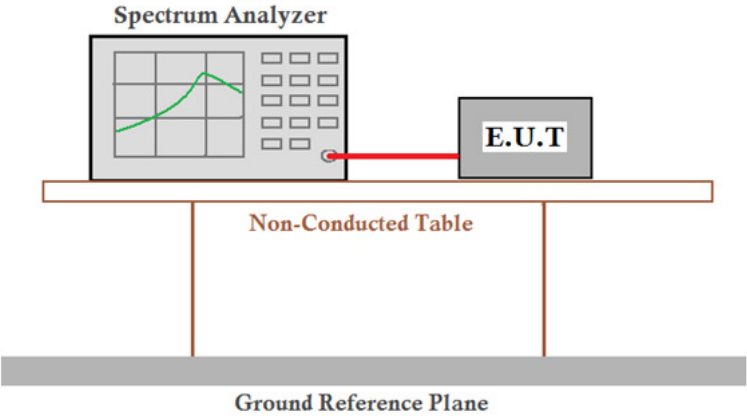Test Requirement:	47 CFR Part 15C Section 15.231 (c)
Test Method:	ANSI C63.10:2013
Test Setup:	
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB down from the modulated carrier.
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

#### Measurement Data


20dB bandwidth (MHz)	Limit (MHz)	Results
0.137	0.07876	Pass



# SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch


Report No.: SZEM161100951501  
Page: 22 of 29

Test plot as follows:

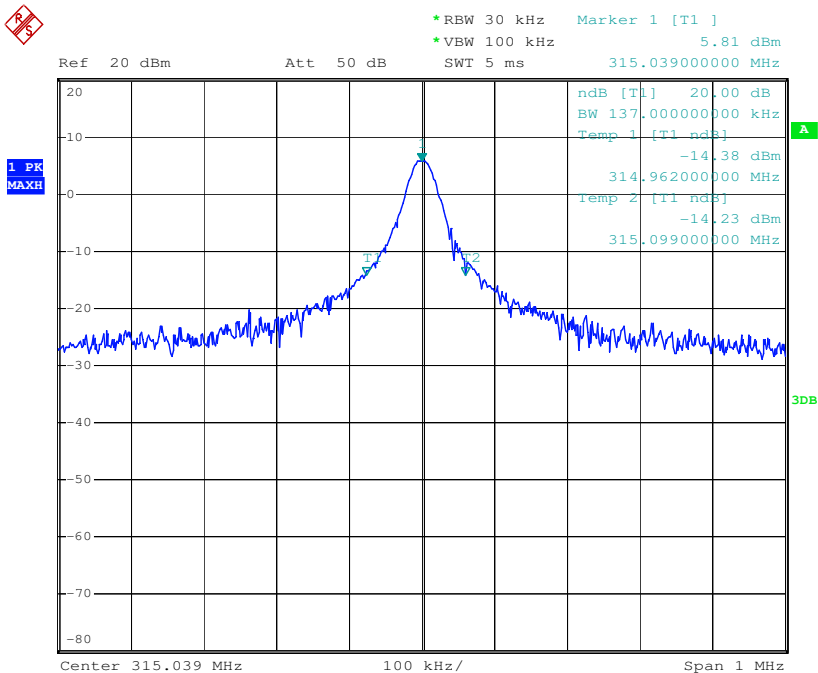

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

### 5.4 Dwell Time

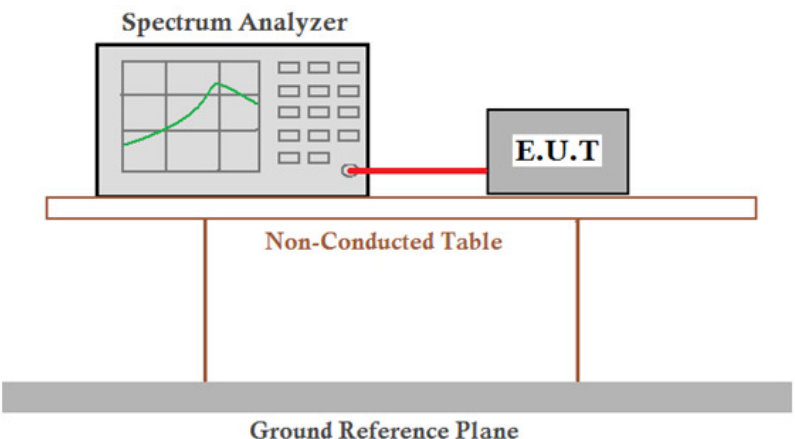Test Requirement:	47 CFR Part 15C Section 15.231 (a) (1)
Test Method:	ANSI C63.10:2013
Test Setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Limit:	Not more than 5 seconds
Test Mode:	Transmitting mode
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass

### Measurement Data


Test item	Limit	Results
Transmitting time	≤5S	Pass



# SGS-CSTC Standards Technical Services Ltd. Shenzhen Branch

Report No.: SZEM161100951501  
Page: 24 of 29


Test plot as follows:

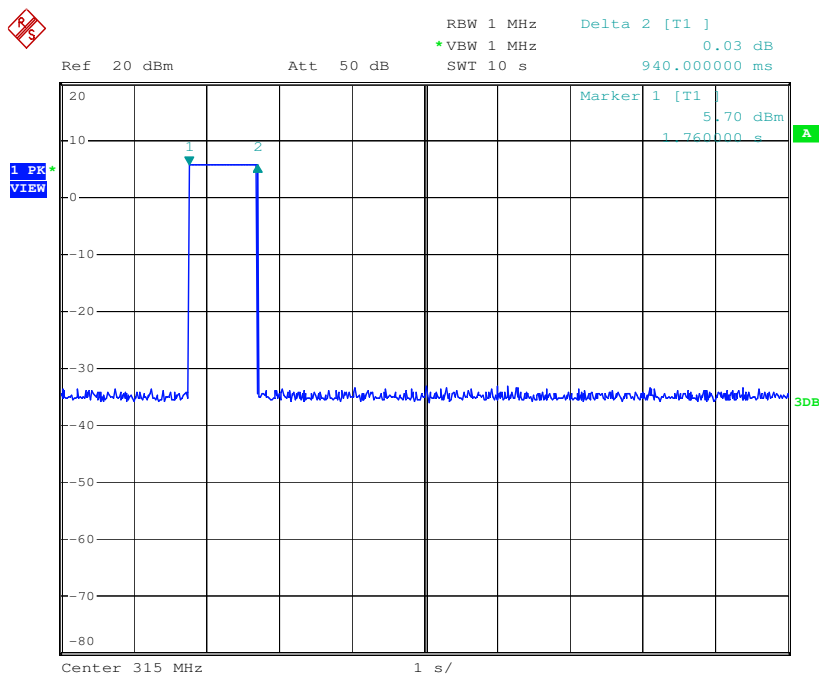




## 6 Photographs - Test setup

### 6.1 Radiated Emission

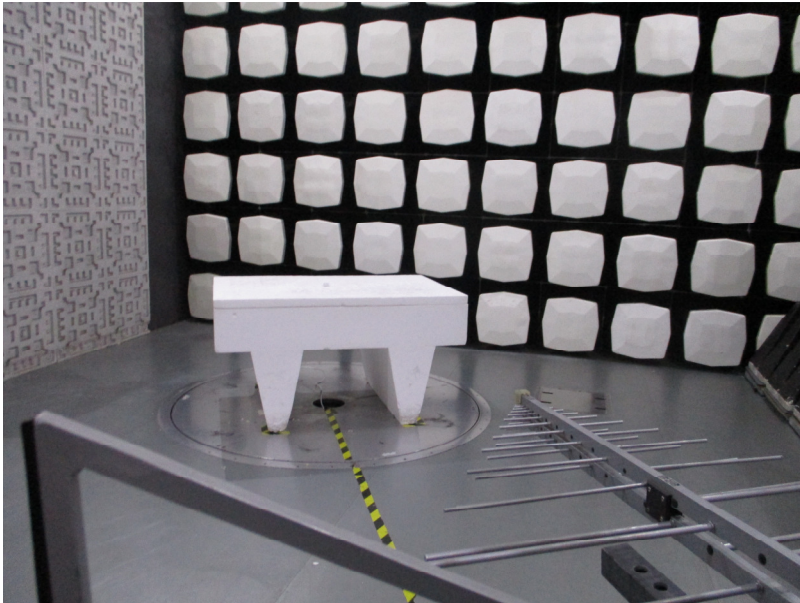

### 6.2 Radiated Spurious Emission

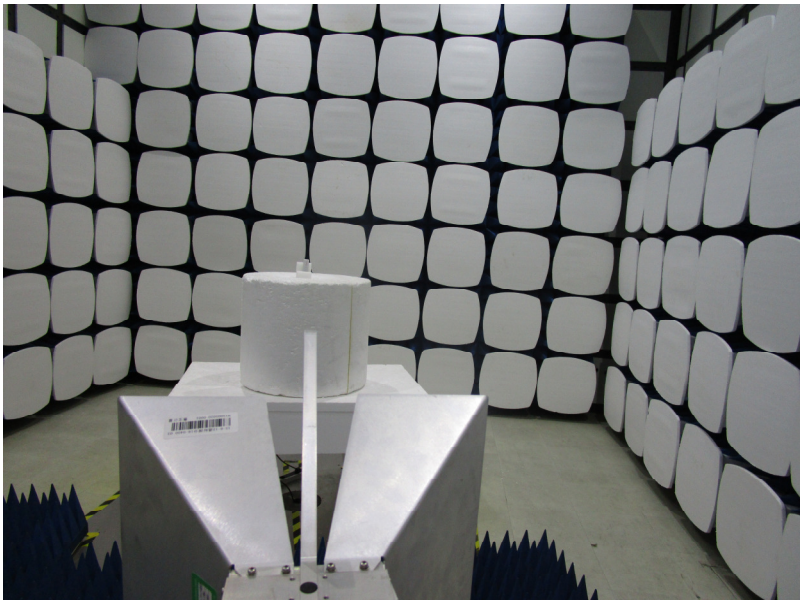

## 7 Photographs - EUT Constructional Details





