



## Test Report for FCC

FCC ID :TKWBSL2-OM

Report Number		ESTEFC1603-002		
Applicant	Company name	SUPREMA INC		
	Address	16F Parkview Tower, Jeongja-dong, Bundang-gu, Seongnam, Gyeonggi, 463-863 Korea		
	Telephone	82-31-710-5674		
Contact person		Tae-Hoon Lee		
Product	Product name	Biostation L2		
	Model No.	BSL2-OM	Manufacturer	SUPREMA INC
	Serial No.	None	Country of origin	KOREA
Test date	8-Mar-16		Date of issue	15-Mar-16
Testing location	347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si, Gyeonggi-do 467-811, R. O. Korea			
Standard	FCC PART 15 Subpart C(15.225), ANSI C 63.10(2009)			
Result		Complied		
Measurement facility registration number		659627		
Tested by	Senior Engineer K.H. Chung		(Signature)	
Reviewed by	Engineering Manager J.M. Yang		(Signature)	
Abbreviation	OK, Pass = Complied, Fail = Failed, N/A = not applicable			
<p>* Note</p> <ul style="list-style-type: none"> <li>- This test report is not permitted to copy partly without our permission</li> <li>- This test result is dependent on only equipment to be used</li> <li>- This test result based on a single evaluation of one sample of the above mentioned</li> </ul>				

## Contents

1. Laboratory Information .....	3
2. Description of EUT .....	4
3. Test Standards .....	5
4. Measurement condition .....	6
5. 20dBm Bandwidth .....	8
5.1 Procedure .....	8
5.2 20dBm Bandwidth Set up .....	8
5.3 Measurement Data .....	8
6. Frequency Tolerance .....	9
6.1 Procedure .....	9
6.2 Test Equipments .....	9
6.3 Measurement Data .....	10
7. Measurement of radiated emission .....	11
7.1 Radiated emission limits, general requirements .....	11
7.2 Measurement equipment .....	11
7.3 Environmental conditions .....	11
7.4 Test data(9 kHz ~30 MHz) .....	12
7.5 Test data(30 MHz ~ 1 GHz) .....	13
7.6 Test data(Above 1 GHz) .....	14
8. Measurement of conducted emission .....	15
8.1 Measurement equipment .....	15
8.2 Environmental conditions .....	15
8.3 Test data .....	16
Appendix 1. Special diagram	
Appendix 2. Antenna Requirement	

## 1. Laboratory Information

### 1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report. ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

### 1.2 Test Lab.

Corporation Name : ESTECH Co., Ltd.

Head Office : Suite 1015 World Meridian II, 123 Gasan Digital 2-ro, Geumcheon-gu,  
Seoul 153-759, R. O. Korea

EMC/Telecom/Safety Test Lab : 347-69, Jungbu-daero 147beon-gil, Majang-myeon, Icheon-si,  
Gyeonggi-do 467-811, R. O. Korea

### 1.3 Official Qualification(s)

MSIP : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Conformity Assessment Body(CAB) with registration number 659627 under APEC TEL MRA between the RRA and the FCC

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

## 2. Description of EUT

### 2.1 Summary of Equipment Under Test

Product : Biostation L2  
 Model Number : BSL2-OM  
 Serial Number : NONE  
 Manufacturer : SUPREMA INC  
 Country of origin : KOREA  
 Operating Frequency : 13.56 MHz  
 Antenna Type : Mag Integrated Loop Antenna  
 Modulation Type : ASK  
 Power Rating : DC 12 V, MAX 600 mA  
 Testing Voltage : AC 120 V , 60 Hz  
 Receipt Date : 11-Feb-16  
 X-tal list(s) or Frequencies generated : The highest operating frequency is CPU 1.2 GHz

### 2.2 General descriptions of EUT

General	CPU	1.2 GHz Quad Core
	Memory	2GB Flash + 256 MB RAM
	LCD type	2" color TFT LCD
	LCD resolution	220 x 176 pixels
	Sound	16-bit Hi-Fi
	Operating temperature	-20 °C ~ 50 °C
	Storage temperature	-40 °C ~ 70 °C
	Operating humidity	0 % ~ 80 %, non-condensed
	Storage humidity	0 % ~ 90 %, non-condensed
	Dimension (W x H x D)	71 mm x 201 mm x 44 mm (Bottom) / 34 mm (Top)
	Weight	Device: 280 g Bracket: 61 g (including washers and bolts)
Electrical	Certificates	CE, FCC, KC, RoHS, REACH, WEEE
	Power	Voltage: 12VDC Current: Max. 600 mA
	Switch input $V_{IH}$	Min. 4V Max. 5V
	Switch input $V_{IL}$	Max. 1V
	Switch pull-up resistor	4.7 k $\Omega$ (The input ports are pulled up with 4.7 k $\Omega$ )
	Wiegand output $V_{OH}$	Min. 4V Max. 5V
	Wiegand output $V_{OL}$	Max. 1V
	Wiegand output pull-up resistor	Internal pull-up with 1 k $\Omega$
Relay	Voltage: Max. 30VDC Current: 1A, Max. 2A	

### 3. Test Standards

**Test Standard : FCC PART 15 Subpart C(15.225)**

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

**Test Method : ANSI C 63.10 (2009)**

This standard sets forth uniform methods of measurement of radio–frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power–line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units.

**Summary of Test Results**

Applied Standard : 47 CFR Part 15, Subpart C				
Standard	Test Type	Result	Remark	Limit
15.203	Antenna Requirement	Pass	Meet the requirement	
15.207	AC Power Conducted Emission	Pass	Meet the requirement	
15.225(a)	Radiated Emission (13.553 ~13.567) MHz	Pass	Meet the requirement	15,848 uV/m at 30 m
15.225(b)	Radiated Emission (13.410 ~13.553 , 13.567 ~ 13.710) MHz	Pass	Meet the requirement	334 uV/m at 30 m
15.225(c)	Radiated Emission (13.110 ~13.410 , 13.710 ~ 14.010) MHz	Pass	Meet the requirement	106 uV/m at 30 m
15.225(d)	Apply section 15.209 (out side band of the 13.110 ~14.010) MHz	Pass	Meet the requirement	
15.225(e)	Frequency stability	Pass	Meet the requirement	
15.215(c)	20dB Bandwidth	Pass	Meet the requirement	


## 4. Measurement Condition

### 4.1 EUT Operation.

-The EUT was tested, tested under transmission/receiving condition continuously between the EUT

1. Connect the EUT to External Network / LAN port of the Note PC.
2. Install the provided test program by the manufacturer.
3. Execute the test program and check the operating status of the EUT.  
(Check fingerprint detection and RFID Card display on the note pc continuously.)

### 4.2 Configuration and Peripherals

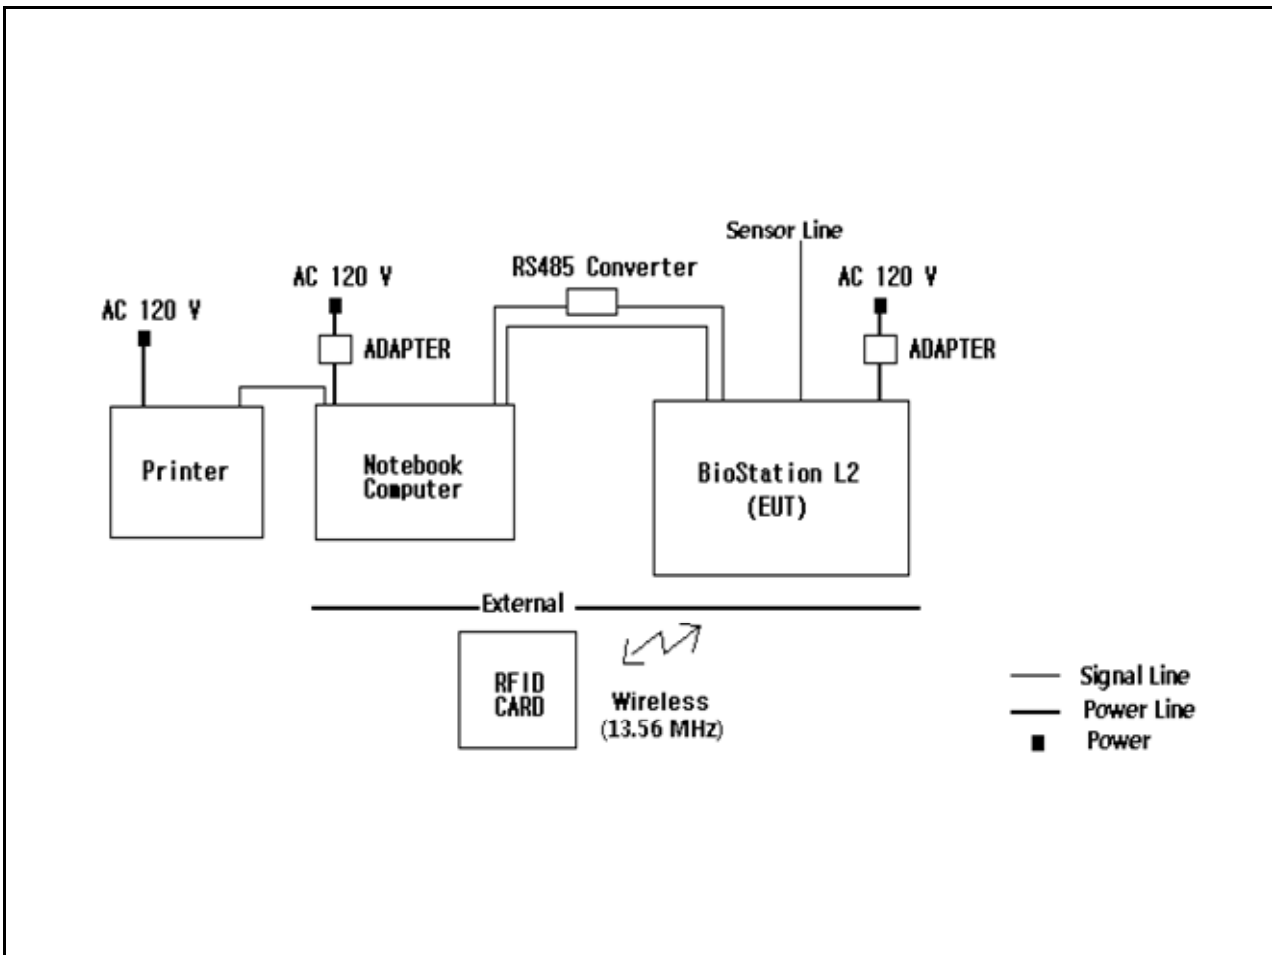

### 4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Biostation L2	BSL2-OM	542500814	SUPREMA INC	EUT
Adapter	DZ036DL120250F	NONE	Guangdong Keerda Electronics Co.,Ltd	
Notebook Computer	LG15N54	412NZZ305045	LG Electronics Nanjing Display Co., Ltd	
Adapter	PA-1900-14	OENT263348701J137(1.0)	LITE-ON TECHNOLOGY (CHANGZHOU) CO., LTD	
RS485 Converter	TCC-80	TACGC1082106	MOXA	
Printer	K10229	NONE	CANON VIETNAM CO.,LTD.	

### 4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Biostation L2	RFID(13.56 MHz)	RFID CARD	RFID(13.56 MHz)	-	-	
Biostation A2	DC POWER	Adapter	-	2.0	Unshielded	
Biostation A2	Jack Line	Sensor Line x 3	-	3	Shielded	
Biostation A2	RS-485	RS485 Converter	Serial	3	Shielded	
Biostation A2	LAN	NOTEBOOK COMPUTER	LAN	2.0	Unshielded	
RS485 Converter	Serial	NOTEBOOK COMPUTER	USB	2.0	Shielded	
Notebook Computer	USB	Printer	USB	2.0	Shielded	
Notebook Computer	Power	Adapter	-	2.0	Shielded	

## 5. 20 dB Bandwidth

### 5.1 Procedure

The transmitter output was connected to the spectrum analyzer. The bandwidth of the fundamental frequency was measured by spectrum analyzer. The 20 dB bandwidth is defined as the bandwidth at 20 dB below from peak power point.

### 5.2 20dB Bandwidth setup

The spectrum analyzer is set to as following

RBW: 30 Hz

VBW: 300 Hz


Span: 5 kHz

Sweep:suitable duration based on the EUT specification

### 20dB Bandwidth Test Instruments

Decription	Model	Serial Number	Cal. Due Data
Signal Analyzer	FSV	100939	12-Jan-17

### 5.3 Measurement Data

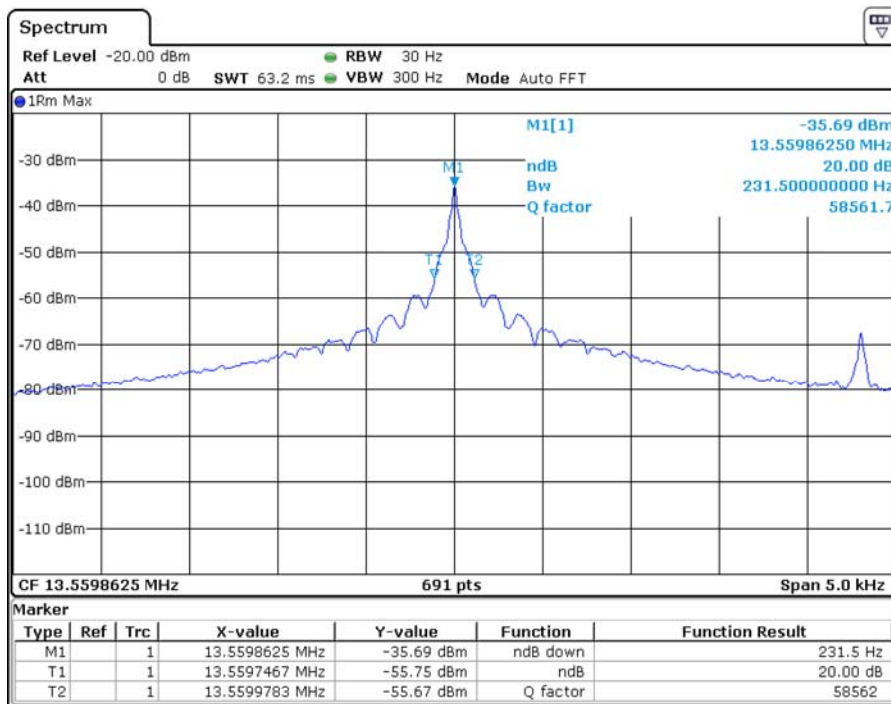

BSL2-OM



## 6. Frequency Tolerance

### 6.1 Procedure

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from  $-20\text{ }^{\circ}\text{C}$  to  $+50\text{ }^{\circ}\text{C}$  using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85 % to 115 % of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied.

The frequency tolerance of the carrier shall be maintained within  $\pm 0.01\%$  of the operating frequency.

### 6.2 Equipment lists

The following test equipments are used during test

Decription	Model	Serial Number	Cal. Due Data
Signal Analyzer	FSV	100939	12-Jan-17
Temp./Humidity Chamber	SM-150-2	04-TH24	12-Jan-17

### 6.3 Measurement Data

Operating Frequency : 13,559,862 Hz  
 Reference Voltage : 12.00 Vd.c.  
 Deviatin Limit : ± 0.01 %

Voltage (%)	Power (Vdc)	Temperature (°C)	Frequency (Hz)	Deviation (%)
100	12.00	+20 °C (Ref)	13,560,321	0.003385
100		-20	13,560,423	0.004137
100		-10	13,559,877	0.000111
100		<b>0</b>	13,560,180	0.002345
100		10	13,560,072	0.001549
100		20	13,560,209	0.002559
100		30	13,560,134	0.002006
100		40	13,560,346	0.003569
100		50	13,560,851	0.007294
85		10.20	20	13,560,259
115	13.80	20	13,560,448	0.004322

## 7. Measurement of radiated disturbance

The EUT was placed on the top of a rotating table 0.8 m above the ground at a 10 m semi-anechoic chamber . The table was rotated 360° to determine the position of the highest radiation. Then antenna is a loop antenna is fixed at 1 m above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0° to 360° to find the maximum reading. The test receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

### 7.1 Radiated emission limits, general requirements

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field strength @30 m (uV/m)	Field strength @30 m (dBuV/m)	Field strength @3m (dBuV/m)
Below 13.110	30	29.5	69.5
13.110 ~13.410	106	40.5	80.5
13.410~13.553	334	50.5	90.5
13.553~13.567	15,848	84	124
13.567~13.710	334	50.5	90.5
13.710~14.010	106	40.5	80.5
Above 14.010	30	29.5	69.5

\* dBuV/m=20\*log(uV/m) \* Distance factor=40dB / decade(15.31(f))

### 7.2 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESCI7	ROHDE & SCHWARZ	100916	7-Sep-16
Logbicon Antenna	VULB 9168	SCHWARZBECK	9168-193	30-Sep-16
Turn Table	DT3000-2t	Innco System GmbH	N/A	-
Antenna Mast	MA4000-EP	Innco System GmbH	N/A	-
Antenna Master & Turn table controller	CO2000-P	Innco System GmbH	CO2000/641 /28051111/L	-
Loop Antenna	HFH2-Z2	ROHDE & SCHWARZ	100188	19-Aug-16

### 7.3 Environmental Condition

Test Place : 10 m Semi-anechoic chamber

#### Below 1 GHz

Temperature (°C) : 21.2 °C

Humidity (% R.H.) : 50.8 % R.H.

Test Place : 3 m Semi-anechoic chamber(3 m)

#### Above 1 GHz – N / A

Temperature (°C) :

Humidity (% R.H.) :



### 7.4 Test data(9 kHz ~ 30 MHz)

Test Date : 16-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Vertical Position [Angle]	EUT Position	Height (m)	Correction Factor		Result Value(Quasi-Peak)		
					Ant Factor (dB)	Cable (dB)	Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
Below 13.110 MHz									
Noise Floor	-	-	-	-	18.70	8.0	69.5	-	-
13.110 MHz to 13.410 MHz									
Noise Floor	-	-	-	-	18.70	0.5	80.5	-	-
13.410 MHz to 13.553 MHz									
Noise Floor	-	-	-	-	18.70	0.5	90.5	-	-
13.553 MHz to 13.567 MHz									
13.559862	41.44	0 °	Z	1.5	18.80	0.5	124.0	60.74	63.26
13.567 MHz to 13.710 MHz									
Noise Floor	-	-	-	-	18.70	0.5	90.5	-	-
13.710 MHz to 14.010 MHz									
Noise Floor	-	-	-	-	18.70	0.5	80.5	-	-
14.010 MHz to 30 MHz									
Noise Floor	-	-	-	-	18.40	0.8	69.5	-	-
14.010 MHz to 30 MHz									
Noise Floor	-	-	-	-	18.40	0.8	69.5	-	-
Remark	<p>*The 30 m limit was converted to 3 m Limit using square factor(x) as it was found by measurements as follows;            *3 m Limit(dBuV/m) = 20log(X)+40log(30/3)= 20log(15848)+40log(30/3) = 124 dBuV            *3 m Limit(dBuV/m) = 20log(X)+40log(30/3)= 20log(30)+40log(30/3) = 69.5 dBuV</p> <p>*The other emissions were not detected.            * The EUT was measured for the worst case by rotating of antenna angle.            * The EUT performed at X,Y,Z and recorded the worst data in the report.</p>								



### 7.5 Test data(30 MHz ~ 1 000 MHz)

Test Date : 8-Mar-16

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB $\mu$ V)	Position (V/H)	Height (m)	Correction Factor		Result Value(Quasi-peak)		
				Ant Factor (dB)	Cable (dB)	Limit (dB $\mu$ V/m)	Result (dB $\mu$ V/m)	Margin (dB)
66.30	23.79	1.2	V	11.42	1.28	40.00	36.49	3.51
250.00	24.10	1.8	H	11.67	2.52	46.00	38.29	7.71
366.00	22.91	1.1	V	14.98	3.07	46.00	40.96	5.04
586.10	16.44	2.2	V	19.79	3.96	46.00	40.19	5.81
744.50	10.83	1.2	H	21.93	4.50	46.00	37.26	8.74
799.90	15.05	1.6	V	22.72	4.69	46.00	42.46	3.54
Remark	<p>H : Horizontal, V : Vertical            *Result Value = Reading + Antenna + Cable loss            *Correction Factor = Ant Factor + Cable            *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection</p>							



## 8. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 MHz to 30 MHz was measured in accordance to FCC Part 15 & ANSI C 63.10 (2009) The test setup was made according to FCC Part 15 & ANSI C 63.10 (2009) in a shielded Room. The EUT was placed on a non-conductive table at least 0.8 m above the ground plan. A grounded vertical reference plane was positioned in a distance of 0.4 m from the EUT. The distance from the EUT to other metal surfaces was at least 0.8 m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0 m. The test receiver with Quasi Peak detector complies with CISPR 16.

### 8.1 Measurement equipments

Equipment Name	Model	Manufacturer	Serial No.	Next Calibration date
TEST RECEIVER	ESPI	Rohde & Schwarz	100005	7-Dec-16
LISN	ENV 216	Rohde & Schwarz	101231	7-Dec-16
LISN	ESH3-Z5	Rohde & Schwarz	836679/025	7-Dec-16
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	7-Dec-16

### 8.2 Environmental Condition

Test Place : Shielded Room  
 Temperature (°C) : 20.9 °C  
 Humidity (% R.H.) : 38.8 % R.H.



### 8.3 Test data(Adapter Mode)

Test Date : 8-Mar-16

Frequency (MHz)	Correction Factor		Line (H/N)	Quasi-peak Value			Average Value		
	Lisn (dB)	Cable (dB)		Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB $\mu$ V)	Limit (dB $\mu$ V)	Reading (dB $\mu$ V)	Result (dB)
0.16	0.12	0.12	H	65.46	40.49	40.73	55.46		
0.16	0.13	0.12	N	65.46	40.96	41.21	55.46		
0.17	0.12	0.13	H	64.96	38.65	38.90	54.96		
0.19	0.13	0.14	N	64.04	38.88	39.15	54.04		
0.44	0.14	0.16	N	57.06	40.70	41.00	47.06		
0.45	0.13	0.16	H	56.88	38.40	38.69	46.88		
Remark	H : Hot Line, N : Neutral Line *Correction Factor = Lisn + Cable *Result = Correction Factor + Reading								




# Appendix 1. Special diagram

## \* HOT LINE



RBW 9 kHz Marker 1 [T1 ]  
 MT 1 s 27.83 dBuV  
 Att 10 dB AUTO PREAMP OFF 285.00000000 kHz

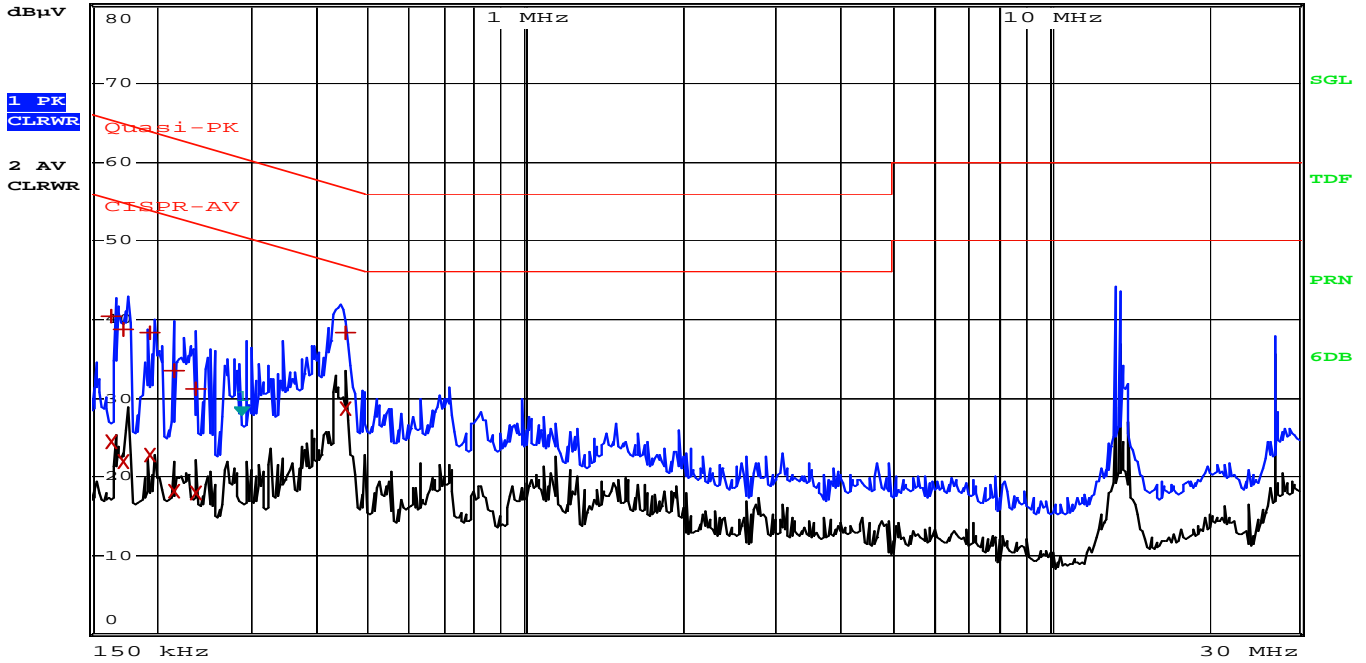


Comment: 16-02062\_HOT  
 Date: 8.MAR.2016 20:25:34

## \* NEUTRAL LINE



RBW 9 kHz Marker 1 [T1 ]  
 MT 1 s 29.01 dBuV  
 Att 10 dB AUTO PREAMP OFF 198.00000000 kHz

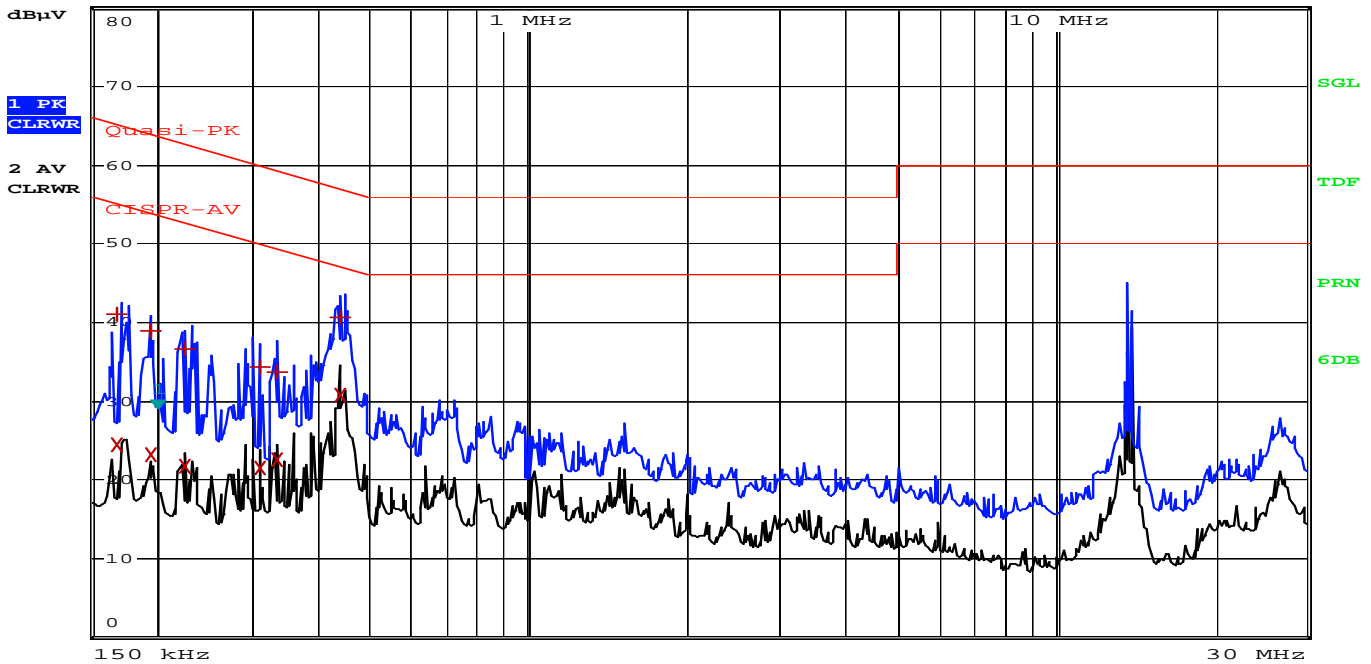

Comment: 16-02062\_NEUTRAL  
 Date: 8.MAR.2016 20:30:33

## Appendix 1. Antenna Requirement

### Regulation

According to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### Result

–Complied

The transmitter has an Mag Integrated Loop Antenna.