


# FCC Test Report

**FCC ID** : TKZAWV03S-003  
**Equipment** : WiFi Router  
**Model No.** : AWV03S-003  
**Applicant** : AsiaRF Co., LTD.  
**Address** : 3F, 215, Dehe Road, Yonghe Dist. New Taipei  
City Taiwan  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Sep. 27, 2019  
**Tested Date** : Feb. 06 ~ Mar. 12, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

Approved by:

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	The Equipment List .....	9
1.5	Test Standards .....	10
1.6	Deviation from Test Standard and Measurement Procedure.....	10
1.7	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION .....</b>	<b>11</b>
2.1	Testing Condition .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS.....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth .....	15
3.3	RF Output Power.....	21
3.4	Power Spectral Density .....	24
3.5	Unwanted Emissions into Restricted Frequency Bands .....	30
3.6	Emissions in Non-Restricted Frequency Bands.....	58
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>63</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR992701AC	Rev. 01	Initial issue	Apr. 06, 2020

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.153MHz 42.98 (Margin -22.84dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 4824.00MHz 53.00 (Margin -1.00dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Max Power [dBm]: 24.90	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N <sub>TX</sub> )	Data Rate / MCS
2400-2483.5	b	2412-2462	1-11 [11]	2	1-11 Mbps
2400-2483.5	g	2412-2462	1-11 [11]	2	6-54 Mbps
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	2	MCS 0-15
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	2	MCS 0-15

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.  
 Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.  
 Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

### 1.1.2 Antenna Details

Ant. No.	Type	Gain (dBi)	Connector	Remark
1	Dipole	1	---	---

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	12Vdc from adapter
--------------------------	--------------------

### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: SHENZHEN YINGHUIYUAN ELECTRONICS CO.,LID Model: YHY-18003000 Power Rating: I/P: 100-240Vac, 50-60Hz, 1.5A O/P: 18Vdc, 3A Power Line: 1.48m non-shielded with one core

### 1.1.5 Channel List

Frequency band (MHz)		2400~2483.5	
802.11 b / g / n HT20		802.11n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
1	2412	3	2422
2	2417	4	2427
3	2422	5	2432
4	2427	6	2437
5	2432	7	2442
6	2437	8	2447
7	2442	9	2452
8	2447	---	---
9	2452	---	---
10	2457	---	---
11	2462	---	---

### 1.1.6 Test Tool and Duty Cycle

Test Tool	MT7620 QA, Version: 1.0.6.0		
Duty Cycle and Duty Factor	Mode	Duty Cycle (%)	Duty Factor (dB)
	11b	100.00	0.00
	11g	89.38	0.49
	HT20	88.37	0.54
	HT40	79.40	1.00


### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)	Power Index
11b	2412	0E/10
11b	2437	0F/0F
11b	2462	12/0F
11g	2412	04/06
11g	2437	0B/0C
11g	2462	08/06
HT20	2412	03/05
HT20	2437	09/0A
HT20	2462	07/05
HT40	2422	06/07
HT40	2437	0B/0B
HT40	2452	09/08

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Telephone	ISITO	IS-333	---	---
2	USB Flash	Kingston	DTSE9	---	---
3	Notebook	DELL	Latitude E6440	DoC	---
4	Notebook	DELL	Latitude E5470	DoC	---

## 1.3 Test Setup Chart

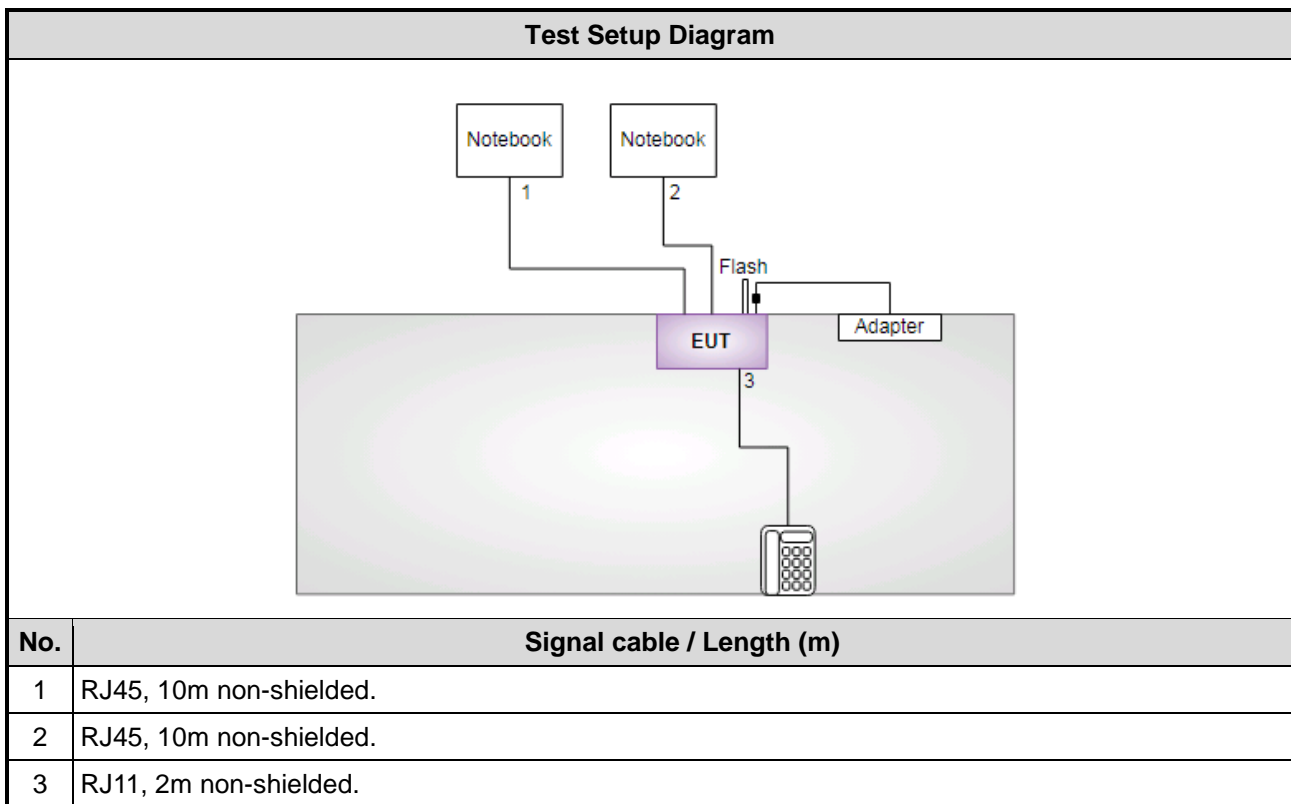



## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Mar. 12, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	100003	Sep. 23, 2019	Sep. 22, 2020
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Feb. 06 ~ Mar. 12, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 10, 2020
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 17, 2019	Apr. 16, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 27, 2019	Dec. 26, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980187	Aug. 14, 2019	Aug. 13, 2020
Preamplifier	Agilent	83017A	MY53270014	Aug. 07, 2019	Aug. 06, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 27, 2019	Sep. 26, 2020
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 27, 2019	Sep. 26, 2020
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 27, 2019	Sep. 26, 2020
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 27, 2019	Sep. 26, 2020
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 27, 2019	Sep. 26, 2020
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 27, 2019	Sep. 26, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Mar. 12, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 17, 2019	Apr. 16, 2020
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 02, 2019	Dec. 01, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

## 1.6 Deviation from Test Standard and Measurement Procedure

None

## 1.7 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.96 dB
Radiated emission > 1GHz	±4.51 dB

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 60%	Alex Tsai
Radiated Emissions	03CH03-WS	20-25°C / 65%	Roger Lu Brad Wu
RF Conducted	TH01-WS	20°C / 66%	Aska Huang

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	---
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	---
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	---
Maximum Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

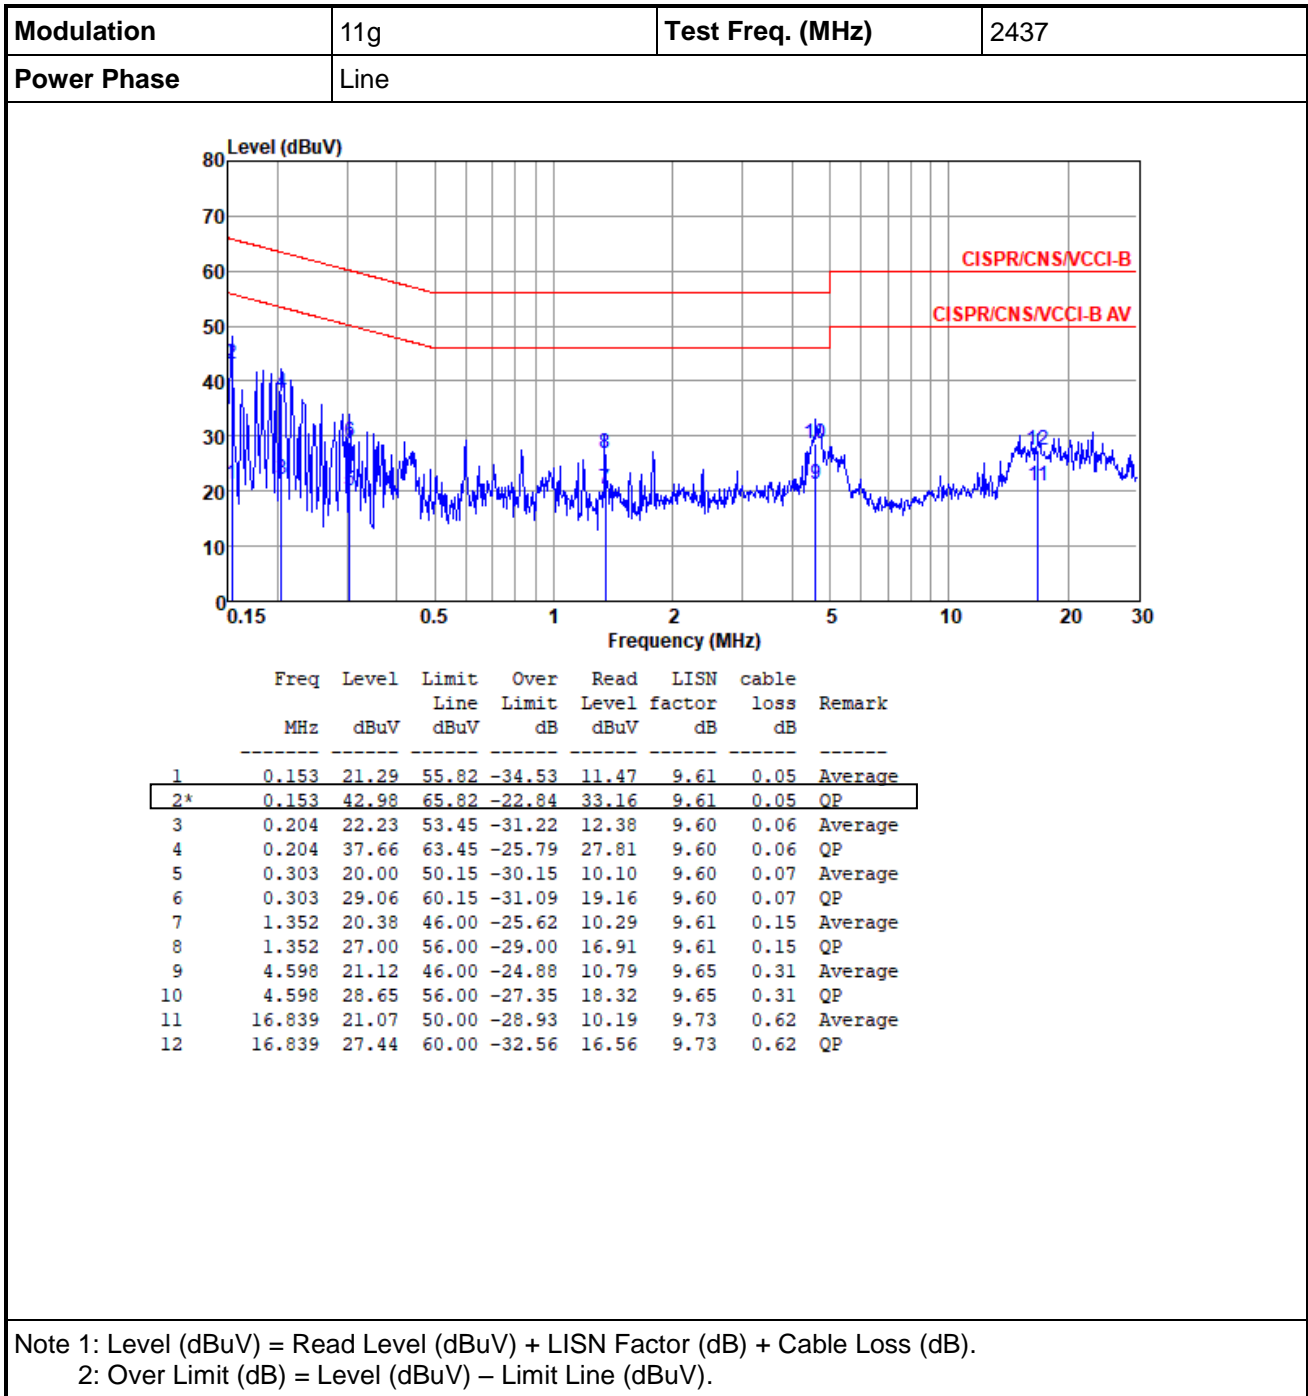

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Power Phase</b>	Neutral		

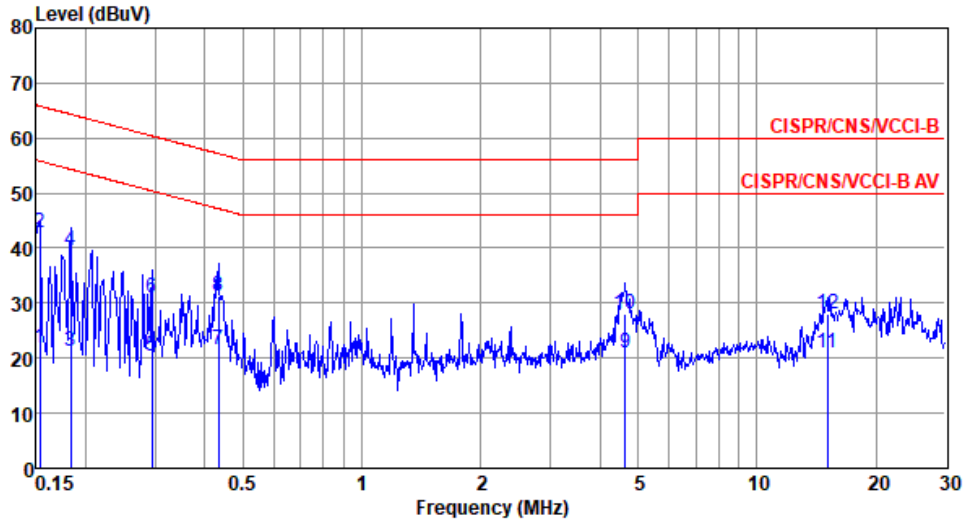

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.153	21.95	55.82	-33.87	12.20	9.58	0.05	Average
2*	0.153	42.88	65.82	-22.94	33.13	9.58	0.05	QP
3	0.183	21.17	54.33	-33.16	11.39	9.58	0.06	Average
4	0.183	39.53	64.33	-24.80	29.75	9.58	0.06	QP
5	0.294	20.48	50.41	-29.93	10.68	9.57	0.07	Average
6	0.294	31.00	60.41	-29.41	21.20	9.57	0.07	QP
7	0.433	21.46	47.20	-25.74	11.64	9.57	0.08	Average
8	0.433	31.17	57.20	-26.03	21.35	9.57	0.08	QP
9	4.647	21.04	46.00	-24.96	10.84	9.62	0.31	Average
10	4.647	27.91	56.00	-28.09	17.71	9.62	0.31	QP
11	15.066	21.02	50.00	-28.98	10.26	9.79	0.60	Average
12	15.066	28.00	60.00	-32.00	17.24	9.79	0.60	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup

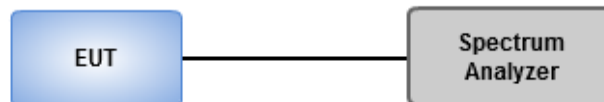

### 3.2.4 Test Result of 6dB and Occupied Bandwidth

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
802.11b_Nss1,(1Mbps)_2TX	10.072M	12.373M	12M4G1D	9.565M	12.229M
802.11g_Nss1,(6Mbps)_2TX	16.377M	16.715M	16M7D1D	16.377M	16.643M
802.11n HT20_Nss1,(MCS0)_2TX	17.536M	17.656M	17M7D1D	17.174M	17.583M
802.11n HT40_Nss1,(MCS0)_2TX	36.087M	36.469M	36M5D1D	35.507M	36.324M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

#### Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	10.072M	12.373M	10.072M	12.229M
2437MHz	Pass	500k	9.565M	12.301M	10.072M	12.301M
2462MHz	Pass	500k	10.072M	12.373M	10.072M	12.301M
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	16.377M	16.643M	16.377M	16.643M
2437MHz	Pass	500k	16.377M	16.643M	16.377M	16.715M
2462MHz	Pass	500k	16.377M	16.643M	16.377M	16.715M
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	500k	17.536M	17.583M	17.319M	17.656M
2437MHz	Pass	500k	17.319M	17.583M	17.536M	17.656M
2462MHz	Pass	500k	17.174M	17.583M	17.319M	17.583M
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	500k	35.942M	36.324M	35.797M	36.469M
2437MHz	Pass	500k	35.507M	36.324M	35.797M	36.469M
2452MHz	Pass	500k	35.797M	36.469M	36.087M	36.324M


**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;



### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


#### 2412MHz

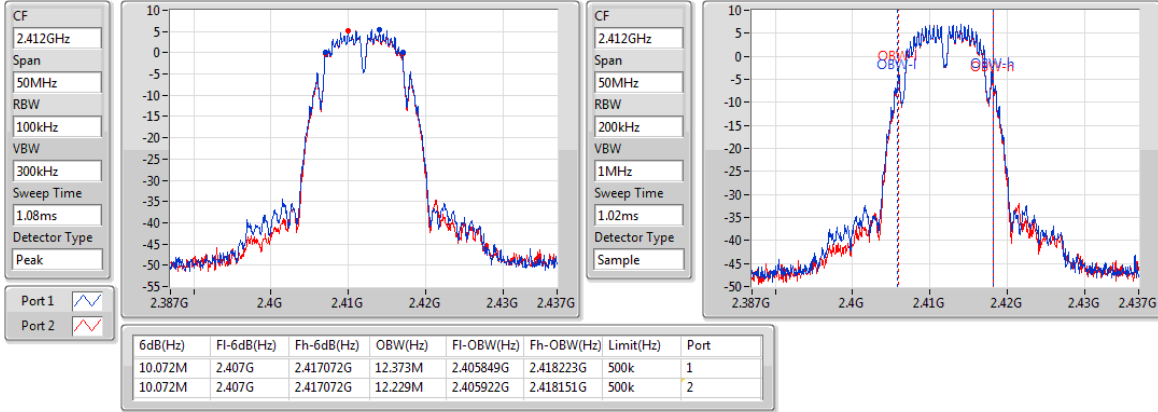

### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


#### 2437MHz

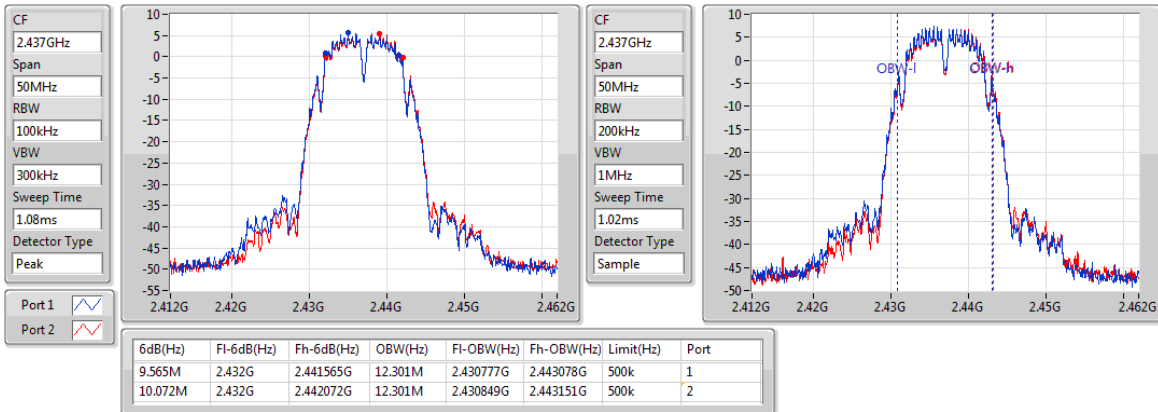

### 802.11b\_Nss1,(1Mbps)\_2TX

EBW


#### 2462MHz

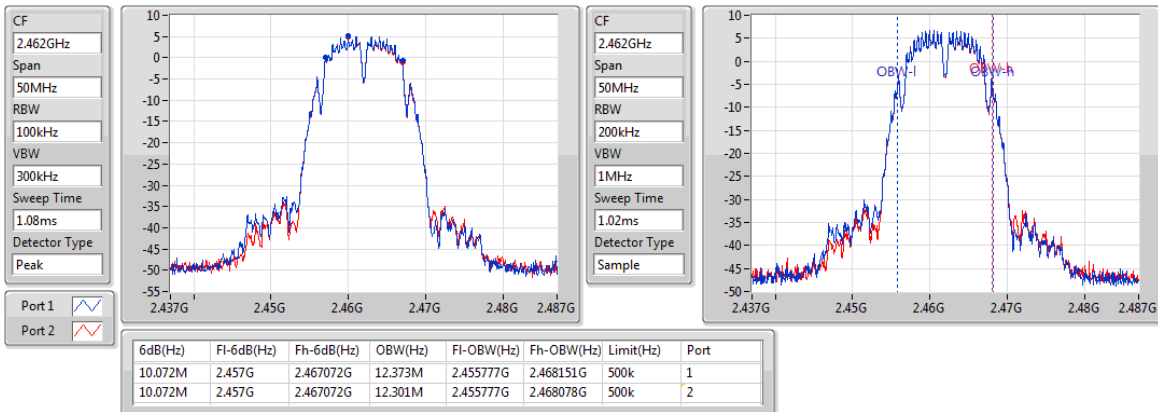

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


#### 2412MHz

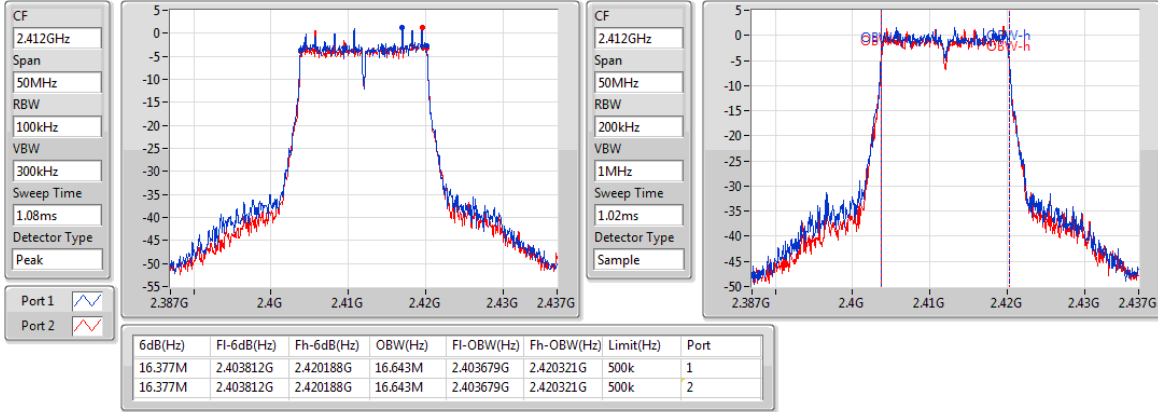

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


#### 2437MHz

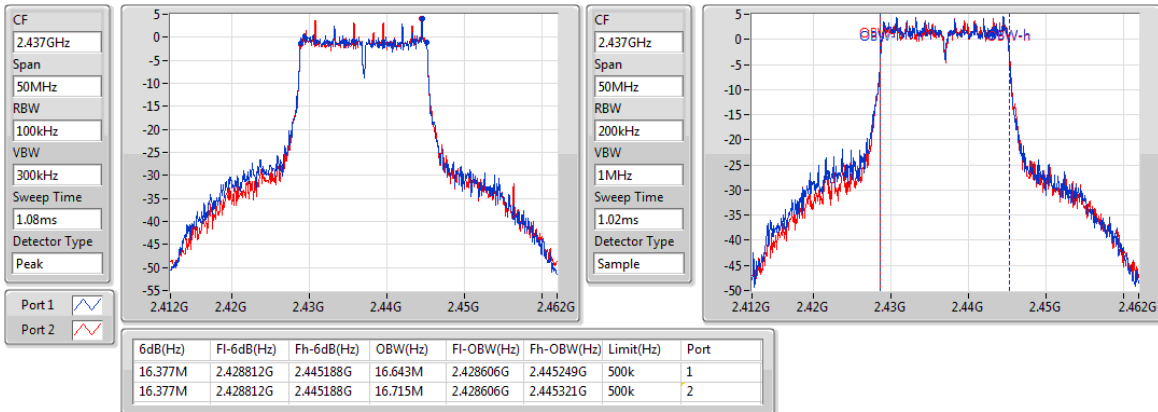

### 802.11g\_Nss1,(6Mbps)\_2TX

EBW


#### 2462MHz

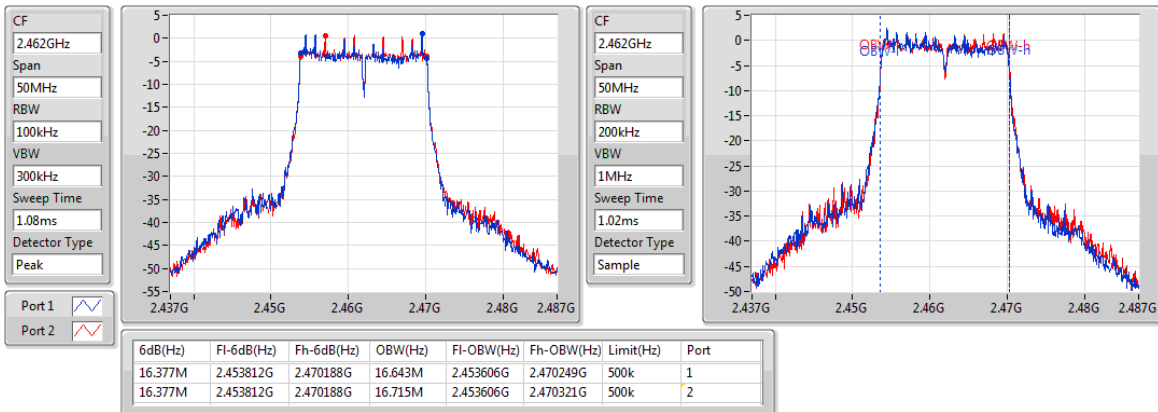

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


2412MHz

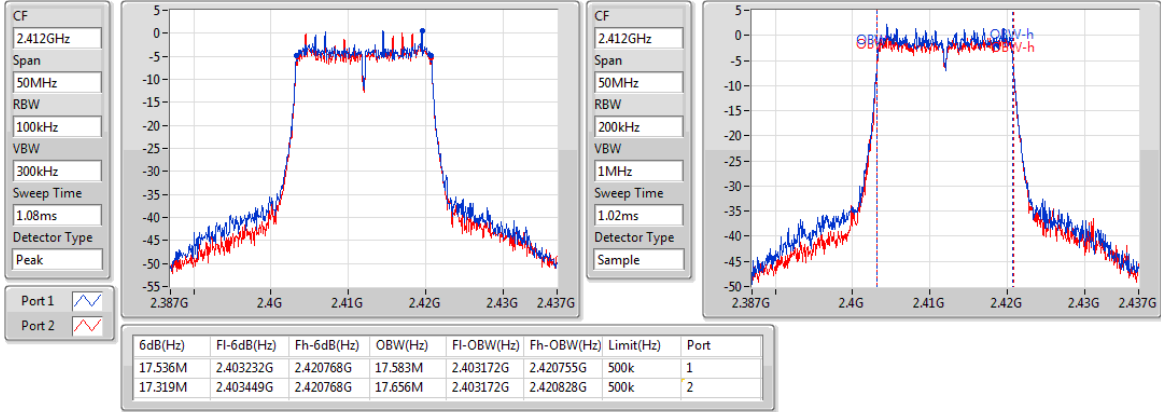

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


2437MHz

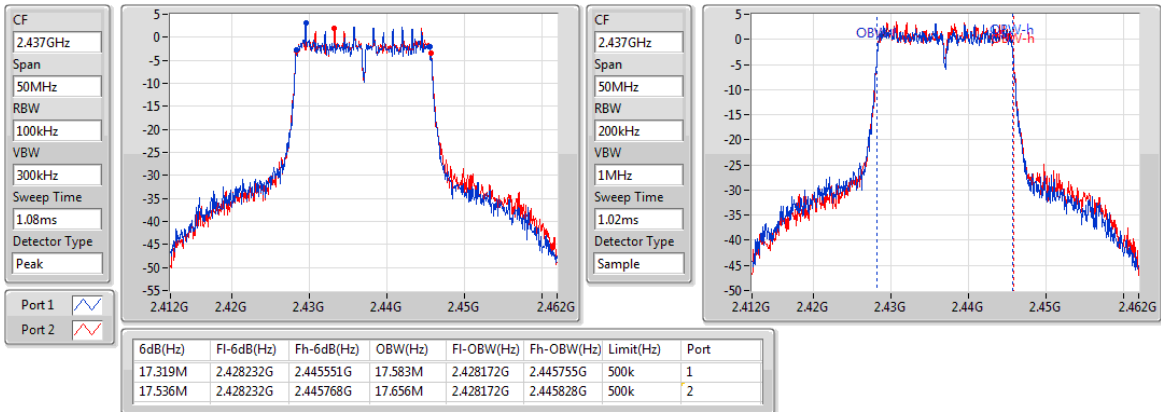

### 802.11n HT20\_Nss1,(MCS0)\_2TX

EBW


2462MHz

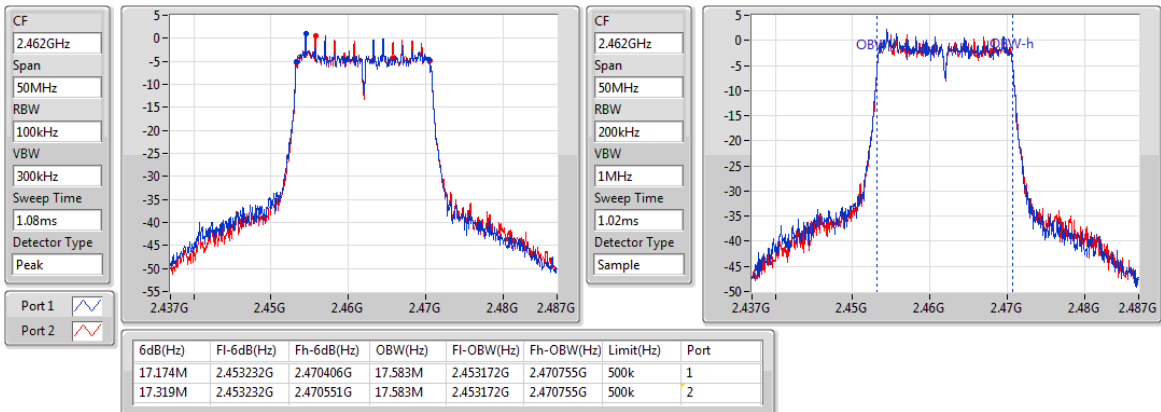

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW


2422MHz

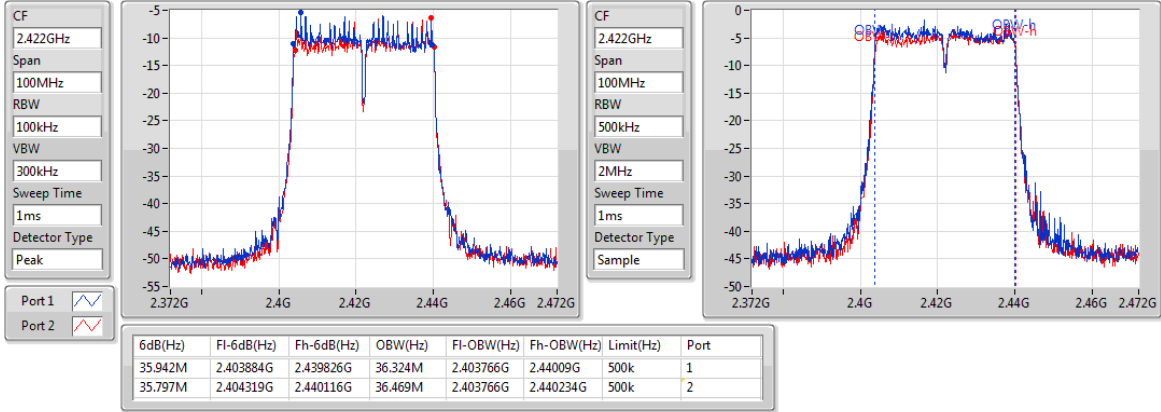

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW


2437MHz

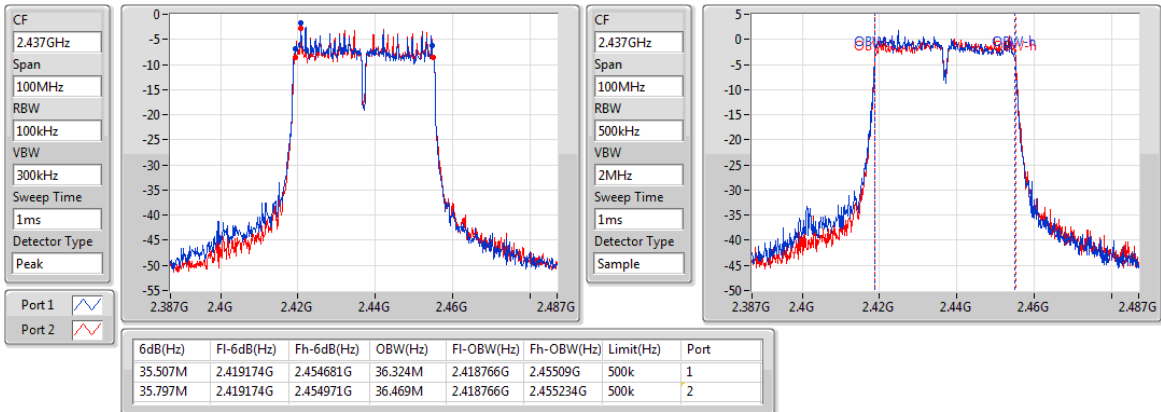

### 802.11n HT40\_Nss1,(MCS0)\_2TX

EBW

2452MHz

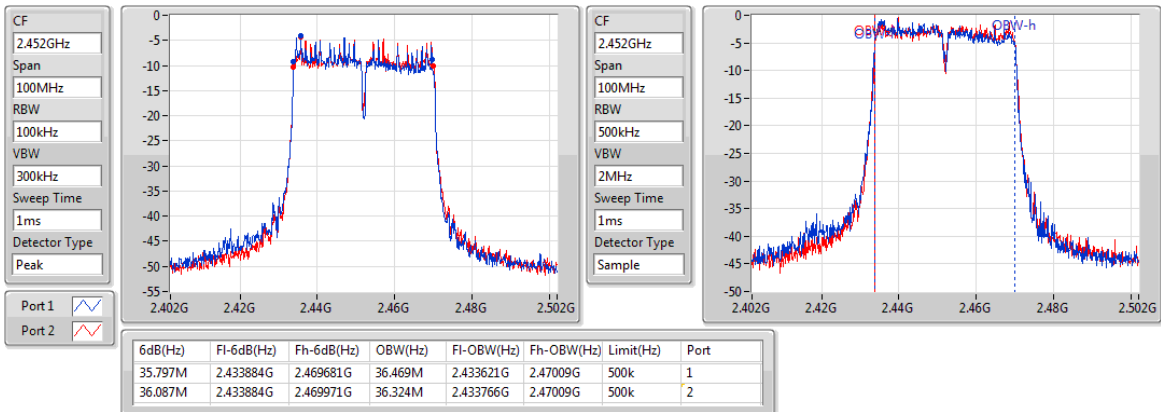

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup

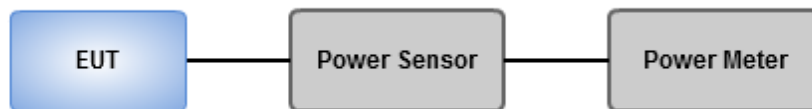

### 3.3.4 Test Result of Maximum Output Power

#### Summary of Peak Conducted Output Power

##### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	22.57	0.18072
802.11g_Nss1,(6Mbps)_2TX	24.90	0.30903
802.11n HT20_Nss1,(MCS0)_2TX	24.44	0.27797
802.11n HT40_Nss1,(MCS0)_2TX	21.86	0.15346

##### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	19.65	19.47	22.57	30.00	23.57	36.00
2437MHz	Pass	1.00	19.61	19.43	22.53	30.00	23.53	36.00
2462MHz	Pass	1.00	19.25	16.54	21.11	30.00	22.11	36.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	21.31	21.14	24.24	30.00	25.24	36.00
2437MHz	Pass	1.00	21.73	22.05	24.90	30.00	25.90	36.00
2462MHz	Pass	1.00	21.02	20.66	23.85	30.00	24.85	36.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	20.84	20.43	23.65	30.00	24.65	36.00
2437MHz	Pass	1.00	21.30	21.55	24.44	30.00	25.44	36.00
2462MHz	Pass	1.00	20.49	19.82	23.18	30.00	24.18	36.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	1.00	16.42	16.01	19.23	30.00	20.23	36.00
2437MHz	Pass	1.00	18.97	18.73	21.86	30.00	22.86	36.00
2452MHz	Pass	1.00	17.41	17.03	20.23	30.00	21.23	36.00

DG = Directional Gain; Port X = Port X output power

## Summary of Conducted (Average) Output Power

### Summary

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
802.11b_Nss1,(1Mbps)_2TX	19.26	0.08433
802.11g_Nss1,(6Mbps)_2TX	18.09	0.06442
802.11n HT20_Nss1,(MCS0)_2TX	17.12	0.05152
802.11n HT40_Nss1,(MCS0)_2TX	14.16	0.02606

### Result

Mode	Result	DG (dBi)	Port 1 (dBm)	Port 2 (dBm)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
802.11b_Nss1,(1Mbps)_2 TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	16.37	16.12	19.26	-	20.26	-
2437MHz	Pass	1.00	16.34	16.10	19.23	-	20.23	-
2462MHz	Pass	1.00	16.05	16.35	19.21	-	20.21	-
802.11g_Nss1,(6Mbps)_2 TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	12.87	12.41	15.66	-	16.66	-
2437MHz	Pass	1.00	15.01	15.14	18.09	-	19.09	-
2462MHz	Pass	1.00	12.36	12.45	15.42	-	16.42	-
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2412MHz	Pass	1.00	12.36	11.86	15.13	-	16.13	-
2437MHz	Pass	1.00	14.04	14.18	17.12	-	18.12	-
2462MHz	Pass	1.00	11.95	11.93	14.95	-	15.95	-
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
2422MHz	Pass	1.00	8.56	8.25	11.42	-	12.42	-
2437MHz	Pass	1.00	11.28	11.01	14.16	-	15.16	-
2452MHz	Pass	1.00	9.66	9.38	12.53	-	13.53	-

DG = Directional Gain; Port X = Port X output power

Note : Conducted average output power is for reference only

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup





### 3.4.4 Test Result of Power Spectral Density

#### Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
802.11b_Nss1,(1Mbps)_2TX	-10.04
802.11g_Nss1,(6Mbps)_2TX	-10.39
802.11n HT20_Nss1,(MCS0)_2TX	-11.16
802.11n HT40_Nss1,(MCS0)_2TX	-16.46

#### Result

Mode	Result	DG (dBi)	Port 1 (dBm/RBW)	Port 2 (dBm/RBW)	PD (dBm/RBW)	PD Limit (dBm/RBW)
802.11b_Nss1,(1Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-13.14	-13.29	-10.20	8.00
2437MHz	Pass	4.01	-12.96	-13.07	-10.04	8.00
2462MHz	Pass	4.01	-13.49	-13.51	-10.50	8.00
802.11g_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-15.62	-15.12	-13.24	8.00
2437MHz	Pass	4.01	-12.78	-12.71	-10.39	8.00
2462MHz	Pass	4.01	-15.81	-15.44	-12.70	8.00
802.11n HT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2412MHz	Pass	4.01	-15.06	-16.12	-13.28	8.00
2437MHz	Pass	4.01	-13.82	-13.83	-11.16	8.00
2462MHz	Pass	4.01	-15.86	-16.08	-13.68	8.00
802.11n HT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
2422MHz	Pass	4.01	-21.62	-23.07	-19.56	8.00
2437MHz	Pass	4.01	-18.64	-19.32	-16.46	8.00
2452MHz	Pass	4.01	-20.40	-20.63	-17.91	8.00


DG = Directional Gain=  $1 + 10 \cdot \log(2/1) = 4.01$  dBi;

PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; **Port X** = Port X power density;

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2412MHz

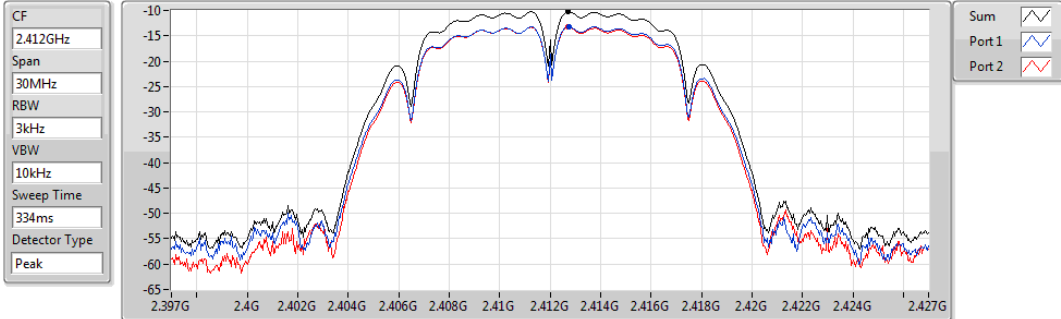


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.20	-10.20	-13.14	-13.29

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2437MHz

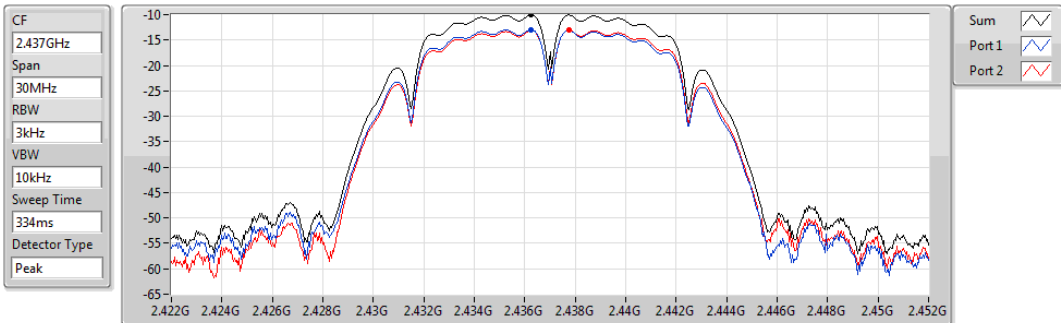


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.04	-10.04	-12.96	-13.07

### 802.11b\_Nss1,(1Mbps)\_2TX

PSD

2462MHz

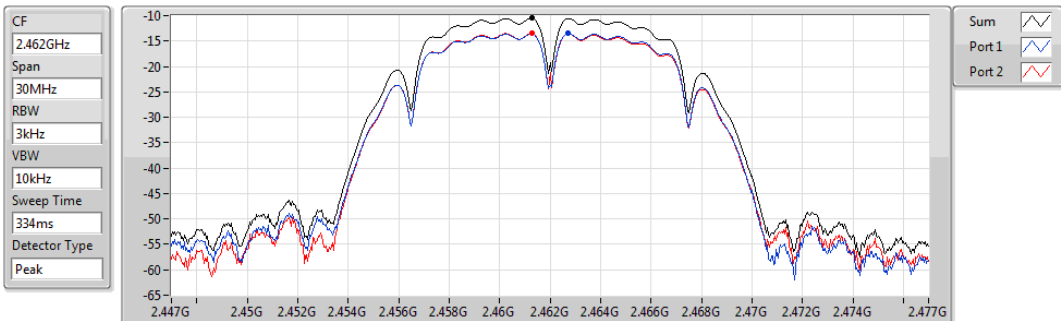


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.50	-10.50	-13.49	-13.51

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2412MHz

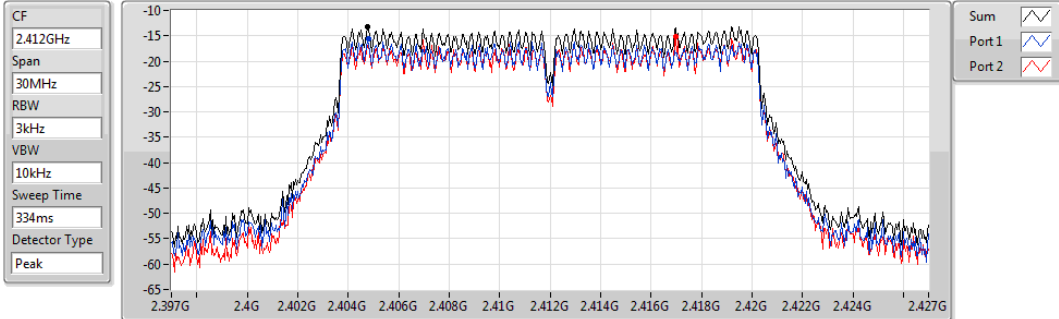


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-13.24	-13.24	-15.62	-15.12

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2437MHz

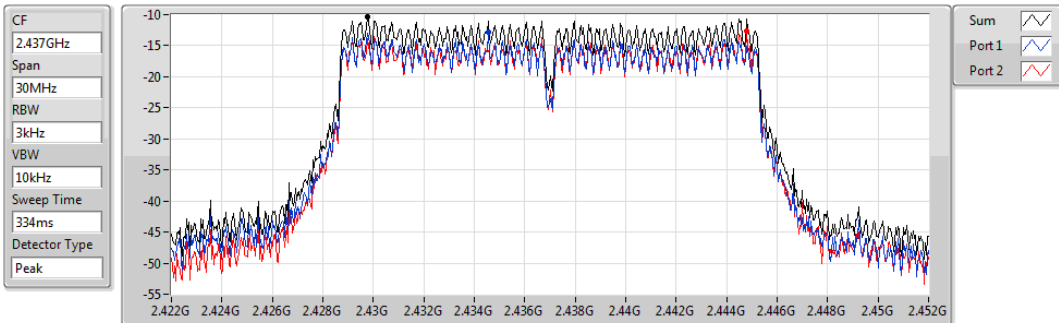


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-10.39	-10.39	-12.78	-12.71

### 802.11g\_Nss1,(6Mbps)\_2TX

PSD

2462MHz

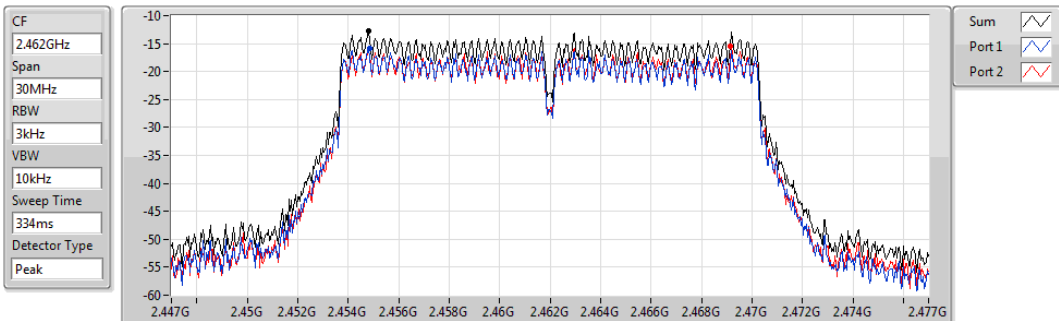


Sum	PD	Port 1	Port 2
(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)	(dBm/100kHz)
-12.70	-12.70	-15.81	-15.44

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2412MHz

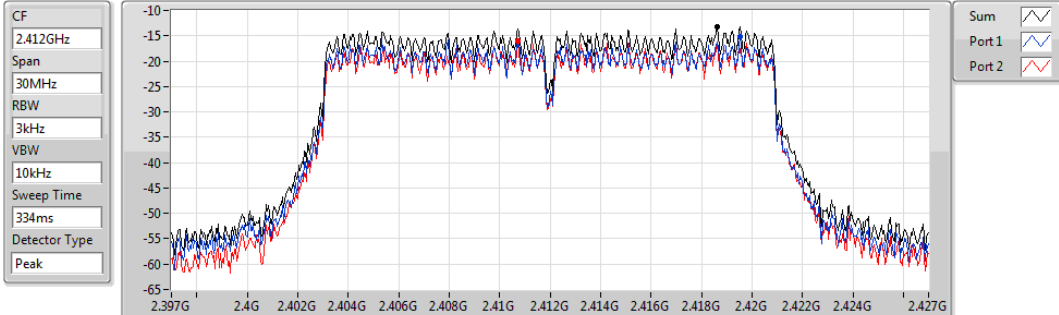


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.28	-13.28	-15.06	-16.12

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2437MHz

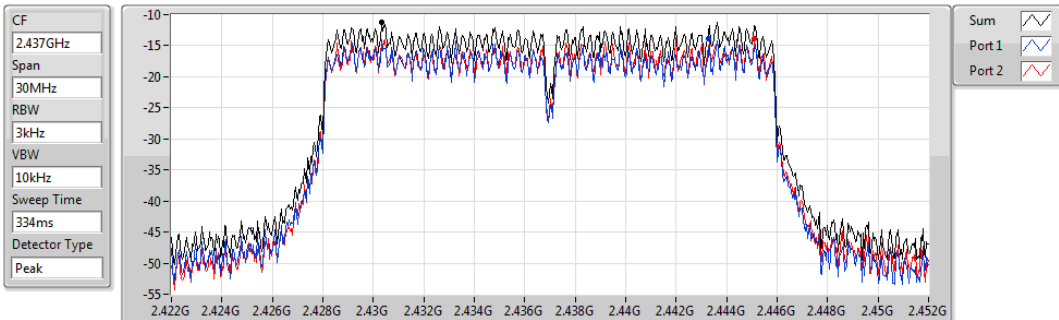


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-11.16	-11.16	-13.82	-13.83

### 802.11n HT20\_Nss1,(MCS0)\_2TX

PSD

2462MHz

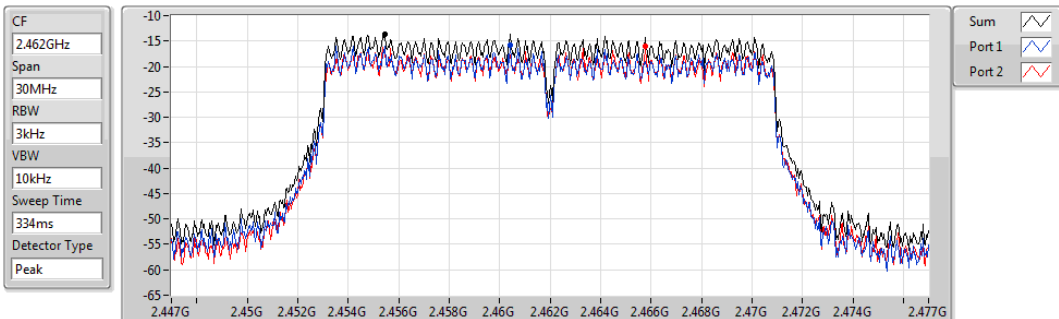


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-13.68	-13.68	-15.86	-16.08

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2422MHz

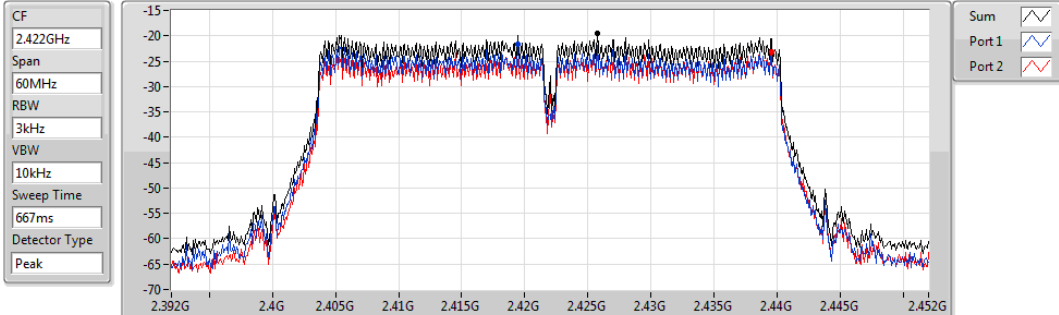


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-19.56	-19.56	-21.62	-23.07

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2437MHz

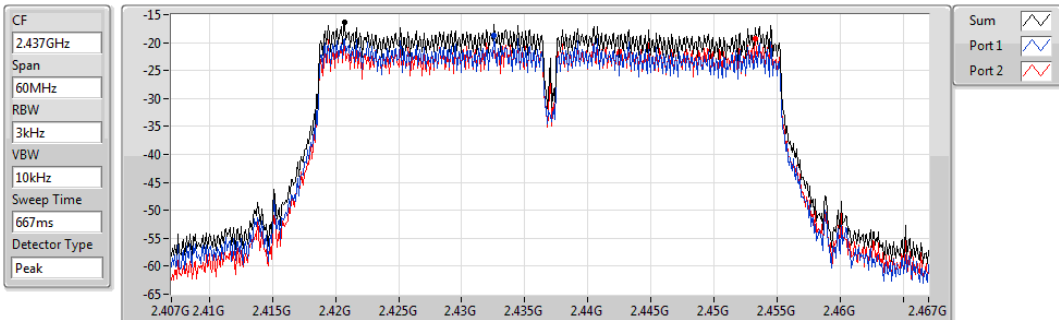


Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-16.46	-16.46	-18.64	-19.32

### 802.11n HT40\_Nss1,(MCS0)\_2TX

PSD

2452MHz

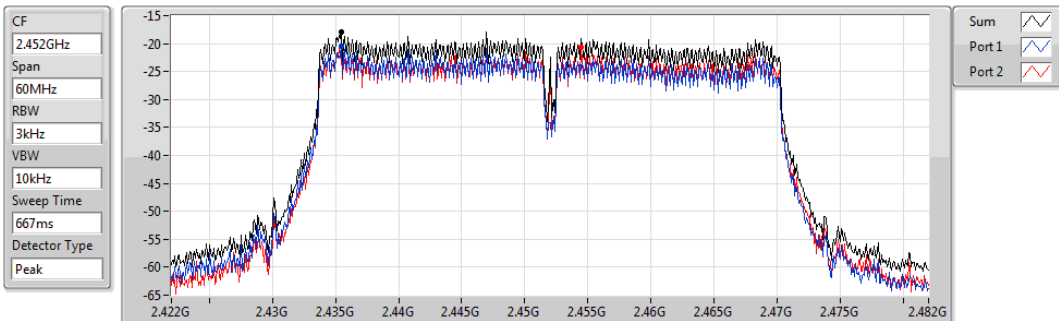

Sum	PD	Port 1	Port 2
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-17.91	-17.91	-20.40	-20.63

## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.


### 3.5.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.


### 3.5.3 Test Setup

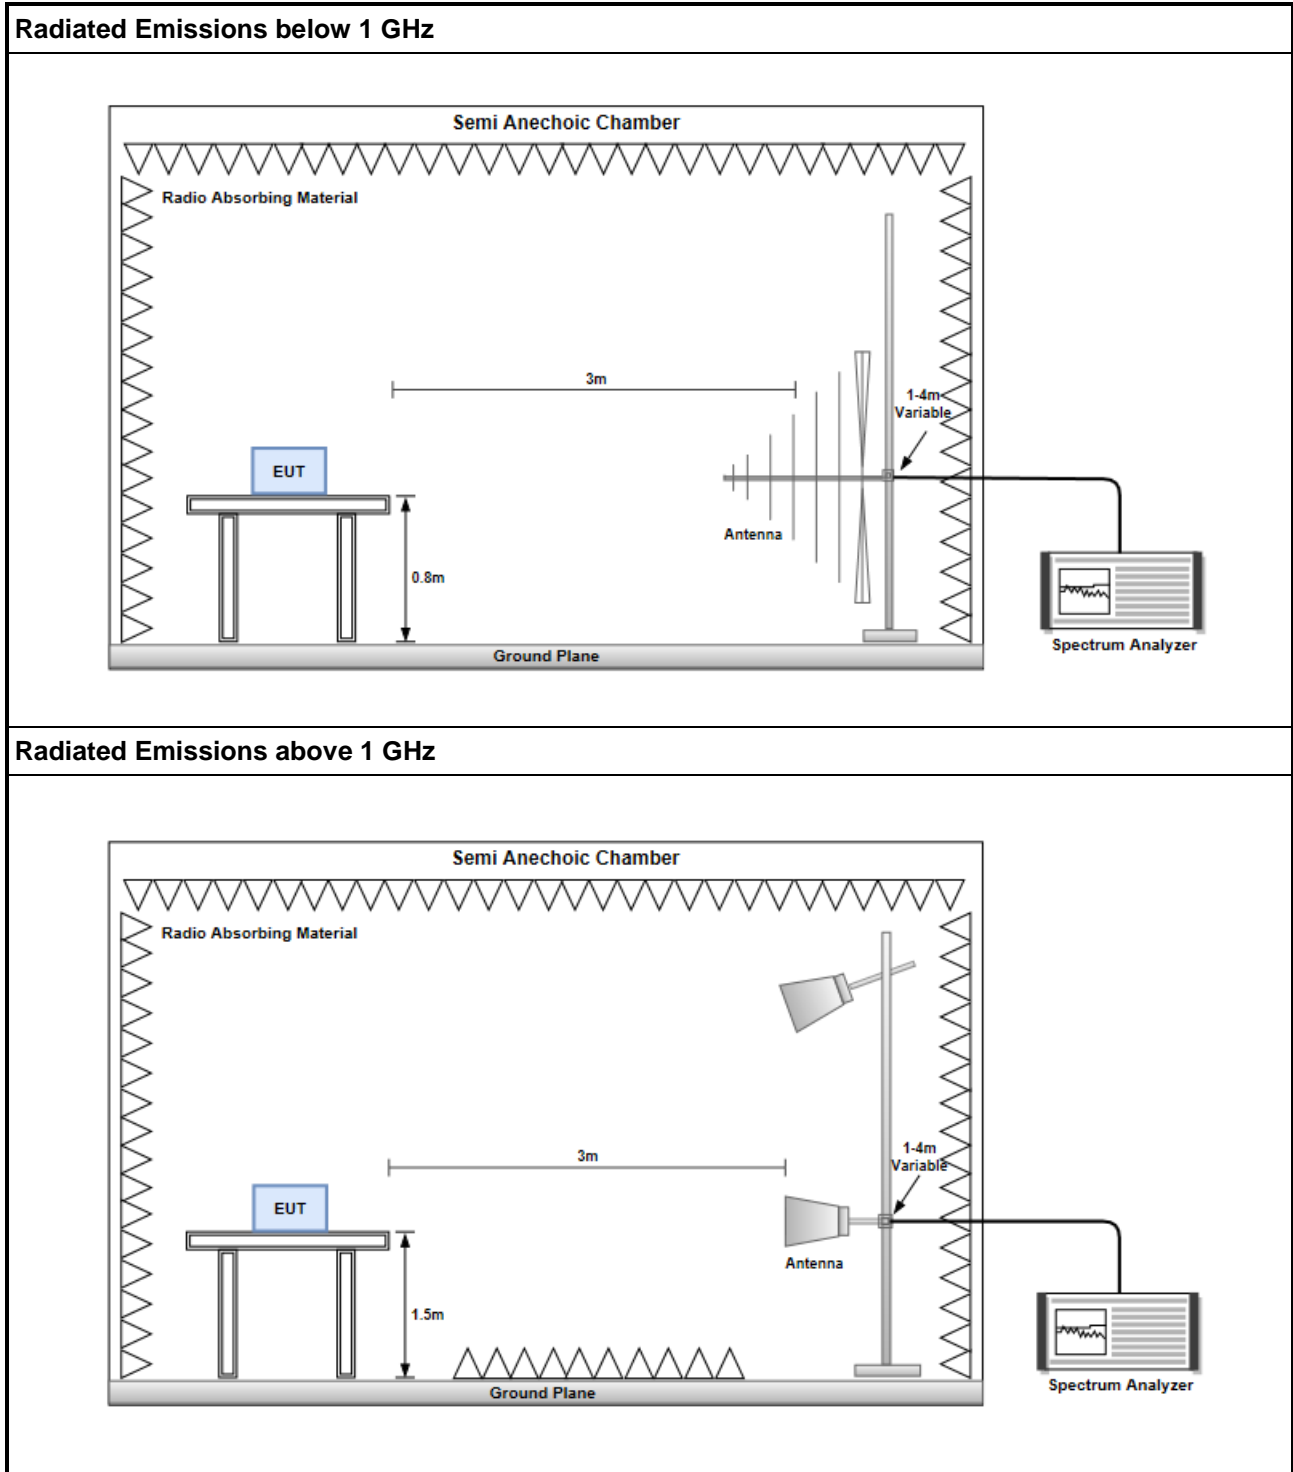

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

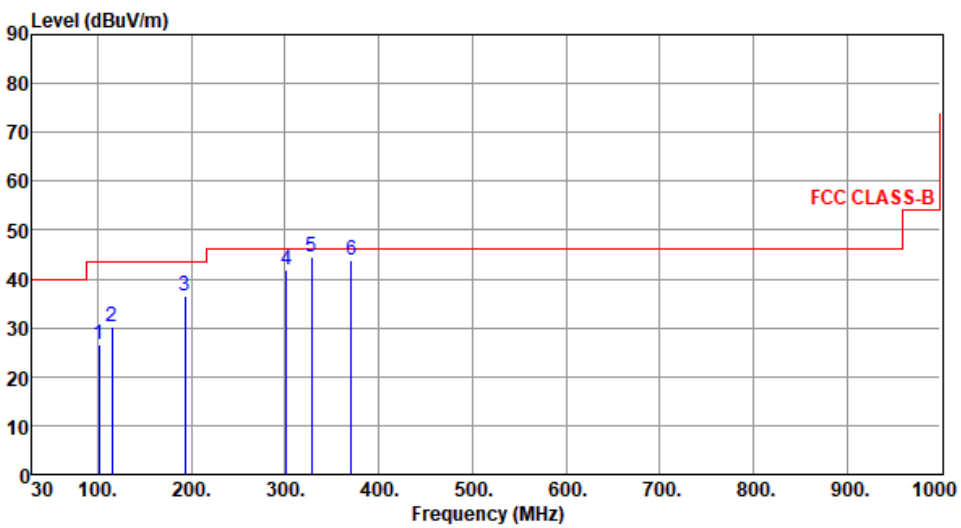


The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 45 dBuV/m from 100 to 300 MHz, 46 dBuV/m from 300 to 1000 MHz, and 55 dBuV/m from 1000 to 10000 MHz. Six blue vertical lines indicate measured peaks at 101.78 MHz (labeled 2), 192.96 MHz (labeled 3), 301.60 MHz (labeled 4), 328.65 MHz (labeled 5), and 370.36 MHz (labeled 6). The peak at 370.36 MHz is the highest, reaching approximately 43.68 dBuV/m.

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	101.78	26.62	43.50	-16.88	39.90	-13.28	Peak	---	---
2	115.36	30.36	43.50	-13.14	41.88	-11.52	Peak	---	---
3	192.96	36.37	43.50	-7.13	47.96	-11.59	Peak	---	---
4	301.60	41.79	46.00	-4.21	50.09	-8.30	Peak	---	---
5	328.65	44.34	46.00	-1.66	51.64	-7.30	QP	100	112
6	370.36	43.68	46.00	-2.32	50.13	-6.45	QP	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

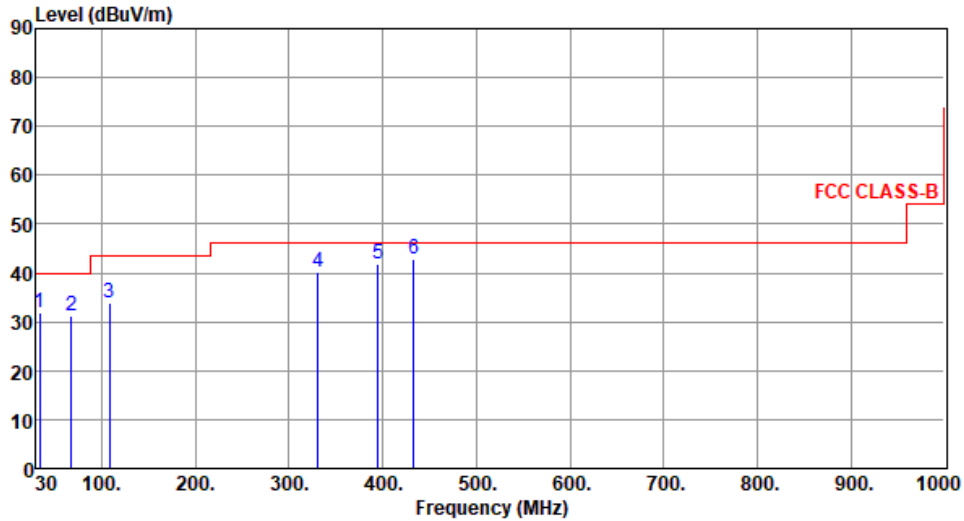

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	33.88	32.02	40.00	-7.98	41.88	-9.86	Peak	---	---
2	67.83	31.31	40.00	-8.69	41.60	-10.29	Peak	---	---
3	108.57	33.95	43.50	-9.55	46.18	-12.23	Peak	---	---
4	330.70	40.25	46.00	-5.75	47.50	-7.25	Peak	---	---
5	395.45	41.90	46.00	-4.10	47.56	-5.66	QP	100	202
6	433.52	42.70	46.00	-3.30	47.21	-4.51	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

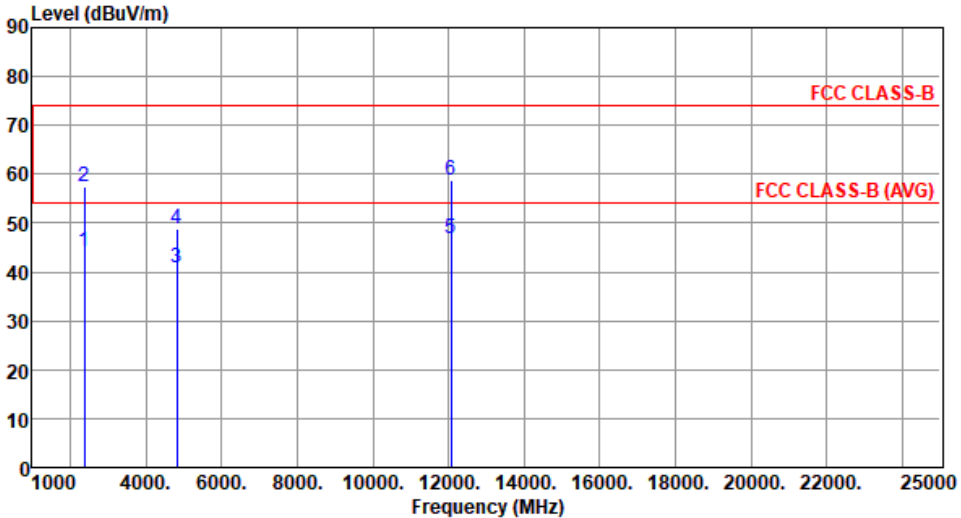Modulation	11b	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.15	54.00	-9.85	43.91	0.24	Average	100	216
2	2390.00	57.46	74.00	-16.54	57.22	0.24	Peak	100	216
3	4824.00	40.75	54.00	-13.25	34.25	6.50	Average	256	95
4	4824.00	48.84	74.00	-25.16	42.34	6.50	Peak	256	95
5	12060.00	46.78	54.00	-7.22	30.54	16.24	Average	100	80
6	12060.00	58.88	74.00	-15.12	42.64	16.24	Peak	100	80

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

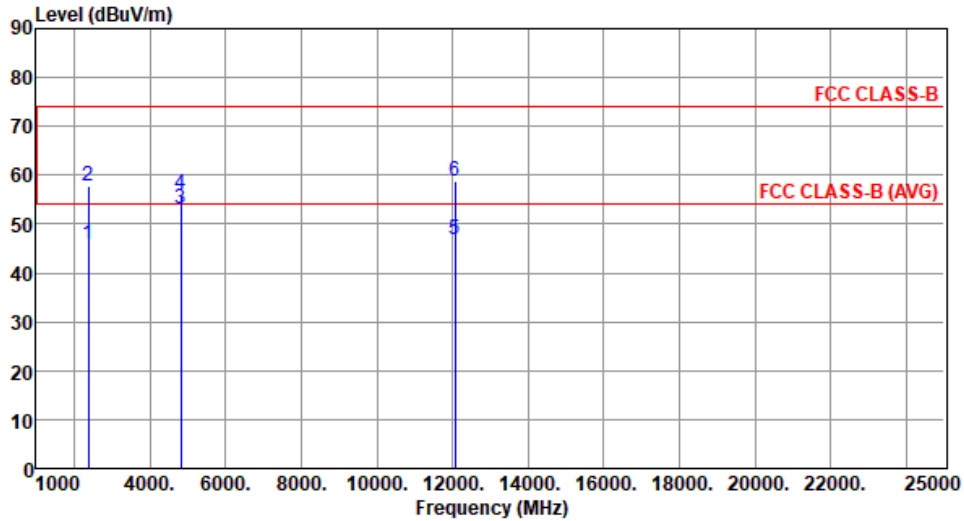


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.73	54.00	-8.27	45.49	0.24	Average	173	158
2	2390.00	57.87	74.00	-16.13	57.63	0.24	Peak	173	158
3	4824.00	53.00	54.00	-1.00	46.50	6.50	Average	118	174
4	4824.00	56.24	74.00	-17.76	49.74	6.50	Peak	118	174
5	12060.00	46.80	54.00	-7.20	30.56	16.24	Average	100	30
6	12060.00	58.82	74.00	-15.18	42.58	16.24	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

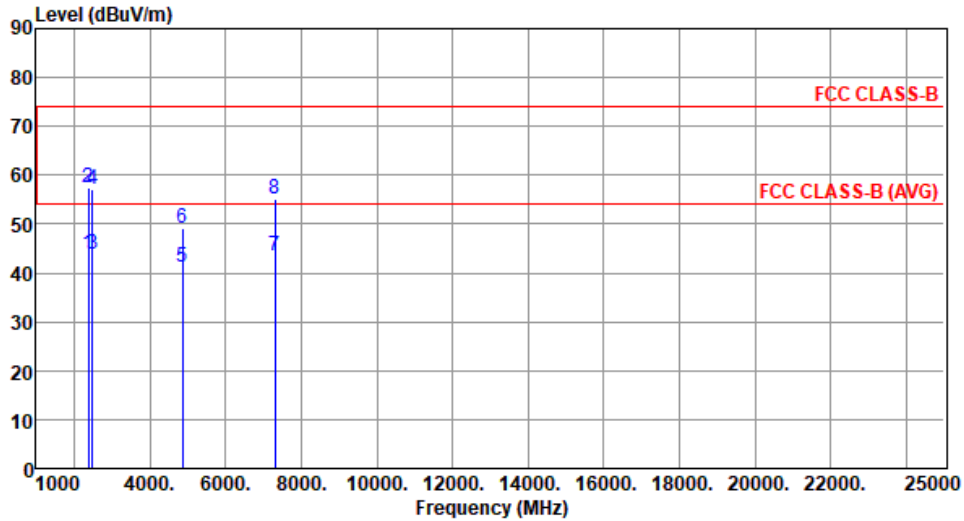


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	43.99	54.00	-10.01	43.75	0.24	Average	100	215
2	2390.00	57.36	74.00	-16.64	57.12	0.24	Peak	100	215
3	2483.50	43.91	54.00	-10.09	43.66	0.25	Average	100	215
4	2483.50	57.00	74.00	-17.00	56.75	0.25	Peak	100	215
5	4874.00	41.07	54.00	-12.93	34.59	6.48	Average	255	98
6	4874.00	49.23	74.00	-24.77	42.75	6.48	Peak	255	98
7	7311.00	43.37	54.00	-10.63	31.61	11.76	Average	226	168
8	7311.00	55.14	74.00	-18.86	43.38	11.76	Peak	226	168

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

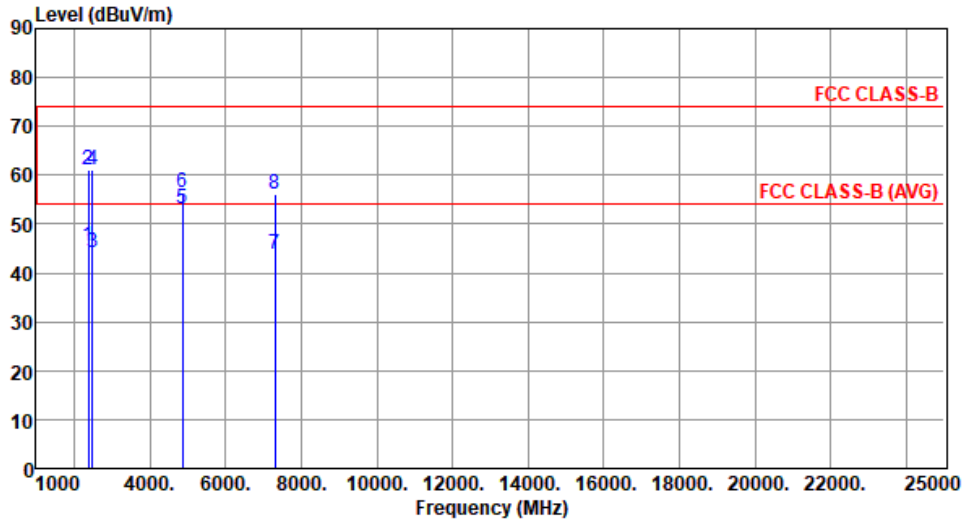


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.38	54.00	-8.62	45.14	0.24	Average	179	160
2	2390.00	61.18	74.00	-12.82	60.94	0.24	Peak	179	160
3	2483.50	44.02	54.00	-9.98	43.77	0.25	Average	179	160
4	2483.50	60.97	74.00	-13.03	60.72	0.25	Peak	179	160
5	4874.00	52.97	54.00	-1.03	46.49	6.48	Average	100	194
6	4874.00	56.46	74.00	-17.54	49.98	6.48	Peak	100	194
7	7311.00	43.94	54.00	-10.06	32.18	11.76	Average	206	204
8	7311.00	56.11	74.00	-17.89	44.35	11.76	Peak	206	204

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

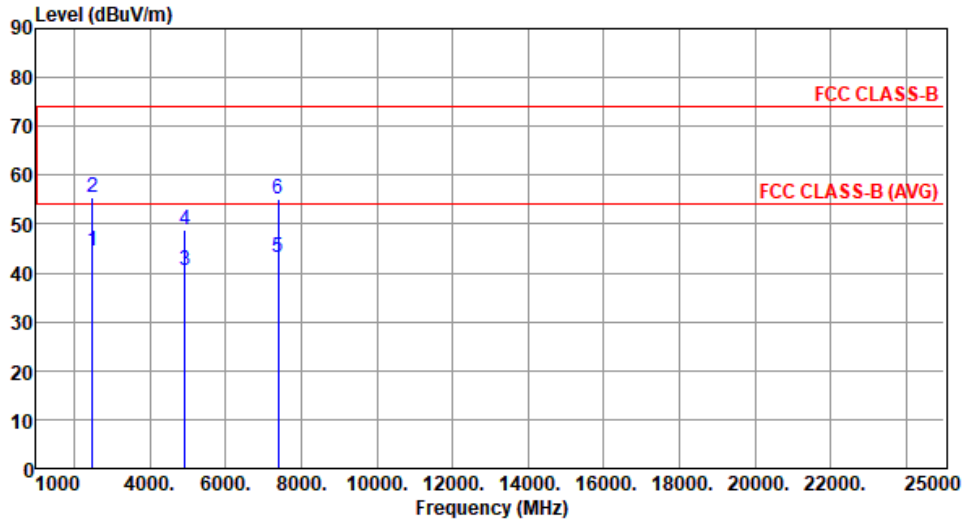


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.36	54.00	-9.64	44.11	0.25	Average	100	211
2	2483.50	55.59	74.00	-18.41	55.34	0.25	Peak	100	211
3	4924.00	40.63	54.00	-13.37	34.12	6.51	Average	245	96
4	4924.00	48.77	74.00	-25.23	42.26	6.51	Peak	245	96
5	7386.00	43.21	54.00	-10.79	31.40	11.81	Average	218	165
6	7386.00	55.03	74.00	-18.97	43.22	11.81	Peak	218	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11b	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

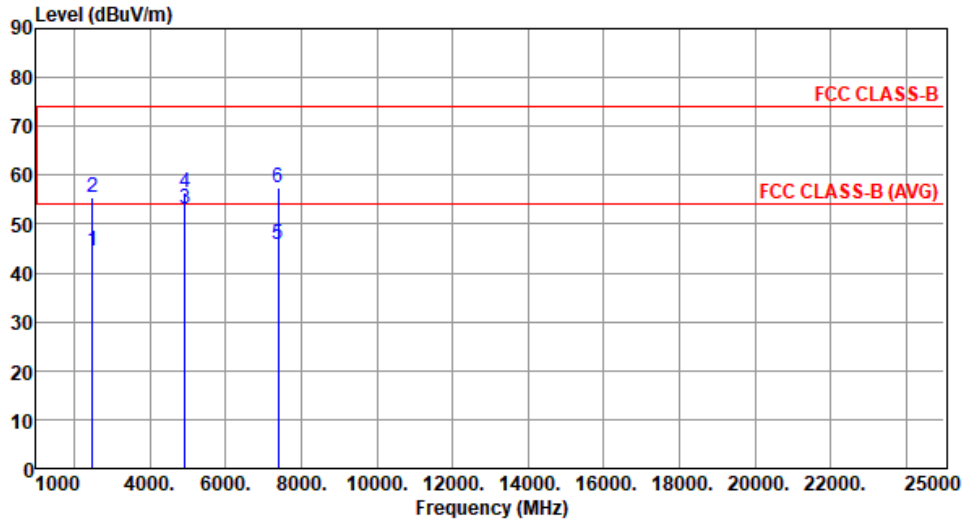


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.52	54.00	-9.48	44.27	0.25	Average	160	175
2	2483.50	55.62	74.00	-18.38	55.37	0.25	Peak	160	175
3	4924.00	52.98	54.00	-1.02	46.47	6.51	Average	115	176
4	4924.00	56.37	74.00	-17.63	49.86	6.51	Peak	115	176
5	7386.00	45.75	54.00	-8.25	33.94	11.81	Average	236	190
6	7386.00	57.39	74.00	-16.61	45.58	11.81	Peak	236	190

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

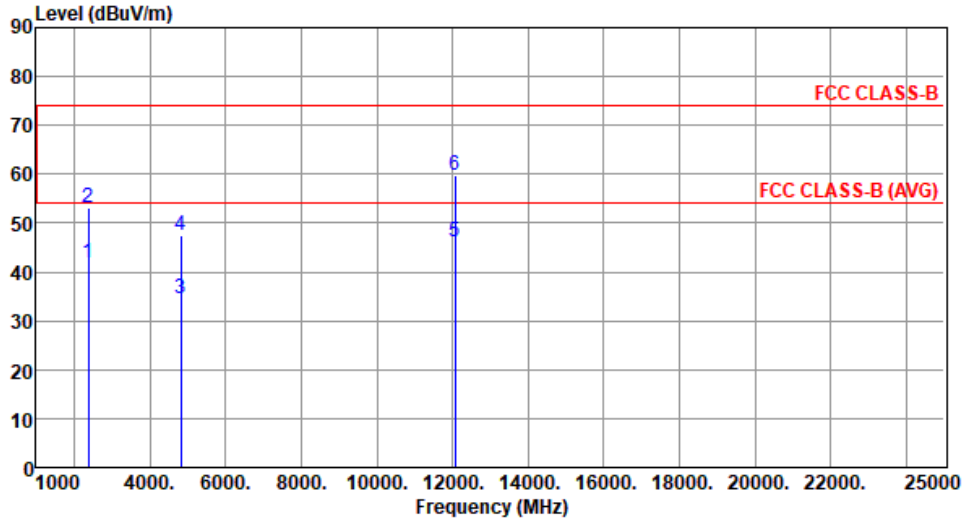Modulation	11g	Test Freq. (MHz)	2412						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.95	54.00	-12.05	41.71	0.24	Average	110	98
2	2390.00	53.02	74.00	-20.98	52.78	0.24	Peak	110	98
3	4824.00	34.69	54.00	-19.31	28.19	6.50	Average	124	55
4	4824.00	47.58	74.00	-26.42	41.08	6.50	Peak	124	55
5	12060.00	46.14	54.00	-7.86	29.90	16.24	Average	105	94
6	12060.00	59.81	74.00	-14.19	43.57	16.24	Peak	105	94

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

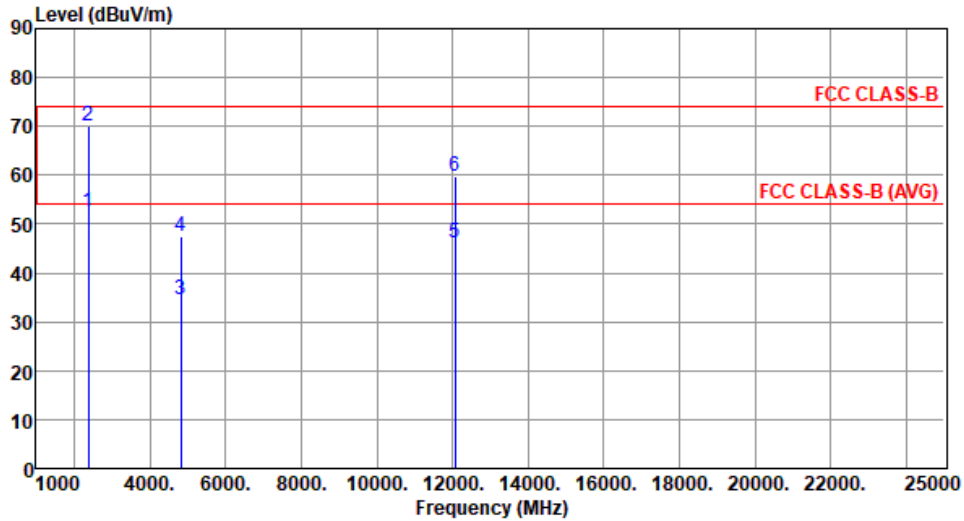


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.45	54.00	-1.55	52.21	0.24	Average	161	191
2	2390.00	70.11	74.00	-3.89	69.87	0.24	Peak	161	191
3	4824.00	34.61	54.00	-19.39	28.11	6.50	Average	145	112
4	4824.00	47.44	74.00	-26.56	40.94	6.50	Peak	145	112
5	12060.00	46.09	54.00	-7.91	29.85	16.24	Average	110	84
6	12060.00	59.69	74.00	-14.31	43.45	16.24	Peak	110	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

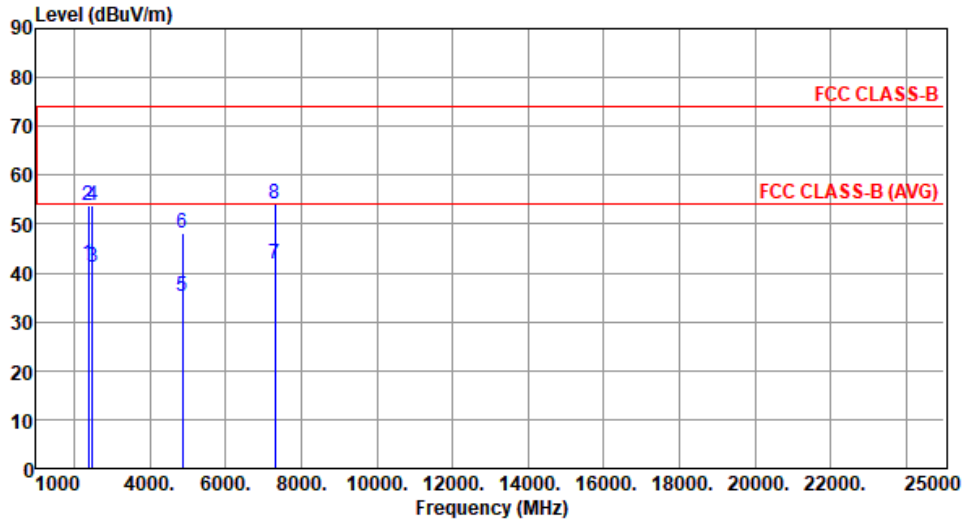


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.80	54.00	-12.20	41.56	0.24	Average	105	95
2	2390.00	53.83	74.00	-20.17	53.59	0.24	Peak	105	95
3	2483.50	41.28	54.00	-12.72	41.03	0.25	Average	105	95
4	2483.50	53.73	74.00	-20.27	53.48	0.25	Peak	105	95
5	4874.00	35.04	54.00	-18.96	28.56	6.48	Average	100	30
6	4874.00	48.00	74.00	-26.00	41.52	6.48	Peak	100	30
7	7311.00	42.00	54.00	-12.00	30.24	11.76	Average	100	203
8	7311.00	54.11	74.00	-19.89	42.35	11.76	Peak	100	203

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

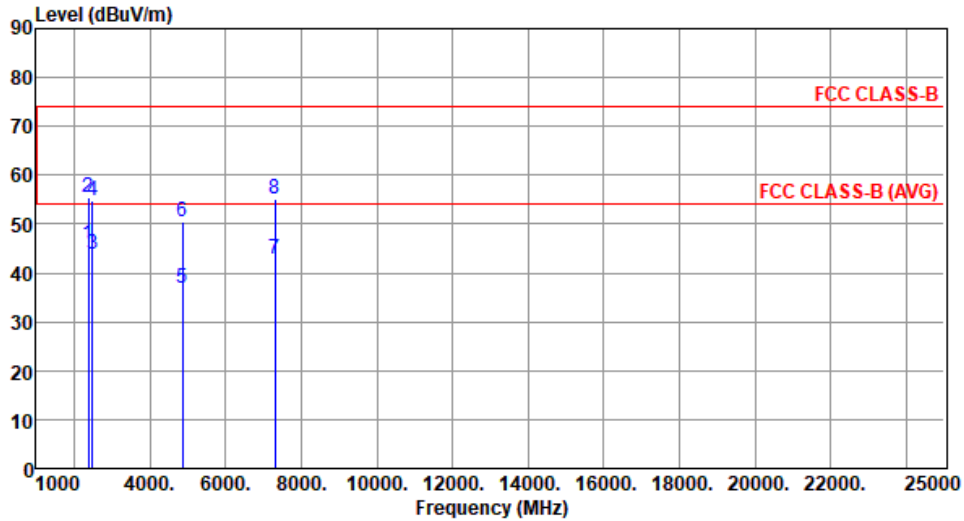


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	45.90	54.00	-8.10	45.66	0.24	Average	147	178
2	2390.00	55.50	74.00	-18.50	55.26	0.24	Peak	147	178
3	2483.50	43.81	54.00	-10.19	43.56	0.25	Average	147	178
4	2483.50	54.82	74.00	-19.18	54.57	0.25	Peak	147	178
5	4874.00	37.02	54.00	-16.98	30.54	6.48	Average	100	191
6	4874.00	50.41	74.00	-23.59	43.93	6.48	Peak	100	191
7	7311.00	42.91	54.00	-11.09	31.15	11.76	Average	135	198
8	7311.00	55.00	74.00	-19.00	43.24	11.76	Peak	135	198

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

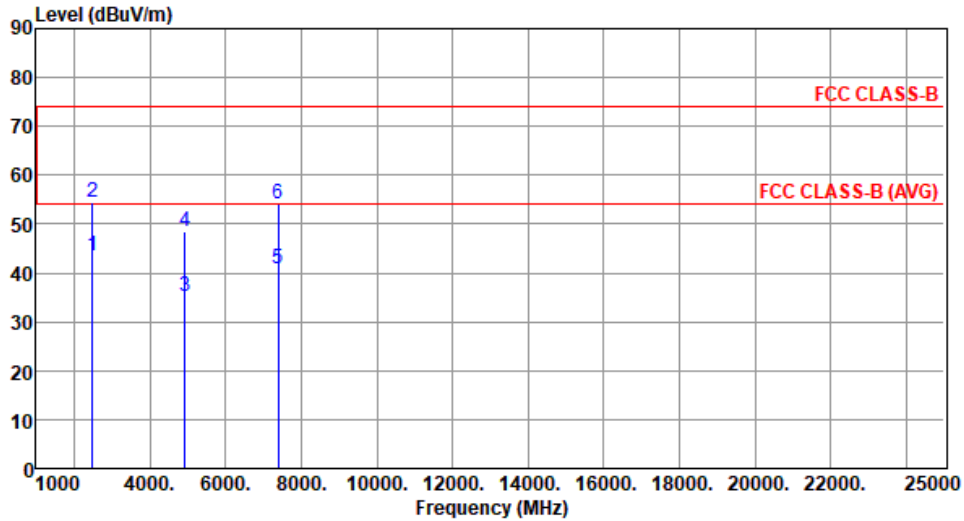


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.66	54.00	-10.34	43.41	0.25	Average	106	99
2	2483.50	54.52	74.00	-19.48	54.27	0.25	Peak	106	99
3	4924.00	35.26	54.00	-18.74	28.75	6.51	Average	119	48
4	4924.00	48.39	74.00	-25.61	41.88	6.51	Peak	119	48
5	7386.00	40.85	54.00	-13.15	29.04	11.81	Average	124	85
6	7386.00	54.04	74.00	-19.96	42.23	11.81	Peak	124	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	11g	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

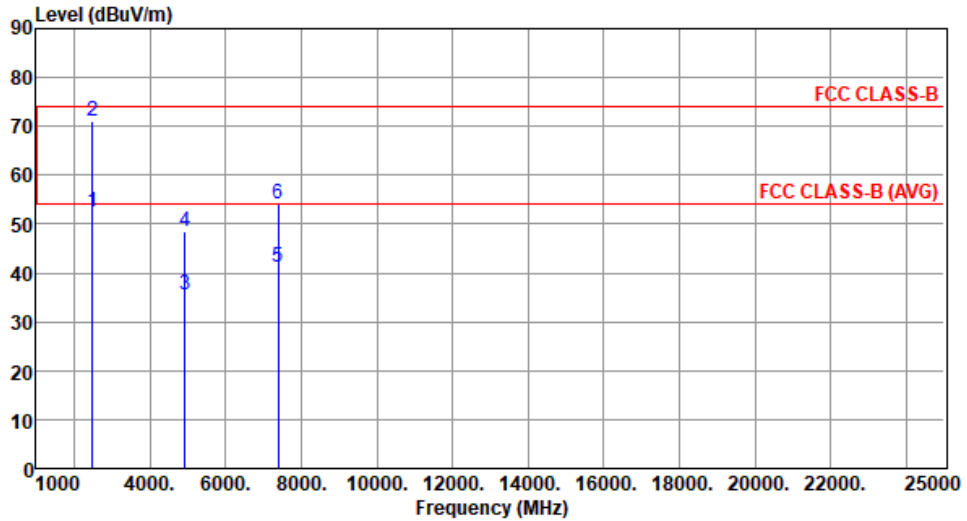

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.46	54.00	-1.54	52.21	0.25	Average	147	205
2	2483.50	71.06	74.00	-2.94	70.81	0.25	Peak	147	205
3	4924.00	35.37	54.00	-18.63	28.86	6.51	Average	125	53
4	4924.00	48.43	74.00	-25.57	41.92	6.51	Peak	125	53
5	7386.00	41.06	54.00	-12.94	29.25	11.81	Average	114	61
6	7386.00	54.14	74.00	-19.86	42.33	11.81	Peak	114	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Horizontal		


  

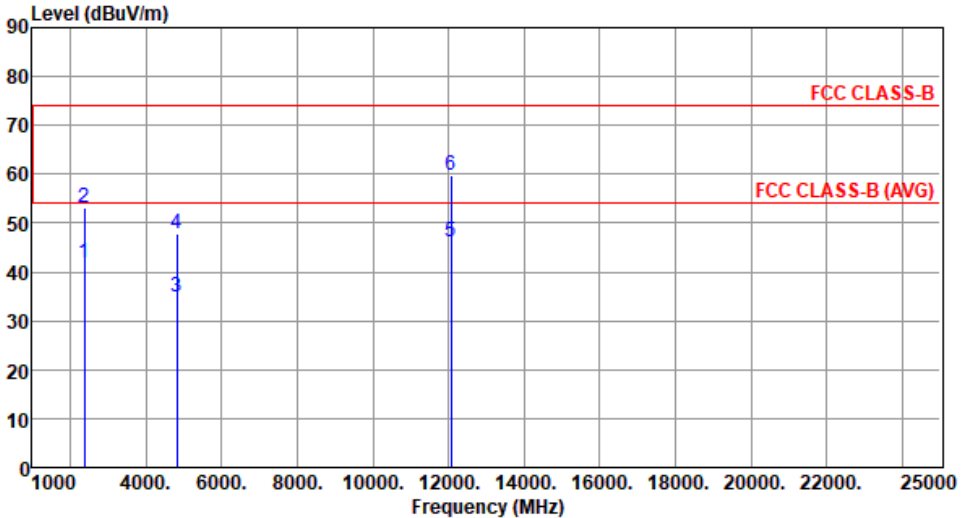

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.98	54.00	-12.02	41.74	0.24	Average	105	100
2	2390.00	53.15	74.00	-20.85	52.91	0.24	Peak	105	100
3	4824.00	34.72	54.00	-19.28	28.22	6.50	Average	121	49
4	4824.00	47.68	74.00	-26.32	41.18	6.50	Peak	121	49
5	12060.00	46.22	54.00	-7.78	29.98	16.24	Average	110	67
6	12060.00	59.93	74.00	-14.07	43.69	16.24	Peak	110	67

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2412
<b>Polarization</b>	Vertical		

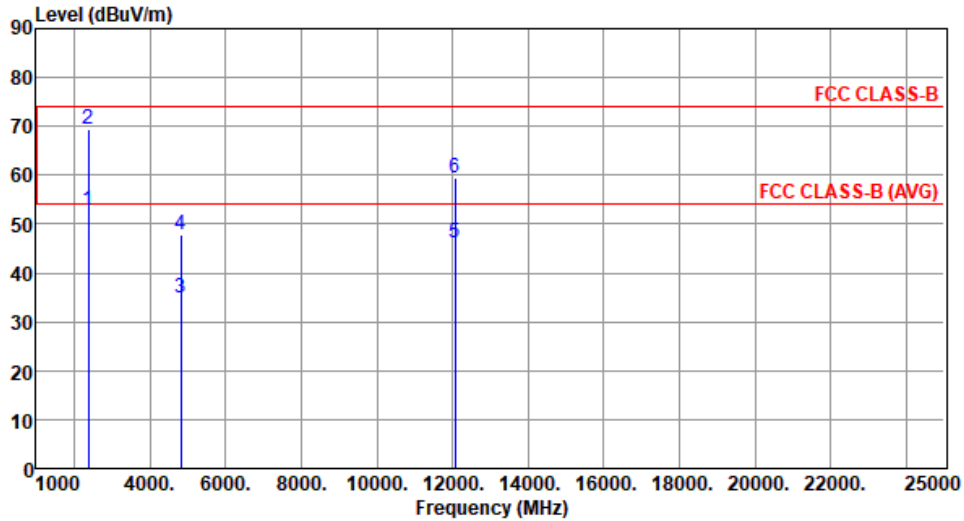


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.78	54.00	-1.22	52.54	0.24	Average	166	143
2	2390.00	69.57	74.00	-4.43	69.33	0.24	Peak	166	143
3	4824.00	34.94	54.00	-19.06	28.44	6.50	Average	159	38
4	4824.00	47.91	74.00	-26.09	41.41	6.50	Peak	159	38
5	12060.00	46.09	54.00	-7.91	29.85	16.24	Average	145	54
6	12060.00	59.45	74.00	-14.55	43.21	16.24	Peak	145	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

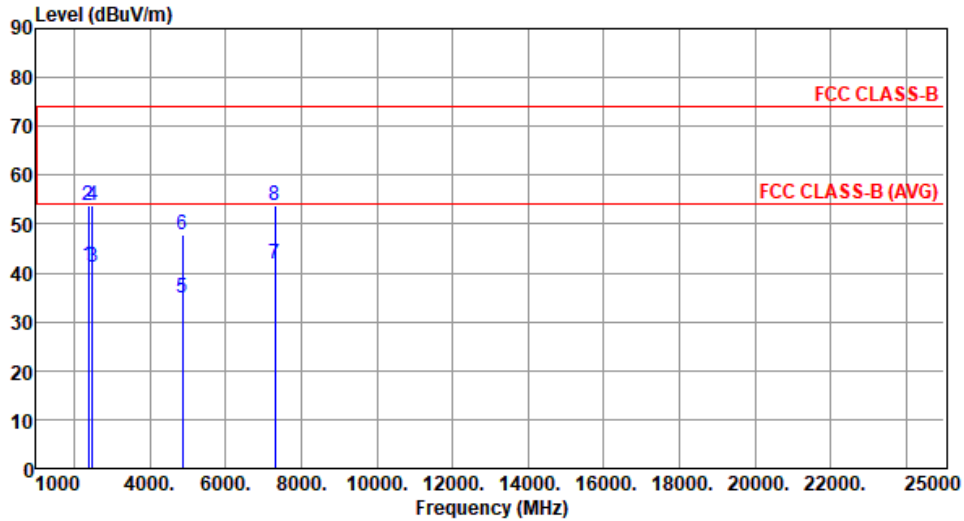

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.45	54.00	-12.55	41.21	0.24	Average	106	95
2	2390.00	53.85	74.00	-20.15	53.61	0.24	Peak	106	95
3	2483.50	41.32	54.00	-12.68	41.07	0.25	Average	106	95
4	2483.50	53.85	74.00	-20.15	53.60	0.25	Peak	106	95
5	4874.00	34.90	54.00	-19.10	28.42	6.48	Average	100	20
6	4874.00	47.74	74.00	-26.26	41.26	6.48	Peak	100	20
7	7311.00	41.87	54.00	-12.13	30.11	11.76	Average	100	205
8	7311.00	53.90	74.00	-20.10	42.14	11.76	Peak	100	205


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

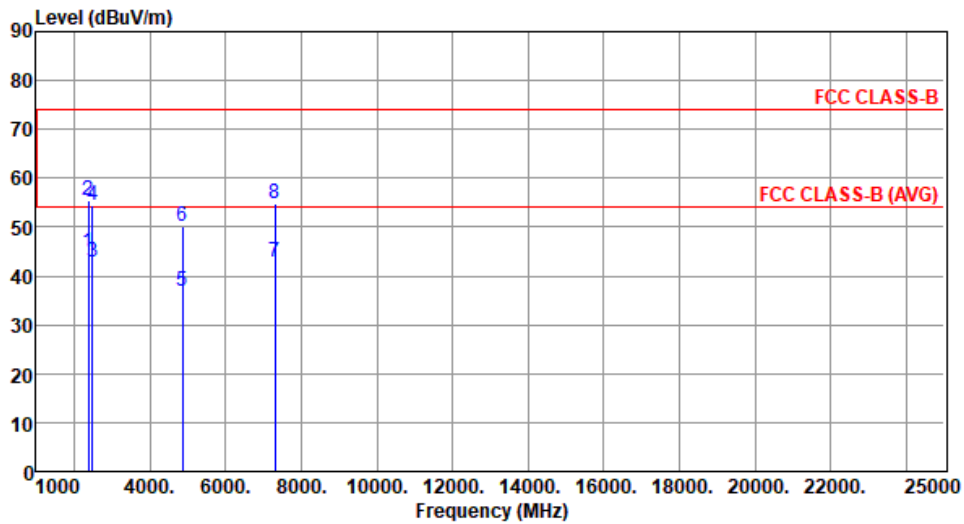


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	44.77	54.00	-9.23	44.53	0.24	Average	148	179
2	2390.00	55.55	74.00	-18.45	55.31	0.24	Peak	148	179
3	2483.50	42.95	54.00	-11.05	42.70	0.25	Average	148	179
4	2483.50	54.47	74.00	-19.53	54.22	0.25	Peak	148	179
5	4874.00	36.79	54.00	-17.21	30.31	6.48	Average	100	195
6	4874.00	50.04	74.00	-23.96	43.56	6.48	Peak	100	195
7	7311.00	42.80	54.00	-11.20	31.04	11.76	Average	125	198
8	7311.00	54.93	74.00	-19.07	43.17	11.76	Peak	125	198

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Horizontal		

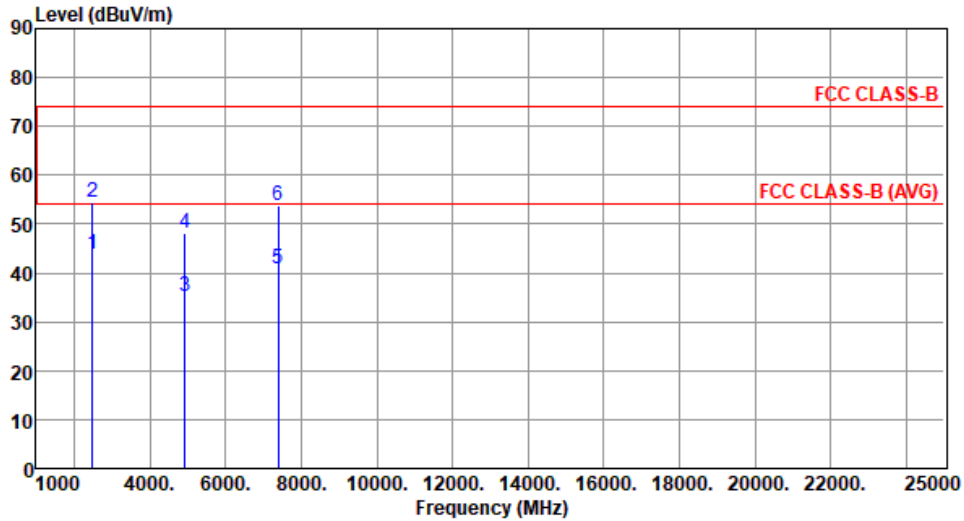


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	43.81	54.00	-10.19	43.56	0.25	Average	108	94
2	2483.50	54.62	74.00	-19.38	54.37	0.25	Peak	108	94
3	4924.00	35.15	54.00	-18.85	28.64	6.51	Average	121	84
4	4924.00	48.26	74.00	-25.74	41.75	6.51	Peak	121	84
5	7386.00	40.78	54.00	-13.22	28.97	11.81	Average	122	91
6	7386.00	53.96	74.00	-20.04	42.15	11.81	Peak	122	91

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT20	<b>Test Freq. (MHz)</b>	2462
<b>Polarization</b>	Vertical		

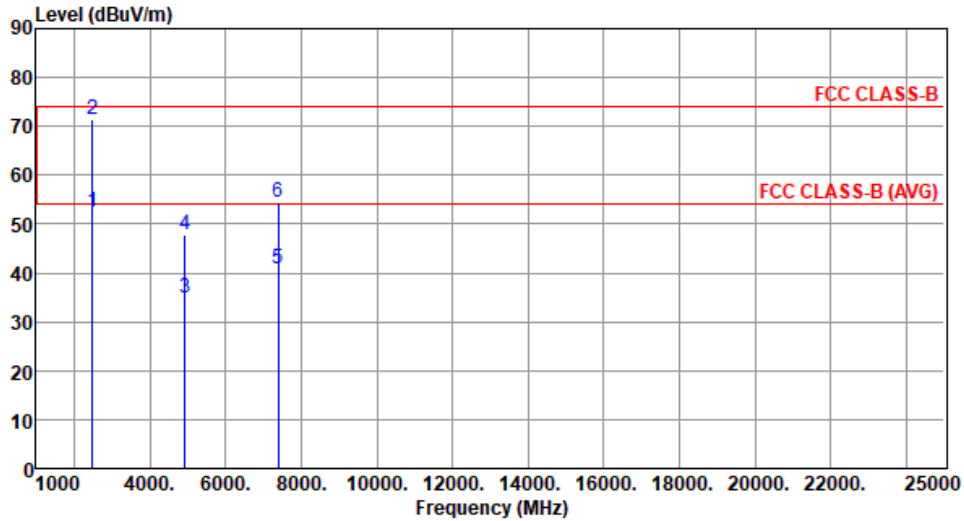


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.37	54.00	-1.63	52.12	0.25	Average	148	206
2	2483.50	71.24	74.00	-2.76	70.99	0.25	Peak	148	206
3	4924.00	34.76	54.00	-19.24	28.25	6.51	Average	125	113
4	4924.00	47.75	74.00	-26.25	41.24	6.51	Peak	125	113
5	7386.00	40.75	54.00	-13.25	28.94	11.81	Average	131	29
6	7386.00	54.40	74.00	-19.60	42.59	11.81	Peak	131	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

### 3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

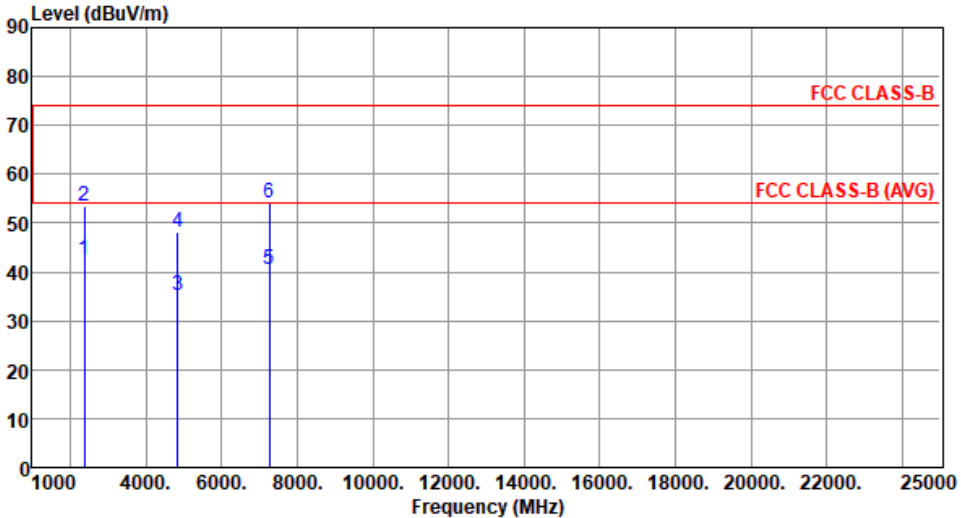Modulation	HT40	Test Freq. (MHz)	2422						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBUV/m	dBUV/m	dB	dBUV	dB		cm	deg
1	2390.00	42.51	54.00	-11.49	42.27	0.24	Average	109	102
2	2390.00	53.62	74.00	-20.38	53.38	0.24	Peak	109	102
3	4844.00	35.26	54.00	-18.74	28.71	6.55	Average	124	71
4	4844.00	48.31	74.00	-25.69	41.76	6.55	Peak	124	71
5	7266.00	40.41	54.00	-13.59	28.80	11.61	Average	119	35
6	7266.00	54.12	74.00	-19.88	42.51	11.61	Peak	119	35
<p>Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).</p>									

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2422
<b>Polarization</b>	Vertical		

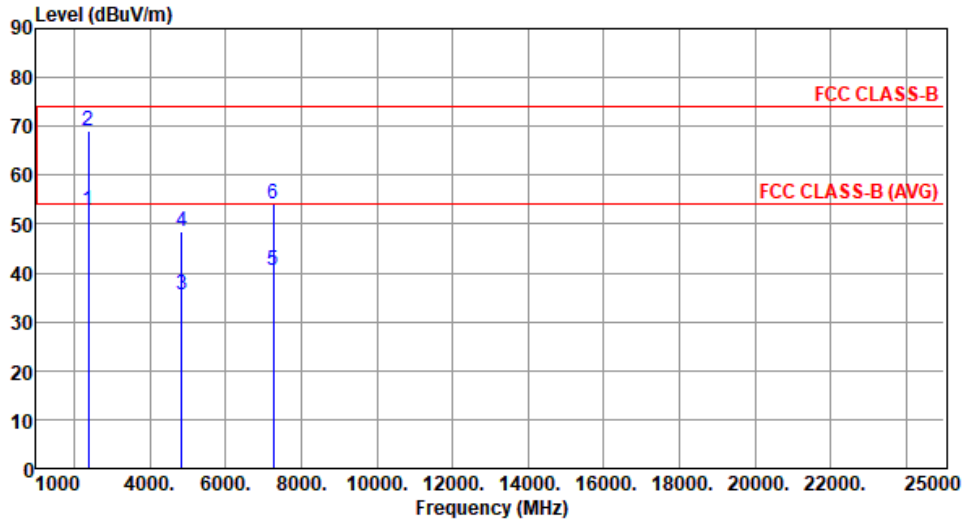


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.76	54.00	-1.24	52.52	0.24	Average	158	165
2	2390.00	68.93	74.00	-5.07	68.69	0.24	Peak	158	165
3	4844.00	35.39	54.00	-18.61	28.84	6.55	Average	119	122
4	4844.00	48.47	74.00	-25.53	41.92	6.55	Peak	119	122
5	7266.00	40.57	54.00	-13.43	28.96	11.61	Average	121	56
6	7266.00	54.20	74.00	-19.80	42.59	11.61	Peak	121	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Horizontal		

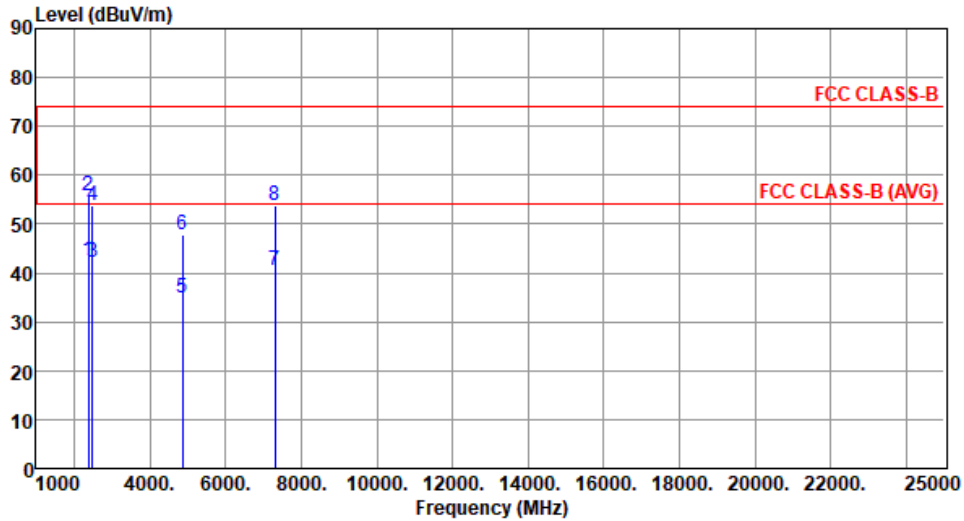


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.60	54.00	-11.40	42.36	0.24	Average	106	94
2	2390.00	55.82	74.00	-18.18	55.58	0.24	Peak	106	94
3	2483.50	42.29	54.00	-11.71	42.04	0.25	Average	106	94
4	2483.50	53.74	74.00	-20.26	53.49	0.25	Peak	106	94
5	4874.00	34.83	54.00	-19.17	28.35	6.48	Average	115	26
6	4874.00	47.73	74.00	-26.27	41.25	6.48	Peak	115	26
7	7311.00	40.44	54.00	-13.56	28.68	11.76	Average	105	34
8	7311.00	53.70	74.00	-20.30	41.94	11.76	Peak	105	34

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2437
<b>Polarization</b>	Vertical		

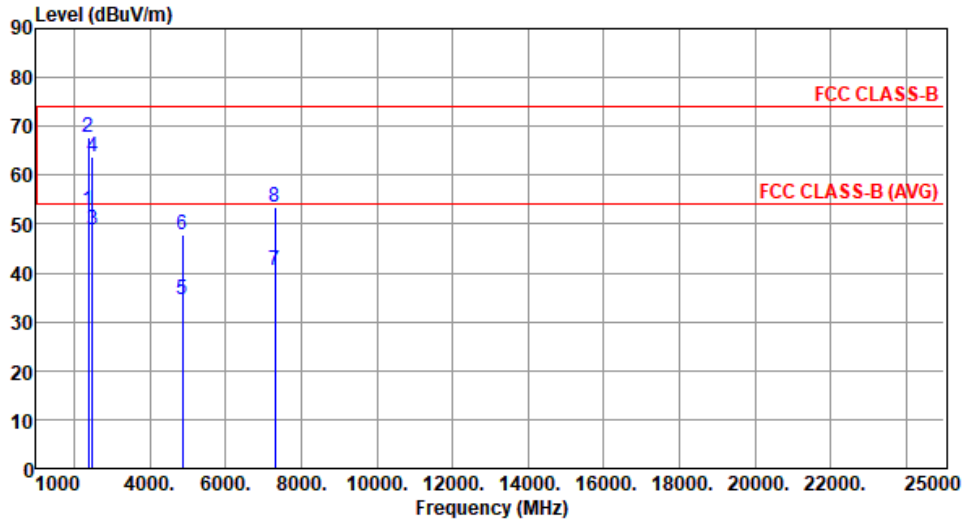


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	52.69	54.00	-1.31	52.45	0.24	Average	172	158
2	2390.00	67.59	74.00	-6.41	67.35	0.24	Peak	172	158
3	2483.50	48.89	54.00	-5.11	48.64	0.25	Average	172	158
4	2483.50	63.74	74.00	-10.26	63.49	0.25	Peak	172	158
5	4874.00	34.43	54.00	-19.57	27.95	6.48	Average	124	55
6	4874.00	47.87	74.00	-26.13	41.39	6.48	Peak	124	55
7	7311.00	40.59	54.00	-13.41	28.83	11.76	Average	115	92
8	7311.00	53.43	74.00	-20.57	41.67	11.76	Peak	115	92

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Horizontal		

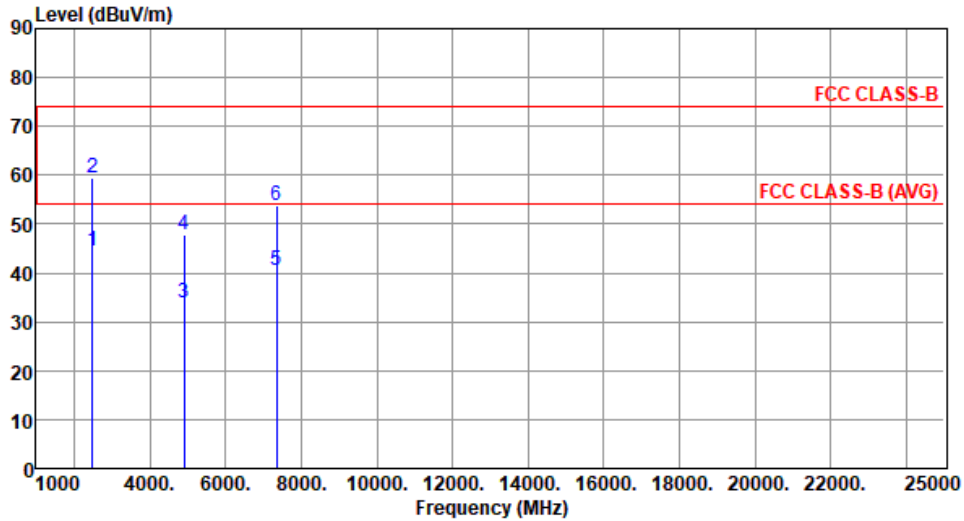

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	44.56	54.00	-9.44	44.31	0.25	Average	111	94
2	2483.50	59.45	74.00	-14.55	59.20	0.25	Peak	111	94
3	4904.00	33.92	54.00	-20.08	27.50	6.42	Average	125	66
4	4904.00	47.89	74.00	-26.11	41.47	6.42	Peak	125	66
5	7356.00	40.64	54.00	-13.36	28.82	11.82	Average	111	93
6	7356.00	53.69	74.00	-20.31	41.87	11.82	Peak	111	93


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	HT40	<b>Test Freq. (MHz)</b>	2452
<b>Polarization</b>	Vertical		

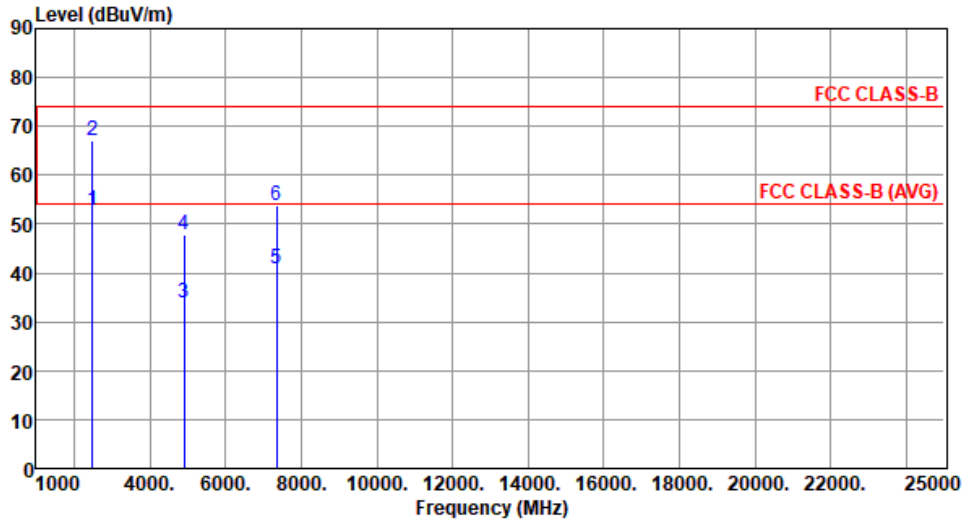

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	52.68	54.00	-1.32	52.43	0.25	Average	151	192
2	2483.50	67.19	74.00	-6.81	66.94	0.25	Peak	151	192
3	4904.00	33.90	54.00	-20.10	27.48	6.42	Average	145	31
4	4904.00	47.87	74.00	-26.13	41.45	6.42	Peak	145	31
5	7356.00	40.77	54.00	-13.23	28.95	11.82	Average	116	54
6	7356.00	53.78	74.00	-20.22	41.96	11.82	Peak	116	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in Non-Restricted Frequency Bands

### 3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


#### Emission level measurement




1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level




### 3.6.3 Test Setup



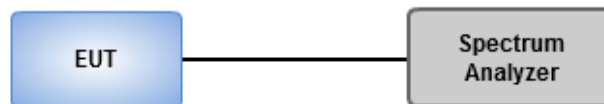


### 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

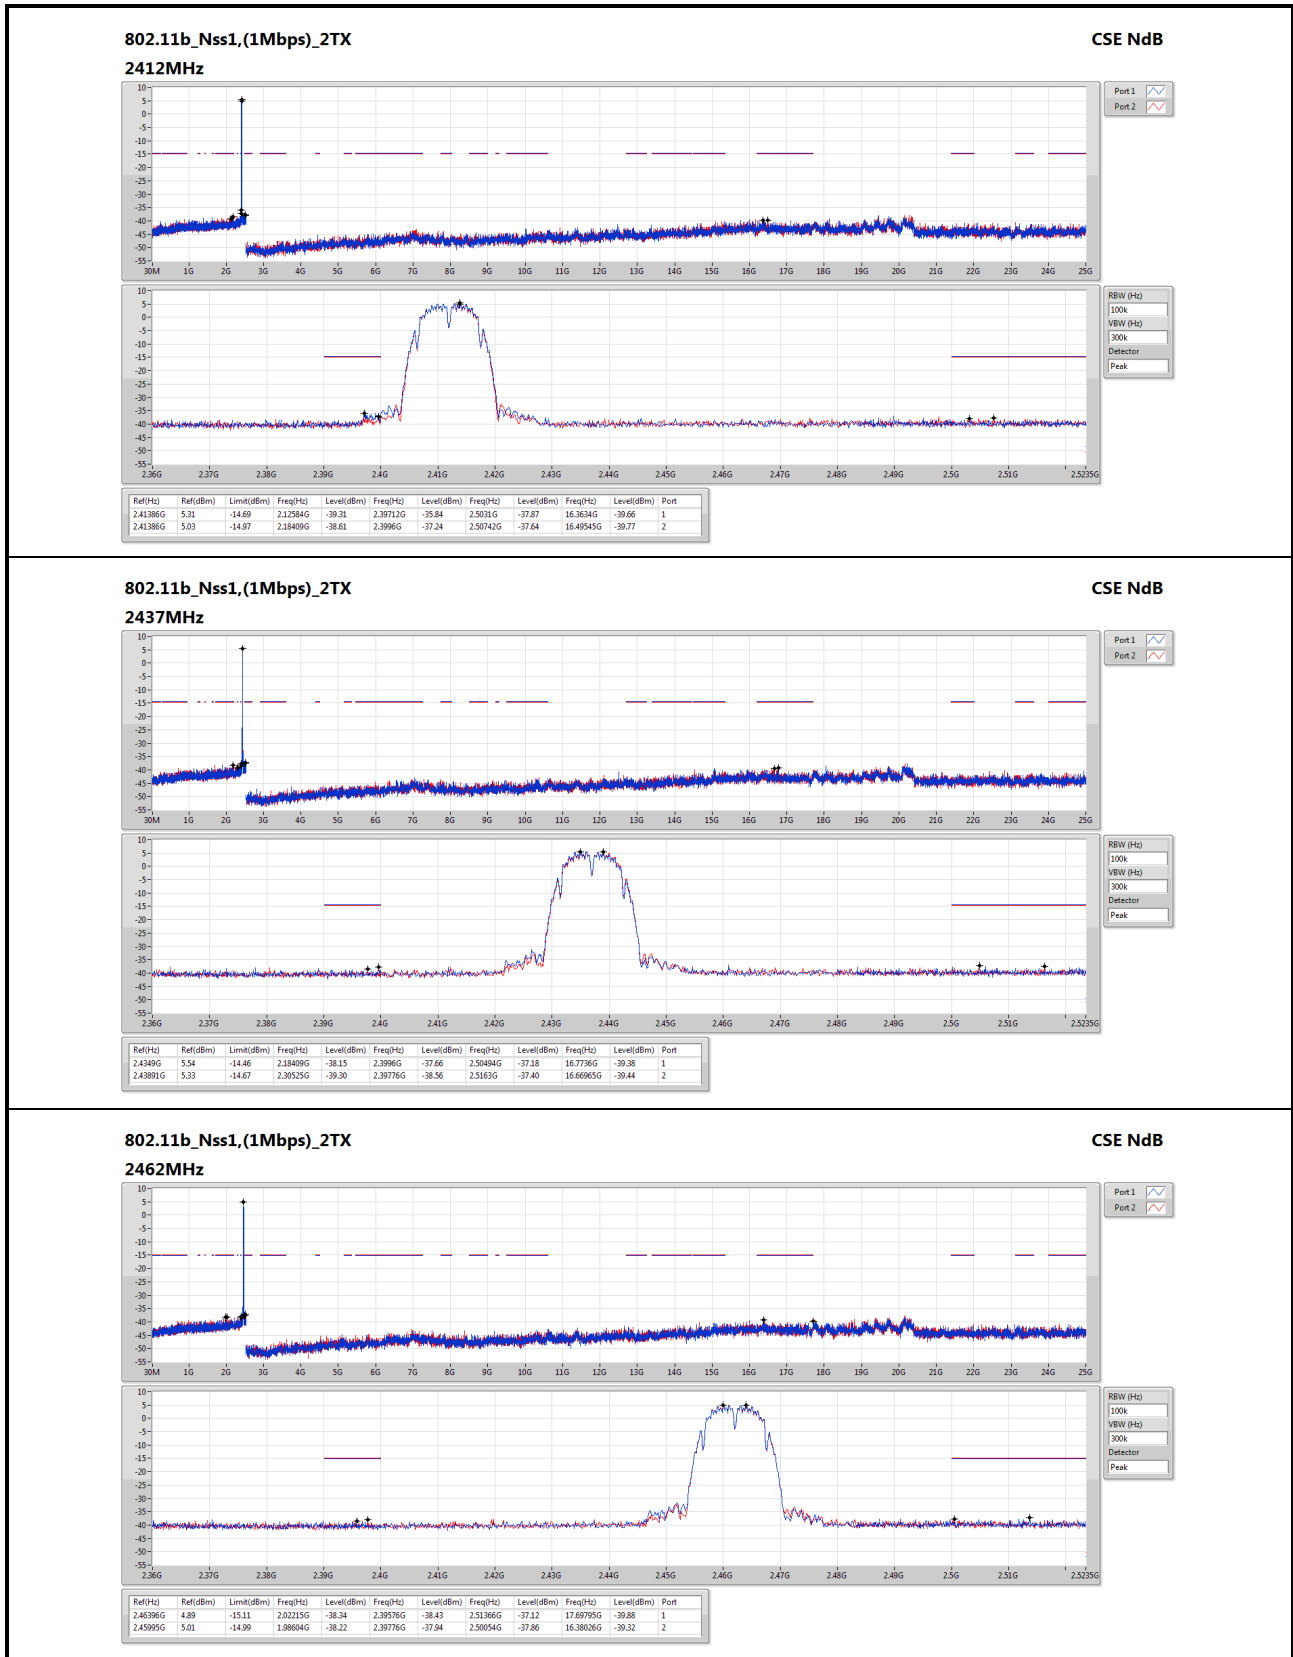
**802.11b\_Nss1,(1Mbps)\_2TX**
**CSE NdB**
**2462MHz**

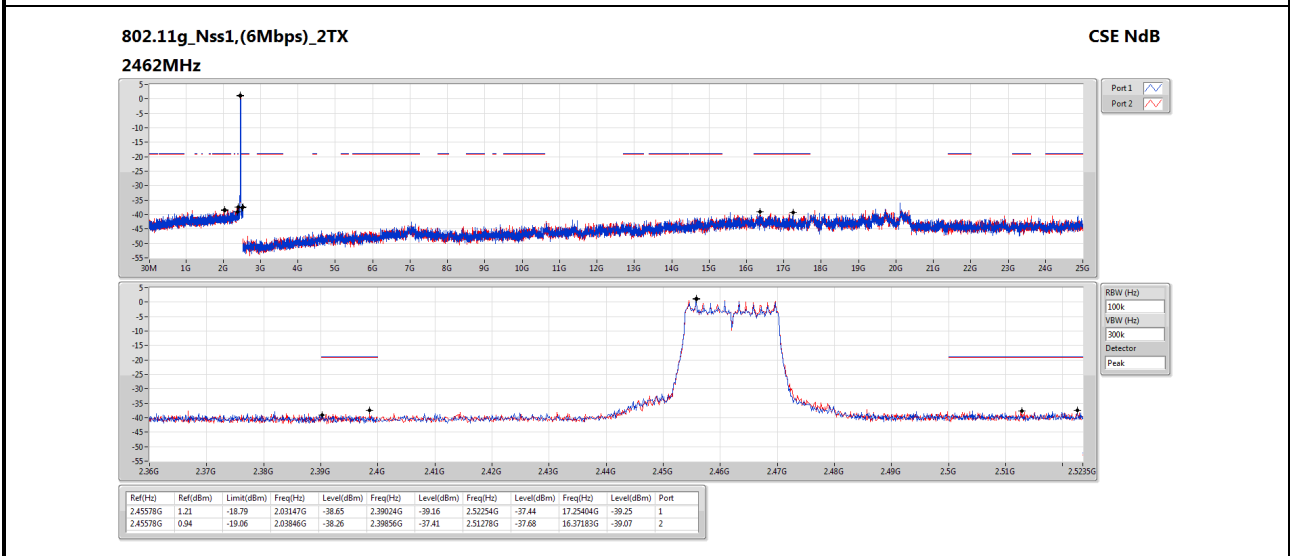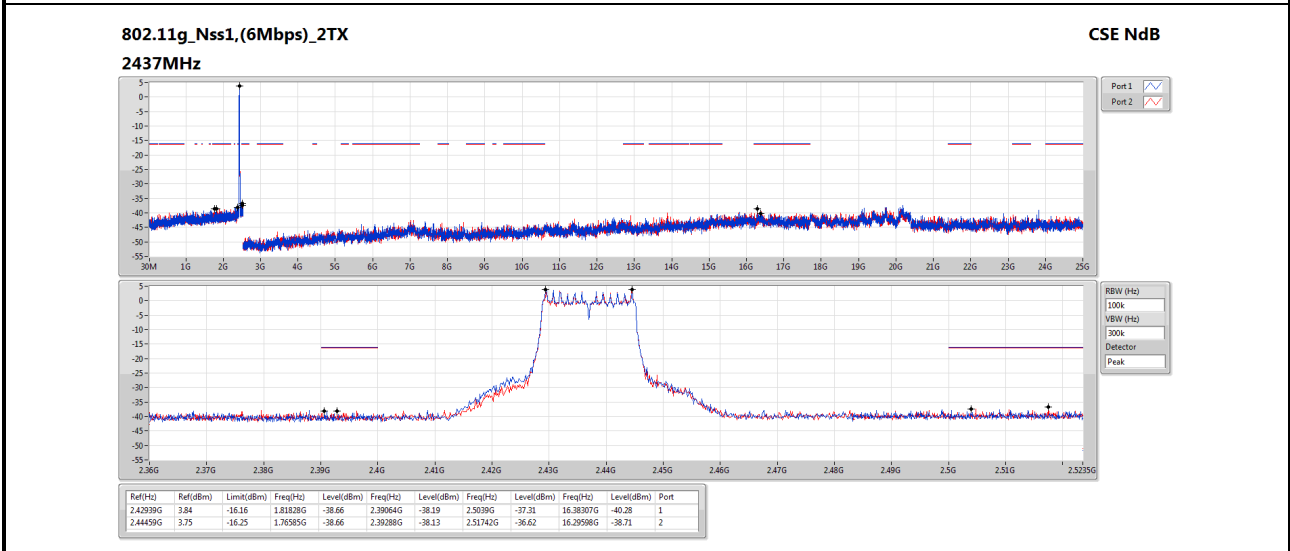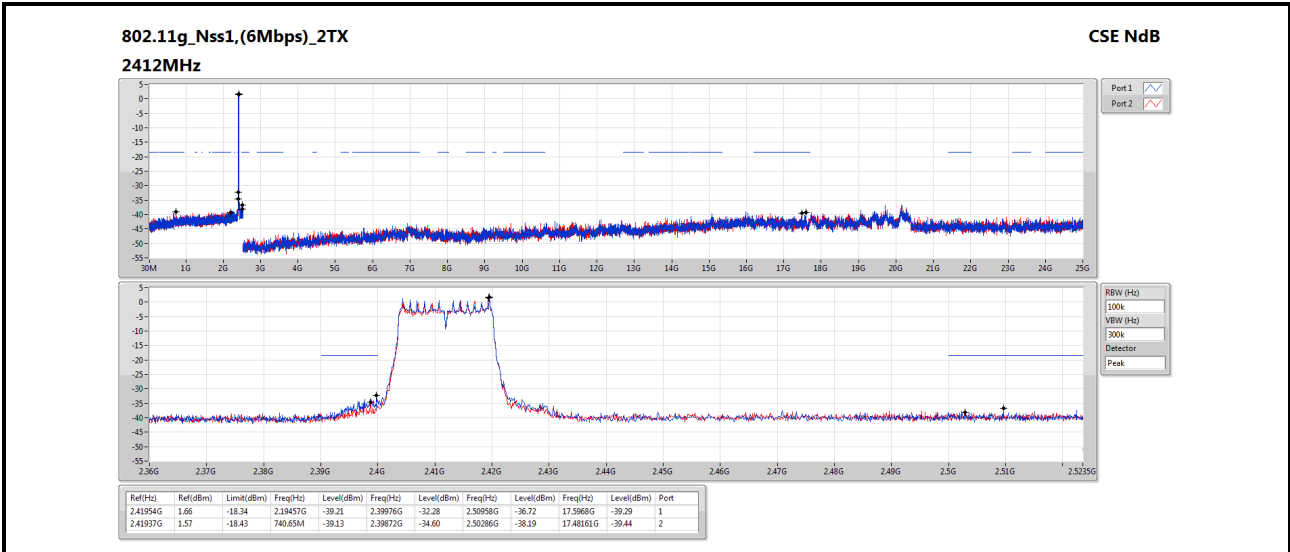

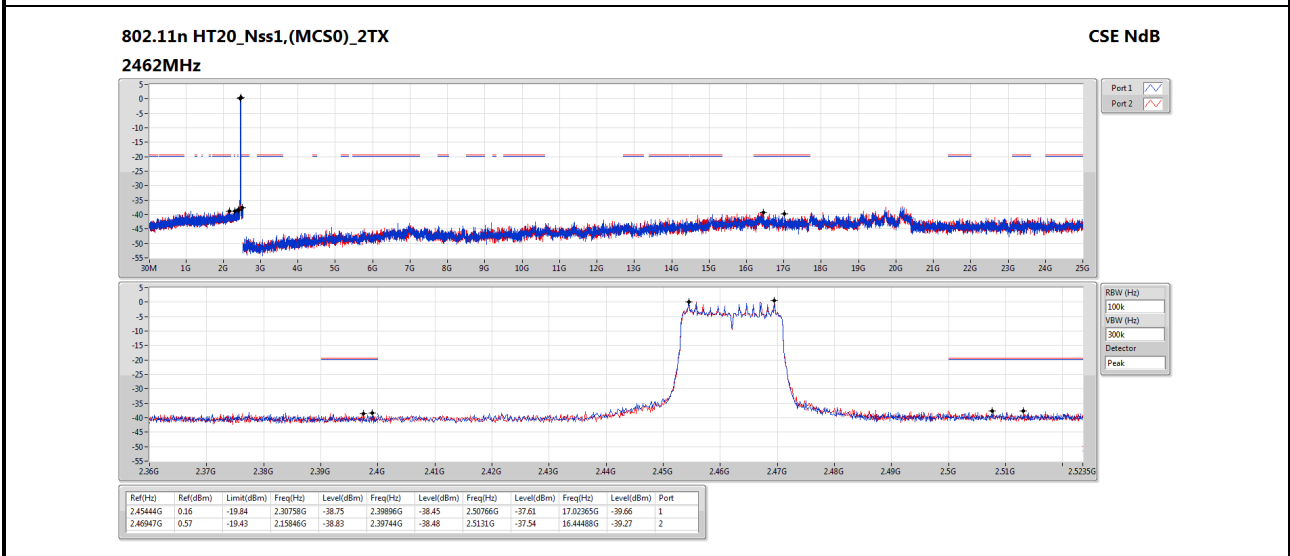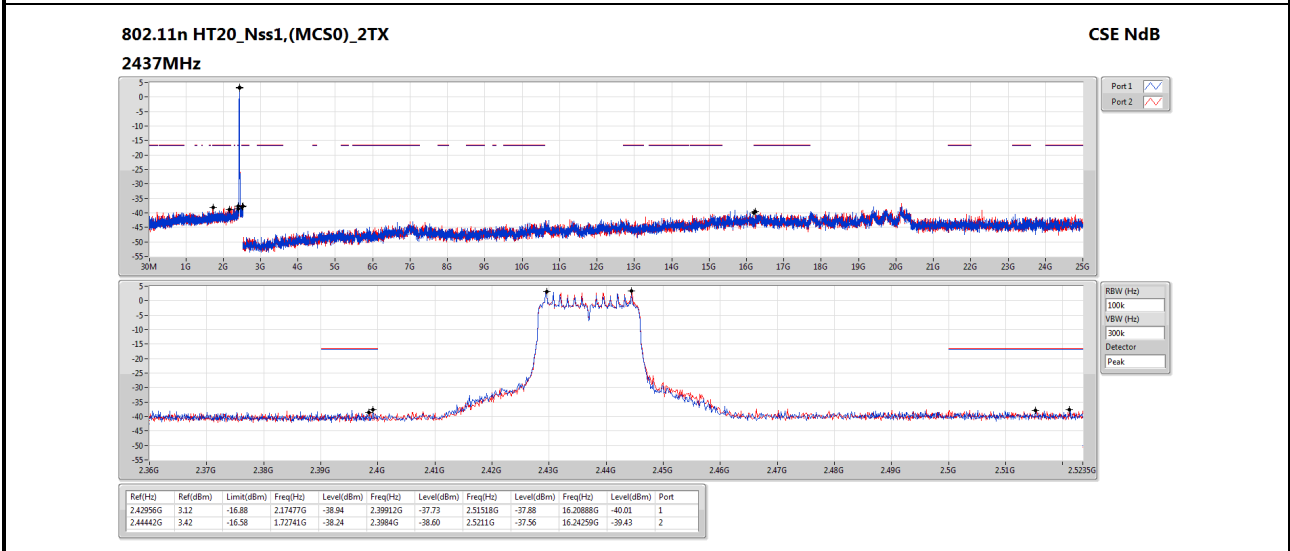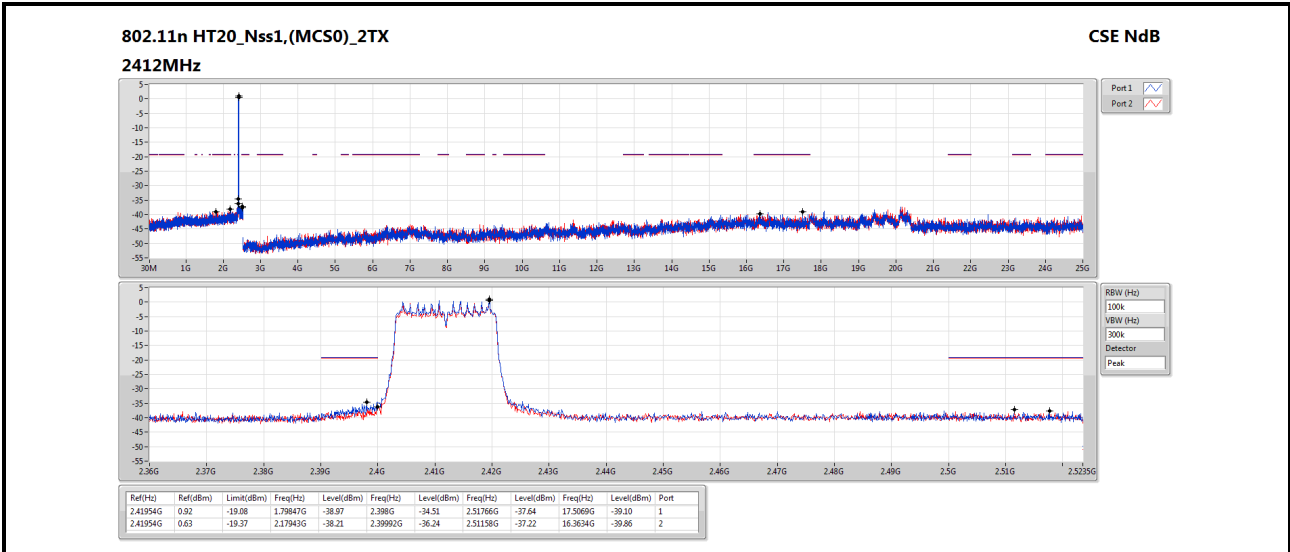

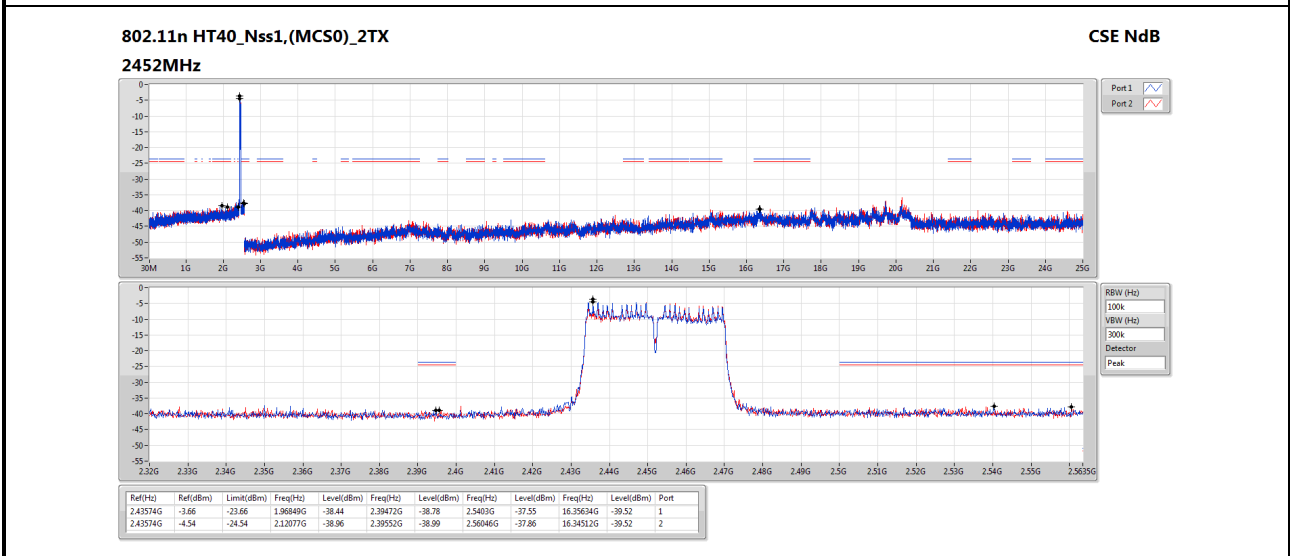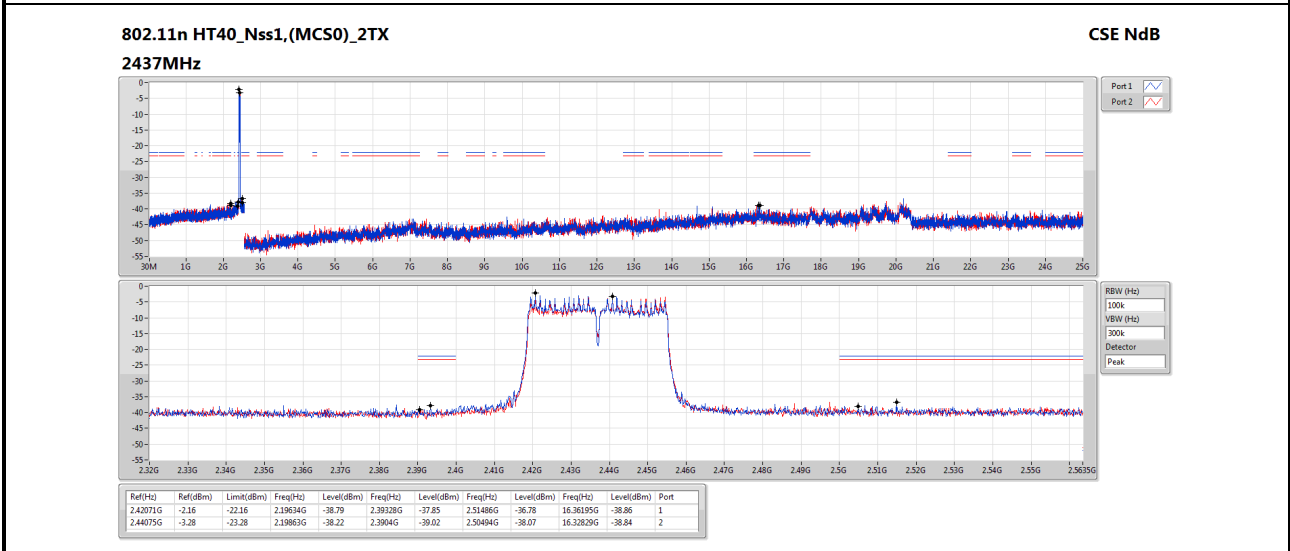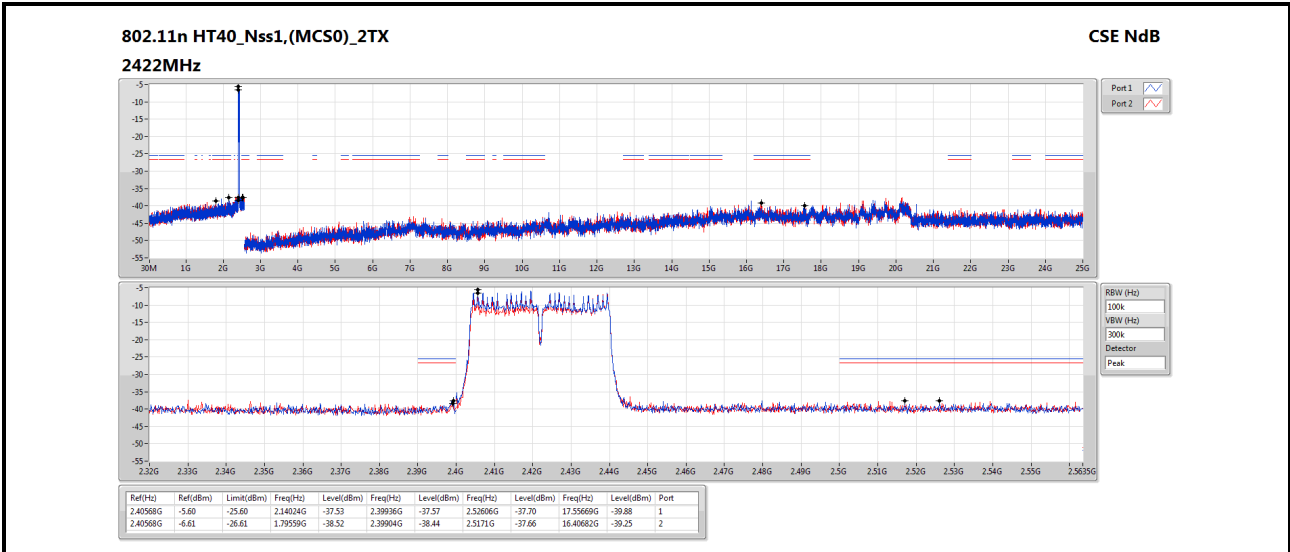

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==