ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

Applicant:	TaiDoc Technology Corp 6F, No. 127, Wugong 2nd Rd., Wugu Dist., 24888 New Taipei City, Taiwan
Product Name:	Bluetooth Smart Module
Model No.:	TD-9050A
Model Difference:	N/A
Report Number:	ER/2021/B0014
FCC ID	TM79050A01
IC:	7528A-9050A01
Issue Date:	December 24, 2021
Date of Test:	November 5, 2021 ~ November 18, 2021
Date of EUT Received:	November 2, 2021

Approved By _____
Jim Chang

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247, ISED RSS-247.

The results of this report relate only to the sample identified in this report.

Revision History					
Report Number	**Revision**	**Description**	**Issue Date**	**Revised By**	**Remark**
ER/2021/B0014	00	Original	December 24, 2021	Ariel Chang	

Note:

1、 The remark "*" indicates modification of the report upon requests from certification body.

Table of Contents

1 GENERAL INFORMATION

1.1 Product Description

Product Name:	Bluetooth Smart Module
Model No.:	TD-9050A
Model Difference:	N/A
Hardware Version:	N/A
Firmware Version:	N/A
Power Supply:	3.3 Vdc

1.2 RF Specification

Radio Technology:	BLE
Frequency Range:	2402 – 2480MHz
Channel number:	40 channels
Modulation type:	GFSK
Transmit Power:	BLE 1M: 3.42 dBm BLE 2M: 3.41 dBm

1.3 Antenna Designation

Antenna Type	Supplier	Antenna Part No.	Freq. (MHz)	Peak Antenna Gain (dBi)
Chip	YAGEO	ANT8010LL04R2400A	2402 – 2480	5.46

Note:

1. Antenna information is provided by the applicant.

1.4 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247
FCC KDB 558074 D01 15.247 Meas Guidance v05r02
RSS-247 issue 2 Feb. 2017
RSS-Gen, Issue 5 (Amendment 2, February 2021)
ANSI C63.10:2013

1.5 Test Facility

Laboratory	Test Site Address	Test Site Name	FCC Designation number	IC CAB identifier
SGS Taiwan Ltd. Central RF Lab. (TAF code 3702)	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan.	SAC 1	TW0027	TW3702
		SAC 3		
		Conduction 1		
		Conducted 1		
		Conducted 2		
		Conducted 3		
		Conducted 4		
		Conducted 5		
		Conducted 6		
	No.2, Keji 1st Rd., Guishan District, Taoyuan City, Taiwan 333	Conduction C	TW0028	
		SAC C		
		SAC D		
		SAC G		
		Conducted A		
		Conducted B		
		Conducted C		
		Conducted D		
		Conducted E		
		Conducted F		
		Conducted G		
Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.				

1.6 Special Accessories

There are no special accessories used while test was conducted.

1.7 Equipment Modifications

There was no modification incorporated into the EUT.

2 SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Conducted Test (RF)

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 Radiated Emissions

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz

Radiated emission below 30MHz is measured in a 9m*6m*6m semi-anechoic chamber, the measurements correspond to those obtained at an open-field test site.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 Test Configuration

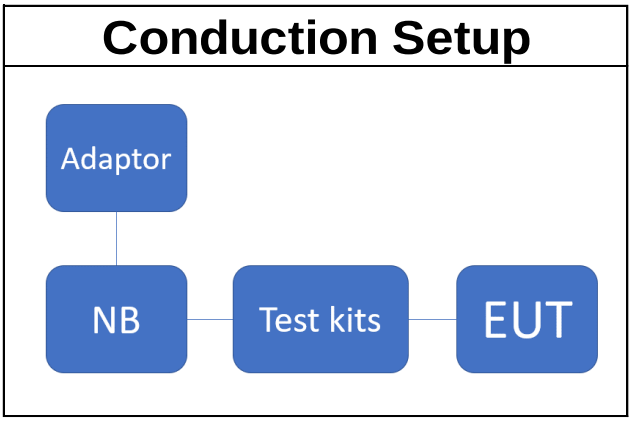

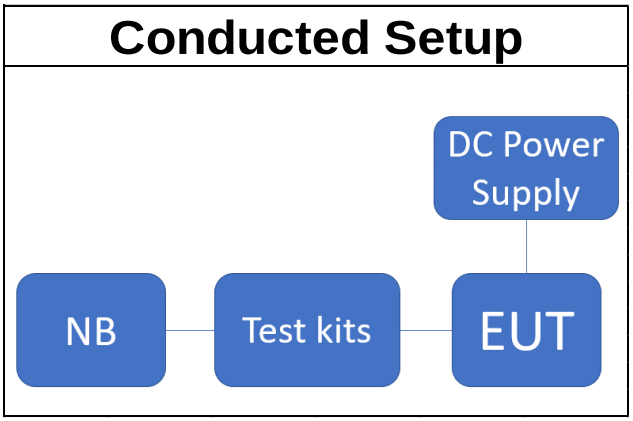

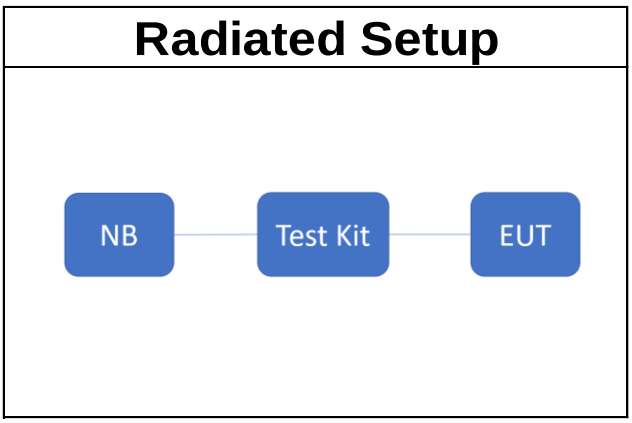

2.6 Control Unit(s)

Conducted Emission Test Site: Conduction 1					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Notebook	Lenovo	L430	R9-XFG0X 13/03	N/A	N/A
Adapter	Lenovo	92P1154	11S92P1154Z1Z DXP9AG499	N/A	N/A
Test Key	Texas Instruments	LAUNCHXL-CC264OR2	080519V001	N/A	N/A
USB	Texas Instruments	USB 1x4P Male To Micro 1x5P Male	N/A	N/A	N/A

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Test Software	SGS	Radio Test Software	Ver. 21	N.C.R	N.C.R
DC Power Supply	Gwinstek	SPS-3610	GEV856750	08/04/2021	08/03/2022
Test Key	Texas Instruments	LAUNCHXL-CC264OR2	080519V001	N/A	N/A
USB	Texas Instruments	USB 1x4P Male To Micro 1x5P Male	N/A	N/A	N/A
Notebook	Lenovo	L430	R9-XFG0X 13/03	N/A	N/A

Radiated Emission Test Site: SAC 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Notebook	Lenovo	L430	R9-XFG0X 13/03	N/A	N/A
Test Key	Texas Instruments	LAUNCHXL-CC264OR2	080519V001	N/A	N/A
USB	Texas Instruments	USB 1x4P Male To Micro 1x5P Male	N/A	N/A	N/A

3 SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4 d	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.2 a RSS-Gen §6.7	Emission Bandwidth	Compliant
§15.247(d) §15.205 §15.209	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10	Radiated & Conducted Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2 b	Peak Power Density	Compliant
§15.203	N/A	Antenna Requirement	Compliant

4 DESCRIPTION OF TEST MODES

4.1 Operating Frequencies

ITEM	FREQUENCY	ITEM	FREQUENCY	ITEM	FREQUENCY
1	2402 MHz	15	2430 MHz	29	2458 MHz
2	2404 MHz	16	2432 MHz	30	2460 MHz
3	2406 MHz	17	2434 MHz	31	2462 MHz
4	2408 MHz	18	2436 MHz	32	2464 MHz
5	2410 MHz	19	2438 MHz	33	2466 MHz
6	2412 MHz	20	2440 MHz	34	2468 MHz
7	2414 MHz	21	2442 MHz	35	2470 MHz
8	2416MHz	22	2444 MHz	36	2472 MHz
9	2418 MHz	23	2446 MHz	37	2474 MHz
10	2420 MHz	24	2448 MHz	38	2476 MHz
11	2422 MHz	25	2450 MHz	39	2478 MHz
12	2424 MHz	26	2452 MHz	40	2480 MHz
13	2426 MHz	27	2454 MHz		
14	2428 MHz	28	2456 MHz		

4.2 The Worst Test Modes and Channel Details

1. The EUT has been tested under operating condition.
2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
3. The field strength of radiation emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.
4. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST (BELOW 1 GHz)				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	20	GFSK	1
Bluetooth LE	0 to 39	20	GFSK	2
RADIATED EMISSION TEST (ABOVE 1 GHz)				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	0,20,39	GFSK	1
Bluetooth LE	0 to 39	0,20,39	GFSK	2
Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case E2 position was reported.				

CONDUCTED TEST				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)
Bluetooth LE	0 to 39	0,20,39	GFSK	1
Bluetooth LE	0 to 39	0,20,39	GFSK	2

5 MEASUREMENT UNCERTAINTY

Test Items	Uncertainty		
AC Power Line Conducted Emission	+/-	2.34	dB
Peak Output Power	+/-	1	dB
6dB Bandwidth & 99% Bandwidth	+/-	1.53	Hz
100 kHz Bandwidth Of Frequency Band Edges	+/-	1.69	dB
Peak Power Density	+/-	1.53	dB
Temperature	+/-	0.4	°C
Humidity	+/-	3.5	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty				
Polarization: Vertical	**+/-**	**2.64**	**dB**	9kHz~30MHz
	+/-	**4.93**	**dB**	30MHz - 1000MHz
	+/-	**4.81**	**dB**	1GHz - 18GHz
	+/-	**4.52**	**dB**	18GHz - 40GHz
Polarization: Horizontal	**+/-**	**2.64**	**dB**	9kHz~30MHz
	+/-	**4.45**	**dB**	30MHz - 1000MHz
	+/-	**4.81**	**dB**	1GHz - 18GHz
	+/-	**4.52**	**dB**	18GHz - 40GHz

Note:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

6 MEASUREMENT EQUIPMENT USED

6.1 Emission from AC power line

Conducted Emission Test Site: Conduction 1					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EMI Test Receiver	R&S	ESCI 7	100759	08/26/2021	08/25/2022
LISN	SCHWARZBECK	NSLK 8127	8127-465	04/09/2021	04/08/2022
Coaxial Cables	N/A	Coaxial Cable	161207	12/07/2020	12/06/2021
Test Software	audix	e3	Ver. 9 210322	N.C.R	N.C.R

6.2 Conducted Measurement

Conducted Emission Test Site: Conducted 2					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY60242081	09/30/2021	09/29/2022
Power Meter	Anritsu	ML2496A	1804001	03/02/2021	03/01/2022
Power Sensor	Anritsu	MA2411B	1726104	03/02/2021	03/01/2022
Power Sensor	Anritsu	MA2411B	1726107	03/02/2021	03/01/2022
DC Block	Mini-Circuits	BLK-18-S+	1	12/16/2020	12/15/2021

6.3 Radiated Measurement

Radiated Emission Test Site: SAC 3					
EQUIPMENT TYPE	**MFR**	**MODEL NUMBER**	**SERIAL NUMBER**	**LAST CAL.**	**CAL DUE.**
Horn Antenna	SCHWARZBECK	BBHA9170	184	12/11/2020	12/10/2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1441	09/27/2021	09/26/2022
Bi-log Antenna	SCHWARZBECK	VULB9168	378	08/20/2021	08/19/2022
Loop Antenna	ETS.LINDGREN	6502	148045	09/29/2021	09/28/2022
PXA Spectrum Analyzer	Agilent	N9030A	MY53120760	04/27/2021	04/26/2022
EMI Test Receiver	R&S	ESCI 7	100759	08/26/2021	08/25/2022
Pre-Amplifier	HP	8449B	3008A00578	12/16/2020	12/15/2021
Pre-Amplifier	EMC Instruments	EMC184045B	980135	12/16/2020	12/15/2021
Pre-Amplifier	HP	8447D	2944A07676	12/16/2020	12/15/2021
Attenuator	Mini-Circuit	BW-S10W2+	4	12/16/2020	12/15/2021
Filter 2400-2483.5 MHz	EWT	EWT-14-0166	M1	12/16/2020	12/15/2021
High Pass Filter	WI	WHKX4.0/18G-10SS	22	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2636/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 104	340057/4	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 104PEA	800052/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2621/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2617/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY2630/2	12/16/2020	12/15/2021
Coaxial Cable	Huber Suhner	SUCOFLEX 102	MY22962/2	12/16/2020	12/15/2021
Site Cal	SGS	SAC 3	N/A	01/01/2021	12/31/2021
Test Software	audix	e3	Ver. 9 210322	N.C.R	N.C.R

NOTE: *N.C.R refers to Not Calibrated Required.*

7 CONDUCTED EMISSION TEST

7.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range MHz	Limits (dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50
Note 1.The lower limit shall apply at the transition frequencies 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.		

7.2 EUT Setup:

1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
3. The LISN was connected with 120Vac/60Hz power source.

7.3 Test Setup

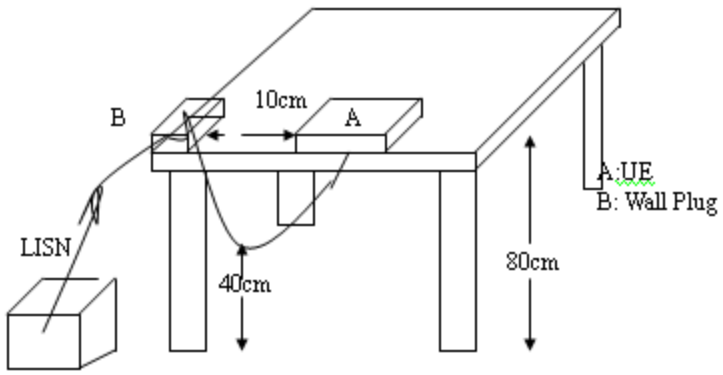

7.4 Measurement Procedure:

1. The EUT was placed on a table which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all phases of power being supplied by given UE are completed

7.5 Measurement Result:

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

AC POWER LINE CONDUCTED EMISSION TEST DATA

Report Number	:ER-2021-B0014	Test Site	:Conduction 1
Test Mode	:BLE	Test Date	:2021-11-15
Power	:120V/60Hz	Temp./Humi.	:25.6/55
Probe	:L	Engineer	:Ricky Chen
Note:	:		

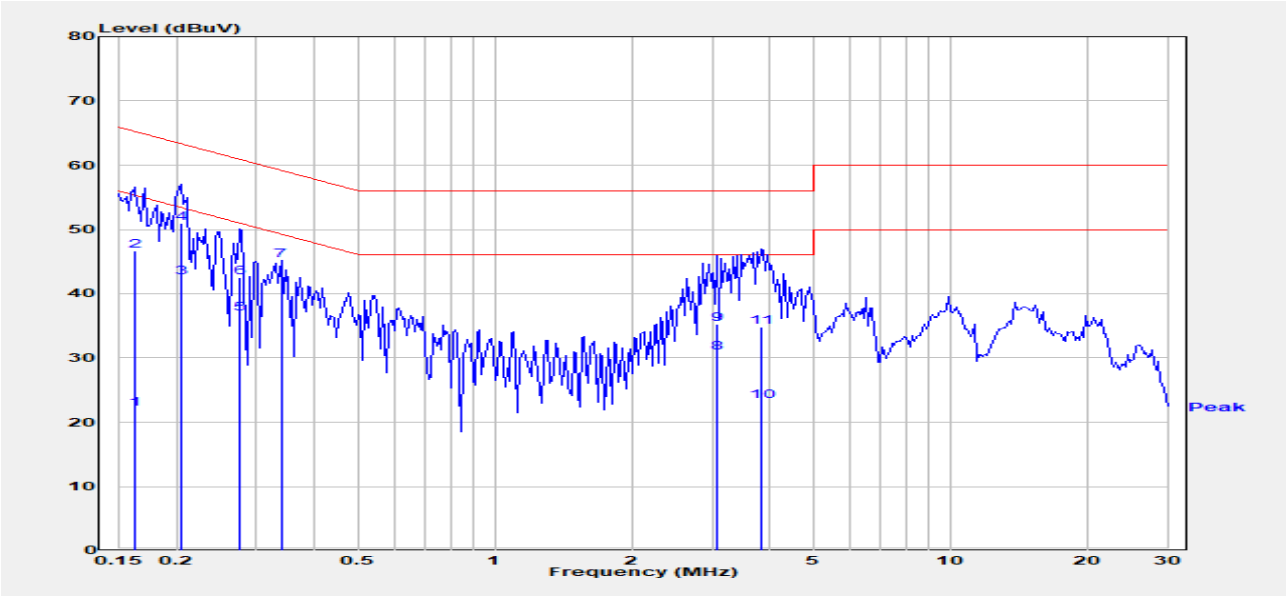

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV	dBµV	dB
0.162	Average	19.92	2.12	22.04	55.38	-33.34
0.162	QP	44.52	2.12	46.64	65.38	-18.74
0.204	Average	40.33	2.12	42.45	53.45	-11.00
0.204	QP	48.91	2.12	51.03	63.45	-12.42
0.274	Average	34.83	2.12	36.95	50.98	-14.03
0.274	QP	40.42	2.12	42.54	60.98	-18.44
0.339	Peak	43.04	2.12	45.16	59.22	-14.07
3.074	Average	28.22	2.55	30.77	46.00	-15.23
3.074	QP	32.73	2.55	35.28	56.00	-20.72
3.840	Average	20.45	2.76	23.21	46.00	-22.79
3.840	QP	32.03	2.76	34.79	56.00	-21.21

Report Number	:ER-2021-B0014	Test Site	:Conduction 1
Test Mode	:BLE	Test Date	:2021-11-15
Power	:120V/60Hz	Temp./Humi.	:25.6/55
Probe	:N	Engineer	:Ricky Chen
Note:	:		

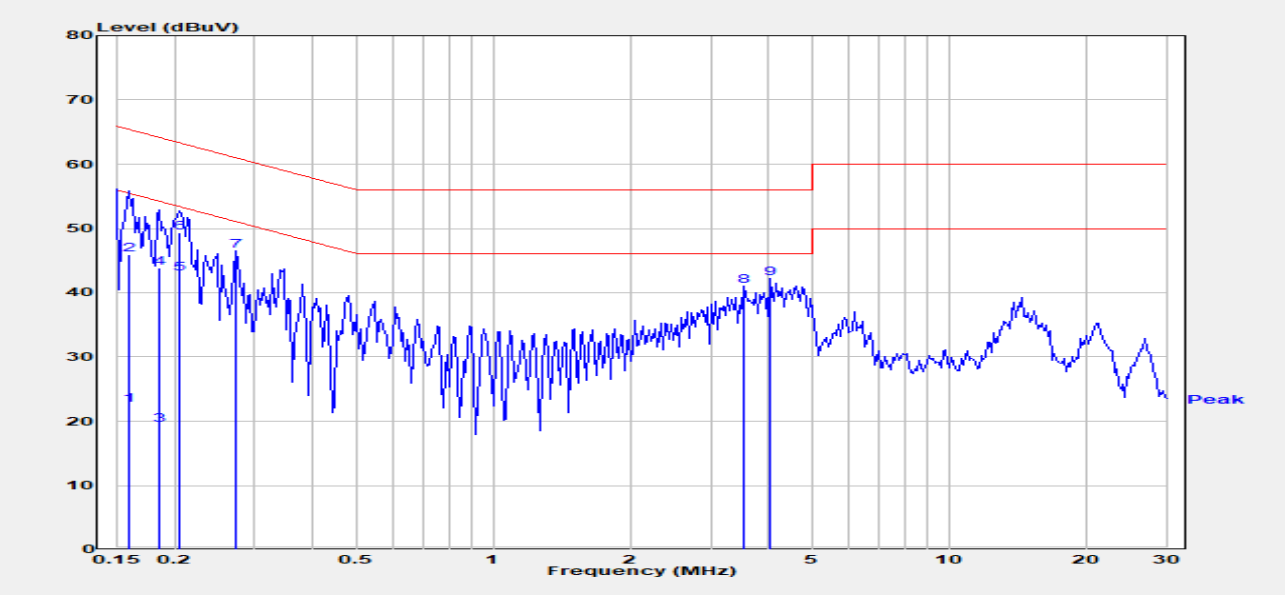

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV	Limit dBµV	Margin dB
0.158	Average	20.32	2.15	22.47	55.56	-33.09
0.158	QP	43.82	2.15	45.97	65.56	-19.59
0.185	Average	17.22	2.25	19.47	54.24	-34.77
0.185	QP	41.63	2.25	43.88	64.24	-20.36
0.204	Average	40.71	2.29	43.00	53.45	-10.44
0.204	QP	47.01	2.29	49.30	63.45	-14.14
0.272	Peak	44.24	2.22	46.46	61.07	-14.61
3.565	Peak	38.86	2.18	41.04	56.00	-14.96
4.049	Peak	40.10	2.18	42.28	56.00	-13.72

8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable:

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt and the e.i.r.p. shall not exceed 4 W.

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

8.2 Test Setup

8.2.1 Duty Cycle

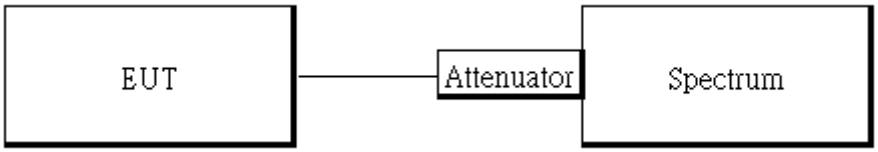

8.2.2 Output Power

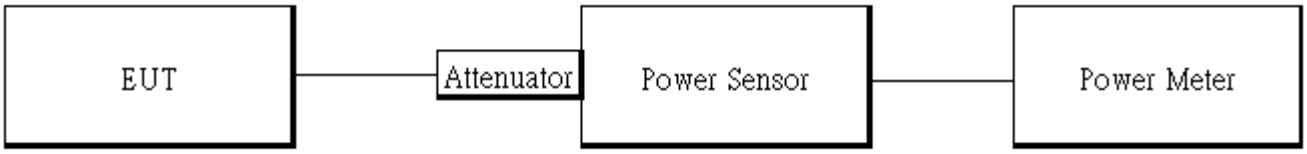

8.3 Measurement Procedure:

8.3.1 Duty Cycle

1. Place the EUT on the table and set it in transmitting mode.
2. Set span = Zero
3. RBW = 8MHz, VBW = 8MHz,
4. Detector = Peak

8.3.2 Output Power

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.
4. Record the max. Reading as observed from Power Meter.
5. Repeat above procedures until all test default channel measured was complete.

8.4 Duty Factor:

	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
BLE 1M	100.00	0.00	0.33	0.01
BLE 2M	100.00	0.00	0.33	0.01

BLE_1M_LowCH00-2402

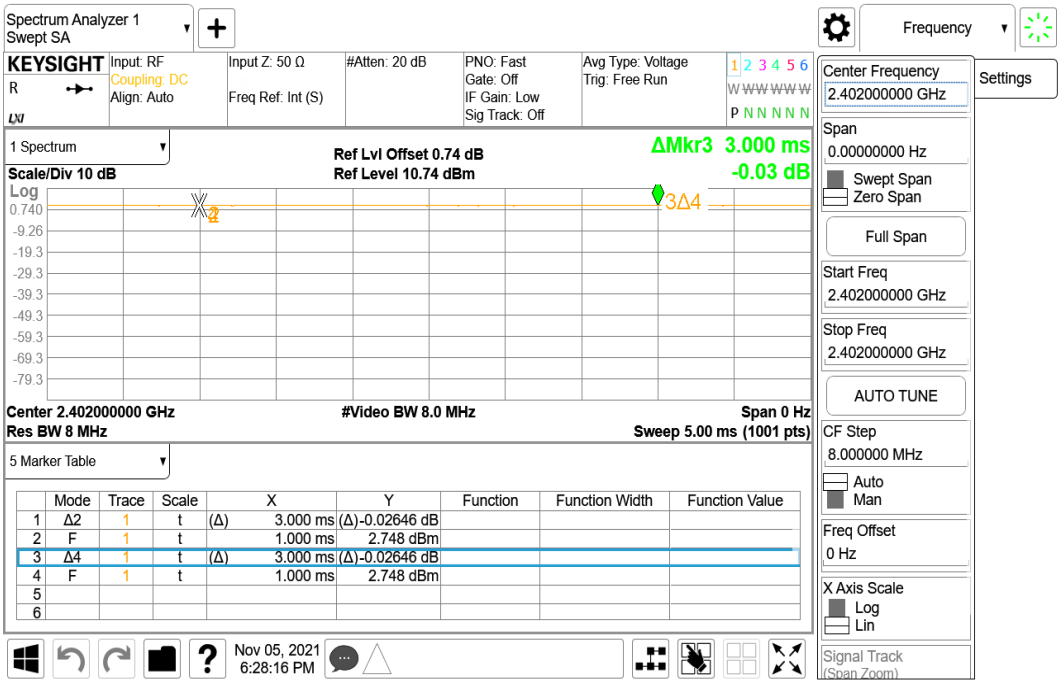

BLE_2M_LowCH00-2402

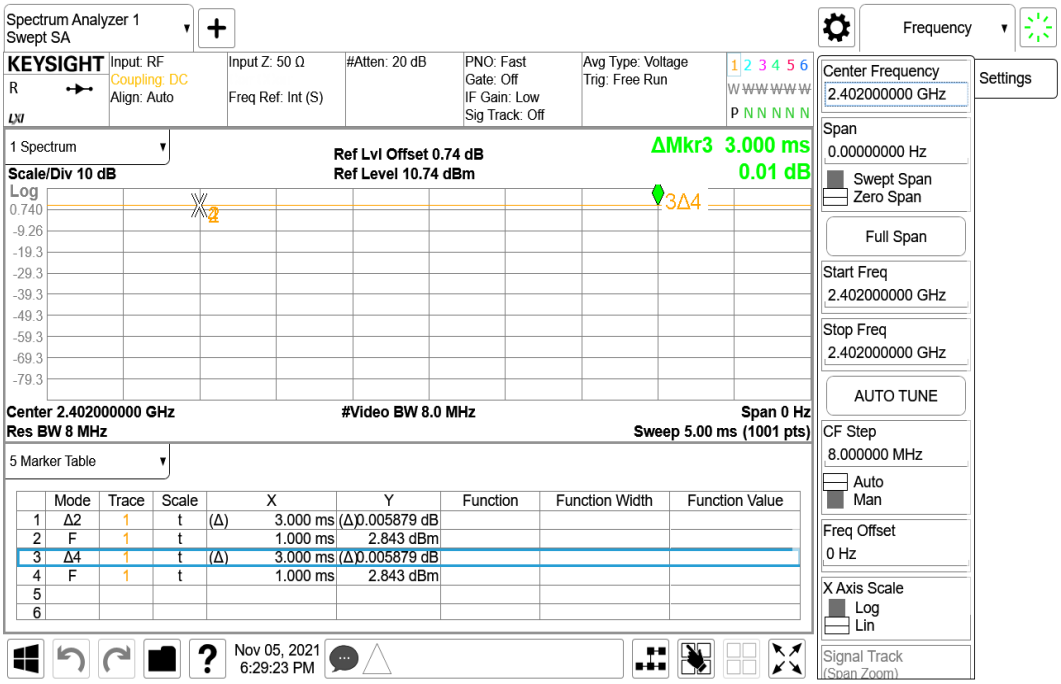

8.5 Output Power:

8.5.1 Peak & Avg

BLE 1M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	2402	5	**3.42**	30
Mid	2442	5	3.28	30
High	2480	5	3.10	30
CH	**Frequency (MHz)**	**Power set**	**Max. Avg. Output include tune up tolerance Power (dBm)**	**Required Limit (dBm)**
Low	2402	5	3.36	30
Mid	2442	5	3.22	30
High	2480	5	3.04	30

Note: Measured by power meter, cable loss 0.74 dB + Duty cycle factor has been offseted to the power meter for Avg. power and cable loss has been offseted for Peak power measurement.

BLE 2M mode:

CH	Frequency (MHz)	Power set	Peak Power Output (dBm)	Required Limit (dBm)
Low	2402	5	**3.41**	30
Mid	2442	5	3.26	30
High	2480	5	3.08	30
CH	**Frequency (MHz)**	**Power set**	**Max. Avg. Output include tune up tolerance Power (dBm)**	**Required Limit (dBm)**
Low	2402	5	3.31	30
Mid	2442	5	3.17	30
High	2480	5	3.00	30

Note: Measured by power meter, cable loss 0.74 dB + Duty cycle factor has been offseted to the power meter for Avg. power and cable loss has been offseted for Peak power measurement.

8.5.2 EIRP

EIRP BLE 1M mode

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit		
Low	2402	5	3.36	5.46	8.82	4W=	36	dBm
Mid	2442	5	3.22	5.46	8.68	4W=	36	dBm
High	2480	5	3.04	5.46	8.50	4W=	36	dBm

***Note:** EIRP = Average Power + Gain

EIRP BLE 2M mode

CH	Frequency (MHz)	Power set	Max. Avg. Output include tune up tolerance Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit		
Low	2402	5	3.31	5.46	8.77	4W=	36	dBm
Mid	2442	5	3.17	5.46	8.63	4W=	36	dBm
High	2480	5	3.00	5.46	8.46	4W=	36	dBm

***Note:** EIRP = Average Power + Gain

9 EMISSION BANDWIDTH MEASUREMENT

9.1 Standard Applicable

The minimum 6 dB bandwidth shall be at least 500 kHz .

9.2 Test Setup

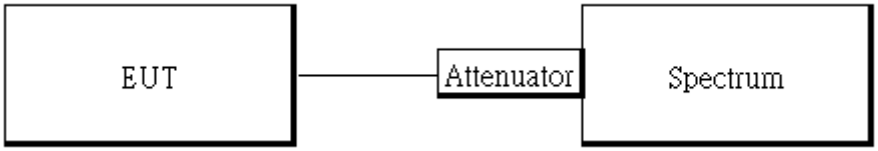

9.3 Measurement Procedure:

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
4. Set the spectrum analyzer as
   RBW= 100 kHz ,
   VBW = 3 X RBW,
   Span= 2 to 5 times of the OBW,
   Sweep=auto,
   Detector = Peak, and Max hold for -6dB Bandwidth test.
5. Set the spectrum analyzer as
   RBW= 1 % to 5% of 99% Bandwidth ,
   VBW ≥ 3 X RBW,
   Span= large enough to capture all products of the modulation process,
   Sweep=auto,
   Detector = Peak, and Max hold for 99% Bandwidth test.
6. Mark the peak frequency and 99%dB (upper and lower) frequency
7. Repeat above procedures until all test default channel is completed

9.4 Measurement Result:

BLE 1M mode

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
2402	0.7113	≧ 0.5	PASS
2442	0.743	≧ 0.5	PASS
2480	0.7315	≧ 0.5	PASS

BLE 2M mode

Frequency (MHz)	6dB BW (MHz)	Required BW (MHz)	Result
2402	1.452	≧ 0.5	PASS
2442	1.382	≧ 0.5	PASS
2480	1.528	≧ 0.5	PASS

BLE 1M mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	1.0334
2442	1.0629
2480	1.0655

BLE 2M mode

Frequency (MHz)	99%Bandwidth (MHz)
2402	2.0651
2442	2.08
2480	2.0944

OBW_BLE 1M_LowCH00-2402MHz

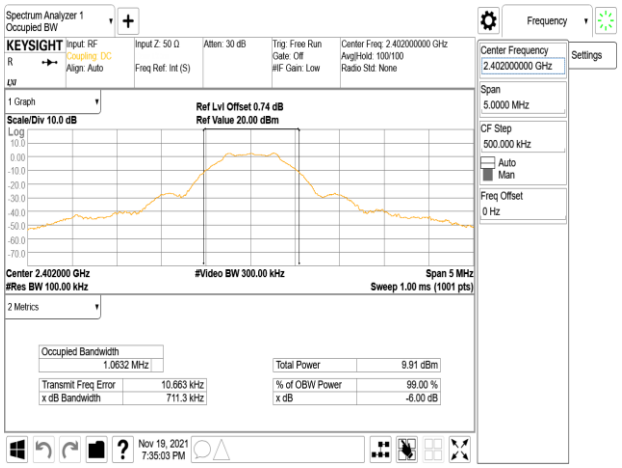

OBW_BLE 2M_LowCH00-2402MHz

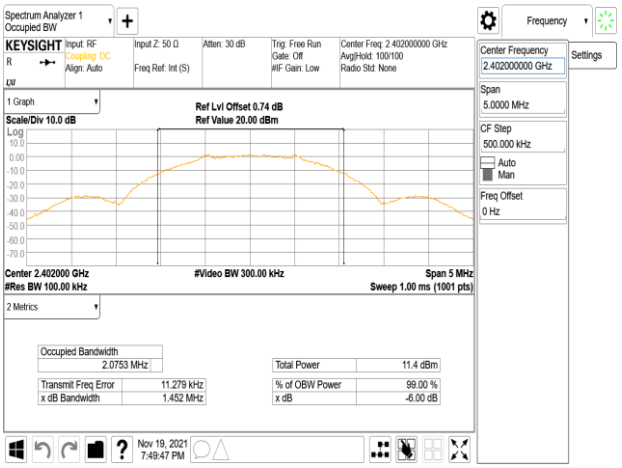

OBW_BLE 1M_MidCH20-2442MHz

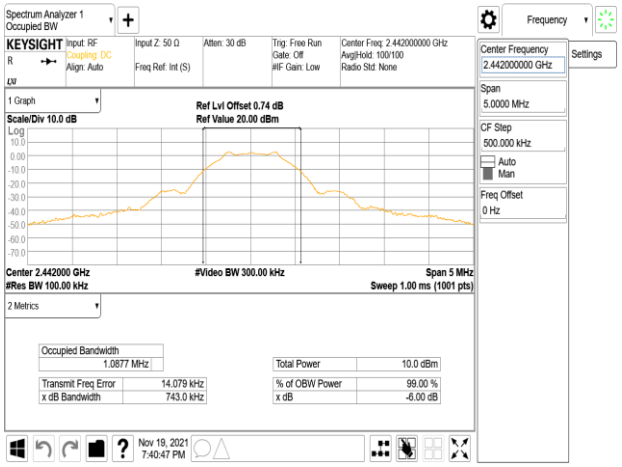

OBW_BLE 2M_MidCH20-2442MHz

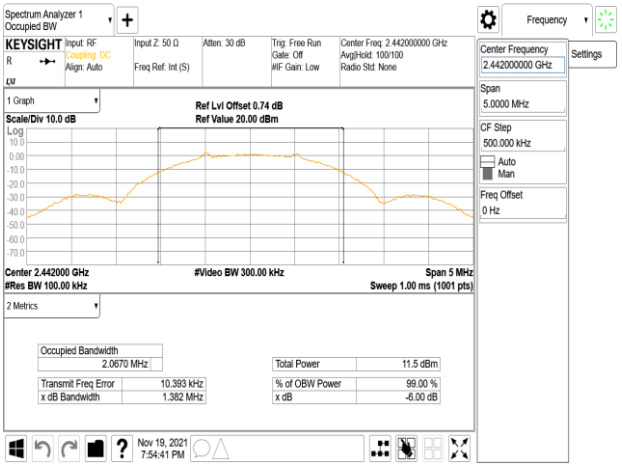

OBW_BLE 1M_HighCH39-2480MHz

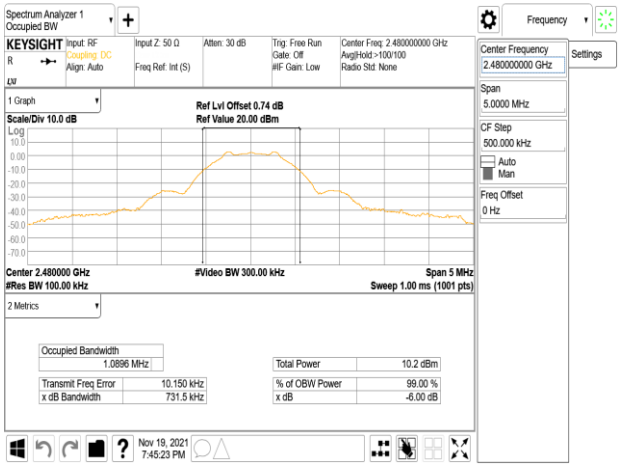

OBW_BLE 2M_HighCH39-2480MHz

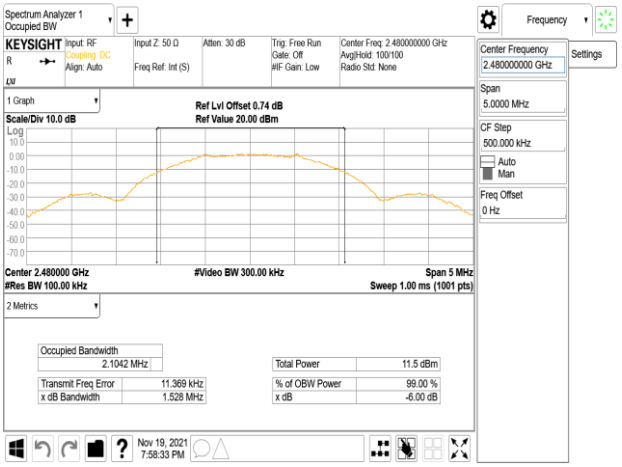

IC OBW_BLE 1M_LowCH00-2402MHz

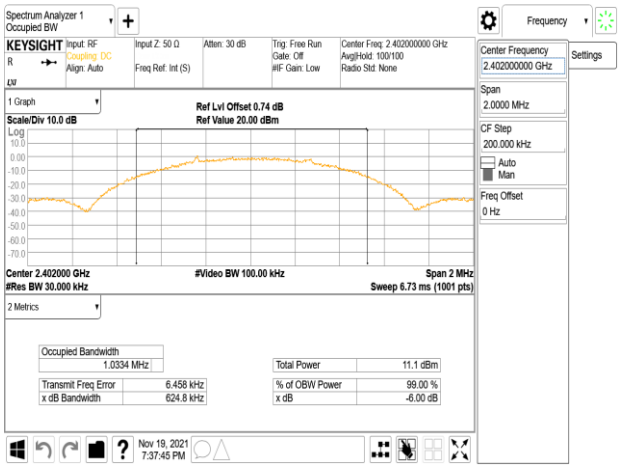

IC OBW_BLE 2M_LowCH00-2402MHz

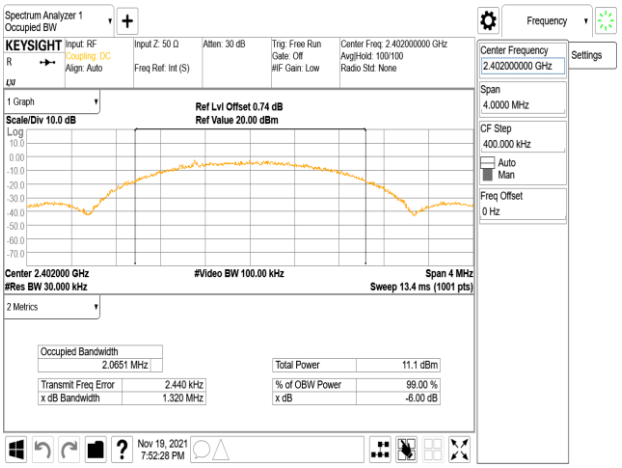

IC OBW_BLE 1M_MidCH20-2442MHz

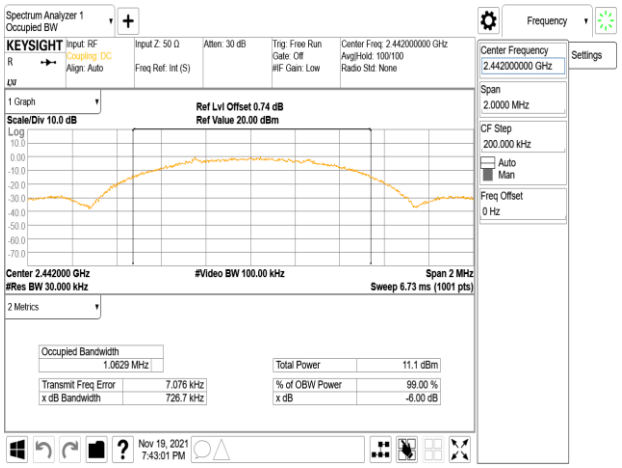

IC OBW_BLE 2M_MidCH20-2442MHz

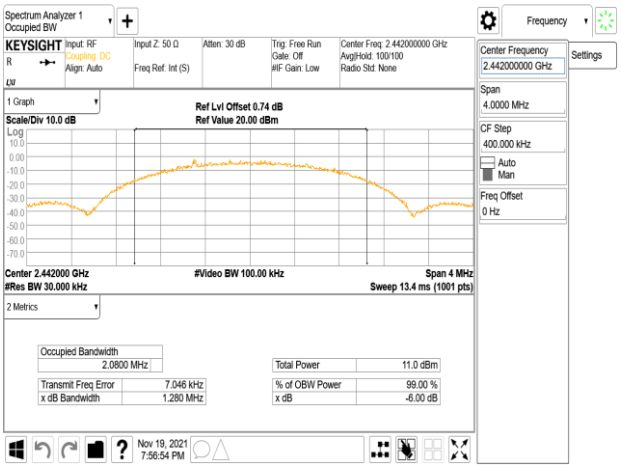

IC OBW_BLE 1M_HighCH39-2480MHz

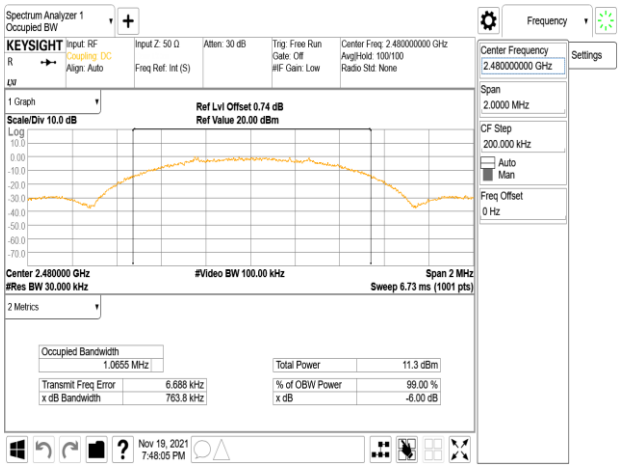

IC OBW_BLE 2M_HighCH39-2480MHz

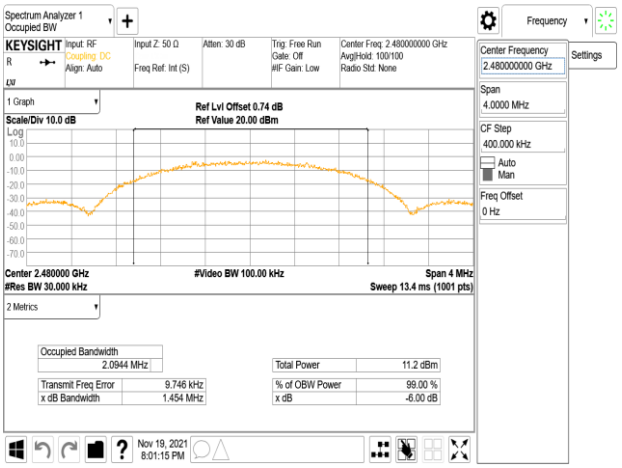

10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

10.2 Test Setup

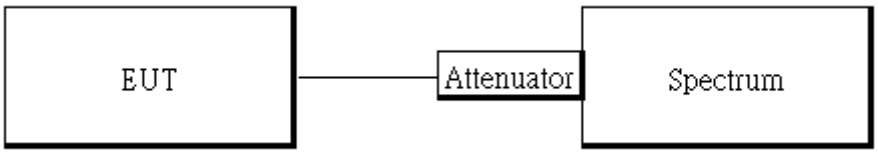

10.3 Measurement Procedure

10.3.1 Reference Level of Emission Limit:

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 100kHz & VBW = 300 kHz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

10.3.2 Conducted Band Edge:

1. To connect Antenna Port of EUT to Spectrum.

2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.

3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
6. Set DL as the limit = reading on marker of reference level measurement – 20dBm
7. Mark the highest readings of the emissions outside of 2400MHz~2483.5MHz.
8. Repeat above procedures until all default test channel (low and high) was complete.

10.3.3 Conducted Spurious Emission:

1. To connect Antenna Port of EUT to Spectrum.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set RBW = 100 kHz & VBW=300 kHz, Detector =Peak, Sweep = Auto
4. Allow trace to fully stabilize.
5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
6. Repeat above procedures until all default test channel measured were complete.

10.4 Measurement Result

BLE 1M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	2.85	-17.15
2442	2.89	-17.11
2480	2.93	-17.07

NOTE: cable loss as 0.74dB that offsets in the spectrum

NOTE: Refer to next page for plots.

BLE 2M_Reference Level of Limit

Frequency (MHz)	RF Power Density (dBm)	Reference Level of Limit = PSD - 20dB (dBm)
2402	2.26	-17.74
2442	1.46	-18.54
2480	2.34	-17.66

NOTE: cable loss as 0.74dB that offsets in the spectrum

NOTE: Refer to next page for plots.

Reference Level_BLE 1M_LowCH00-2402MHz

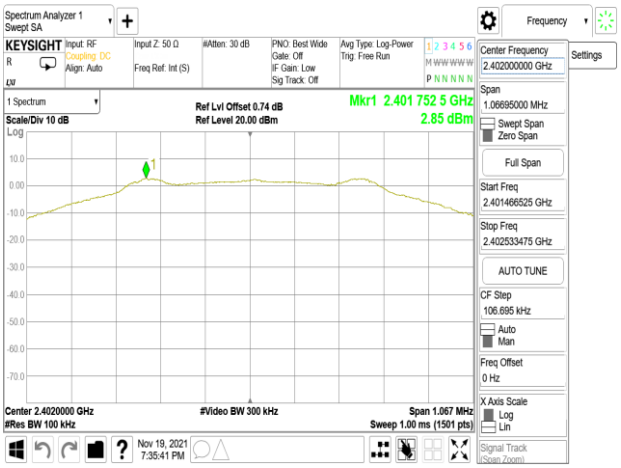

Reference Level_BLE 2M_LowCH00-2402MHz

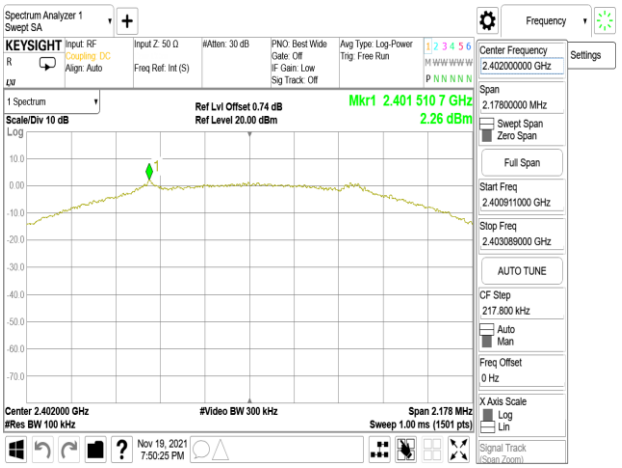

Reference Level_BLE 1M_MidCH20-2442MHz

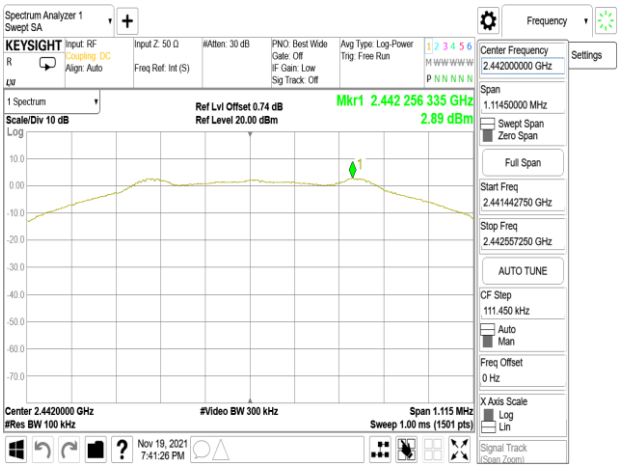

Reference Level_BLE 2M_MidCH20-2442MHz

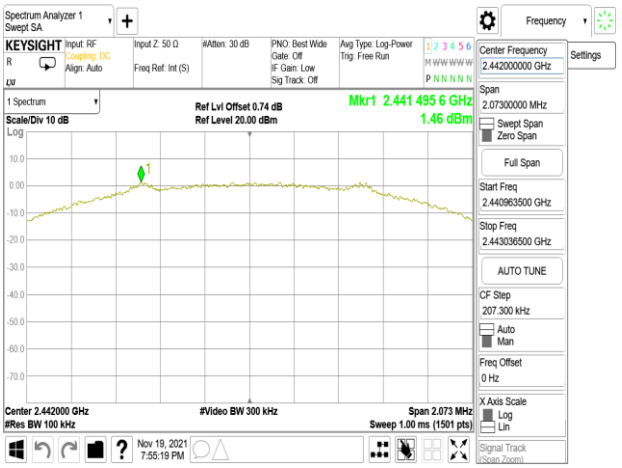

Reference Level_BLE 1M_HighCH39-2480MHz

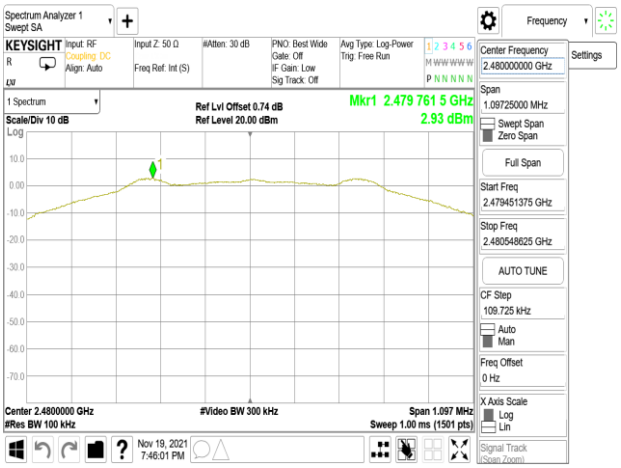

Reference Level_BLE 2M_HighCH39-2480MHz

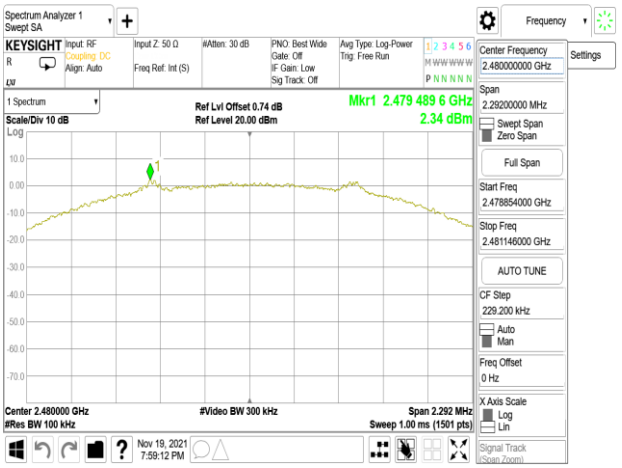

Band Edge_BLE 1M_LowCH00-2402MHz

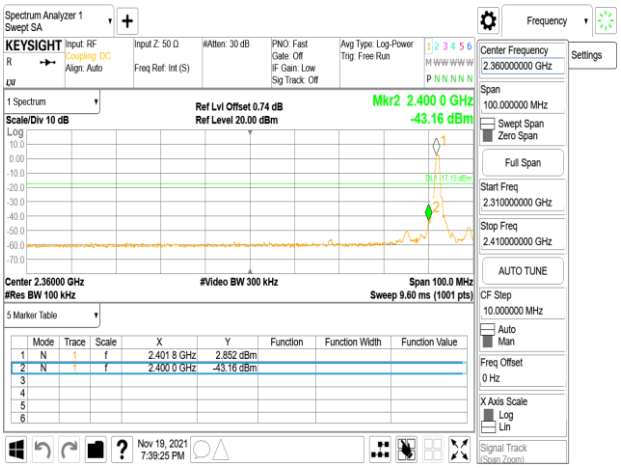

Band Edge_BLE 2M_HighCH39-2480MHz

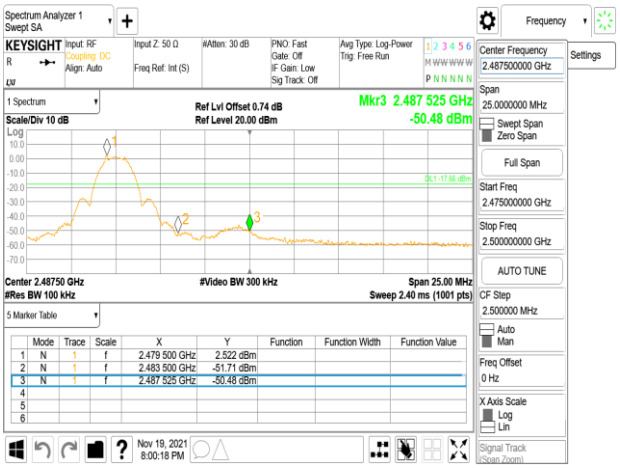

Band Edge_BLE 1M_HighCH39-2480MHz

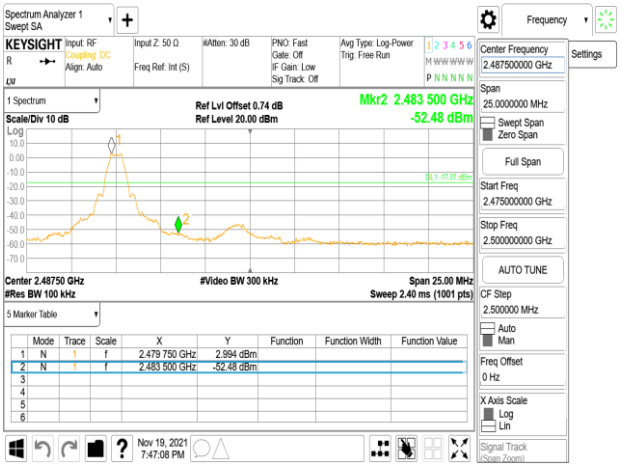

Spurious Emission_BLE 1M_LowCH00-2402MHz

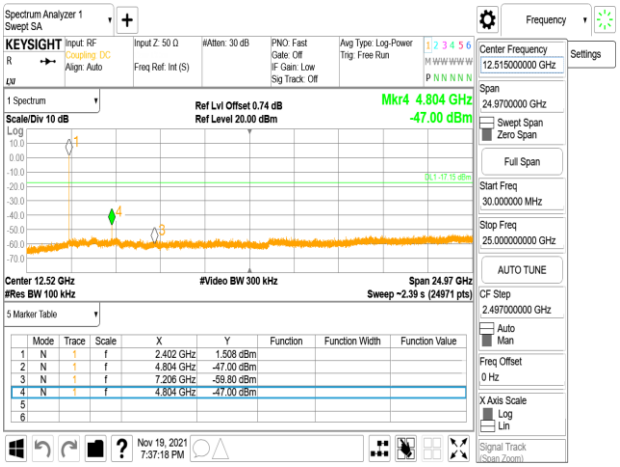

Band Edge_BLE 2M_LowCH00-2402MHz

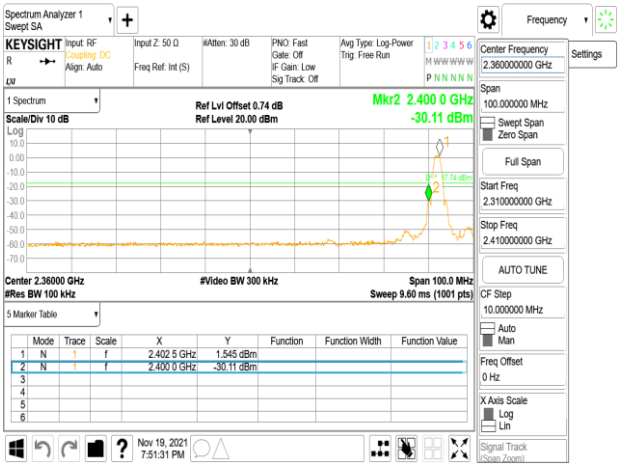

Spurious Emission_BLE 1M_MidCH20-2442MHz

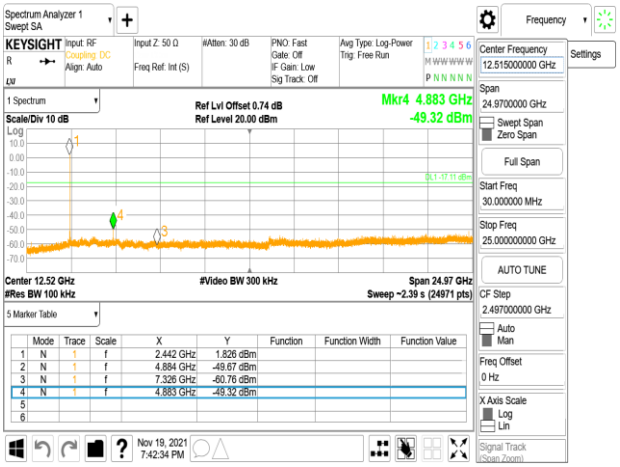

Spurious Emission_BLE 1M_HighCH39-2480MHz

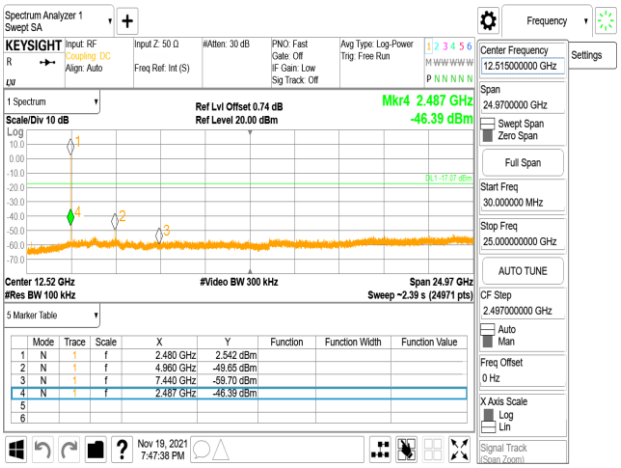

Spurious Emission_BLE 2M_HighCH39-2480MHz

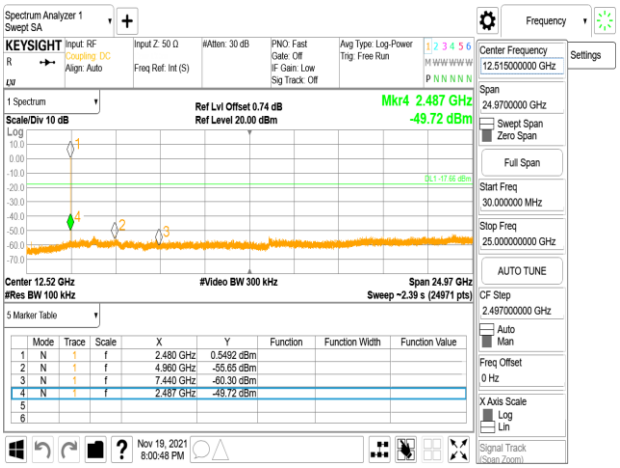

Spurious Emission_BLE 2M_LowCH00-2402MHz

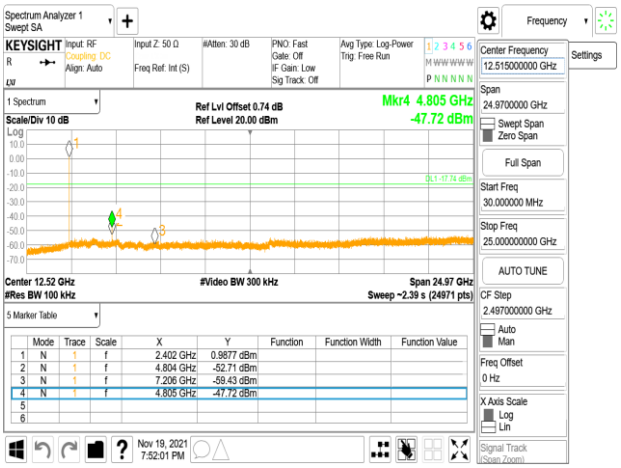

Spurious Emission_BLE 2M_MidCH20-2442MHz

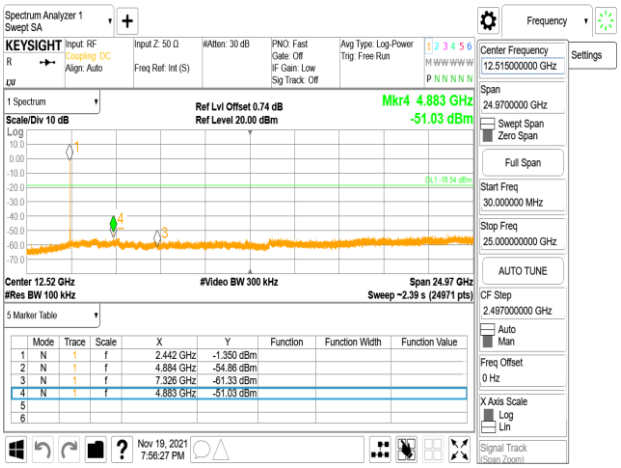

11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

11.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.

11.2 Test Setup

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

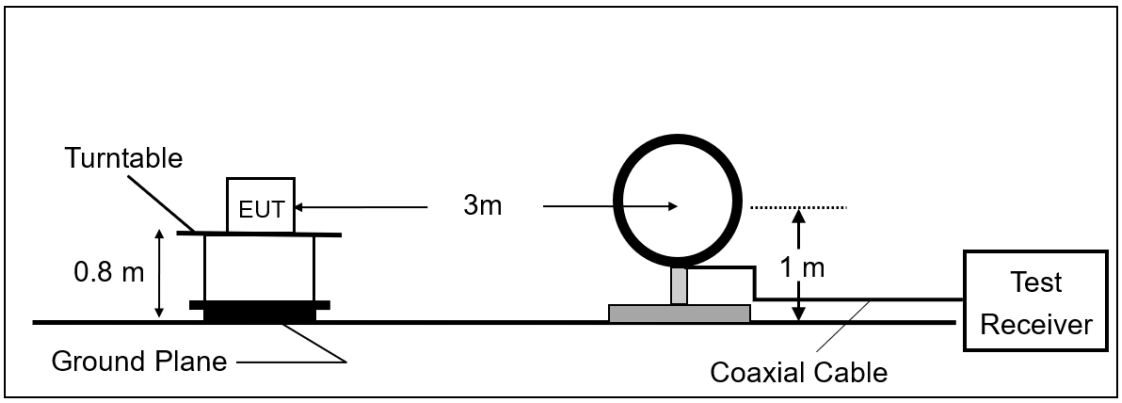

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

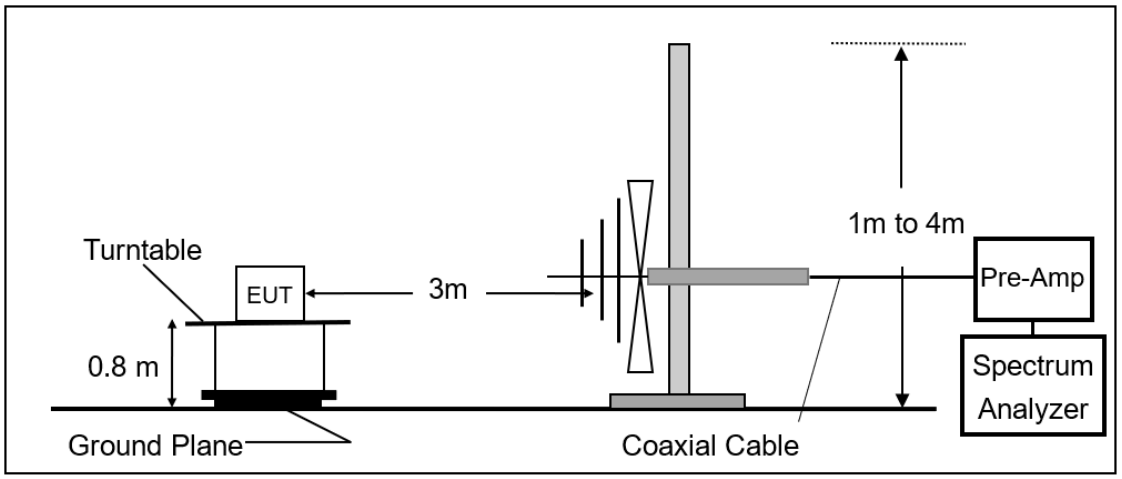

(C) Radiated Emission Test Set-Up, Frequency Above 1GHz.

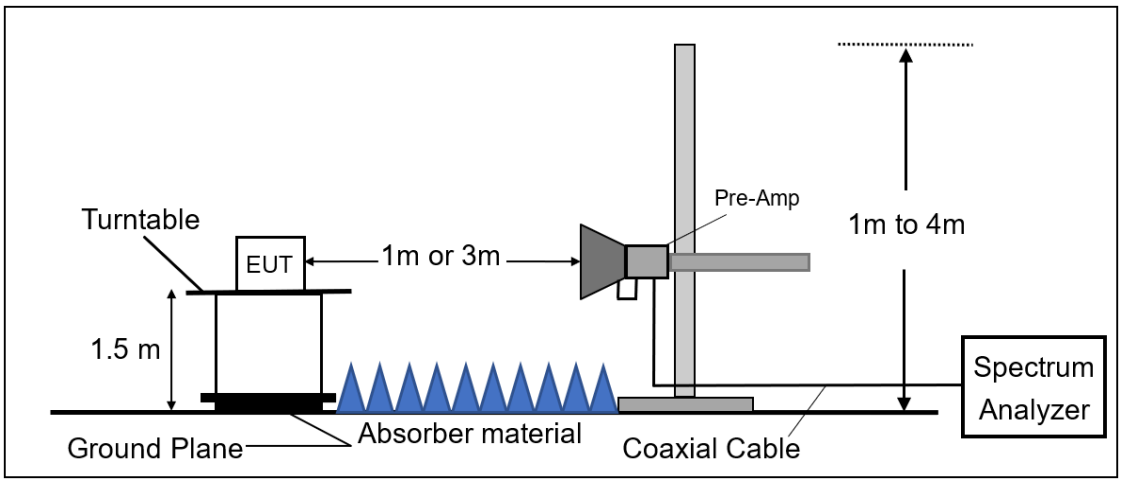

11.3 Measurement Procedure

1. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.
7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.
8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Emission Measurements at frequency above 1 GHz.
9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made “while keeping the antenna in the ‘cone of radiation’ from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response.” is still within the 3dB illumination BW of the measurement antenna.
10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
12. Repeat above procedures until all default test channel measured were complete.

11.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL – AG$$

Where *FS = Field Strength* *CL = Cable Attenuation Factor (Cable Loss)*
RA = Reading Amplitude *AG = Amplifier Gain*
AF = Antenna Factor

*The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)*

Actual FS(dBμV/m) = SPA. Reading level(dBμV) + Factor(dB)

Factor(dB) = Antenna Factor(dBμV/m) + Cable Loss(dB) – Pre_Amplifier Gain(dB)

11.5 Test Results of Radiated Spurious Emissions from 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

11.6 Measurement Result:

11.6.1 Radiated Band Edge Measurement Result

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH Low	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

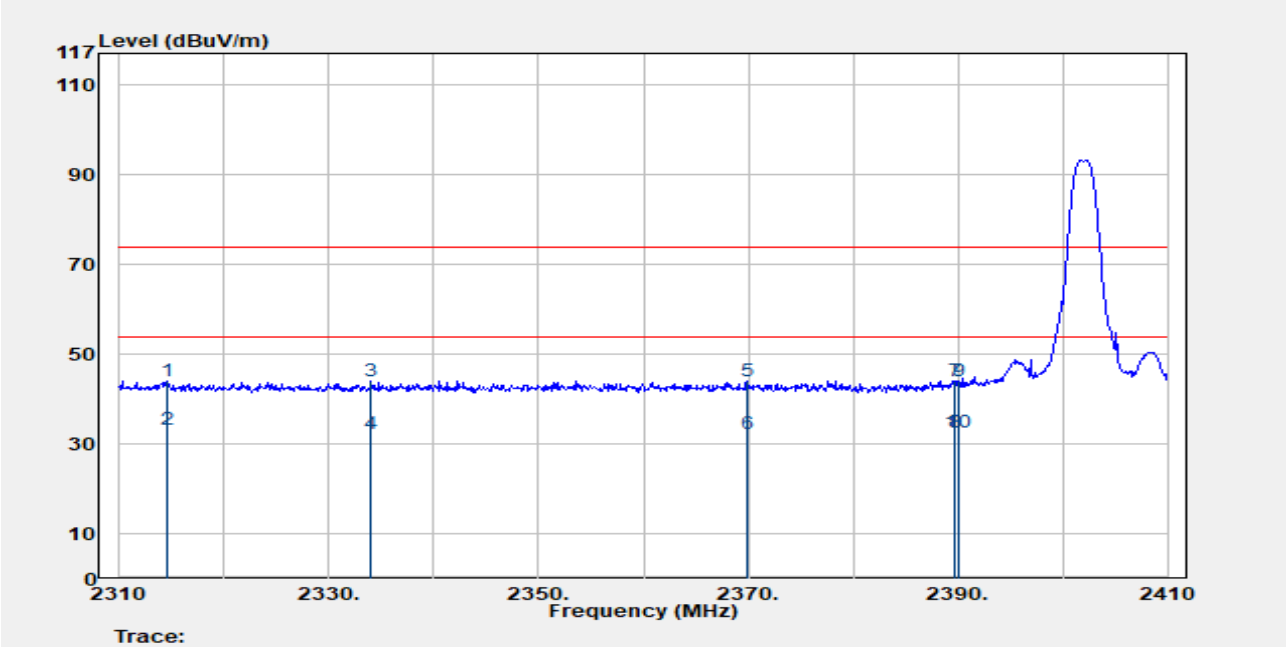

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2314.500	Peak	42.89	1.15	44.04	74.00	-29.96
2314.500	Average	32.02	1.15	33.17	54.00	-20.83
2334.000	Peak	43.15	1.07	44.21	74.00	-29.79
2334.000	Average	31.16	1.07	32.23	54.00	-21.77
2369.900	Peak	43.17	0.96	44.13	74.00	-29.87
2369.900	Average	31.31	0.96	32.27	54.00	-21.73
2389.700	Peak	43.31	0.92	44.22	74.00	-29.78
2389.700	Average	31.66	0.92	32.58	54.00	-21.42
2390.000	Peak	43.18	0.92	44.09	74.00	-29.91
2390.000	Average	31.73	0.92	32.65	54.00	-21.35

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH Low	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

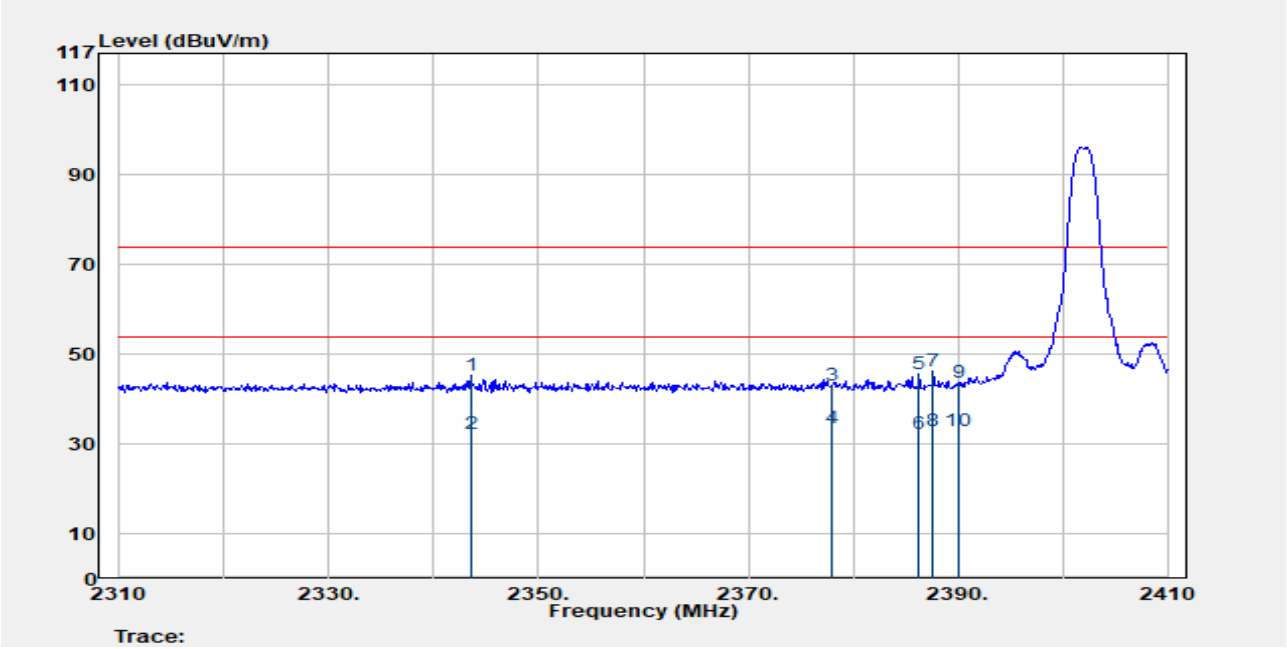

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2343.500	Peak	44.45	1.03	45.48	74.00	-28.52
2343.500	Average	31.27	1.03	32.30	54.00	-21.70
2378.000	Peak	42.24	0.94	43.18	74.00	-30.82
2378.000	Average	32.51	0.94	33.45	54.00	-20.55
2386.300	Peak	44.75	0.92	45.68	74.00	-28.32
2386.300	Average	31.55	0.92	32.47	54.00	-21.53
2387.600	Peak	45.46	0.92	46.38	74.00	-27.62
2387.600	Average	31.93	0.92	32.85	54.00	-21.15
2390.000	Peak	42.73	0.92	43.65	74.00	-30.35
2390.000	Average	32.17	0.92	33.09	54.00	-20.91

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH High	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

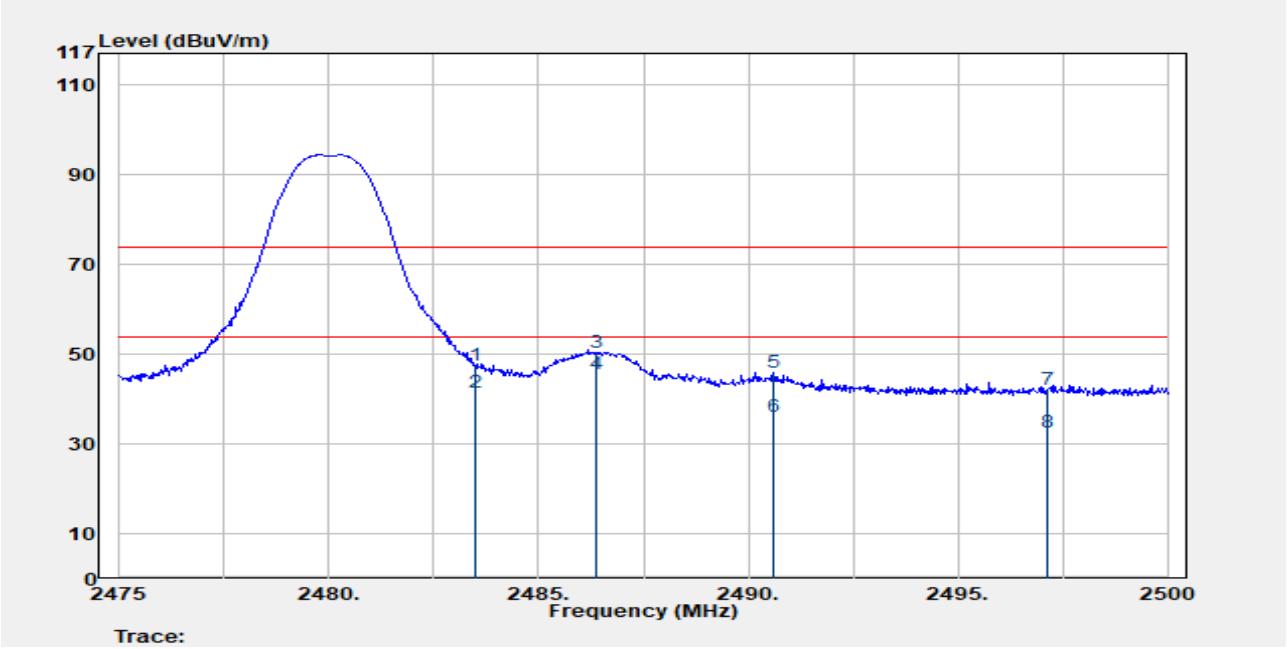

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2483.500	Peak	46.78	0.67	47.45	74.00	-26.55
2483.500	Average	40.96	0.67	41.63	54.00	-12.37
2486.350	Peak	49.62	0.66	50.28	74.00	-23.72
2486.350	Average	45.07	0.66	45.73	54.00	-8.27
2490.600	Peak	45.46	0.64	46.10	74.00	-27.90
2490.600	Average	35.37	0.64	36.01	54.00	-17.99
2497.150	Peak	41.41	0.62	42.03	74.00	-31.97
2497.150	Average	32.14	0.62	32.76	54.00	-21.24

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH High	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

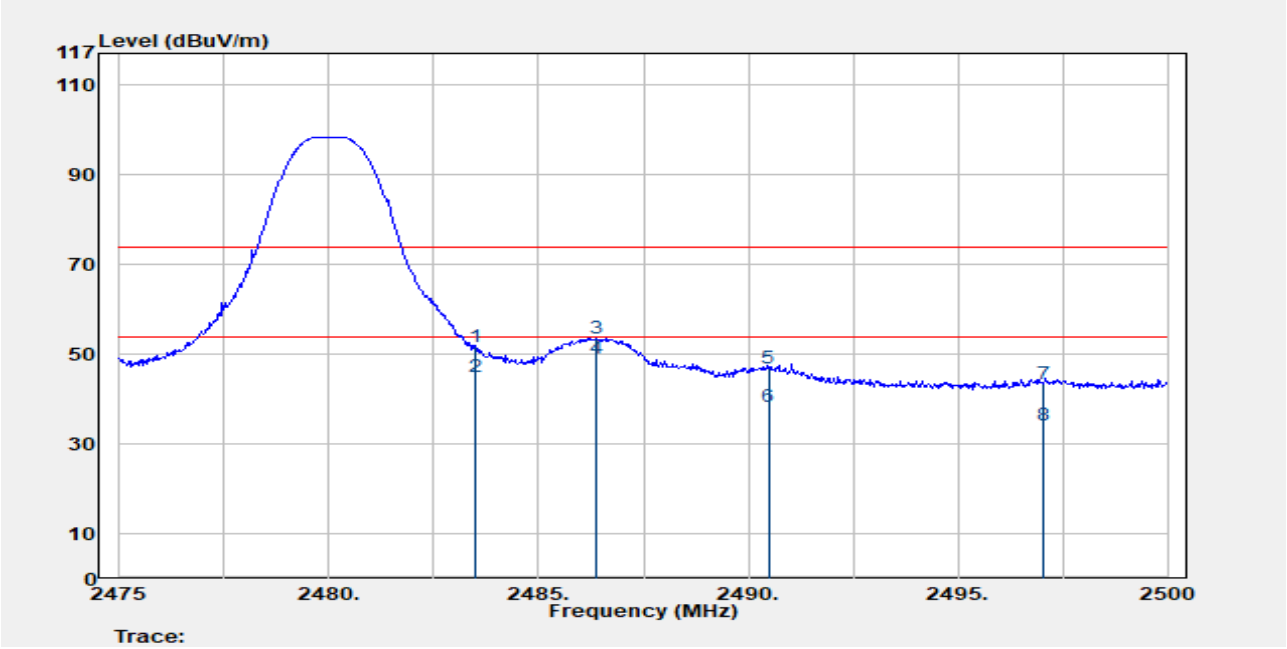

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2483.500	Peak	51.15	0.67	51.82	74.00	-22.18
2483.500	Average	44.39	0.67	45.06	54.00	-8.94
2486.375	Peak	52.88	0.66	53.54	74.00	-20.46
2486.375	Average	48.48	0.66	49.14	54.00	-4.86
2490.480	Peak	46.17	0.64	46.82	74.00	-27.18
2490.480	Average	37.85	0.64	38.49	54.00	-15.51
2497.050	Peak	42.97	0.62	43.59	74.00	-30.41
2497.050	Average	33.62	0.62	34.24	54.00	-19.76

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH Low	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

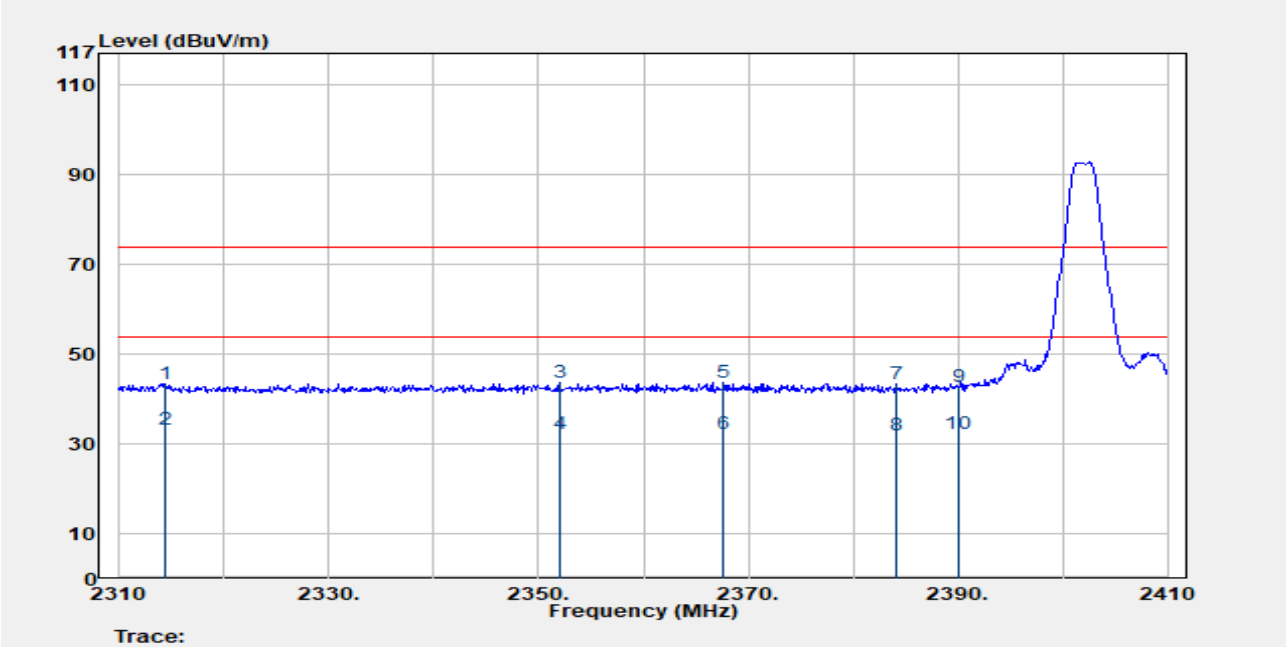

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2314.300	Peak	42.25	1.15	43.40	74.00	-30.60
2314.300	Average	32.02	1.15	33.17	54.00	-20.83
2352.000	Peak	42.61	1.00	43.61	74.00	-30.39
2352.000	Average	31.22	1.00	32.22	54.00	-21.78
2367.600	Peak	42.88	0.96	43.84	74.00	-30.16
2367.600	Average	31.25	0.96	32.21	54.00	-21.79
2384.200	Peak	42.64	0.93	43.57	74.00	-30.43
2384.200	Average	31.22	0.93	32.15	54.00	-21.85
2390.000	Peak	41.84	0.92	42.76	74.00	-31.24
2390.000	Average	31.44	0.92	32.36	54.00	-21.64

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH Low	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

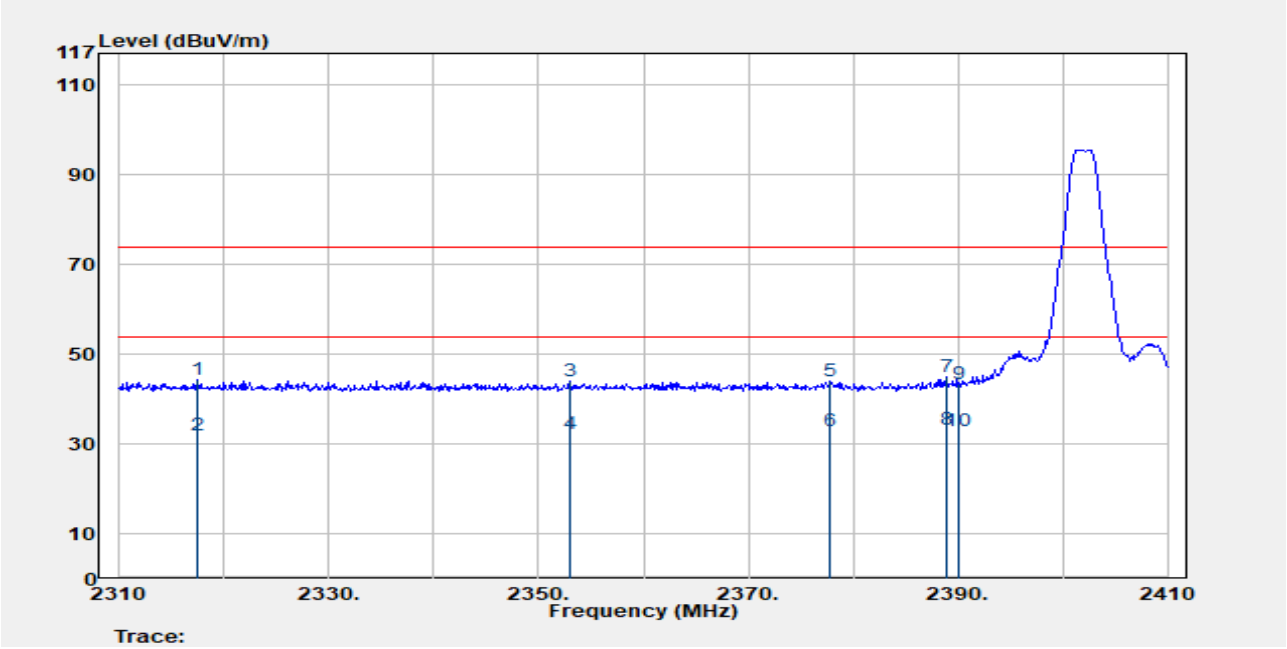

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2317.400	Peak	43.38	1.14	44.51	74.00	-29.49
2317.400	Average	30.92	1.14	32.06	54.00	-21.94
2353.000	Peak	43.19	1.00	44.18	74.00	-29.82
2353.000	Average	31.19	1.00	32.19	54.00	-21.81
2377.800	Peak	43.10	0.94	44.04	74.00	-29.96
2377.800	Average	32.06	0.94	33.00	54.00	-21.00
2388.900	Peak	44.00	0.92	44.91	74.00	-29.09
2388.900	Average	32.29	0.92	33.21	54.00	-20.79
2390.000	Peak	42.49	0.92	43.40	74.00	-30.60
2390.000	Average	32.16	0.92	33.08	54.00	-20.92

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH High	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

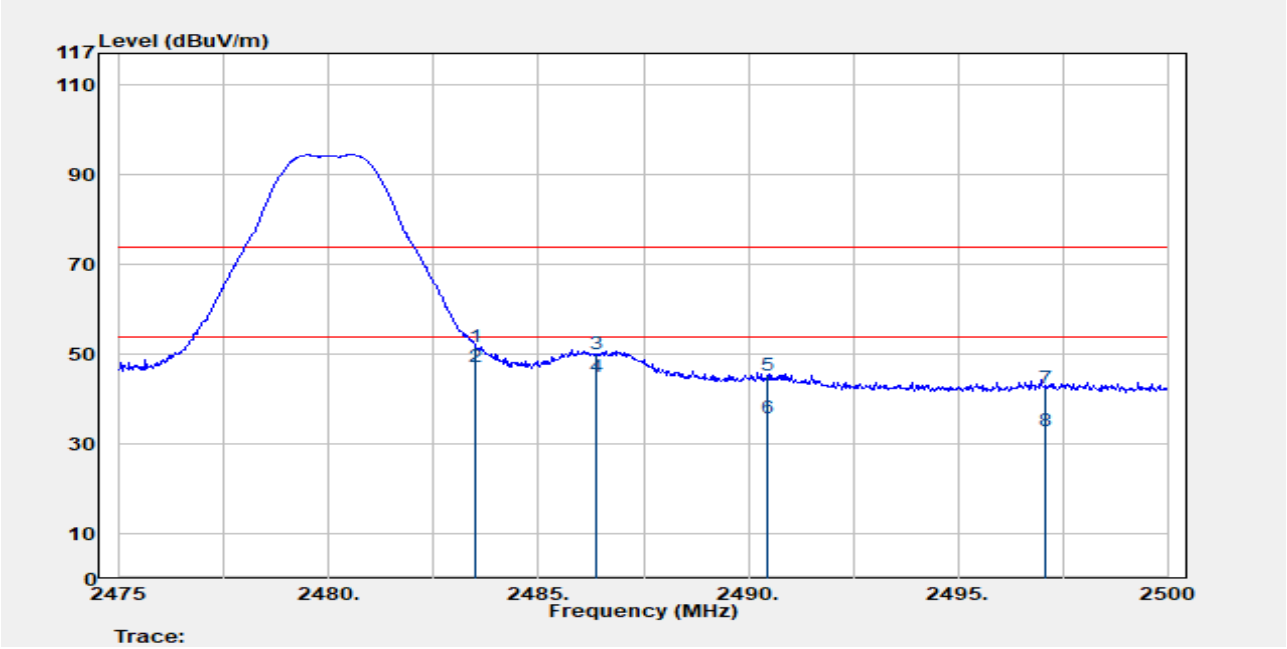

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2483.500	Peak	51.13	0.67	51.80	74.00	-22.20
2483.500	Average	46.72	0.67	47.39	54.00	-6.61
2486.350	Peak	49.48	0.66	50.14	74.00	-23.86
2486.350	Average	44.31	0.66	44.97	54.00	-9.03
2490.450	Peak	44.65	0.64	45.29	74.00	-28.71
2490.450	Average	35.22	0.64	35.86	54.00	-18.14
2497.100	Peak	41.85	0.62	42.47	74.00	-31.53
2497.100	Average	32.27	0.62	32.89	54.00	-21.11

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Bandedge CH High	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

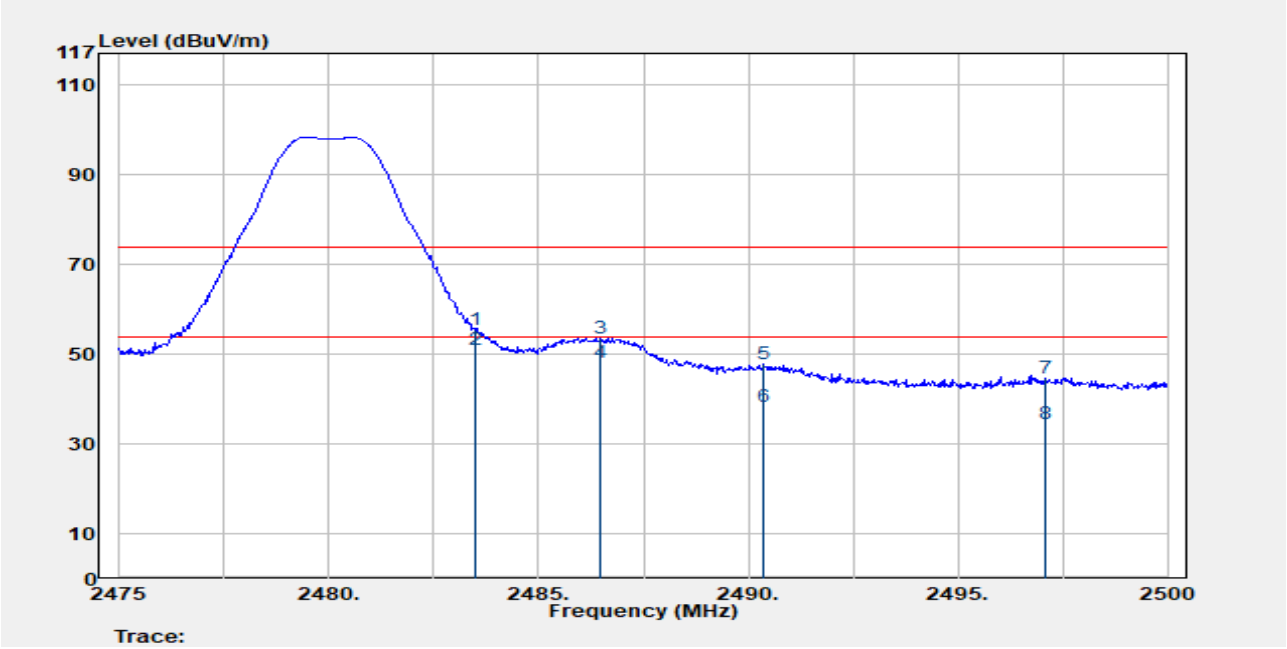

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
2483.500	Peak	54.91	0.67	55.58	74.00	-18.42
2483.500	Average	50.44	0.67	51.11	54.00	-2.89
2486.475	Peak	53.01	0.66	53.67	74.00	-20.33
2486.475	Average	47.62	0.66	48.28	54.00	-5.72
2490.375	Peak	47.08	0.64	47.73	74.00	-26.27
2490.375	Average	37.58	0.64	38.22	54.00	-15.78
2497.100	Peak	44.16	0.62	44.78	74.00	-29.22
2497.100	Average	33.83	0.62	34.45	54.00	-19.55

11.6.2 Radiated Spurious Emission

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

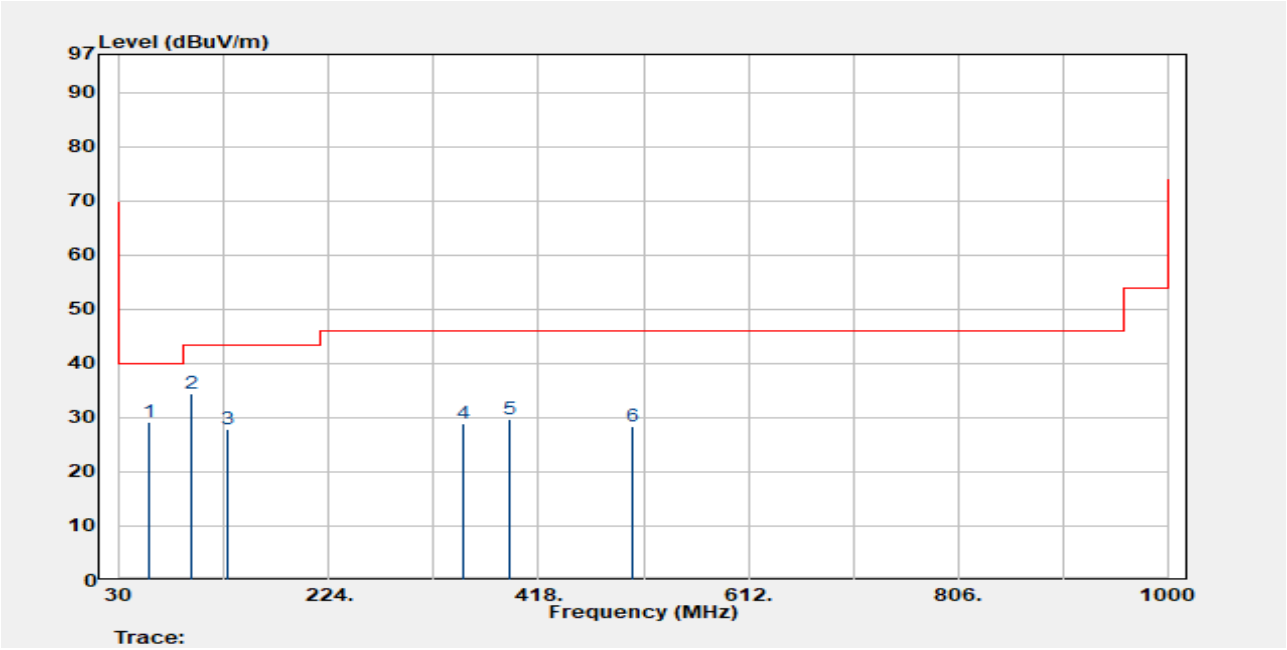

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
57.160	Peak	37.66	-8.53	29.12	40.00	-10.88
95.960	Peak	48.10	-13.73	34.37	43.50	-9.13
129.910	Peak	36.34	-8.55	27.79	43.50	-15.71
348.160	Peak	33.86	-4.97	28.90	46.00	-17.10
390.840	Peak	34.06	-4.42	29.64	46.00	-16.36
504.330	Peak	31.27	-2.94	28.33	46.00	-17.67

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

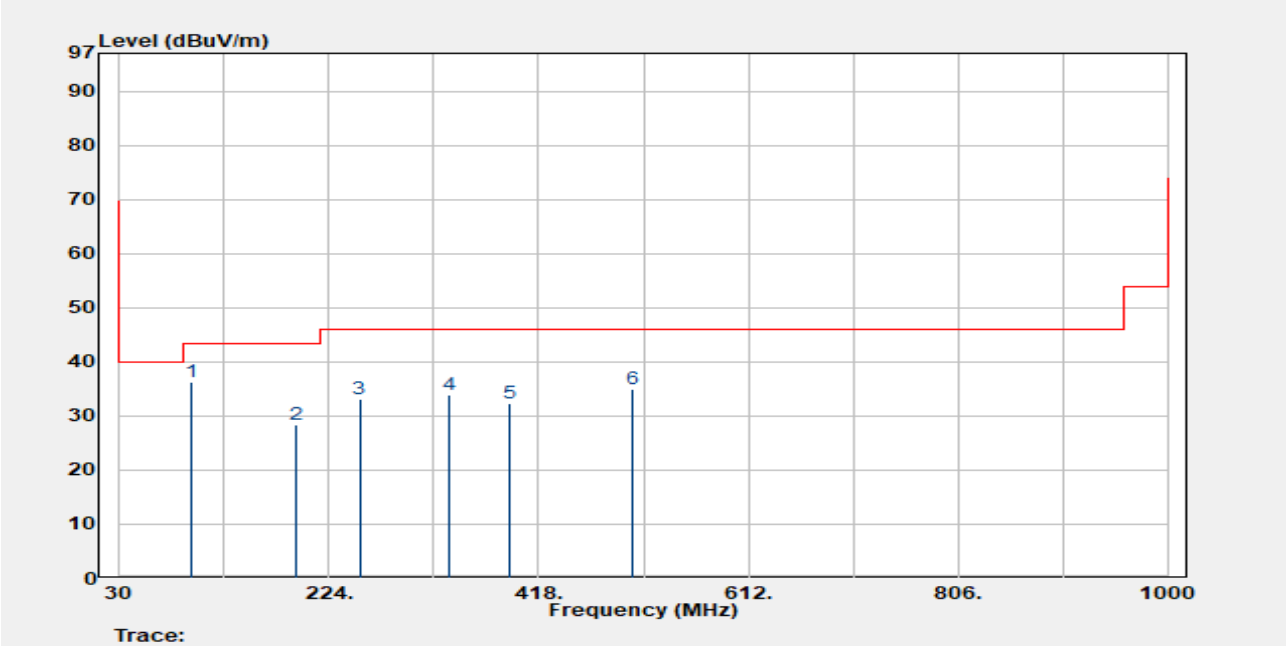

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
95.960	Peak	50.09	-13.73	36.36	43.50	-7.14
192.960	Peak	38.00	-9.68	28.32	43.50	-15.18
252.130	Peak	40.90	-7.84	33.06	46.00	-12.94
335.550	Peak	38.80	-5.02	33.78	46.00	-12.22
390.840	Peak	36.87	-4.42	32.46	46.00	-13.54
504.330	Peak	37.79	-2.94	34.86	46.00	-11.14

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

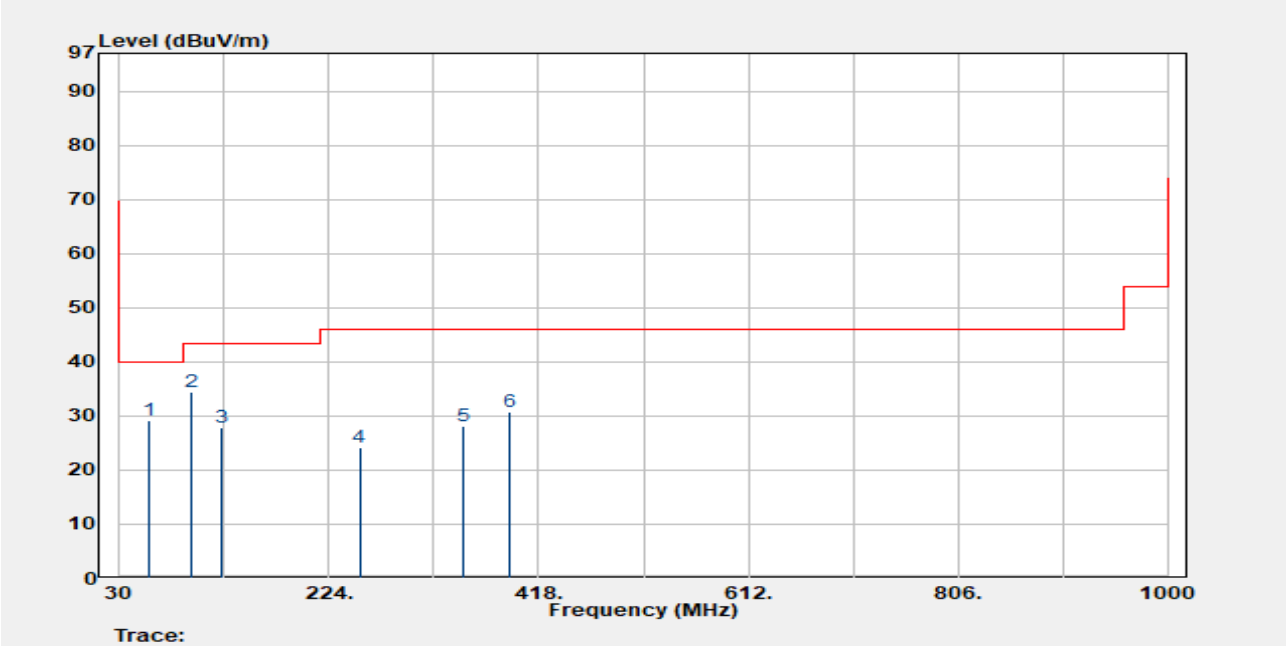

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
57.160	Peak	37.81	-8.53	29.28	40.00	-10.72
95.960	Peak	48.07	-13.73	34.34	43.50	-9.16
125.060	Peak	37.08	-9.19	27.89	43.50	-15.61
252.130	Peak	32.01	-7.84	24.17	46.00	-21.83
348.160	Peak	33.01	-4.97	28.04	46.00	-17.96
390.840	Peak	35.07	-4.42	30.65	46.00	-15.35

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

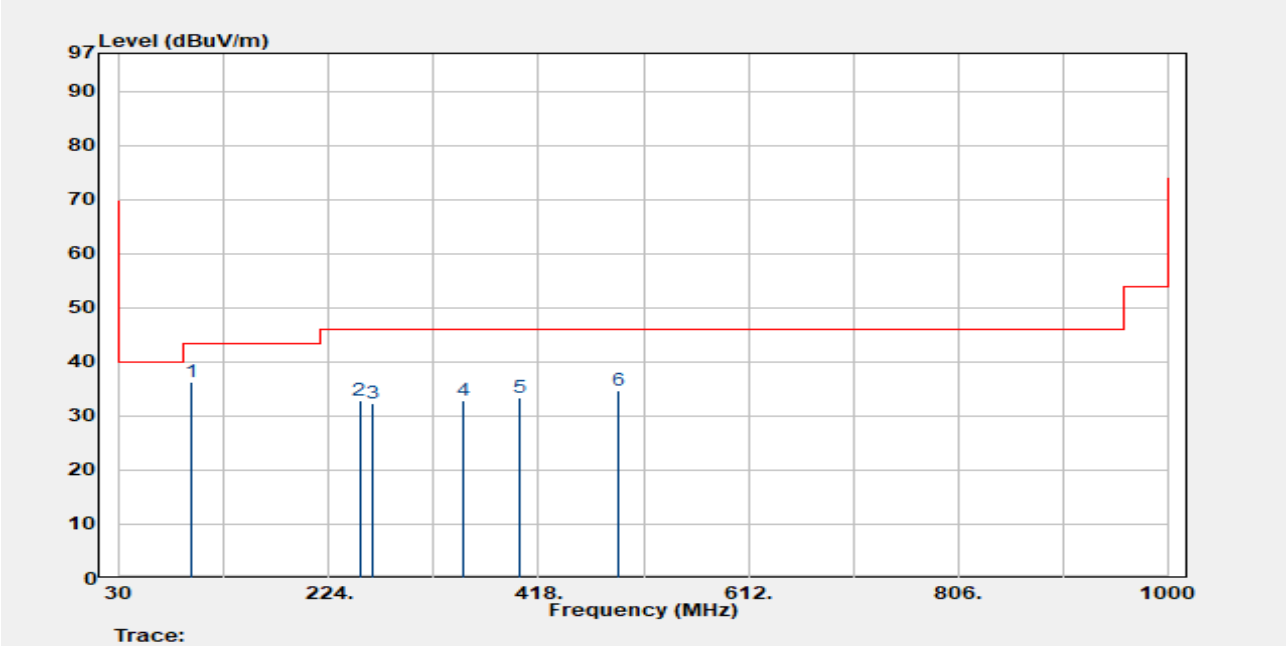

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
95.960	Peak	49.94	-13.73	36.21	43.50	-7.29
252.130	Peak	40.68	-7.84	32.84	46.00	-13.16
263.770	Peak	39.72	-7.35	32.37	46.00	-13.63
348.160	Peak	37.81	-4.97	32.84	46.00	-13.16
399.570	Peak	37.69	-4.38	33.31	46.00	-12.69
491.720	Peak	37.28	-2.61	34.67	46.00	-11.33

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Low	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

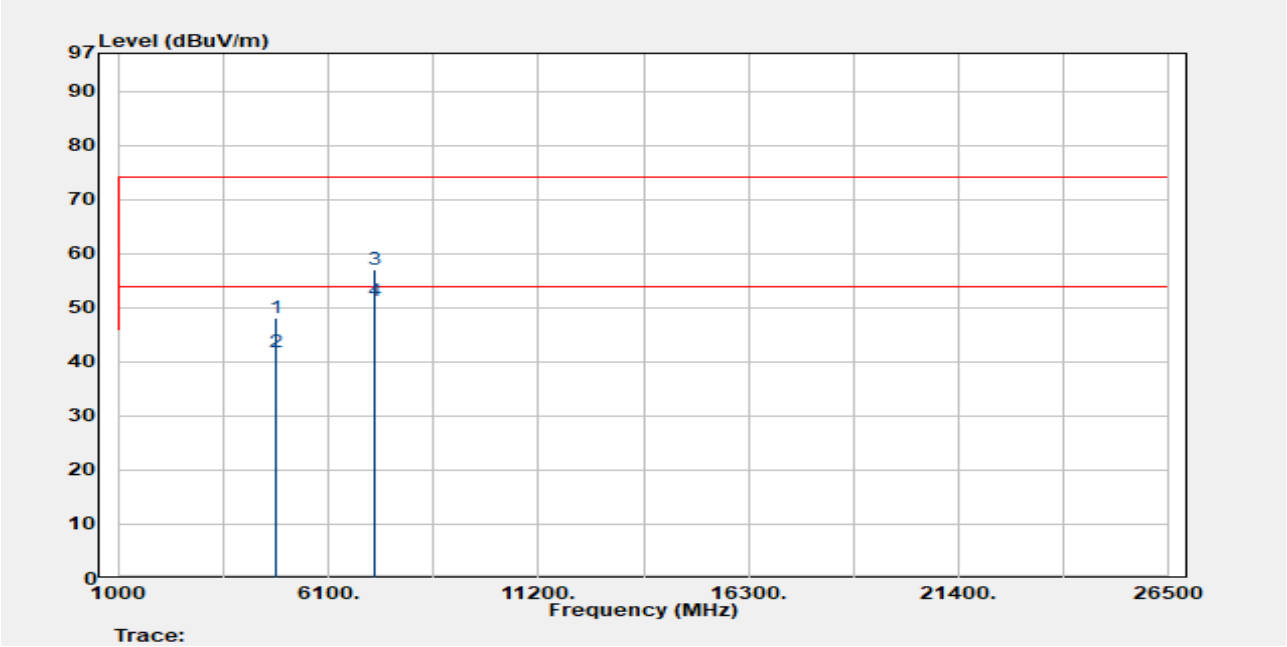

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4804.000	Peak	40.93	7.14	48.08	74.00	-25.92
4804.000	Average	34.68	7.14	41.82	54.00	-12.18
7206.000	Peak	42.46	14.60	57.06	74.00	-16.94
7206.000	Average	36.62	14.60	51.22	54.00	-2.78

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Low	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

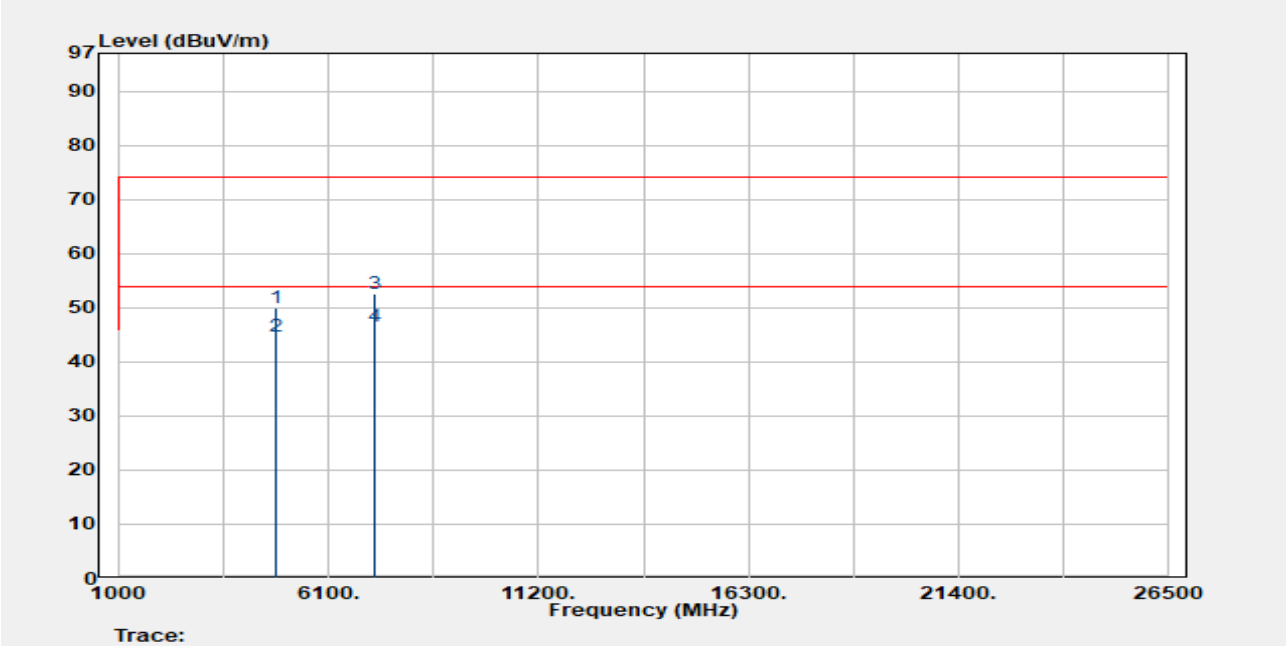

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4804.000	Peak	42.69	7.14	49.84	74.00	-24.16
4804.000	Average	37.56	7.14	44.70	54.00	-9.30
7206.000	Peak	37.98	14.60	52.59	74.00	-21.41
7206.000	Average	32.03	14.60	46.63	54.00	-7.37

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

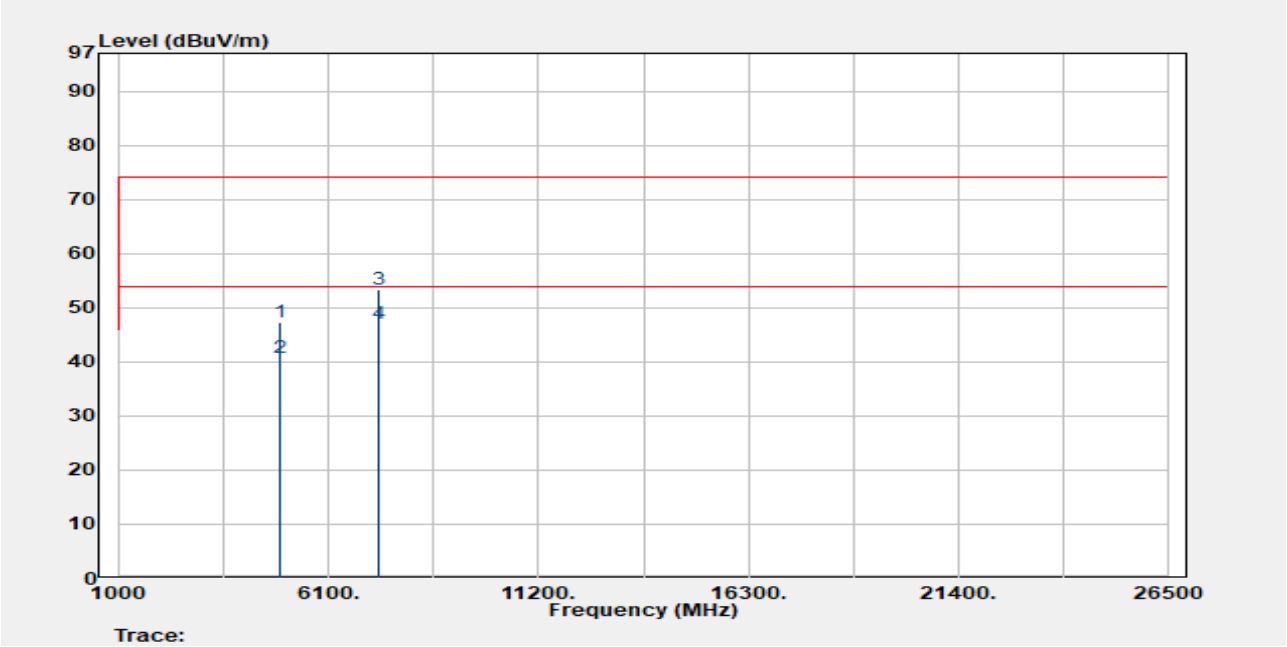

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4884.000	Peak	39.53	7.68	47.21	74.00	-26.79
4884.000	Average	32.96	7.68	40.64	54.00	-13.36
7326.000	Peak	38.22	15.24	53.46	74.00	-20.54
7326.000	Average	31.73	15.24	46.97	54.00	-7.03

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

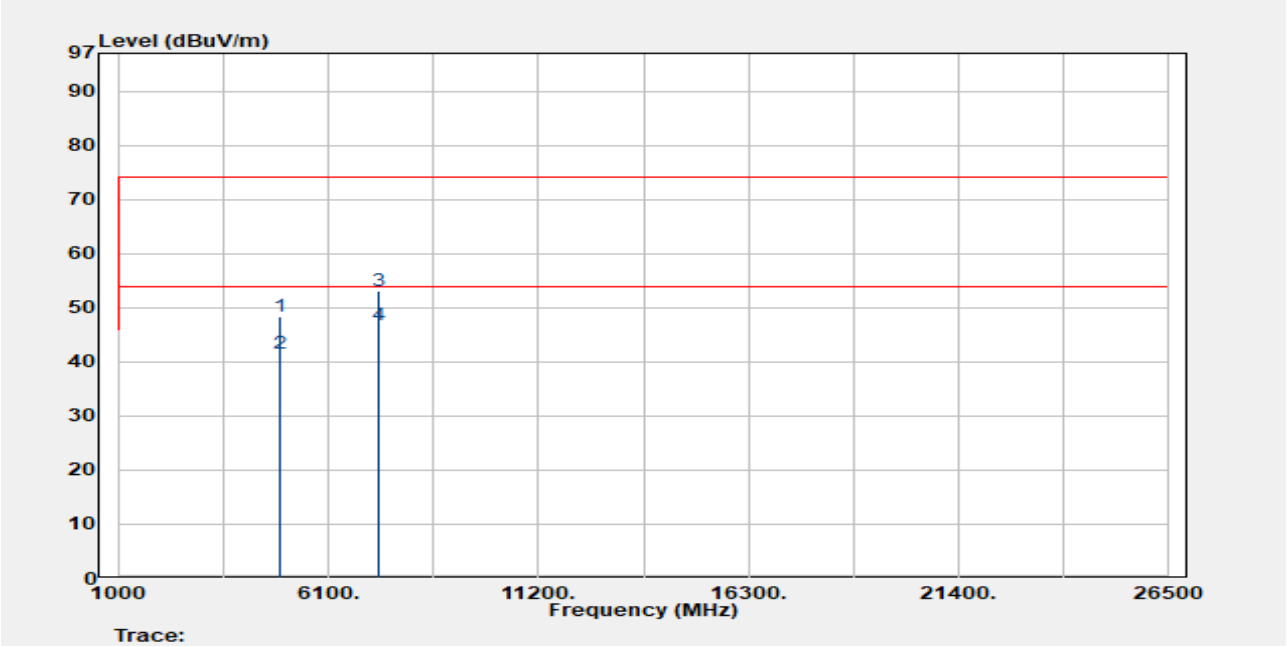

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4884.000	Peak	40.73	7.68	48.41	74.00	-25.59
4884.000	Average	33.83	7.68	41.51	54.00	-12.49
7326.000	Peak	37.99	15.24	53.23	74.00	-20.77
7326.000	Average	31.56	15.24	46.80	54.00	-7.20

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH High	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

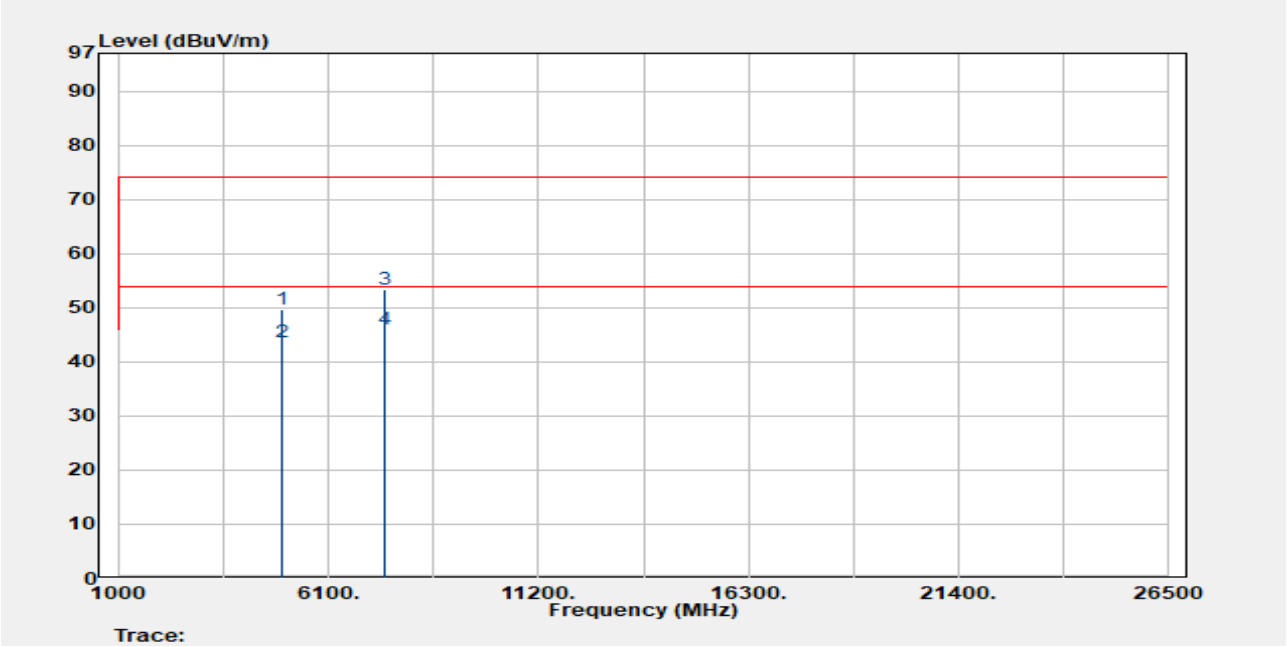

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4960.000	Peak	41.81	7.95	49.76	74.00	-24.24
4960.000	Average	35.76	7.95	43.71	54.00	-10.29
7440.000	Peak	38.85	14.61	53.46	74.00	-20.54
7440.000	Average	31.46	14.61	46.07	54.00	-7.93

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 1M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH High	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

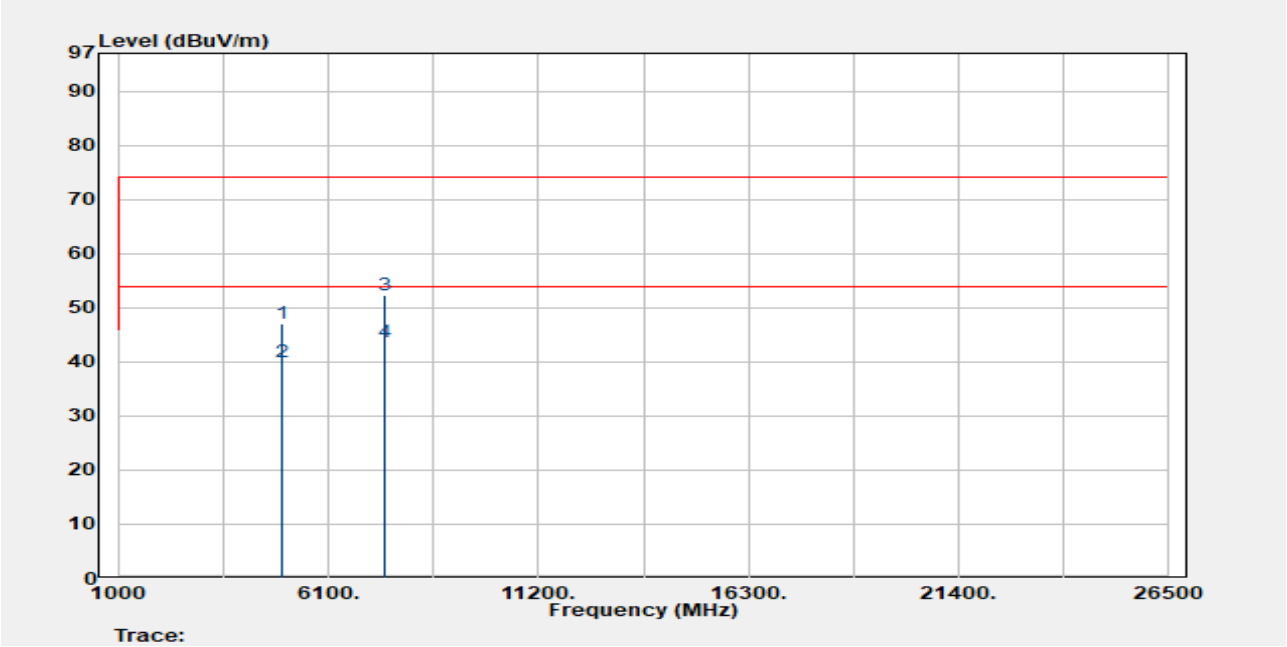

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4960.000	Peak	39.21	7.95	47.16	74.00	-26.84
4960.000	Average	32.12	7.95	40.07	54.00	-13.93
7440.000	Peak	37.76	14.61	52.37	74.00	-21.63
7440.000	Average	28.92	14.61	43.53	54.00	-10.47

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Low	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

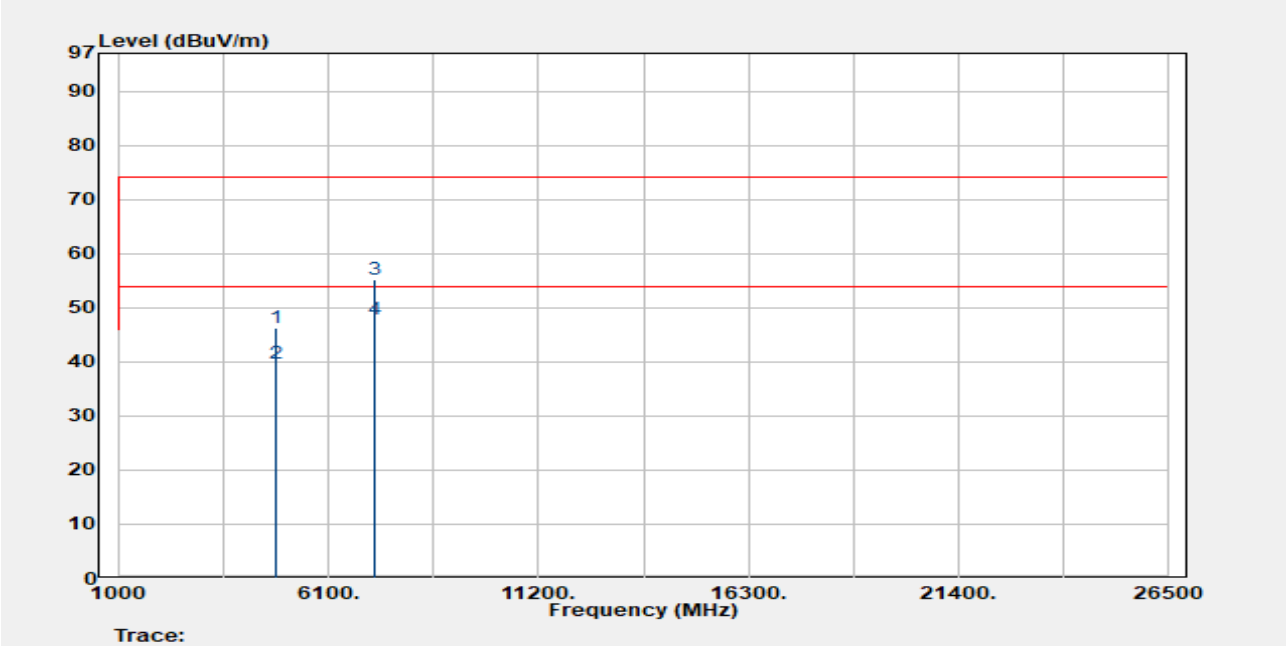

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4804.000	Peak	39.13	7.14	46.27	74.00	-27.73
4804.000	Average	32.43	7.14	39.57	54.00	-14.43
7206.000	Peak	40.62	14.60	55.23	74.00	-18.77
7206.000	Average	33.18	14.60	47.78	54.00	-6.22

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2402 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Low	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

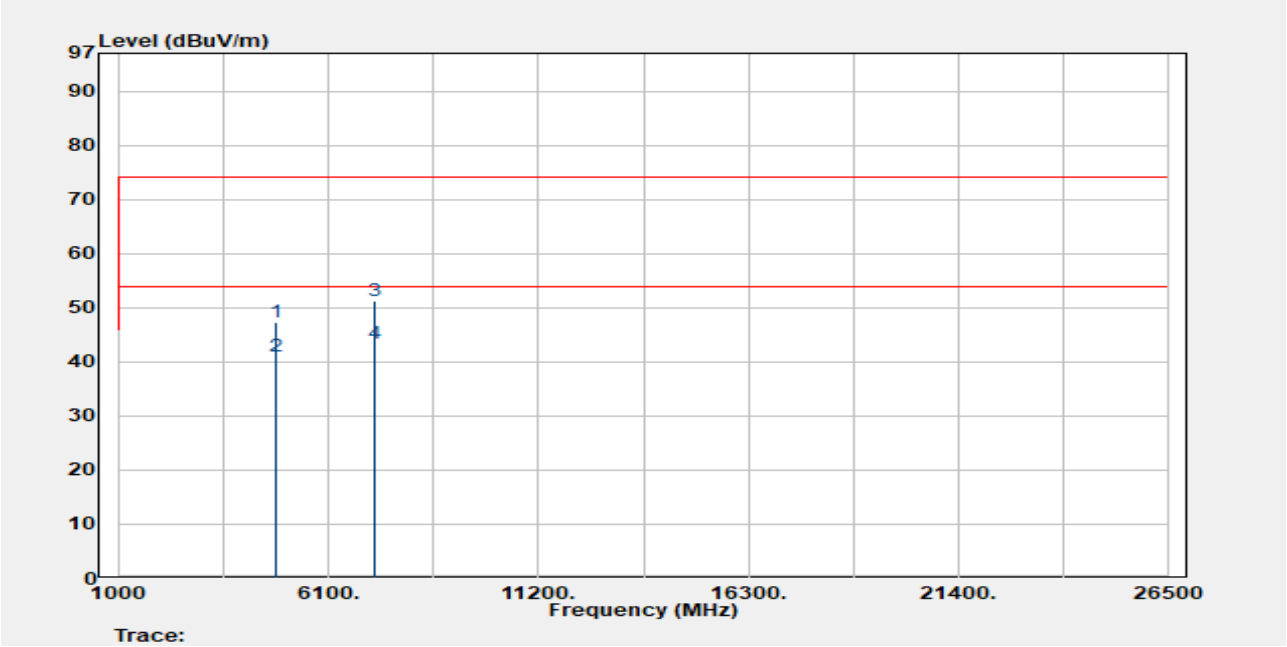

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4804.000	Peak	40.27	7.14	47.42	74.00	-26.58
4804.000	Average	33.96	7.14	41.10	54.00	-12.90
7206.000	Peak	36.68	14.60	51.28	74.00	-22.72
7206.000	Average	28.75	14.60	43.35	54.00	-10.65

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

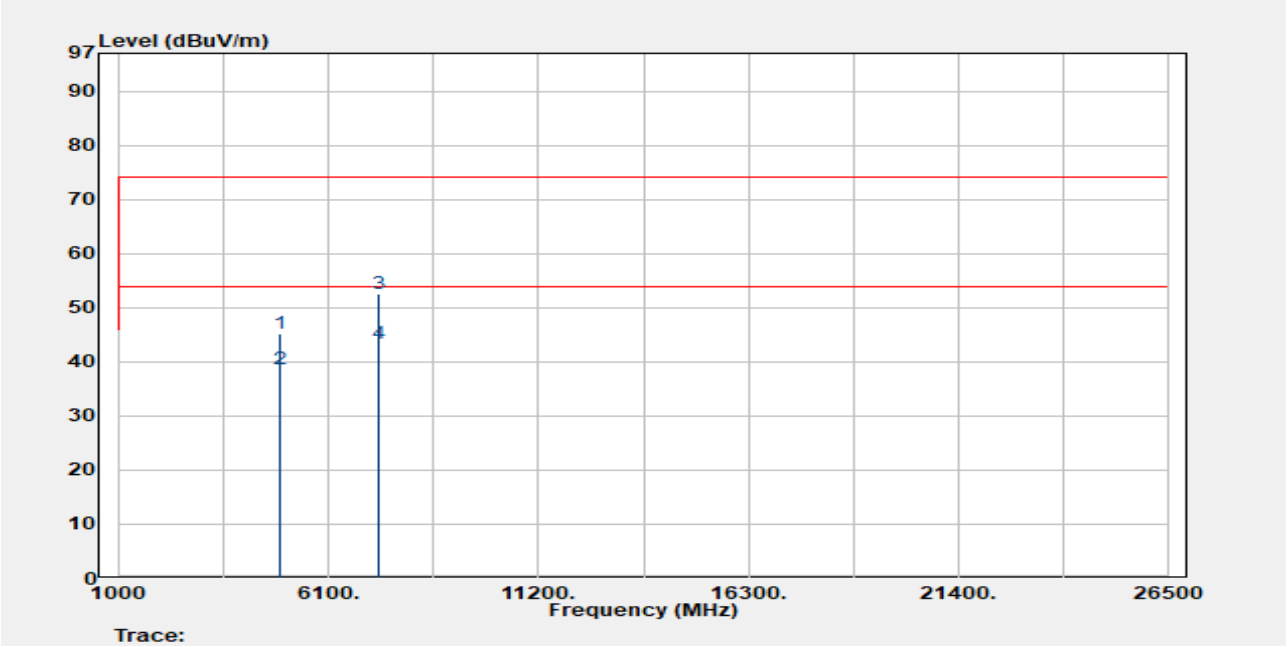

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
4884.000	Peak	37.56	7.68	45.24	74.00	-28.76
4884.000	Average	30.88	7.68	38.56	54.00	-15.44
7326.000	Peak	37.46	15.24	52.70	74.00	-21.30
7326.000	Average	28.16	15.24	43.40	54.00	-10.60

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2442 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH Mid	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

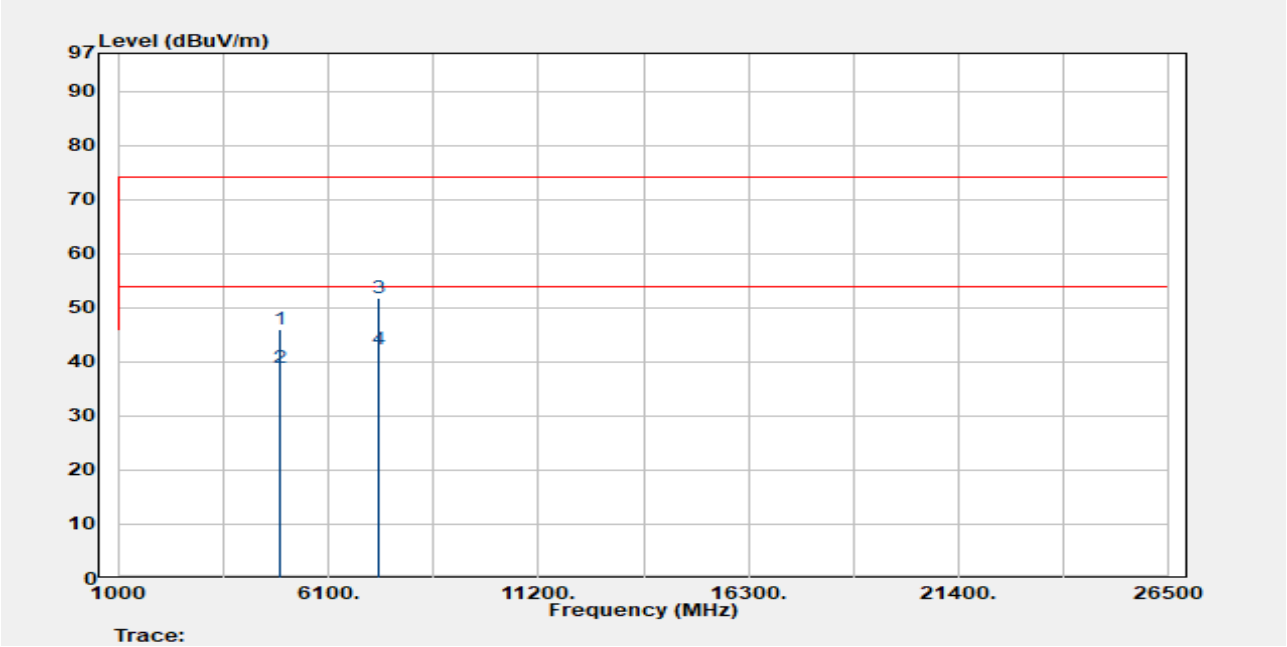

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4884.000	Peak	38.25	7.68	45.92	74.00	-28.08
4884.000	Average	31.32	7.68	39.00	54.00	-15.00
7326.000	Peak	36.51	15.24	51.75	74.00	-22.25
7326.000	Average	27.06	15.24	42.30	54.00	-11.70

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH High	Antenna Pol.	:Vertical
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

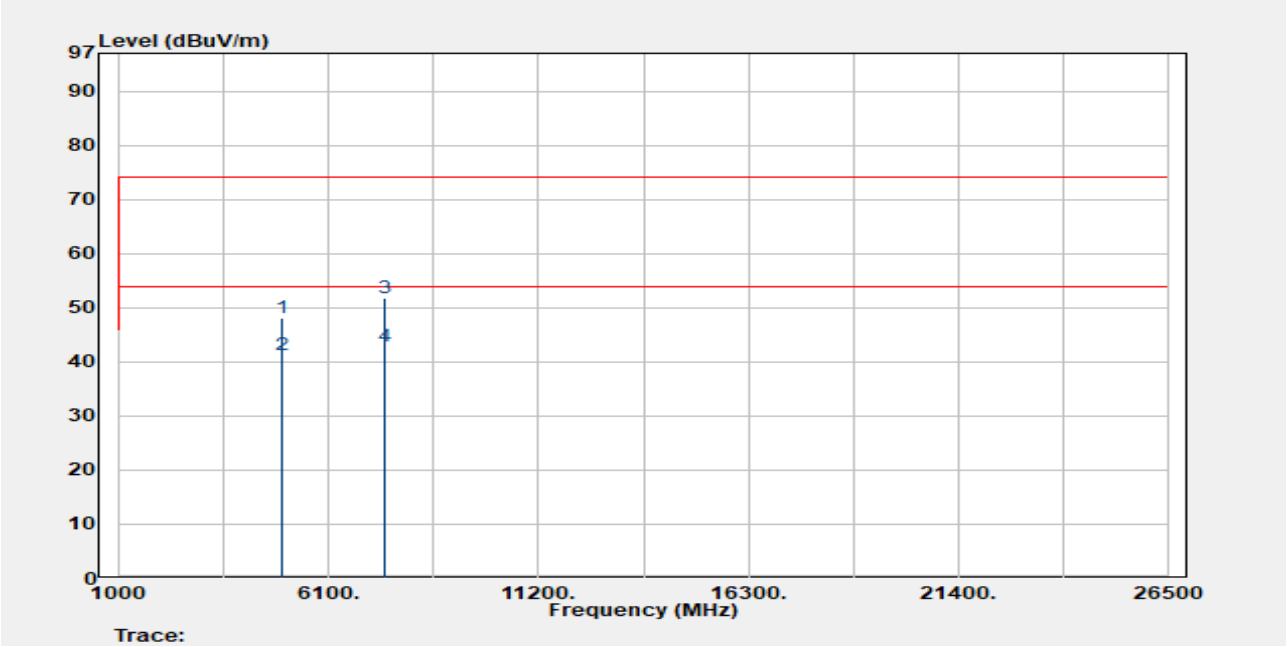

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4960.000	Peak	40.15	7.95	48.10	74.00	-25.90
4960.000	Average	33.42	7.95	41.37	54.00	-12.63
7440.000	Peak	37.25	14.61	51.87	74.00	-22.13
7440.000	Average	28.16	14.61	42.77	54.00	-11.23

Report Number	:ER-2021-B0014	Test Site	:SAC 3
Operation Mode	:BLE 2M	Test Date	:2021-11-18
Test Frequency	:2480 MHz	Temp./Humi.	:23.3/64
Test Mode	:Tx CH High	Antenna Pol.	:Horizontal
EUT Pol	:E2 Plane	Engineer	:Ricky Chen

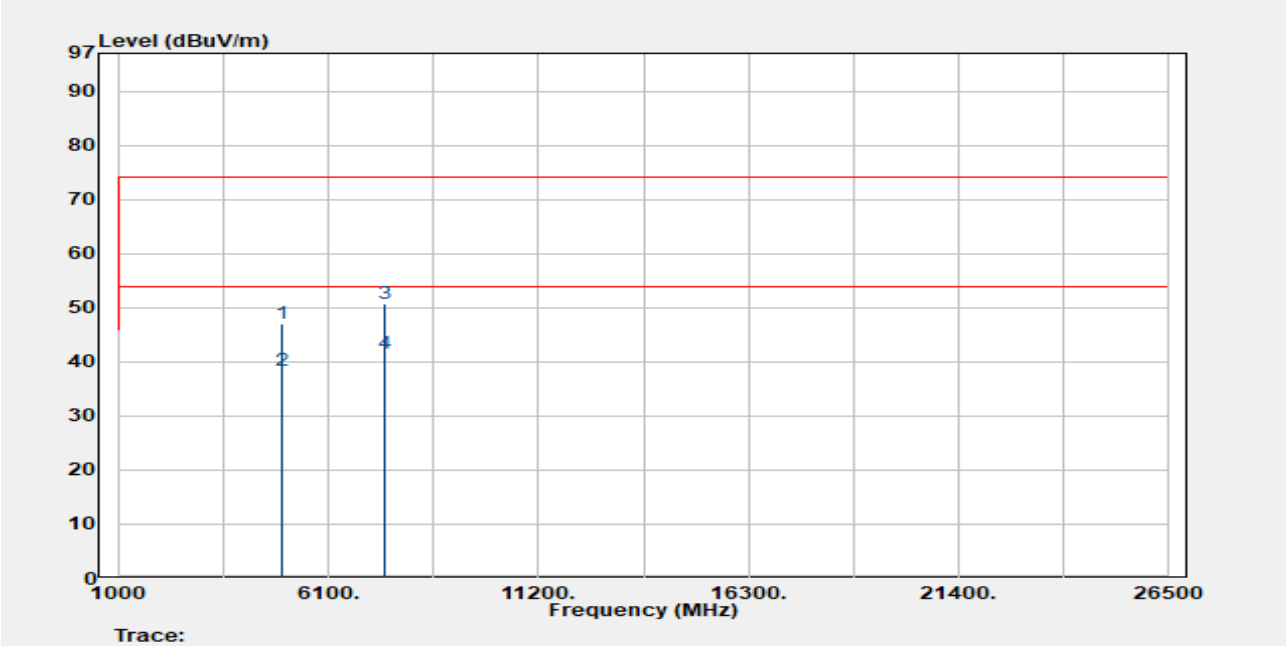

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBµV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
4960.000	Peak	39.23	7.95	47.18	74.00	-26.82
4960.000	Average	30.55	7.95	38.50	54.00	-15.50
7440.000	Peak	36.03	14.61	50.64	74.00	-23.36
7440.000	Average	26.82	14.61	41.43	54.00	-12.57

12 POWER SPECTRAL DENSITY

12.1 Standard Applicable:

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

12.2 Test Setup

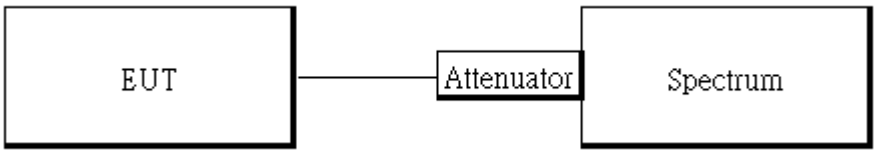

12.3 Measurement Procedure:

1. Set analyzer center frequency to DTS channel center frequency.
2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
3. Set the span to 1.5 times the DTS channel bandwidth.
4. Set the RBW = 3 kHz. & the VBW = 10 kHz
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.

12.4 Measurement Result:

BLE 1M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-9.68	8	PASS
2442	-9.46	8	PASS
2480	-9.25	8	PASS

NOTE: cable loss as 0.74dB that offsets in the spectrum

BLE 2M mode

Frequency (MHz)	RF Power Density (dBm/3kHz)	Maximum Limit (dBm/3kHz)	Result
2402	-12.05	8	PASS
2442	-12.00	8	PASS
2480	-12.98	8	PASS

NOTE: cable loss as 0.74dB that offsets in the spectrum

PSD_BLE 1M_LowCH00-2402MHz

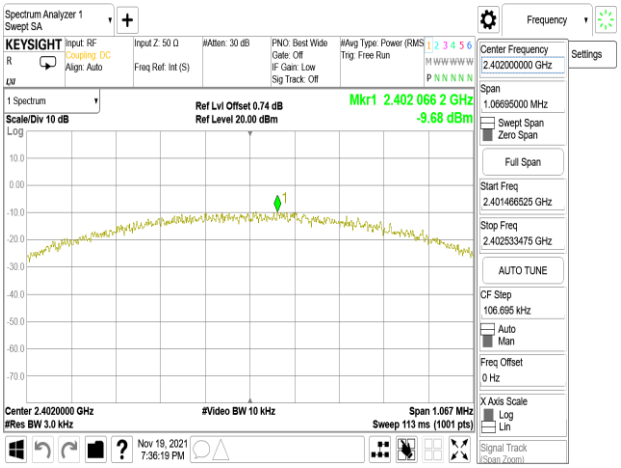

PSD_BLE 2M_LowCH00-2402MHz

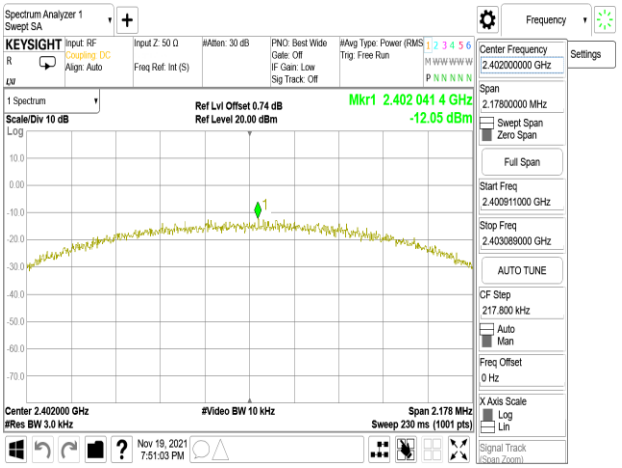

PSD_BLE 1M_MidCH20-2442MHz

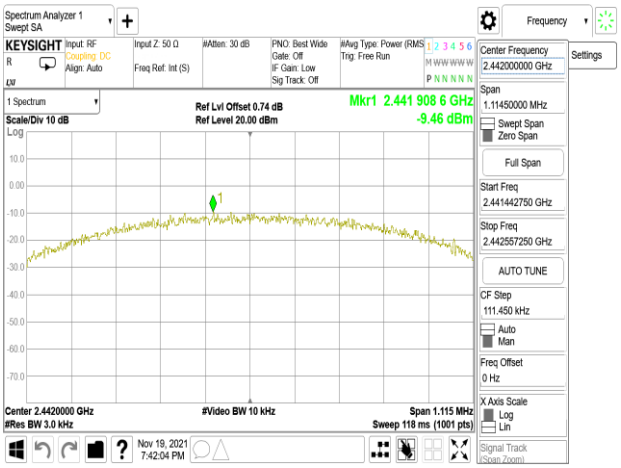

PSD_BLE 2M_MidCH20-2442MHz

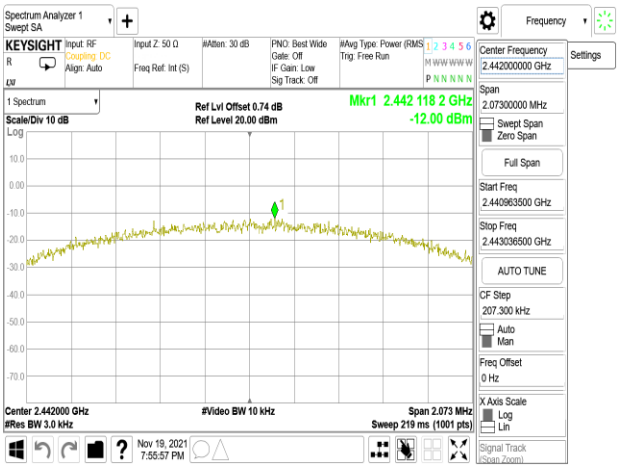

PSD_BLE 1M_HighCH39-2480MHz

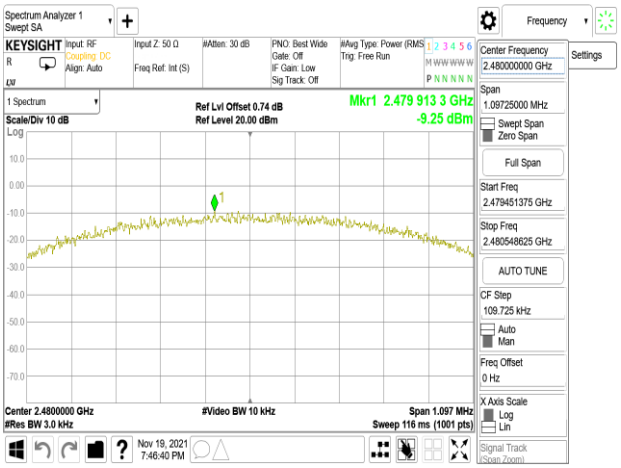

PSD_BLE 2M_HighCH39-2480MHz

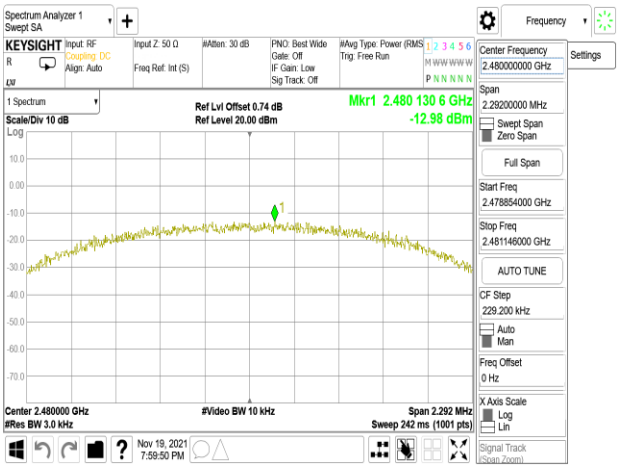

13 ANTENNA REQUIREMENT

13.1 Standard Applicable:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

13.2 Antenna Connected Construction:

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~