

Johnson Health Tech. Co., Ltd.

# TEST REPORT

**REPORT NUMBER**  
200100422TWN-001

**ISSUE DATE**

Feb. 21, 2020

**PAGES**  
57

© 2020 INTERTEK



# Radio Spectrum TEST REPORT

<b>Applicant:</b>	Johnson Health Tech. Co., Ltd. No. 999, Sec. 2, Dongda Rd., Daya Dist Taichung City 428, Taiwan
<b>Product:</b>	Massager Chair
<b>Model No.:</b>	MC-J6950
<b>Brand Name:</b>	SYNCA
<b>FCC ID:</b>	TN7MCJ6950
<b>Test Method/ Standard:</b>	47 CFR FCC Part 15.247 & ANSI C63.10 2013 KDB 558074 D01 v05r02
<b>Test By:</b>	Intertek Testing Services Taiwan Ltd., Hsinchu Laboratory No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li, Shiang-Shan District, Hsinchu City, Taiwan



Prepared and Checked by:

Handwritten signature of Mark Chang in black ink.

Mark Chang  
Engineer

Approved by:

Handwritten signature of Durant Wei in black ink.

Durant Wei  
Engineer

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

**Revision History**

<b>Report No.</b>	<b>Issue Date</b>	<b>Revision Summary</b>
200100422TWN-001	Feb. 21, 2020	Original report

## Table of Contents

Summary of Test Data .....	5
1. General Information .....	6
1.1 Identification of the EUT .....	6
1.2 Antenna description .....	6
1.3 Operation mode .....	7
1.4 Peripherals equipment .....	7
2. Minimum 6 dB Bandwidth .....	8
2.1 Instrument Setting.....	8
2.2 Test Procedure .....	8
2.3 Test Diagram .....	8
2.4 Limit.....	8
2.5 Operating Environment Condition .....	9
2.6 Test Results .....	9
3. Maximum Peak Conducted Output Power .....	14
3.1 Instrument Setting.....	14
3.2 Test Procedure .....	14
3.3 Test Diagram .....	14
3.4 Limit.....	14
3.5 Operating Environment Condition .....	14
3.6 Test Results .....	15
4. Power Spectral Density.....	16
4.1 Instrument Setting.....	16
4.2 Test Procedure .....	16
4.3 Test Diagram .....	16
4.4 Limit.....	16
4.5 Operating Environment Condition .....	17
4.6 Test Results .....	17
5. Emissions in Non-Restricted Frequency Bands .....	22
5.1 Instruments Setting .....	22
5.2 Test Procedure .....	22
5.3 Test Diagram .....	22
5.4 Limit.....	22
5.5 Operating Environment Condition .....	23
5.6 Test Results .....	24
6. Emissions in Restricted Frequency Bands (Radiated emission measurements) .....	32
6.1 Instrument Setting.....	32
6.2 Test Procedure .....	32
6.3 Test Diagram .....	33
6.3.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna: .....	33

**TEST REPORT**

- 6.3.2 Radiated emission below 1GHz using Bilog Antenna ..... 34
- 6.3.3 Radiated emission above 1GHz using Horn Antenna ..... 34
- 6.4 Limit ..... 35
- 6.5 Operating Environment Condition ..... 35
- 6.6 Test Result ..... 35
  
- 7. Emission on Band Edge ..... 40
  - 7.1 Instrument Setting ..... 40
  - 7.2 Test Procedure ..... 40
  - 7.3 Operating Environment Condition ..... 40
  - 7.4 Test Results ..... 41
  
- 8. AC Power Line Conducted Emission ..... 51
  - 8.1 Measuring instrument setting ..... 51
  - 8.2 Test Procedure ..... 51
  - 8.3 Test Diagram ..... 51
  - 8.4 Limit ..... 52
  - 8.5 Operating Environment Condition ..... 52
  - 8.6 Test Results ..... 53
  
- Appendix A: Test equipment list ..... 55
  
- Appendix B: Measurement Uncertainty ..... 57

## Summary of Test Data

Test Requirement	Applicable Rule (Section 15.247)	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Peak Conducted Output Power	15.247(b)(3)	Pass
Power Spectral Density	15.247(e)	Pass
Emissions In Non-Restricted Frequency Bands	15.247(d)	Pass
Emissions In Restricted Frequency Bands (Radiated emission measurements)	15.247(d), 15.205, 15.209	Pass
Emission On The Band Edge	15.247(d), 15.205	Pass
AC Power Line Conducted Emission	15.207	Pass
Antenna Requirement	15.203	Pass

Note: Please note that the test results with statement of conformity, the decision rules which are based on: Safety Testing: the specification, standard or IEC Guide 115.

Other Testing: the specification, standard and not taking into account the measurement uncertainty.

## 1. General Information

### 1.1 Identification of the EUT

<b>Product:</b>	Massager Chair
<b>Model No.:</b>	MC-J6950
<b>Operating Frequency:</b>	2412 MHz ~ 2462 MHz for 802.11b, 802.11g, 802.11n HT20 2422 MHz ~ 2452 MHz for 802.11n HT40
<b>Channel Number:</b>	11 channels for 2412 MHz ~ 2462 MHz 7 channels for 2422 MHz ~ 2452 MHz
<b>Frequency of Each Channel:</b>	2412+5 k, k=0 ~ 10 for 802.11b, 802.11g, 802.11n HT20 2422+5 k, k=0 ~ 6 for 802.11n HT40
<b>Access scheme:</b>	DSSS, OFDM
<b>Rated Power:</b>	100-240Vac, 50/60Hz, 150W
<b>Power Cord:</b>	N/A
<b>Sample receiving date:</b>	Jan. 17, 2020
<b>Sample condition:</b>	Workable
<b>Test Date(s):</b>	Jan. 20, 2020 ~ Feb. 11, 2020

### 1.2 Antenna description

Antenna Gain : 5.0 ± 0.7 dBi  
 Antenna Type : PCB Antenna  
 Connector Type : I-Pex

### 1.3 Operation mode

The EUT was supplied with 120Vac, 60Hz.

Connected to Notebook via USB Cable & LAN cable, executing "RT5350QA" and select different frequency and modulation.

With individual verifying, the maximum output power were found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n(HT20) mode, 13.5 Mbps data rate for 802.11n(HT40) mode the final tests were executed under these conditions recorded in this report individually.

Modulation mode	Transmit path
	Chain 0 / Main
802.11b	V
802.11g	V
802.11 n (HT20)	V
802.11 n (HT40)	V

### 1.4 Peripherals equipment

Peripherals	Brand	Model No.	Serial No.	Data cable
Notebook PC	HP	HP ProBook 440 G3	5CD8021S9H	N/A



## 2. Minimum 6 dB Bandwidth


### 2.1 Instrument Setting

Spectrum Parameter	Setting
Detector	Peak
RBW	100kHz
VBW	$\geq 3 \times \text{RBW}$
Sweep	Auto couple
Trace	Allow the trace to stabilize.
Span	Between two times and five times the occupied bandwidth
Attenuation	Auto

### 2.2 Test Procedure

Step 1	The transmitter output was connected to the spectrum analyzer.
Step 2	Test was performed accordance with ANSI C63.10.
Step 3	Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

### 2.3 Test Diagram

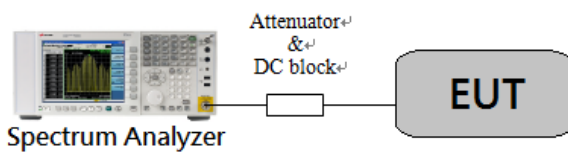

### 2.4 Limit

The minimum 6 dB bandwidth shall be at least 500 kHz.

**TEST REPORT**

**2.5 Operating Environment Condition**


Temperature (°C) :	20
Relative Humidity (%) :	58

**2.6 Test Results**


Single TX  
Chain 0

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	1	2412	12.11	>0.5	Pass
	6	2437	12.56	>0.5	Pass
	11	2462	12.05	>0.5	Pass
802.11g	1	2412	16.33	>0.5	Pass
	6	2437	16.33	>0.5	Pass
	11	2462	16.33	>0.5	Pass
802.11n(HT20)	1	2412	17.28	>0.5	Pass
	6	2437	17.30	>0.5	Pass
	11	2462	17.07	>0.5	Pass
802.11n(HT40)	3	2422	35.33	>0.5	Pass
	6	2437	35.26	>0.5	Pass
	9	2452	35.35	>0.5	Pass


### Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 1

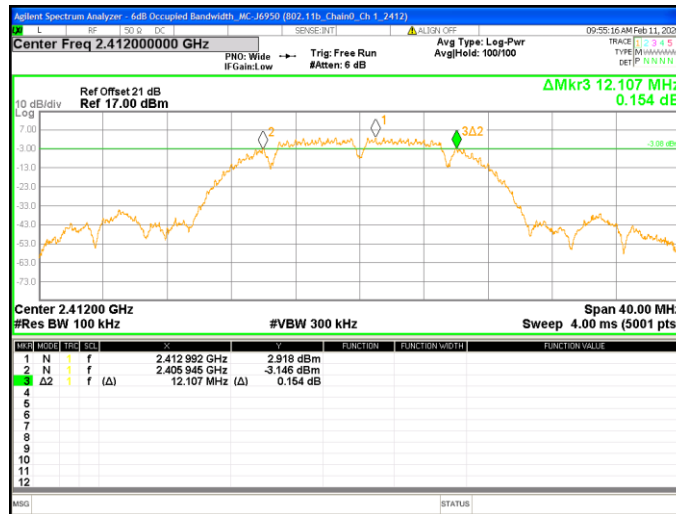


### Chain0 : 6dB Bandwidth @ 802.11b Mode Ch 6

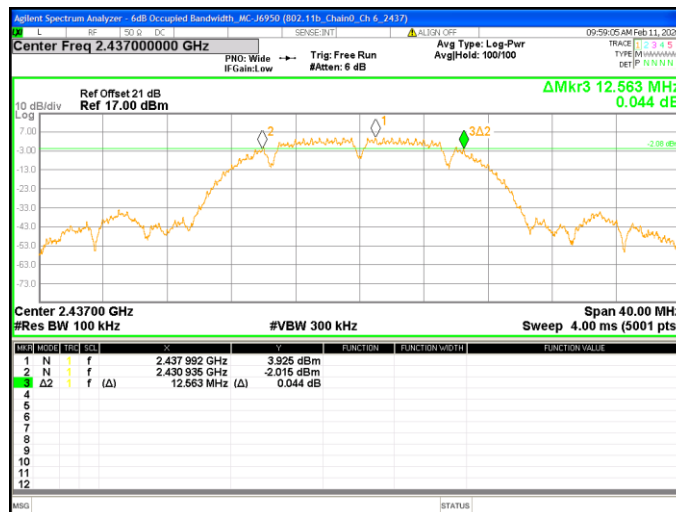


### Chain0 : 6dB Bandwidth @ 802.11b Mode Ch11

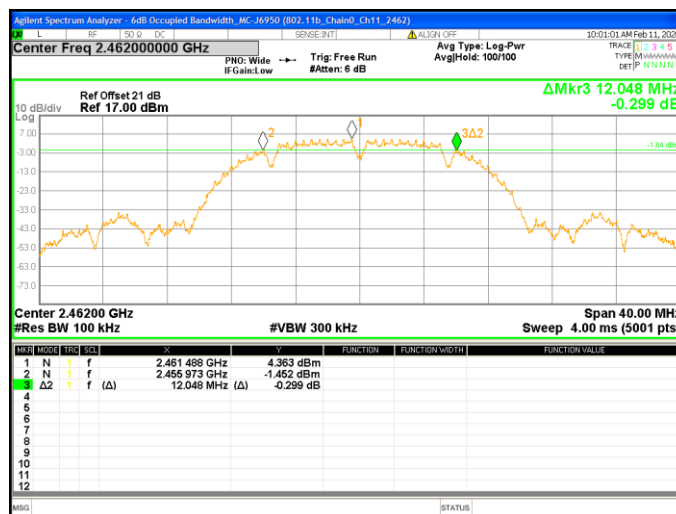


### Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 1

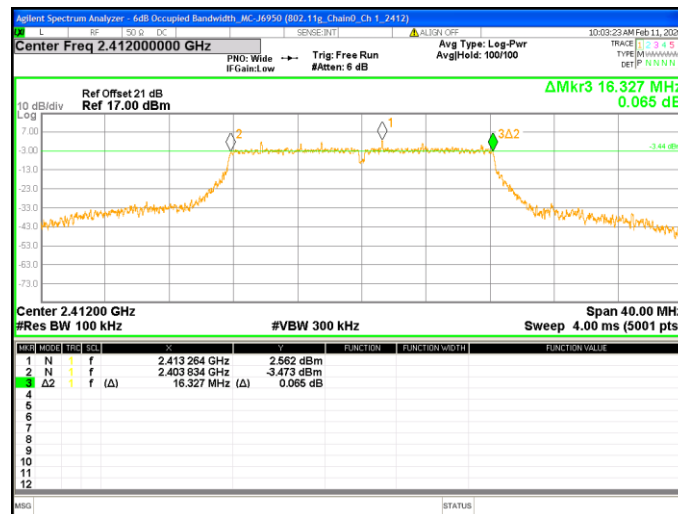


### Chain0 : 6dB Bandwidth @ 802.11g Mode Ch 6

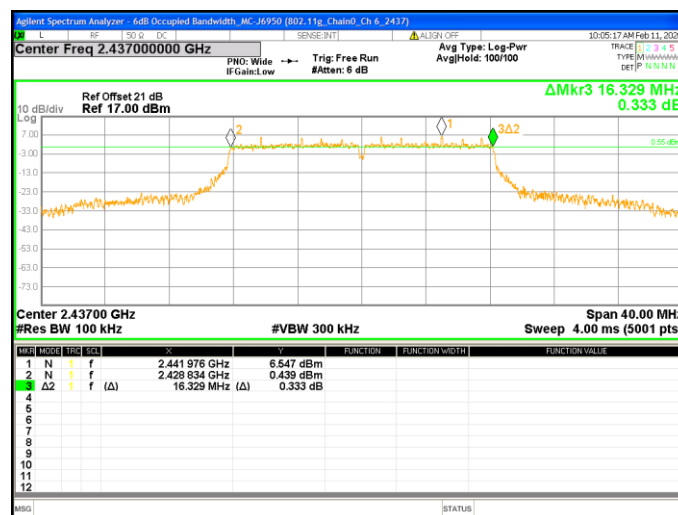


### Chain0 : 6dB Bandwidth @ 802.11g Mode Ch11

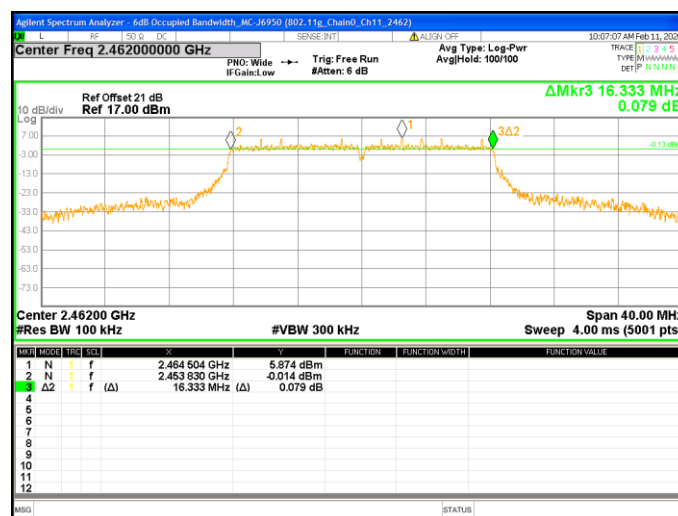


### Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 1

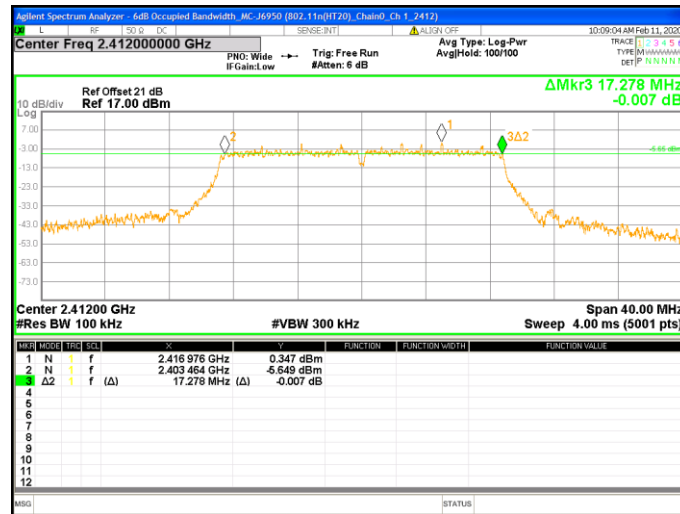

### Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch 6

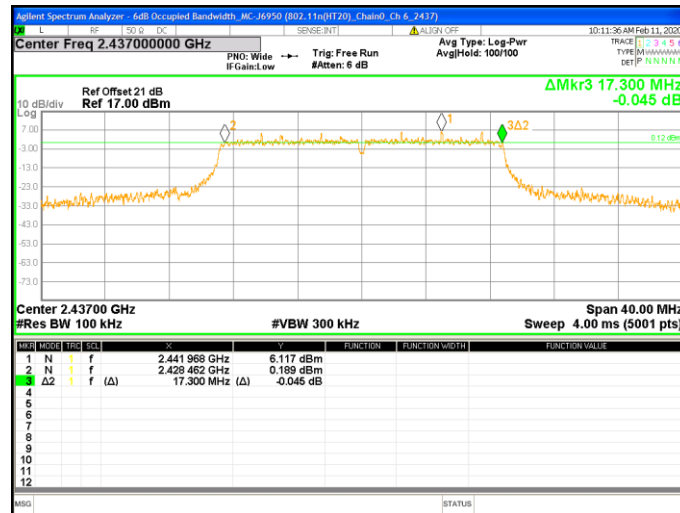


### Chain0 : 6dB Bandwidth @ 802.11n(HT20) Mode Ch11

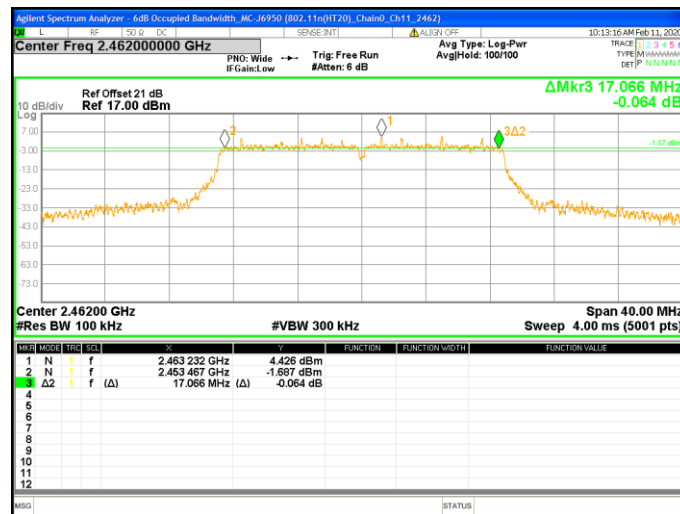


### Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 3



### Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 6

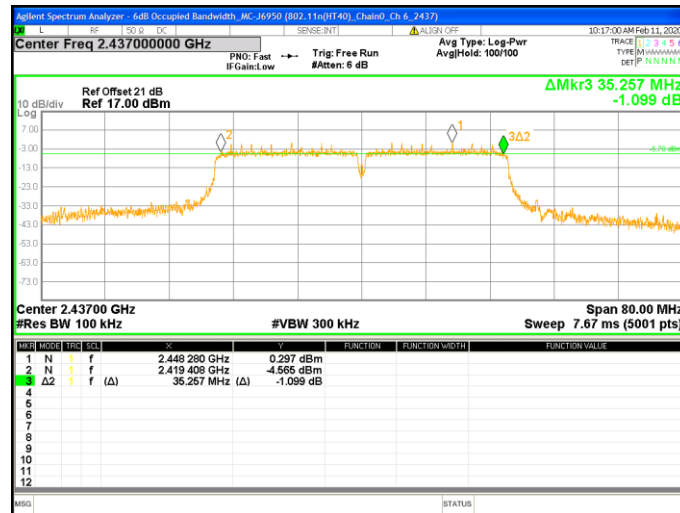

### Chain0 : 6dB Bandwidth @ 802.11n(HT40) Mode Ch 9

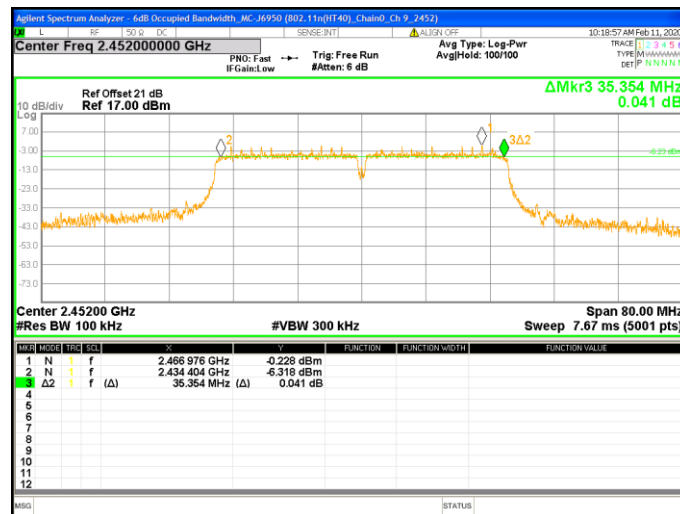

### 3. Maximum Peak Conducted Output Power


#### 3.1 Instrument Setting

Power Meter Parameter	Setting
Bandwidth	65MHz bandwidth is greater than the EUT emission bandwidth
Detector	Peak & Average

#### 3.2 Test Procedure

The preferred methodology is to use integrated average power measurements, as described in 11.9.2 and 11.13.3 of ANSI C63.10. The peak integrated band power methods of 11.9.1.2 and 11.13.3.2 of ANSI C63.10 are not applicable for FCC compliance testing purposes.

#### 3.3 Test Diagram

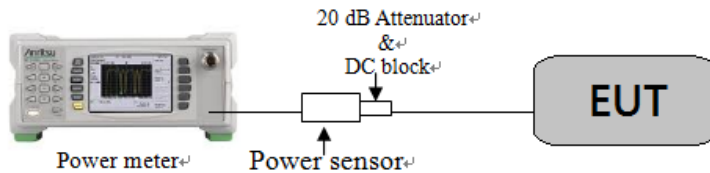

#### 3.4 Limit

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt (30dBm)

#### 3.5 Operating Environment Condition

Temperature (°C) :	20
Relative Humidity (%) :	58

### 3.6 Test Results

#### Single Tx Chain 0

Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Output Power (AV) (dBm)	Total Power (AV) (mW)	Maximum power (PK) (dBm)	Maximum power (PK) (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	1	14.30	26.92	16.60	45.71	30	-13.40
	6	2437		15.40	34.67	17.50	56.23	30	-12.50
	11	2462		15.80	38.02	17.90	61.66	30	-12.10
802.11g	1	2412	6	13.90	24.55	21.80	151.36	30	-8.20
	6	2437		17.80	60.26	26.30	426.58	30	-3.70
	11	2462		17.60	57.54	25.60	363.08	30	-4.40
802.11n (HT20)	1	2412	6.5	12.20	16.60	20.90	123.03	30	-9.10
	6	2437		17.70	58.88	25.50	354.81	30	-4.50
	11	2462		16.30	42.66	23.90	245.47	30	-6.10
802.11n (HT40)	3	2422	13.5	10.10	10.23	18.10	64.57	30	-11.90
	6	2437		14.80	30.20	21.90	154.88	30	-8.10
	9	2452		14.40	27.54	22.00	158.49	30	-8.00



## 4. Power Spectral Density


### 4.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak
RBW	$\geq 3$ kHz
VBW	$\geq 3 \times$ RBW
Sweep	Auto couple
Trace	Max hold
Span	1.5 times x 6dB bandwidth
Attenuation	Auto

### 4.2 Test Procedure

Step 1	Test procedure refer to subclause 11.10 of ANSI C63.10.
Step 2	Using the maximum conducted output power in the fundamental emission demonstrates compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
Step 3	Use the peak marker function to determine the maximum amplitude level within the RBW.

### 4.3 Test Diagram

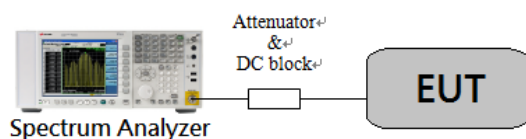

### 4.4 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission

**TEST REPORT**

**4.5 Operating Environment Condition**

Temperature (°C) :	20
Relative Humidity (%) :	58

**4.6 Test Results**

Single TX

Chain 0

Mode	Channel	Frequency (MHz)	RBW factor	PSD in 10kHz	PSD in 3kHz		Limit (dBm)	Margin (dB)
					(dBm)	(mw)		
802.11b	1	2412	5.23	1.32	-3.91	0.41	8	-11.91
	6	2437	5.23	0.92	-4.31	0.37	8	-12.31
	11	2462	5.23	-5.71	-10.94	0.08	8	-18.94
802.11g	1	2412	5.23	-7.70	-12.93	0.05	8	-20.93
	6	2437	5.23	-2.81	-8.04	0.16	8	-16.04
	11	2462	5.23	-3.82	-9.05	0.12	8	-17.05
802.11n(HT20)	1	2412	5.23	-9.24	-14.47	0.04	8	-22.47
	6	2437	5.23	-3.63	-8.86	0.13	8	-16.86
	11	2462	5.23	-5.50	-10.73	0.08	8	-18.73
802.11n(HT40)	3	2422	5.23	-13.49	-18.72	0.01	8	-26.72
	6	2437	5.23	-9.11	-14.34	0.04	8	-22.34
	9	2452	5.23	-8.80	-14.03	0.04	8	-22.03

Note: MIMO Correction:  $10\log(Nant) = 10\log(2) = 3$

Correction Factor =  $10\log(10kHz/3kHz)$


### Chain0 : Power Spectral Density @ 802.11b Mode Ch 1




### Chain0 : Power Spectral Density @ 802.11b Mode Ch 6




### Chain0 : Power Spectral Density @ 802.11b Mode Ch11

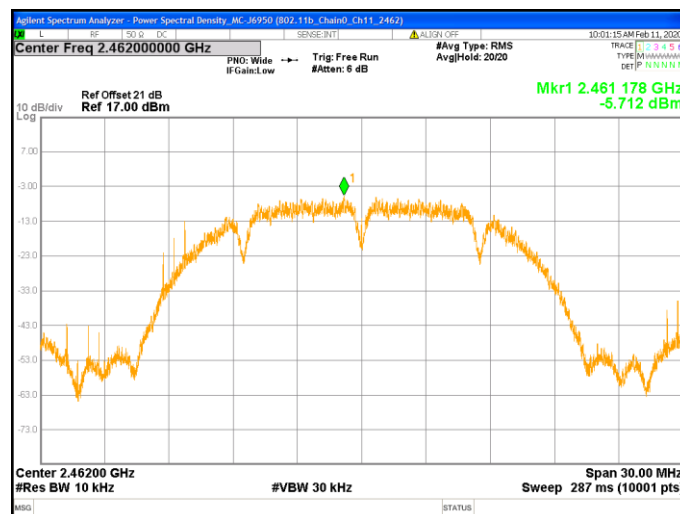


### Chain0 : Power Spectral Density @ 802.11g Mode Ch 1

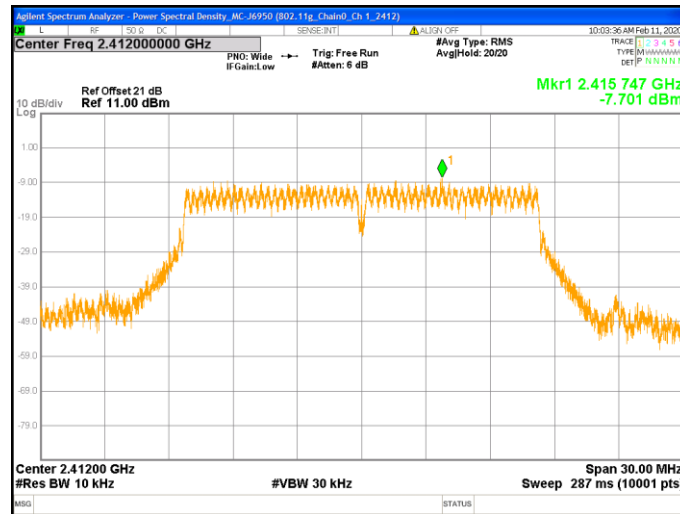


### Chain0 : Power Spectral Density @ 802.11g Mode Ch 6

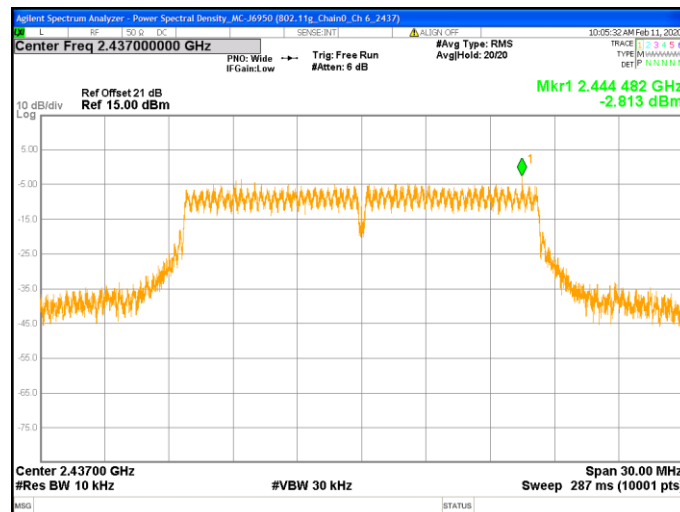


### Chain0 : Power Spectral Density @ 802.11g Mode Ch11

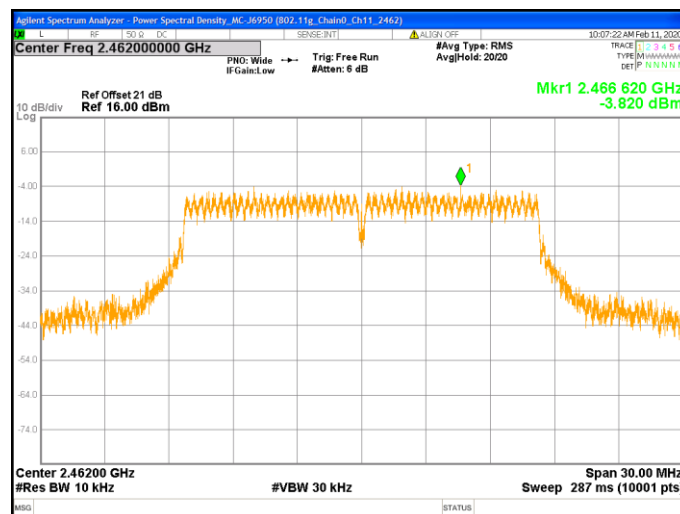


### Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 1

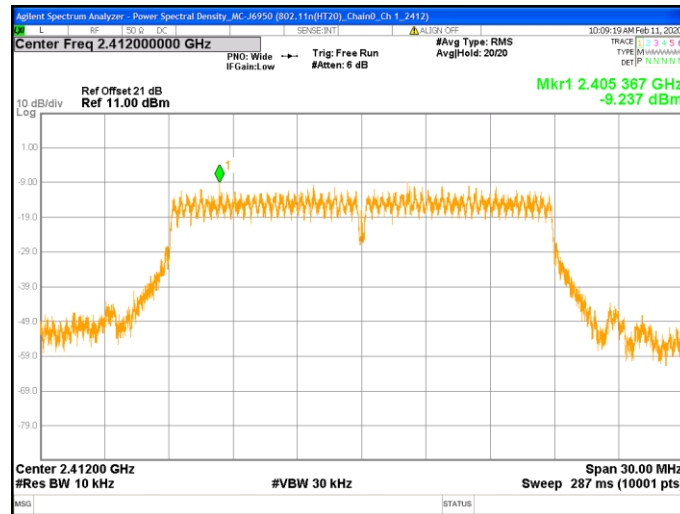


### Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch 6

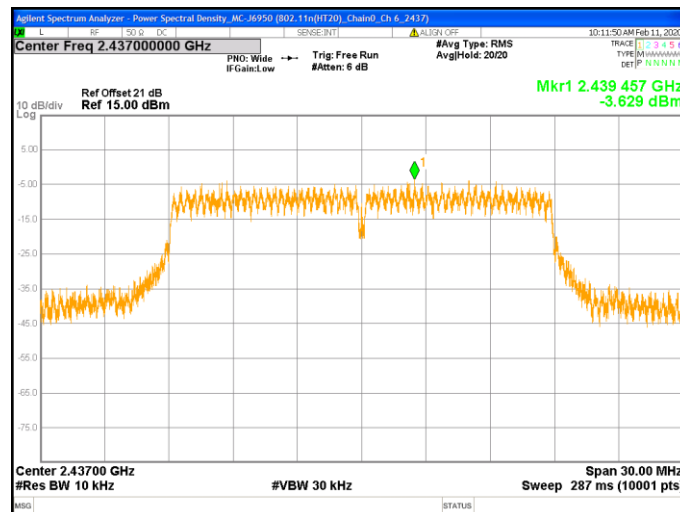


### Chain0 : Power Spectral Density @ 802.11n(HT20) Mode Ch11

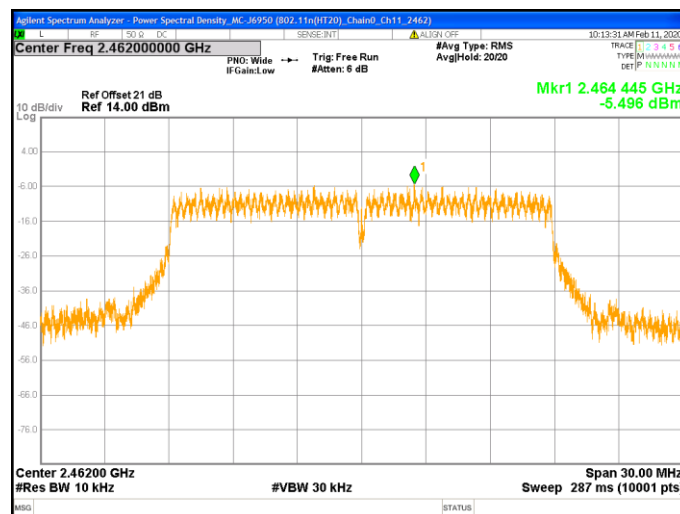


### Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 3

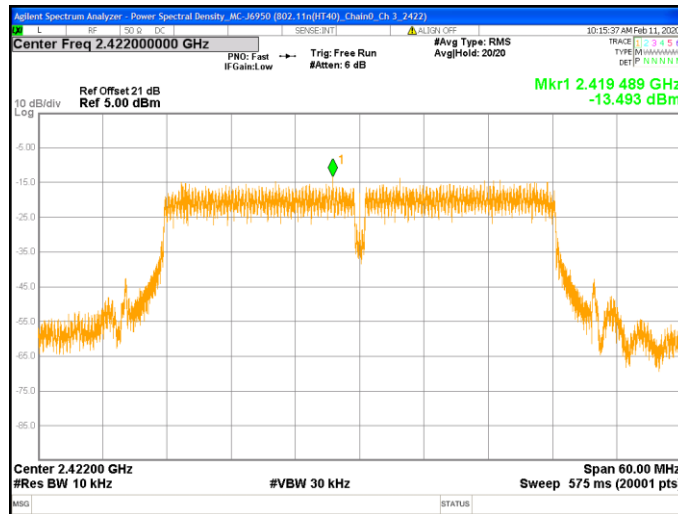

### Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 6

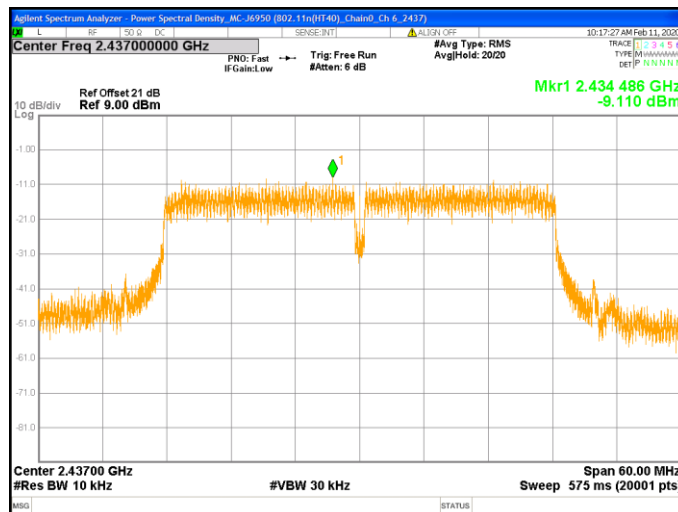

### Chain0 : Power Spectral Density @ 802.11n(HT40) Mode Ch 9

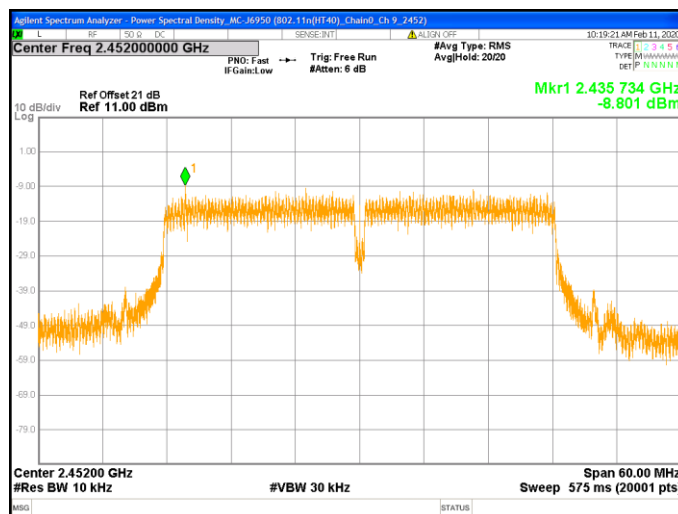

## 5. Emissions in Non-Restricted Frequency Bands


### 5.1 Instruments Setting

Spectrum Function	Setting (Reference Level)	Setting (Emission Level)
Detector	Peak	Peak
RBW	$\geq 100$ kHz	$\geq 100$ kHz
VBW	$\geq 3 \times$ RBW	$\geq 3 \times$ RBW
Sweep	Auto couple	Auto couple
Trace	Max hold	Max hold
Span	$\geq 1.5$ time 6dB bandwidth	
Attenuation	Auto	Auto

### 5.2 Test Procedure

- Step 1 The procedure was used in antenna-port conducted and connected to the spectrum analyzer.
- Step 2 Set instrument center frequency to center frequency.
- Step 3 Use the parameter configured in subclause 11.11 of ANSI C63.10 to measure.
- Step 4 Use the peak marker function to determine the maximum amplitude level.

### 5.3 Test Diagram

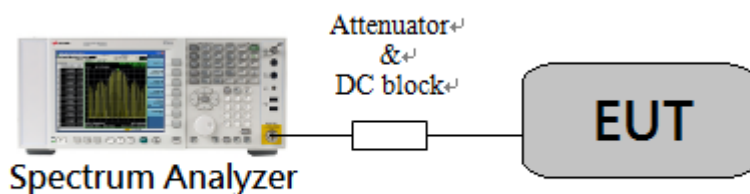

### 5.4 Limit

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz


### 5.5 Operating Environment Condition

Temperature (°C) :	20
Relative Humidity (%) :	58




## 5.6 Test Results


### Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

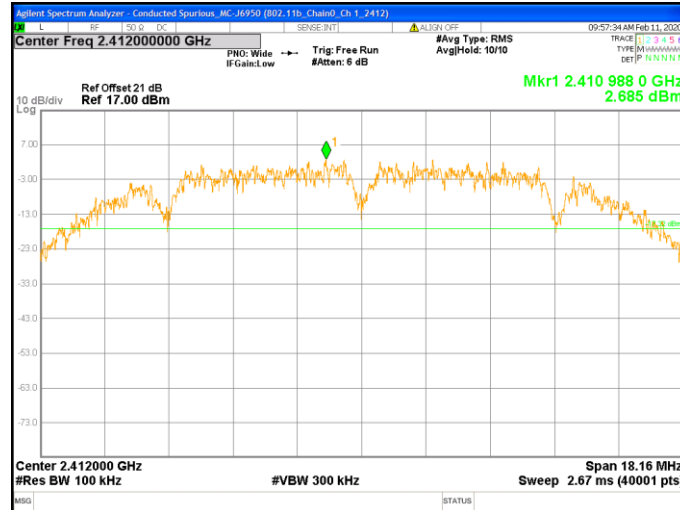


### Chain0 : Conducted Spurious @ 802.11b Mode Ch 1

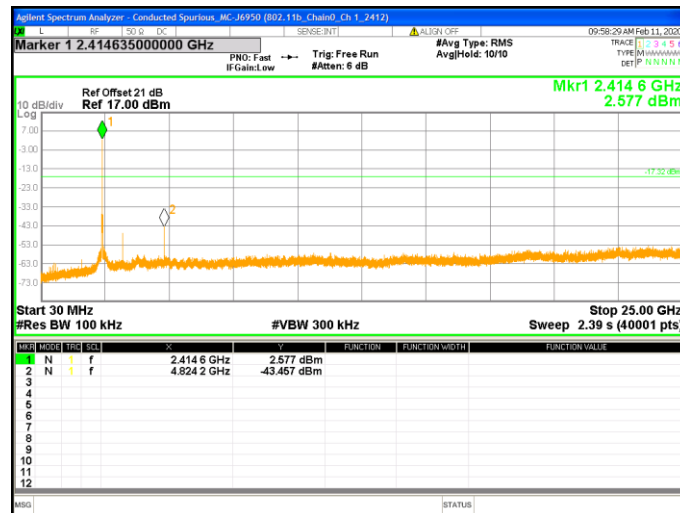


### Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

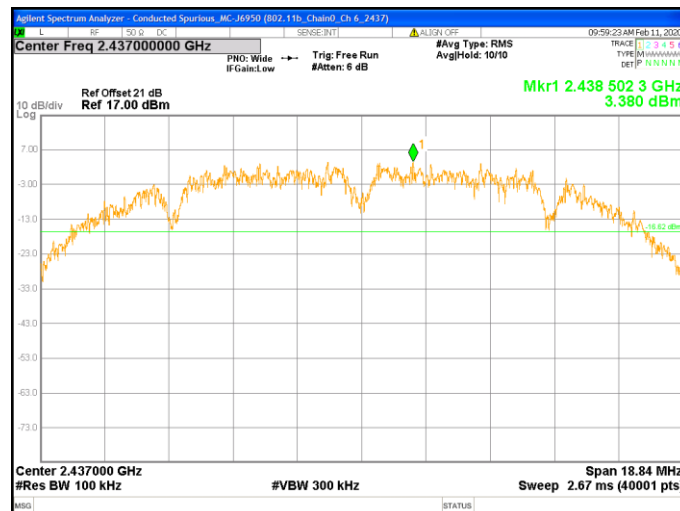


### Chain0 : Conducted Spurious @ 802.11b Mode Ch 6

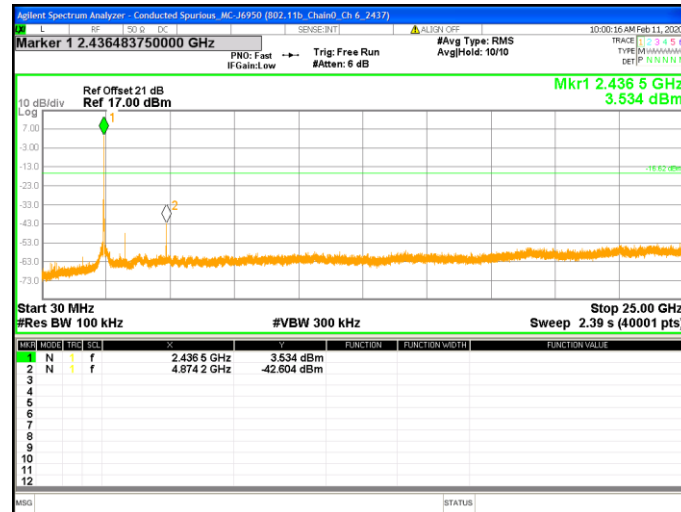


### Chain0 : Conducted Spurious @ 802.11b Mode Ch11

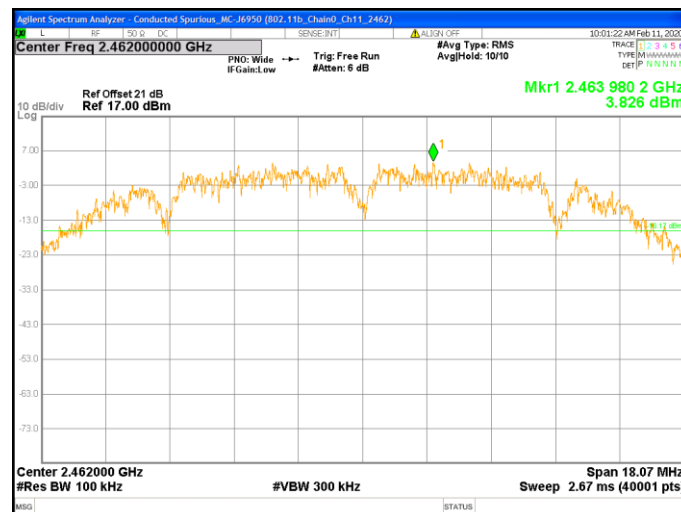


### Chain0 : Conducted Spurious @ 802.11b Mode Ch11

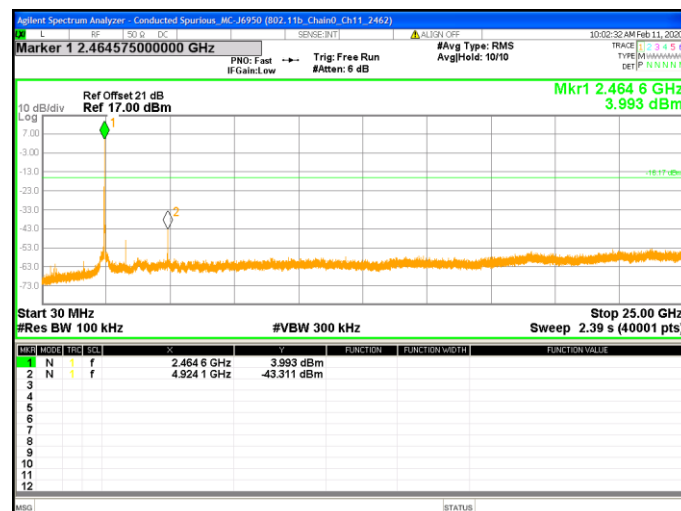


### Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

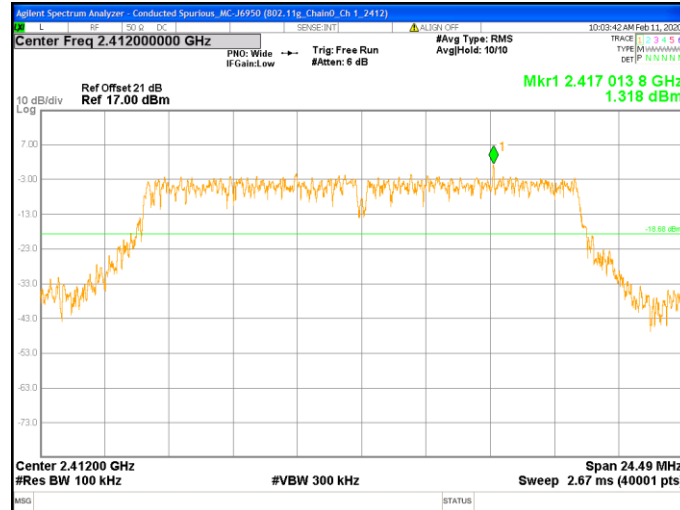


### Chain0 : Conducted Spurious @ 802.11g Mode Ch 1

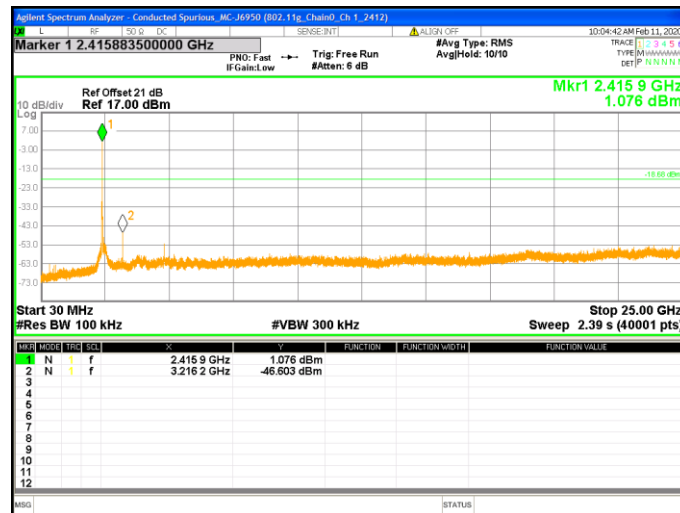


### Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

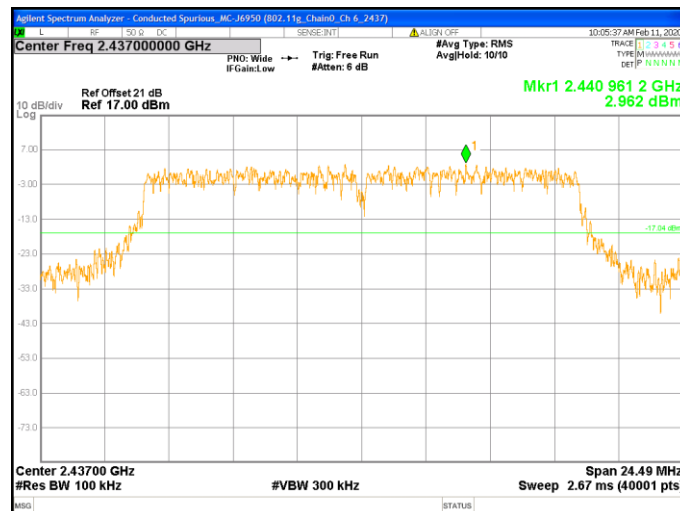


### Chain0 : Conducted Spurious @ 802.11g Mode Ch 6

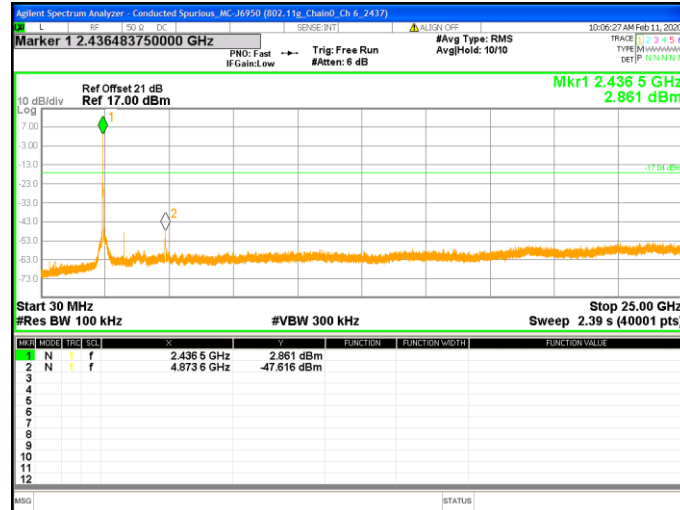


### Chain0 : Conducted Spurious @ 802.11g Mode Ch11

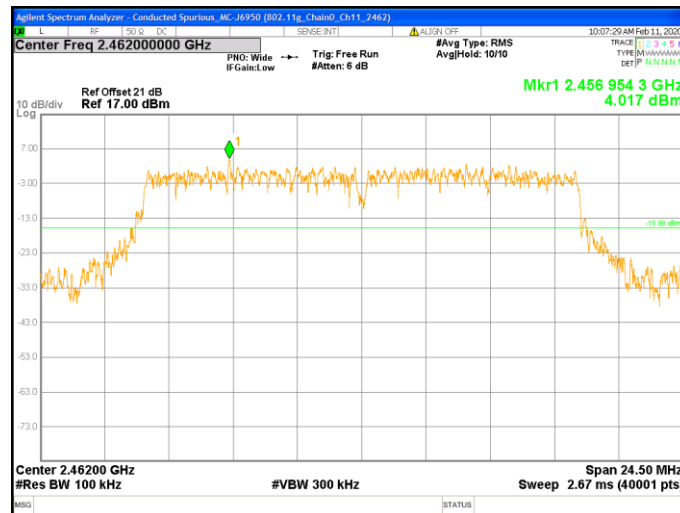


### Chain0 : Conducted Spurious @ 802.11g Mode Ch11

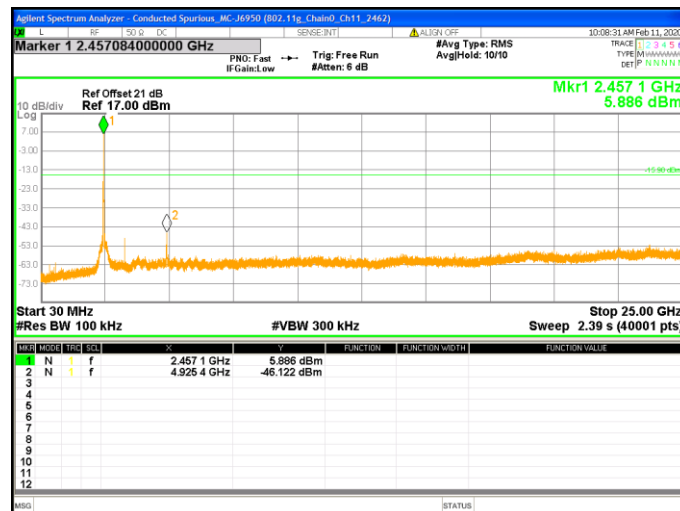


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

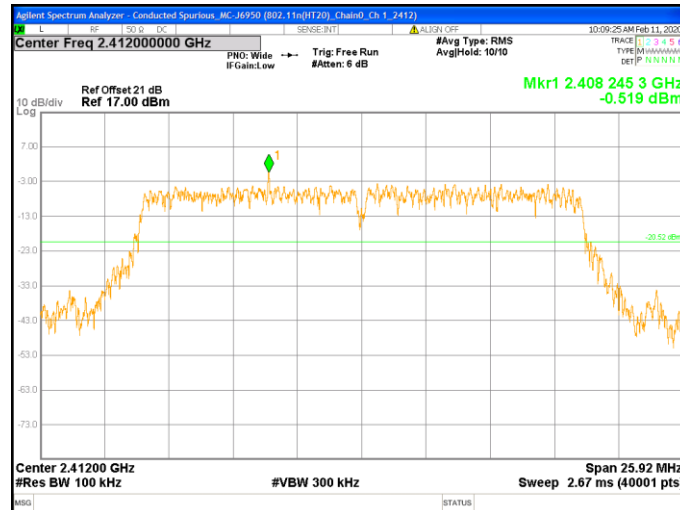


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 1

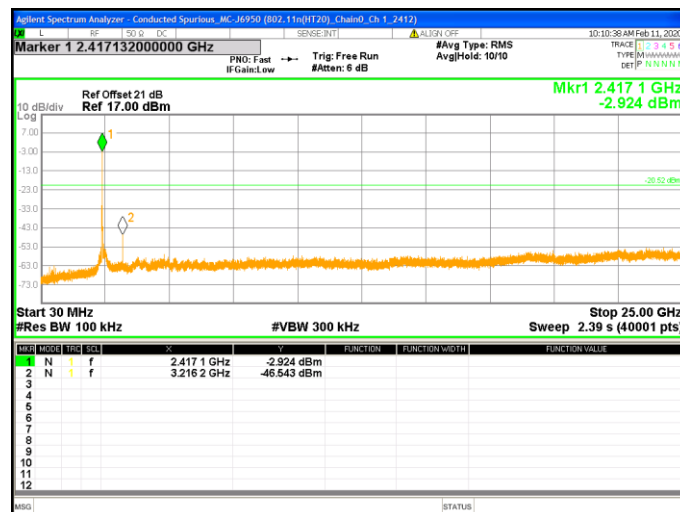


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

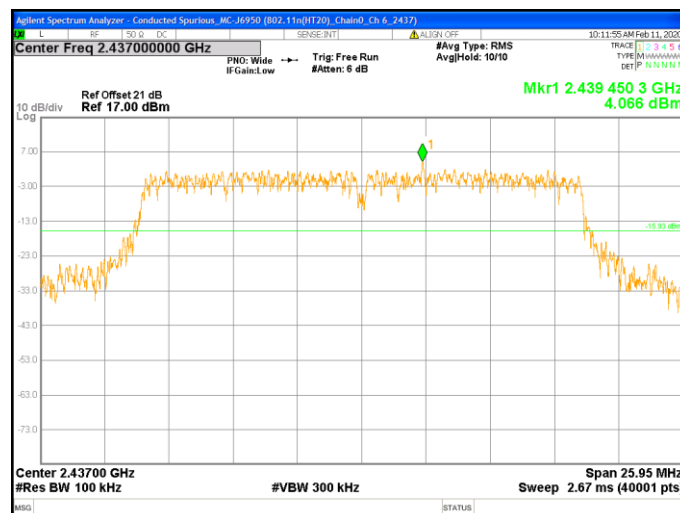


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch 6

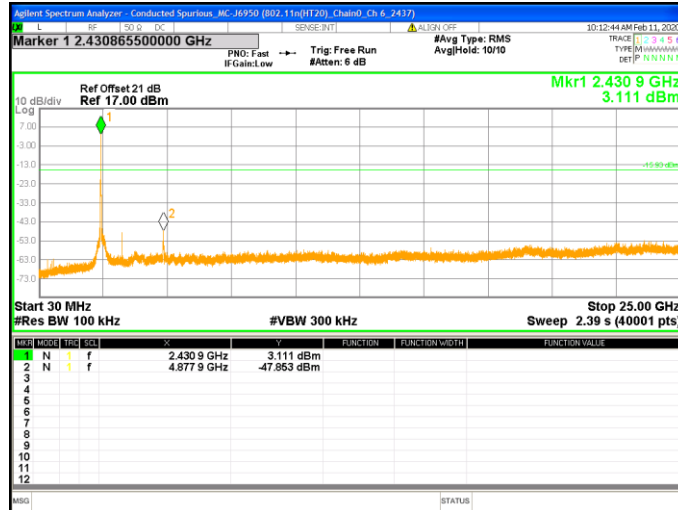


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

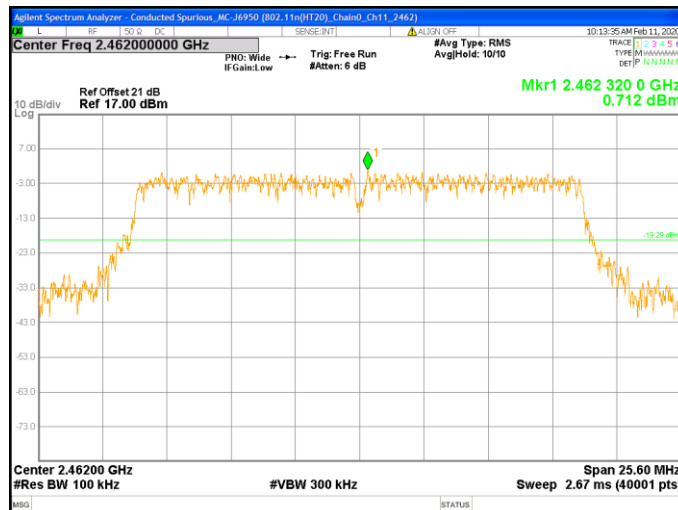


### Chain0 : Conducted Spurious @ 802.11n(HT20) Mode Ch11

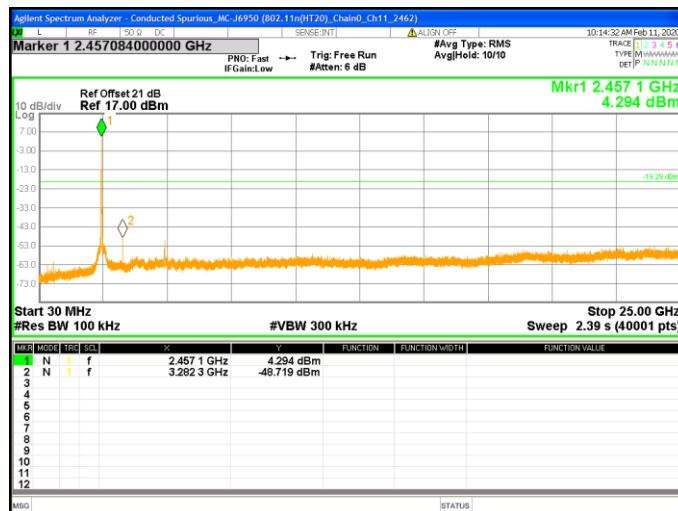


### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

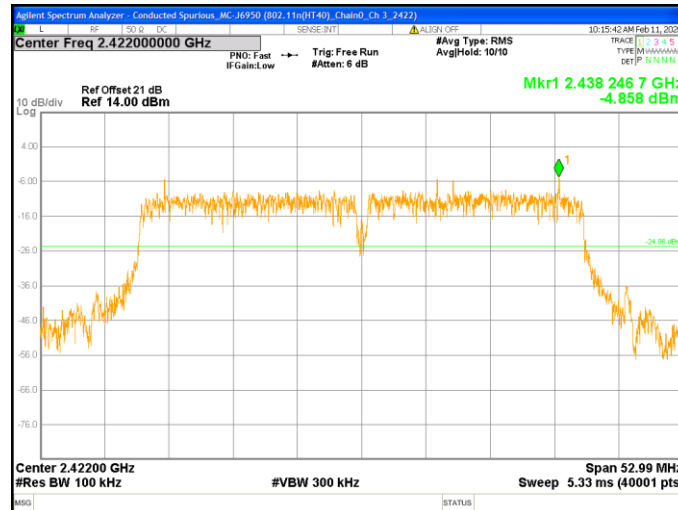


### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 3

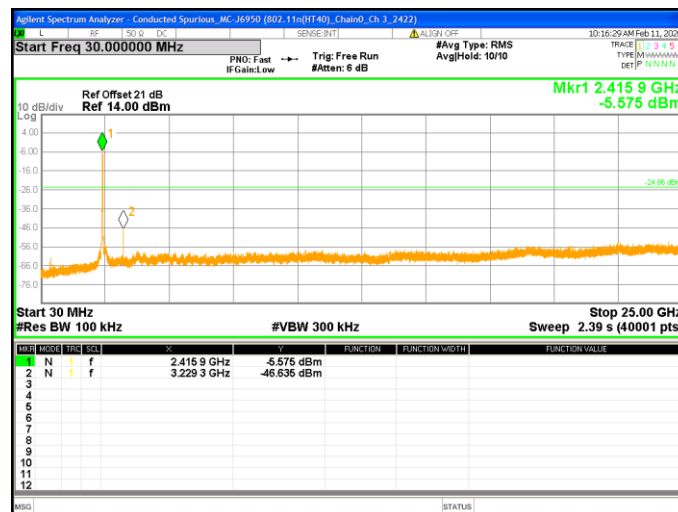


### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

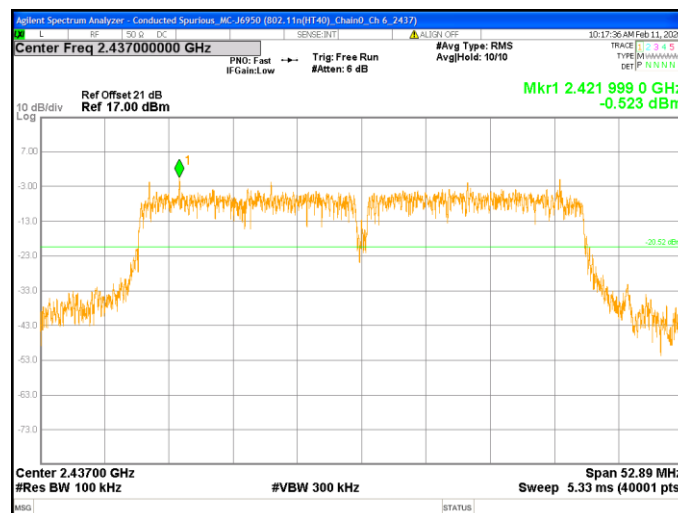


### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 6

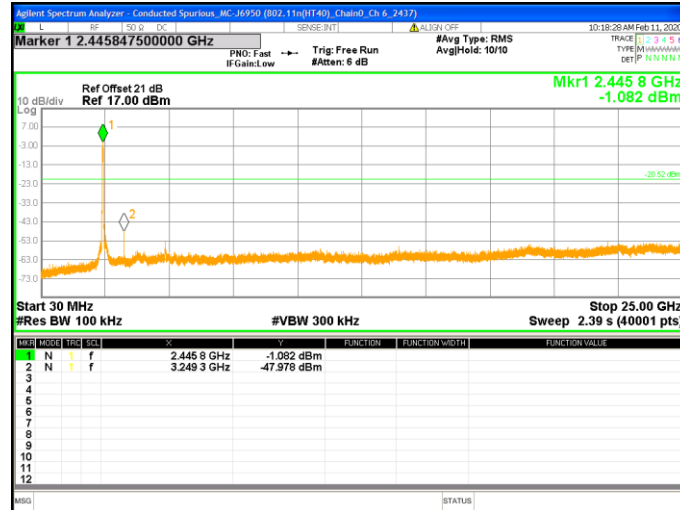

### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

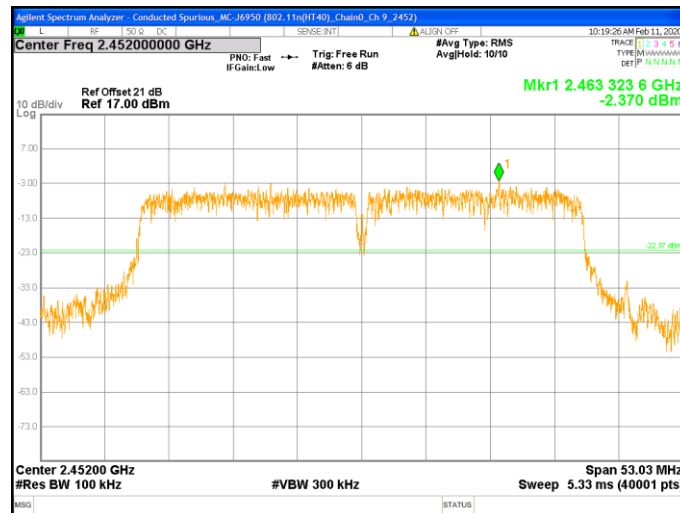

### Chain0 : Conducted Spurious @ 802.11n(HT40) Mode Ch 9

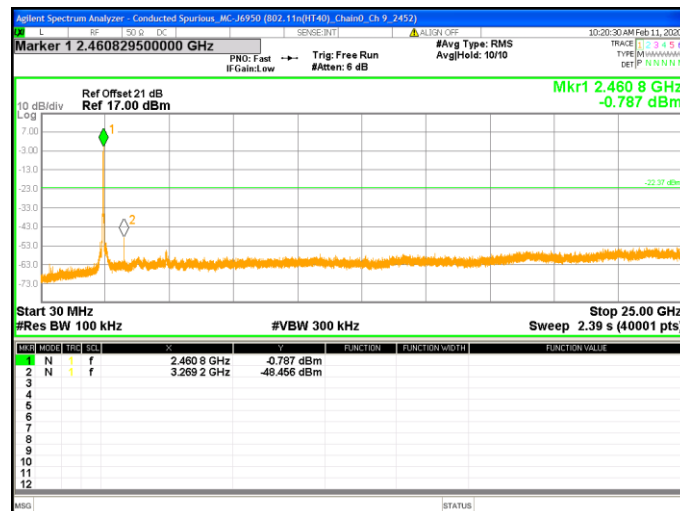



## 6. Emissions in Restricted Frequency Bands (Radiated emission measurements)

### 6.1 Instrument Setting

Receiver Function	Setting (Below 1GHz)	Setting (Above 1GHz)
Detector	QP	Peak and Average
RBW	9-150 kHz ; 200-300 Hz 0.15-30 MHz; 9-10 kHz 30-1000 MHz; 100-120 kHz	1MHz
VBW	$\geq 3 \times$ RBW	3MHz
Sweep	Auto couple	Auto couple
Start Frequency	9 kHz	1GHz
Stop Frequency	1 GHz	Tenth harmonic
Attenuation	Auto	Auto


### 6.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT was placed on the top of the turntable 0.8 meter (below 1GHz) and 1.5 meter (above 1GHz) above ground. The center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
Step 2	Power on the EUT and all the companion devices. The turntable was rotated by 360 degree to find the position of the maximum emission level.
Step 3	The height of the receiving antenna was varied between one meter and four meters above ground to find the maximum emission field strength of the both horizontal and vertical polarization.
Step 4	If find the frequencies above the limit or below within 3dB, the antenna tower was scan (from 1m to 4m) and then the turntable was rotated to find the maximum reading.
Step 5	Set the test-receiver system to peak or CISPR quasi-peak detector with specified bandwidth under maximum hold mode.
Step 6	For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.
Step 7	If the emissions level of the EUT in peak mode was 3dB lower than the average limit specified then testing will be stopped and peak values of the EUT will be reported. Otherwise, the emissions which do not have 3dB margin will be measured using the quasi-peak method for below 1GHz.


Step 8	For testing above 1GHz, The emissions level of the EUT in peak mode was lower than average limit, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.
Step 9	In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be quasi-peak measured by receiver.

## 6.3 Test Diagram


### 6.3.1 Radiated emission from 9kHz to 30MHz uses Loop Antenna:

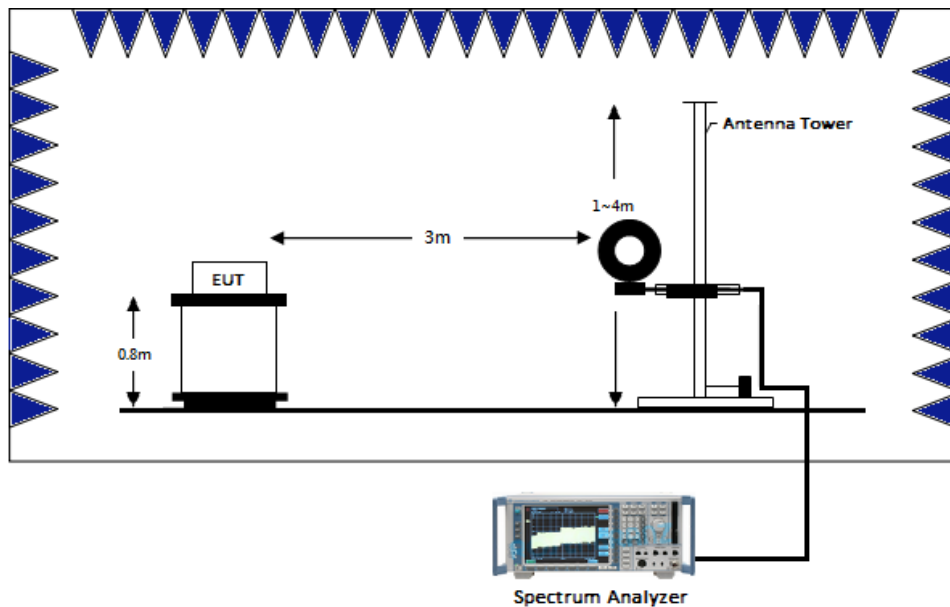

**6.3.2 Radiated emission below 1GHz using Bilog Antenna**

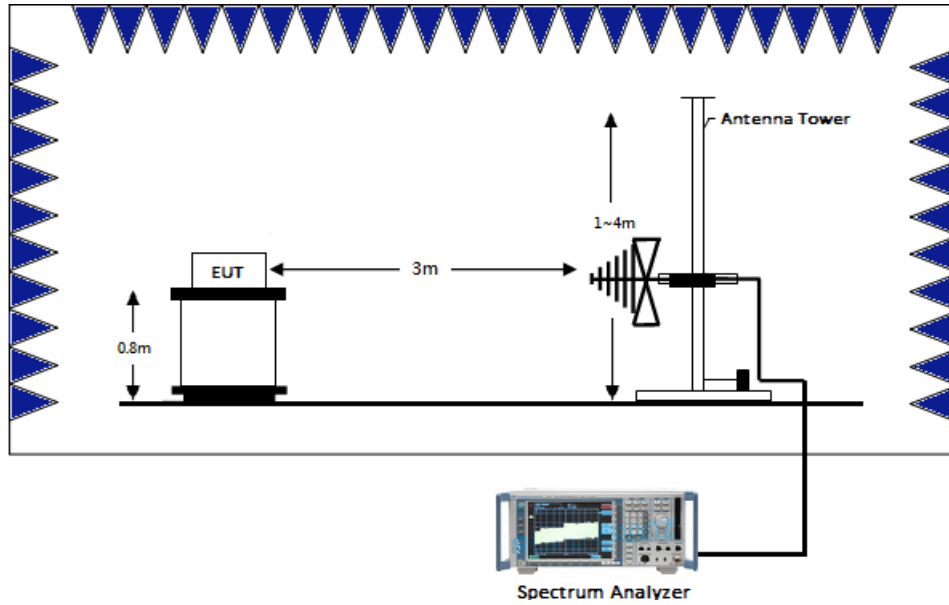

**6.3.3 Radiated emission above 1GHz using Horn Antenna**

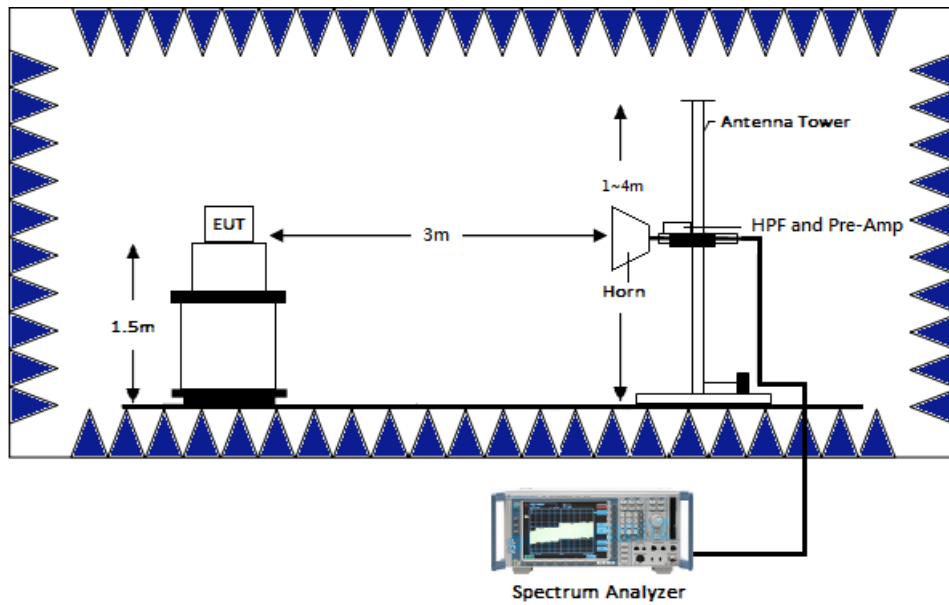

**6.4 Limit**

Frequency(MHz)	Field Strength(uV/m)	Measurement distance(m)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

**6.5 Operating Environment Condition**

Temperature (°C) :	20
Relative Humidity (%) :	57

**6.6 Test Result****6.6.1 Measurement results: frequencies 9kHz to 30MHz**

According to ANSI C63.10-2013

The emissions are more than 20 dB below the limit, the value has no need to be reported.

**TEST REPORT**

**6.6.1 Measurement results: frequencies 30MHz to 1GHz**

The test was performed on EUT under 802.11b/g/n continuously transmitting mode. The worst case occurred at 802.11g Channel 11.


EUT: MC-J6950

Ant. Pol. (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Vertical	57.16	QP	20.21	12.17	32.38	40.00	-7.62
Vertical	163.86	QP	20.44	11.89	32.33	43.50	-11.17
Vertical	198.78	QP	17.90	20.42	38.32	43.50	-5.18
Vertical	359.80	QP	23.18	11.07	34.25	46.00	-11.75
Vertical	480.08	QP	26.04	11.59	37.63	46.00	-8.37
Vertical	623.64	QP	28.94	8.14	37.08	46.00	-8.92


Ant. Pol. (H/V)	Frequency (MHz)	Spectrum Analyzer Detector	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
Horizontal	239.52	QP	20.41	18.45	38.86	46.00	-7.14
Horizontal	270.56	QP	21.00	17.39	38.39	46.00	-7.61
Horizontal	359.80	QP	23.18	15.62	38.80	46.00	-7.20
Horizontal	480.08	QP	26.04	16.84	42.88	46.00	-3.12
Horizontal	600.36	QP	28.63	14.32	42.95	46.00	-3.05
Horizontal	840.92	QP	32.02	9.01	41.03	46.00	-4.97

Remark: Corr. Factor = Antenna Factor + Cable Loss

## Vertical

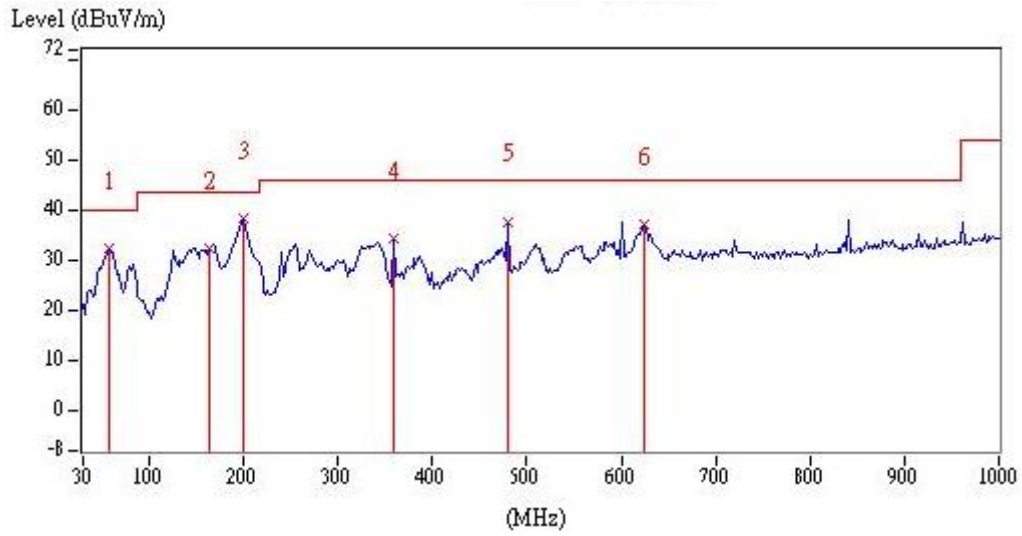

## Horizontal

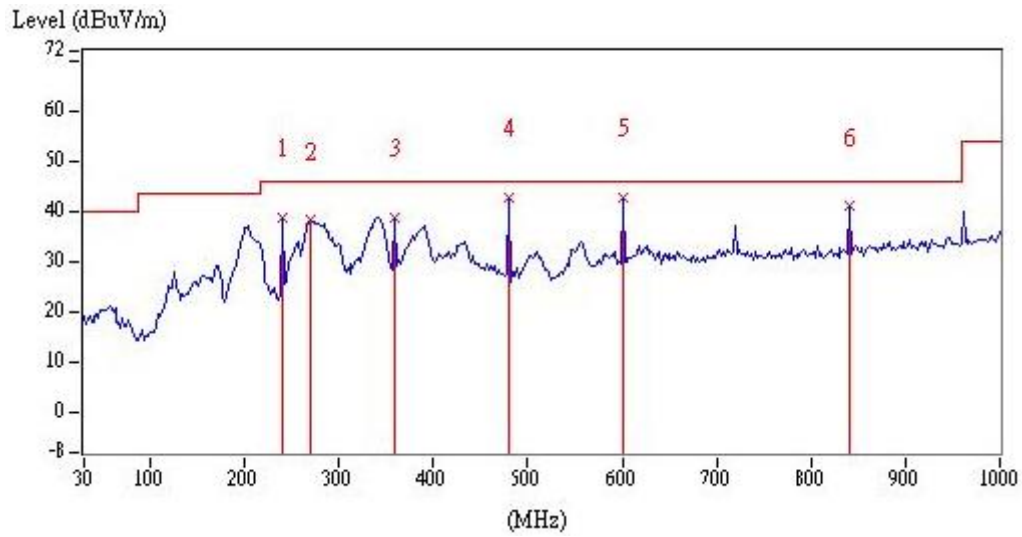

**6.6.2 Measurement results: frequency above 1GHz to 26GHz**

EUT: MC-J6950

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11b_Ch1	4824	PK	V	8.87	45.23	54.10	74.00	-19.90
	4824	AV	V	8.87	43.44	52.31	54.00	-1.69
	4824	PK	H	8.87	45.70	54.57	74.00	-19.43
	4824	AV	H	8.87	43.60	52.47	54.00	-1.53
802.11b_Ch6	4874	PK	V	8.98	45.42	54.40	74.00	-19.60
	4874	AV	V	8.98	43.52	52.50	54.00	-1.50
	4874	PK	H	8.98	44.97	53.95	74.00	-20.05
	4874	AV	H	8.98	42.74	51.72	54.00	-2.28
802.11b_Ch11	4924	PK	V	9.08	45.58	54.66	74.00	-19.34
	4924	AV	V	9.08	43.90	52.98	54.00	-1.02
	4924	PK	H	9.08	45.22	54.30	74.00	-19.70
	4924	AV	H	9.08	43.13	52.21	54.00	-1.79
802.11g_Ch1	4824	PK	V	8.87	43.53	52.40	74.00	-21.60
	4824	AV	V	8.87	29.23	38.10	54.00	-15.90
	4824	PK	H	8.87	40.68	49.55	74.00	-24.45
802.11g_Ch6	4874	PK	V	8.98	50.72	59.70	74.00	-14.30
	4874	AV	V	8.98	37.38	46.36	54.00	-7.64
	4874	PK	H	8.98	50.32	59.30	74.00	-14.70
	4874	AV	H	8.98	36.22	45.20	54.00	-8.80
802.11g_Ch11	4924	PK	V	9.08	50.31	59.39	74.00	-14.61
	4924	AV	V	9.08	38.30	47.38	54.00	-6.62
	4924	PK	H	9.08	50.02	59.10	74.00	-14.90
	4924	AV	H	9.08	37.97	47.05	54.00	-6.95

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre\_Amplifier Gain

**TEST REPORT**

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)
802.11n(HT20)_Ch1	4824	PK	V	8.87	37.20	46.07	74.00	-27.93
	4824	PK	H	8.87	40.37	49.24	74.00	-24.76
802.11n(HT20)_Ch6	4874	PK	V	8.98	51.62	60.60	74.00	-13.40
	4874	AV	V	8.98	36.03	45.01	54.00	-8.99
	4874	PK	H	8.98	51.54	60.52	74.00	-13.48
	4874	AV	H	8.98	35.42	44.40	54.00	-9.60
802.11n(HT20)_Ch11	4924	PK	V	9.08	50.10	59.18	74.00	-14.82
	4924	AV	V	9.08	35.47	44.55	54.00	-9.45
	4924	PK	H	9.08	49.16	58.24	74.00	-15.76
	4924	AV	H	9.08	35.12	44.20	54.00	-9.80
802.11n(HT40)_Ch3	4844	PK	V	8.91	32.67	41.58	74.00	-32.42
	4844	PK	H	8.91	33.00	41.91	74.00	-32.09
802.11n(HT40)_Ch6	4874	PK	V	8.98	39.21	48.19	74.00	-25.81
	4874	PK	H	8.98	39.84	48.82	74.00	-25.18
802.11n(HT40)_Ch9	4904	PK	V	9.04	40.66	49.70	74.00	-24.30
	4904	PK	H	9.04	41.85	50.89	74.00	-23.11

Remark: Correction Factor = Antenna Factor + Cable Loss + High Pass Filter Loss - Pre\_Amplifier Gain



## 7. Emission on Band Edge

### 7.1 Instrument Setting

Spectrum Function	Setting
Detector	Peak and Average
RBW	1MHz
VBW	3MHz
Sweep	Auto couple
Restrict bands	2310 MHz ~ 2390 MHz 2483.5 MHz ~ 2500 MHz
Attenuation	Auto

### 7.2 Test Procedure

The test procedure is the same as Emissions in Restricted Frequency Bands (Radiated emission measurements).

### 7.3 Operating Environment Condition


Temperature (°C) :	19
Relative Humidity (%) :	59

7.4 Test Results


EUT: MC-J6950

Mode	Frequency (MHz)	Spectrum Analyzer Detector	Ant. Pol. (H/V)	Correction Factor (dB/m)	Reading (dBμV)	Corrected Reading (dBμV/m)	Limit @ 3 m (dBμV/m)	Margin (dB)	Restricted band (MHz)
802.11b	2387.27	PK	H	35.25	27.32	62.57	74	-11.43	2310~2390
	2386.71	AV	H	35.25	17.44	52.69	54	-1.31	
	2484.88	PK	H	35.63	26.28	61.91	74	-12.09	2483.5~2500
	2498.65	AV	H	35.68	14.32	50.01	54	-3.99	
802.11g	2390.00	PK	H	35.26	28.18	63.44	74	-10.56	2310~2390
	2390.00	AV	H	35.26	17.28	52.54	54	-1.46	
	2483.50	PK	H	35.63	30.78	66.41	74	-7.59	2483.5~2500
	2483.50	AV	H	35.63	16.89	52.52	54	-1.48	
802.11n (HT20)	2388.66	PK	H	35.26	31.71	66.96	74	-7.04	2310~2390
	2390.00	AV	H	35.26	16.99	52.25	54	-1.75	
	2483.50	PK	H	35.63	32.21	67.84	74	-6.16	2483.5~2500
	2483.50	AV	H	35.63	17.02	52.65	54	-1.35	
802.11n (HT40)	2387.27	PK	H	35.65	29.66	67.14	74	-6.86	2310~2390
	2390.00	AV	H	35.64	17.08	52.87	54	-1.13	
	2489.59	PK	H	35.25	31.89	65.31	74	-8.69	2483.5~2500
	2487.22	AV	H	35.26	17.61	52.72	54	-1.28	


### Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 PK

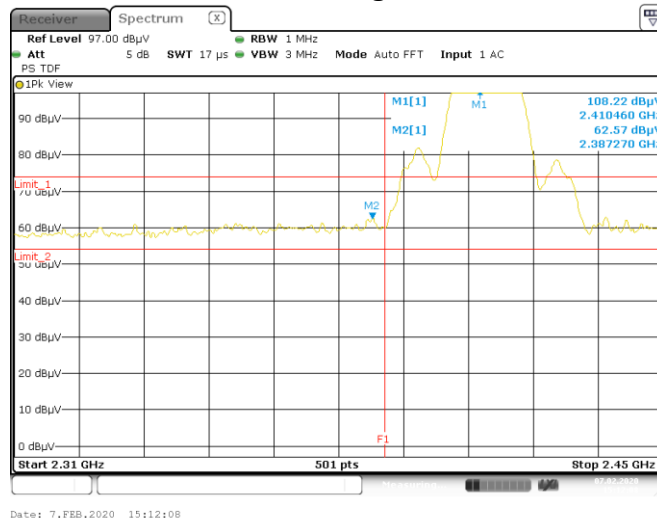


### Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch1 AV

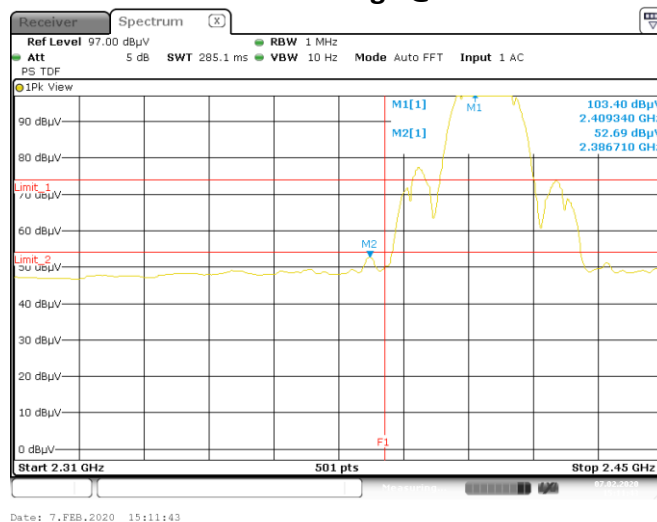

### Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 PK

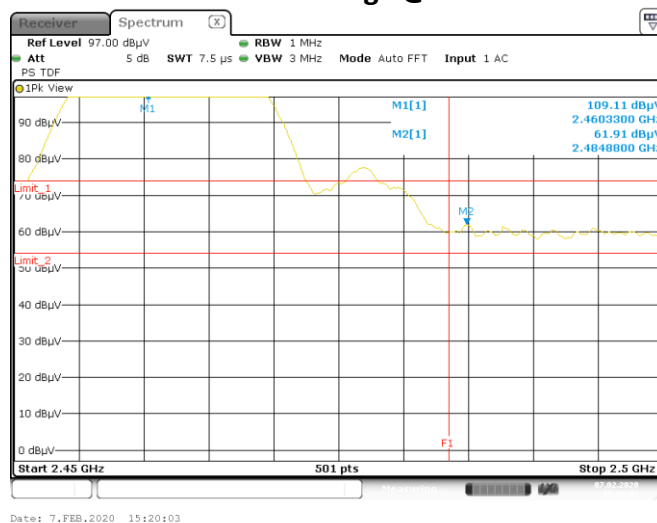


### Chain0 : Restricted Band Bandedge @ 802.11b Mode Ch11 AV

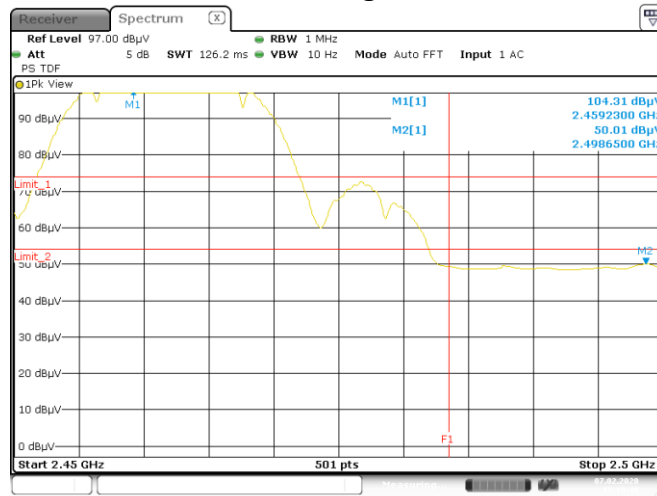


Date: 7.FEB.2020 15:19:49

### Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 PK

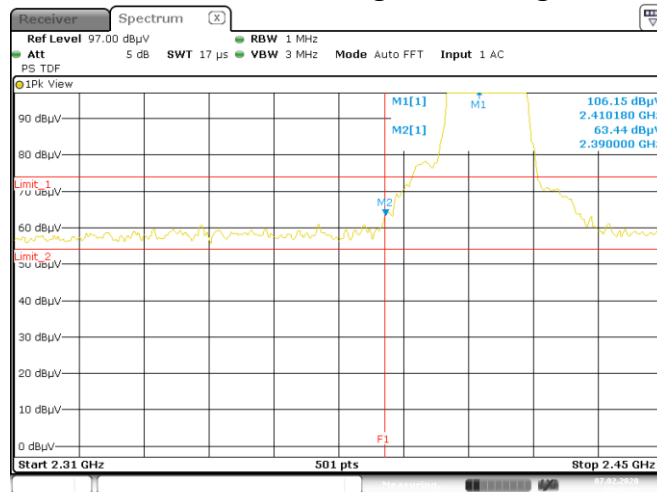


Date: 7.FEB.2020 15:42:31

### Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch1 AV

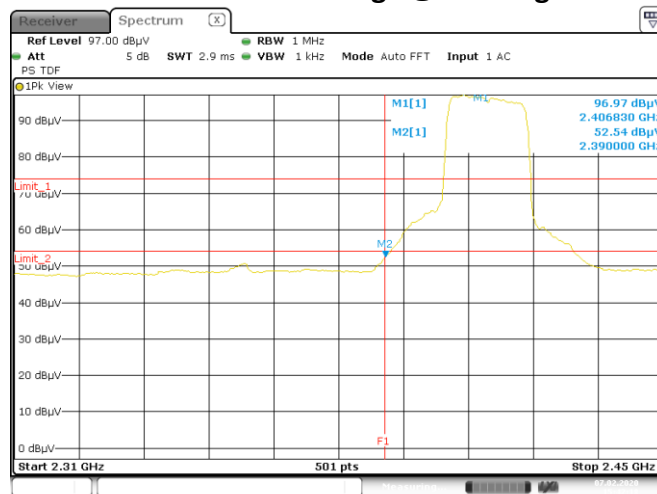


Date: 7.FEB.2020 15:42:18

### Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 PK

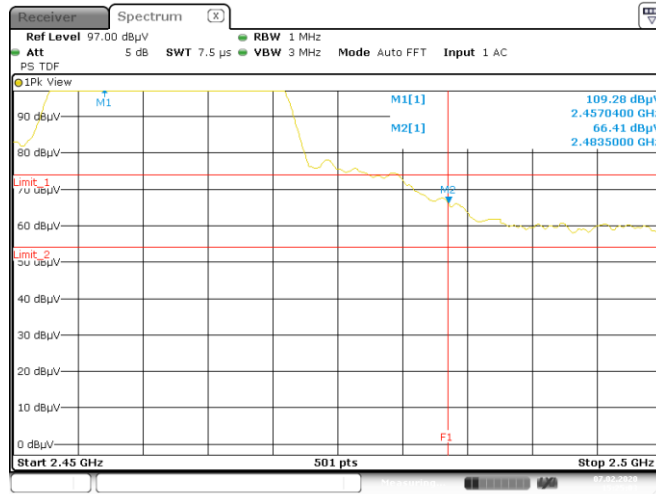


Date: 7.FEB.2020 15:25:03

### Chain0 : Restricted Band Bandedge @ 802.11g Mode Ch11 AV

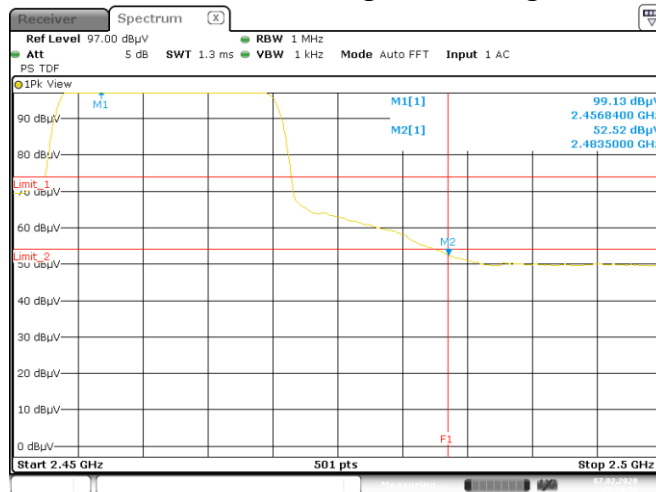


Date: 7.FEB.2020 15:24:50

### Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 PK

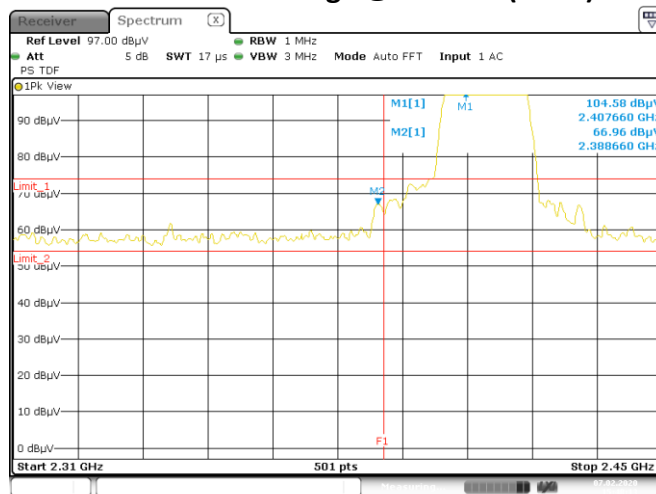


Date: 7.FEB.2020 15:48:13


### Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch1 AV

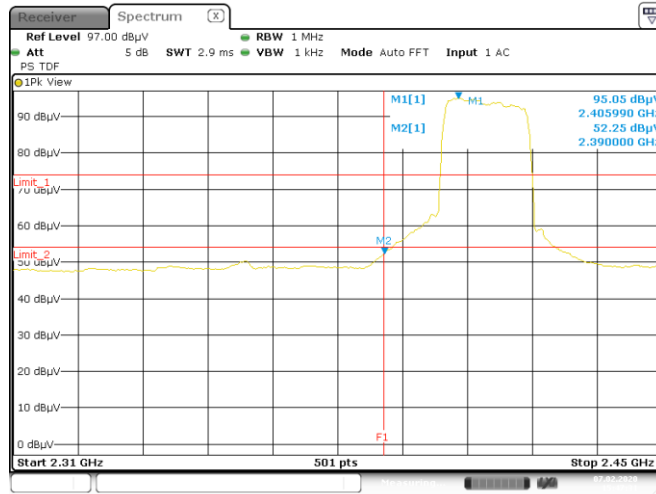


### Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 PK

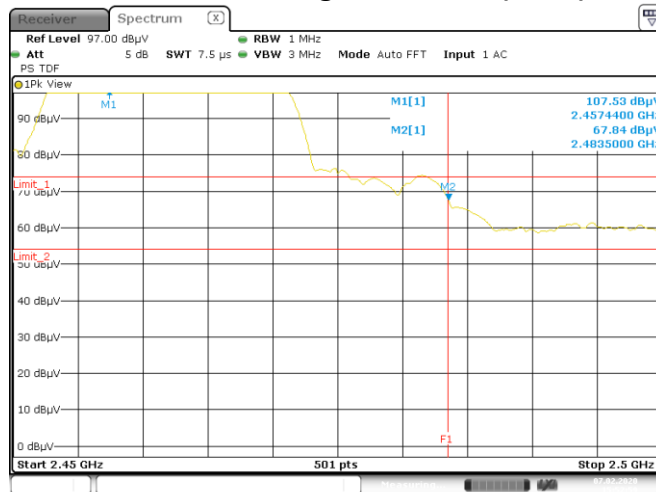


### Chain0 : Restricted Band Bandedge @ 802.11n(HT20) Mode Ch11 AV

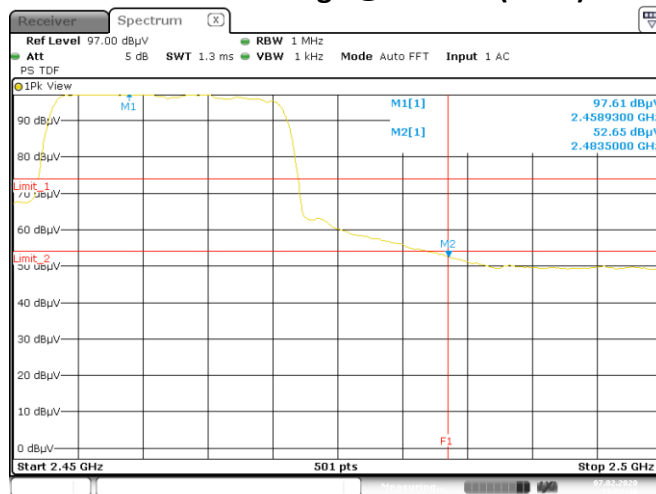


### Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 PK

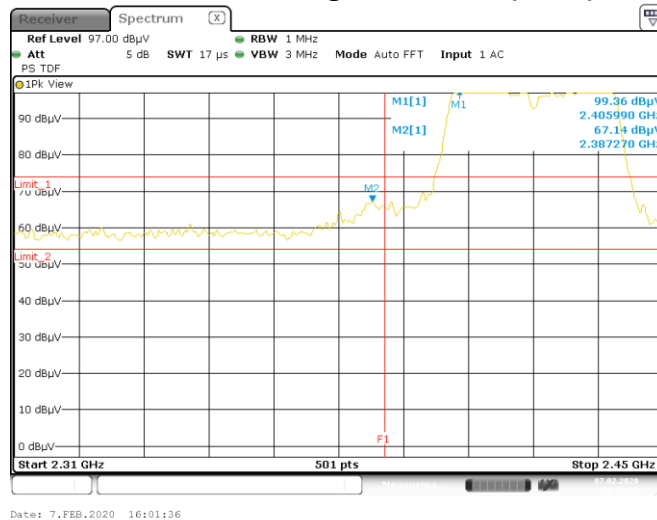


### Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch3 AV

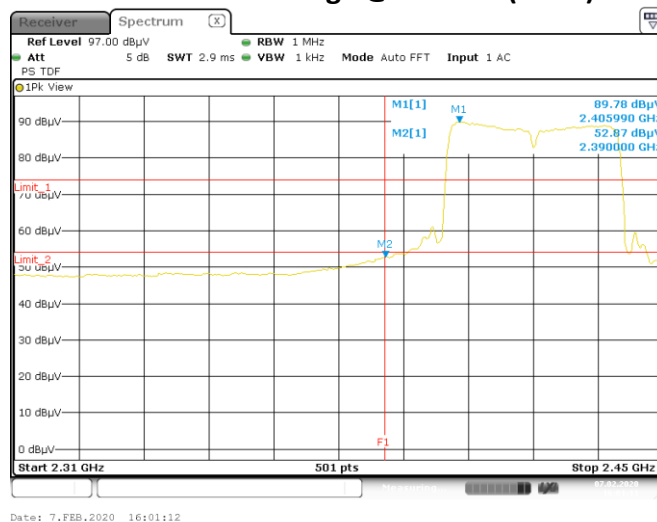

### Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 PK

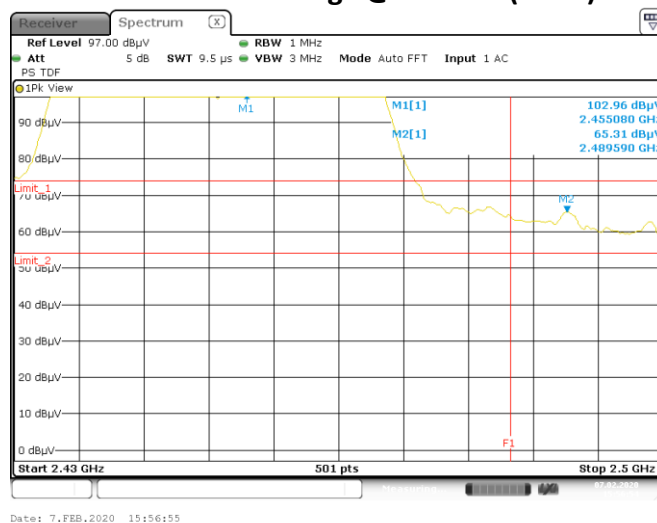


### Chain0 : Restricted Band Bandedge @ 802.11n(HT40) Mode Ch9 AV

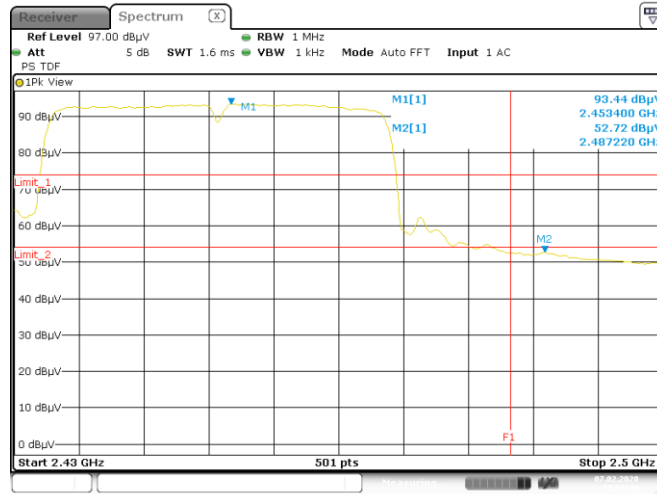





### Chain0 : Authorized Band Bandedge @ 802.11b Mode Ch1

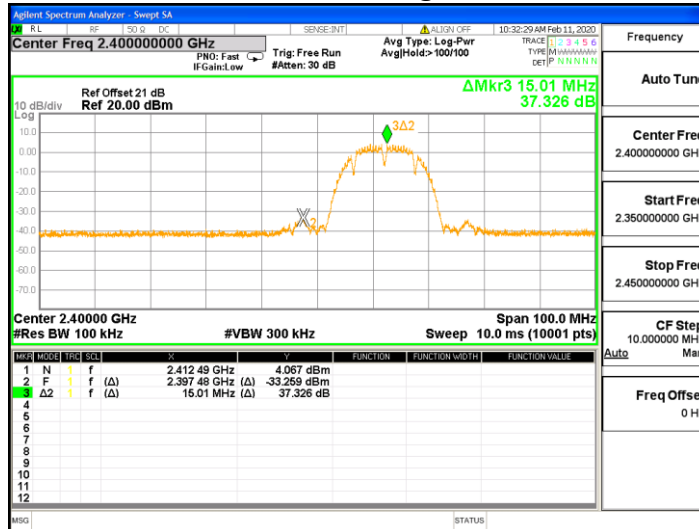


### Chain0 : Authorized Band Bandedge @ 802.11b Mode Ch11

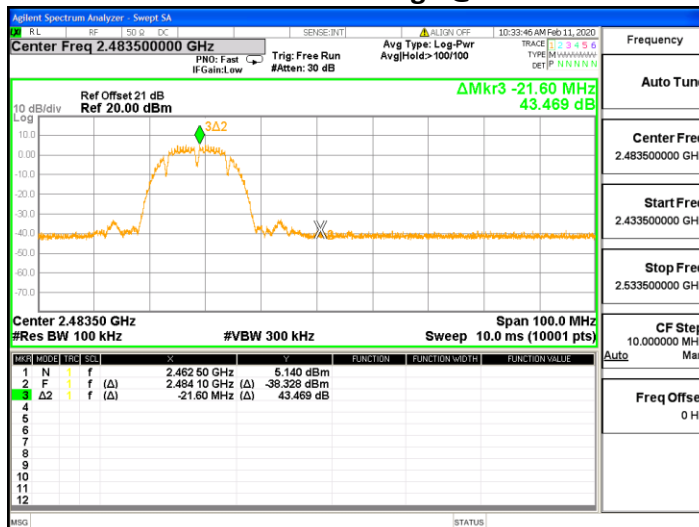


### Chain0 : Authorized Band Bandedge @ 802.11g Mode Ch1

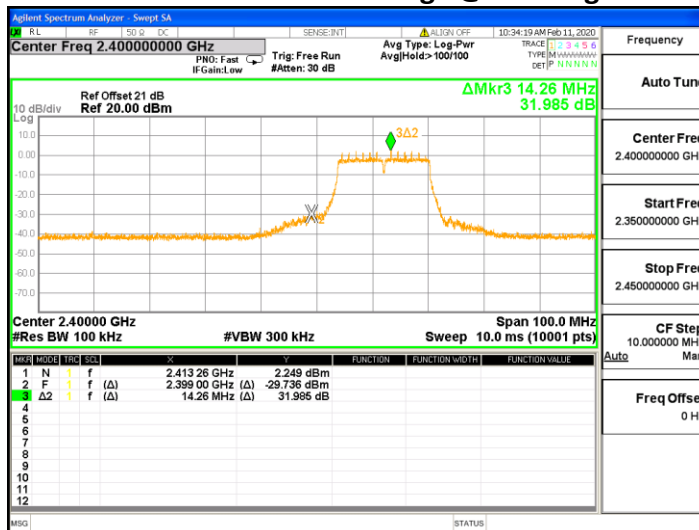


### Chain0 : Authorized Band Bandedge @ 802.11g Mode Ch11

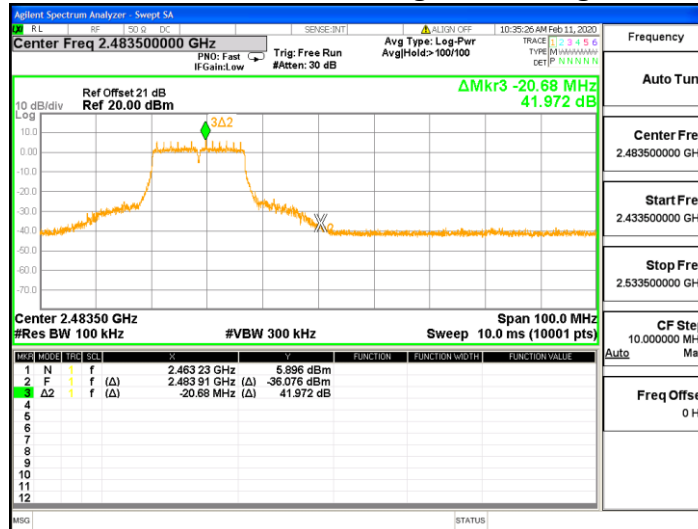


### Chain0 : Authorized Band Bandedge @ 802.11n(HT20) Mode Ch1

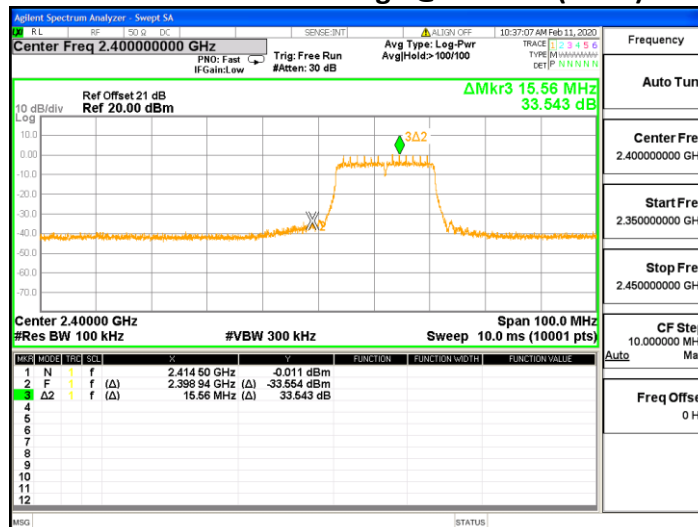


### Chain0 : Authorized Band Bandedge @ 802.11n(HT20) Mode Ch11

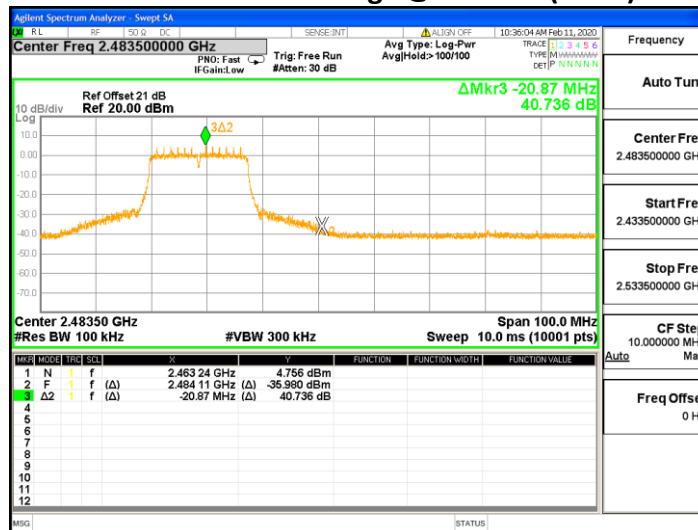

### Chain0 : Authorized Band Bandedge @ 802.11n(HT40) Mode Ch3

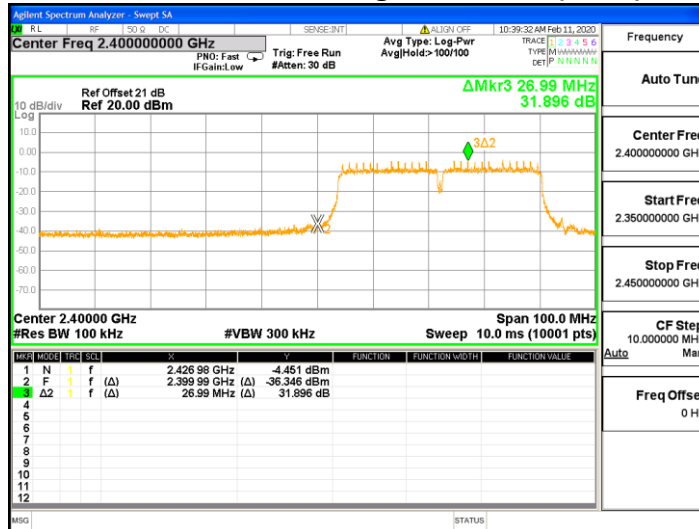

### Chain0 : Authorized Band Bandedge @ 802.11n(HT40) Mode Ch9

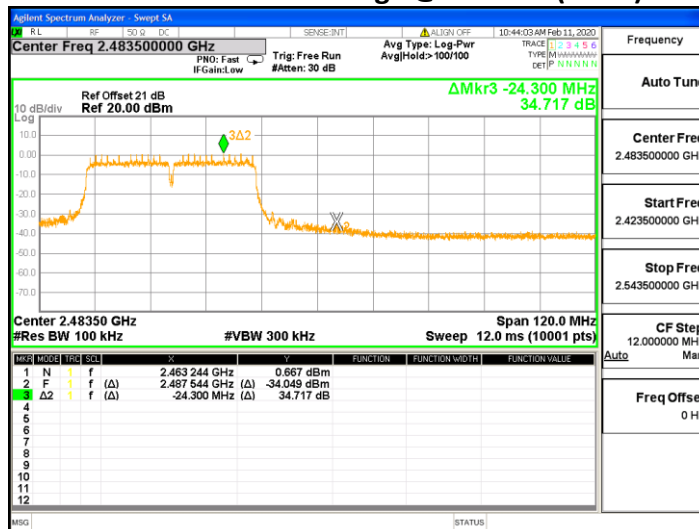

## 8. AC Power Line Conducted Emission


### 8.1 Measuring instrument setting

Receiver Function	Setting
Detector	QP
Start frequency	0.15MHz
Stop frequency	30MHz
IF bandwidth	9 kHz
Attenuation	10dB

### 8.2 Test Procedure

Step 1	Configure the EUT according to ANSI C63.10:2013. The EUT or host of EHT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
Step 2	Connect EUT or host of EUT to the power mains through a line impedance stabilization network.
Step 3	All the companion devices are connected to the other LISN. The LISN should provide 50Uh/50ohms coupling impedance.
Step 4	The frequency range from 150 kHz to 30MHz was searched.
Step 5	Set the test-receiver system to peak detector and specified bandwidth with maximum hold mode.
Step 6	The measurement has to be done between each power line and ground at the power terminal.

### 8.3 Test Diagram

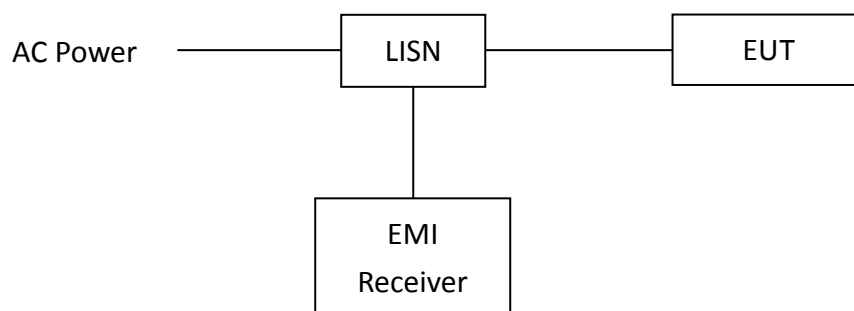

**8.4 Limit**

Frequency (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56	56 – 46
0.50~5.00	56	46
5.00~30.0	60	50

**8.5 Operating Environment Condition**

Temperature (°C) :	21
Relative Humidity (%) :	60
Atmospheric Pressure (hPa) :	1010

## TEST REPORT


### 8.6 Test Results

Phase: Live Line  
 Model No.: MC-J6950  
 Test Condition: Tx mode

Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
								QP	AV
0.227	0.04	50.96	51.00	62.57	48.55	48.59	52.57	-11.56	-3.97
0.283	0.05	16.74	16.79	60.72	15.24	15.29	50.72	-43.93	-35.43
0.341	0.05	36.34	36.39	59.18	31.23	31.28	49.18	-22.79	-17.90
2.099	0.12	37.12	37.24	56.00	36.06	36.18	46.00	-18.76	-9.82
9.603	0.40	34.60	35.00	60.00	31.22	31.62	50.00	-25.00	-18.38
14.828	0.73	32.30	33.03	60.00	24.06	24.79	50.00	-26.97	-25.21

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

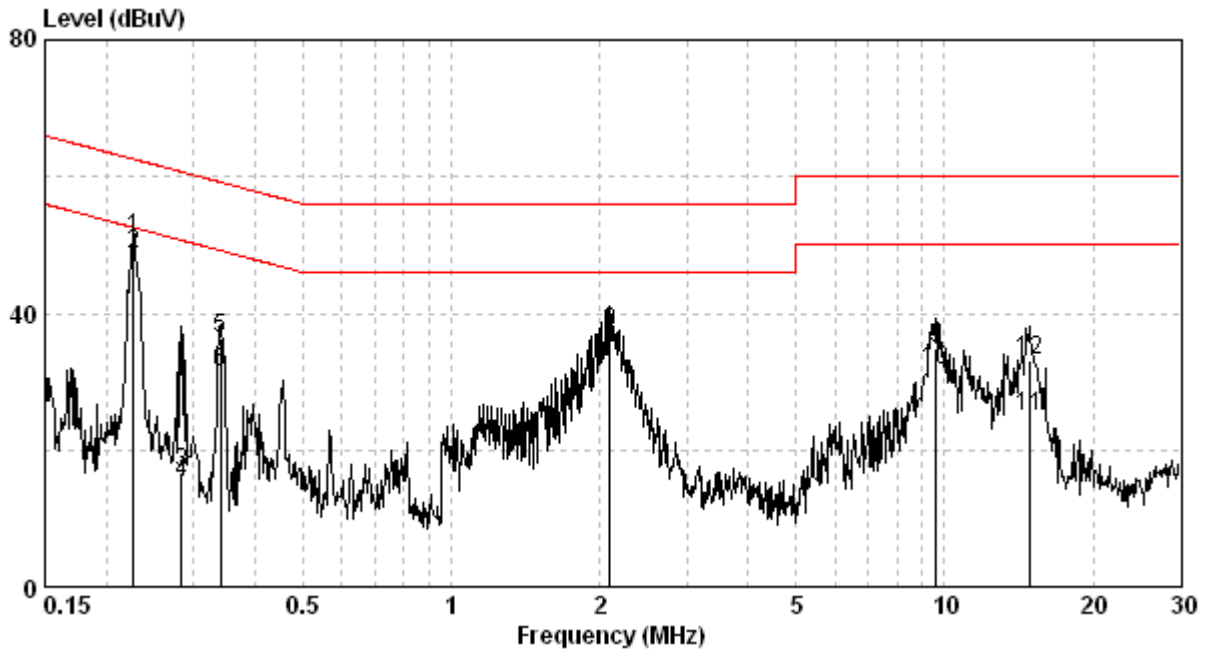


## TEST REPORT

Phase: Neutral Line  
 Model No.: MC-J6950  
 Test Condition: Tx mode

Frequency (MHz)	Corr. Factor (dB)	Reading QP (dBuV)	Level QP (dBuV)	Limit QP (dBuV)	Reading AV (dBuV)	Level AV (dBuV)	Limit AV (dBuV)	Margin (dB)	
								QP	AV
0.150	0.07	24.57	24.64	66.00	14.88	14.95	56.00	-41.36	-41.05
0.227	0.04	50.74	50.78	62.57	48.76	48.80	52.57	-11.78	-3.76
0.341	0.05	37.17	37.22	59.18	32.00	32.05	49.18	-21.96	-17.13
2.099	0.12	38.42	38.54	56.00	37.65	37.77	46.00	-17.46	-8.23
9.757	0.40	34.91	35.31	60.00	24.53	24.93	50.00	-24.69	-25.07
14.594	0.72	28.43	29.15	60.00	25.02	25.74	50.00	-30.85	-24.26

### Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Level (dBuV) = Corr. Factor (dB) + Reading (dBuV)
3. Margin (dB) = Level (dBuV) – Limit (dBuV)

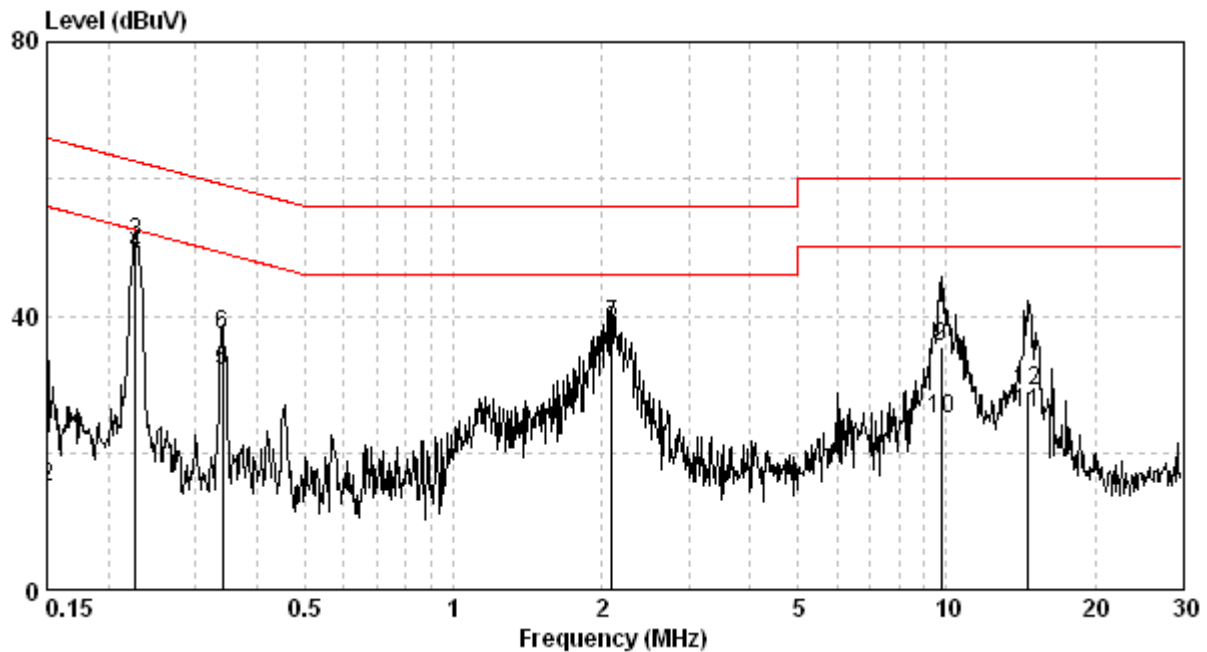

**Appendix A: Test equipment list**

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESR-7	101232	2020/01/18	2021/01/16
EMI Test Receiver	R&S	ESU40	100381	2020/05/29	2021/05/28
Spectrum Analyzer	R&S	FSP30	100137	2019/08/29	2020/08/27
Signal Analyzer	Agilent	N9030A	MY51380492	2019/08/21	2020/08/19
Active Loop Antenna	SCHWARZBECK MESS-ELEKTRONIC	FMZB1519	1519-067	2019/04/19	2020/04/17
Broadband Antenna	SHWARZBECK	VULB 9168	9168-172	2019/06/05	2020/06/03
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170159	2017/09/04	2020/09/02
Horn Antenna	SHWARZBECK	BBHA 9120 D	9120D-456	2020/01/20	2021/01/18
Power Meter	Anritsu	ML2495A	0844001	2019/10/23	2020/10/21
Power Sensor	Anritsu	MA2411B	0738452	2019/10/23	2020/10/21
Pre-Amplifier	SCHWARZBECK	BBV9718	9718-004	2019/10/16	2020/10/14
Pre-amplifier	EMCI	EMC184045SE	980512	2020/06/01	2021/05/31
966-2(A) Cable	SUHNER	SMA / EX 100	N/A	2019/08/19	2020/08/17
966-2(B) Cable	SUHNER	SUCOFLEX 104P	CB0005	2019/08/19	2020/08/17
RF Cable	EMCI	EMC102-KM-KM-2000	170225	2019/07/19	2020/07/17
RF Cable	SUHNER	SUCOFLEX 102	N/A	2020/04/15	2021/04/14
RF Cable	SUHNER	SUCOFLEX 102	CB0006	2019/05/02	2020/04/30
Hight Pass Filter	Wainwright	WHKX3.0/18G-12SS	N/A	2019/05/30	2020/05/28
966-2_3m Semi-Anechoic Chamber	966_2	CEM-966_2	N/A	2019/02/23	2020/02/22

Note: No Calibration Required (NCR)



**TEST REPORT**

Test Equipment/ Test site	Brand	Model No.	Serial No.	Calibration Date	Next Calibration Date
EMI Test Receiver	R&S	ESCI	100059	2019/11/05	2020/11/03
Two-Line V-Network	R&S	ENV216	101160	2019/07/17	2020/07/15
Two-Line -V-Network	R&S	ESH3-Z5	825562/003	2019/08/27	2020/08/25
CON-3 Shielded Room	N/A	N/A	N/A	NCR	NCR
CON-3 Cable	SUHNER	SUCOFLEX 106	27222 /6	2020/01/15	2021/01/13
Test software	Audix	e3	4.20040112L	NCR	NCR

Note: No Calibration Required (NCR).

### Appendix B: Measurement Uncertainty

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

Item	Uncertainty
Vertically polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	4.90 dB
Horizontally polarized radiated disturbances from 30MHz~1GHz in a semi-anechoic chamber at a distance of 3m	4.89 dB
Vertically polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	4.29 dB
Horizontally polarized Radiated disturbances from 1GHz~18GHz in a semi-anechoic chamber at a distance of 3m	4.29 dB
Vertically polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.45 dB
Horizontally polarized Radiated disturbances from 18GHz~26.5GHz in a semi-anechoic chamber at a distance of 1m	2.45 dB
Radiated disturbances from 9kHz~30MHz in a semi-anechoic chamber at a distance of 3m	3.32 dB
Emission on the Band Edge Test	4.29 dB
Minimum 6 dB Bandwidth	7.69 %
Maximum Peak Conducted Output Power	0.37 dB
Power Spectral Density	1.15 dB
Emissions In Non-Restricted Frequency Bands	1.15 dB
AC Power Line Conducted Emission	2.52 dB