

# TEST REPORT

of


FCC CFR 47 part 1, 1.1307(b), 1.1310

FCC ID: TQ8-ADB30G5AN

Equipment Under Test : DISPLAY CAR SYSTEM  
Model Name : ADB30G5AN  
Applicant : Hyundai Mobis Co., Ltd.  
Manufacturer : Hyundai Mobis Co., Ltd.  
Date of Receipt : 2019.05.23  
Date of Test(s) : 2019.05.30 ~ 2019.07.02  
Date of Issue : 2019.07.04

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

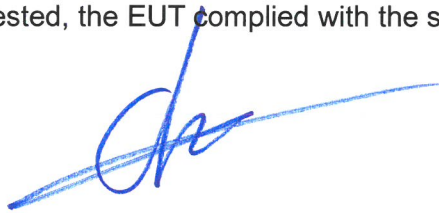

Jinhyoung Cho

Date:

2019.07.04

Technical  
Manager:



Jungmin Yang

Date:

2019.07.04

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

---

# INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Exposure Evaluation -----	4

---

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 1. General Information

### 1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

### 1.2. Details of Applicant

Applicant : Hyundai Mobis Co., Ltd.

Address : 203, Teheran-ro, Gangnam-gu, Seoul, South Korea, 135-977

Contact Person : Choe, Seung-hoon

Phone No. : +82 31 260 0098

### 1.3. Details of Manufacturer

Company : Same as applicant

Address : Same as applicant

### 1.4. Description of EUT

<b>Kind of Product</b>	DISPLAY CAR SYSTEM
<b>Model Name</b>	ADB30G5AN
<b>Power Supply</b>	DC 14.4 V
<b>Frequency Range</b>	2 402 MHz ~ 2 480 MHz (Bluetooth)
<b>Modulation Technique</b>	GFSK, $\pi/4$ DQPSK, 8DPSK
<b>Number of Channels</b>	79 channel (Bluetooth)
<b>Antenna Type</b>	PCB pattern antenna
<b>Antenna Gain</b>	0.07 dBi

### 1.5. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501/RF-RTL014033	2019.07.02	Initial
1	F690501/RF-RTL014033-1	2019.07.04	Added WWAN MPE result

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

## 2. RF Exposure Evaluation

### 2.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

#### LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f <sup>2</sup>	6
30-300	61.4	0.163	1.0	6
300-1 500	-	-	f/300	6
1 500-100 000	-	-	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f <sup>2</sup>	30
30-300	27.5	0.073	0.2	30
<b><u>300-1 500</u></b>	-	-	<b><u>f/1500</u></b>	<b><u>30</u></b>
<b><u>1 500-100 000</u></b>	-	-	<b><u>1.0</u></b>	<b><u>30</u></b>

#### 2.1.1. Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where  $P_d$  = power density in mW/cm<sup>2</sup>

$P_{out}$  = output power to antenna in mW

G = gain of antenna in linear scale

$\pi$  = 3.1416

R = distance between observation point and center of the radiator in cm

$P_d$  the limit of MPE, 1 mW/cm<sup>2</sup>. If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807** <http://www.sgsgroup.kr>

RTT5041-19(2019.04.24)(1)

Tel. +82 31 428 5700 / Fax. +82 31 427 2370

A4(210 mm x 297 mm)

### 2.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

### 2.1.3. Test information of Cable Loss and Antenna Gain

Test Item	Frequency (MHz)	Cable Loss (dB)	Antenna Gain (dB i)	Final Antenna Gain (dB i)
CDMA - BC0	824 ~ 849	-1.79	3.39	1.60
CDMA - BC1	1 850 ~ 1 910	-2.62	2.90	0.28
LTE - Band 2	1 850 ~ 1 910	-2.62	2.90	0.28
LTE - Band 4	1 710 ~ 1 755	-2.62	1.45	-1.17
LTE - Band 5	824 ~ 849	-1.79	3.39	1.60
LTE - Band 13	777 ~ 787	-1.79	1.99	0.20

**Note;**

- Final Antenna Gain (dB i) = Cable Loss (dB) + Antenna Gain (dB i)

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

### 2.1.4. Output Power into Antenna & RF Exposure Evaluation Distance

#### Bluetooth

##### - Maximum tune up tolerance

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
2 402 ~ 2 480	4	0.07	0.000 508	1

#### CDMA - BC0

##### - Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
824 ~ 849	25.7	1.60	0.106 839	0.55

#### CDMA - BC1

##### - Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 850 ~ 1 910	25.7	0.28	0.078 837	1

#### LTE - Band 2

##### - Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 850 ~ 1 910	25.7	0.28	0.078 837	1

#### LTE - Band 4

##### - Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
1 710 ~ 1 755	25.7	-1.17	0.056 459	1

The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.

SGS Korea Co., Ltd. (Gunpo Laboratory) 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>

**LTE - Band 5**
**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
824 ~ 849	25.7	1.60	0.106 839	0.55

**LTE - Band 13**
**- Maximum tune up tolerance**

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Final Antenna Gain (dB i)	Power Density at 20 cm (mW/cm <sup>2</sup> )	Limits (mW/cm <sup>2</sup> )
777 ~ 787	25.7	0.20	0.077 398	0.52

**Note;**

- The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm<sup>2</sup>.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This equipment should be installed and operated with minimum 20 cm between the radiator and your body.
- The antenna gain of this transmitter is less than 6 dB i and must not be collocated or operating in conjunction with any other antenna or transmitter unless authorized to do so by the FCC.

**Simultaneous transmission of MPE test exclusion for worst case configuration.**

Bluetooth: the ratio is 0.000 508 / 1  
 WWAN: the ratio is 0.106 839 / 0.55

Confirm the sum result of individual MPEs ratio is  $\leq 1.0$ ;  
 Bluetooth + WWAN:  $(0.000\ 508 / 1) + (0.106\ 839 / 0.55)$   
 $= 0.194\ 761 \leq 1.0$

So this device meets the KDB447498 D01 v06 section 7.2 requirement of "Simultaneous transmission MPE test exclusion"

**- End of the Test Report -**

*The results of this test report are effective only to the items tested. The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received. This test report cannot be reproduced, except in full, without prior written permission of the Company. This test report does not assure KOLAS accreditation.*

**SGS Korea Co., Ltd. (Gunpo Laboratory)** 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807 <http://www.sgsgroup.kr>