

Applicant: Eastern Times Technology Co., Ltd

Product: REDRAGON 104 KEY 3-MODES HOT-SWAPPABLE

MECHANICAL KEYBOARD

Model No.: K685WB-RGB-PRO, K685RGB-PRO, ET-7059

Trademark: REDRAGON

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C,

Paragraph 15.249 regulations for the evaluation

electromagnetic compatibility

Approved By

Terry Tong

Terry Tang

Manager

Dated: September 14, 2024


Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com



Report No.: TW2409120-02E Page 2 of 34

Date: 2024-09-14



# **Special Statement:**

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

## **A2LA (Certification Number:5013.01)**

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

CAB identifier: CN0033

Date: 2024-09-14



# **Test Report Conclusion**

#### Content 1.0 General Details 1.1 Test Lab Details.... 4 1.2 Applicant Details.... 4 1.3 Description of EUT ..... 1.4 Submitted Sample.... 4 Test Duration. 1.5 5 1.6 5 Test Uncertainty. 1.7 Test By..... 5 List of Measurement Equipment..... 2.0 6 7 3.0 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 EUT Modification.... 7 Power Line Conducted Emission Test.... 5.0 8 Schematics of the Test..... 5.1 8 5.2 Test Method and Test Procedure. Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition. Conducted Emission Limit. 9 5.5 5.6 Test Result. 6.0 Radiated Emission test.... 12 Test Method and Test Procedure. 6.1 12 6.2 Configuration of the EUT.... 13 6.3 EUT Operation Condition. 13 Radiated Emission Limit. 14 6.4 6.5 Test Result. 15 7.0 Band Edge.... 23 7.1 Test Method and Test Procedure. 23 7.2 Radiated Test Setup. 23 7.3 Configuration of the EUT..... 23 7.4 EUT Operating Condition. 23 7.5 Band Edge Limit..... 23 7.6 Band Edge Test Result. 24 8.0 Antenna Requirement..... 28 20dB bandwidth measurement.... 9.0 29 FCC ID Label..... 10.0 38

The report refers only to the sample tested and does not apply to the bulk.

11.0

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Photo of Test Setup and EUT View....

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2024-09-14



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

## 1.2 Applicant Details

Applicant: Eastern Times Technology Co., Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town, Dongguan City,

Guangdong, China.

## 1.3 Description of EUT

Product: REDRAGON 104 KEY 3-MODES HOT-SWAPPABLE MECHANICAL

**KEYBOARD** 

Manufacturer: Eastern Times Technology Co., Ltd

Address: Building D, Nan An Industrial Area, Youganpu Village, Fenggang Town,

Dongguan City, Guangdong, China.

Trademark: REDRAGON

Additional Trademark: N/A

Model Number: K685WB-RGB-PRO
Additional Model Name K685RGB-PRO, ET-7059

Hardware Version: 8479-A RX V1

Software Version: C5202

Serial No.: RDK685WB-RGB-PRO24042000028
Rating: Input: DC5V, 500mA or DC3.7V, 120mA

Battery: DC3.7V, 3000mAh Li-ion battery

Modulation Type: GFSK

Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz Channel Number: 79

Antenna Designation PCB antenna with gain 2.34dBi Max (Get from the antenna specification)

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2409120-02E Page 5 of 34

Date: 2024-09-14



1.4 Submitted Sample: 2 Samples

1.5 Test Duration

2024-09-10 to 2024-09-14

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 34

Report No.: TW2409120-02E

Date: 2024-09-14



2.0 Test Equipment						
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date	
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100253	2024-07-12	2025-07-11	
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2024-07-12	2025-07-11	
Loop Antenna	EMCO	6507	00078608	2022-07-18	2025-07-17	
Spectrum	R&S	FSIQ26	100292	2024-07-12	2025-07-11	
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2022-07-18	2025-07-17	
Horn Antenna	R&S	BBHA 9120D	9120D-631	2022-07-18	2025-07-17	
Power meter	Anritsu	ML2487A	6K00003613	2024-07-12	2025-07-11	
Power sensor	Anritsu	MA2491A	32263	2024-07-12	2025-07-11	
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2022-07-18	2025-07-17	
9*6*6 Anechoic		1	N/A	2022-07-26	2025-07-25	
EMI Test Receiver	RS	ESVB	826156/011	2024-07-12	2025-07-11	
EMI Test Receiver	RS	ESCS 30	834115/006	2024-07-12	2025-07-11	
Spectrum	HP/Agilent	E4407B	MY50441392	2024-07-12	2025-07-11	
Spectrum	RS	FSP	1164.4391.38	2024-07-12	2025-07-11	
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/FA	-	2024-07-12	2025-07-11	
RF Cable	Zhengdi	7m		2024-07-12	2025-07-11	
Pre-Amplifier	Schwarebeck	BBV9743	#218	2024-07-12	2025-07-11	
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2024-07-12	2025-07-11	
LISN	SCHAFFNER	NNB42	00012	2024-07-12	2025-07-11	
ESPI Test Receiver	R&S	ESPI 3	100379	2024-07-12	2025-07-11	
LISN	R&S	EZH3-Z5	100294	2024-07-12	2025-07-11	

## 2.2 Automation Test Software

#### For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

## For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 7 of 34

Report No.: TW2409120-02E

Date: 2024-09-14



#### 3.0 Technical Details

## 3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna Requirement	Pass	Complies
FCC Part 15, Paragraph 15.207	Conducted Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	Pass	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	Pass	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	Pass	Complies

#### 3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

#### 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2024-09-14



#### 5. Power Line Conducted Emission Test

## 5.1 Schematics of the test

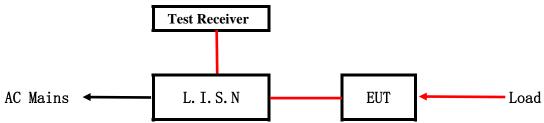


**EUT: Equipment Under Test** 

## 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum from 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

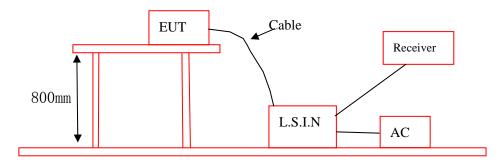

## 5.3 Configuration of the EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

79 channels are provided to the EUT

#### A. EUT

Device	Manufacturer	Model	FCC ID
<b>REDRAGON 104 KEY</b>	Eastern Times	V605WD DCD DDO	
3-MODES HOTSWAPPABLE		K685WB-RGB-PRO,	TUVET-7059A
MECHANICAL KEYBOARD	Technology Co., Ltd	K685RGB-PRO, ET-7059	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

Report No.: TW2409120-02E Page 9 of 34

Date: 2024-09-14



#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

## C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition
- 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies
- 5.6 Test Results:

Pass

Date: 2024-09-14



## A: Conducted Emission on Live Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Charging and Communication by BT** 

**Results: Pass** 

Please refer to following diagram for individual

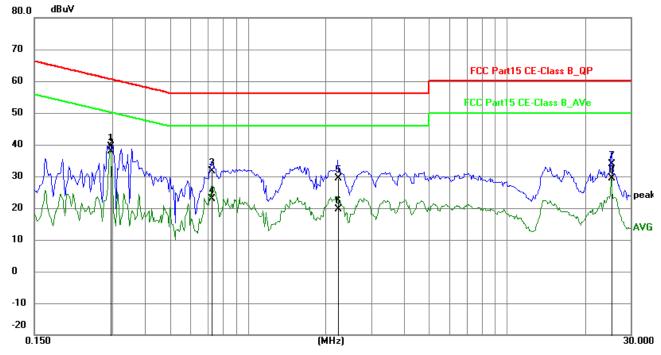

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2943	29.65	9.76	39.41	60.40	-20.99	QP	Р
2	0.2943	28.21	9.76	37.97	50.40	-12.43	AVG	Р
3	0.7272	21.87	9.78	31.65	56.00	-24.35	QP	Р
4	0.7272	13.20	9.78	22.98	46.00	-23.02	AVG	Р
5	2.2325	19.65	9.81	29.46	56.00	-26.54	QP	Р
6	2.2325	9.77	9.81	19.58	46.00	-26.42	AVG	Р
7	25.2300	22.90	11.00	33.90	60.00	-26.10	QP	Р
8	25.2300	18.27	11.00	29.27	50.00	-20.73	AVG	Р

Date: 2024-09-14



## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Charging and Communication by BT

**Results: Pass** 

Please refer to following diagram for individual

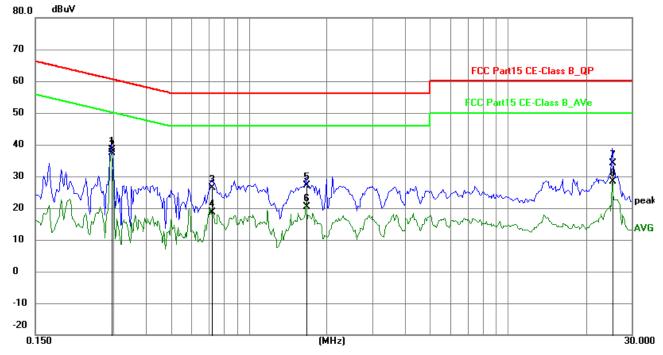

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2943	28.57	9.76	38.33	60.40	-22.07	QP	Р
2	0.2943	27.74	9.76	37.50	50.40	-12.90	AVG	Р
3	0.7194	16.56	9.78	26.34	56.00	-29.66	QP	Р
4	0.7194	8.94	9.78	18.72	46.00	-27.28	AVG	Р
5	1.6632	17.29	9.80	27.09	56.00	-28.91	QP	Р
6	1.6632	10.52	9.80	20.32	46.00	-25.68	AVG	Р
7	25.2300	23.02	11.00	34.02	60.00	-25.98	QP	Р
8	25.2300	17.30	11.00	28.30	50.00	-21.70	AVG	Р

Report No.: TW2409120-02E Page 12 of 34

Date: 2024-09-14




#### **6** Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

#### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

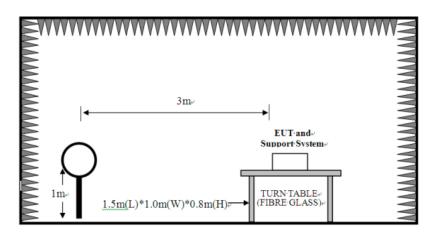


Page 13 of 34

Report No.: TW2409120-02E


Date: 2024-09-14



For radiated emissions from 30MHz to1GHz

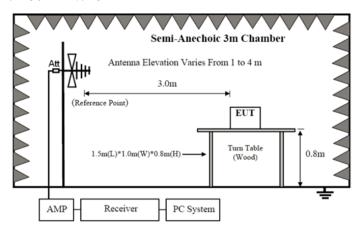

For radiated emissions above 1GHz

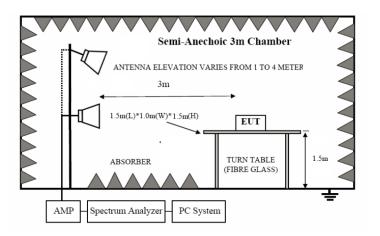

- 6.2 Configuration of the EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.

Report No.: TW2409120-02E Page 14 of 34

Date: 2024-09-14



#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

## A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field Strength of Harmonics (3m)		
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

## B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
0.009-0.490	3	20log(2400/F(kHz)) +40log (300/3)
0.490-1.705	3	20log(24000/F(kHz)) +40log (30/3)
1.705-30	3	69.5
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 5. For radiated emissions from 9kHz to 30MHz, the emission level is much less than the limit for more than 20dB. No necessary to take down the record.
- 6. Battery full charged during tests.

Date: 2024-09-14




Page 15 of 34

#### 6.5 Test result

## **A** Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

#### Horizontal

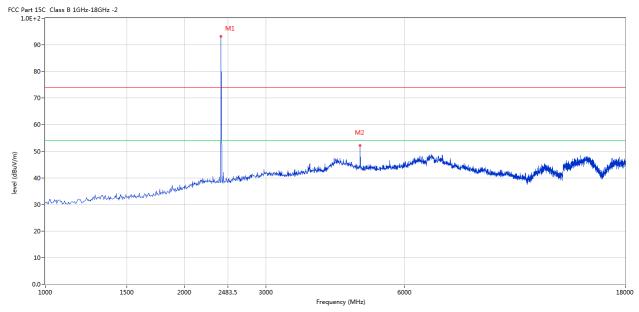


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2402	93.13	-3.57	114.0	-20.87	Peak	93.00	100	Horizontal	Pass
2	4802.799	52.11	3.12	74.0	-21.89	Peak	88.00	100	Horizontal	Pass

Report No.: TW2409120-02E Page 16 of 34

Date: 2024-09-14



#### Vertical

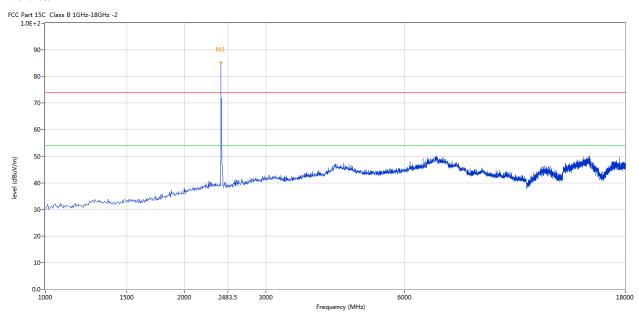

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402	86.33	-3.57	114.0	-27.67	Peak	239.00	100	Vertical	Pass


Report No.: TW2409120-02E Page 17 of 34

Date: 2024-09-14



Please refer to the following test plots for details: Middle Channel-2441MHz

#### **Horizontal**

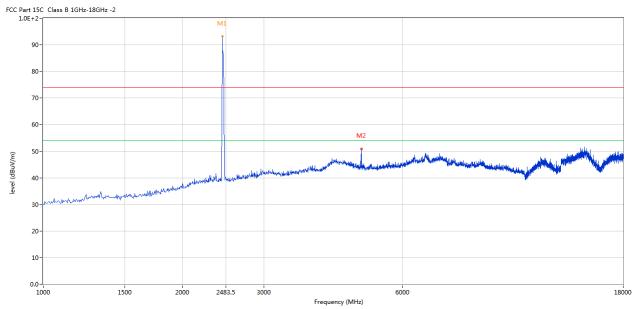


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	93.30	-3.57	114.0	-20.70	Peak	80.00	100	Horizontal	Pass
2	4883.529	50.90	3.20	74.0	-23.10	Peak	287.00	100	Horizontal	Pass

Report No.: TW2409120-02E Page 18 of 34

Date: 2024-09-14



## Vertical

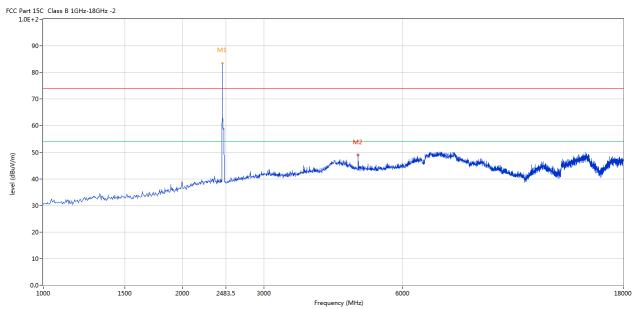

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2441	83.38	-3.57	114.0	-30.62	Peak	225.00	100	Vertical	Pass
2	4802.799	48.89	3.12	74.0	-25.11	Peak	195.00	100	Vertical	Pass


Report No.: TW2409120-02E Page 19 of 34

Date: 2024-09-14



Please refer to the following test plots for details: High Channel-2480MHz

#### Horizontal

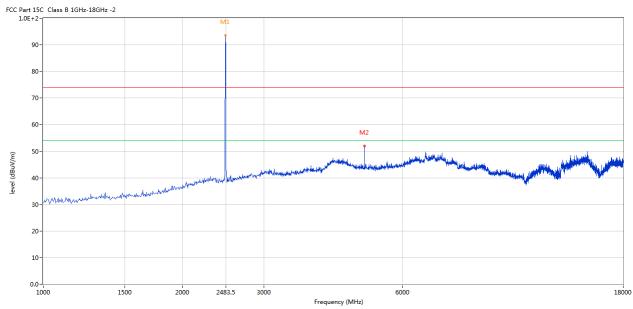


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	93.59	-3.57	114.0	-20.41	Peak	127.00	100	Horizontal	Pass
2	4960.010	52.03	3.36	74.0	-21.97	Peak	274.00	100	Horizontal	Pass

Report No.: TW2409120-02E Page 20 of 34

Date: 2024-09-14



#### Vertical

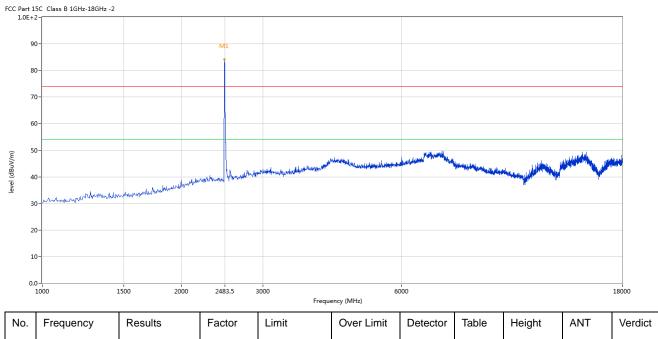

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	2480	84.13	-3.57	114.0	-29.87	Peak	1.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2409120-02E Page 21 of 34

Date: 2024-09-14




# B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

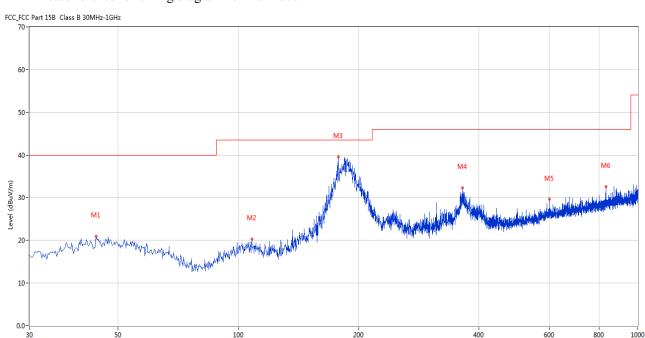

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	44.061	21.01	-11.47	40.0	18.99	Peak	201.00	100	Horizontal	Pass
2	108.065	20.26	-13.42	43.5	23.24	Peak	273.00	100	Horizontal	Pass
3	177.888	39.57	-15.56	43.5	3.93	Peak	275.00	100	Horizontal	Pass
4	364.324	32.28	-9.53	46.0	13.72	Peak	360.00	100	Horizontal	Pass
5	599.975	29.60	-4.95	46.0	16.40	Peak	257.00	100	Horizontal	Pass
6	833.444	32.61	-2.82	46.0	13.39	Peak	230.00	100	Horizontal	Pass

Frequency (MHz)

Report No.: TW2409120-02E Page 22 of 34

Date: 2024-09-14




## Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

**Results:** Pass

Please refer to following diagram for individual

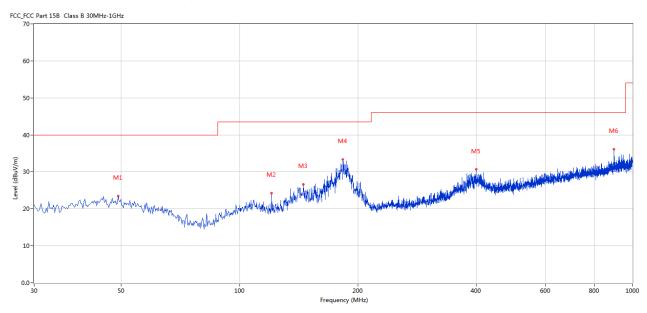

No.	Frequency	Results	Factor	Limit	Margin	Detector	Table	Height	Antenna	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(Degree)	(cm)		
1	49.153	23.52	-11.24	40.0	16.48	Peak	253.00	100	Vertical	Pass
2	120.672	24.24	-15.49	43.5	19.26	Peak	113.00	100	Vertical	Pass
3	145.401	26.56	-17.29	43.5	16.94	Peak	228.00	100	Vertical	Pass
4	182.979	33.32	-14.94	43.5	10.18	Peak	228.00	100	Vertical	Pass
5	400.205	30.65	-8.58	46.0	15.35	Peak	350.00	100	Vertical	Pass
6	897.206	36.09	-1.76	46.0	9.91	Peak	317.00	100	Vertical	Pass

Date: 2024-09-14




#### 7. Band Edge

#### 7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

## 7. 2 Radiated Test Setup

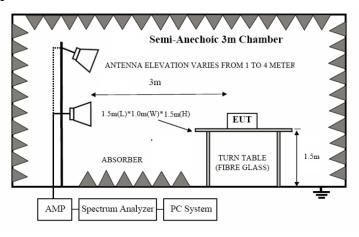

For the actual test configuration, please refer to the related items – Photos of Testing

## 7.3 Configuration of the EUT

Same as section 5.3 of this report

#### 7.4 EUT Operating Condition

Same as section 5.4 of this report.

## 7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2409120-02E Page 24 of 34

Date: 2024-09-14



#### 7.6 Test Result

Product:	REDRAGON 104 KEY 3-MODES HOT-SWAPPABLE MECHANICAL KEYBOARD	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

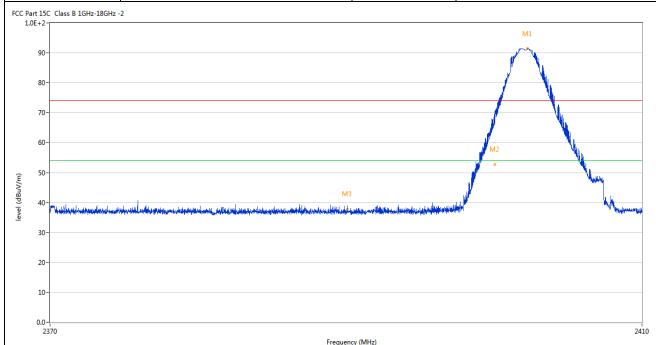

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.212	91.45	-3.57	74.0	17.45	Peak	109.00	100	Horizontal	N/A
2	2400.000	69.89	-3.57	74.0	-4.11	Peak	135.00	100	Horizontal	Pass
2**	2400.000	52.80	-3.57	54.0	-1.20	AV	135.00	100	Horizontal	Pass
3	2390.000	37.92	-3.53	74.0	-36.08	Peak	247.50	100	Horizontal	Pass

Report No.: TW2409120-02E Page 25 of 34



I	Product:	HOT-SWAF		EY 3-MODES IECHANICA RD		ector		Vert	ical	
	Mode		ping Trans		Test V	Voltage		DC3	8.7V	
Te	mperature		24 deg. (			nidity		56%		
	est Result:		Pass	-,						
C Part 1	.5C Class B 1GHz-18GHz -	2								
80 70 60	0-									
30 20 10	0-0-0-0-0-2370	غالىغىدىنىنىدۇرىيىنىدىنىدىنىدىنىدىنىدىنىدىنىدىنىدىنىدىن		Freq	M3  Applicated of the state of	ng saga Ang airing ang atawa atawa ang an	M2			2410
30 20 10	Frequency	Results	Factor	Freq	quency (MHz)	Detector	Table	Height	ANT	
44 31 21 10 0.4 No.	o- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0-	Results (dBuV/m)	Factor (dB)	Freq Limit (dBuV/m)	over Limit (dB)		Table (o)	(cm)	ANT	2410 Verdid
30 20 10	Frequency (MHz) 2401.742	Results	Factor	Freq	quency (MHz)	Detector  Peak Peak	Table	_		verdid
34 21 10 0.4 No.	o- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0- 0-	Results (dBuV/m) 84.77	Factor (dB) -3.57	Limit (dBuV/m) 74.0	over Limit (dB) 10.77	Peak	Table (o) 223.00	(cm)	ANT Vertical	2410 Verdid

Report No.: TW2409120-02E Page 26 of 34



		REDRAG	GON 104	KEY 3-MOD	DES					
]	Product:	HOT-SWA	APPABLE	MECHANIC	CAL	Polarity		Но	orizontal	
			KEYBO	OARD						
	Mode	Ke	eping Tra	nsmitting	Т	est Voltag	e	Г	C3.7V	
Te	mperature		24 deg	g. C,		Humidity		5	6% RH	
Τє	est Result:		Pas	S						
C Part 1	15C Class B 1GHz-18GHz -	2			•					
1.02+	-2			M1						
9	90-		. Water							
8	30-			<b>N</b>						
7	70-			1						
				No.						
6	50-		·	VI.						
		<b>y</b>		<b>*</b>						
. 5	60-									
5		and the state of t		M2	A Marian	poor for the table of the table of the	and the state of	as direct deal, have a distribution	nda della classica (l. e.a. e.a. une esta	nas aldisosad.
4	10-timebil brandonolythal jobsolythaland	nativisti kalika ka		M2	Andrew Constitution of the	and the state of t	main are so the profit of the last of the	n die die der der der der der der der der der de	يعنى مطاولة والمتاورة	indu, di Magadadi.
4	60-	nana di kalanda kaland		M2	A Maria Maria Maria	and the state of t	www.wespects.ptddq.ptd.page.bed.	ر المارية و المارية	يعت منظمة المنطقة المن	ents, as blood, and,
4	10-timebil brandonolythal jobsolythaland	market kind a state of the stat		M2	A Company of the Comp	agandalah in terlebah dalah sadan	<u>અન્યત્વન કલ્ફન્સ</u> સ્થિતિ હો. સુક્રેસનો	nakindi dali yishi dal	ania abida aliastria (j. ania ania ania ajira (i	rosta, di debuga dadi.
3	10-	name, i in the contract of the		M2	Andrew Control of the same	nyaddahishirida ildirindan	na serang melakan sebada	and retained before the last	anis alikifusikationis (), mai suutu alivusytele	anta, a Mary and
3 2	10 - Hamilton Standard and High March Marc	manusia di kalanda di		M2	And the second second	egoddd ei faeth y fleddyr og ong	ستود دور بالا مثال أن يوغوا	and the state of t	يعضي منطقة منطقة والرحية والمنطقة والمن	on to a delay mil.
. 4 3 2	10-10-10-10-10-10-10-10-10-10-10-10-10-1	managaran da		2483.5	Frequency (MHz)	ngaddining villa billiondan	na yera ya makada ya And	- Analysis Lands deposit debit substitution	ania, didefediate (b. 1) ania, anap ani any televisia (b. 1).	2500
4 3 2 1	10 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	Results	Factor	2483.5	Frequency (MHz)	Detector	Table	Height	ANT	ı
4 3 2 1	10 10 10 10 10 10 10 10 10 10 10 10 10 1	Results (dBuV/m)	Factor (dB)	2483.5		The state of the s	Table (o)			ı
3 3 2 1 0.	50			2483.5	Over	The state of the s		Height		ı
3 2 1	Frequency (MHz)	(dBuV/m)	(dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	(0)	Height (cm)	ANT	Verdi

Page 27 of 34

Report No.: TW2409120-02E



Product:		REDRAGON 104 KEY 3-MODES HOT-SWAPPABLE MECHANICAL KEYBOARD			Detector		Vertical			
	Mode	Keeping Transmitting			Tes	Test Voltage	DC3.7V			
Temperature		24 deg. C,			Hı	Humidity	56% RH			
Test Result:		Pass								
1.0E+ 9 8 7 6 5 5 3 2	15C Class B 1GHz-18GHz	M	M1	Man	المنافعة الم	m had with a south of the state	المعادلة الم	destination to the destination of	ndrhous vitagin editibil dibad	- on the same of t
	0- <del> </del> 2470			2483.5 Frequ	ency (MHz)					2500
No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
		83.33	-3.57	74.0	9.33	Peak	291.00	100	Vertical	N/A
1	2480.280					Ì				

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

Date: 2024-09-14



Page 28 of 34

## 8.0 Antenna Requirement

#### **Applicable Standard**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna with gain 2.34dBi maximum. It fulfills the requirement of this section.

Test Result: Pass

Page 29 of 34

Report No.: TW2409120-02E



	REDRAGON 104 KEY 3	3-MODES			
Product:	HOT-SWAPPABLE MEC		Test Mode:	Keep transmitting	
	KEYBOARD			Treep transmitting	
Mode	Keeping Transmit	ting	Test Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:	Pass		Detector	PK	
20dB Bandwidth	1.361MHz				
Ref 10 dBm	n *Att 20 dB	*RBW 30 kHz *VBW 100 kHz SWT 15 ms		[T1 ] 0.23 dB 60576923 MHz	
10		3	Marker 1	[T1 ] -19.31 dBm 01269231 GHz A	
1 PK MAXH			Marker 2		
20 D1	-19.03 dy				
-40					
50				3DB	
60					
-70					
-80					
	02 GHz 300	kHz/		Span 3 MHz	


Page 30 of 34

Report No.: TW2409120-02E

Date: 2024-09-14



Product:	REDRAGON 104 KEY 3-MODES HOT-SWAPPABLE MECHANICAL	Test Mode:	Keep transmitting
	KEYBOARD		
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK
20dB Bandwidth	1.269MHz		

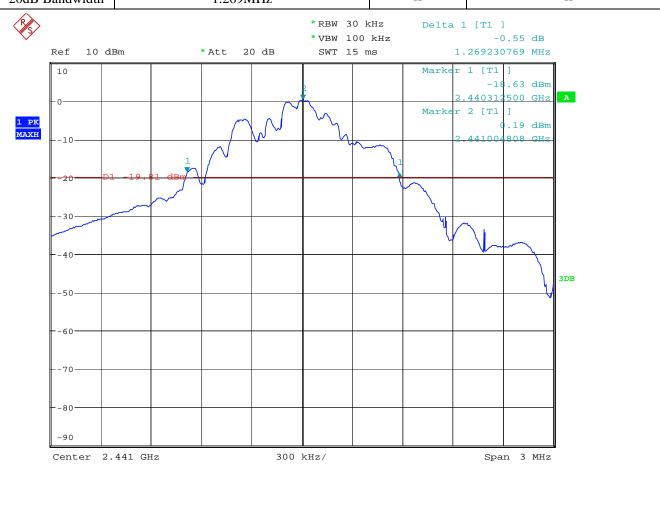

Date: 14.SEP.2024 10:03:04


Page 31 of 34

Report No.: TW2409120-02E

Date: 2024-09-14



	REDRAGON 104 KEY 3-MODES			
Product:	HOT-SWAPPABLE MECHANICAL	Test Mode:	Keep transmitting	
	KEYBOARD			
Mode	Keeping Transmitting	Test Voltage	DC3.7V	
Temperature	24 deg. C,	Humidity	56% RH	
Test Result:	Pass	Detector	PK	
20dB Bandwidth	1.178MHz		1	

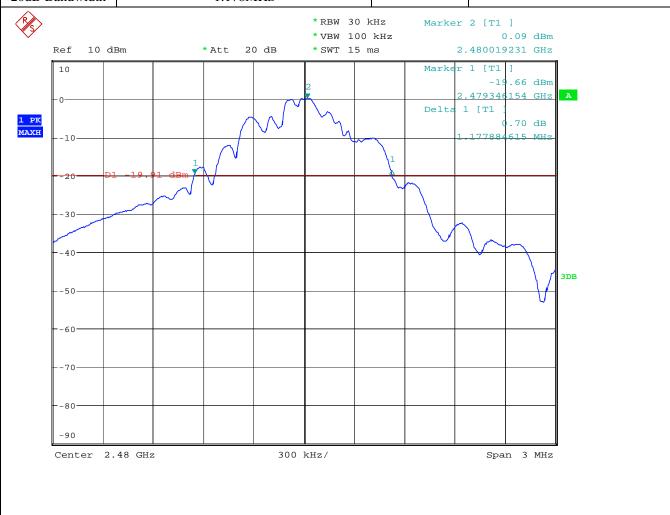

Date: 14.SEP.2024 09:27:46

Report No.: TW2409120-02E Page 32 of 34

Date: 2024-09-14




#### 10.0 FCC ID Label

#### FCC ID: TUVET-7059A

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

## **Mark Location:**

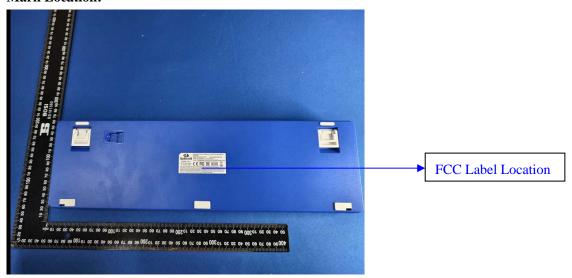

Report No.: TW2409120-02E Page 33 of 34

Date: 2024-09-14



#### 11.0 Photo of testing


#### 11.1 Conducted test View--



Date: 2024-09-14



## Radiated emission test view

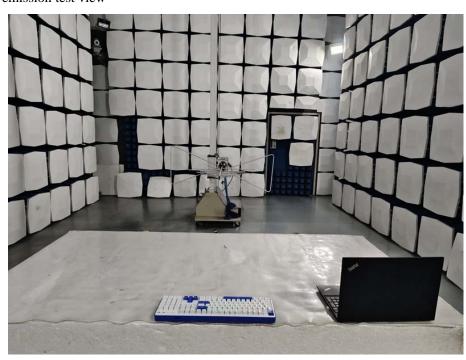



Photographs - EUT

Please refer test report TW2409120-01E

## -- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.