

RF MEASUREMENT REPORT

FCC ID: TV7CPG52X
Applicant: Mikrotiks SIA
Product: cAP ax
Model No.: cAPGi-5HaxD2HaxD-US
Brand Name: MikroTik
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Test Date: 2022-09-26 ~ 2022-10-17

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2209RSU050-U1	Rev. 01	Initial Report	2022-11-26	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details.....	7
2. Test Configuration	8
2.1. Test Mode.....	8
2.2. Test System Connection Diagram.....	8
2.3. Test Software	9
2.4. Applied Standards.....	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result.....	13
6.1. Summary.....	13
6.2. 6dB Bandwidth Measurement.....	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16

6.4.2.	Test Procedure	16
6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	17
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	18
6.5.1.	Test Limit	18
6.5.2.	Test Procedure	18
6.5.3.	Test Setting	18
6.5.4.	Test Setup	19
6.5.5.	Test Result	19
6.6.	Radiated Spurious Emission Measurement.....	20
6.6.1.	Test Limit	20
6.6.2.	Test Procedure	20
6.6.3.	Test Setting	20
6.6.4.	Test Setup	22
6.6.5.	Test Result	23
6.7.	Radiated Restricted Band Edge Measurement	24
6.7.1.	Test Limit	24
6.7.2.	Test Procedure	25
6.7.3.	Test Setting	25
6.7.4.	Test Setup	26
6.7.5.	Test Result	26
6.8.	AC Conducted Emissions Measurement	27
6.8.1.	Test Limit	27
6.8.2.	Test Setup	27
6.8.3.	Test Result	27
Appendix A – Test Result		28
A.1	Duty Cycle Test Result	28
A.2	6dB Bandwidth Test Result	30
A.3	Output Power Test Result	39
A.4	Power Spectral Density Test Result.....	43
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	60
A.6	Radiated Spurious Emission Test Result.....	93
A.7	Radiated Restricted Band Edge Test Result.....	103
A.8	AC Conducted Emissions Test Result	211
Appendix B – Test Setup Photograph		213
Appendix C – EUT Photograph		214

1.4. Product Information

Product Name	cAP ax
Model No.	cAPGi-5HaxD2HaxD-US
EUT Identification No.	20220920Sample#03
Wi-Fi Specification	802.11a/b/g/n/ac/ax, VHT
Hardware Version	r2
Software Version	RouterOS v7
Antenna Information	Refer to Section 1.7
Operating Temp.	0 ~ 40°C
Operating Environment	Indoor Use
Accessories	
Adapter #1	Model: SAW36-240-1500U Input: 100-240V ~ 50/60Hz, 1.3A Output: 24V, 1.5A
Adapter #2	Model: MT48-480095-11SGU Input: 100-240V ~ 50/60Hz, 1.0A Max Output: 48V, 0.95A
PoE Injector	Gigabit PoE Input Power: 18 - 57VDC
Remark: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	802.11b/g/n-HT20/ax-HE20, VHT20: 2412 ~ 2462MHz 802.11n-HT40/ax-HE40, VHT40: 2422 ~ 2452MHz
Channel Number	802.11b/g/n-HT20/ax-HE20, VHT20: 11 802.11n-HT40/ax-HE40, VHT40: 9
Type of Modulation	802.11b: DSSS 802.11g/n, VHT: OFDM 802.11ax: OFDMA
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps VHT: up to 400Mbps 802.11ax: up to 573.6Mbps

1.6. Working Frequencies

802.11b/g/n-HT20/ax-HE20, VHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40/ax-HE40, VHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)	CDD Directional Gain (dBi)	
			For Power	For PSD
Wi-Fi Antenna (2*2 MIMO)				
Internal; Semi directional Antenna	2.400 ~ 2483.5	5.90	5.90	8.91
	5150 ~ 5250	5.45	5.45	8.46
	5250 ~ 5350	5.35	5.35	8.36
	5470 ~ 5725	6.20	6.20	9.21
	5725 ~ 5850	6.00	6.00	9.01

Note: The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.

For CDD transmissions, directional gain is calculated as follows, $N_{ANT} = 2$, $N_{SS} = 1$.

If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
 Array Gain = $10 \log (N_{ANT} / N_{SS}) \text{ dB} = 3.01$;
- For power measurements on IEEE 802.11 devices,
 Array Gain = 0 dB for $N_{ANT} \leq 4$;


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11b (1Mbps) _CDD Mode_Nss=1
Mode 2: Transmit by 802.11g (6Mbps) _CDD Mode_Nss=1
Mode 3: Transmit by 802.11n-HT20 (MCS3) _CDD Mode_Nss=1
Mode 4: Transmit by 802.11n-HT40 (MCS0) _CDD Mode_Nss=1
Mode 5: Transmit by VHT20 (MCS4) _CDD Mode_Nss=1
Mode 6: Transmit by VHT40 (MCS0) _CDD Mode_Nss=1
Mode 7: Transmit by 802.11ax-HE20 (MCS3) _CDD Mode_Nss=1
Mode 8: Transmit by 802.11ax-HE40 (MCS0) _CDD Mode_Nss=1

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

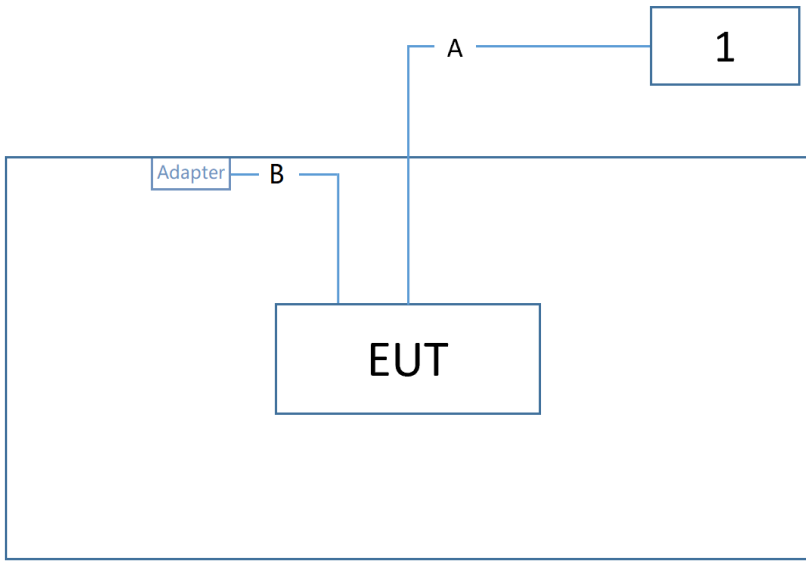Connection Diagram – Radiated Emission testing & AC Conducted Emissions			
			
Cable Type		Cable Description	
A	LAN Cable	Non shielded, > 10m	
B	Power Cable	Non shielded, 1.5m	
Product		Manufacturer	Model No.
1	Notebook	Lenovo	E431

2.3. Test Software

The test utility software used during testing was “WinBox”, and the version was 3.37. The test commands used during the test were provided by manufacturer. Refer to the operating description for power settings in each mode.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- KDB 662911 D01v02r01
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2022-12-29	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2023-08-22	WZ-AC1
Preamplifier	Agilent	83017A	MRTSUE06076	1 year	2022-11-12	WZ-AC1
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2023-06-21	WZ-AC1
Anechoic Chamber	TDK	WZ-AC1	MRTSUE06212	1 year	2023-04-21	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE06403	1 year	2023-06-06	WZ-AC1
Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2022-12-29	WZ-AC1
Thermohygrometer	testo	608-H1	MRTSUE11039	1 year	2022-11-11	WZ-AC1
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2022-10-28	WZ-AC1
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06597	1 year	2022-12-01	WZ-AC1
Preamplifier	EMCI	EMC184045SE	MRTSUE06640	1 year	2023-01-13	WZ-AC1
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2023-06-04	WZ-SR2
Shielding Room	MIX-BEP	WZ-SR2	MRTSUE06215	5 years	2026-12-20	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06404	1 year	2023-06-06	WZ-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06909	1 year	2022-11-01	WZ-SR2
Thermohygrometer	testo	608-H1	MRTSUE06402	1 year	2023-06-06	WZ-SR5
Shielding Room	HUAMING	WZ-SR5	MRTSUE06442	N/A	N/A	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06457	1 year	2023-06-04	WZ-SR5
USB Power Sensor	Keysight	U2021XA	MRTSUE06446	1 year	2023-06-04	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11092	1 year	2023-06-09	WZ-SR5

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802	2.03C	RE Antenna & Turntable
BenchVue Power Meter	2018.1	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2. (Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Remark:

- The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- For radiated emission tests, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- The EUT supports one configuration only in 802.11ax full RU mode.
- For test Item "6dB Bandwidth", we only evaluated the Ant 1 RF port.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. VBW $\geq 3 \times$ RBW
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

6.2.4. Test Setup

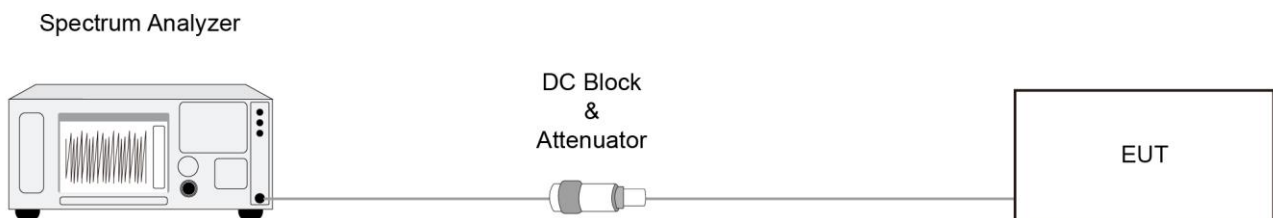

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup



6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.5

6.4.3. Test Setting

1. Measure the duty cycle (x) of the transmitter output signal.
2. Set instrument center frequency to DTS channel center frequency.
3. Set span to at least 1.5 times the OBW.
4. RBW = 10 kHz.
5. VBW = 30 kHz.
6. Detector = RMS.
7. Ensure that the number of measurement points in the sweep $\geq 2 \times \text{span}/\text{RBW}$.
8. Sweep time = auto couple.
9. Don't use sweep triggering. Allow sweep to "free run".
10. Employ trace averaging (RMS) mode over a minimum of 100 traces.
11. Use the peak marker function to determine the maximum amplitude level.
12. Add $10 \log (1/x)$, where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time. If measured value exceeds requirement specified by regulatory agency, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).

6.4.4. Test Setup

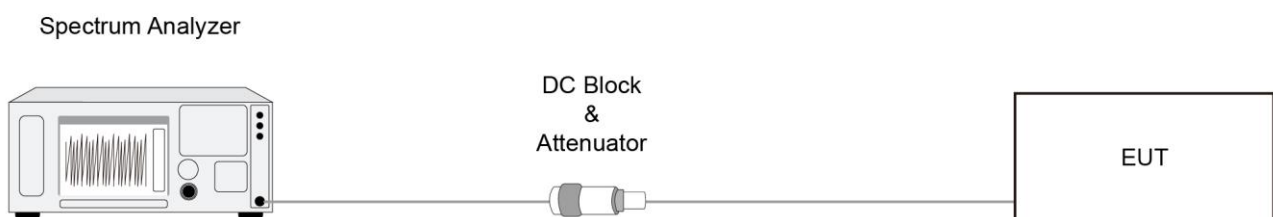

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting

Reference level measurement


1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

Spectrum Analyzer



DC Block
&
Attenuator



6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

6.6.4. Test Setup

Below 1GHz Test Setup:

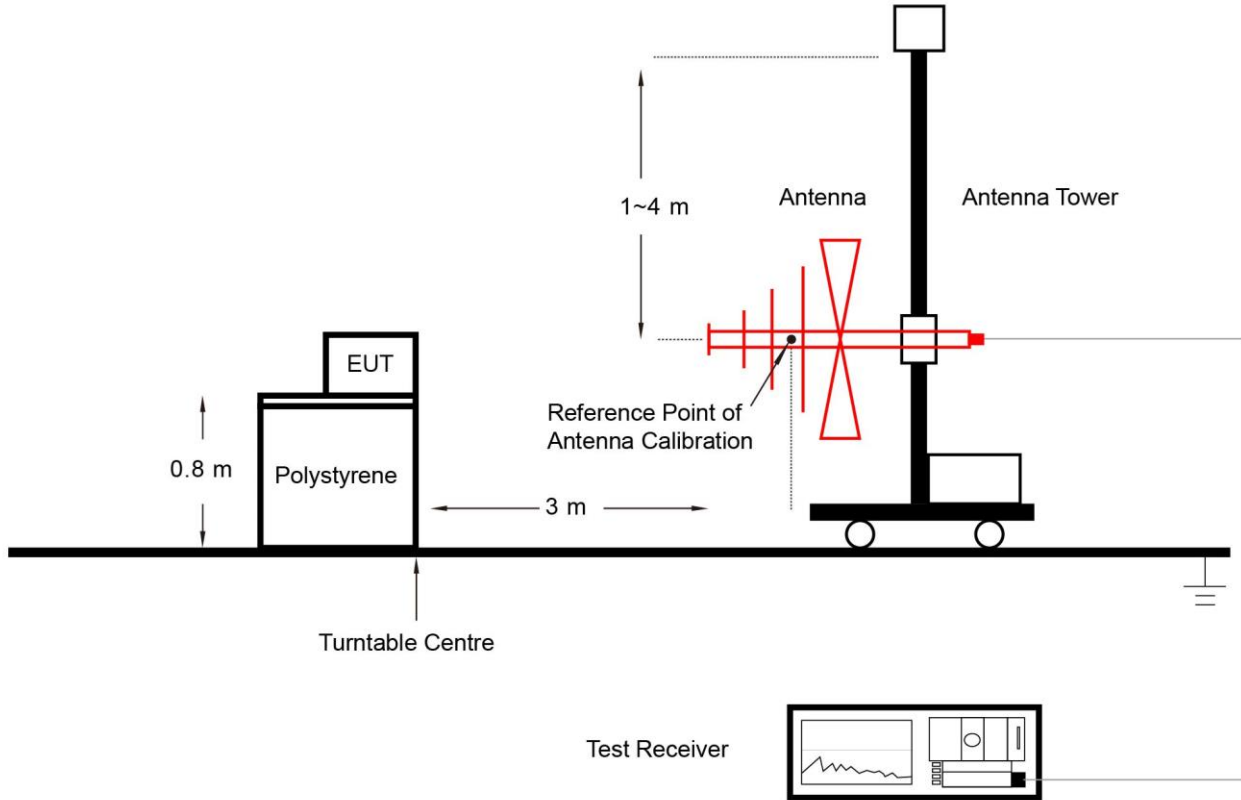

Above 1GHz Test Setup:

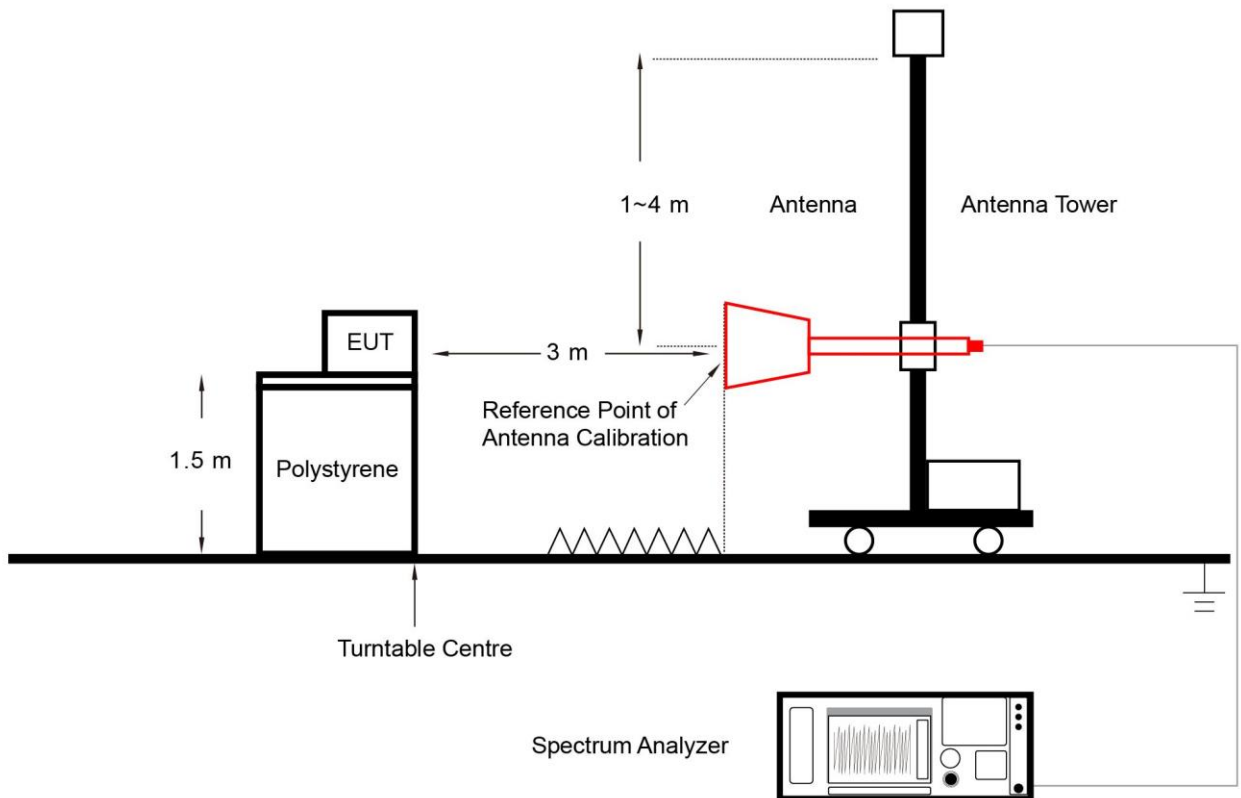

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting


Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW $\geq 1/T$
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

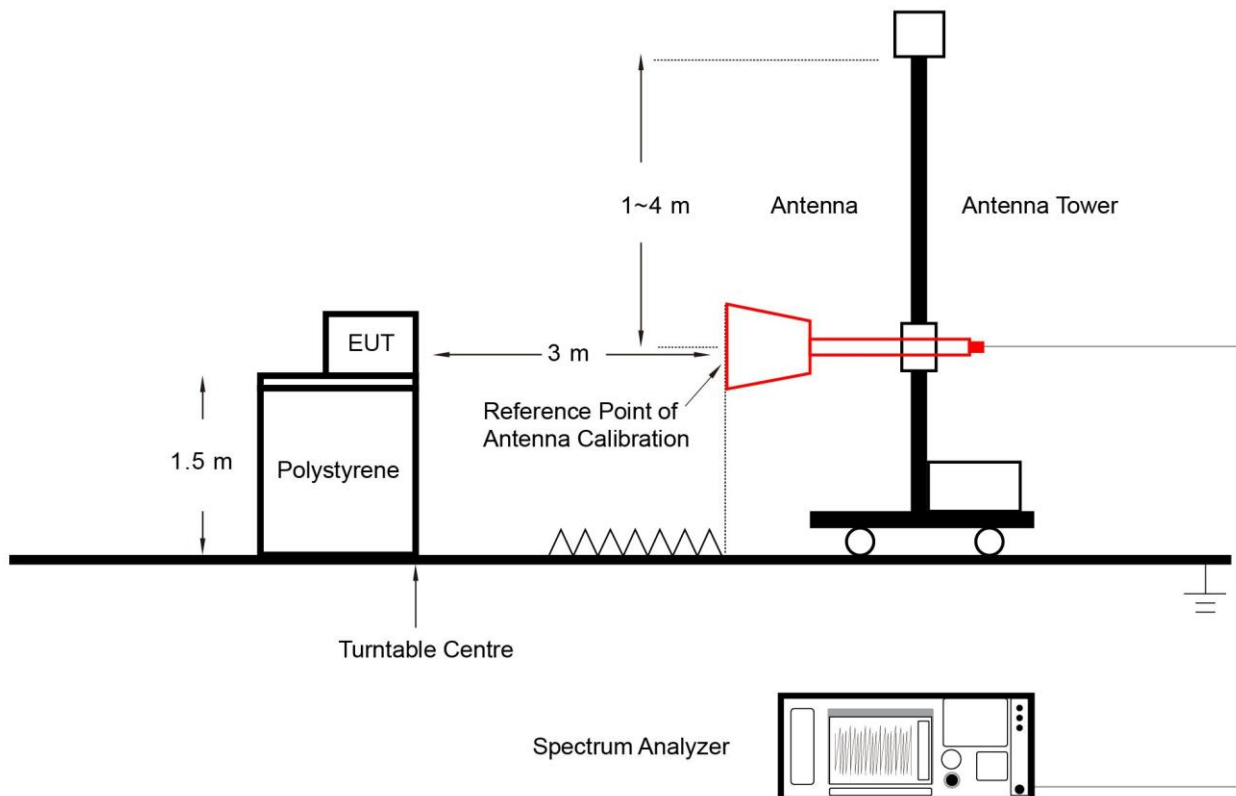

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

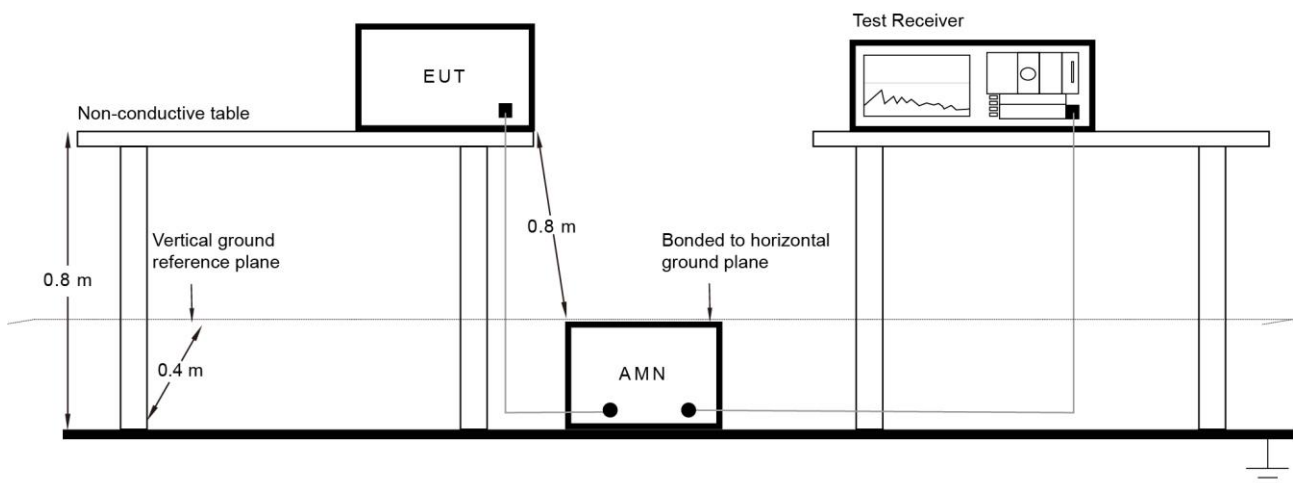

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A – Test Result

A.1 Duty Cycle Test Result


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-09-28		

Test Mode	Duty Cycle	Test Mode	Duty Cycle
802.11b	61.92%	VHT20	86.90%
802.11g	92.07%	VHT40	86.28%
802.11n-HT20	86.65%	802.11ax-HE20	94.77%
802.11n-HT40	86.15%	802.11ax-HE40	94.62%

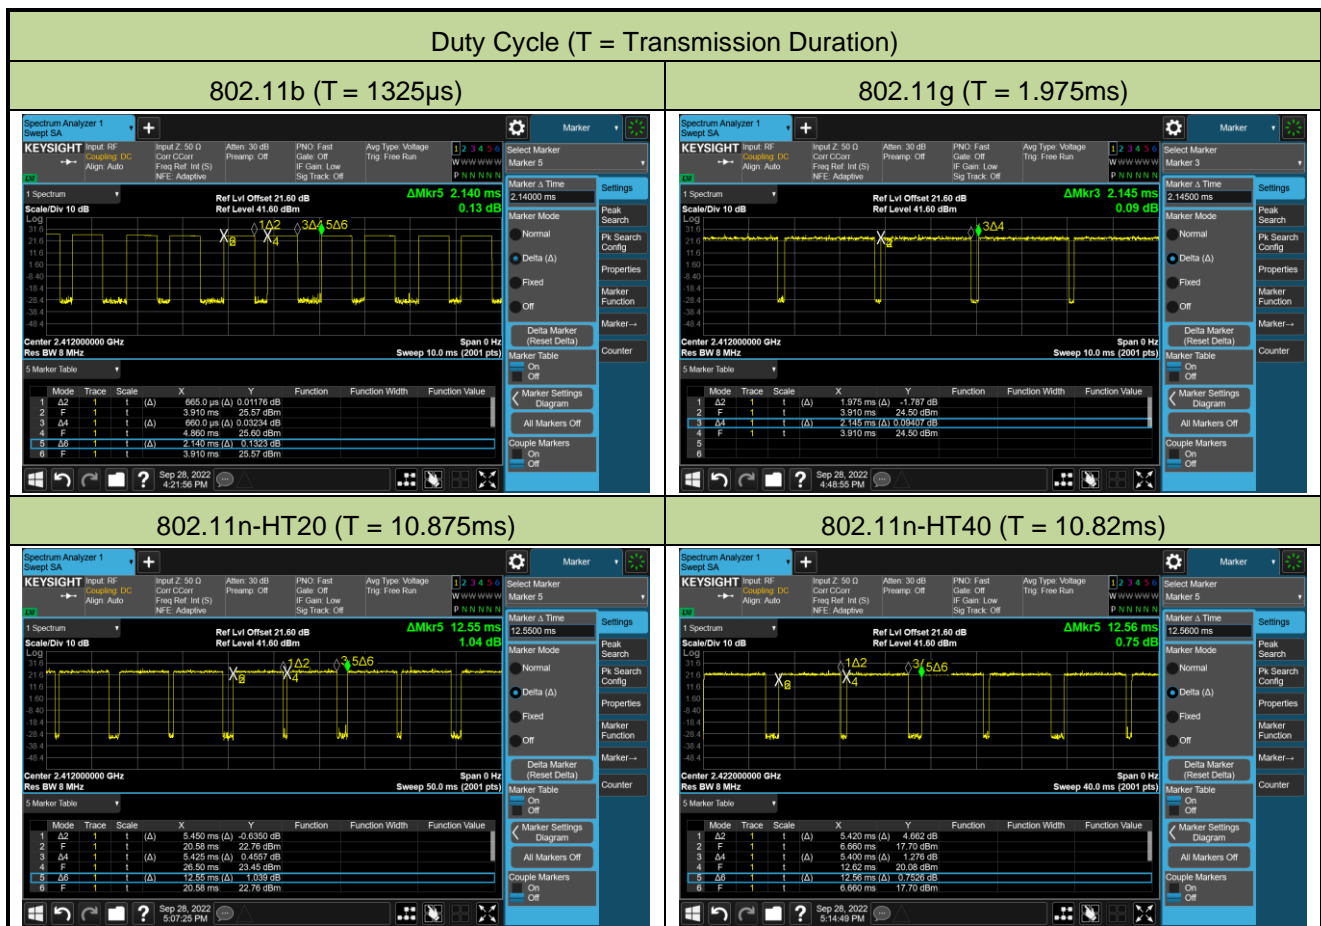


Duty Cycle (T = Transmission Duration)


VHT20 (T = 10.88ms)

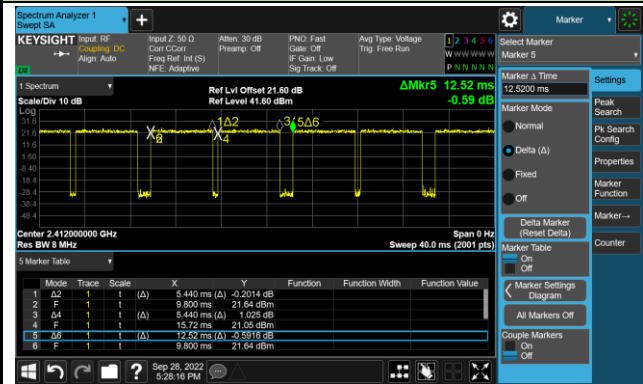


VHT40 (T = 10.82ms)

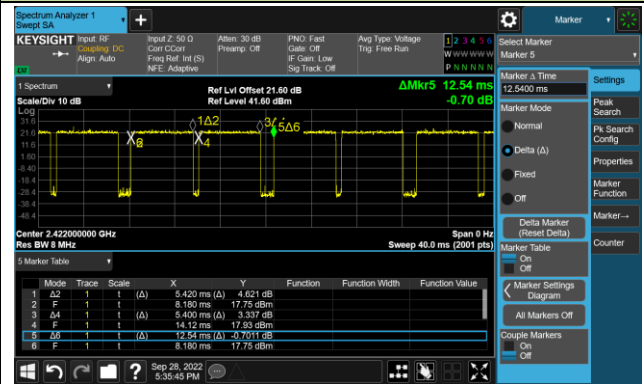

802.11ax-HE20 (T = 5.440ms)

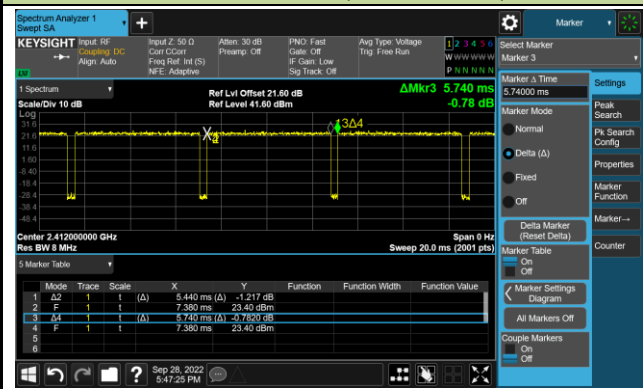

802.11ax-HE40 (T = 5.450ms)

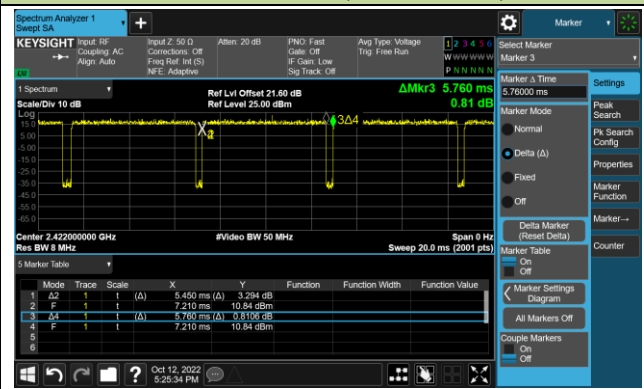


A.2 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-09-30		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1Mbps	01	2412	8.054	≥ 0.5
11b	1Mbps	06	2437	8.075	≥ 0.5
11b	1Mbps	11	2462	8.064	≥ 0.5
11g	6Mbps	01	2412	15.46	≥ 0.5
11g	6Mbps	06	2437	15.48	≥ 0.5
11g	6Mbps	11	2462	15.67	≥ 0.5
11n-HT20	MCS3	01	2412	17.67	≥ 0.5
11n-HT20	MCS3	06	2437	17.70	≥ 0.5
11n-HT20	MCS3	11	2462	17.69	≥ 0.5
11n-HT40	MCS0	03	2422	36.08	≥ 0.5
11n-HT40	MCS0	06	2437	35.70	≥ 0.5
11n-HT40	MCS0	09	2452	36.30	≥ 0.5
VHT20	MCS4	01	2412	17.78	≥ 0.5
VHT20	MCS4	06	2437	17.77	≥ 0.5
VHT20	MCS4	11	2462	17.75	≥ 0.5
VHT40	MCS0	03	2422	35.93	≥ 0.5
VHT40	MCS0	06	2437	35.76	≥ 0.5
VHT40	MCS0	09	2452	35.55	≥ 0.5
11ax-HE20	MCS3	01	2412	19.03	≥ 0.5
11ax-HE20	MCS3	06	2437	19.02	≥ 0.5
11ax-HE20	MCS3	11	2462	19.04	≥ 0.5
11ax-HE40	MCS0	03	2422	37.78	≥ 0.5
11ax-HE40	MCS0	06	2437	37.76	≥ 0.5
11ax-HE40	MCS0	09	2452	37.85	≥ 0.5

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

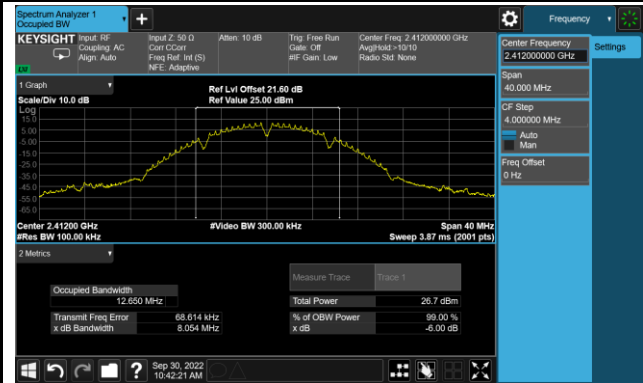

Channel 06 (2437MHz)

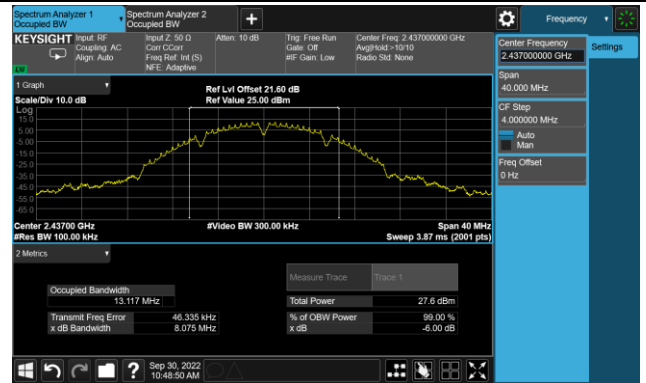


Channel 11 (2462MHz)

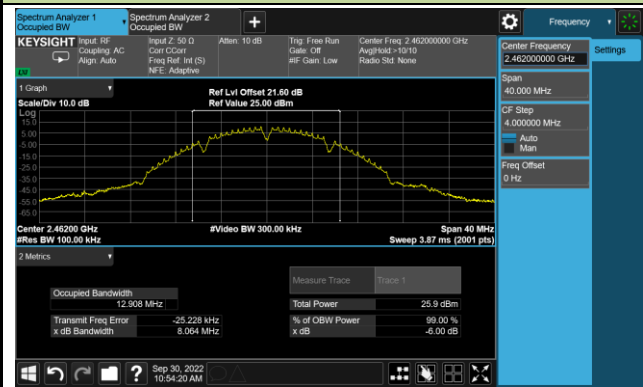


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

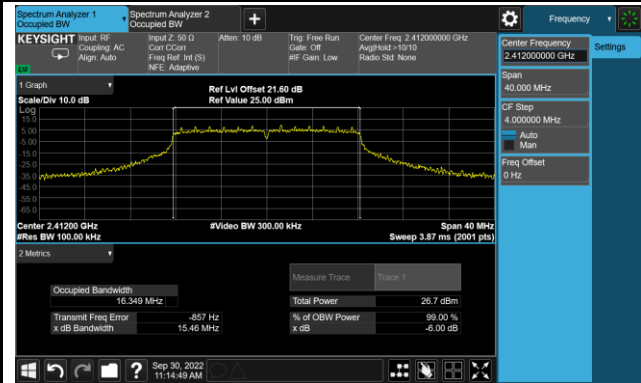



Channel 06 (2437MHz)

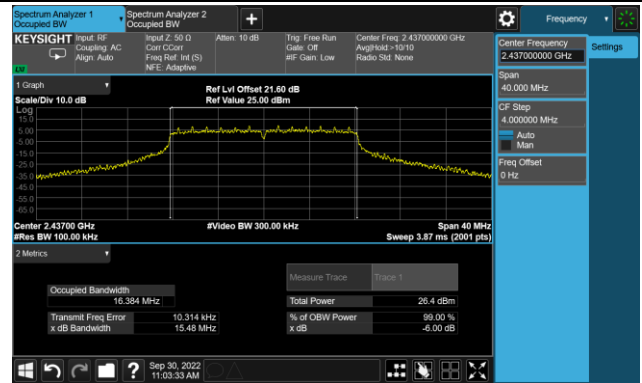



Channel 11 (2462MHz)

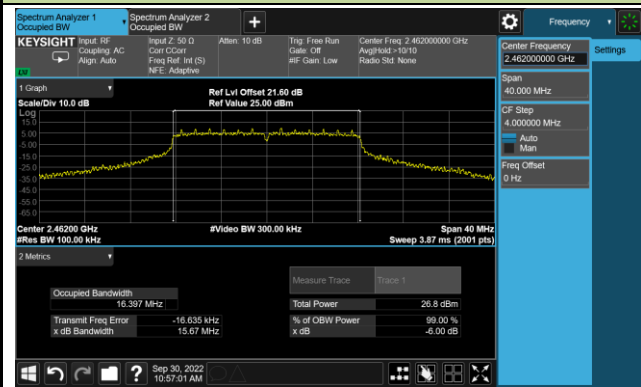

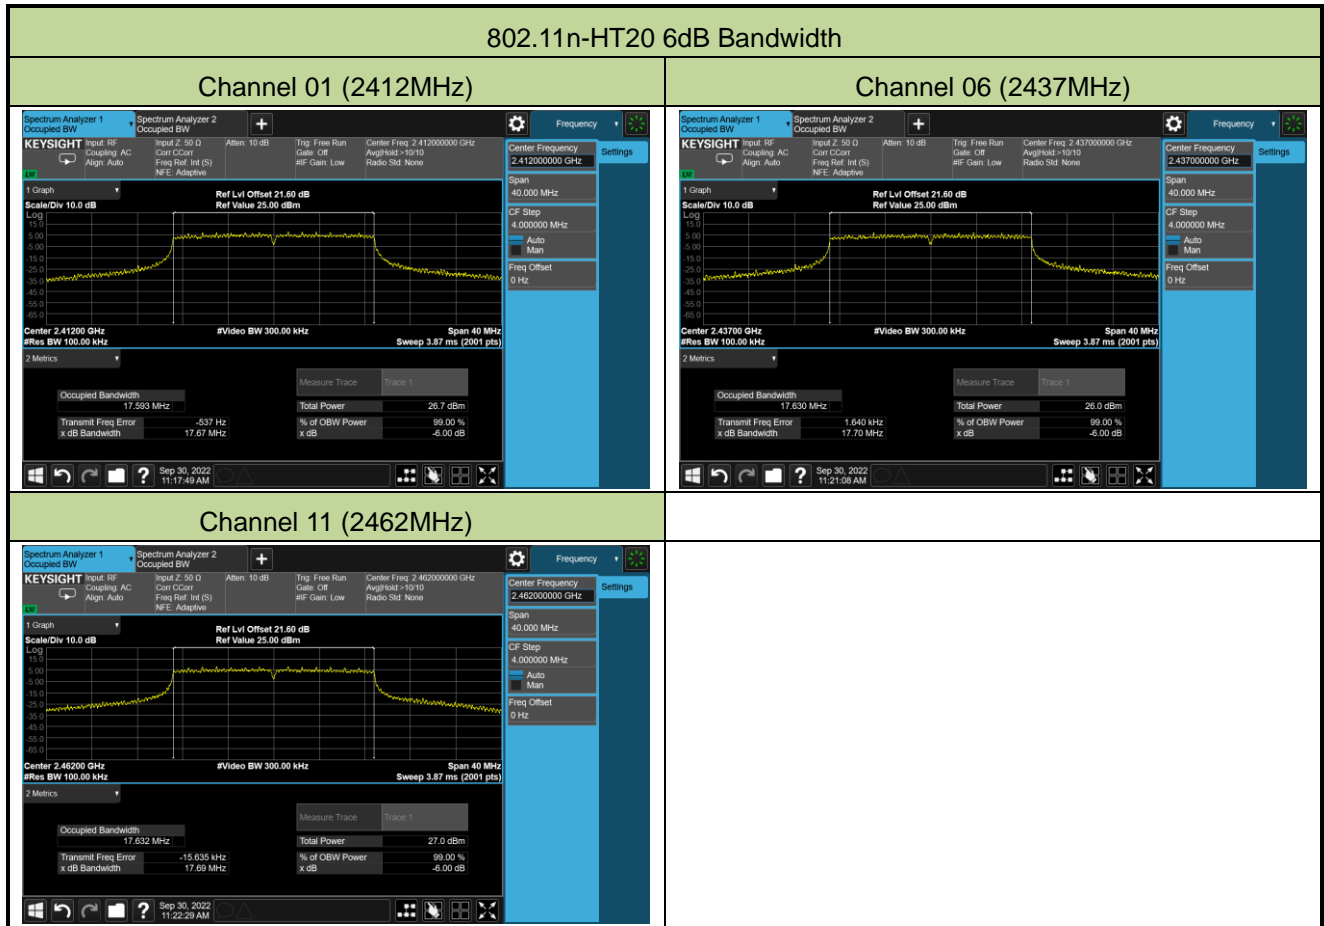

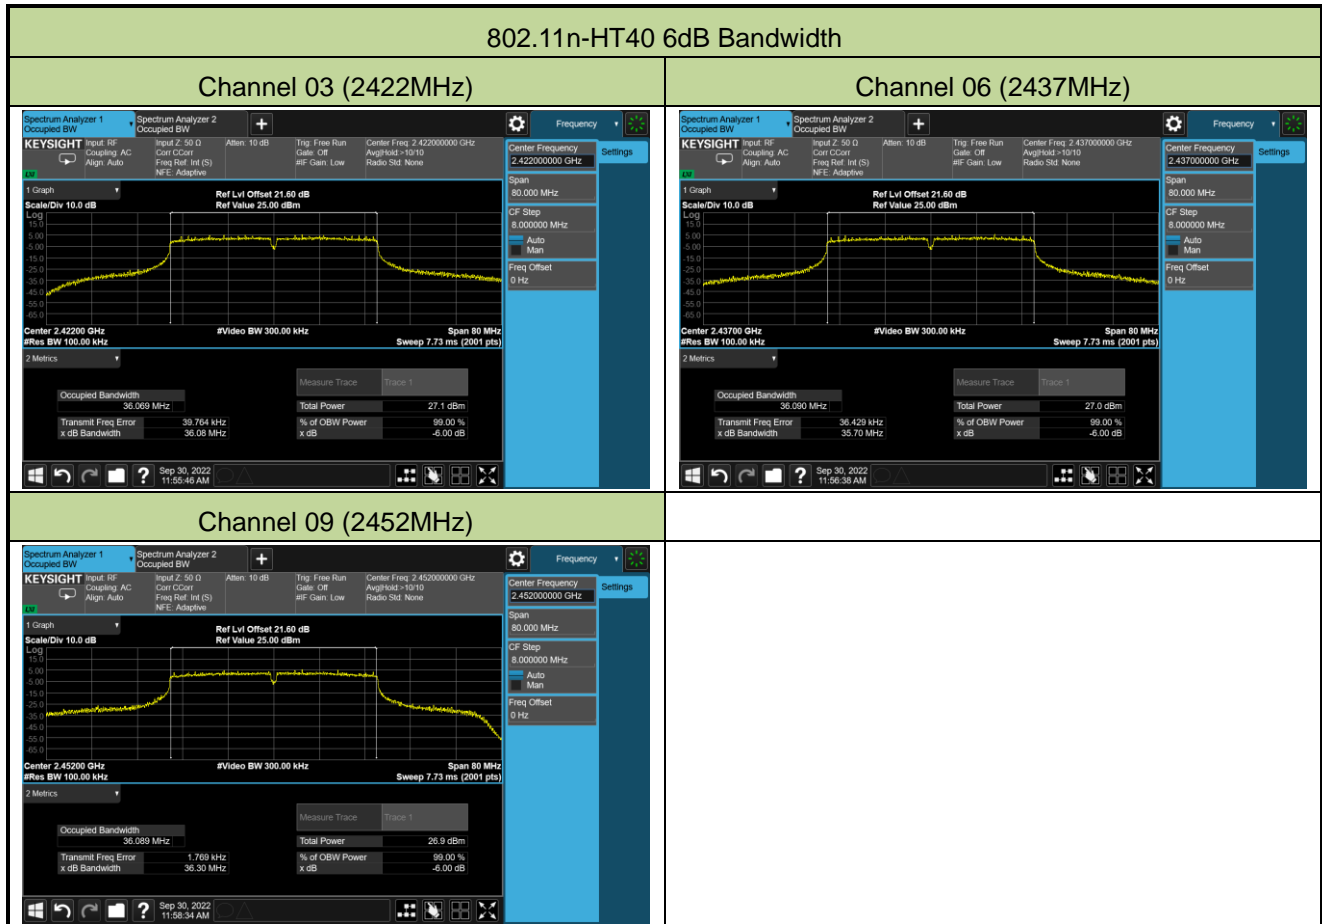


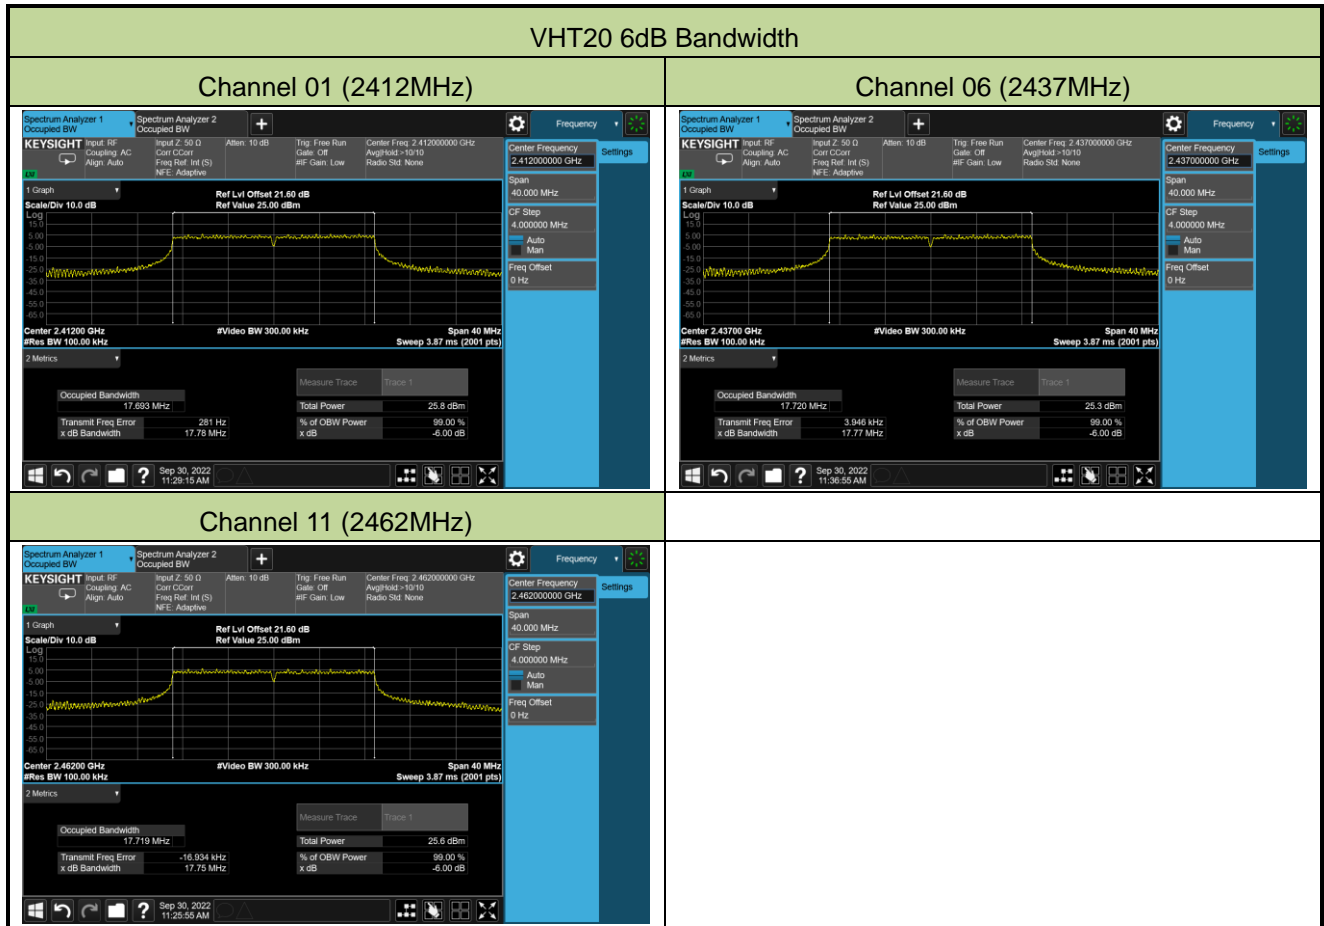

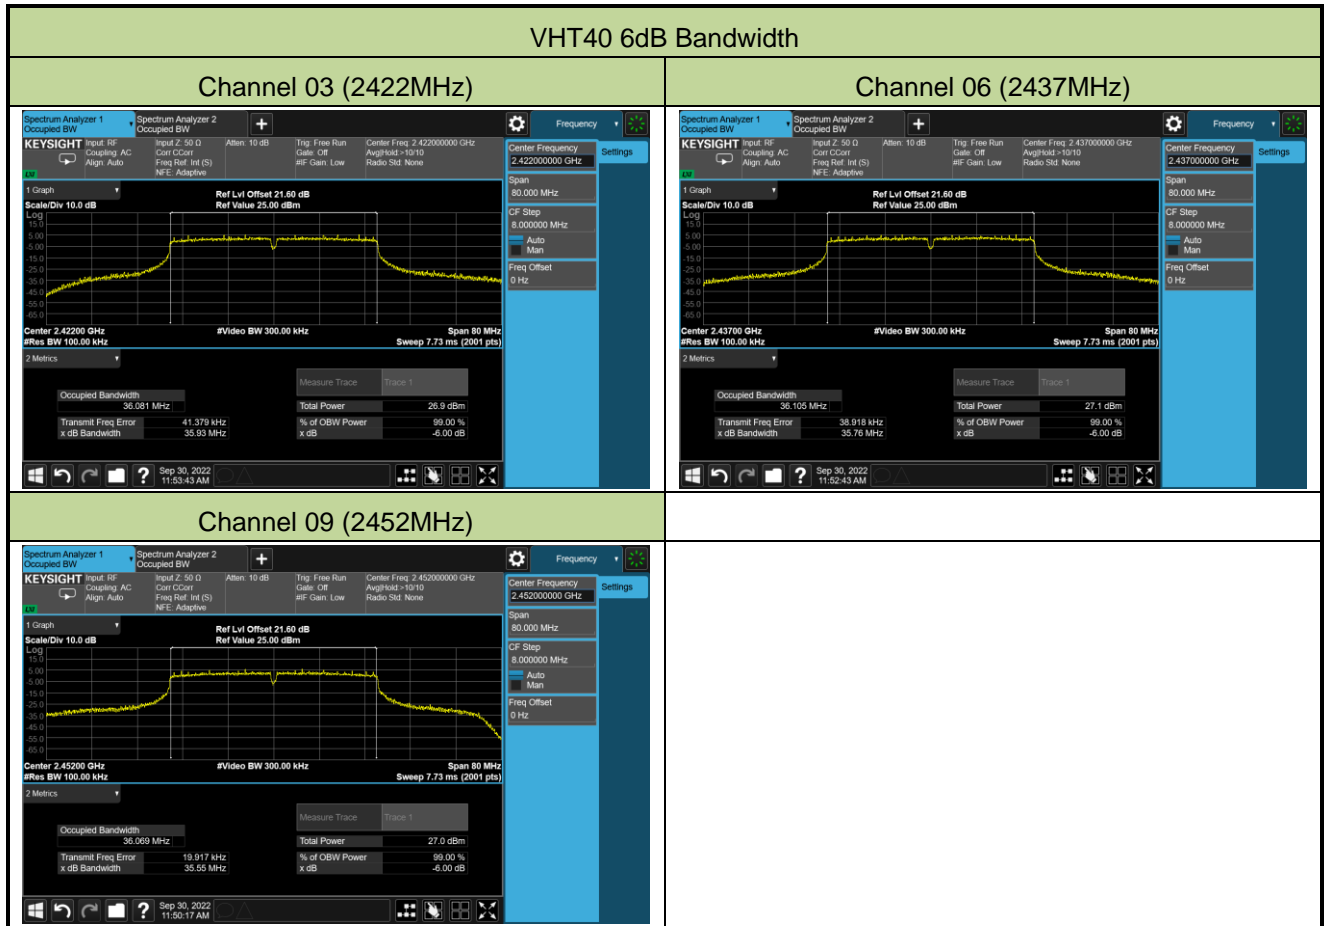


802.11ax-HE20 6dB Bandwidth


Channel 01 (2412MHz)

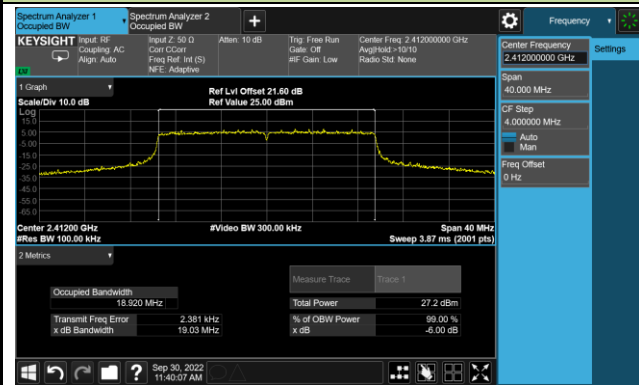


Channel 06 (2437MHz)

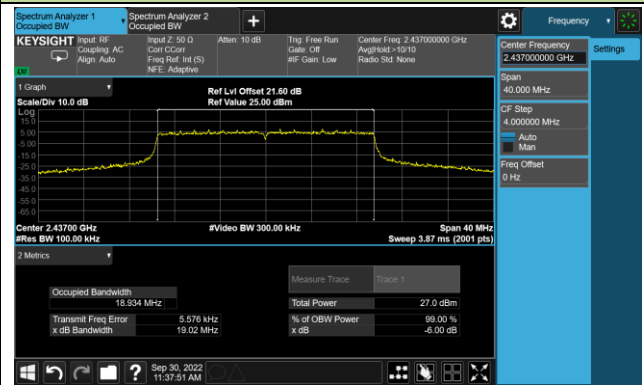

Channel 11 (2462MHz)

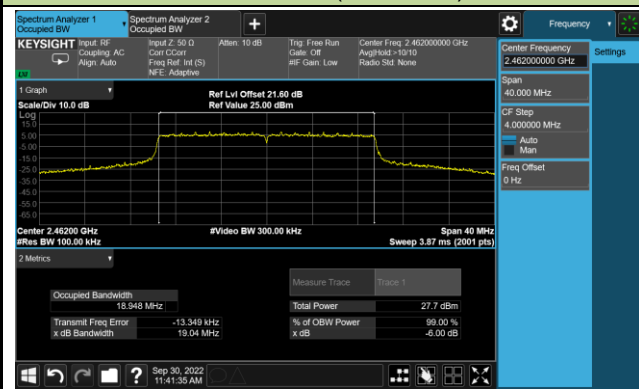

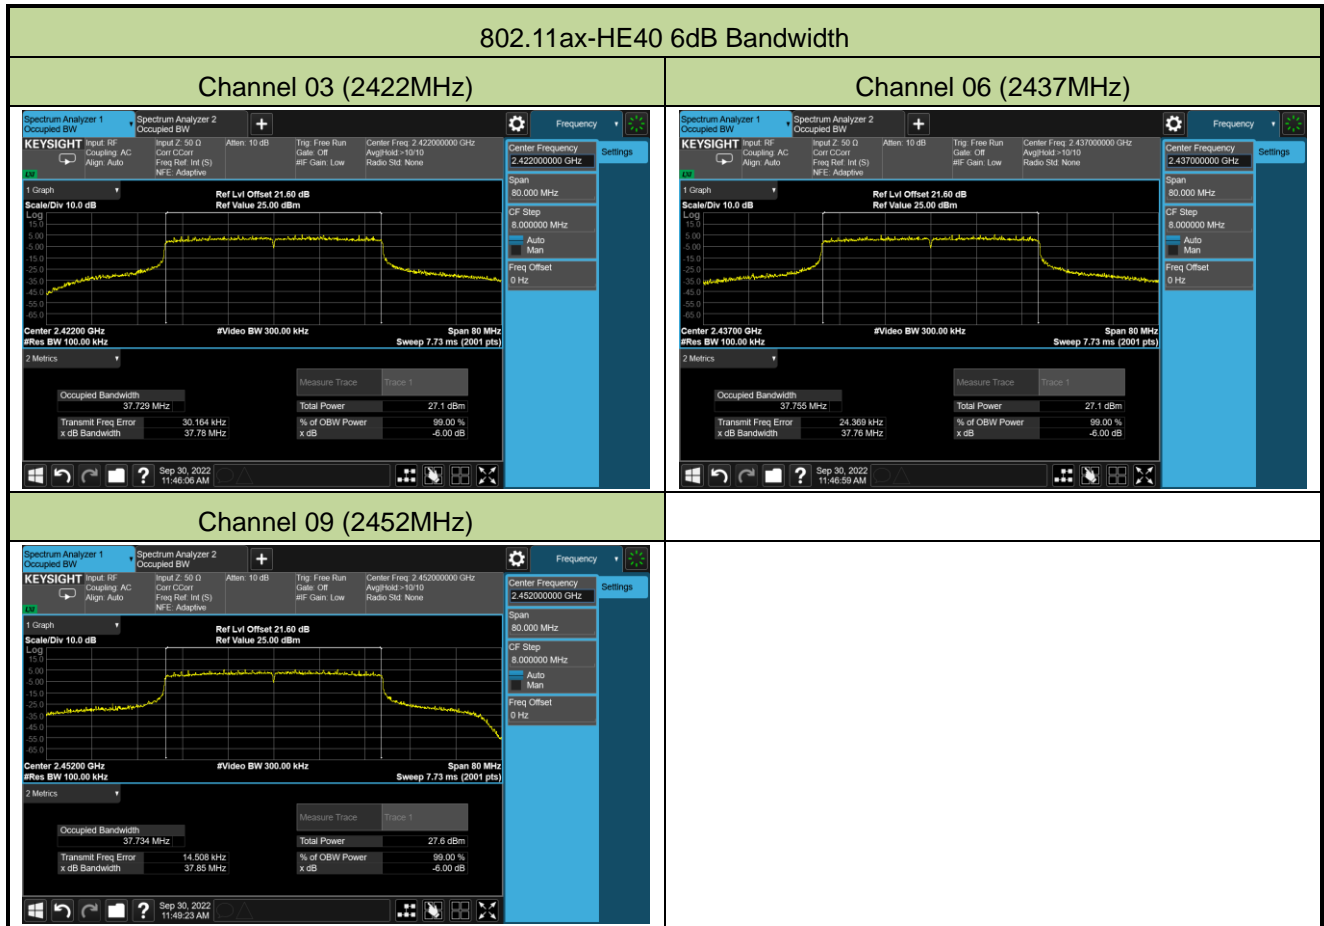

A.3 Output Power Test Result

Power output test was verified over all data rates of each mode shown as below, and then choose the maximum power output (gray marker) for final test of each channel.

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11b	20	1	2412	1Mbps	19.93
				2Mbps	19.88
				5.5Mbps	19.88
				11Mbps	19.91
802.11g	20	1	2412	6Mbps	19.64
				9Mbps	19.60
				12Mbps	19.24
				18Mbps	19.56
				24Mbps	19.11
				36Mbps	18.94
				48Mbps	19.02
				54Mbps	19.44
802.11n	20	1	2412	MCS0	19.56
				MCS1	19.54
				MCS2	19.92
				MCS3	20.00
				MCS4	19.60
				MCS5	19.59
				MCS6	19.57
				MCS7	19.55
802.11n	40	3	2422	MCS0	19.80
				MCS1	19.78
				MCS2	19.59
				MCS3	19.63
				MCS4	19.58
				MCS5	19.59
				MCS6	19.60
				MCS7	19.58

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
VHT	20	1	2412	MCS0	19.58
				MCS1	19.51
				MCS2	19.48
				MCS3	19.62
				MCS4	19.67
				MCS5	19.66
				MCS6	19.58
				MCS7	19.57
				MCS8	19.58
VHT	40	3	2422	MCS0	19.80
				MCS1	19.79
				MCS2	19.62
				MCS3	19.57
				MCS4	19.60
				MCS5	19.58
				MCS6	19.57
				MCS7	19.58
				MCS8	19.56
				MCS9	19.57
802.11ax	20	1	2412	MCS0	19.45
				MCS1	19.39
				MCS2	19.98
				MCS3	20.01
				MCS4	19.56
				MCS5	19.52
				MCS6	19.58
				MCS7	19.56
				MCS8	19.54
				MCS9	19.64
				MCS10	19.56
				MCS11	19.61

Test Mode	Bandwidth (MHz)	Channel No.	Frequency (MHz)	Data Rate / MCS	Average Power (dBm)
802.11ax	40	3	2422	MCS0	19.56
				MCS1	19.53
				MCS2	19.55
				MCS3	19.52
				MCS4	19.55
				MCS5	19.54
				MCS6	19.55
				MCS7	19.55
				MCS8	19.55
				MCS9	19.54
				MCS10	19.55
MCS11	19.55				

Note 1: Above power is only for evaluating the worst data rate.

Note 2: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate (marked in grey).

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-09-30		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Power (dBm)	Limit (dBm)
				Ant 0	Ant 1		
11b	1Mbps	01	2412	21.15	21.04	24.11	≤ 30.00
11b	1Mbps	06	2437	21.80	22.03	24.93	≤ 30.00
11b	1Mbps	11	2462	19.92	20.09	23.02	≤ 30.00
11g	6Mbps	01	2412	18.11	18.15	21.14	≤ 30.00
11g	6Mbps	06	2437	20.55	20.83	23.70	≤ 30.00
11g	6Mbps	11	2462	18.07	18.24	21.17	≤ 30.00
11n-HT20	MCS3	01	2412	17.82	18.09	20.97	≤ 30.00
11n-HT20	MCS3	06	2437	20.64	20.83	23.75	≤ 30.00
11n-HT20	MCS3	11	2462	17.90	18.16	21.04	≤ 30.00
11n-HT40	MCS0	03	2422	18.01	18.32	21.18	≤ 30.00
11n-HT40	MCS0	06	2437	17.25	17.53	20.40	≤ 30.00
11n-HT40	MCS0	09	2452	16.11	16.31	19.22	≤ 30.00
VHT20	MCS4	01	2412	17.28	17.56	20.43	≤ 30.00
VHT20	MCS4	02	2417	20.65	20.78	23.73	≤ 30.00
VHT20	MCS4	06	2437	20.72	20.87	23.81	≤ 30.00
VHT20	MCS4	10	2457	20.61	20.89	23.76	≤ 30.00
VHT20	MCS4	11	2462	16.82	17.04	19.94	≤ 30.00
VHT40	MCS0	03	2422	17.08	17.23	20.17	≤ 30.00
VHT40	MCS0	06	2437	17.35	17.42	20.40	≤ 30.00
VHT40	MCS0	09	2452	16.04	16.21	19.14	≤ 30.00
11ax-HE20	MCS3	01	2412	17.60	18.05	20.84	≤ 30.00
11ax-HE20	MCS3	06	2437	20.54	20.71	23.64	≤ 30.00
11ax-HE20	MCS3	10	2457	20.39	20.81	23.62	≤ 30.00
11ax-HE20	MCS3	11	2462	16.83	16.91	19.88	≤ 30.00
11ax-HE40	MCS0	03	2422	16.60	16.94	19.78	≤ 30.00
11ax-HE40	MCS0	06	2437	16.95	17.04	20.01	≤ 30.00
11ax-HE40	MCS0	09	2452	15.64	15.85	18.76	≤ 30.00

Note: Total Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

A.4 Power Spectral Density Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2022-09-30~2022-10-13		


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/10kHz)		Total PSD (dBm/10kHz)	Limit (dBm/3kHz)	Result
				Ant 0	Ant 1			
11b	1Mbps	01	2412	-6.52	-7.65	-4.04	≤ 5.09	Pass
11b	1Mbps	06	2437	-5.65	-5.81	-2.72	≤ 5.09	Pass
11b	1Mbps	11	2462	-8.49	-8.42	-5.44	≤ 5.09	Pass
11g	6Mbps	01	2412	-9.47	-9.81	-6.63	≤ 5.09	Pass
11g	6Mbps	06	2437	-7.56	-7.61	-4.58	≤ 5.09	Pass
11g	6Mbps	11	2462	-9.66	-10.20	-6.91	≤ 5.09	Pass
11n-HT20	MCS3	01	2412	-10.73	-10.99	-7.84	≤ 5.09	Pass
11n-HT20	MCS3	06	2437	-8.10	-8.22	-5.15	≤ 5.09	Pass
11n-HT20	MCS3	11	2462	-10.50	-11.42	-7.93	≤ 5.09	Pass
11n-HT40	MCS0	03	2422	-13.27	-13.41	-10.33	≤ 5.09	Pass
11n-HT40	MCS0	06	2437	-13.34	-13.54	-10.43	≤ 5.09	Pass
11n-HT40	MCS0	09	2452	-13.00	-13.23	-10.10	≤ 5.09	Pass
VHT20	MCS4	01	2412	-12.03	-12.26	-9.13	≤ 5.09	Pass
VHT20	MCS4	06	2437	-8.82	-8.55	-5.67	≤ 5.09	Pass
VHT20	MCS4	11	2462	-12.28	-12.36	-9.31	≤ 5.09	Pass
VHT40	MCS0	03	2422	-13.49	-13.22	-10.34	≤ 5.09	Pass
VHT40	MCS0	06	2437	-14.96	-15.08	-12.01	≤ 5.09	Pass
VHT40	MCS0	09	2452	-16.34	-16.33	-13.32	≤ 5.09	Pass
11ax-HE20	MCS3	01	2412	-12.36	-12.04	-9.19	≤ 5.09	Pass
11ax-HE20	MCS3	06	2437	-9.68	-9.89	-6.77	≤ 5.09	Pass
11ax-HE20	MCS3	11	2462	-13.27	-13.14	-10.19	≤ 5.09	Pass
11ax-HE40	MCS0	03	2422	-16.99	-16.70	-13.83	≤ 5.09	Pass
11ax-HE40	MCS0	06	2437	-16.46	-16.88	-13.66	≤ 5.09	Pass
11ax-HE40	MCS0	09	2452	-17.42	-17.64	-14.51	≤ 5.09	Pass

Note 1: The EUT duty cycle < 98%, the total PSD (dBm/10kHz) = $10 \cdot \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\} + 10 \cdot \log (1/\text{Duty cycle})$.

Note 2: Limit (dBm/3kHz) = 8 - (8.91 - 6) = 5.09dBm/3kHz

802.11b - PSD - Ant 0



Channel 01 (2412MHz)

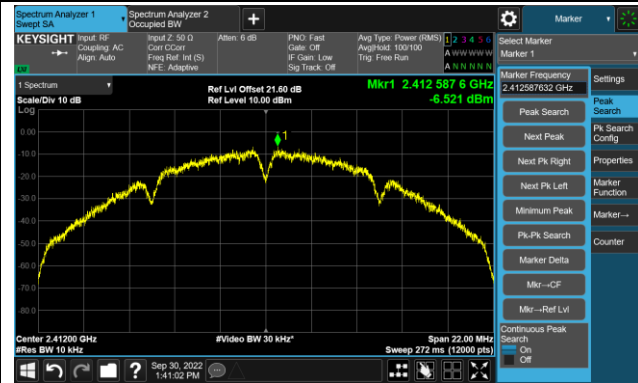

Channel 06 (2437MHz)




Channel 11 (2462MHz)

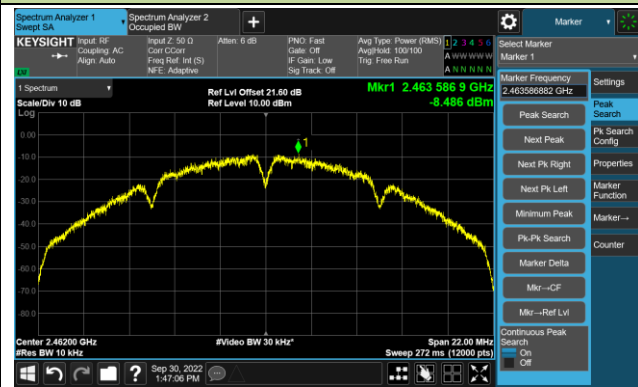


802.11g - PSD - Ant 0



Channel 01 (2412MHz)

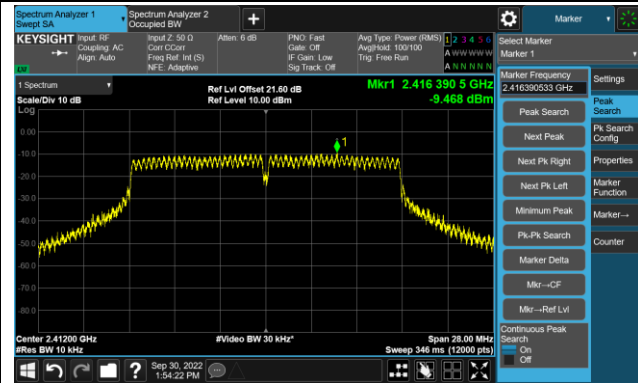

Channel 06 (2437MHz)

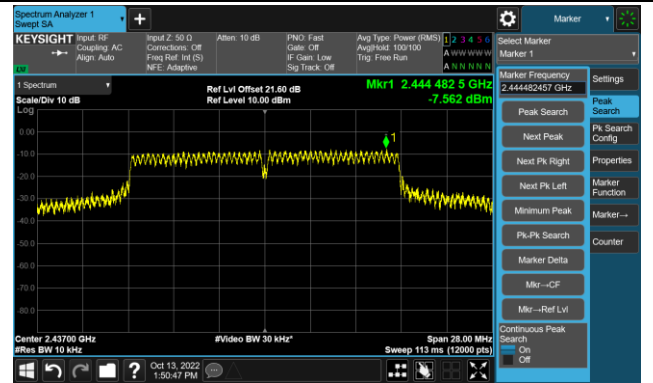


Channel 11 (2462MHz)

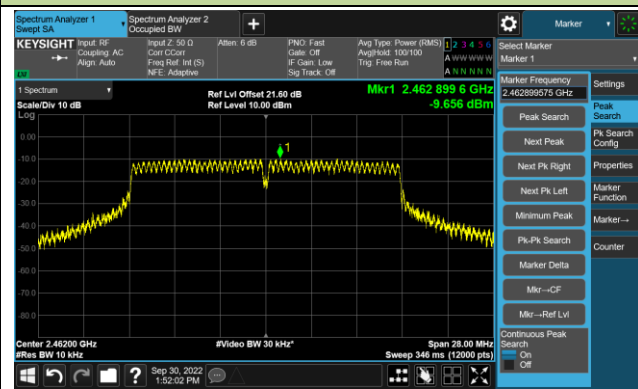


802.11n-HT20 - PSD - Ant 0


Channel 01 (2412MHz)

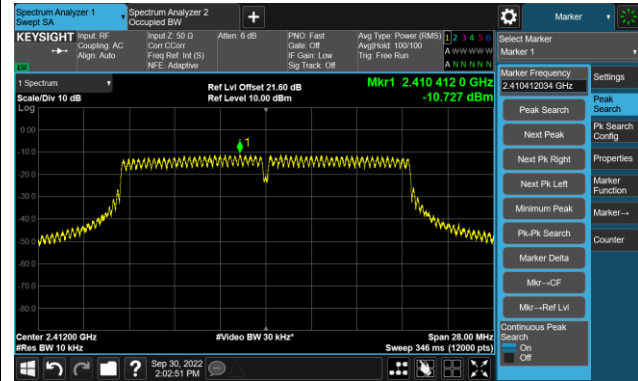

Channel 06 (2437MHz)

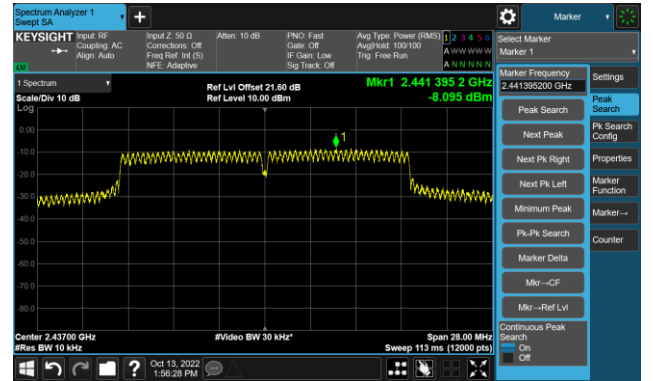


Channel 11 (2462MHz)

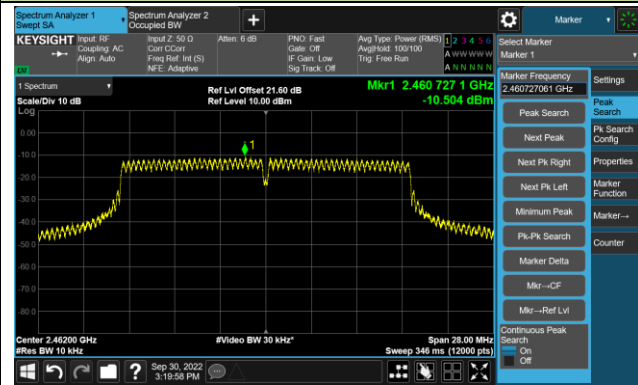


802.11n-HT40 - PSD - Ant 0


Channel 03 (2422MHz)

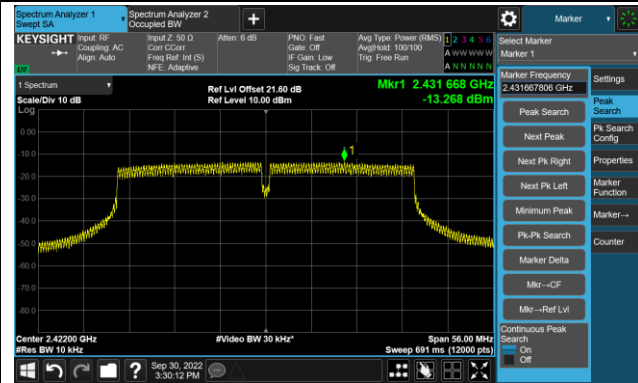

Channel 06 (2437MHz)

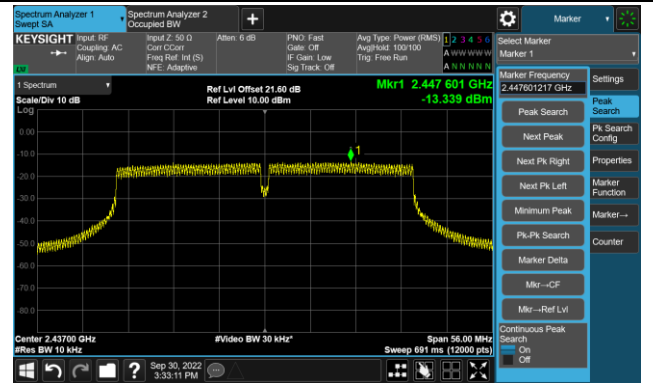


Channel 09 (2452MHz)

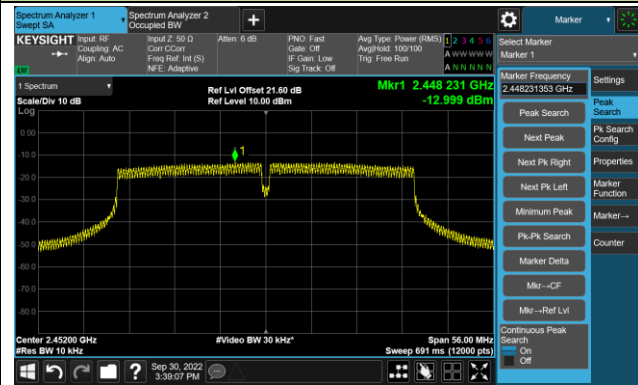


VHT20 - PSD - Ant 0


Channel 01 (2412MHz)

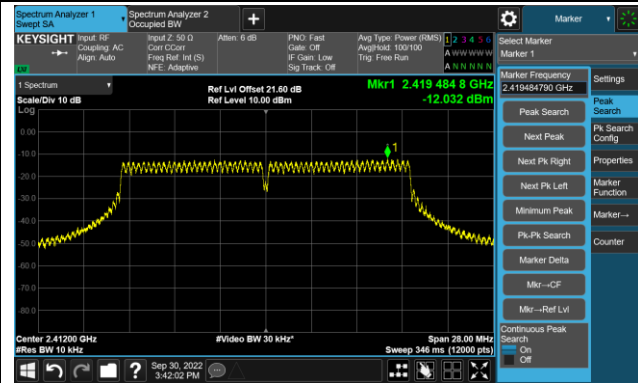

Channel 06 (2437MHz)

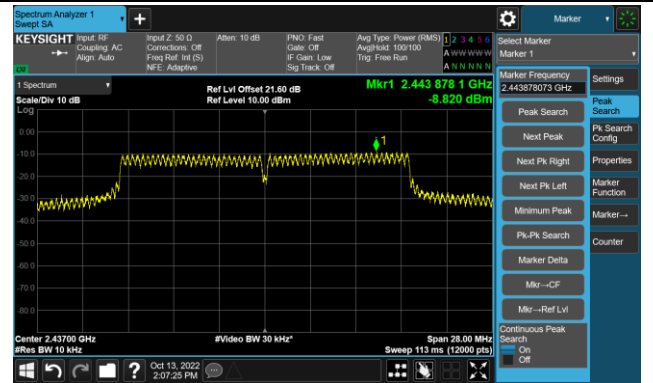


Channel 11 (2462MHz)

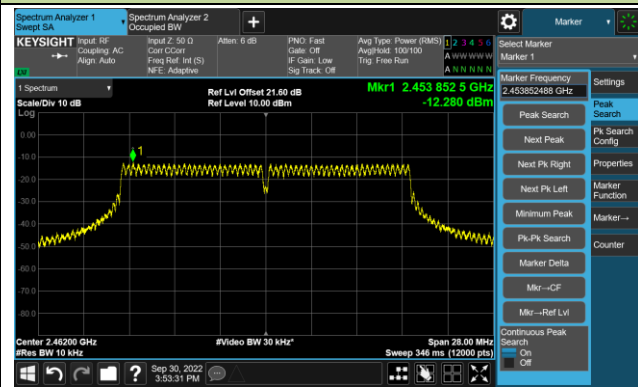


VHT40 - PSD - Ant 0


Channel 03 (2422MHz)

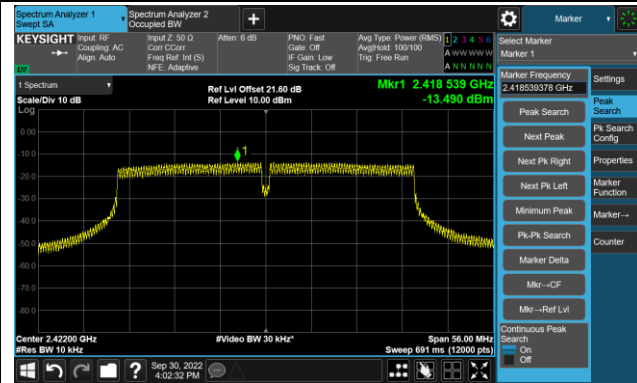

Channel 06 (2437MHz)

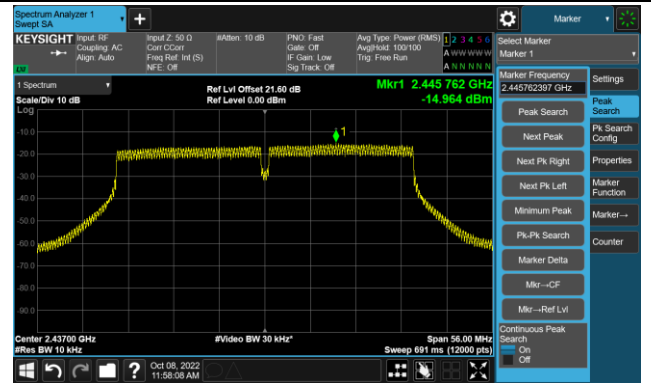

Channel 09 (2452MHz)

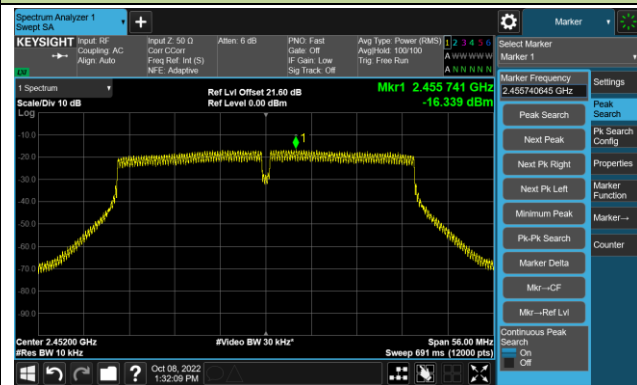


802.11ax-HE20 - PSD - Ant 0


Channel 01 (2412MHz)



Channel 06 (2437MHz)

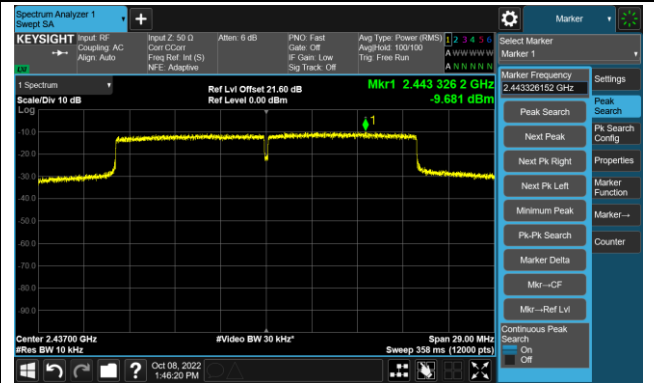

Channel 11 (2462MHz)

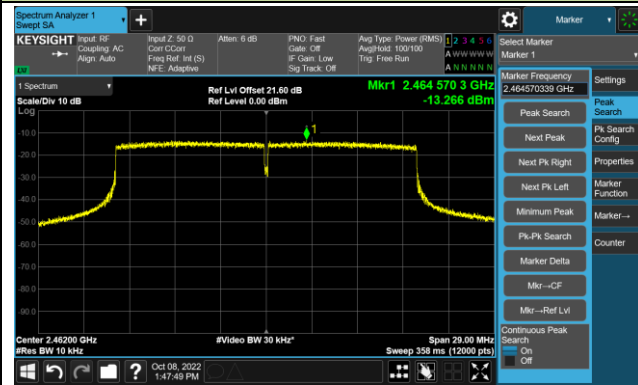


802.11ax-HE40 - PSD - Ant 0

Channel 03 (2422MHz)



Channel 06 (2437MHz)

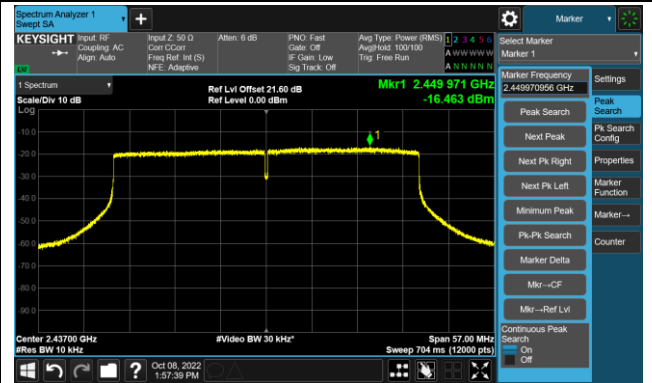


Channel 09 (2452MHz)



802.11b - PSD - Ant 1


Channel 01 (2412MHz)

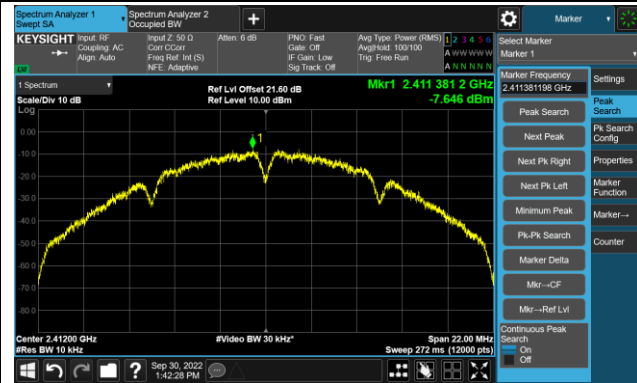

Channel 06 (2437MHz)




Channel 11 (2462MHz)

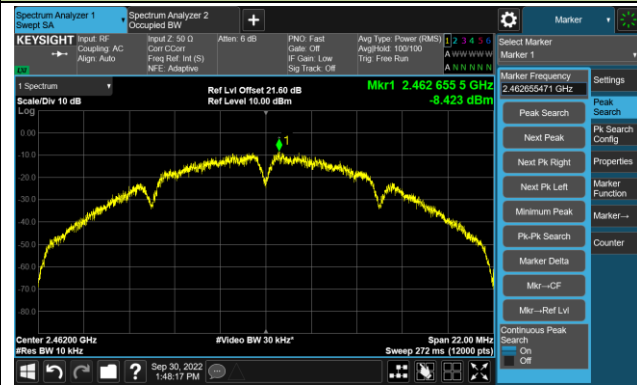


802.11g - PSD - Ant 1


Channel 01 (2412MHz)

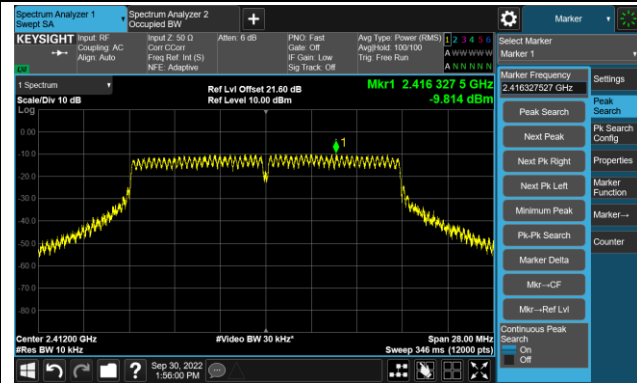

Channel 06 (2437MHz)

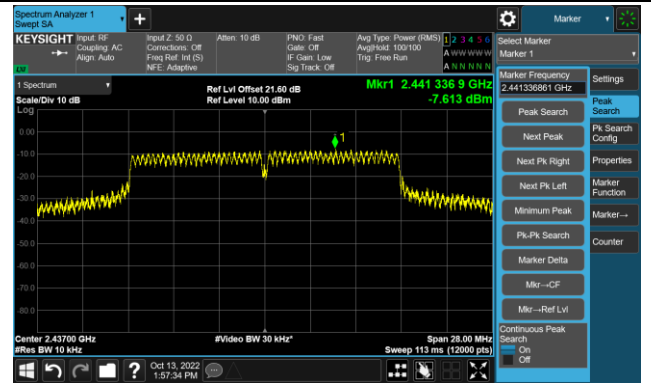


Channel 11 (2462MHz)

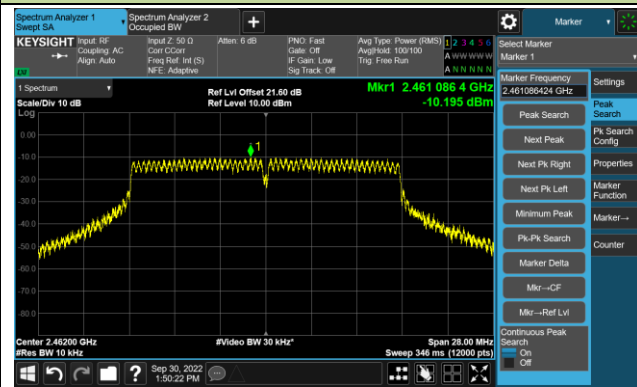


802.11n-HT20 - PSD - Ant 1


Channel 01 (2412MHz)

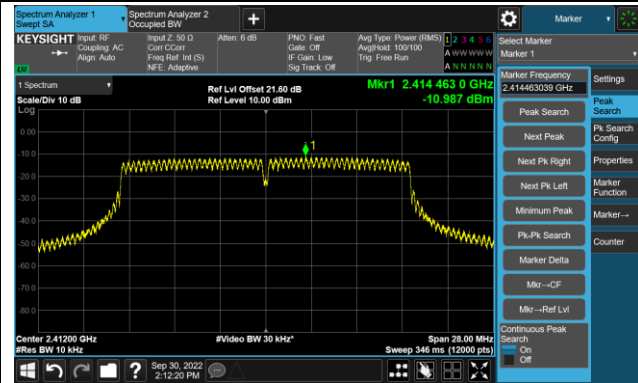

Channel 06 (2437MHz)

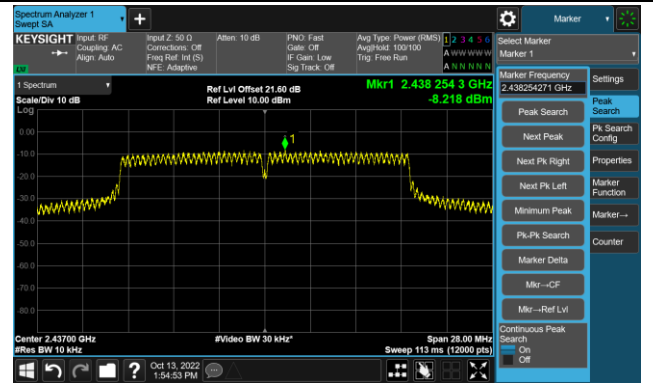


Channel 11 (2462MHz)

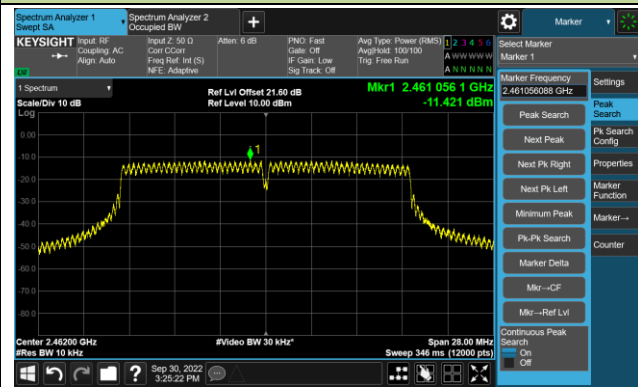


802.11n-HT40 - PSD - Ant 1

Channel 03 (2422MHz)

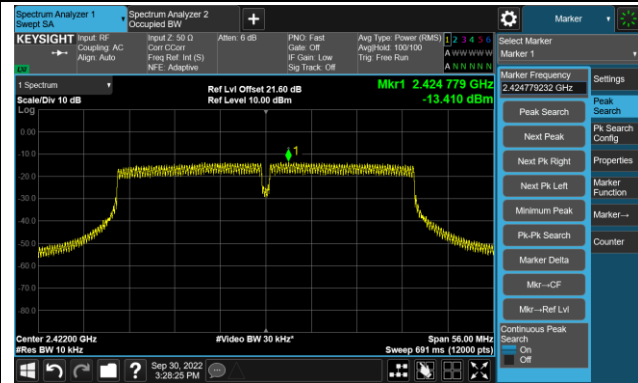

Channel 06 (2437MHz)

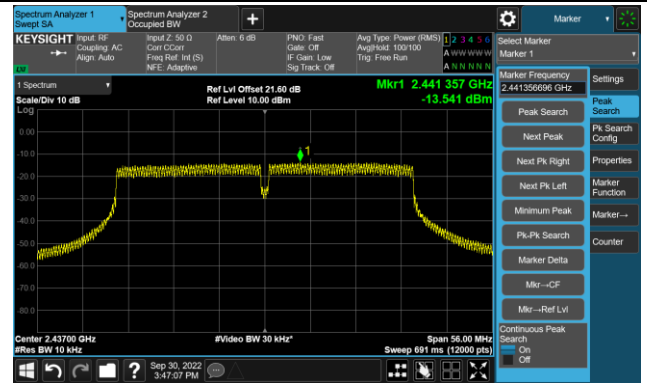

Channel 09 (2452MHz)

