

Submittal Application Report

For Grant of Certification

Model: RB911-5HacD-US
5180-5240, and 5745-5825 MHz
Unlicensed National Information Infrastructure (U-NII)
Indoor/Outdoor Operation Device
U-NII-1, U-NII-3 Operation (New Rules)
FCC ID: TV7RB911-5HACD
IC: 7442A-9115HACD

FOR


Mikrotikls SIA

Pernavas 46 Str.
Riga LV-1009 Latvia

Test Report Number: 161122
FCC Site Registration: 90910, 315994
IC Test Site Registration: 3041A-1

Authorized Signatory: *Scot D Rogers*

Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
Louisburg, KS 66053
Phone / Fax (913) 837-3214

Engineering Test Report for Grant of Certification Application

FOR

Unlicensed National Information Infrastructure (U-NII)

Indoor/Outdoor Operation Device

47CFR, Part 15E 15.407 (New Rules)

Industry Canada RSS-247 Issue 1

License Exempt Intentional Radiator

For

Mikrotikls SIA

Pernavas 46 Str.
Riga LV-1009 Latvia

Broadband Digital Transmission System
U-NII-1 and U-NII-3 operation

Model: RB911-5HacD-US
Frequency Range 5180-5240 and 5745-5825 MHz
FCC ID#: TV7RB911-5HACD
IC: 7442A-9115HACD

Test Date: November 22, 2016

Certifying Engineer: *Scot D. Rogers*

Scot D. Rogers
Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053
Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
This report must not be used by the client to claim product certification, approval, or
endorsement by NVLAP, NIST, or any agency of the Federal Government.



Testing
NVLAP Lab Code 200087-0

Table of Contents

TABLE OF CONTENTS..... 3

REVISIONS..... 8

FORWARD 9

OPINION / INTERPRETATION OF RESULTS 9

EQUIPMENT TESTED..... 10

EQUIPMENT FUNCTION AND CONFIGURATION..... 11

 Equipment Configuration.....12

APPLICANT COMPANY INFORMATION 13

EQUIPMENT INFORMATION..... 13

 Product Details14

 Accessories15

 Table for Filed Antennas15

 Antenna and Bandwidth.....15

 IEEE 11a/n Spec.....15

 Table for Carrier Frequencies16

 Table for Test Modes16

 Test Result of Occupied Bandwidth17

APPLICATION FOR CERTIFICATION..... 19

APPLICABLE STANDARDS & TEST PROCEDURES 20

EQUIPMENT TESTING PROCEDURES 20

 AC Line Conducted Emission Test Procedure20

 Radiated Emission Test Procedure.....20

 Diagram 1 Test arrangement for Conducted emissions21

Rogers Labs, Inc.
 4405 W. 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 2

Mikrotikls SIA
 Model: RB911-5HacD-US
 Test #: 161122
 Test to: 47CFR, 15.407, RSS-247
 File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
 FCC ID: TV7RB911-5HACD
 IC: 7442A-7442A-9115HACD
 Date: March 3, 2017
 Page 3 of 84

Diagram 2 Test arrangement for radiated emissions of tabletop equipment.....22

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS).....23

TEST SITE LOCATIONS 23

LIST OF TEST EQUIPMENT 24

UNITS OF MEASUREMENTS 25

ENVIRONMENTAL CONDITIONS..... 25

INTENTIONAL RADIATORS..... 25

Antenna Requirements25

Restricted Bands of Operation.....25

Table 1 Radiated Emissions in Restricted Bands Data (MT-482016/N/A)26

Table 2 Radiated Emissions in Restricted Bands Data (PA58-24-ANT).....27

Table 3 Radiated Emissions in Restricted Bands Data (HDDA5W-32-DP2).....28

Summary of Results for Radiated Emissions in Restricted Bands28

AC Line Conducted Emissions Procedure29

Figure 1 AC Line Conducted Emissions Line 130

Figure 2 AC Line Conducted Emissions Line 230

Table 4 AC Line Conducted Emissions Data (Highest Emissions Line L1)31

Table 5 AC Line Conducted Emissions Data (Highest Emissions Line L2)31

Summary of Results for AC Line Conducted Emissions32

General Radiated Emissions Procedure32

Table 6 General Radiated Emissions from EUT Data (Highest Emissions).....33

Summary of Results for General Radiated Emissions33

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands34

Elevation Compliance Omni Directional (8.5 dBi) MT-482016/N/A36

Elevation Compliance Panel Antenna (24 dBi) PA58-24-ANT37



Testing
NVLAP Lab Code 200087-0

Elevation Compliance Dish Antenna (32 dBi) HDDA5W-32-DP238

Figure 3 Plot of Transmitter Emissions (Chain 0, Across 5150-5250 MHz Band, 802.11a).....39

Figure 4 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11a).....39

Figure 5 Plot of Transmitter Emissions (Chain0, Across 5150-5250 MHz Band, 802.11n40)40

Figure 6 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11n40)40

Figure 7 Plot of Transmitter Emissions (Chain 0, Across 5150-5250 MHz Band, 802.11ac).....41

Figure 8 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11ac).....41

Figure 9 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11a)42

Figure 10 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11a)42

Figure 11 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11n40)43

Figure 12 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11n40)43

Figure 13 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11ac)44

Figure 14 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11ac)44

Figure 15 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11a).....45

Figure 16 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11a).....45

Figure 17 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11n40)46

Figure 18 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11n40)46

Figure 19 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11ac).....47

Figure 20 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11ac).....47

Figure 21 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11a, 99% OBW)48

Figure 22 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11a, 99% OBW)48

Figure 23 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11a, 26 dB OBW).....49

Figure 24 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11a, 26 dB OBW).....49

Figure 25 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11n40, 99% OBW)50

Figure 26 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11n40, 99% OBW)50

Rogers Labs, Inc.
 4405 W. 259th Terrace
 Louisburg, KS 66053
 Phone/Fax: (913) 837-3214
 Revision 2

Mikrotikls SIA
 Model: RB911-5HacD-US
 Test #: 161122
 Test to: 47CFR, 15.407, RSS-247
 File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
 FCC ID: TV7RB911-5HACD
 IC: 7442A-7442A-9115HACD
 Date: March 3, 2017
 Page 5 of 84



Testing
NVLAP Lab Code 200087-0

Figure 27 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11n40, 26 dB OBW).....51

Figure 28 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11n40, 26 dB OBW).....51

Figure 29 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11ac, 99% OBW)52

Figure 30 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11ac, 99% OBW)52

Figure 31 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11ac, 26 dB OBW)53

Figure 32 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11ac, 26 dB OBW)53

Figure 33 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11a).....54

Figure 34 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11a).....54

Figure 35 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11n40)55

Figure 36 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11n40)55

Figure 37 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11ac).....56

Figure 38 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11ac).....56

Figure 39 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11a)57

Figure 40 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11a)57

Figure 41 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11n40).....58

Figure 42 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11n40).....58

Figure 43 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11ac)59

Figure 44 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11ac)59

Figure 45 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11a).....60

Figure 46 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11a).....60

Figure 47 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11n40)61

Figure 48 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11n40)61

Figure 49 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11ac).....62

Figure 50 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11ac).....62

Figure 51 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11a, 99% OBW)63

Figure 52 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11a, 99% OBW)63

Figure 53 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11a, 6-dB OBW)64

Figure 54 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11a, 6-dB OBW)64

Figure 55 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11n40, 99% OBW)65

Figure 56 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11n40, 99% OBW)65

Figure 57 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11n40, 6-dB OBW)66

Figure 58 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11n40, 6-dB OBW)66

Figure 59 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11ac, 99% OBW)67

Figure 60 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11ac, 99% OBW)67

Figure 61 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11ac, 6-dB OBW).....68

Figure 62 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11ac, 6-dB OBW).....68

Transmitter Emissions Data.....69

Table 7 Transmitter Radiated Emission (5150-5250 MHz Band, MT-482016/N/A)69

Table 8 Transmitter Radiated Emission (5150-5250 MHz Band, PA58-24-ANT)70

Table 9 Transmitter Radiated Emission (5150-5250 MHz Band, HDDA5W-32-DP2)71

Table 10 Transmitter Radiated Emission (5725-5850 MHz Band, MT-482016/N/A)72

Table 11 Transmitter Radiated Emission (5725-5850 MHz Band, PA58-24-ANT)73

Table 12 Transmitter Radiated Emission (5725-5850 MHz Band, HDDA5W-32-DP2)74

Table 13 Transmitter Antenna Port Conducted Power and Emissions Chain 0.....75

Table 14 Transmitter Antenna Port Conducted Power and Emissions Chain 1.....76

Table 15 Transmitter all antenna Ports Total Power and PSD U-NII-1 Band77

Table 16 Transmitter all antenna Ports Total Power and PSD U-NII-3 Band77

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....78

STATEMENT OF MODIFICATIONS AND DEVIATIONS 78

ANNEX..... 79



Testing
NVLAP Lab Code 200087-0

Annex A Measurement Uncertainty Calculations.....80

Annex B Rogers Labs Test Equipment List.....81

Annex C Rogers Qualifications82

Annex D FCC Site Registration Letter.....83

Annex E Industry Canada Site Registration Letter84

Revisions

Revision 2 Issued March 3, 2017 – corrected reference to KDB 662911 page 20, added antenna gain and summing information on page 30. Operational description exhibit was also updated

Revision 1 Issued February 20, 2017

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 2

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122
Test to: 47CFR, 15.407, RSS-247
File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD
Date: March 3, 2017
Page 8 of 84

Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt, Unlicensed National Information Infrastructure (U-NII) Intentional Radiator operating under 47CFR Paragraph 15E (15.407), U-NII-1 and U-NII-3 new rules, 5180-5240, and 5745-5825 MHz bands, and Industry Canada RSS-GEN Issue 4, and RSS-247 Issue 1, LE-LAN transmitter operation in 5745-5825 MHz.

Name of Applicant: Mikrotikls SIA FRN: 0014 43 1100
 Pernavas 46 Str.
 Riga LV-1009 Latvia

Model: RB911-5HacD-US

FCC ID: TV7RB911-5HACD, **IC:** 7442A-9115HACD

Frequency Range: 5180-5240 MHz and 5745-5825 MHz (U-NII-1 and U-NII-3 under new rules 15.407, 802.11a/n 20 MHz, 40 MHz channels), and limited antenna options and restrictions for operation in Canada

Maximum Power: U-NII-1 Band, 20 MHz mode, 0.020-watt, 99% OBW 17,050 kHz
 U-NII-1 Band, 40 MHz mode, 0.018-watt, 99% OBW 37,050 kHz
 U-NII-1 Band, 80 MHz mode, 0.016-watt, 99% OBW 77,250 kHz
 U-NII-3 Band, 20 MHz mode, 0.023-watt, 99% OBW 17,075 kHz
 U-NII-3 Band, 40 MHz mode, 0.021-watt, 99% OBW 37,125 kHz
 U-NII-3 Band, 80 MHz mode, 0.019-watt, 99% OBW 77,400 kHz

Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Restricted Frequency Bands 15.205, RSS-GEN 8.10	-1.9	Complies
AC Line Conducted 15.207, RSS-GEN 7.2.4	-8.2	Complies
Radiated Emissions 15.209, RSS-GEN 7.2.5	-0.9	Complies
Harmonic Emissions per 15.407, RSS-247	-24.1	Complies
Power Spectral Density per 15.407, RS-247	-5.6	Complies

Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	RB911-5HacD-US	TV7RB911-5HACD
AC Adapter	FLD123-240028-13320B	17954
Power Adapter	POE	N/A
Dell Studio XPS	921LBN1	N/A

Test results in this report relate only to the items tested.

Antenna options tested include:

5 GHz antennas

Omni Directional (8.5 dBi) MT-482016/N/A

Panel Antenna (24 dBi) PA58-24-ANT


Dish Antenna (32 dBi) HDDA5W-32-DP2

Equipment Function and Configuration

The EUT is a 5 GHz (Dual chain) Digital Transmission System providing Multiple Inputs and Multiple Outputs (MIMO). The design provides MIMO operational capabilities in the U-NII-1 and U-NII-3 services (5180-5240 and 5745-5825 MHz) and Industry Canada operation as LE-LAN, Indoor only for 5180-5240 MHz band, Indoor/Outdoor access point operation in the 5725-5850 MHz band. The EUT offers broadband wireless connectivity to transmit and receive data. The design requires professional installation and supports multiple antennas for use selected from the authorized antenna styles as documented in this report. The EUT provides 2 antenna connection ports and single Ethernet port. The design requires power provided through the use of the included POE (Power Over Ethernet) adapter. For testing purposes, the EUT transceiver was connected to the manufacturer supplied POE and AC/DC power supply and communicating to the laptop computer through the Ethernet network interface. This configuration provided operational control of the EUT and communications over the network interface between the EUT and supporting computer system. The design provides no other interfacing options than those presented in this report. For testing purposes, the RB911-5HacD-US test sample was configured to transmit in available data modes receiving power from the manufacturer provided POE and AC/DC power adapter. As requested by the manufacturer and required by regulations, the equipment was tested for emissions compliance using the available configurations with the worst-case data presented. Test results in this report relate only to the products described in this report.

Note: This equipment requires professional installation by Mikrotik qualified installers. The installation software (available only to the installers) requires entry of installed antenna characteristics which attenuate the output power to regulatory compliant levels. Antenna information required is antenna gain only and depending on the frequency band and regulations, output power is reduced accordingly.

Equipment Configuration

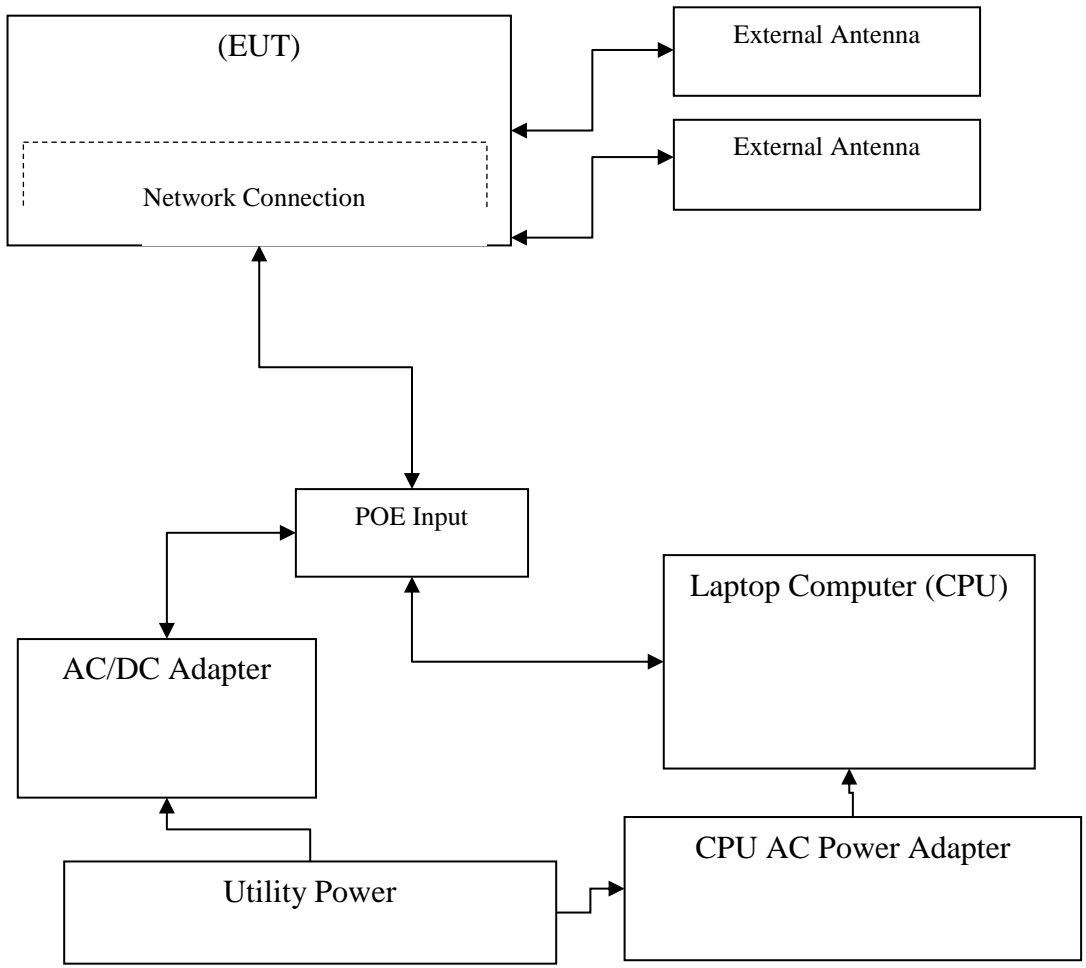

Applicant Company information

Applicants Company	MikroTik (“Mikrotikls, SIA”)
Applicants Address	Pernavas 46 Str., Riga LV-1009 Latvia
FCC Identifier	TV7RB911-5HACD
Industry Canada Identifier	7442A-9115HACD
Manufacturer Company	MikroTik (“Mikrotikls, SIA”)
Manufacturer Address	Pernavas 46 Str., Riga LV-1009 Latvia

Equipment information

Product Marketing Name (PMN): The PMN is the name or model number under which the product will be marketed/offered for sale in Canada. If the product has PMN, it must be provided.	911 Lite5 ac
Unique Product Number (UPN): The applicant, made up of a maximum of 11 alphanumeric characters (A-Z, 0-9), assigns the UPN.	7442A-9115HACD
Hardware Version Identification Number (HVIN): The HVIN identifies hardware specifications of a product version. The HVIN replaces the ISED Model Number in the legacy E-filing System. An HVIN is required for all products for certification applications.	RB911-5HacD-US
Host Marketing Name (HMN) (if applicable): The HMN is the name or model number of a final product, which contains a certified radio module.	
Brand Name	
Model Number	RB911-5HacD-US
Test Rule Part(s)	47CFR Parts 15C & 15E, 15.247, 15.407, RSS-247
Test Frequency Range	5.15-5.25 and 5.725-5.85 GHz
Project Number	161122
Submission Type	Certification

Product Details

Items	Description
Product Type	5 GHz U-NII-1 and U-NII-3 [2x2 MIMO]
Radio Type	Transceiver
Power Type	POE adapter with External Power Supply
Modulation	IEEE 802.11a: OFDM IEEE 802.11a/n: see the below table
Data Modulation	IEEE 802.11 a/n: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM) IEEE 802.11 g/n: N/A IEEE 802.11 b: N/A
Data Rate (Mbps)	IEEE 802.11a: OFDM (36/48/54) IEEE 802.11n/ac: see the below table IEEE 802.11b/g/n: N/A
Frequency Range	5150-5250 MHz / 5725-5850 MHz
Channel Number	802.11b: N/A 802.11g/n: N/A 802.11a/n: 9 for 20MHz bandwidth; 4 for 40MHz bandwidth 802.11 a/c: 1 for 80 MHz bandwidth
Maximum Conducted Output Power	802.11 b: 802.11 g: 802.11 n (HT-20): 802.11 n (HT-40): Band 1: IEEE 802.11a: 0.020 Watts IEEE 802.11a/n MCS0/Nss1 (VHT20): 0.020 Watts IEEE 802.11a/n MCS0/Nss1 (VHT40): 0.018 Watts IEEE 802.11ac MCS0/Nss1 (VHT80): 0.016 Watts Band 3: IEEE 802.11a: 0.023 Watts IEEE 802.11a/n MCS0/Nss1 (VHT20): 0.023 Watts IEEE 802.11a/n MCS0/Nss1 (VHT40): 0.021 Watts IEEE 802.11ac MCS0/Nss1 (VHT80): 0.019 Watts
Carrier Frequencies	Please refer to Table for Carrier Frequencies
Antenna	External antenna options include: <u>5 GHz antennas</u> Omni Directional (8.5 dBi) MT-482016/N/A Panel Antenna (24 dBi) PA58-24-ANT Dish Antenna (32 dBi) HDDA5W-32-DP2
Communication Mode	Device operates as a 2x2 input output 5 GHz U-NII 1 and U-NII-3. The design utilizes Multiple-Input-Multiple-Output (MIMO) operational capability. The design may be configured to transmit on all chains or chosen single chain (without automatic switching between chains). The unit may receive on single or all chains and may transmit on single or all chains.

Beamforming Function	Without beamforming
Operating Mode	5150-5250 MHz (U-NII-1 band) and 5725-5825 MHz (U-NII-3) and frequency band of 5725-5850 MHz for use in Canada

Accessories

AC Power Adapter	FLD123-240028-13320B
Power Over Ethernet (POE) adapter	POE

Table for Filed Antennas

Ant.	Brand	Model Name	P/N	Antenna Type	Connector	Gain (dBi)	
						2.4GHZ	5GHZ
1	Mikrotikls	MT-482016/N/A	N/A	Omni Directional	n		8.5
2	Mikrotikls	PA58-24-ANT	N/A	Panel	n		24
3	Mikrotikls	HDDA5W-32-DP2	N/A	Dish	n		32

Antenna and Bandwidth

Antenna	TX chains		
Bandwidth Mode	20 MHz	40 MHz	80 MHz
IEEE 802.11a	1-3 from above list		
IEEE 802.11n		1-3 from above list	
IEEE 802.11ac			1-3 from above list

IEEE 11a/n Spec.

Protocol	Number of Transmit Chains (NTX)	Data Rate/MCS
802.11a/n (VHT20)	2	MCS 0-9/Nss1-3
802.11a/n (VHT40)	2	MCS 0-9/Nss1-3
802.11ac (VHT80)	2	MCS 0-9/Nss1-3

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). The EUT supports HT20 and HT40.

Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80, and VHT160 (VHT: Very High Throughput). The EUT does not support 802.11ac VHT160.

Note 3: Modulation modes consist of below configuration:

IEEE 802.11a/n; HT20/HT40; IEEE 802.11ac: VHT80

Table for Carrier Frequencies

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48, 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 38, 46, 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150-5250MHz U-NII-1	36	5180MHz	44	5220MHz
	38	5190MHz	46	5230MHz
	40	5200MHz	48	5240MHz
	42	5210MHz	-	-
5725-5850MHz U-NII-3	149	5745MHz	157	5785MHz
	151	5755MHz	159	5795MHz
	153	5765MHz	161	5805MHz
	155	5775MHz	165	5825MHz

Table for Test Modes

Preliminary tests were performed in different data rates to define the worst radiated emission.

The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all possible configurations while searching the worst cases.

The following table is a list of the test modes investigated for this report.

Test Items	Mode		Data Rate	Channel	Chain
Max. Conducted Output Power	11 a BPSK	Band 1&3	6Mbps	36/40/48/149/157/165	1,2
	11a/n HT20	Band 1&3	MCS0/Nss1	36/40/48/149/157/165	1,2
	11a/n HT40	Band 1&3	MCS0/Nss1	38/46/151/159	1,2
	11ac VHT80	Band 1&3	MCS0/Nss1	42,155	1,2
Power Spectral Density	11a BPSK	Band 1&3	6Mbps	36//40/48/149/157/165	1,2
	11a/n HT20	Band 1&3	MCS0/Nss1	36/40/48/149/157/165	1,2
	11a/n HT40	Band 1&3	MCS0/Nss1	38/46/151/159	1,2
	11ac VHT80	Band 1&3	MCS0/Nss1	42,155	1,2
26dB, 99% Occupied Bandwidth Measurement	11a BPSK	Band 1&3	6Mbps	36/40/48/149/157/165	1,2
	11a/n HT20	Band 1&3	MCS0/Nss1	36/40/48/149/157/165	1,2
	11a/n HT40	Band 1&3	MCS0/Nss1	38/46/151/159	1,2
	11ac VHT80	Band 1&3	MCS0/Nss1	42,155	1,2

6dB Spectrum Bandwidth Measurement	802.11a BPSK	Band 3	6Mbps	149/157/165	1,2
	802.11a/n HT20	Band 3	MCS0/Nss1	149/157/165	1,2
	802.11a/n HT40	Band 3	MCS0/Nss1	151/159	1,2
	802.11ac VHT80	Band 3	MCS0/Nss1	42,155	1,2
Radiated Emission Below 1GHz					
-					
Radiated Emission Above 1GHz	11a BPSK	Band 1&3	6Mbps	36/40/48/149/157/165	1,2
	802.11a/n HT20	Band 1&3	MCS0/Nss1	36/40/48/149/157/165	1,2
	802.11a/n HT40	Band 1&3	MCS0/Nss1	38/46/151/159	1,2
	802.11ac VHT80	Band 1&3	MCS0/Nss1	42,155	1,2
Band Edge Emission					
11a BPSK					
Band 1&3					
6Mbps					
36/40/48/149/157/165					
1,2					
802.11a/n HT20					
Band 1&3					
MCS0/Nss1					
36/40/48/149/157/165					
1,2					
802.11a/n HT40					
Band 1&3					
MCS0/Nss1					
38/46/151/159					
1,2					
802.11ac VHT80					
Band 1&3					
MCS0/Nss1					
42,155					
1,2					
Frequency Stability					
20MHz					
Band 1&3					
-					
40/157					
1,2					
40MHz					
Band 1&3					
-					
38/151					
1,2					
80MHz					
Band 1&3					
-					
42,155					
1,2					

Test Result of Occupied Bandwidth

Mode	Frequency	26 dB Bandwidth (kHz)	6 dB Bandwidth (kHz)	99% Occupied Bandwidth (kHz)
802.11b	2412 MHz	N/A		
	2437 MHz	N/A		
	2462 MHz	N/A		
802.11g	2412 MHz	N/A		
	2437 MHz	N/A		
	2462 MHz	N/A		
802.11n (HT20)	2412 MHz	N/A		
	2437 MHz	N/A		
	2462 MHz	N/A		

802.11n (HT40)	2422 MHz	N/A		
	2447 MHz	N/A		
	2452 MHz	N/A		
802.11a	5180 MHz	22125 kHz	N/A	17050 kHz
	5200 MHz	22150 kHz	N/A	17000 kHz
	5240 MHz	22150 kHz	N/A	17025 kHz
	5745 MHz	N/A	16375 kHz	17075 kHz
	5785 MHz	N/A	16350 kHz	17050 kHz
	5825 MHz	N/A	16375 kHz	17025 kHz
802.11n (ht20)	5180 MHz	22125 kHz	N/A	17050 kHz
	5200 MHz	22150 kHz	N/A	17000 kHz
	5240 MHz	22150 kHz	N/A	17025 kHz
	5745 MHz	N/A	16375 kHz	17075 kHz
	5785 MHz	N/A	16350 kHz	17050 kHz
	5825 MHz	N/A	16375 kHz	17025 kHz
802.11a/n MCS0/Nss1 HT40	5190 MHz	45400 kHz	N/A	37050 kHz
	5230 MHz	45550 kHz	N/A	37050 kHz
	5755 MHz	N/A	36375 kHz	36975 kHz
	5795 MHz	N/A	36000 kHz	37125 kHz
802.11ac VHT80	5210 MHz	87300 kHz	N/A	77250 kHz
802.11ac VHT80	5775 MHz	N/A	75900 kHz	77400 kHz

Application for Certification

- (1) Manufacturer: Mikrotiks SIA
Pernavas 46 Str.
Riga LV-1009 Latvia
- (2) Identification: Model: RB911-5HacD-US
FCC I.D.: TV7RB911-5HACD IC: 7442A-9115HACD
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation. The equipment operates from power received from authorized AC/DC power adapter and POE. The EUT provides single Ethernet port for communications and power and two antenna ports. During testing, the EUT was powered from the POE and AC/DC power supply and connected to CPU through network cable.
- (9) Transition Provisions of 47CFR 15.37 are not requested
- (10) Not Applicable. The unit is not a scanning receiver.
- (11) Not Applicable. The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.
- (13) Applications for certification of U-NII devices in the 5.15-5.35 GHz and the 5.47-5.85 GHz bands must include a high-level operational description of the security procedures that control the radio frequency operating parameters and ensure that unauthorized modifications cannot be made. The required information has been provided in Operational Description Exhibit filed with the application.
- (14) Contain at least one drawing or photograph showing the test set-up for each of the required types of tests applicable to the device for which certification is requested. These drawings or photographs must show enough detail to confirm other information contained in the test report. Any photographs used must be focused originals without glare or dark spots and must clearly show the test configuration used. This information is provided in this report and Test Setup Exhibits provided with the application filing.

Applicable Standards & Test Procedures

The following information is submitted in accordance with e-CFR dated October 31, 2016, Part 2, Subpart J, Part 15, Subpart 15E, Industry Canada RSS-GEN issue 4, and RSS-247 issue 1.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in ANSI C63.10-2013, KDB 662911 D01 v02r01, KDB 789033 D02 v01r03, KDB 926956 v02, RSS-247 Issue 1, and RSS-GEN Issue 4. The following information is submitted for processing applications for Certification.


Equipment Testing Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions was performed as defined in ANSI C63.10-2013. The test setup, including the EUT, was arranged in the test configurations as presented during testing. The test configuration was placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to diagram one showing typical test arrangement and photographs in exhibits for EUT placement used during testing.


Radiated Emission Test Procedure

Radiated emission testing was performed as required on a CISPR 16-1-4 compliant OATS and as specified in ANSI C63.10-2013 and applicable KDB documents. The EUT was placed on a rotating 0.9 x 1.2-meter platform, elevated as required above the ground plane at a distance of 3 meters from the FSM antenna. The table permitted orientation of the EUT in each of three orthogonal axis positions if necessary. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. The frequency spectrum from 9 kHz to 50,000 MHz was searched for during preliminary investigation. Refer to diagrams two and three showing typical test arrangement and photographs in the test setup exhibits for specific EUT placement during testing.

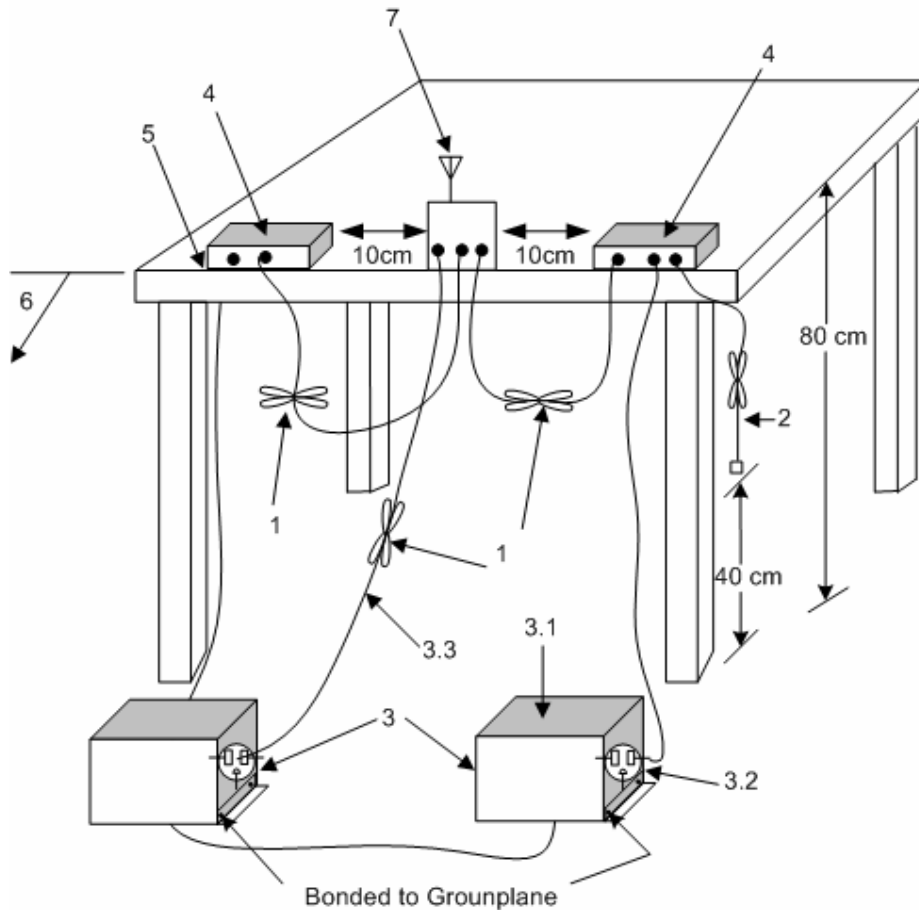


1. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long see (see 6.2.3.2).
2. The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m (see 6.2.2).
3. EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane (see 6.2.2 and 6.2.3).
 - 3.1 All other equipment powered from additional LISN(s).
 - 3.2 Multiple-outlet strip can be used for multiple power cords of non-EUT equipment.
 - 3.3 LISN at least 80 cm from nearest part of EUT chassis
4. Non-EUT components of EUT system being tested
5. Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop (see 6.2.3.2).
6. Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane (see 6.2.2 for options).
7. Antenna may be integral or detachable. If detachable, the antenna shall be attached for this test.

Diagram 1 Test arrangement for Conducted emissions

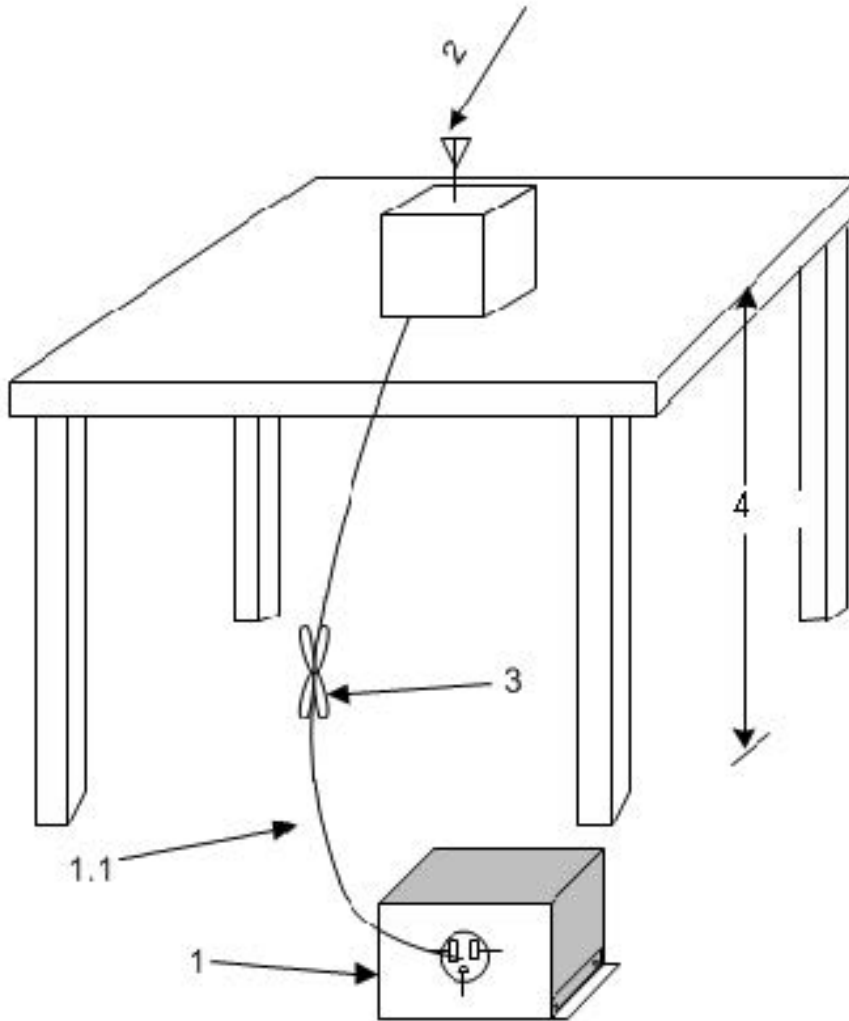

1. A LISN is optional for radiated measurements between 30 MHz and 1000 MHz but not allowed for measurements below 30 MHz and above 1000 MHz (see 6.3.1). If used, then connect EUT to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. The LISN may be placed on top of, or immediately beneath, the reference ground plane (see 6.2.2 and 6.2.3.2).
 - 1.1 LISN spaced at least 80 cm from nearest part of EUT chassis.
2. Antenna can be integral or detachable, depending on the EUT (see 6.3.1).
3. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long (see 6.3.1).
4. For emission measurements at or below 1 GHz, the table height shall be 80 cm. For emission measurements above 1 GHz, the table height shall be 1.5 m for measurements, except as otherwise specified (see 6.3.1 and 6.6.3.1).

Diagram 2 Test arrangement for radiated emissions of tabletop equipment

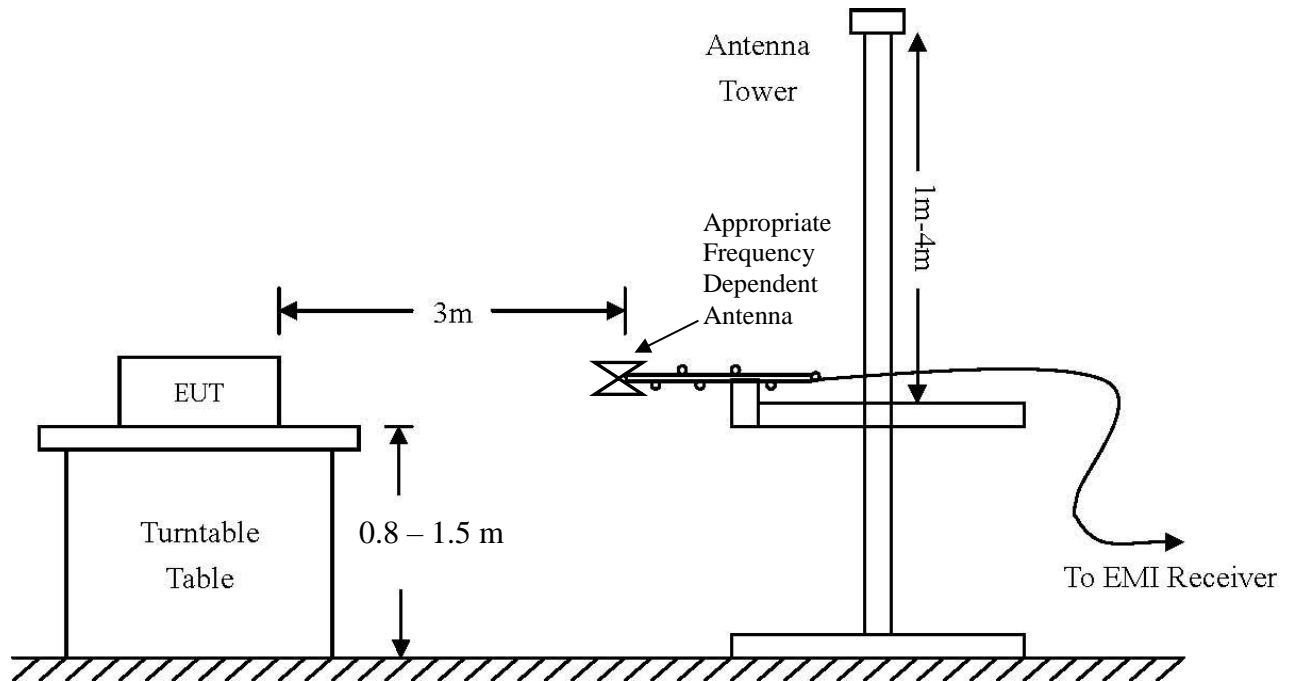

Frequency: 9 kHz-30 MHz	Frequency: 30 MHz- 1 GHZ	Frequency: Above 1 GHz
Loop Antenna	Broadband Biconilog	Horn
RBW = 9 kHz	RBW = 120 kHz	RBW = 1 MHz
VBW = 30 kHz	VBW = 120 kHz	VBW = 1 MHz
Sweep time = Auto	Sweep time = Auto	Sweep time = Auto
Detector = PK, QP	Detector = PK, QP	Detector = PK, AV
Antenna Height 1m	Antenna Height 1-4m	Antenna Height 1-4m

Diagram 3 Test arrangement for radiated emissions tested on Open Area Test Site (OATS)

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 West 259th Terrace, Louisburg, KS

Site Registration Refer to Annex for Site Registration Letters

NVLAP Accreditation Lab code 200087-0

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model (SN)</u>	<u>Band</u>	<u>Cal Date</u>	<u>Due</u>
<input checked="" type="checkbox"/> LISN	FCC	FCC-LISN-50-2-10(1PA) (160611)	.15-30MHz	5/16	5/17
<input checked="" type="checkbox"/> Cable	Time Microwave	750HF290-750 (L10M)	9kHz-40 GHz	10/16	10/17
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L1-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input checked="" type="checkbox"/> Cable	Belden	RG-58 (L2-CAT3-11509)	9kHz-30 MHz	10/16	10/17
<input type="checkbox"/> Antenna	ARA	BCD-235-B (169)	20-350MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3147 (40582)	200-1000MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	ETS-Lindgren	3117 (200389)	1-18 GHz	5/16	5/18
<input type="checkbox"/> Antenna	Com Power	AH-118 (10110)	1-18 GHz	10/15	10/17
<input checked="" type="checkbox"/> Antenna	Com Power	AH-840 (101046)	18-40 GHz	5/16	5/18
<input checked="" type="checkbox"/> Antenna	Com Power	AL-130 (121055)	.001-30 MHz	10/16	10/17
<input checked="" type="checkbox"/> Antenna	Sunol	JB-6 (A100709)	30-1000 MHz	10/16	10/17
<input type="checkbox"/> Antenna	EMCO	3143 (9607-1277)	20-1200 MHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8591EM (3628A00871)	9kHz-1.8GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP	8562A (3051A05950)	9kHz-110GHz	5/16	5/17
<input type="checkbox"/> Analyzer	HP External Mixers	11571, 11970	25GHz-110GHz	5/16	5/17
<input checked="" type="checkbox"/> Analyzer	Rohde & Schwarz	ESU40 (100108)	20Hz-40GHz	5/16	5/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PA-010 (171003)	100Hz-30MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	CPPA-102 (01254)	1-1000 MHz	10/16	10/17
<input checked="" type="checkbox"/> Amplifier	Com-Power	PAM-118A (551014)	0.5-18 GHz	10/16	10/17

Units of Measurements

Conducted EMI Data is in dB μ V; dB referenced to one microvolt

Radiated EMI Data is in dB μ V/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured

A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses

RFS (dB μ V/m @ 3m) = FSM (dB μ V) + A.F. (dB) - Gain (dB)

Environmental Conditions

Ambient Temperature 20.9° C

Relative Humidity 35%

Atmospheric Pressure 1008.7 mb

Intentional Radiators

As per 47CFR part 15 subpart E and Industry Canada RSS-247, Issue 1, the following information is submitted for consideration and demonstration of compliance with regulation and standards.

Antenna Requirements

The EUT provides reverse polarity SMA connectors for use with authorized antennas. The design requires professional installation for compliance with unique antenna port connector requirements. The antenna connection provision complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured on the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in restricted bands. Emissions were investigated while the EUT was located on the OATS using appropriate antennas or pyramidal horns, amplification stages, and spectrum analyzer receiver. Peak and average amplitudes of frequencies above 1000 MHz were compared to the required limits with worst-case data presented below. Test procedures of ANSI C63.10-2013 were used during testing. No other significant emission was observed which fell into the restricted bands of operation. Computed radiated emission values take into account the measured radiated field strength, receive antenna correction factor, amplifier gain stage, and test system cable losses.

Table 1 Radiated Emissions in Restricted Bands Data (MT-482016/N/A)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
U-NII-1 Operation Worst-case							
5150.0	46.3	N/A	32.4	58.8	N/A	43.6	54.0
5350.0	45.6	N/A	32.4	52.5	N/A	38.8	54.0
10360.0	51.4	N/A	38.1	47.0	N/A	33.8	54.0
10440.0	45.9	N/A	33.1	47.5	N/A	34.5	54.0
10480.0	51.4	N/A	37.0	47.1	N/A	34.1	54.0
20720.0	49.0	N/A	36.5	49.8	N/A	36.6	54.0
U-NII-3 Operation 802.11a							
11490.0	48.1	N/A	35.0	47.7	N/A	35.0	54.0
11570.0	48.4	N/A	35.0	48.2	N/A	35.2	54.0
11650.0	47.5	N/A	34.8	47.7	N/A	34.8	54.0
22980.0	50.0	N/A	37.0	49.3	N/A	36.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 2 Radiated Emissions in Restricted Bands Data (PA58-24-ANT)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
U-NII-1 Operation Worst-case							
5150.0	51.8	N/A	34.3	71.1	N/A	52.1	54.0
5350.0	45.5	N/A	32.5	59.3	N/A	45.6	54.0
10360.0	48.5	N/A	35.3	47.6	N/A	34.7	54.0
10440.0	45.3	N/A	32.5	48.1	N/A	34.9	54.0
10480.0	45.9	N/A	32.9	48.2	N/A	35.3	54.0
20720.0	49.6	N/A	36.6	49.9	N/A	36.5	54.0
U-NII-3 Operation 802.11a							
11490.0	48.2	N/A	35.1	48.0	N/A	35.1	54.0
11570.0	48.2	N/A	35.0	48.2	N/A	35.1	54.0
11650.0	47.5	N/A	34.6	48.3	N/A	35.0	54.0
22980.0	49.5	N/A	36.4	49.8	N/A	36.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 3 Radiated Emissions in Restricted Bands Data (HDDA5W-32-DP2)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
U-NII-1 Operation Worst-case							
5150.0	50.2	N/A	34.9	62.1	N/A	46.1	54.0
5350.0	45.7	N/A	33.0	56.7	N/A	43.3	54.0
10360.0	47.3	N/A	34.3	58.4	N/A	41.6	54.0
10440.0	45.7	N/A	32.8	57.5	N/A	42.4	54.0
10480.0	47.0	N/A	34.2	51.4	N/A	37.4	54.0
20720.0	49.2	N/A	36.6	49.7	N/A	36.5	54.0
U-NII-3 Operation 802.11a							
11490.0	45.4	N/A	33.2	48.1	N/A	35.6	54.0
11570.0	46.4	N/A	33.0	48.4	N/A	34.9	54.0
11650.0	50.1	N/A	33.7	47.6	N/A	34.7	54.0
22980.0	45.4	N/A	37.3	49.7	N/A	36.9	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the emissions requirements of 47CFR 15.205, RSS-GEN and RSS-247, Issue 1 Intentional Radiators. The EUT provided a worst-case minimum margin of -1.9 dB below the emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.



Testing
NVLAP Lab Code 200087-0

AC Line Conducted Emissions Procedure

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied supporting equipment AC/DC adapter provided direct current power to the POE, which routed power to the EUT, was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ f capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the EUT AC Line Conducted emissions.

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 2

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122

Test to: 47CFR, 15.407, RSS-247

File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD

Date: March 3, 2017

Page 29 of 84

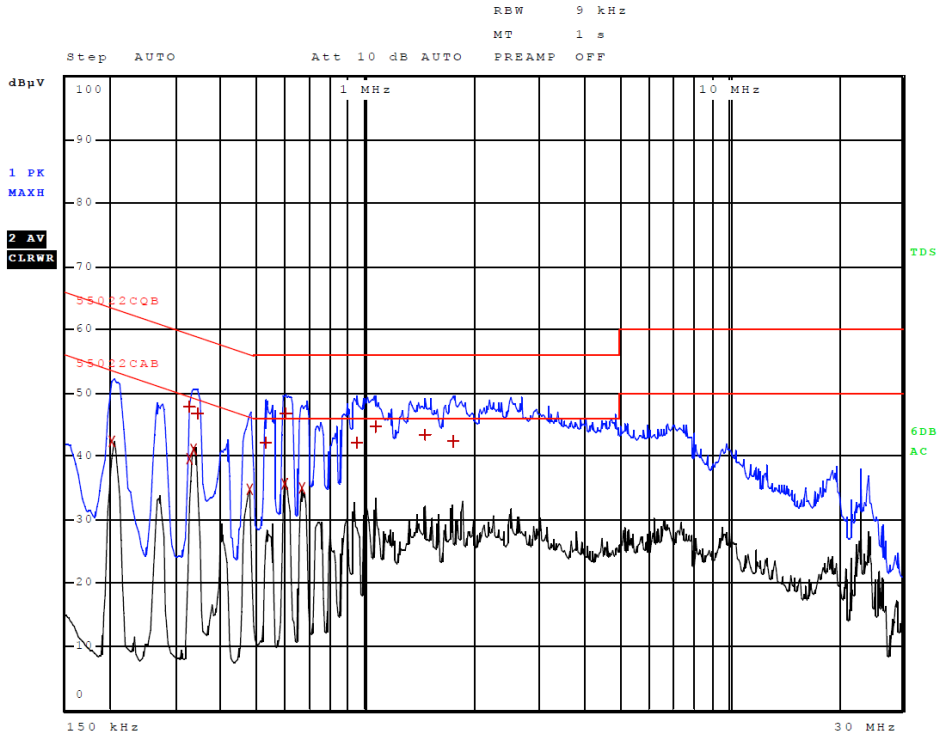


Figure 1 AC Line Conducted Emissions Line 1

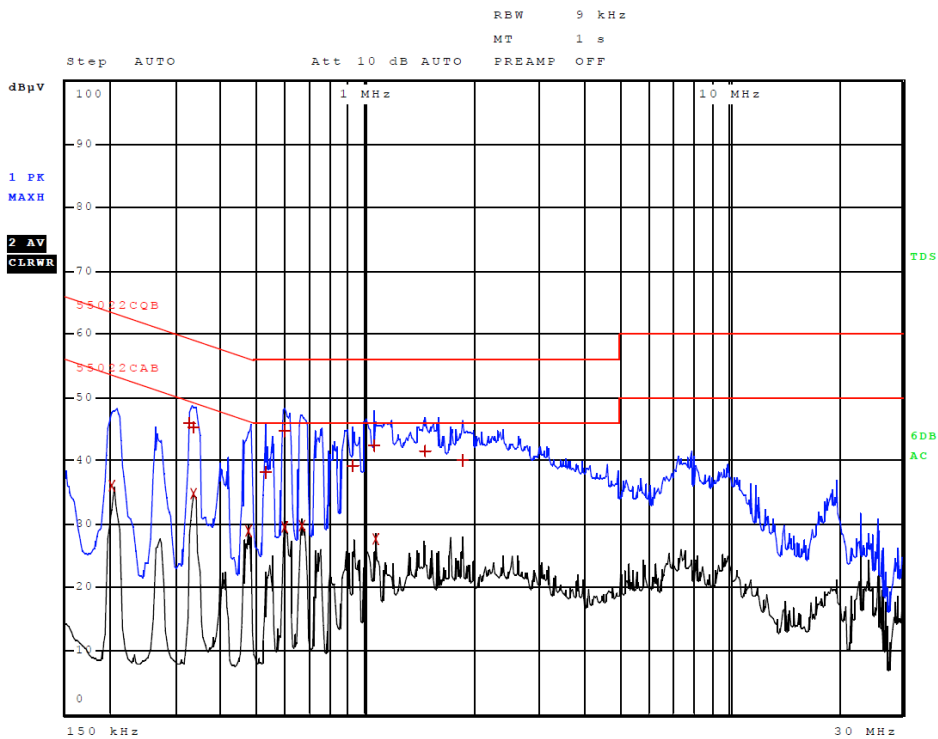


Figure 2 AC Line Conducted Emissions Line 2

Table 4 AC Line Conducted Emissions Data (Highest Emissions Line L1)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	202.000000000 kHz	42.43	Average	-11.09
1	330.000000000 kHz	47.80	Quasi Peak	-11.65
2	330.000000000 kHz	39.52	Average	-9.93
2	338.000000000 kHz	41.04	Average	-8.21
1	342.000000000 kHz	46.78	Quasi Peak	-12.38
2	478.000000000 kHz	34.78	Average	-11.60
1	526.000000000 kHz	42.12	Quasi Peak	-13.88
2	594.000000000 kHz	35.62	Average	-10.38
1	598.000000000 kHz	46.79	Quasi Peak	-9.21
2	662.000000000 kHz	35.05	Average	-10.95
1	942.000000000 kHz	42.12	Quasi Peak	-13.88
1	1.058000000 MHz	44.66	Quasi Peak	-11.34
1	1.462000000 MHz	43.41	Quasi Peak	-12.59
1	1.746000000 MHz	42.29	Quasi Peak	-13.71

Other emissions present had amplitudes at least 20 dB below the limit.

Table 5 AC Line Conducted Emissions Data (Highest Emissions Line L2)

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
2	202.000000000 kHz	35.99	Average	-17.54
1	330.000000000 kHz	45.85	Quasi Peak	-13.60
2	334.000000000 kHz	34.78	Average	-14.57
1	338.000000000 kHz	45.26	Quasi Peak	-13.99
2	474.000000000 kHz	28.79	Average	-17.66
1	526.000000000 kHz	38.08	Quasi Peak	-17.92
2	594.000000000 kHz	29.58	Average	-16.42
1	594.000000000 kHz	44.63	Quasi Peak	-11.37
2	662.000000000 kHz	29.63	Average	-16.37
1	918.000000000 kHz	39.20	Quasi Peak	-16.80
1	1.054000000 MHz	42.28	Quasi Peak	-13.72
2	1.058000000 MHz	27.58	Average	-18.42
1	1.454000000 MHz	41.54	Quasi Peak	-14.46
1	1.846000000 MHz	40.08	Quasi Peak	-15.92

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT test system demonstrated compliance to the conducted emissions requirements of 47CFR 15.207, RSS-247 Issue 1 and RSS-GEN. The EUT demonstrated minimum margin of -8.2 dB below the limit. Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

General Radiated Emissions Procedure

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Loop from 9 kHz to 30 MHz, Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or Double Ridge or pyramidal horns and mixers above 1 GHz, notch filters, and appropriate amplifiers and external mixers were utilized.

Table 6 General Radiated Emissions from EUT Data (Highest Emissions)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
45.7	38.9	21.5	N/A	49.3	36.2	N/A	40.0
47.8	40.2	24.1	N/A	47.7	37.4	N/A	40.0
50.4	39.5	26.4	N/A	46.0	35.9	N/A	40.0
53.8	41.7	27.8	N/A	40.1	27.7	N/A	40.0
58.7	41.4	28.2	N/A	39.8	25.2	N/A	40.0
64.2	39.5	24.3	N/A	38.9	25.7	N/A	40.0
113.1	47.2	37.5	N/A	48.1	38.4	N/A	43.5
137.2	43.6	33.3	N/A	49.3	31.2	N/A	43.5
159.7	45.2	31.2	N/A	45.2	33.4	N/A	43.5
164.0	45.0	31.2	N/A	45.4	33.5	N/A	43.5
191.8	49.7	38.4	N/A	43.7	30.8	N/A	43.5
197.6	50.5	42.6	N/A	45.7	34.4	N/A	43.5
199.1	50.7	41.6	N/A	45.1	33.2	N/A	43.5

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range below 1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR part 15 and Industry Canada RSS-247 Issue 1 Intentional Radiators. The EUT demonstrated a minimum margin of -0.9 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the 5150-5250 and 5725-5850 MHz Frequency U-NII-1 and U-NII-3 Bands

Testing followed FCC KDB 789033 D02 General U-NII Test Procedures New Rules v01r03.

The test sample provided direct connection to the antenna ports. A power meter was used to measure fundamental transmitter output power. A spectrum analyzer / receiver was used to produce plots and make other antenna port conducted measurements for compliance testing.

Test software (Winbox version 3.10) was used to operate the transmitter. This software provided the ability to set test channel, operational mode, and modulation scheme. The antenna ports were connected to coaxial cable with 50-ohm attenuator and receiver, spectrum analyzer, or power meter during testing. The test sample was placed on a turntable elevated as required above the ground plane as required at a distance of 3 meters from the FSM antenna located on the OATS for testing radiated emissions. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz were measured using a spectrum analyzer. Emissions data was recorded from the measurement results. Data presented reflects measurement result corrected to account for measurement system gains and losses. Plots were made of transmitter performance for reference and demonstration of compliance.

In addition, all Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual. The manufacturer has attested the equipment operates within the required frequency spectrum under normal operational conditions. The design provides two transmitter chains and antenna port connections with operational capabilities in 2 frequency bands (5180-5240 MHz and 5745-5825 MHz). This report documents emissions governed under the new rules for U-NII-1 and U-NII-3 bands operating in the 5180-5240 and 5745-5825 MHz frequency bands.

The design provides 2 transmitter chains which may be which may be correlated. Summing the gain of the highest gain antenna system (32 dBi) would provide for 3.6 dBi gain (Directional gain = $G_{ANT} + 10 \log (N_{ANT})$ dBi = $32 + 10 \log (2) = 32 + 3 = 35$ dBi

Professional installers are instructed to place antenna gain values in the locked software, which reduces the transmitter out power to compliant levels as presented in the operational description.

Per 15.407 Technical Requirements

(a) power limitations

(1) For the Band 5.15-5.25 GHz

- (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

Per KDB 789033 D02 General UNII Test Procedures New Rules v01r03,

Section II

H. Measurement of emission at elevation angle higher than 30° from horizon.

This restriction leads to a general requirement for the antenna pattern: if the EIRP within 3-dB elevation beamwidth of any radiation lobe is higher than 125 mW, this lobe must be controlled, either mechanically or electrically, so that the 3-dB elevation beamwidth of this lobe is below 30° elevation angle relative to horizon.

For the purposes of compliance, information for all the antenna types must be included in the filing.

In order for antennas to be considered of similar type, the antenna patterns must also be similar as well as other characteristics of the antenna. Antenna information has been included in the application in support of this requirement.

Note: For the sake of clarity, we define the elevation angle where 0° is horizontal and 90° is straight-up.

1. For fixed infrastructure, not electrically or mechanically steerable beam antenna

- a) If elevation plane radiation pattern is available:
 - i) Determine the device intended mounting elevation angle and define 0° reference angle on the elevation plane radiation pattern.
 - ii) Indicate any radiation pattern between 30° and 90° which has highest gain.
 - iii) Calculate the EIRP based on this highest gain and conducted output power.
 - iv) Compare to the limit of 125 mW to find compliance.
 - v) Include the elevation pattern data in the application filing with the test report to show how the calculations are made.
- b) If elevation plane radiation pattern is not available, but the antenna type (such as dipole omnidirectional, Yagi, parabolic, or sector antenna) has symmetrical elevation plane pattern referenced at main beam and all lobes on the main beam elevation plane have highest gains, then the following measurement method is acceptable to determine compliance:
 - (i) Determine the device's intended mounting elevation angle referenced to the horizon.
 - (ii) Rotate EUT antenna by 90° around the main beam axis in horizontal position to transform measurement in elevation angle into azimuth angle and define 0° reference angle based on device's intended mounting elevation angle.
 - (iii) Move test antenna along the horizontal arc, or rotate the turn table with EUT antenna placed at the center, between 30° and 90° relative to the 0° reference angle, and then continuing down from 90° to 30° on the other side of the pattern, while maintaining the test antenna pointing with constant distance to the EUT antenna and search for the spot which has the highest


measured emission. Both horizontal and vertical polarization shall be investigated to find out the maximum radiated emission level.

Note: Moving of test antenna along the horizontal arc, or rotating the turn table, shall be performed in angular step size as small as possible, but not larger than 3°.

- (iv) Calculate the EIRP based on the highest measured emission and compare to the limit of 125 mW to determine compliance.
- (v) The antenna pattern measurements should be included in the filing.


Elevation Compliance Omni Directional (8.5 dBi) MT-482016/N/A

Elevation Radiation Pattern indicates no additional reduction would be required for use with this antenna. The transmitter output power provides 13 dBm and the antenna gain reduces the output power by 18 or greater dBi at elevations 30 degrees above the horizon. This provides power levels below the 21 dBm requirement without additional attenuation.

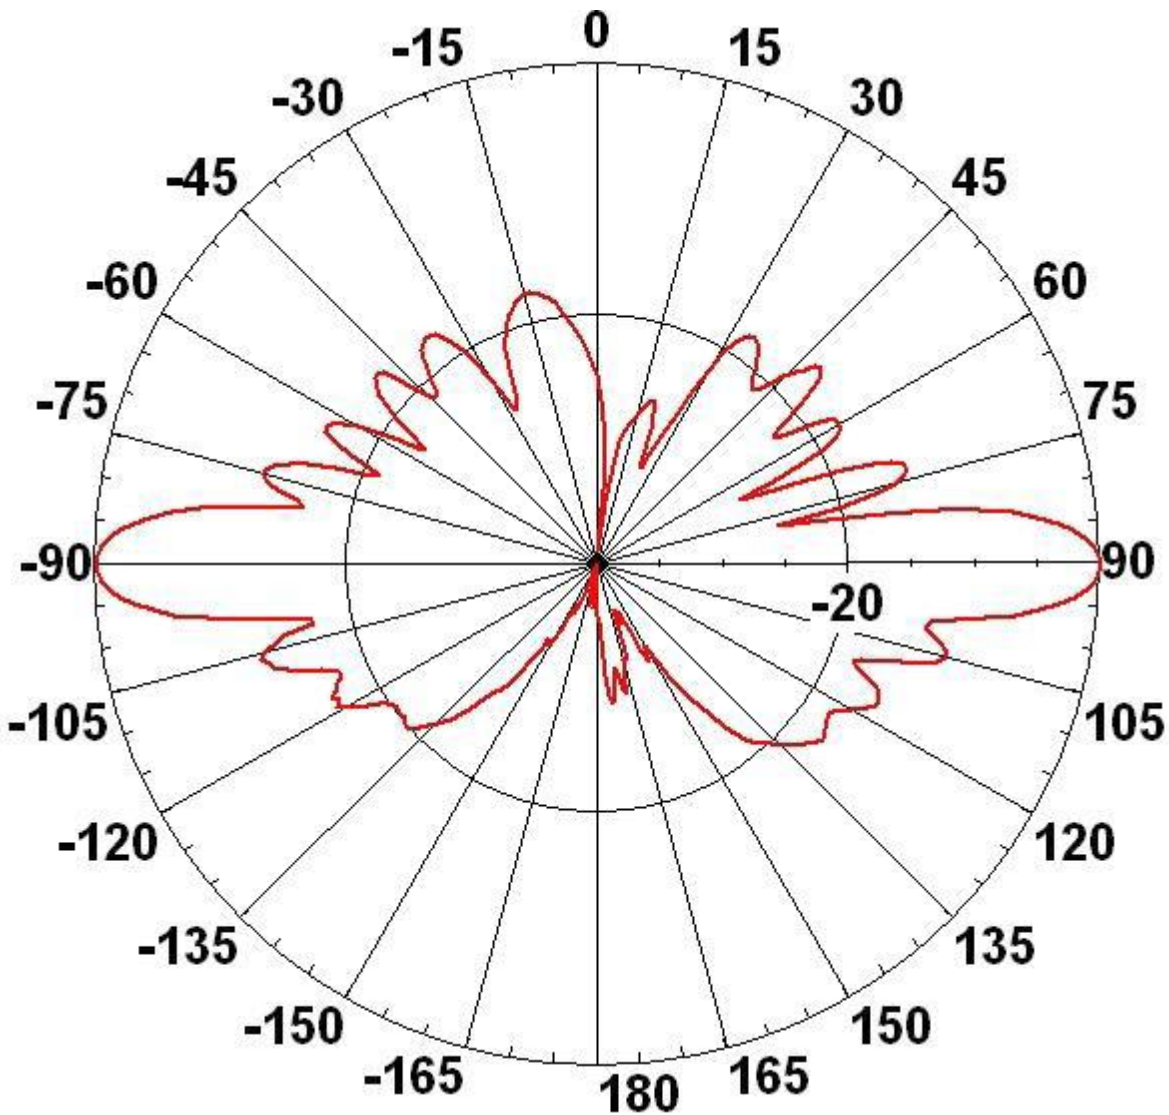


Elevation Compliance Panel Antenna (24 dBi) PA58-24-ANT

Elevation Radiation Pattern indicates no additional reduction would be required for use with this antenna. The transmitter output power provides 13 dBm and the antenna gain provides a maximum of 8 dBi gain at elevations 30 degrees above the horizon. This would not provide output power exceeding the 21 dBm requirement. This configuration would not require additional attenuation to comply with the 21 dBm requirement.

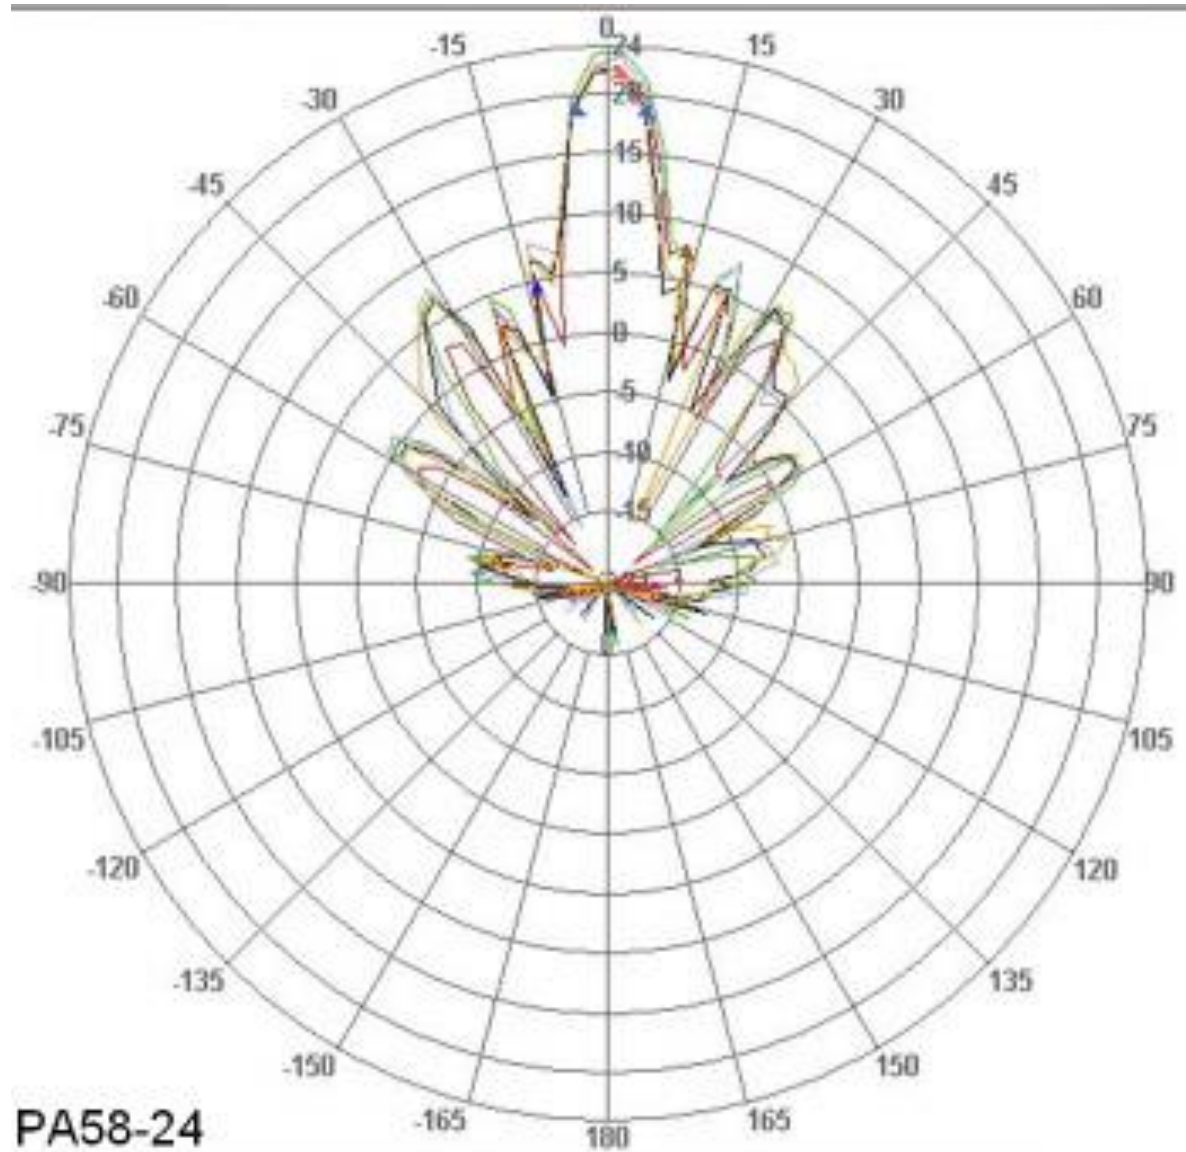

Elevation Compliance Dish Antenna (32 dBi) HDDA5W-32-DP2

Elevation Radiation Pattern indicates no additional reduction would be required for use with this antenna. The transmitter output power provides 13 dBm and the antenna gain provides a maximum of 0 dBi gain at elevations 30 degrees above the horizon. This would not provide output power exceeding the 21 dBm requirement. This configuration would not require additional attenuation to comply with the 21 dBm requirement.

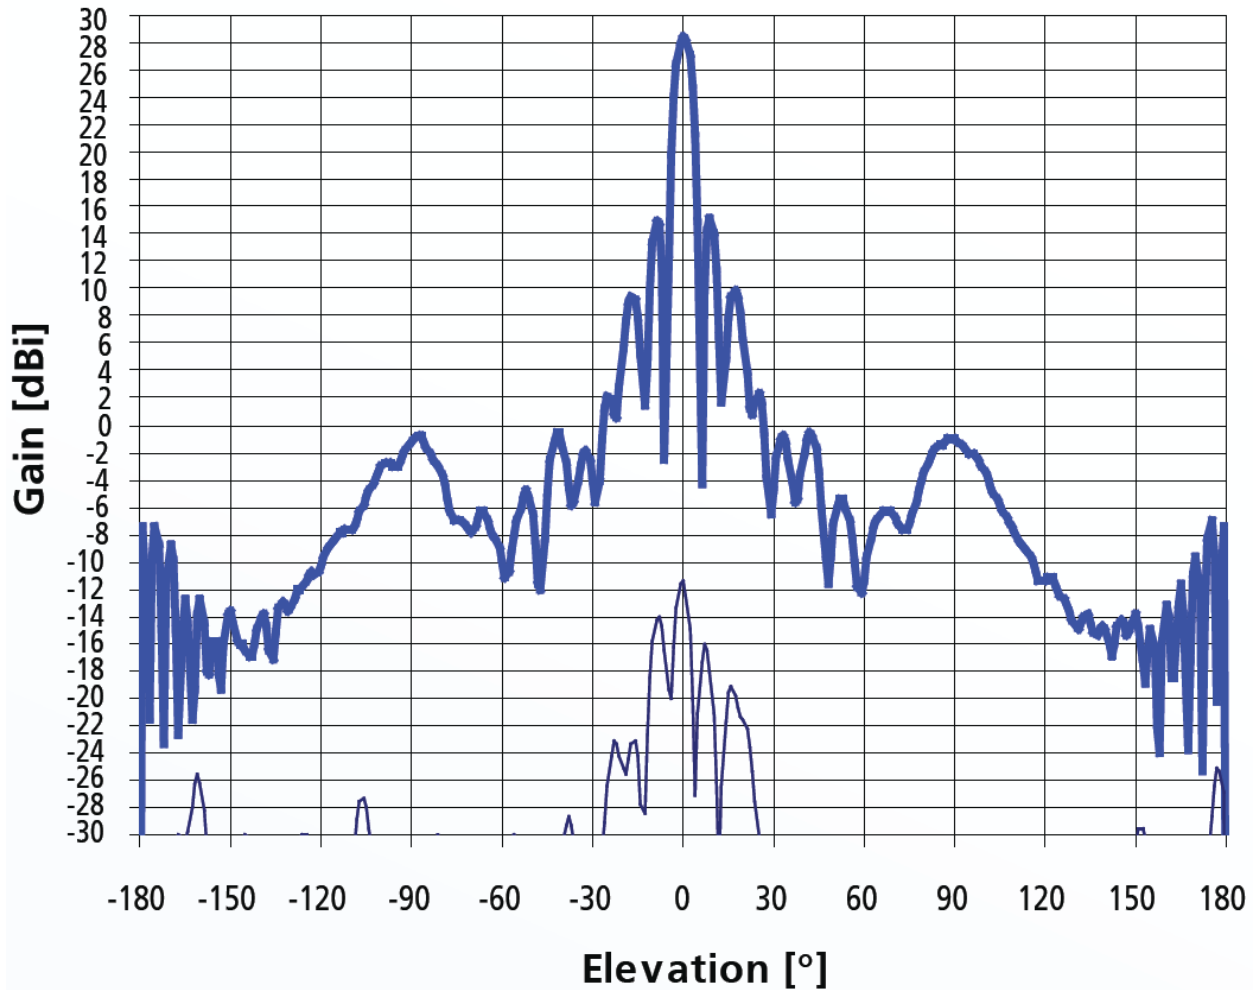

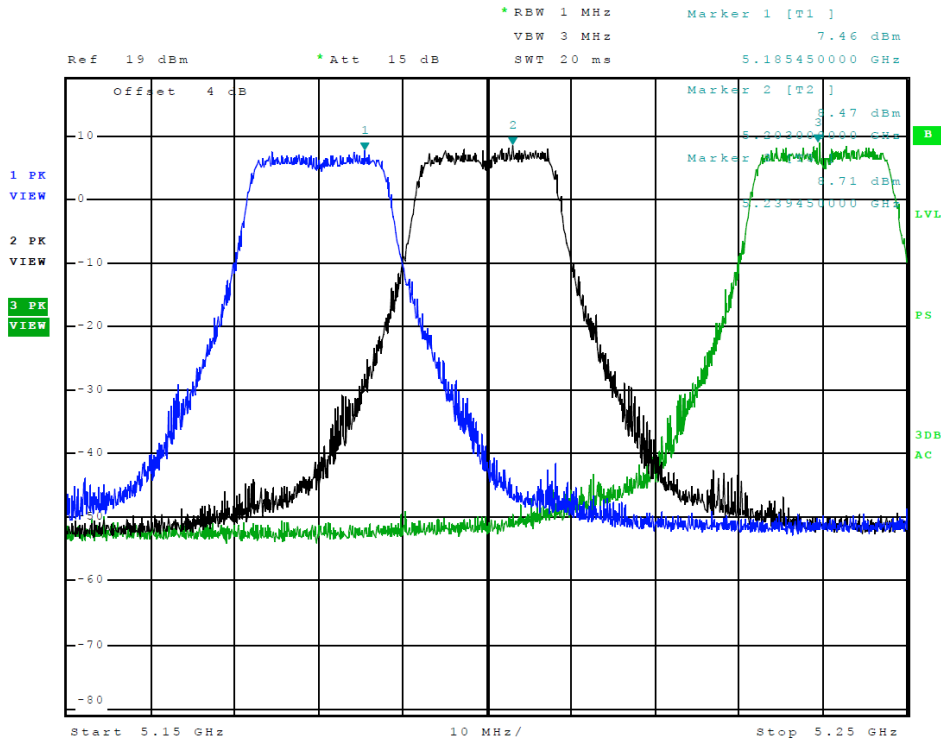


Figure 3 Plot of Transmitter Emissions (Chain 0, Across 5150-5250 MHz Band, 802.11a)

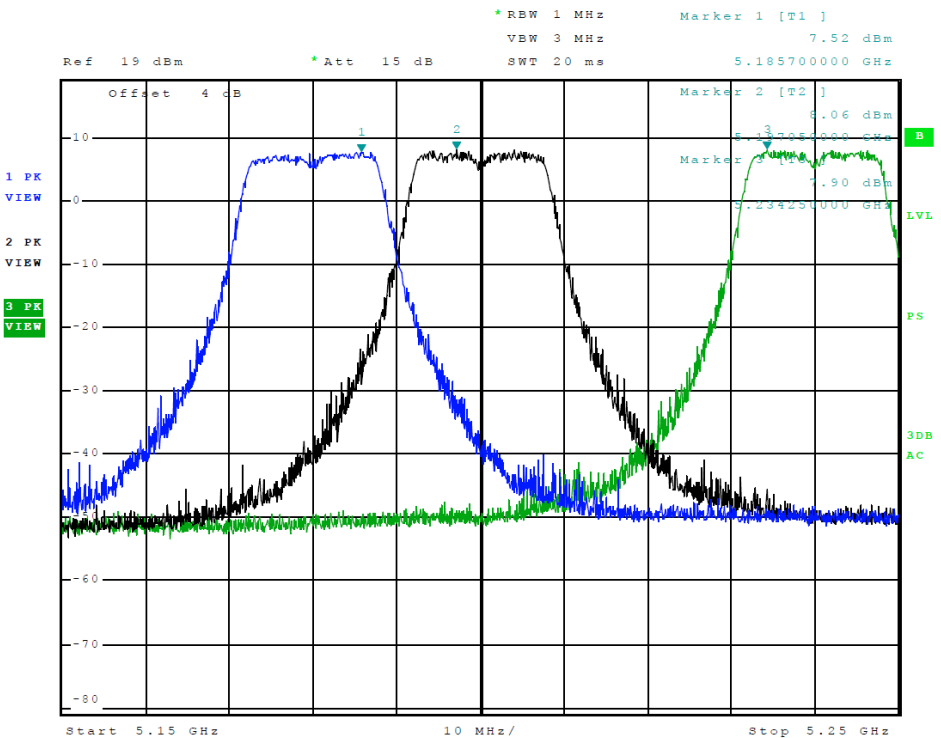


Figure 4 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11a)

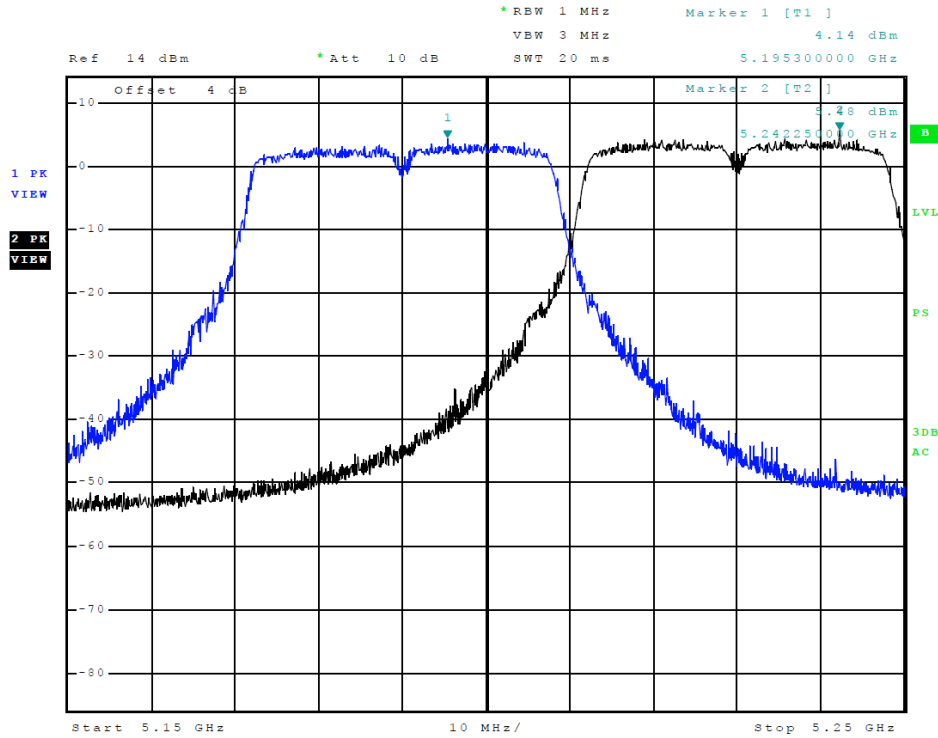


Figure 5 Plot of Transmitter Emissions (Chain0, Across 5150-5250 MHz Band, 802.11n40)

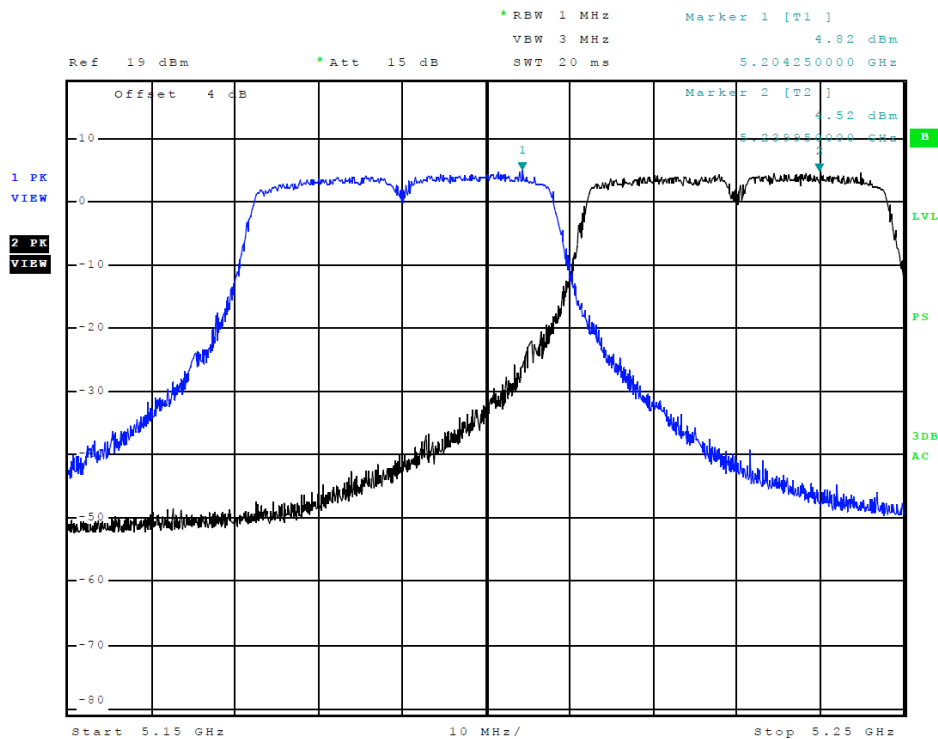


Figure 6 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11n40)

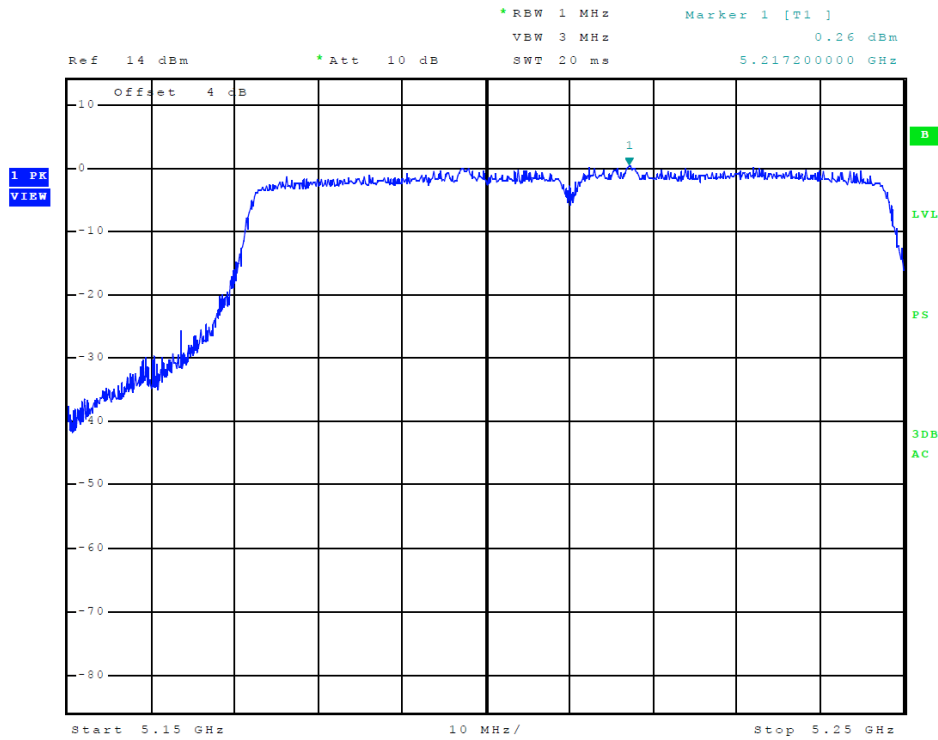


Figure 7 Plot of Transmitter Emissions (Chain 0, Across 5150-5250 MHz Band, 802.11ac)

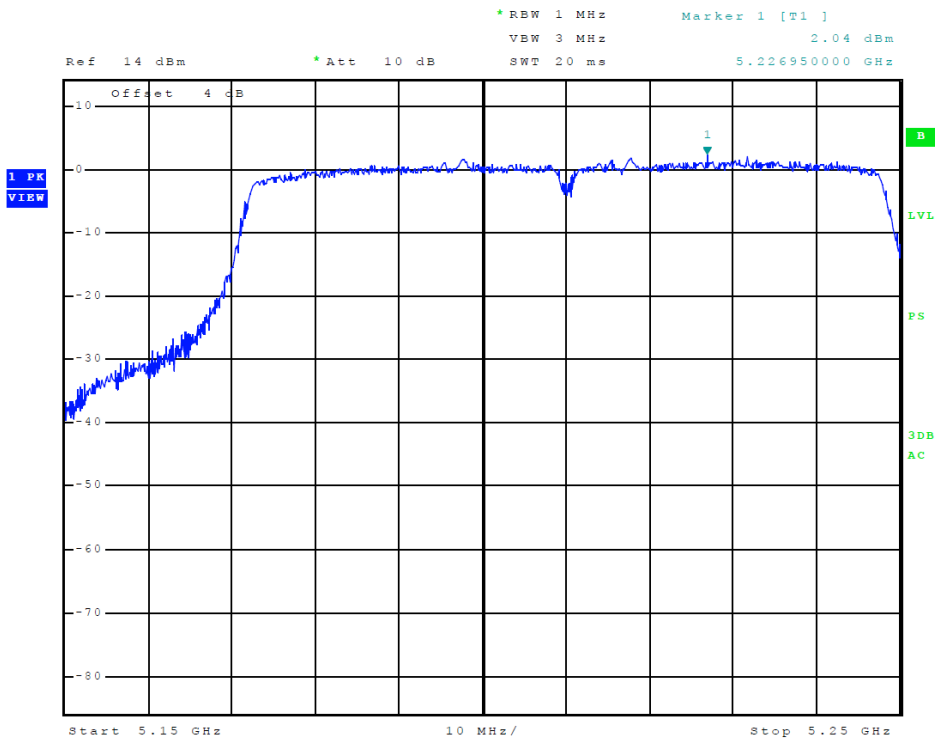


Figure 8 Plot of Transmitter Emissions (Chain 1, Across 5150-5250 MHz Band, 802.11ac)

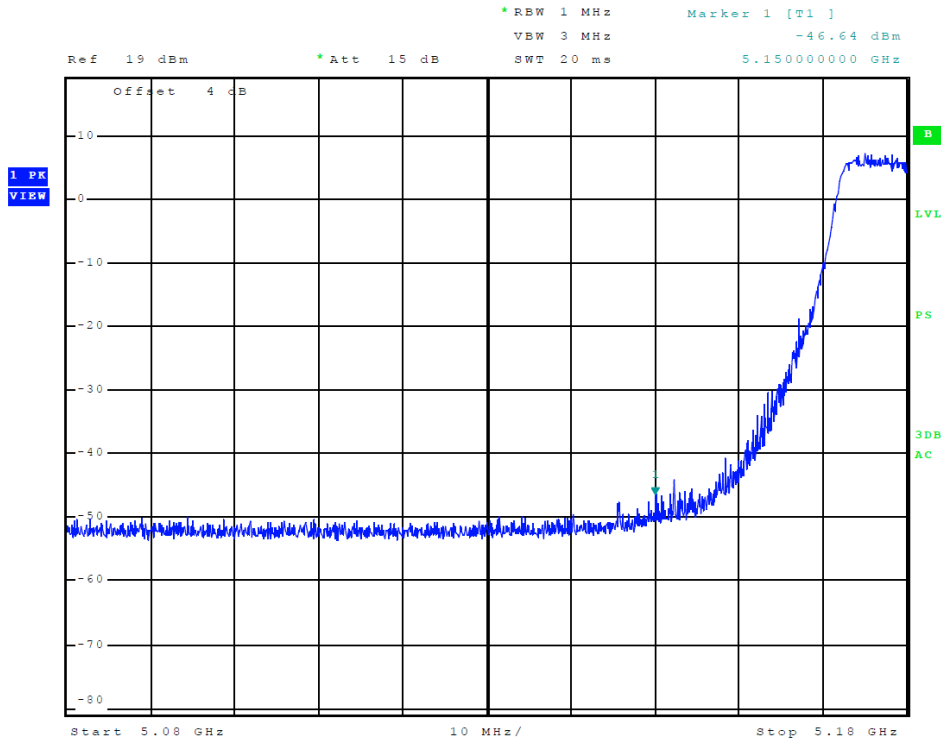


Figure 9 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11a)

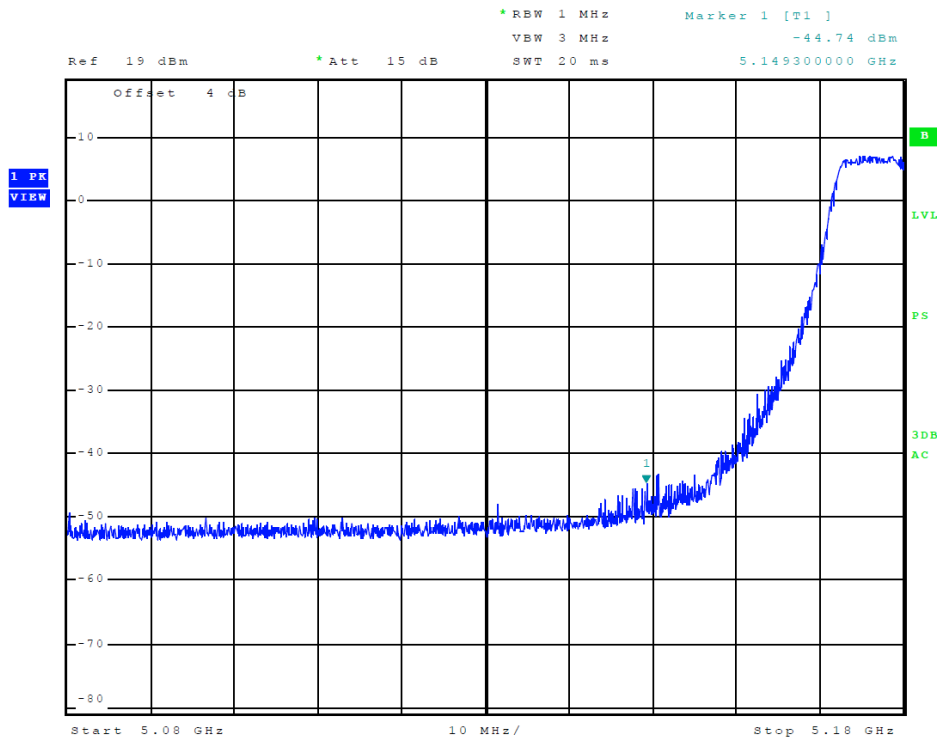


Figure 10 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11a)

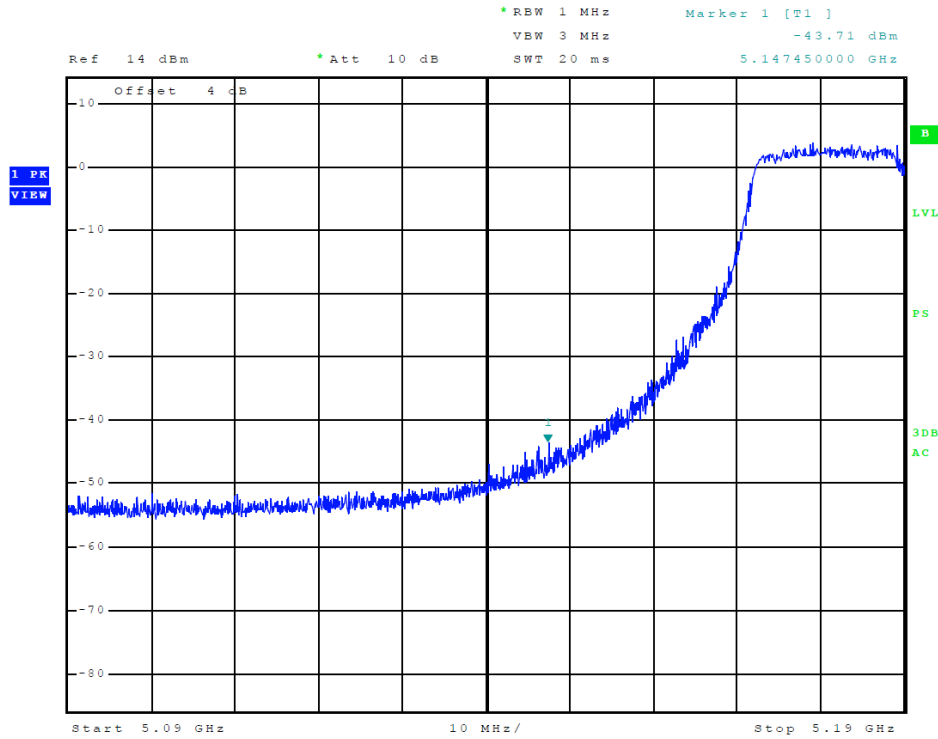


Figure 11 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11n40)

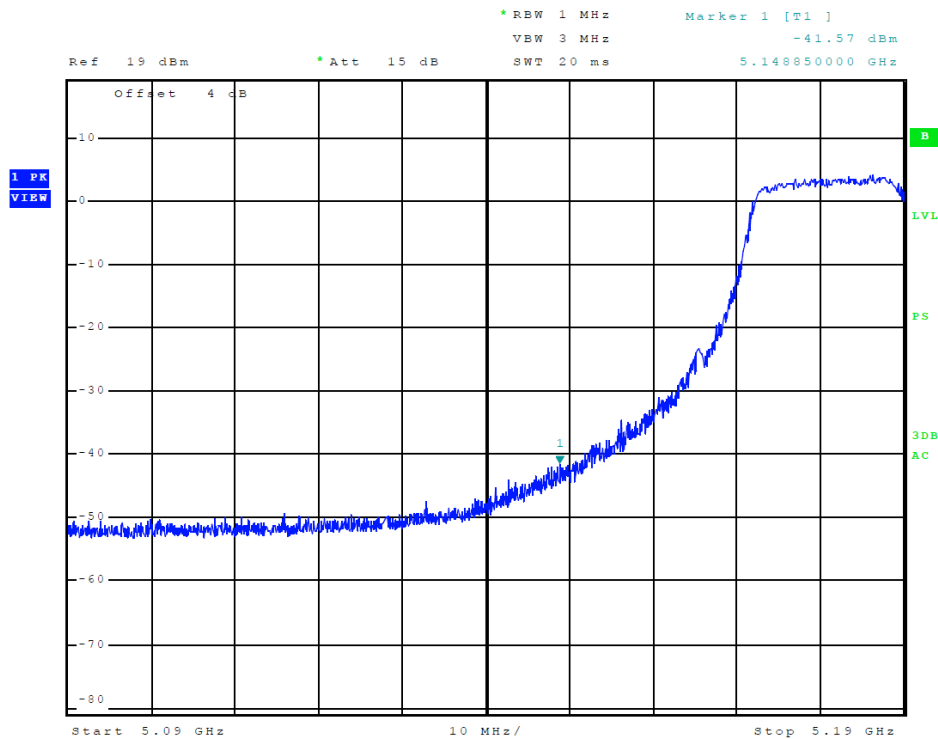


Figure 12 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11n40)

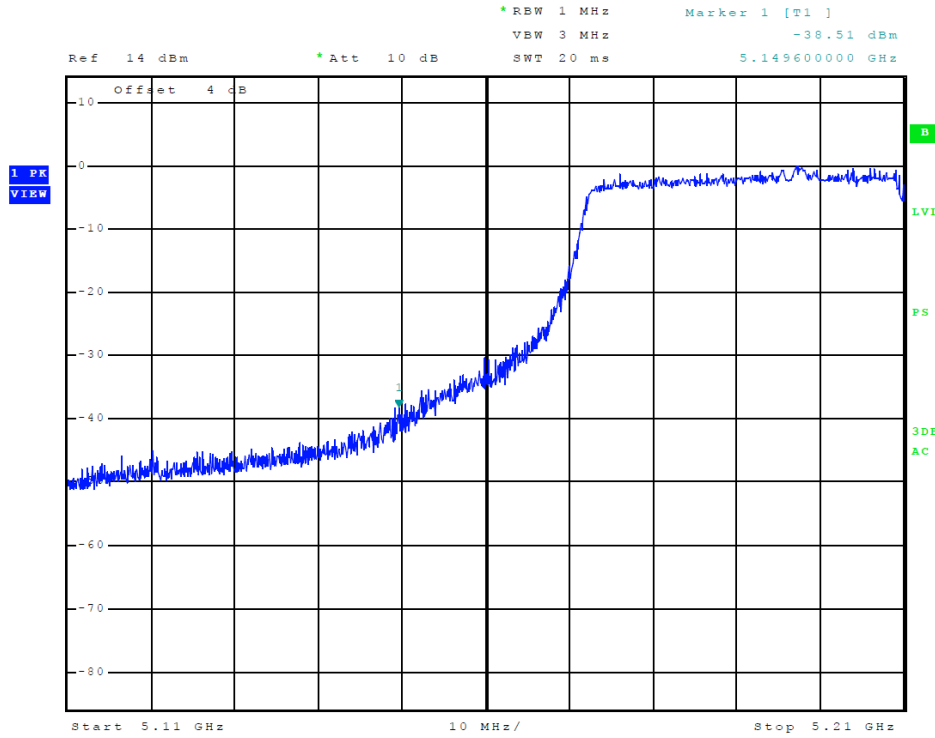


Figure 13 Plot of Transmitter Low Band Edge (Chain 0, 5150-5250 MHz Band, 802.11ac)

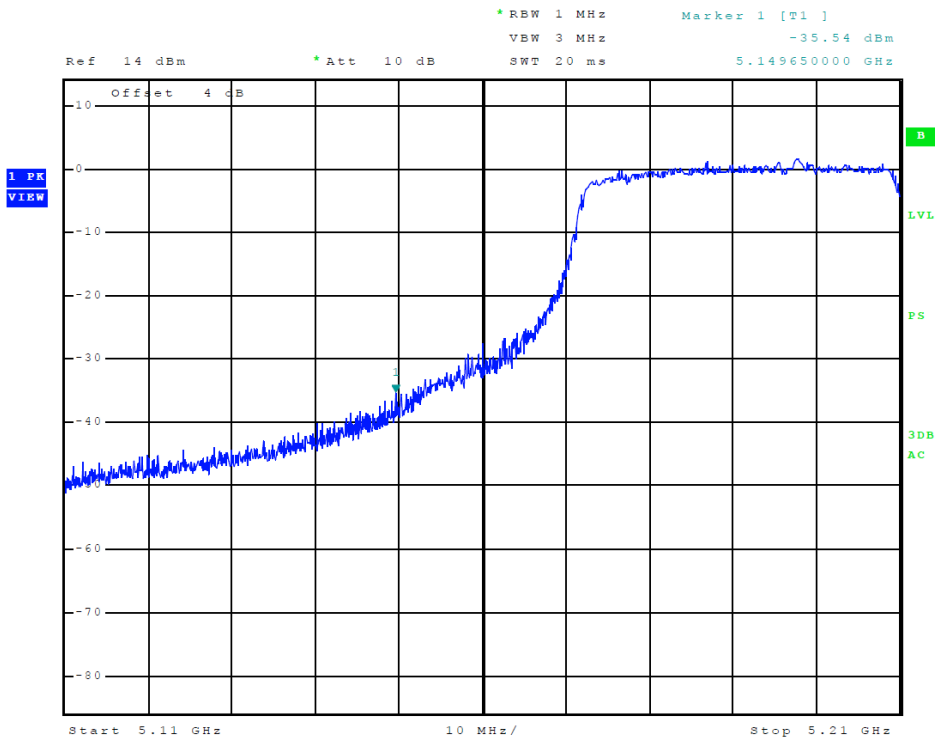


Figure 14 Plot of Transmitter Low Band Edge (Chain 1, 5150-5250 MHz Band, 802.11ac)

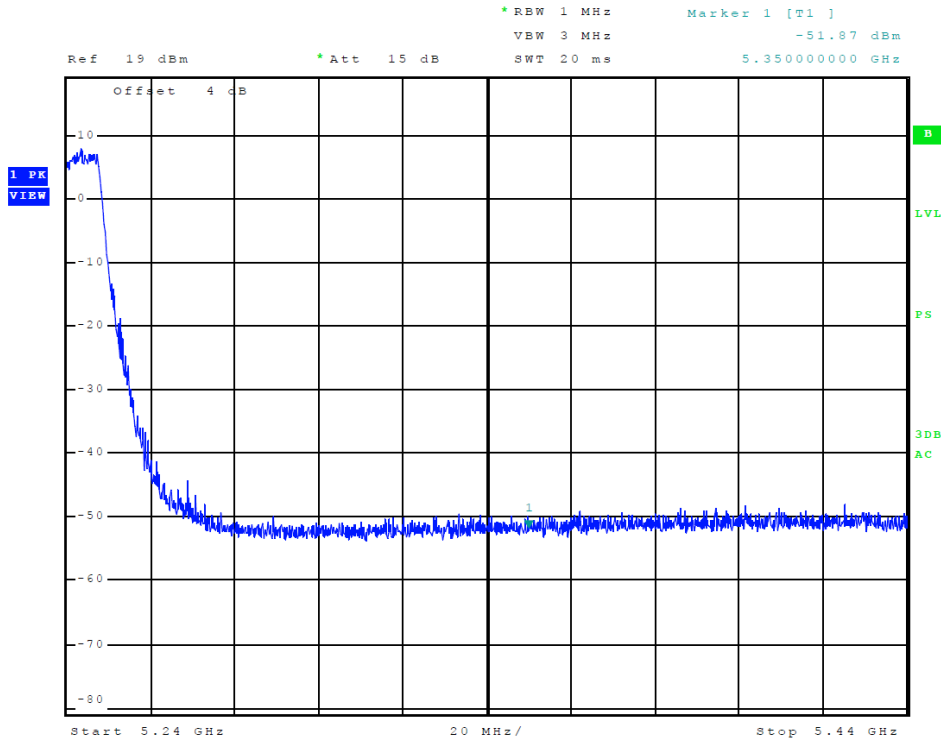


Figure 15 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11a)

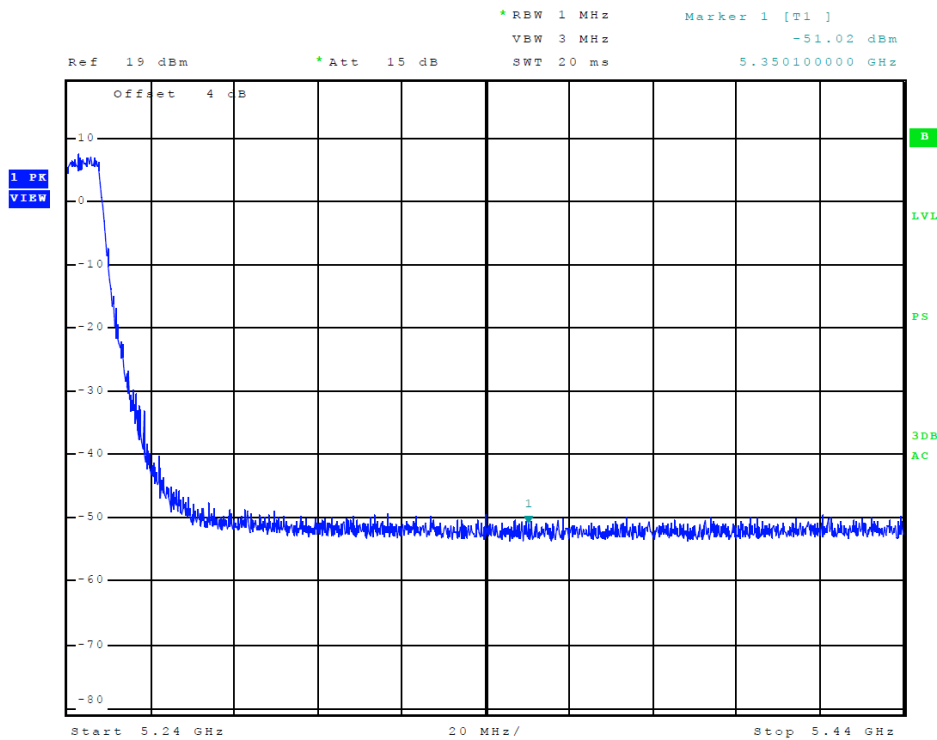


Figure 16 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11a)

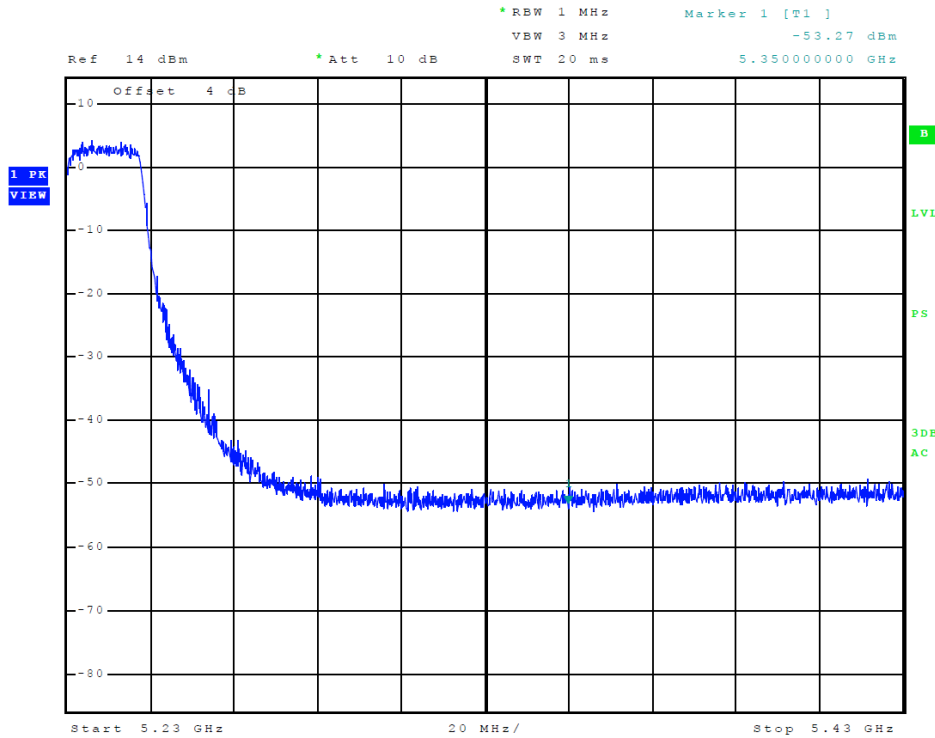


Figure 17 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11n40)

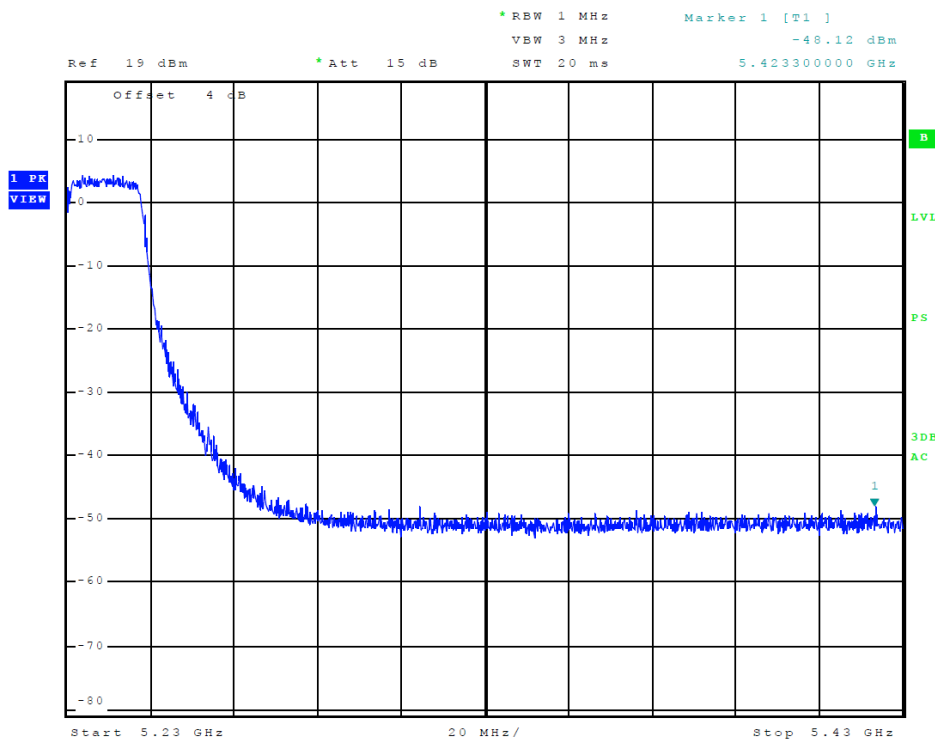


Figure 18 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11n40)

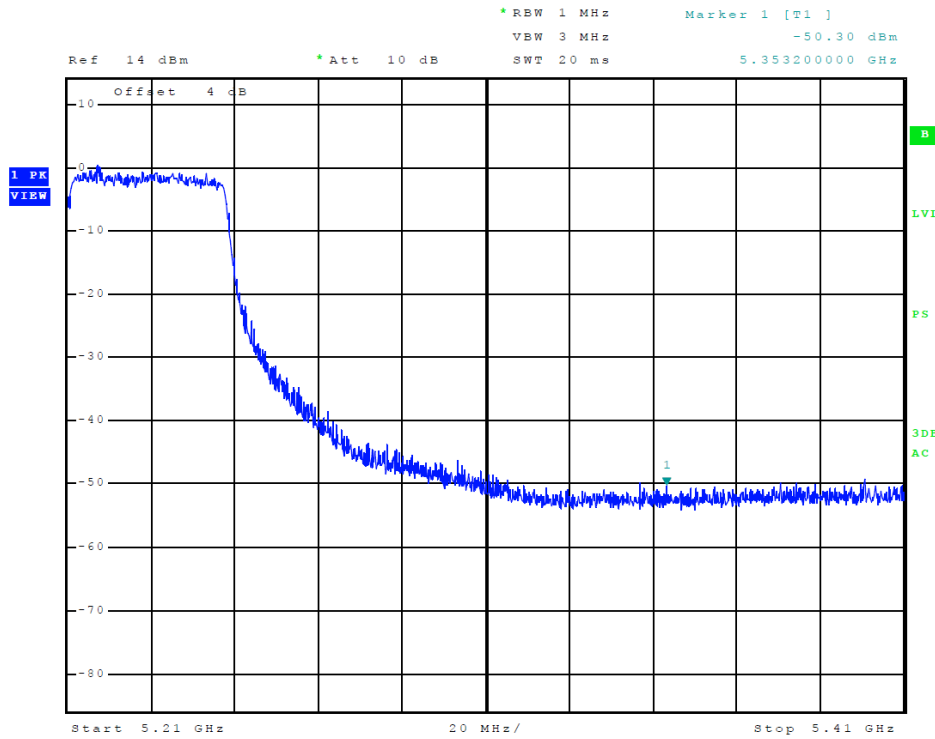


Figure 19 Plot of Transmitter High Band Edge (Chain 0, 5150-5250 MHz Band, 802.11ac)

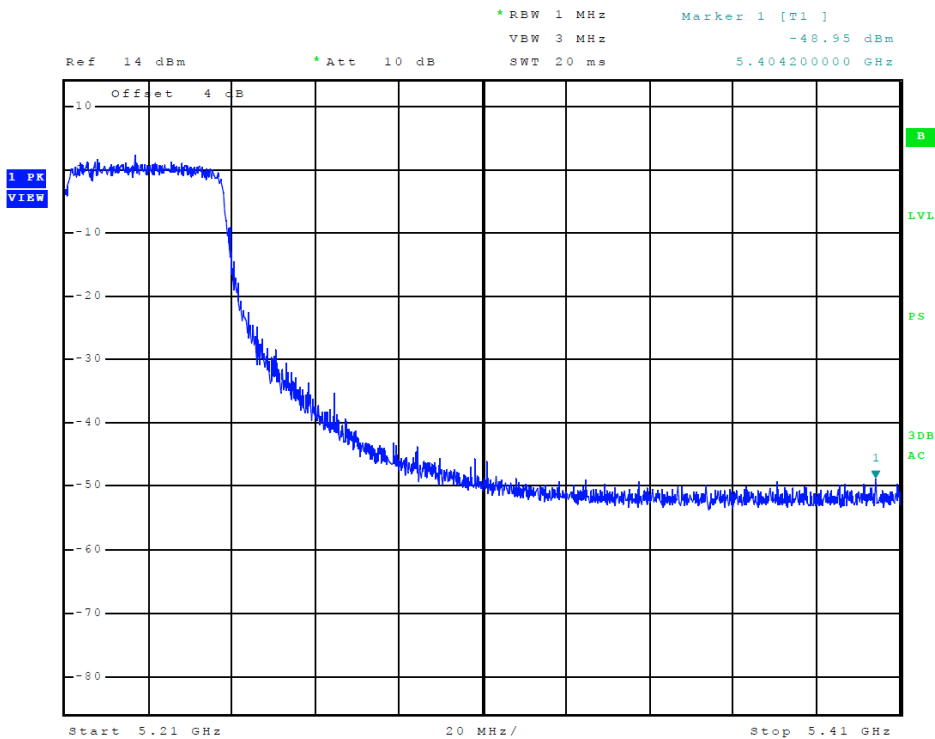


Figure 20 Plot of Transmitter High Band Edge (Chain 1, 5150-5250 MHz Band, 802.11ac)

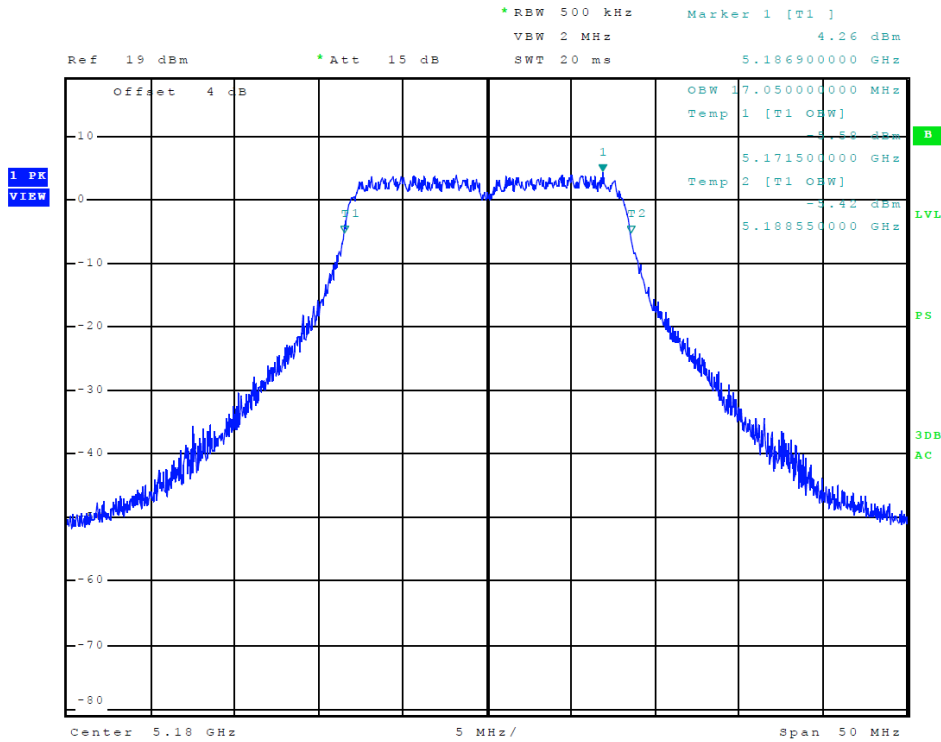


Figure 21 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11a, 99% OBW)

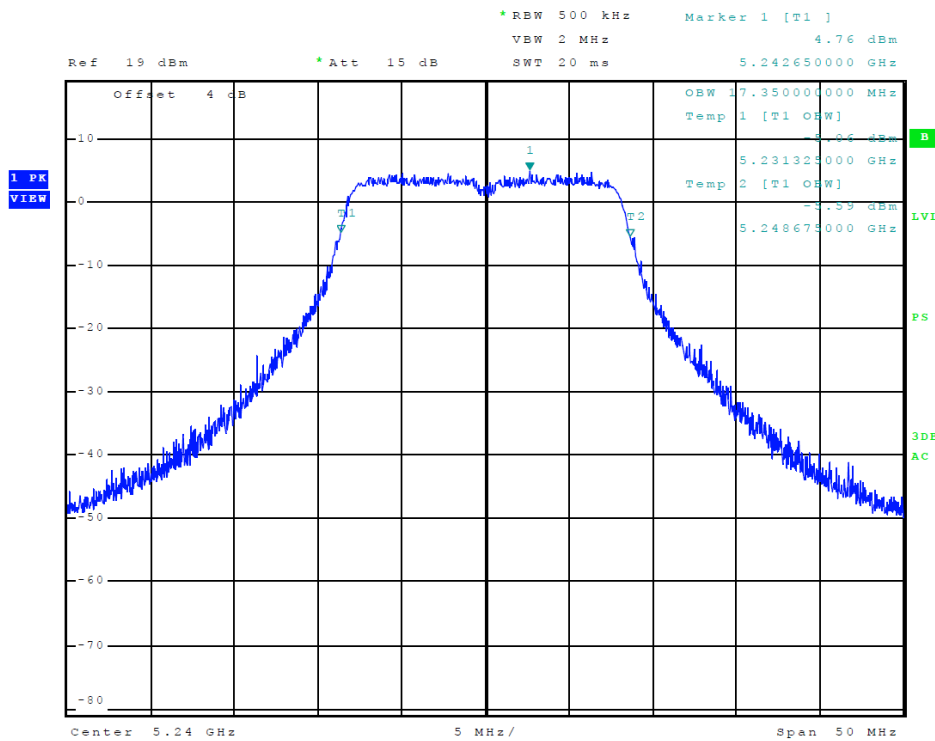


Figure 22 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11a, 99% OBW)

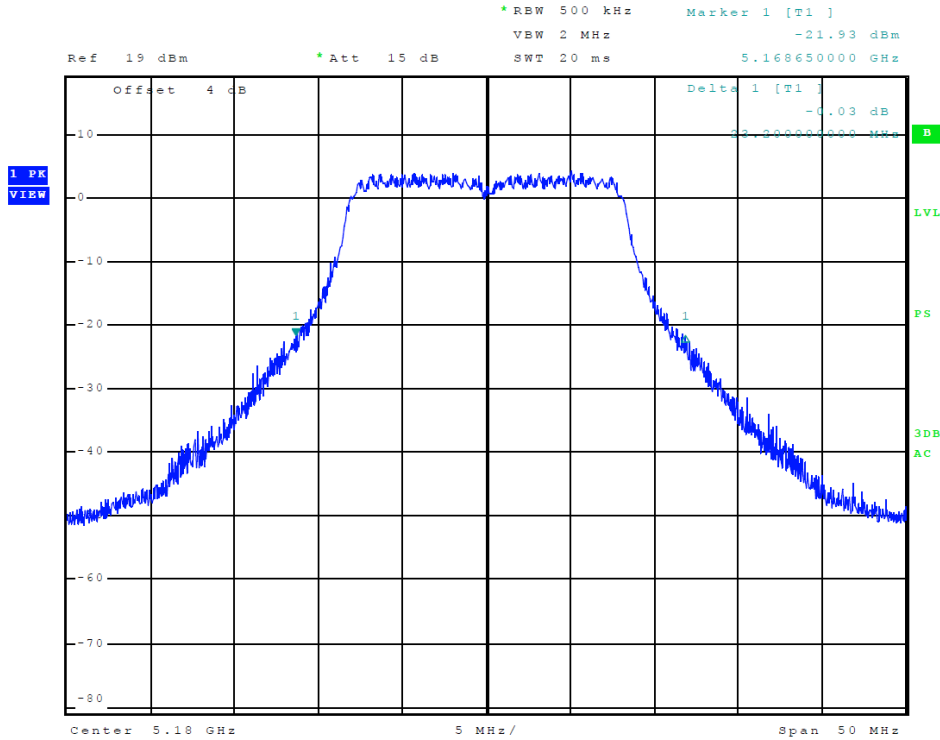


Figure 23 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11a, 26 dB OBW)

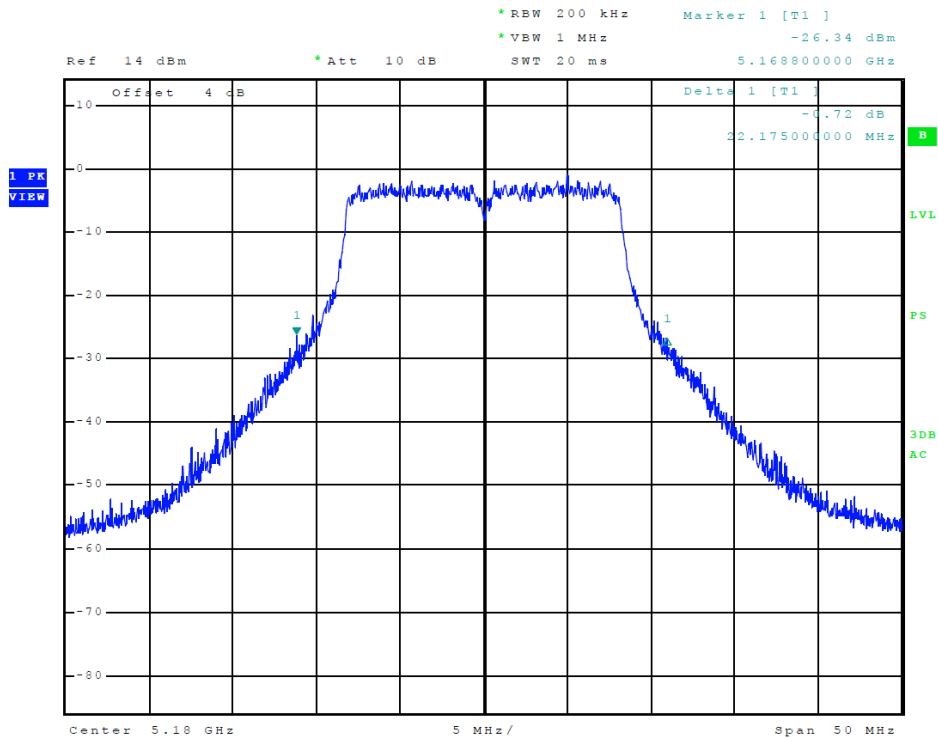


Figure 24 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11a, 26 dB OBW)

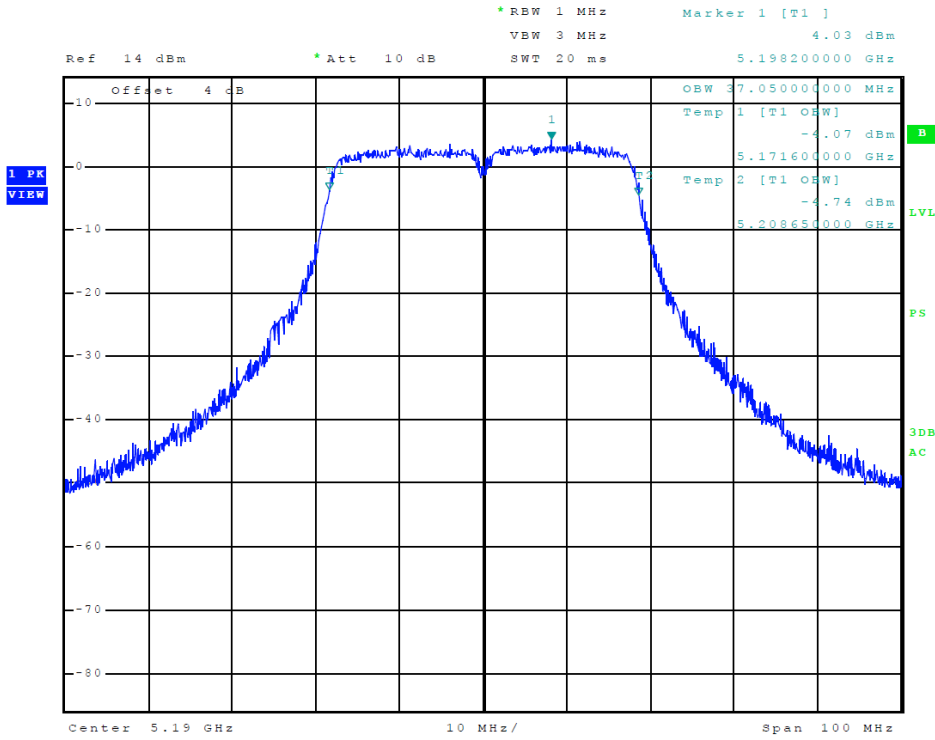


Figure 25 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11n40, 99% OBW)

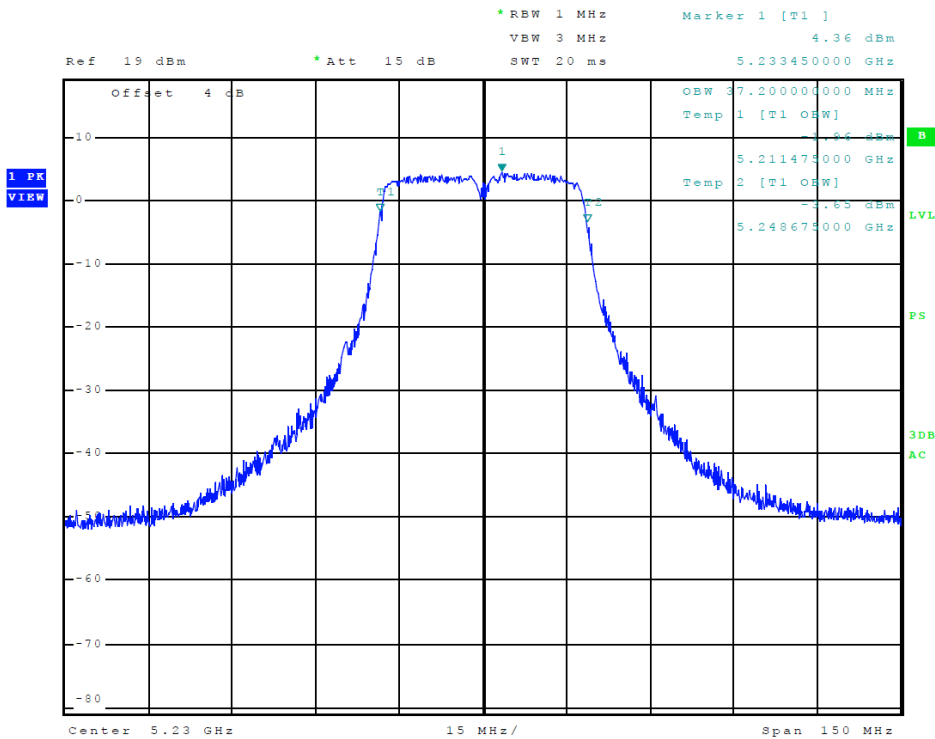


Figure 26 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11n40, 99% OBW)

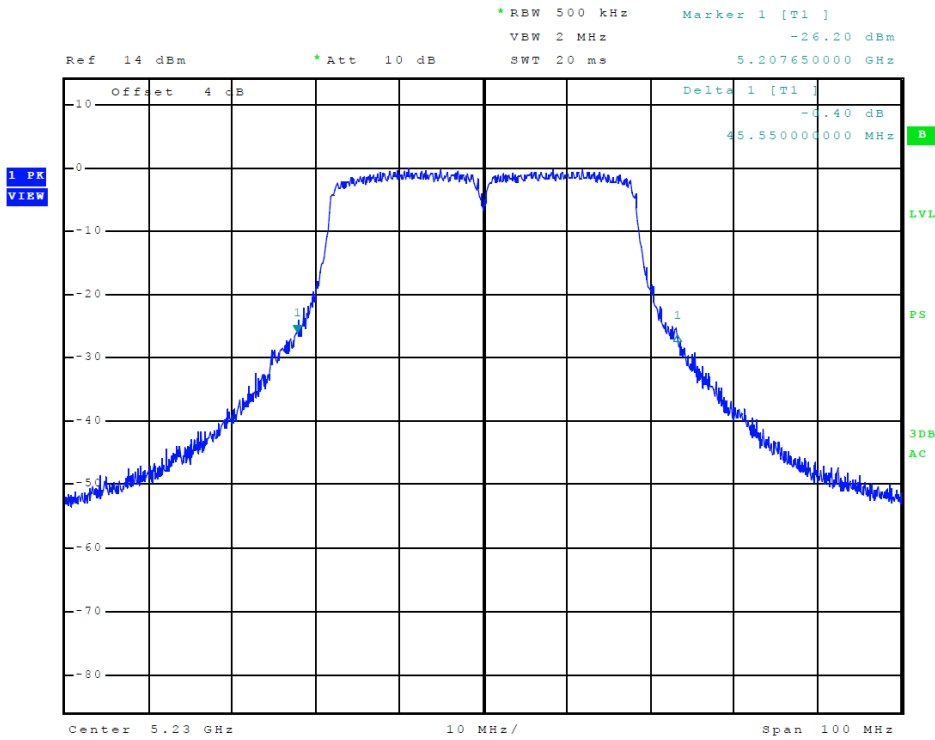


Figure 27 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11n40, 26 dB OBW)

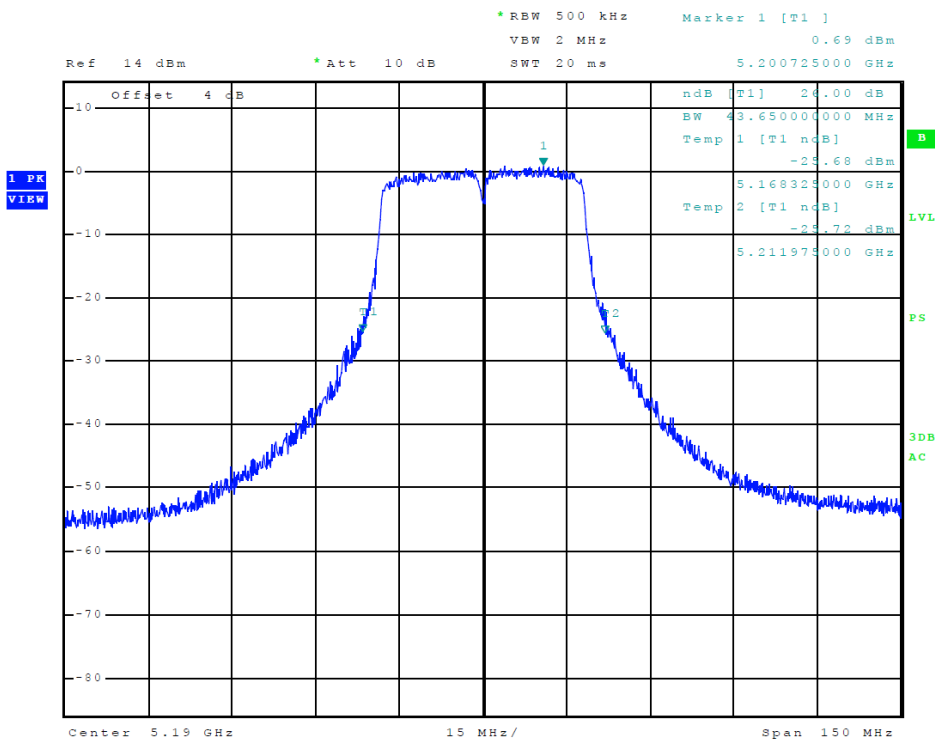


Figure 28 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11n40, 26 dB OBW)

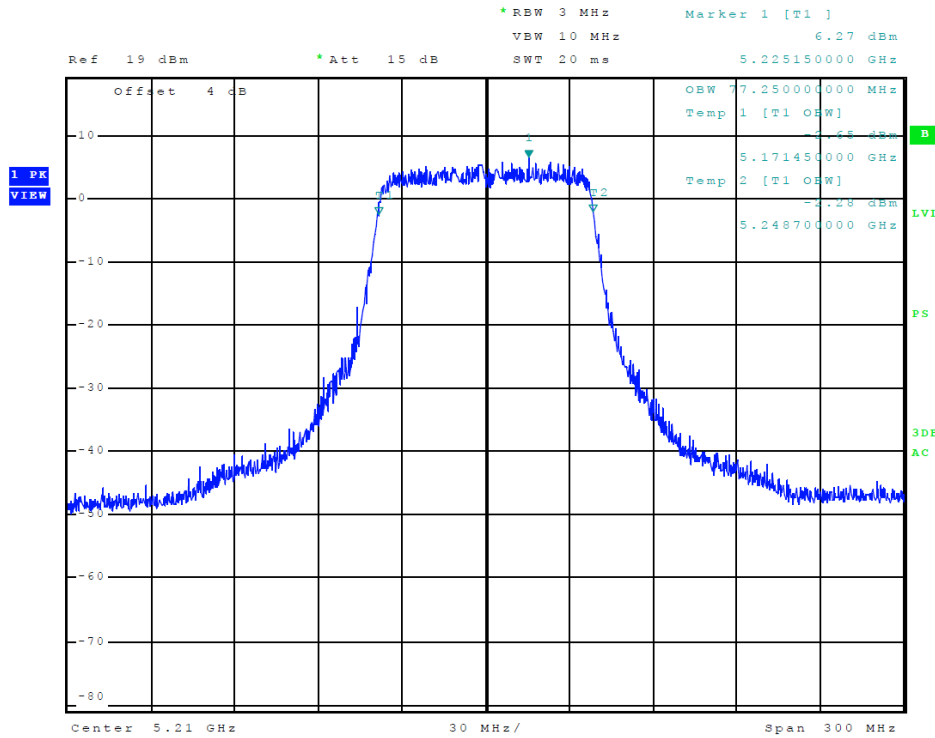


Figure 29 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11ac, 99% OBW)

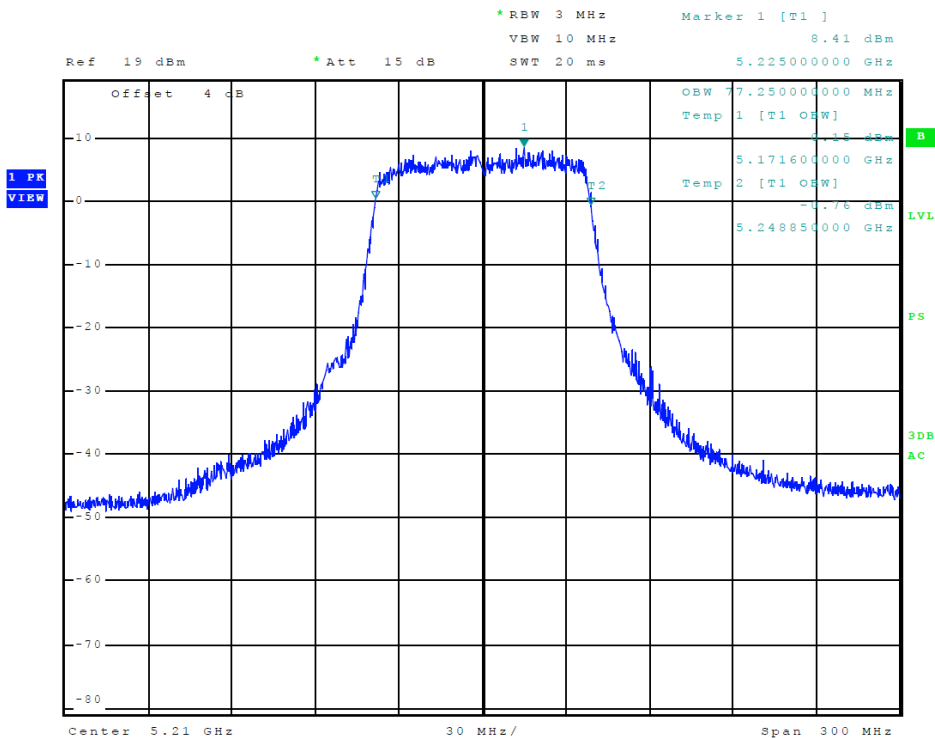


Figure 30 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11ac, 99% OBW)

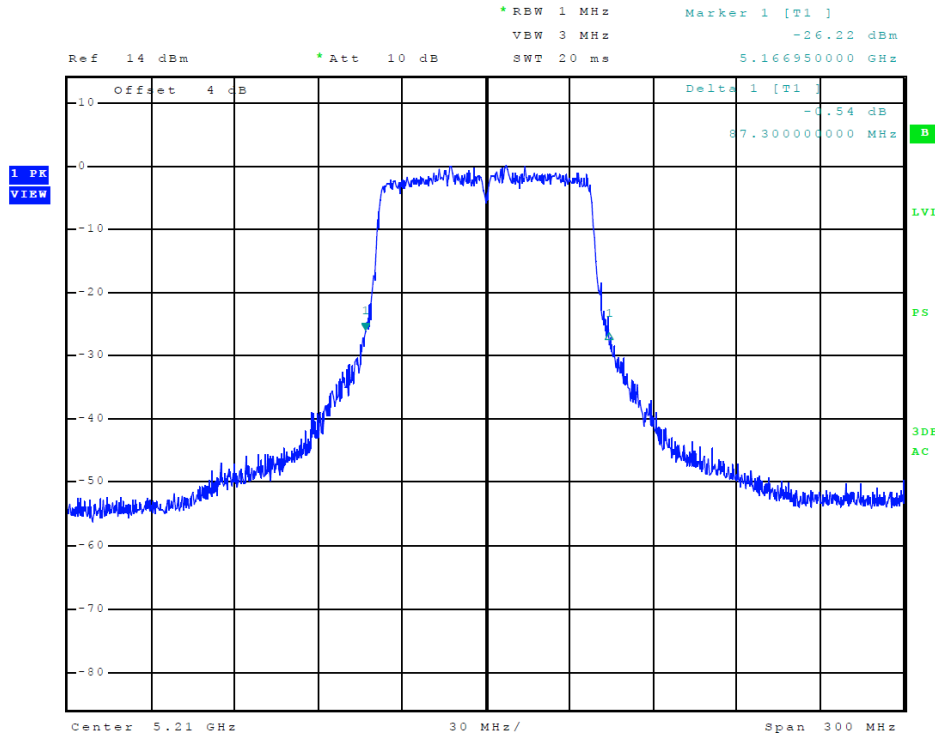


Figure 31 Plot of Transmitter Emissions (Chain 0, 5150-5250 MHz Band, 802.11ac, 26 dB OBW)

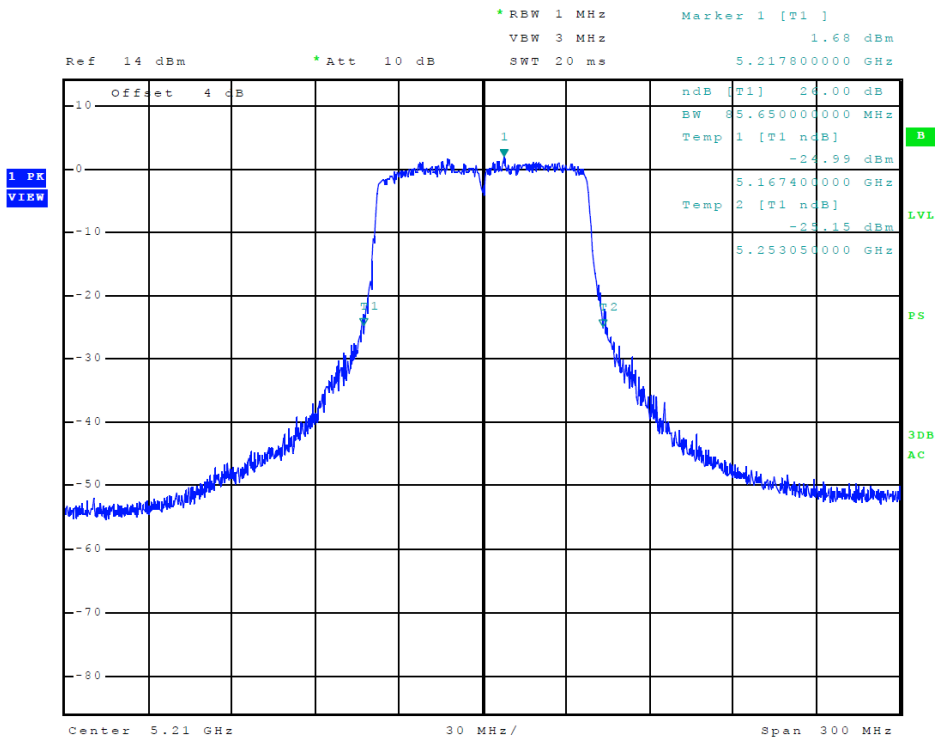


Figure 32 Plot of Transmitter Emissions (Chain 1, 5150-5250 MHz Band, 802.11ac, 26 dB OBW)

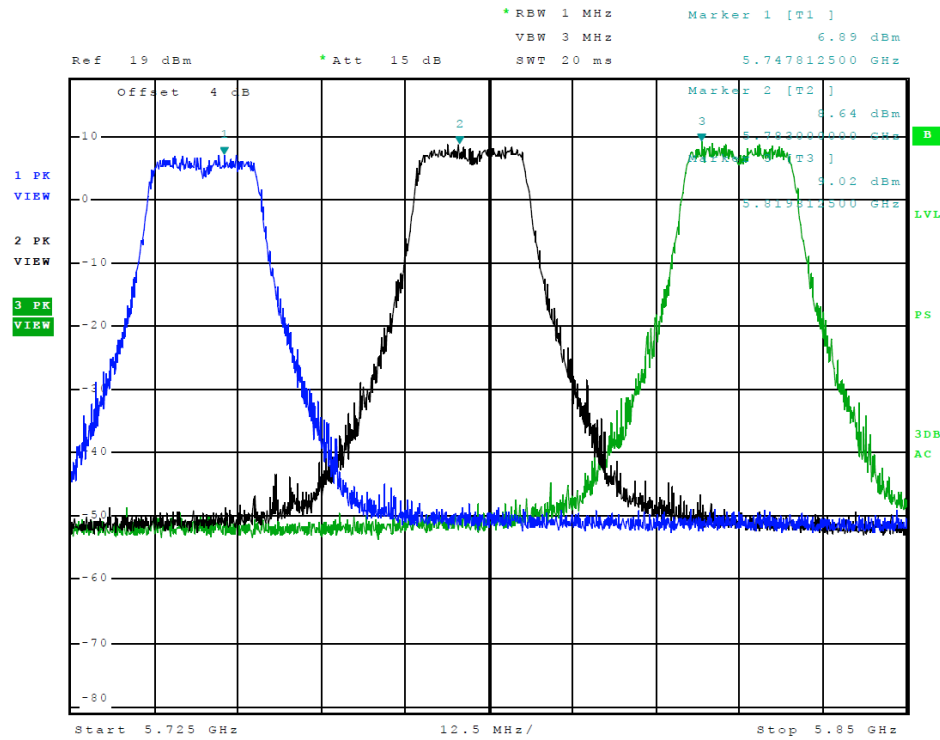


Figure 33 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11a)

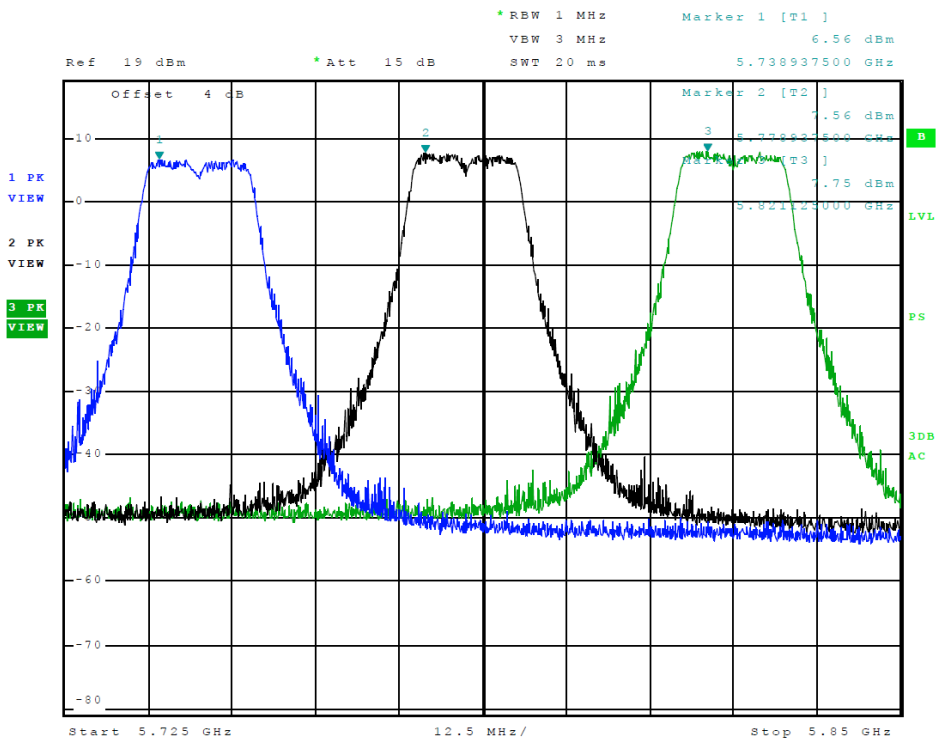


Figure 34 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11a)

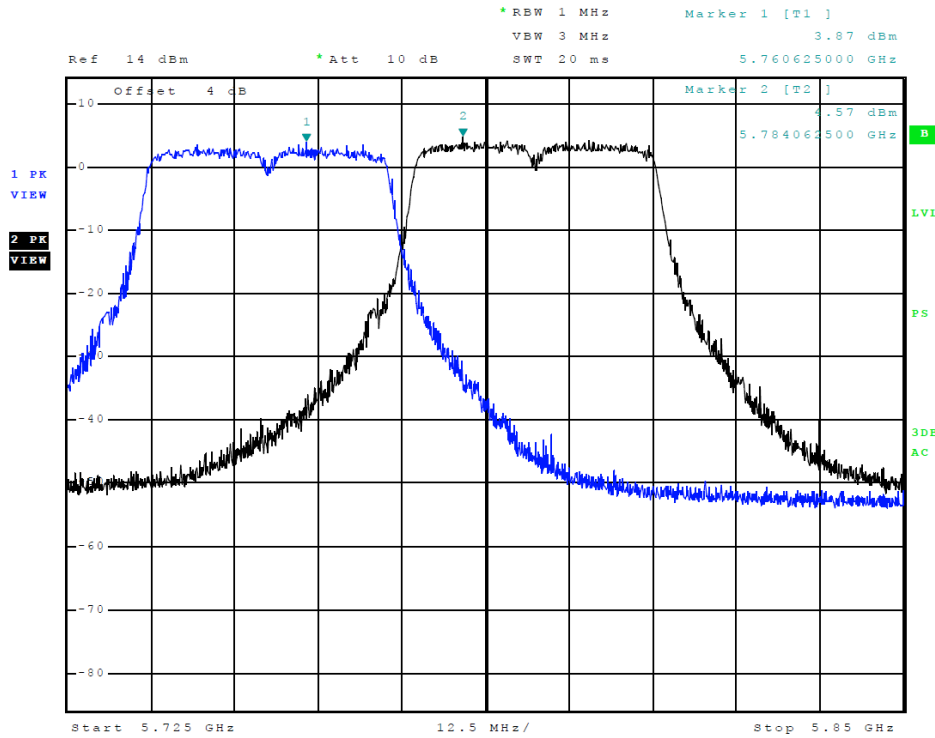


Figure 35 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11n40)

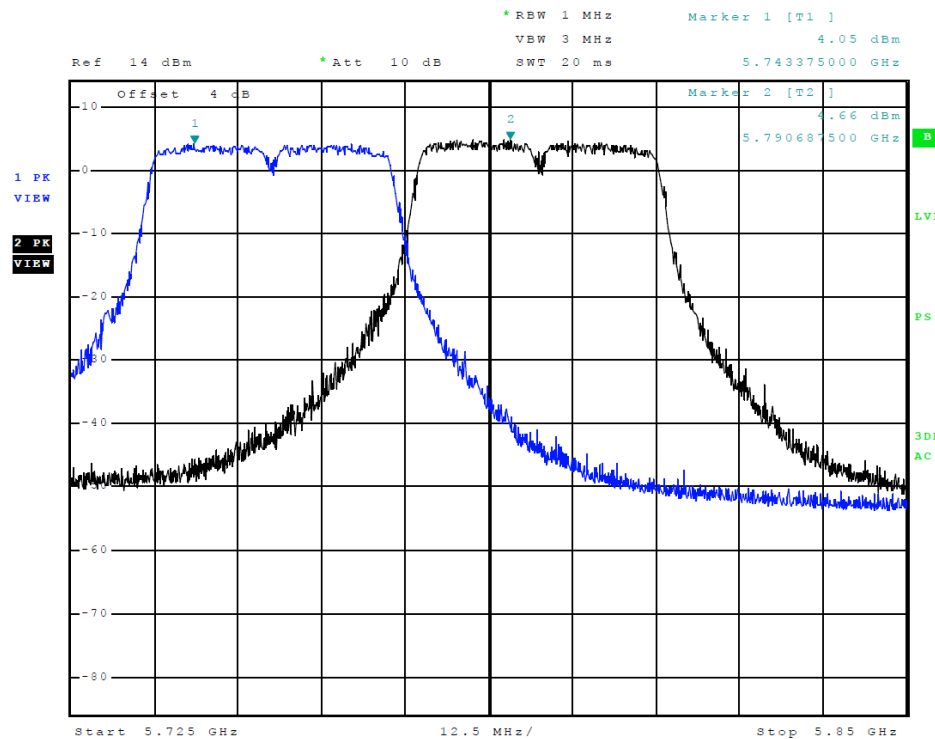


Figure 36 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11n40)

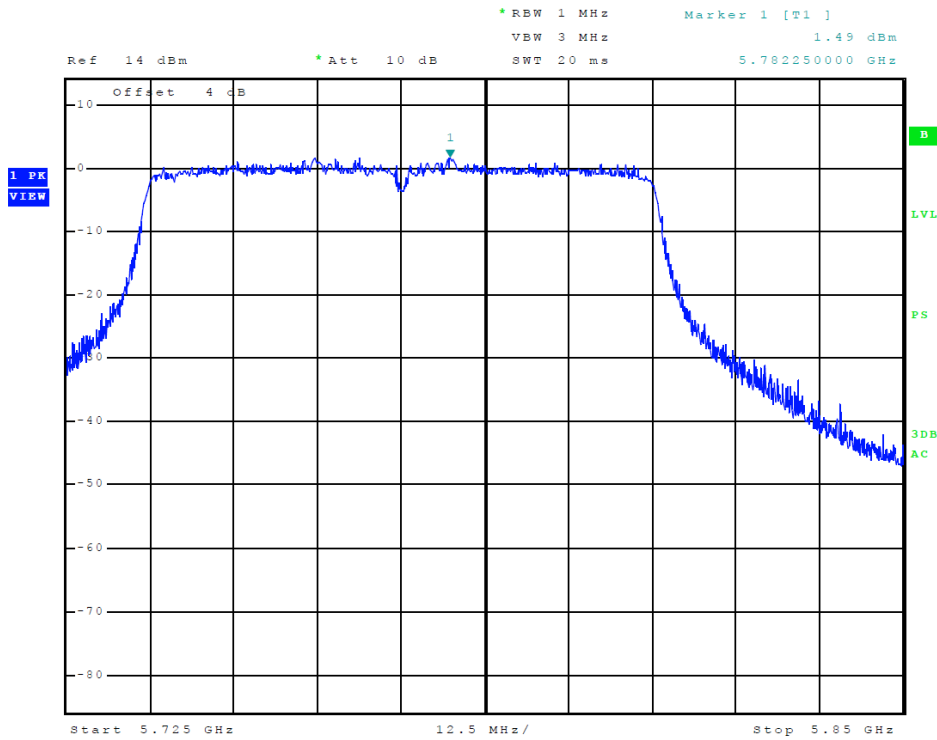


Figure 37 Plot of Transmitter Emissions (Chain 0, Across 5725-5850 MHz Band, 802.11ac)

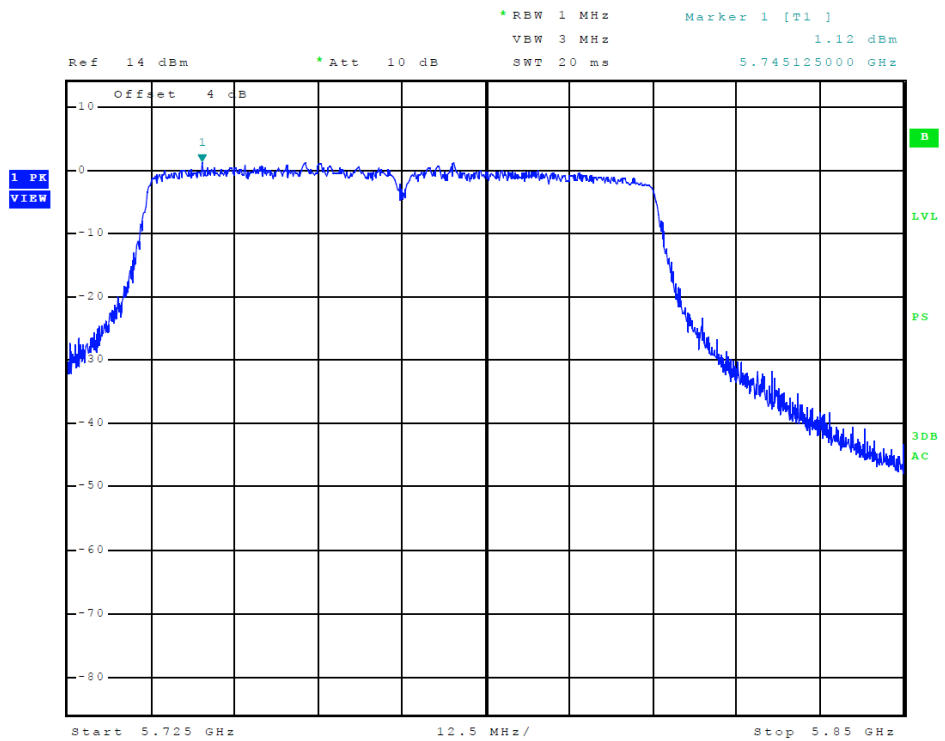


Figure 38 Plot of Transmitter Emissions (Chain 1, Across 5725-5850 MHz Band, 802.11ac)

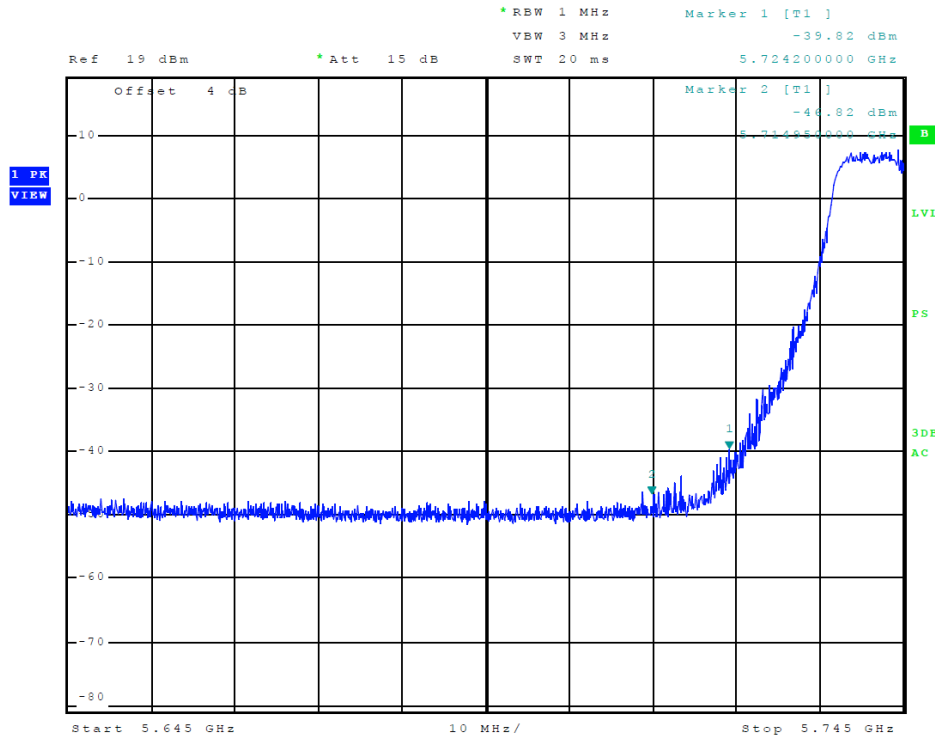


Figure 39 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11a)

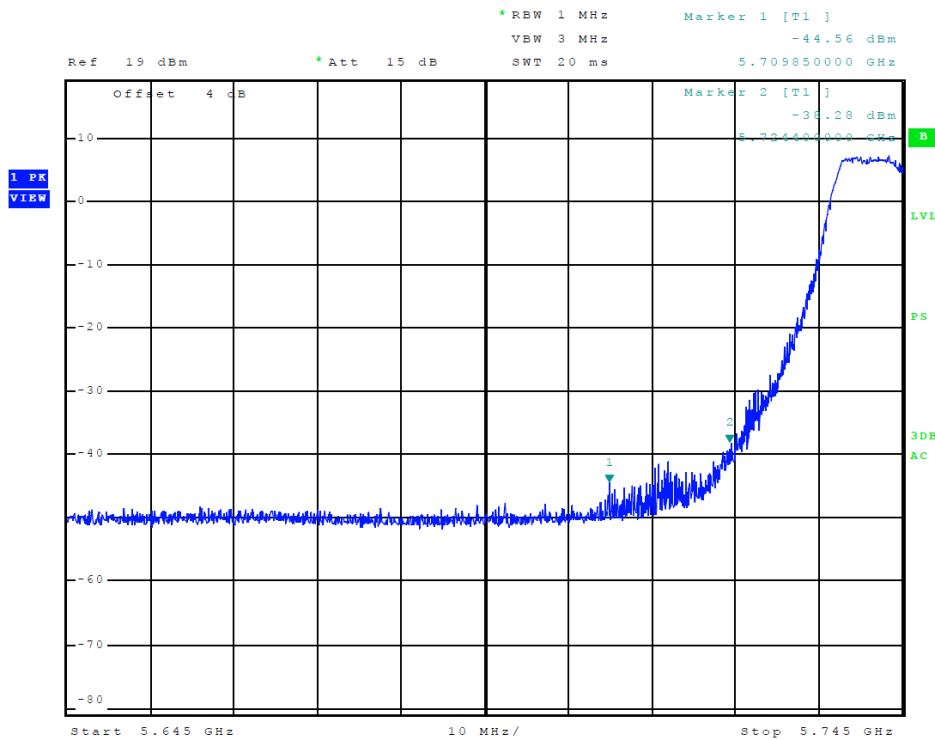


Figure 40 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11a)

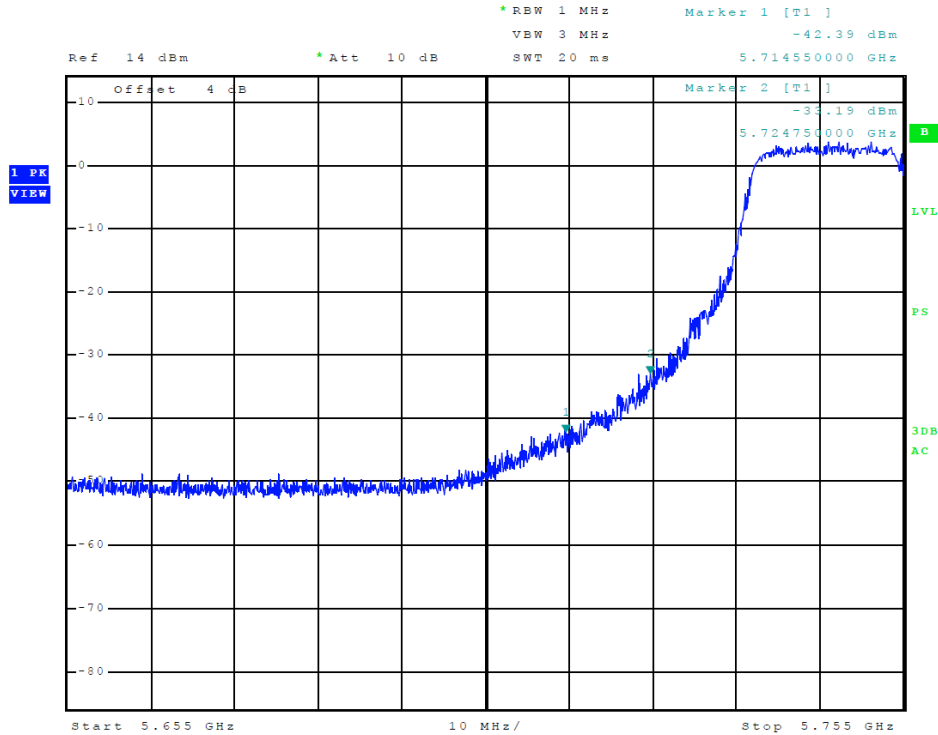


Figure 41 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11n40)

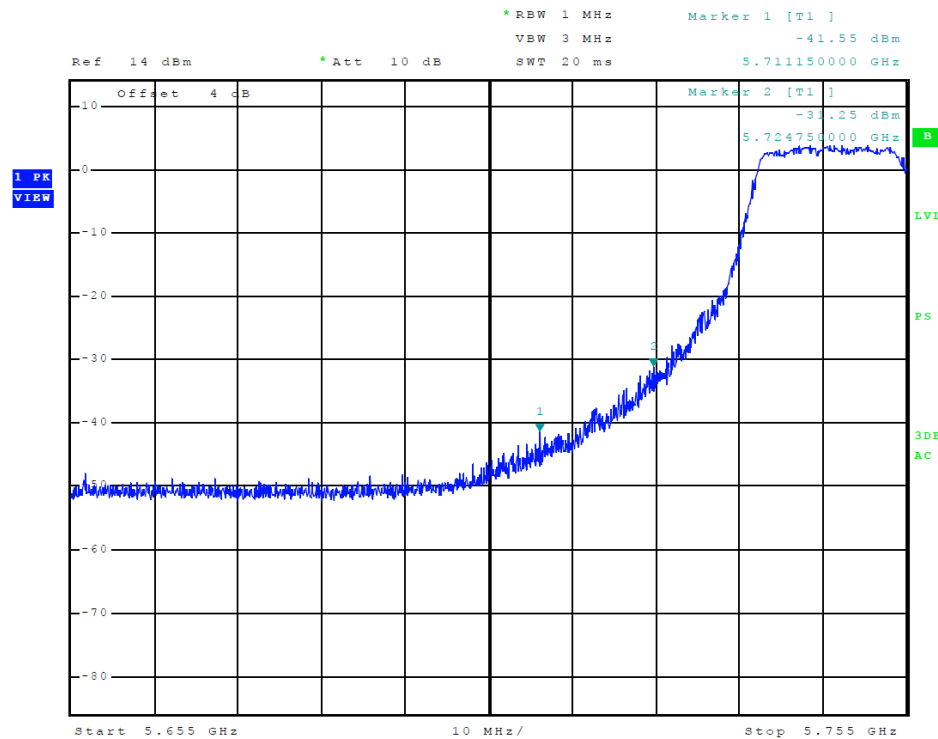


Figure 42 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11n40)

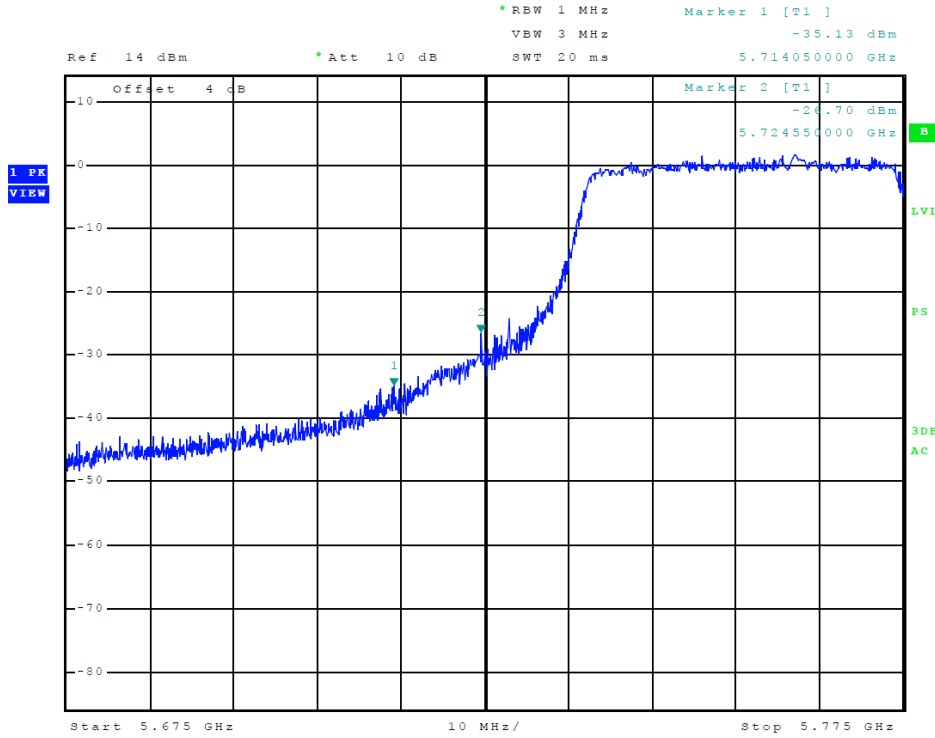


Figure 43 Plot of Transmitter Low Band Edge (Chain 0, 5725-5850 MHz Band, 802.11ac)

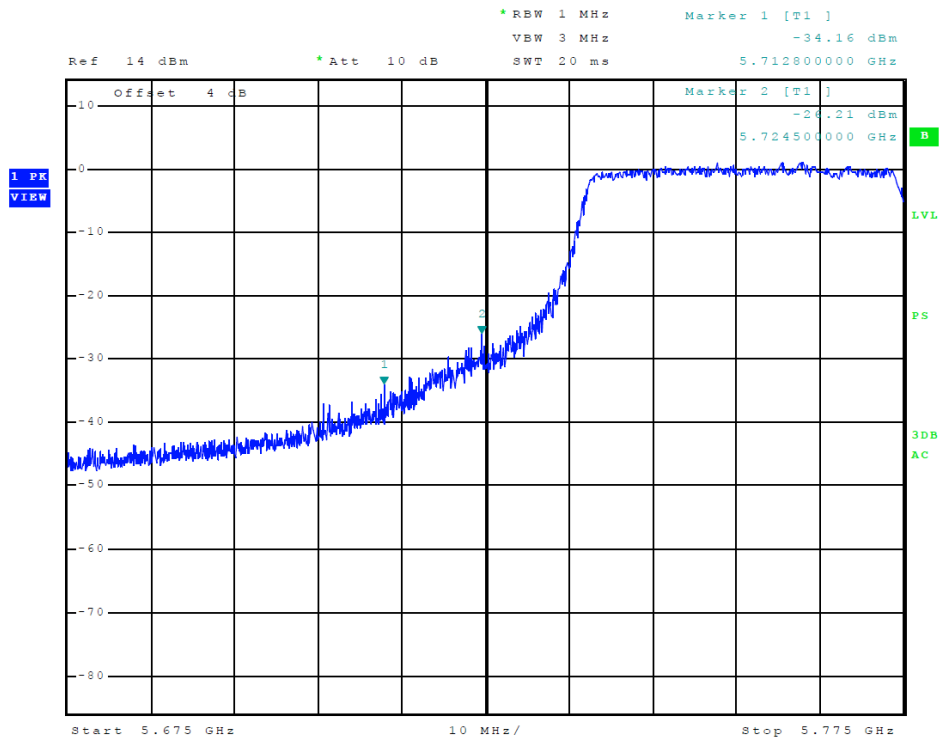


Figure 44 Plot of Transmitter Low Band Edge (Chain 1, 5725-5850 MHz Band, 802.11ac)

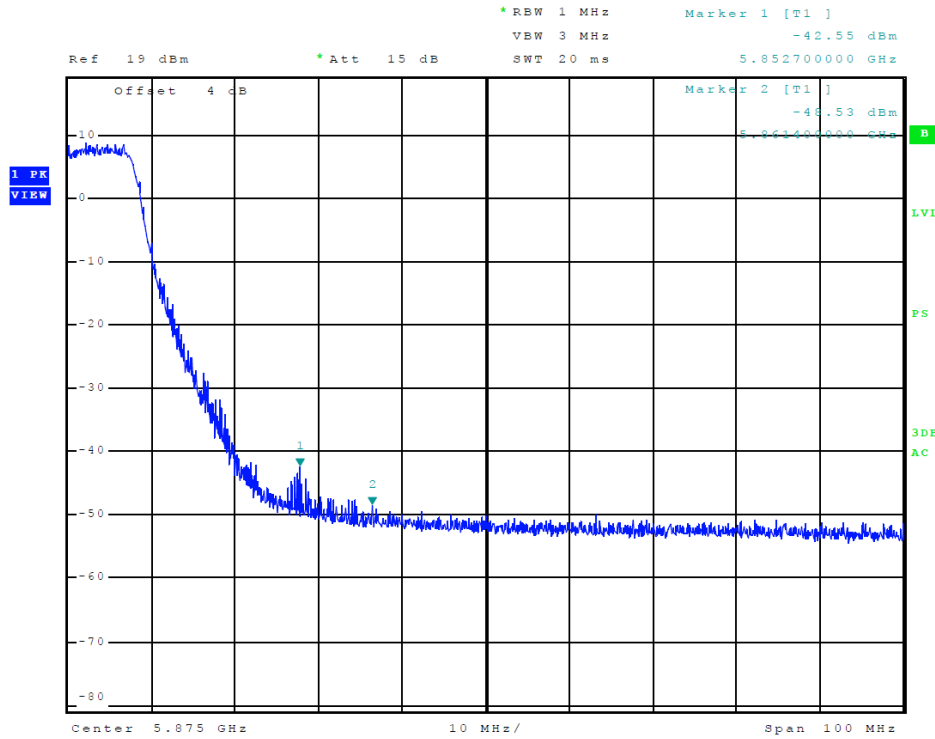


Figure 45 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11a)

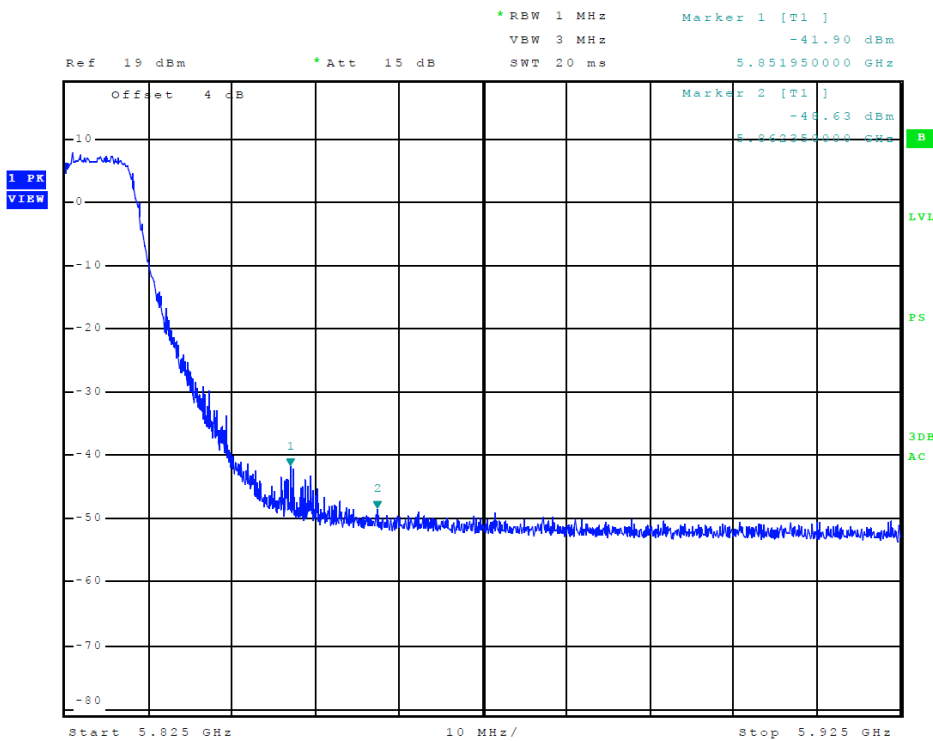


Figure 46 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11a)

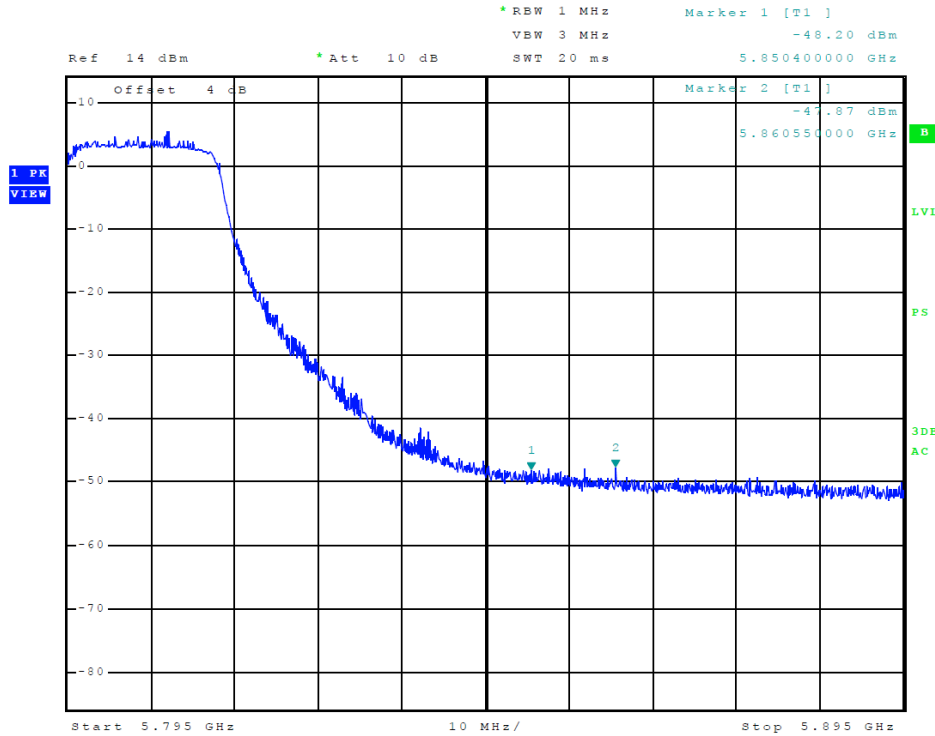


Figure 47 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11n40)

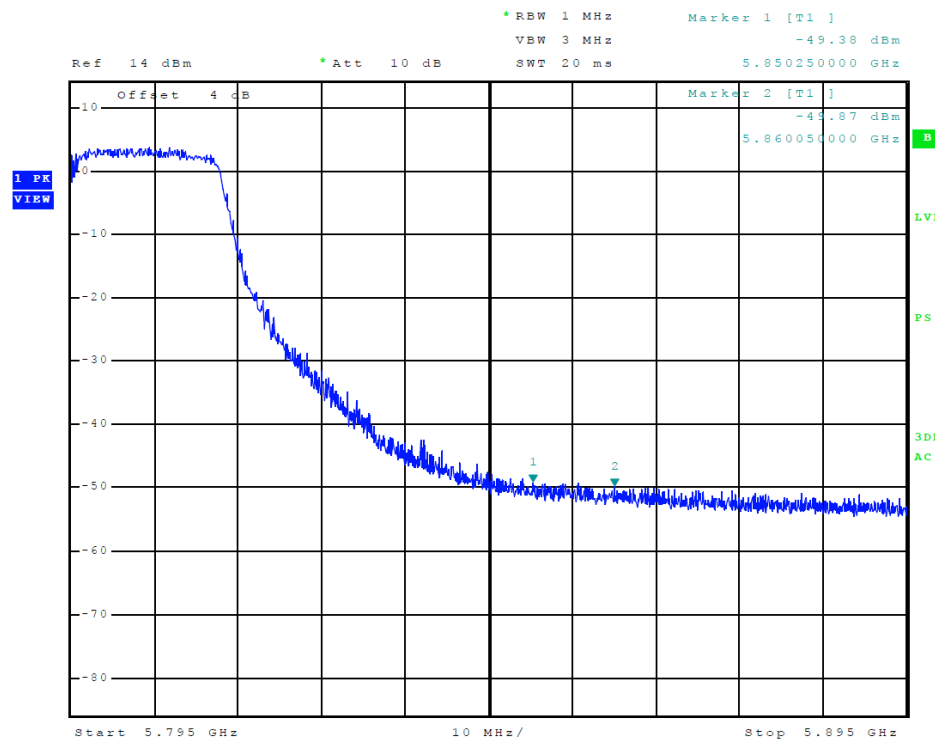


Figure 48 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11n40)

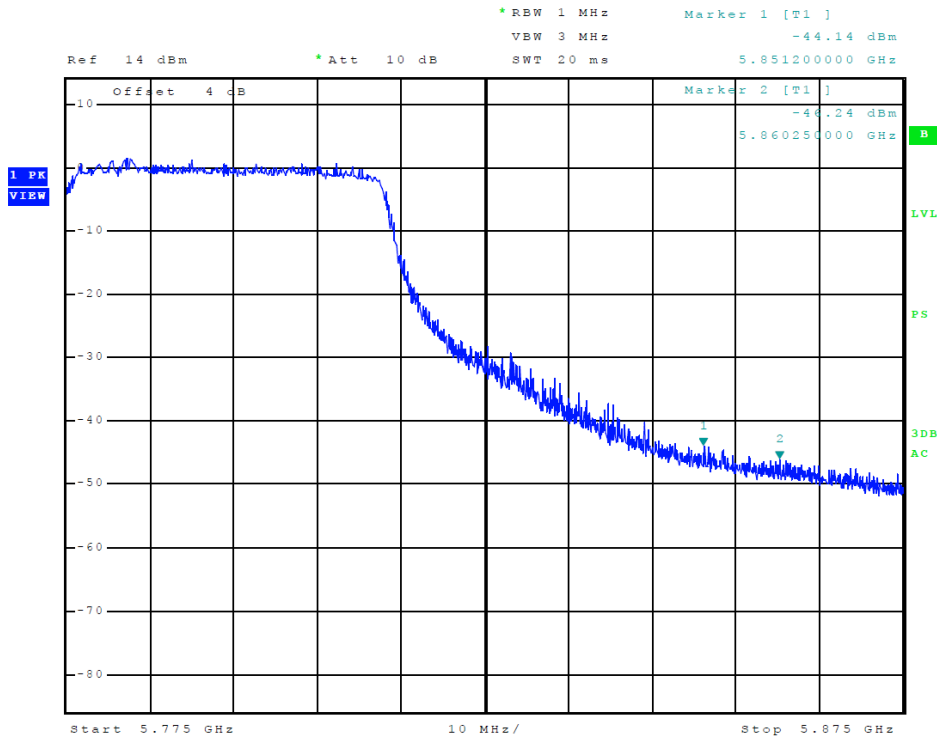


Figure 49 Plot of Transmitter High Band Edge (Chain 0, 5725-5850 MHz Band, 802.11ac)

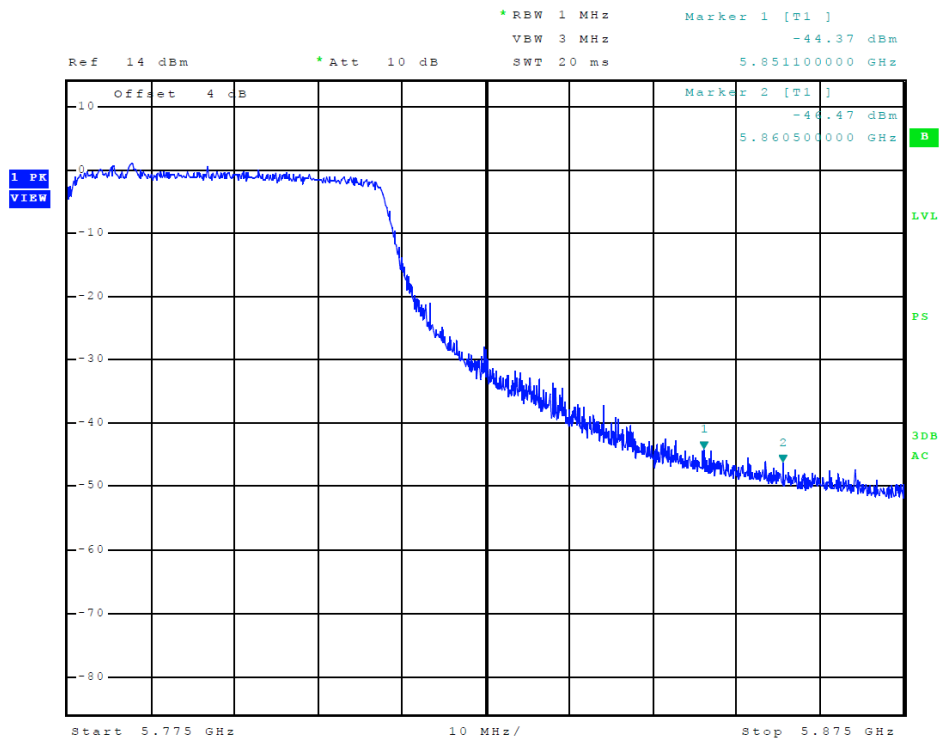


Figure 50 Plot of Transmitter High Band Edge (Chain 1, 5725-5850 MHz Band, 802.11ac)

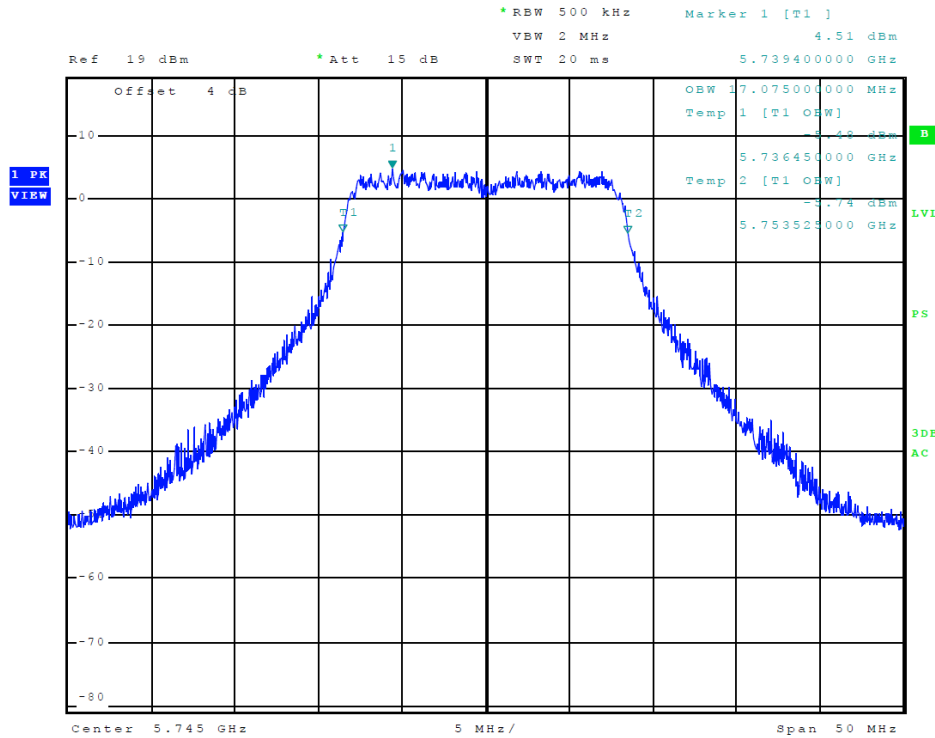


Figure 51 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11a, 99% OBW)

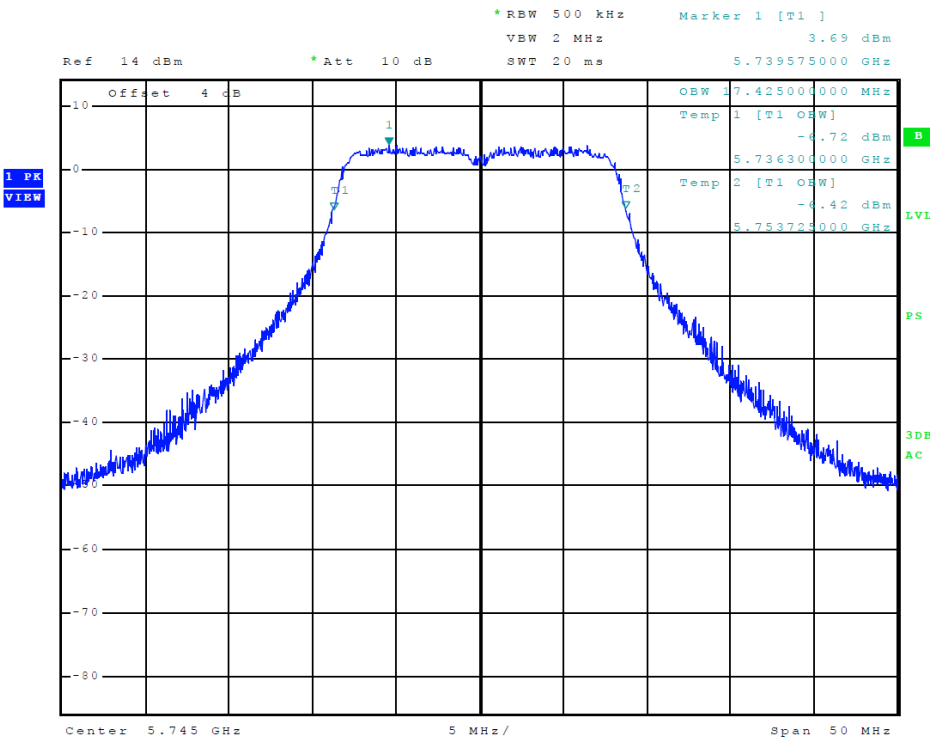


Figure 52 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11a, 99% OBW)

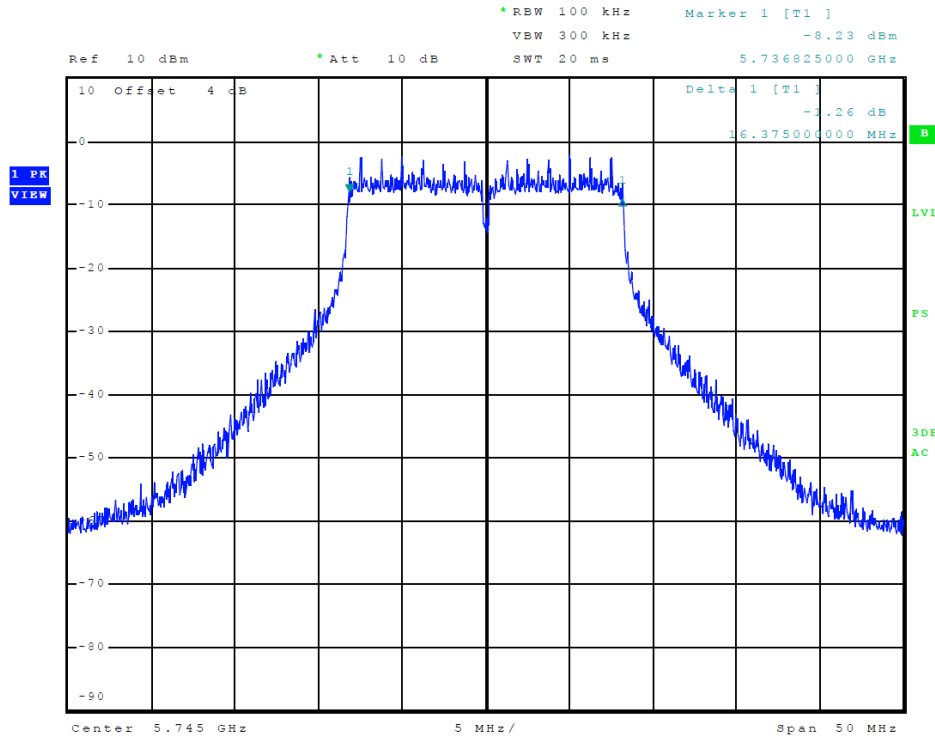


Figure 53 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11a, 6-dB OBW)

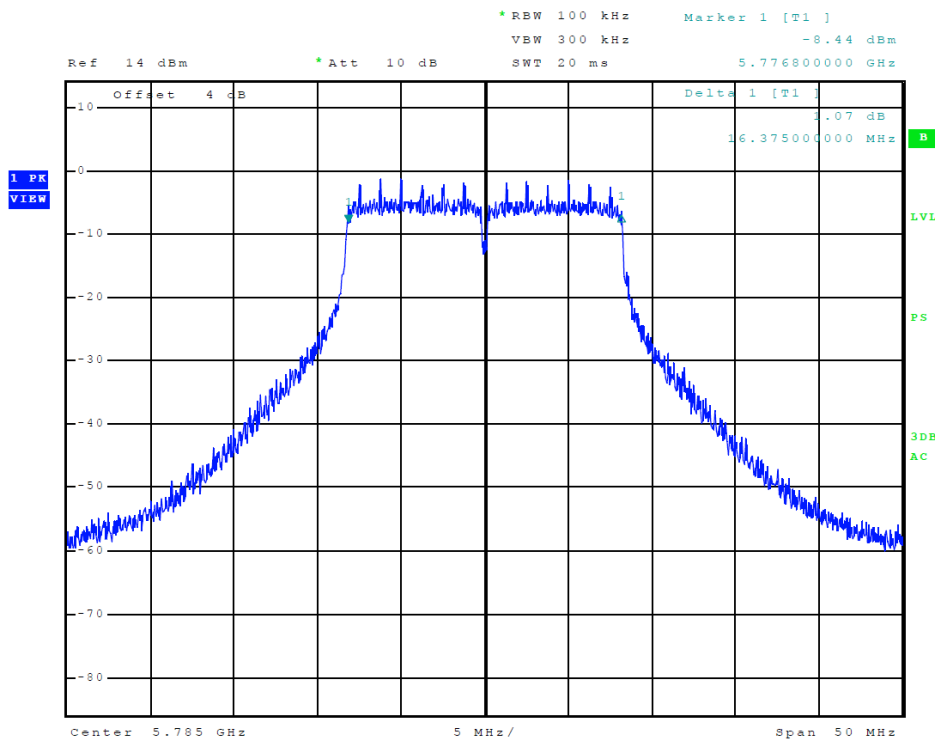


Figure 54 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11a, 6-dB OBW)

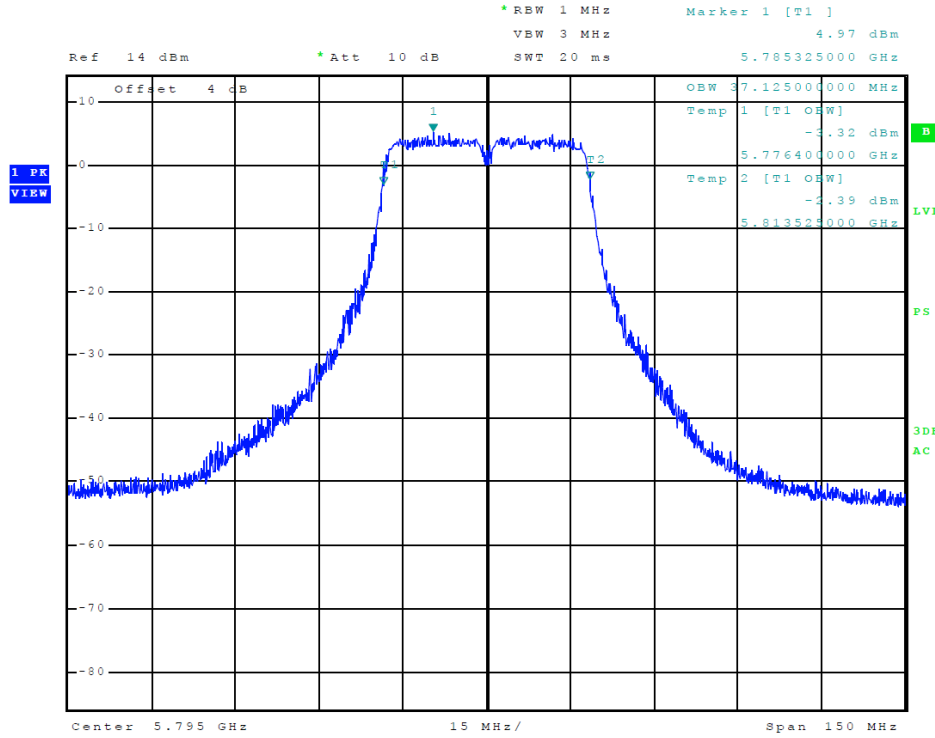


Figure 55 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11n40, 99% OBW)

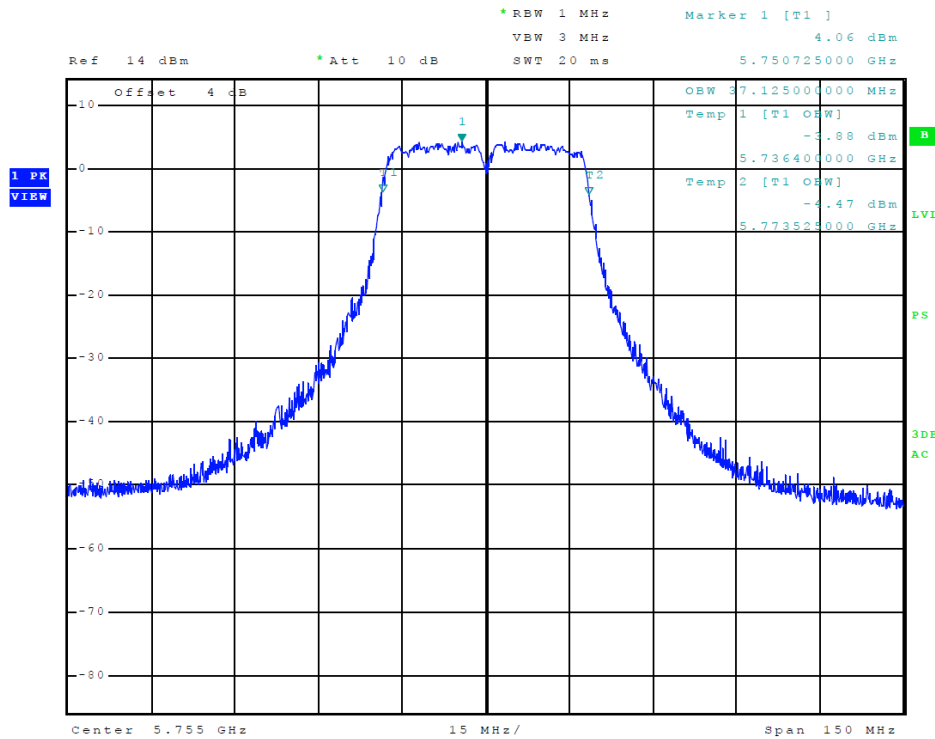


Figure 56 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11n40, 99% OBW)

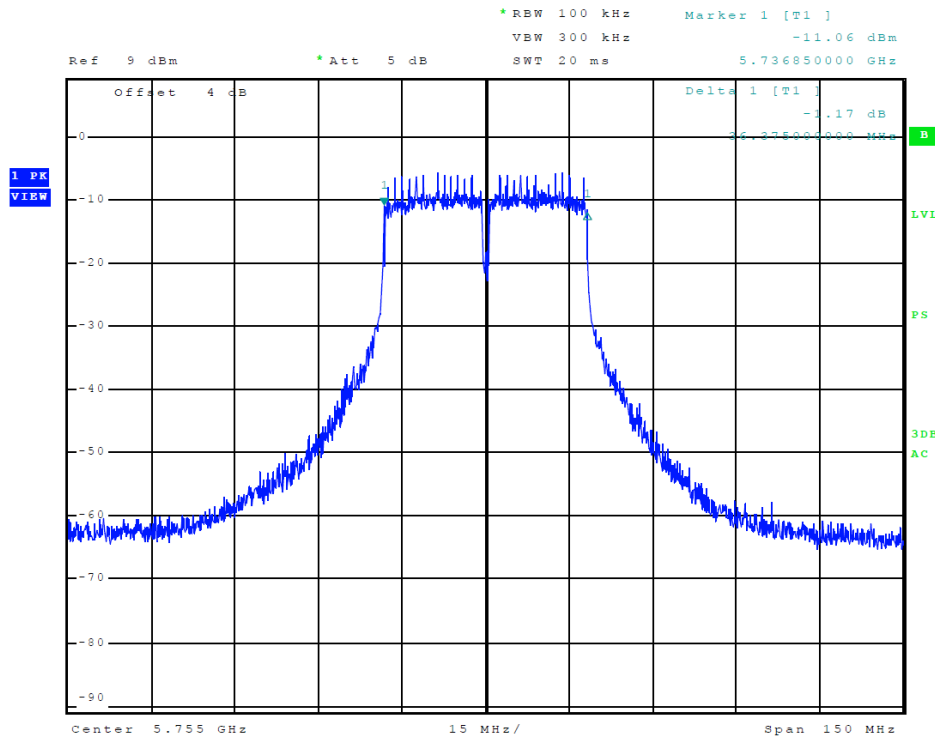


Figure 57 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11n40, 6-dB OBW)

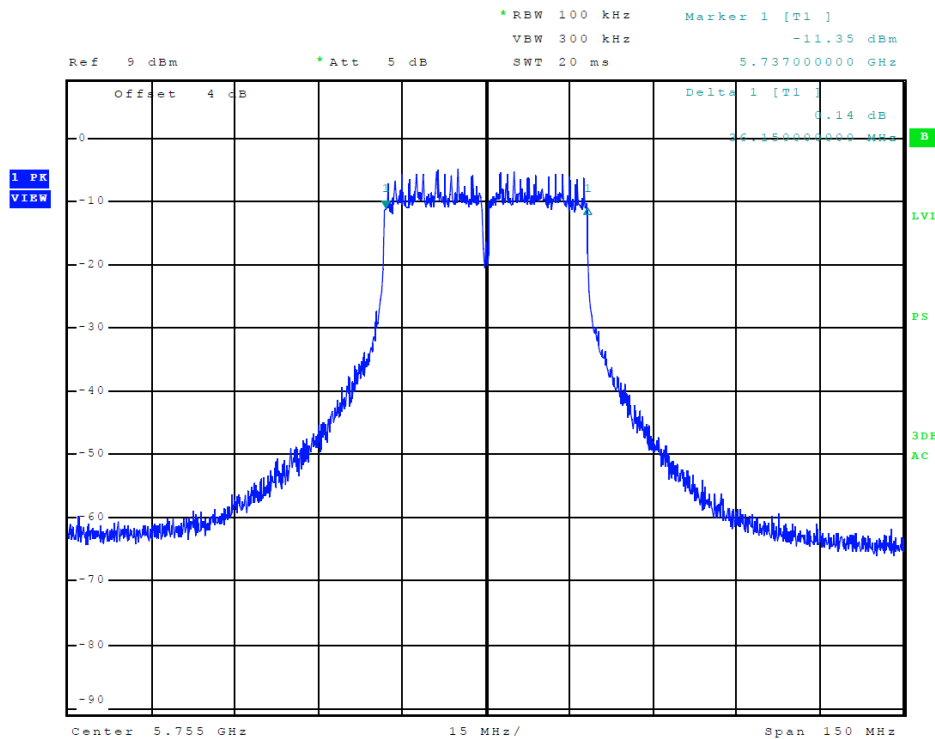


Figure 58 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11n40, 6-dB OBW)

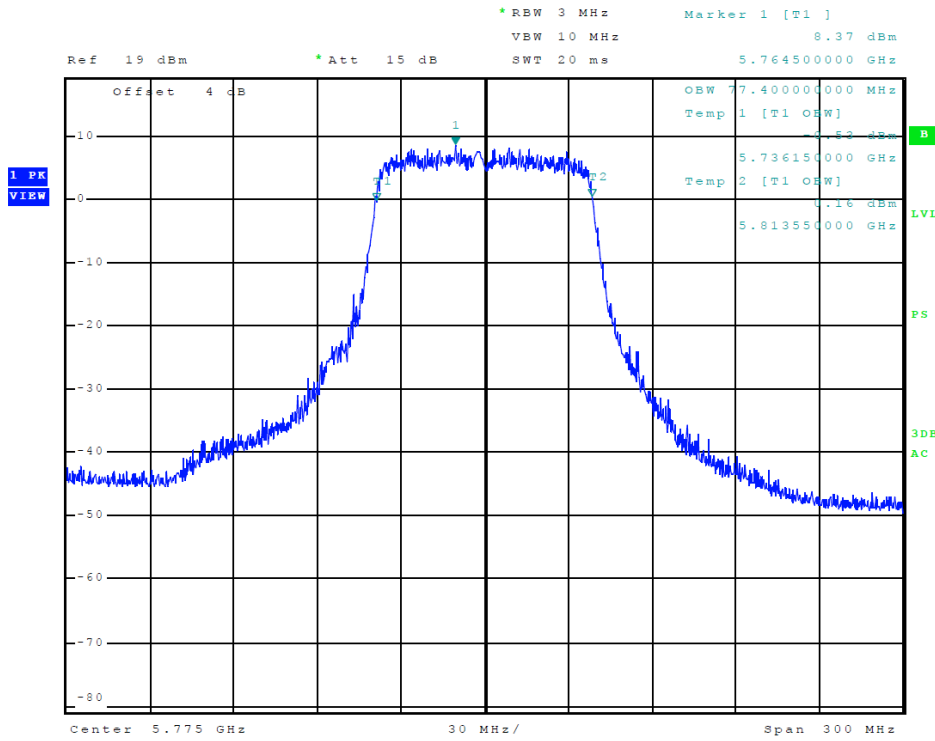


Figure 59 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11ac, 99% OBW)

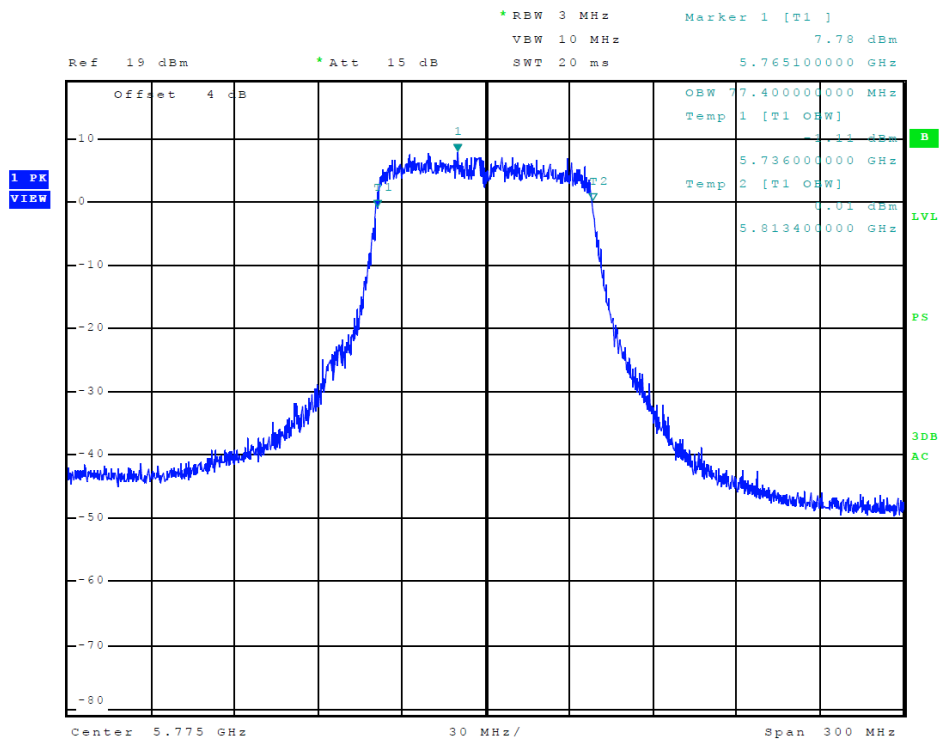


Figure 60 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11ac, 99% OBW)

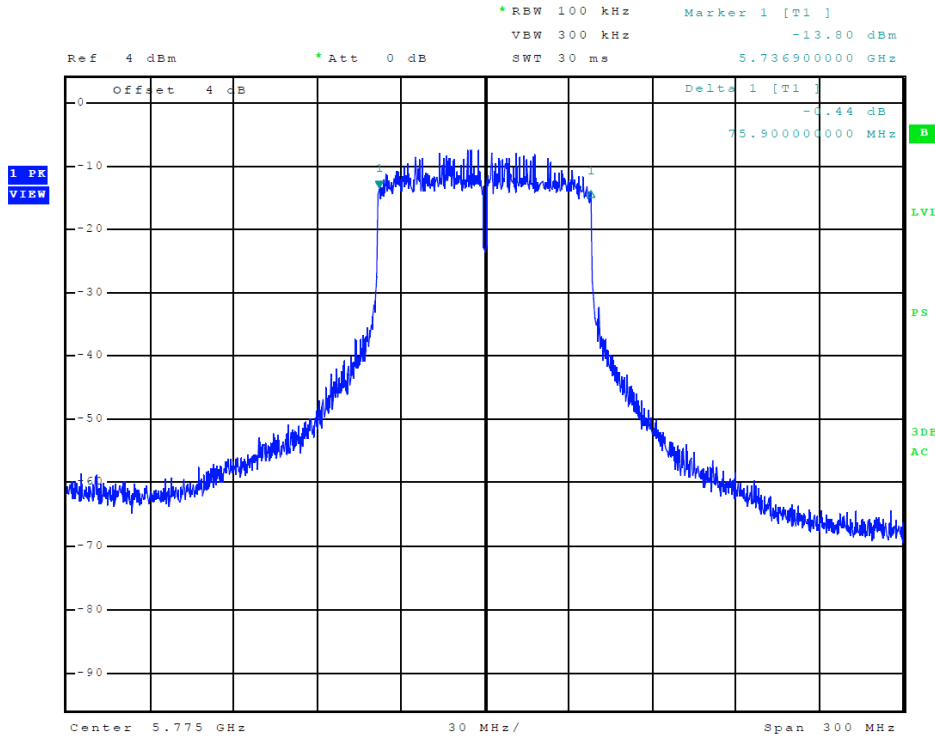


Figure 61 Plot of Transmitter Emissions (Chain 0, 5725-5850 MHz Band, 802.11ac, 6-dB OBW)

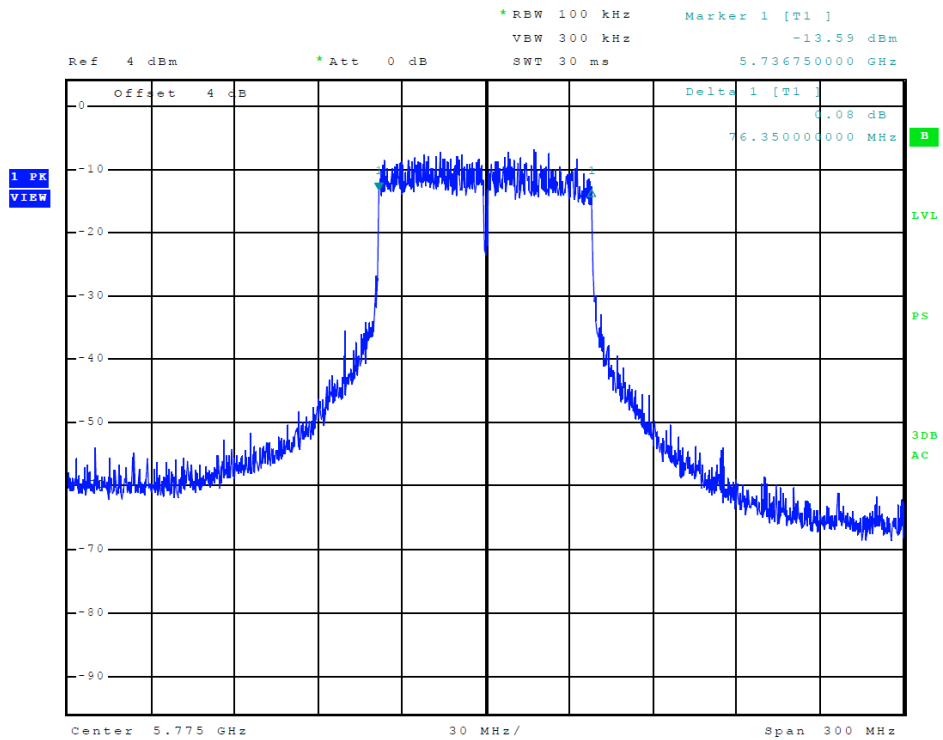


Figure 62 Plot of Transmitter Emissions (Chain 1, 5725-5850 MHz Band, 802.11ac, 6-dB OBW)

Transmitter Emissions Data

Table 7 Transmitter Radiated Emission (5150-5250 MHz Band, MT-482016/N/A)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
20 MHz Channel					
5180.0	--	--	--	--	--
10360.0	51.4	38.1	47.0	33.8	68.3
15540.0	51.5	38.2	51.0	38.0	68.3
20720.0	49.0	36.5	49.8	36.6	68.3
25900.0	51.6	38.7	51.6	38.5	68.3
5220.0	--	--	--	--	--
10440.0	45.9	33.1	47.5	34.5	68.3
15660.0	50.8	36.9	50.7	35.6	68.3
20880.0	49.3	36.2	49.5	36.1	68.3
26100.0	52.9	39.6	52.6	39.6	68.3
5240.0	--	--	--	--	--
10480.0	51.4	37.0	47.1	34.1	68.3
15720.0	51.5	38.0	51.0	37.7	68.3
20960.0	48.7	35.8	49.6	36.0	68.3
26200.0	52.1	39.4	51.8	39.5	68.3
Band Edges					
5150.0	46.3	32.4	58.8	43.6	54.0
5350.0	45.6	32.4	52.5	38.8	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 8 Transmitter Radiated Emission (5150-5250 MHz Band, PA58-24-ANT)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
20 MHz Channel					
5180.0	--	--	--	--	--
10360.0	48.5	35.3	47.6	34.7	68.3
15540.0	51.1	38.5	51.4	38.3	68.3
20720.0	49.6	36.6	49.9	36.5	68.3
25900.0	51.7	38.9	51.1	38.2	68.3
5220.0	--	--	--	--	--
10440.0	45.3	32.5	48.1	34.9	68.3
15660.0	50.1	36.7	51.0	37.3	68.3
20880.0	49.3	36.1	49.7	36.2	68.3
26100.0	52.5	39.6	52.8	39.7	68.3
5240.0	--	--	--	--	--
10480.0	45.9	32.9	48.2	35.3	68.3
15720.0	50.2	37.5	50.9	38.2	68.3
20960.0	49.4	35.9	48.7	35.8	68.3
26200.0	52.6	39.5	52.5	39.5	68.3
Band Edges					
5150.0	51.8	34.3	71.1	52.1	54.0
5350.0	45.5	32.5	59.3	45.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 9 Transmitter Radiated Emission (5150-5250 MHz Band, HDDA5W-32-DP2)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
20 MHz Channel					
5180.0	--	--	--	--	--
10360.0	47.3	34.3	58.4	41.6	68.3
15540.0	52.2	39.0	52.1	38.4	68.3
20720.0	49.2	36.6	49.7	36.5	68.3
25900.0	51.4	38.6	52.0	38.7	68.3
5220.0	--	--	--	--	--
10440.0	45.7	32.8	57.5	42.4	68.3
15660.0	50.5	38.0	51.6	38.1	68.3
20880.0	48.7	36.2	49.1	36.1	68.3
26100.0	52.5	39.6	53.2	39.5	68.3
5240.0	--	--	--	--	--
10480.0	47.0	34.2	51.4	37.4	68.3
15720.0	49.6	36.8	59.4	44.2	68.3
20960.0	49.4	36.0	48.8	35.8	68.3
26200.0	52.0	39.5	52.6	39.4	68.3
Band Edges					
5150.0	50.2	34.9	62.1	46.1	54.0
5350.0	45.7	33.0	56.7	43.3	54.0

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 10 Transmitter Radiated Emission (5725-5850 MHz Band, MT-482016/N/A)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
20 MHz Channel					
5745.0	--	--	--	--	--
11490.0	48.1	35.0	47.7	35.0	68.3
17235.0	53.2	40.7	54.5	40.9	68.3
22980.0	50.0	37.0	49.3	36.4	68.3
28725.0	52.7	40.1	53.2	40.1	68.3
5785.0	--	--	--	--	--
11570.0	48.4	35.0	48.2	35.2	68.3
17355.0	53.3	40.0	52.7	39.6	68.3
23140.0	50.1	37.7	50.8	37.8	68.3
28925.0	53.6	40.5	53.7	40.6	68.3
5825.0	--	--	--	--	--
11650.0	47.5	34.8	47.7	34.8	68.3
17475.0	52.2	38.6	51.9	38.5	68.3
23300.0	50.0	36.8	49.3	36.7	68.3
29125.0	53.2	40.1	53.3	40.2	68.3
Band Edges					
5725.0	51.1	34.9	75.8	58.1	78.2
5850.0	45.1	32.4	64.8	43.2	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 11 Transmitter Radiated Emission (5725-5850 MHz Band, PA58-24-ANT)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
20 MHz Channel					
5745.0	--	--	--	--	--
11490.0	48.2	35.1	48.0	35.1	68.3
17235.0	53.4	40.6	53.4	40.2	68.3
22980.0	49.5	36.4	49.8	36.8	68.3
28725.0	53.6	40.1	52.8	40.0	68.3
5785.0	--	--	--	--	--
11570.0	48.2	35.0	48.2	35.1	68.3
17355.0	53.8	40.7	52.7	39.7	68.3
23140.0	50.7	37.8	51.2	37.7	68.3
28925.0	53.7	40.6	54.1	40.6	68.3
5825.0	--	--	--	--	--
11650.0	47.5	34.6	48.3	35.0	68.3
17475.0	52.0	38.7	52.5	39.4	68.3
23300.0	49.3	36.7	49.7	36.7	68.3
29125.0	53.1	40.2	53.6	40.1	68.3
Band Edges					
5725.0	46.3	32.0	78.0	59.9	78.2
5850.0	44.6	32.1	63.3	42.9	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 12 Transmitter Radiated Emission (5725-5850 MHz Band, HDDA5W-32-DP2)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
20 MHz Channel					
5745.0	--	--	--	--	--
11490.0	45.7	33.2	48.1	35.6	68.3
17235.0	53.6	40.9	53.4	40.9	68.3
22980.0	50.1	37.3	49.7	36.9	68.3
28725.0	53.2	40.2	53.0	40.2	68.3
5785.0	--	--	--	--	--
11570.0	45.4	33.0	48.4	34.9	68.3
17355.0	53.8	41.2	54.5	41.3	68.3
23140.0	50.4	37.8	51.2	37.8	68.3
28925.0	53.5	40.6	53.5	40.5	68.3
5825.0	--	--	--	--	--
11650.0	46.4	33.7	47.6	34.7	68.3
17475.0	50.9	38.3	51.0	38.3	68.3
23300.0	50.2	36.9	49.6	36.8	68.3
29125.0	53.1	40.2	53.2	40.2	68.3
Band Edges					
5725.0	53.5	37.5	81.1	63.2	78.2
5850.0	46.1	33.2	67.0	46.0	78.2

Other emissions present had amplitudes at least 20 dB below the limit. Peak and Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz. Peak and Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Table 13 Transmitter Antenna Port Conducted Power and Emissions Chain 0

Frequency MHz	Conducted Antenna Port Output Power (Watts)	99% Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz Mode 802.11a			
5180	0.0085	17050	7.77 dBm/1MHz
5200	0.0088	17000	8.54 dBm/1MHz
5240	0.0099	17025	8.42 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.0081	37050	3.52 dBm/1M
5230	0.0086	37050	3.34 dBm/1M
80 MHz Mode 802.11ac			
5210	0.0078	77250	-0.45 dBm/1M
20 MHz Mode 802.11a			
5745	0.0098	17075	4.47 dBm/500kHz
5785	0.0121	17050	5.88 dBm/500kHz
5825	0.0123	17025	5.83 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.0100	36975	0.80 dBm/500kHz
5795	0.0106	37125	0.82 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.0096	77400	-0.84 dBm/500kHz

Table 14 Transmitter Antenna Port Conducted Power and Emissions Chain 1

Frequency MHz	Conducted Antenna Port Output Power (Watts)	99% Occupied Bandwidth kHz	Power Spectral Density dBm
20 MHz Mode 802.11a			
5180	0.0100	17300	7.86 dBm/1MHz
5200	0.0100	17300	8.20 dBm/1MHz
5240	0.0096	17350	8.20 dBm/1MHz
40 MHz Mode 802.11n			
5190	0.0091	37050	4.74 dBm/1M
5230	0.0091	37200	4.72 dBm/1M
80 MHz Mode 802.11ac			
5210	0.0081	77250	1.73 dBm/1M
20 MHz Mode 802.11a			
5745	0.0097	17425	3.16 dBm/500kHz
5785	0.0108	17400	3.94 dBm/500kHz
5825	0.0108	17425	4.11 dBm/500kHz
40 MHz Mode 802.11n			
5755	0.0096	37125	0.23 dBm/500kHz
5795	0.0102	37200	0.97 dBm/500kHz
80 MHz Mode 802.11ac			
5775	0.0089	77400	-1.02 dBm/500kHz

Table 15 Transmitter all antenna Ports Total Power and PSD U-NII-1 Band

Frequency MHz	Antenna Port Output Total (Watts)	Total Power Spectral Density dBm
20 MHz Mode 802.11a		
5180	0.0185	10.8 dBm/1MHz
5200	0.0188	11.4 dBm/1MHz
5240	0.0195	11.3 dBm/1MHz
40 MHz Mode 802.11n		
5190	0.0172	7.2 dBm/1MHz
5230	0.0177	7.1 dBm/1MHz
80 MHz Mode 802.11ac		
5210	0.0159	3.8 dBm/1MHz

Table 16 Transmitter all antenna Ports Total Power and PSD U-NII-3 Band

Frequency MHz	Antenna Port Output Total (Watts)	Total Power Spectral Density dBm
20 MHz Mode 802.11a		
5745	0.0195	6.9 dBm/500 kHz
5785	0.0230	8.0 dBm/500 kHz
5825	0.0231	8.1 dBm/500 kHz
40 MHz Mode 802.11n		
5755	0.0196	3.2 dBm/500 kHz
5795	0.0209	3.9 dBm/500 kHz
80 MHz Mode 802.11ac		
5775	0.0185	2.1 dBm/500 kHz



Testing
NVLAP Lab Code 200087-0

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the radiated emissions requirements of 47CFR Part 15.407 and Industry Canada RSS-247. The maximum conducted combined output power delivered into antenna ports was 0.023-Watts. The minimum harmonic radiated emission margin provided -24.1 dB margin below requirements. General radiated emissions of EUT and supporting equipment provided -0.9 dB margin. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. There were no other deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the 47CFR Part 15C and Industry Canada RSS-247 emissions requirements. There were no deviations or modifications to the specifications.

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 2

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122

Test to: 47CFR, 15.407, RSS-247

File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD

Date: March 3, 2017

Page 78 of 84



Testing
NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 2

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122

Test to: 47CFR, 15.407, RSS-247

File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD

Date: March 3, 2017

Page 79 of 84

Annex A Measurement Uncertainty Calculations

Measurement uncertainty calculations were made for the laboratory. Result of measurement uncertainty calculations are recorded below for AC line conducted and radiated emission measurements.

Measurement Uncertainty	$U_{(E)}$	$U_{(lab)}$
3 Meter Horizontal 30-200 MHz Measurements	2.08	4.16
3 Meter Vertical 30-200 MHz Measurements	2.16	4.33
3 Meter Vertical Measurements 200-1000 MHz	2.99	5.97
10 Meter Horizontal Measurements 30-200 MHz	2.07	4.15
10 Meter Vertical Measurements 30-200 MHz	2.06	4.13
10 Meter Horizontal Measurements 200-1000 MHz	2.32	4.64
10 Meter Vertical Measurements 200-1000 MHz	2.33	4.66
3 Meter Measurements 1-6 GHz	2.57	5.14
3 Meter Measurements 6-18 GHz	2.58	5.16
AC Line Conducted	1.72	3.43



Testing
NVLAP Lab Code 200087-0

Annex B Rogers Labs Test Equipment List

List of Test Equipment	Calibration	Date	Due
Spectrum Analyzer: Rohde & Schwarz ESU40		5/16	5/17
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520		5/16	5/17
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W			
Spectrum Analyzer: HP 8591EM		5/16	5/17
Antenna: EMCO Biconilog Model: 3143		5/16	5/17
Antenna: Sunol Biconilog Model: JB6		10/16	10/17
Antenna: EMCO Log Periodic Model: 3147		10/16	10/17
Antenna: Com Power Model: AH-118		10/16	10/17
Antenna: Com Power Model: AH-840		5/16	5/18
Antenna: Antenna Research Biconical Model: BCD 235		10/16	10/17
Antenna: Com Power Model: AL-130		10/16	10/17
Antenna: EMCO 6509		10/16	10/17
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohms/0.1 µf		10/16	10/17
R.F. Preamp CPPA-102		10/16	10/17
Attenuator: HP Model: HP11509A		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Attenuator: Mini Circuits Model: CAT-3		10/16	10/17
Cable: Belden RG-58 (L1)		10/16	10/17
Cable: Belden RG-58 (L2)		10/16	10/17
Cable: Belden 8268 (L3)		10/16	10/17
Cable: Time Microwave: 4M-750HF290-750		10/16	10/17
Cable: Time Microwave: 10M-750HF290-750		10/16	10/17
Frequency Counter: Leader LDC825		2/16	2/17
Oscilloscope Scope: Tektronix 2230		2/16	2/17
Wattmeter: Bird 43 with Load Bird 8085		2/16	2/17
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140		2/16	2/17
R.F. Generators: HP 606A, HP 8614A, HP 8640B		2/16	2/17
R.F. Power Amp 65W Model: 470-A-1010		2/16	2/17
R.F. Power Amp 50W M185- 10-501		2/16	2/17
R.F. Power Amp A.R. Model: 10W 1010M7		2/16	2/17
R.F. Power Amp EIN Model: A301		2/16	2/17
LISN: Compliance Eng. Model 240/20		2/16	2/17
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08		2/16	2/17
Antenna: EMCO Dipole Set 3121C		2/16	2/17
Antenna: C.D. B-101		2/16	2/17
Antenna: Solar 9229-1 & 9230-1		2/16	2/17
Audio Oscillator: H.P. 201CD		2/16	2/17
ESD Test Set 2010i		2/16	2/17
Fast Transient Burst Generator Model: EFT/B-101		2/16	2/17
Field Intensity Meter: EFM-018		2/16	2/17
KEYTEK Ecat Surge Generator		2/16	2/17
Shielded Room 5 M x 3 M x 3.0 M			

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122
Test to: 47CFR, 15.407, RSS-247

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD
Date: March 3, 2017

Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years' experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held


Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.



Scot D. Rogers



Testing
NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

April 16, 2015

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace
Louisburg, KS 66053

Attention: Scot Rogers,


Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: April 16, 2015

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

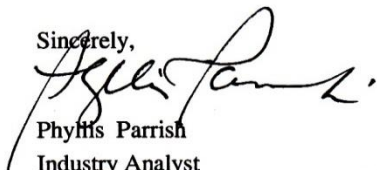

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 2

Mikrotikls SIA
Model: RB911-5HacD-US
Test #: 161122

Test to: 47CFR, 15.407, RSS-247

File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5
FCC ID: TV7RB911-5HACD
IC: 7442A-7442A-9115HACD


Date: March 3, 2017

Page 83 of 84



Testing
NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



June 08, 2015

OUR FILE: 46405-3041
Authorization No: 010277847-001

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg, KS
USA
66053

Attention: Mr. Scot D. Rogers

Dear Sir:

The Bureau has received your application for the renewal of 3m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2009 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2009 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2009 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to exceed **three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL; http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Bill Payn
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station AH@
Ottawa, Ontario K2H 8S2
Email: certification.bureau@ic.gc.ca

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053

Phone/Fax: (913) 837-3214

Revision 2

Mikrotikls SIA

Model: RB911-5HacD-US

Test #: 161122

Test to: 47CFR, 15.407, RSS-247

File: Mikrotikls RB9115HacD NII TstRpt 161122 r2

S/N: 67D80599ACC5

FCC ID: TV7RB911-5HACD

IC: 7442A-7442A-9115HACD

Date: March 3, 2017

Page 84 of 84