



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 15.407, RSS-247 Issue 2

Report No.: MIKO101-U3 Radiated Rev A

Company: Mikrotiks SIA (MikroTik)

Model Name: RB922UAGS-5HPacT-NM-US

REGULATORY COMPLIANCE TEST REPORT

Company: Mikrotikls SIA (MikroTik)

Model Name: RB922UAGS-5HPacT-NM-US

To: FCC CFR 47 Part 15 Subpart E 15.407

Test Report Serial No.: MIKO101-U8_Radiated Rev A

This report supersedes: NONE

Applicant: Mikrotikls SIA (MikroTik)
Brivibas gatve 214i
Riga, LV-1039
Latvia

Issue Date: 16th September 2020

| Master Document Number | Addendum Reports |
|------------------------|----------------------|
| MIKO101-U8_Master | MIKO101-U8_Conducted |
| | MIKO101-U8_Radiated |
| | MIKO101-U8_DFS |

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

| | |
|---|-----------|
| 1. TEST RESULTS | 4 |
| 1.1. Radiated | 4 |
| 1.1.1. <i>TX Spurious & Restricted Band Emissions</i> | 7 |
| 1.1.1.1. MikroTik HGO-antenna-OUT | 7 |
| 1.1.1.2. MikroTik MTAS-5G-19D120 | 13 |
| 1.1.2. <i>Restricted Edge & Band-Edge Emissions</i> | 19 |
| 1.1.2.3. MikroTik HGO-antenna-OUT | 19 |
| 1.1.2.4. MikroTik MTAS-5G-19D120 | 28 |
| A. APPENDIX - GRAPHICAL IMAGES | 37 |
| A.1. Radiated..... | 38 |
| A.1.1. <i>TX Spurious & Restricted Band Emissions</i> | 38 |
| A.1.1.1. MikroTik HGO-antenna-OUT..... | 38 |
| A.1.1.2. MikroTik MTAS-5G-19D120 | 44 |
| A.1.2. <i>Restricted Edge & Band-Edge Emissions</i> | 50 |
| A.1.2.3. MikroTik HGO-antenna-OUT..... | 50 |
| A.1.2.4. MikroTik MTAS-5G-19D120 | 58 |

1. TEST RESULTS

1.1. Radiated

| Radiated Test Conditions for Radiated Spurious and Band-Edge Emissions | | | |
|--|---|----------------------------|-------------|
| Standard: | FCC CFR 47:15.407 ISED RSS-247 | Ambient Temp. (°C): | 20.0 - 24.5 |
| Test Heading: | Radiated Spurious and Band-Edge Emissions | Rel. Humidity (%): | 32 - 45 |
| Standard Section(s): | 15.407 (b), 15.205, 15.209 RSS-247: 6.2.2.2; 6.2.3.2 | Pressure (mBars): | 999 - 1001 |
| Reference Document(s): | See Normative References | | |

Test Procedure for Radiated Spurious and Band-Edge Emissions

Radiated emissions for restricted bands above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned. Measurements on any restricted band frequency or frequencies above 1 GHz are based on the use of measurement instrumentation employing peak and average detectors. All measurements were performed using a resolution bandwidth of 1 MHz.

Test configuration and setup for Undesirable Measurement were per the Radiated Test Set-up specified in this document.

15.407 (b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Limits for Restricted Bands (15.205, 15.209)

Peak emission: 74 dBuV/m

Average emission: 54 dBuV/m

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

FS = R + AF + CORR - FO

where:

FS = Field Strength
R = Measured Spectrum analyzer Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain
FO = Distance Falloff Factor
NFL = Notch Filter Loss

Example:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dBµV/m);

$$E = 1000000 \times \sqrt[3]{30P} / 3 \text{ } \mu\text{V/m}$$

where P is the EIRP in Watts

Therefore: -27 dBm/MHz equates to 68.23 dBµV/m

Conversion between dBmV/m (or dBmV) and mV/m (or mV) are as follows:
 Level (dBmV/m) = 20 * Log (level (mV/m))

40 dBmV/m = 100 mV/m
 48 dBmV/m = 250 mV/m

Restricted Bands of Operation (15.205)

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

| Frequency Band | | | |
|-------------------|---------------------|---------------|-------------|
| MHz | MHz | MHz | GHz |
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | Above 38.6 |
| 13.36-13.41 | | | |

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.
- (8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).
- (9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

Transmitter Spurious Emissions 18GHz to 40GHz:

Spurious emissions in the above frequency band was measured and no spurious emissions were observed within 6 dB of the limit.

1.1.1. TX Spurious & Restricted Band Emissions

1.1.1.1. MikroTik HGO-antenna-OUT

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5260.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| #1 | 5261.22 | 82.62 | 2.92 | -12.22 | 73.32 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5300.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5300.36 | 81.89 | 3.04 | -11.98 | 72.95 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5325.72 | 81.84 | 2.96 | -11.96 | 72.84 | Fundamental | Vertical | 200 | 0 | -- | -- | |
| #2 | 10640.50 | 55.03 | 4.44 | -4.57 | 54.90 | Max Peak | Vertical | 195 | 0 | 68.2 | -13.3 | Pass |
| #3 | 10640.50 | 40.91 | 4.44 | -4.57 | 40.78 | Max Avg | Vertical | 195 | 0 | 54.0 | -13.2 | Pass |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5497.93 | 69.77 | 3.04 | -11.62 | 61.19 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5580.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5581.17 | 77.16 | 3.15 | -11.56 | 68.75 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5720.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5714.57 | 64.60 | 3.16 | -11.29 | 56.47 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

1.1.1.2. MikroTik MTAS-5G-19D120

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5260.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5258.52 | 67.60 | 2.93 | -12.21 | 58.32 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | |
| Channel Frequency (MHz): | 5300.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5301.13 | 67.55 | 3.05 | -11.98 | 58.62 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5317.30 | 65.18 | 2.97 | -12.02 | 56.13 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5506.08 | 56.83 | 3.07 | -11.66 | 48.24 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5580.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5584.91 | 65.65 | 3.12 | -11.56 | 57.21 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

Equipment Configuration for TX Spurious & Restricted Band Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5720.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

1000.00 - 18000.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5718.87 | 56.12 | 3.19 | -11.24 | 48.07 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

1.1.2. Restricted Edge & Band-Edge Emissions

1.1.2.3. MikroTik HGO-antenna-OUT

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5250 - 5350 MHz

| MikroTik HGO-antenna-OUT | | Band-Edge Freq | Limit 74.0 dBµV/m | Limit 54.0 dBµV/m | Power Setting |
|--------------------------|---------------------------|----------------|-------------------|-------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| 802.11a | 5320.00 | 5350.00 | 65.82 | 48.57 | Default |
| 802.11ac-80 | 5290.00 | 5350.00 | 70.84 | 52.76 | 16 |
| 802.11n HT-20 | 5320.00 | 5350.00 | 63.60 | 48.57 | Default |
| 802.11n HT-40 | 5310.00 | 5350.00 | 67.32 | 51.25 | Default |

5470 - 5725 MHz

| MikroTik HGO-antenna-OUT | | Restricted-Edge Freq | Limit 68.2 dBµV/m | Limit 54.0 dBµV/m | Power Setting |
|--------------------------|---------------------------|----------------------|-------------------|-------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dBµV/m | dBµV/m | |
| 802.11a | 5500.00 | 5460.00 | 67.28 | 49.77 | 20 |
| 802.11ac-80 | 5530.00 | 5460.00 | 66.02 | 48.13 | 17 |
| 802.11n HT-20 | 5500.00 | 5460.00 | 66.33 | 48.13 | 20 |
| 802.11n HT-40 | 5510.00 | 5460.00 | 66.68 | 47.95 | 20 |

Click on the links to view the data.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5450.08 | 12.21 | 3.06 | 34.50 | 49.77 | Max Avg | Vertical | 188 | 175 | 54.0 | -4.2 | Pass |
| #3 | 5470.00 | 29.67 | 3.06 | 34.55 | 67.28 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.0 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|--------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 82 |
| Channel Frequency (MHz): | 5530.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 17 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5456.39 | 10.56 | 3.05 | 34.52 | 48.13 | Max Avg | Vertical | 188 | 175 | 54.0 | -5.9 | Pass |
| #3 | 5470.00 | 28.41 | 3.06 | 34.55 | 66.02 | Max Peak | Vertical | 188 | 175 | 68.2 | -2.2 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. Power reduced to meet Band Edge Limit.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|---------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 10.54 | 3.06 | 34.53 | 48.13 | Max Avg | Vertical | 188 | 175 | 54.0 | -5.9 | Pass |
| #3 | 5469.70 | 28.72 | 3.06 | 34.55 | 66.33 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.9 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|---------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 93 |
| Channel Frequency (MHz): | 5510.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | 20 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 10.36 | 3.06 | 34.53 | 47.95 | Max Avg | Vertical | 188 | 175 | 54.0 | -6.1 | Pass |
| #3 | 5468.42 | 29.06 | 3.07 | 34.55 | 66.68 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.6 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|-------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11a |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #2 | 5350.98 | 28.30 | 3.06 | 34.46 | 65.82 | Max Peak | Vertical | 192 | 205 | 74.0 | -8.2 | Pass |
| #3 | 5359.96 | 11.05 | 3.04 | 34.48 | 48.57 | Max Avg | Vertical | 192 | 205 | 54.0 | -5.4 | Pass |
| #1 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|--------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 82 |
| Channel Frequency (MHz): | 5290.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 16 | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #2 | 5352.57 | 15.24 | 3.05 | 34.47 | 52.76 | Max Avg | Vertical | 192 | 205 | 54.0 | -0.4 | Pass |
| #3 | 5353.87 | 33.32 | 3.05 | 34.47 | 70.84 | Max Peak | Vertical | 192 | 205 | 74.0 | -3.2 | Pass |
| #1 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. Power Reduced to meet Band Edge Limit. DCCF of 0.86 added to average measurement.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|---------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 11.05 | 3.06 | 34.46 | 48.57 | Max Avg | Vertical | 192 | 205 | 54.0 | -5.4 | Pass |
| #3 | 5350.32 | 26.08 | 3.06 | 34.46 | 63.60 | Max Peak | Vertical | 192 | 205 | 74.0 | -10.4 | Pass |
| #2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|--------------------------|------------------------|---------------|
| Antenna: | MikroTik HGO-antenna-OUT | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 7.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 92 |
| Channel Frequency (MHz): | 5310.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 13.73 | 3.06 | 34.46 | 51.25 | Max Avg | Vertical | 192 | 205 | 54.0 | -2.8 | Pass |
| #2 | 5350.00 | 29.80 | 3.06 | 34.46 | 67.32 | Max Peak | Vertical | 192 | 205 | 74.0 | -6.7 | Pass |
| #3 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

1.1.2.4. MikroTik MTAS-5G-19D120

RESULTS SUMMARY FOR RADIATED BAND-EDGE EMISSIONS

5250 - 5350 MHz

| MikroTik MTAS-5G-19D120 | | Band-Edge Freq | Limit 74.0 dB μ V/m | Limit 54.0 dB μ V/m | Power Setting |
|-------------------------|---------------------------|----------------|-------------------------|-------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dB μ V/m | dB μ V/m | |
| 802.11a | 5320.00 | 5350.00 | 58.51 | 44.42 | Default |
| 802.11ac-80 | 5290.00 | 5350.00 | 66.10 | 49.40 | Default |
| 802.11n HT-20 | 5320.00 | 5350.00 | 58.00 | 44.42 | Default |
| 802.11n HT-40 | 5310.00 | 5350.00 | 60.17 | 45.96 | Default |

5470 - 5725 MHz

| MikroTik MTAS-5G-19D120 | | Restricted-Edge Freq | Limit 68.2 dB μ V/m | Limit 54.0 dB μ V/m | Power Setting |
|-------------------------|---------------------------|----------------------|-------------------------|-------------------------|---------------|
| Operational Mode | Operating Frequency (MHz) | MHz | dB μ V/m | dB μ V/m | |
| 802.11a | 5500.00 | 5460.00 | 62.40 | 48.31 | 8 |
| 802.11ac-80 | 5530.00 | 5460.00 | 67.16 | 49.47 | 8 |
| 802.11n HT-20 | 5500.00 | 5460.00 | 62.08 | 48.31 | 8 |
| 802.11n HT-40 | 5510.00 | 5460.00 | 62.57 | 48.49 | 8 |

Click on the links to view the data.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 99 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 10.72 | 3.06 | 34.53 | 48.31 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.7 | Pass |
| #3 | 5468.72 | 24.79 | 3.06 | 34.55 | 62.40 | Max Peak | Vertical | 181 | 0 | 68.2 | -5.8 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|--------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5530.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 11.88 | 3.06 | 34.53 | 49.47 | Max Avg | Vertical | 0 | 0 | 54.0 | -4.5 | Pass |
| #3 | 5470.00 | 29.55 | 3.06 | 34.55 | 67.16 | Max Peak | Vertical | 0 | 0 | 68.2 | -1.1 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|---------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5500.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 10.72 | 3.06 | 34.53 | 48.31 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.7 | Pass |
| #3 | 5465.41 | 24.47 | 3.07 | 34.54 | 62.08 | Max Peak | Vertical | 181 | 0 | 68.2 | -6.2 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Lower Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|---------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5510.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | 8 | Tested By: | JMH |

Test Measurement Results

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5460.00 | 10.90 | 3.06 | 34.53 | 48.49 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.5 | Pass |
| #3 | 5462.12 | 24.98 | 3.06 | 34.53 | 62.57 | Max Peak | Vertical | 181 | 0 | 68.2 | -5.7 | Pass |
| #2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| #4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|-------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11a |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.00 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 6.90 | 3.06 | 34.46 | 44.42 | Max Avg | Vertical | 0 | 0 | 54.0 | -9.6 | Pass |
| #3 | 5353.85 | 20.99 | 3.05 | 34.47 | 58.51 | Max Peak | Vertical | 0 | 0 | 74.0 | -15.5 | Pass |
| #2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|--------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11ac-80 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 82 |
| Channel Frequency (MHz): | 5290.00 | Data Rate: | 29.30 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 11.88 | 3.06 | 34.46 | 49.40 | Max Avg | Vertical | 182 | 0 | 54.0 | -4.6 | Pass |
| #2 | 5350.00 | 28.58 | 3.06 | 34.46 | 66.10 | Max Peak | Vertical | 182 | 0 | 74.0 | -7.9 | Pass |
| #3 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|---------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11n HT-20 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 98 |
| Channel Frequency (MHz): | 5320.00 | Data Rate: | 6.50 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 6.90 | 3.06 | 34.46 | 44.42 | Max Avg | Vertical | 182 | 0 | 54.0 | -9.6 | Pass |
| #3 | 5358.98 | 20.49 | 3.04 | 34.47 | 58.00 | Max Peak | Vertical | 182 | 0 | 74.0 | -16.0 | Pass |
| #2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

Equipment Configuration for Restricted Upper Band-Edge Emissions

| | | | |
|---------------------------------|-------------------------|------------------------|---------------|
| Antenna: | MikroTik MTAS-5G-19D120 | Variant: | 802.11n HT-40 |
| Antenna Gain (dBi): | 19.00 | Modulation: | OFDM |
| Beam Forming Gain (Y): | Not Applicable | Duty Cycle (%): | 93 |
| Channel Frequency (MHz): | 5310.00 | Data Rate: | 13.50 MBit/s |
| Power Setting: | Default | Tested By: | JMH |

Test Measurement Results

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| #1 | 5350.00 | 8.44 | 3.06 | 34.46 | 45.96 | Max Avg | Vertical | 182 | 0 | 54.0 | -8.0 | Pass |
| #3 | 5352.24 | 22.65 | 3.06 | 34.46 | 60.17 | Max Peak | Vertical | 182 | 0 | 74.0 | -15.8 | Pass |
| #2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

A. APPENDIX - GRAPHICAL IMAGES

A.1. Radiated

A.1.1. TX Spurious & Restricted Band Emissions

A.1.1.1. MikroTik HGO-antenna-OUT

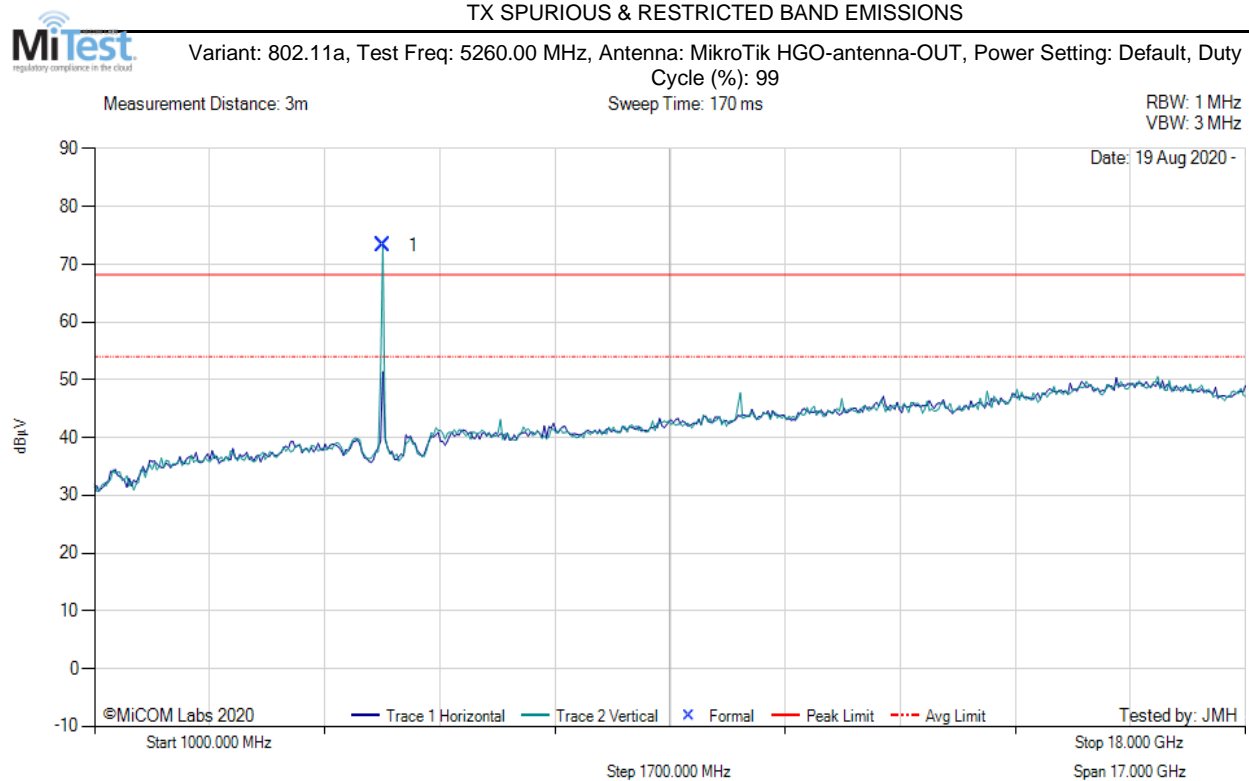

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5261.22 | 82.62 | 2.92 | -12.22 | 73.32 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5300.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: Default, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

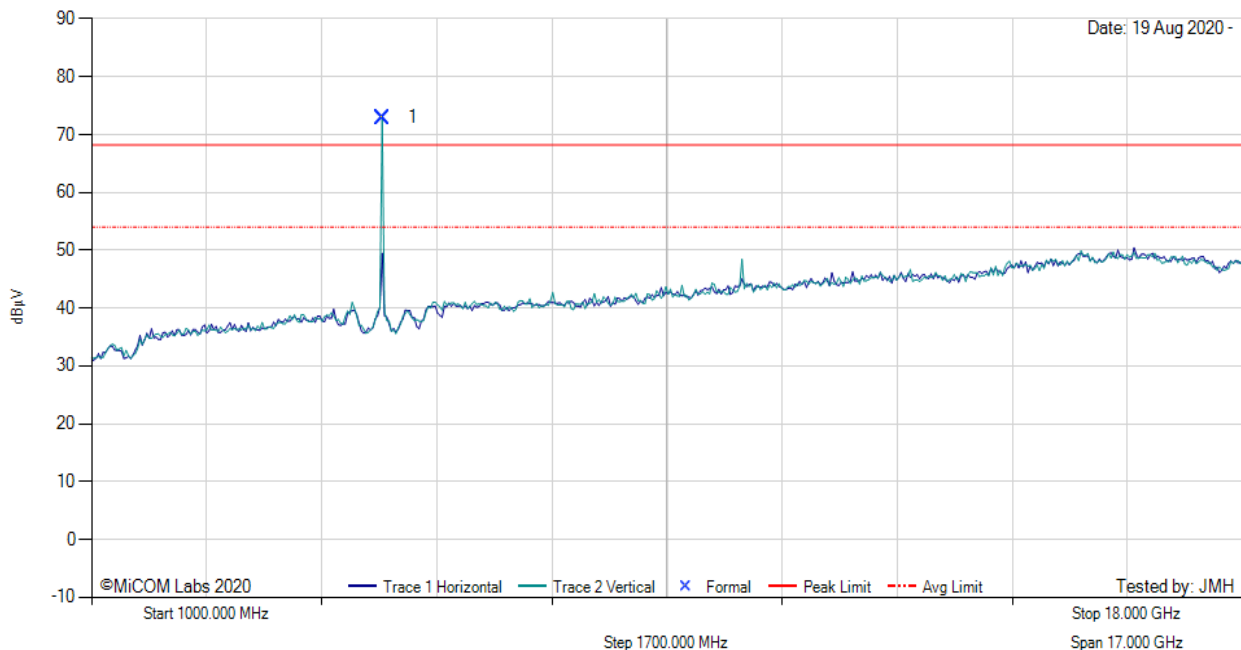

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5300.36 | 81.89 | 3.04 | -11.98 | 72.95 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: Default, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

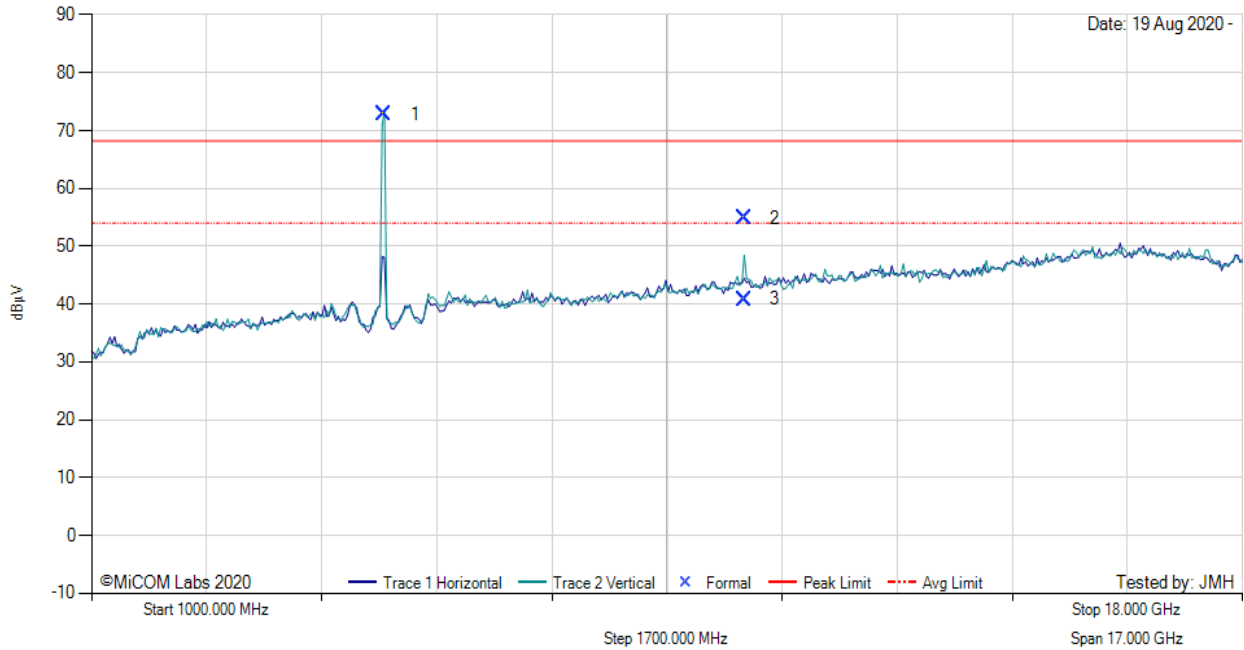

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5325.72 | 81.84 | 2.96 | -11.96 | 72.84 | Fundamental | Vertical | 200 | 0 | -- | -- | |
| 2 | 10640.50 | 55.03 | 4.44 | -4.57 | 54.90 | Max Peak | Vertical | 195 | 0 | 68.2 | -13.3 | Pass |
| 3 | 10640.50 | 40.91 | 4.44 | -4.57 | 40.78 | Max Avg | Vertical | 195 | 0 | 54.0 | -13.2 | Pass |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 20, Duty Cycle (%): 99

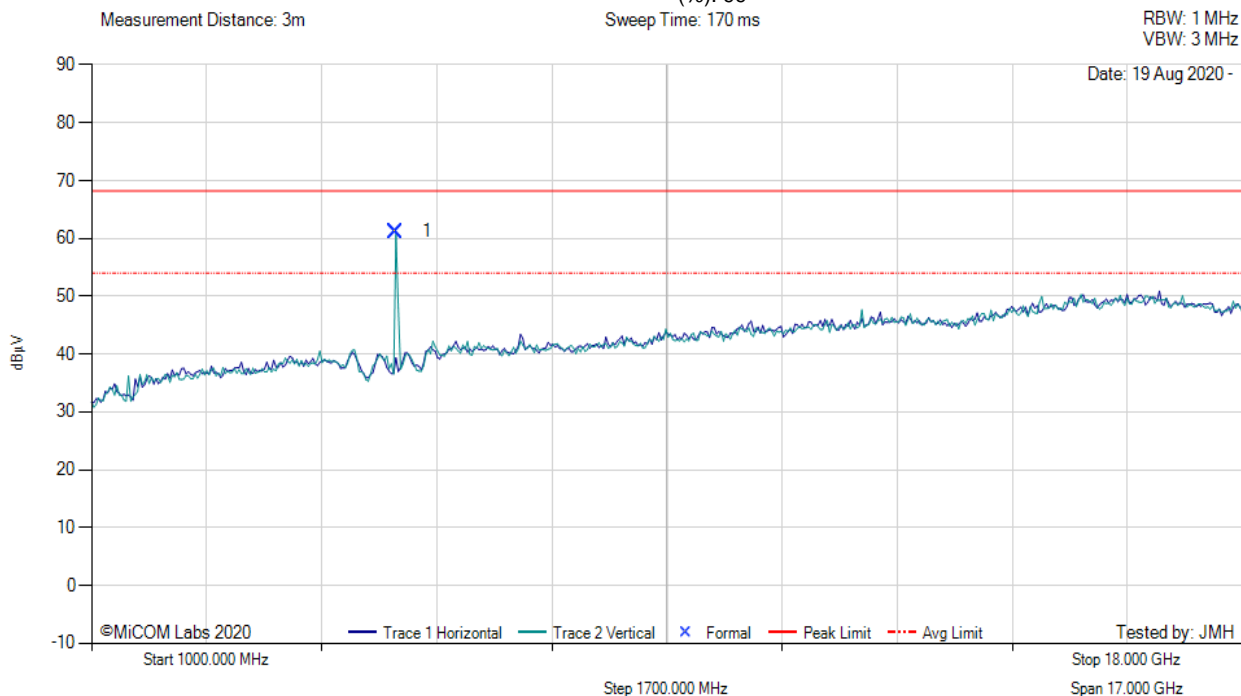

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5497.93 | 69.77 | 3.04 | -11.62 | 61.19 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5580.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 20, Duty Cycle (%): 99

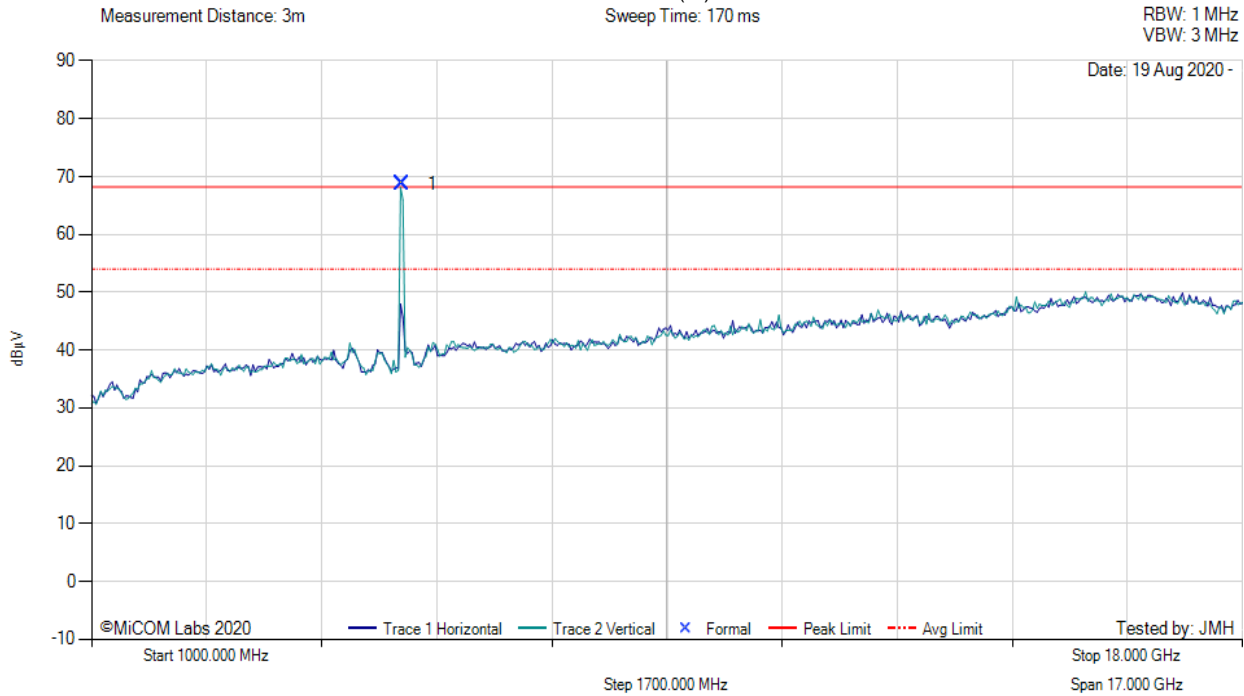

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5581.17 | 77.16 | 3.15 | -11.56 | 68.75 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5720.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 20, Duty Cycle (%): 99

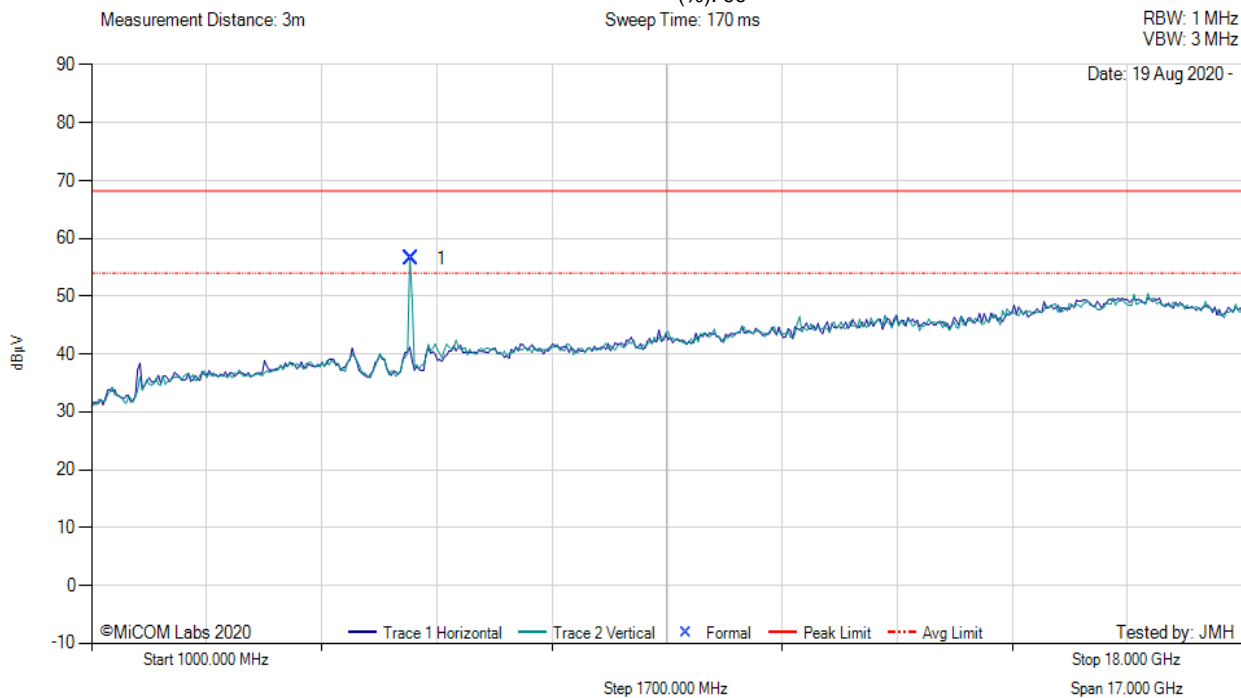

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5714.57 | 64.60 | 3.16 | -11.29 | 56.47 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.5G Notch in front of amp to prevent overload.

[back to matrix](#)

A.1.1.2. MikroTik MTAS-5G-19D120

TX SPURIOUS & RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5260.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

Date: 19 Aug 2020 -

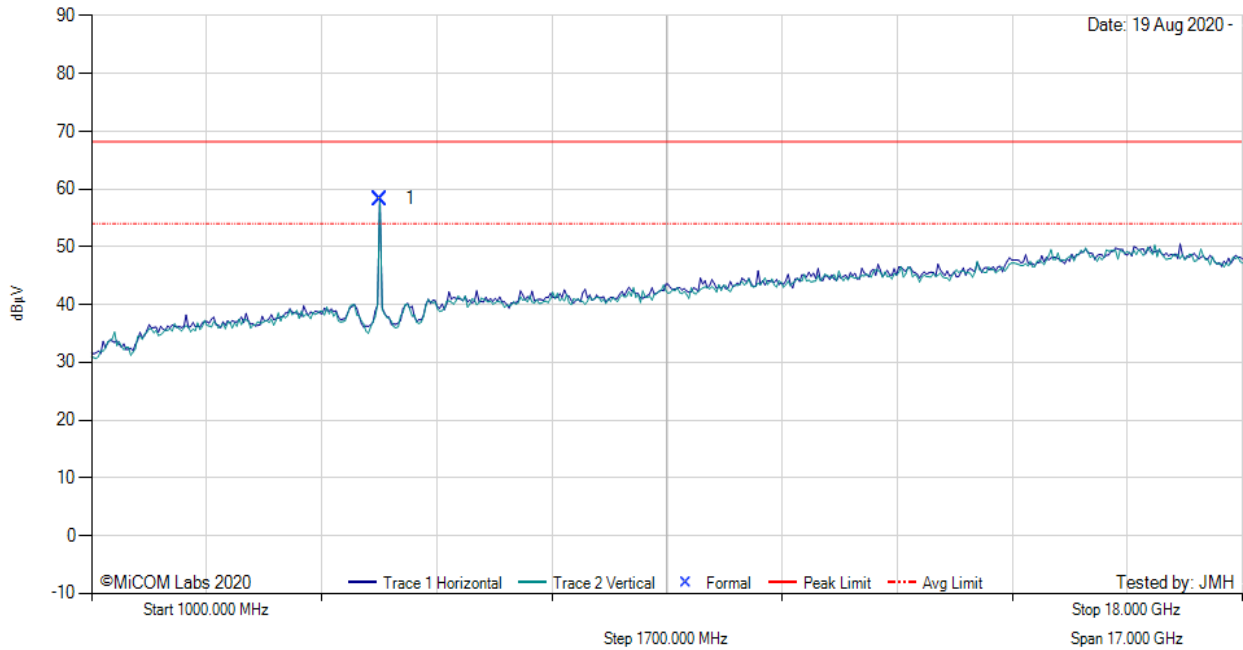

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5258.52 | 67.60 | 2.93 | -12.21 | 58.32 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)



TX SPURIOUS & RESTRICTED BAND EMISSIONS

Variant: 802.11a, Test Freq: 5300.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default

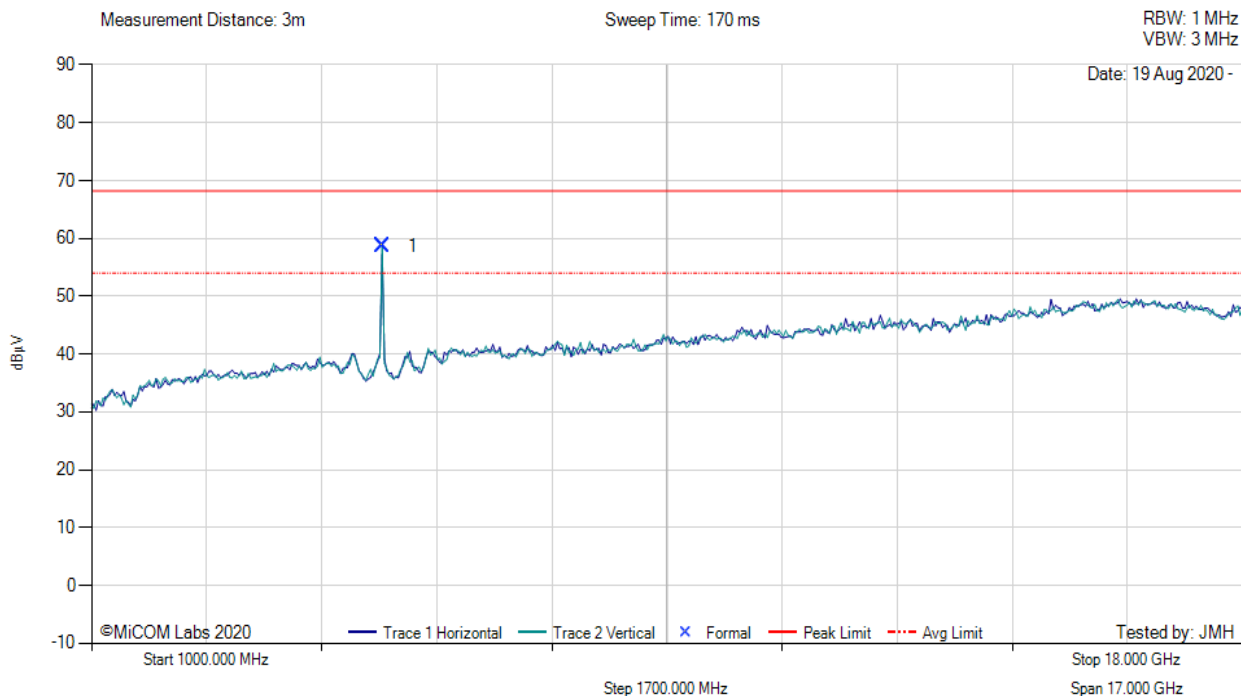

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5301.13 | 67.55 | 3.05 | -11.98 | 58.62 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS




Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 99

Measurement Distance: 3m

Sweep Time: 170 ms

RBW: 1 MHz
VBW: 3 MHz

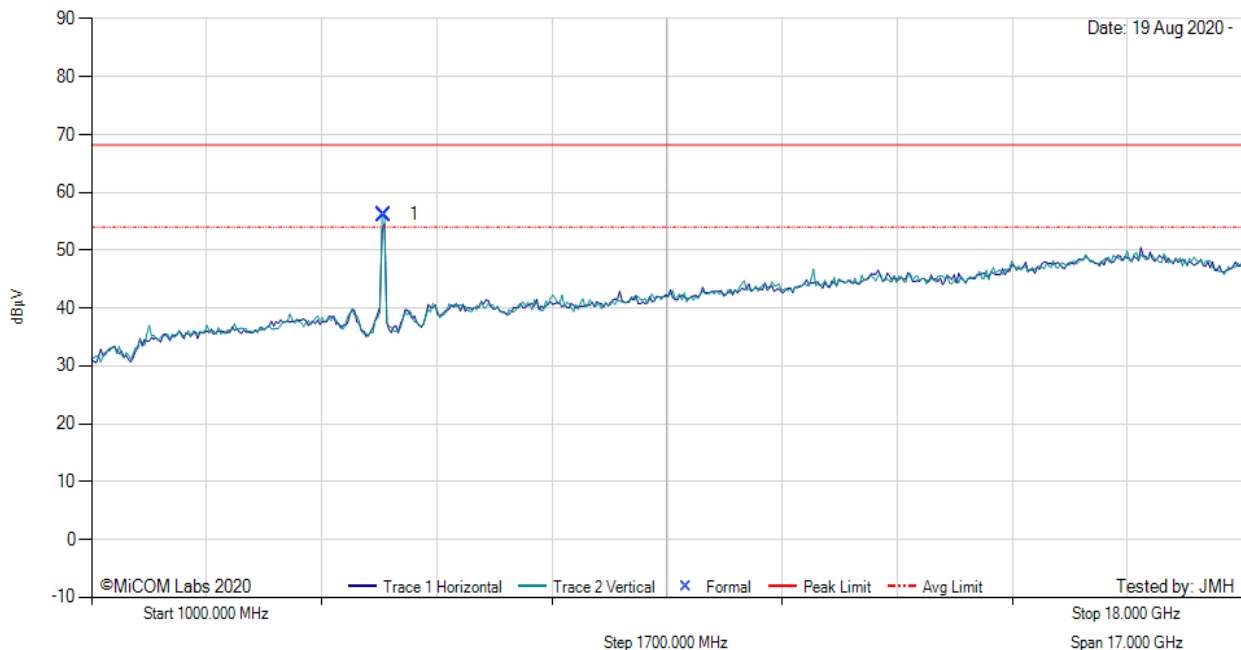

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5317.30 | 65.18 | 2.97 | -12.02 | 56.13 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 99

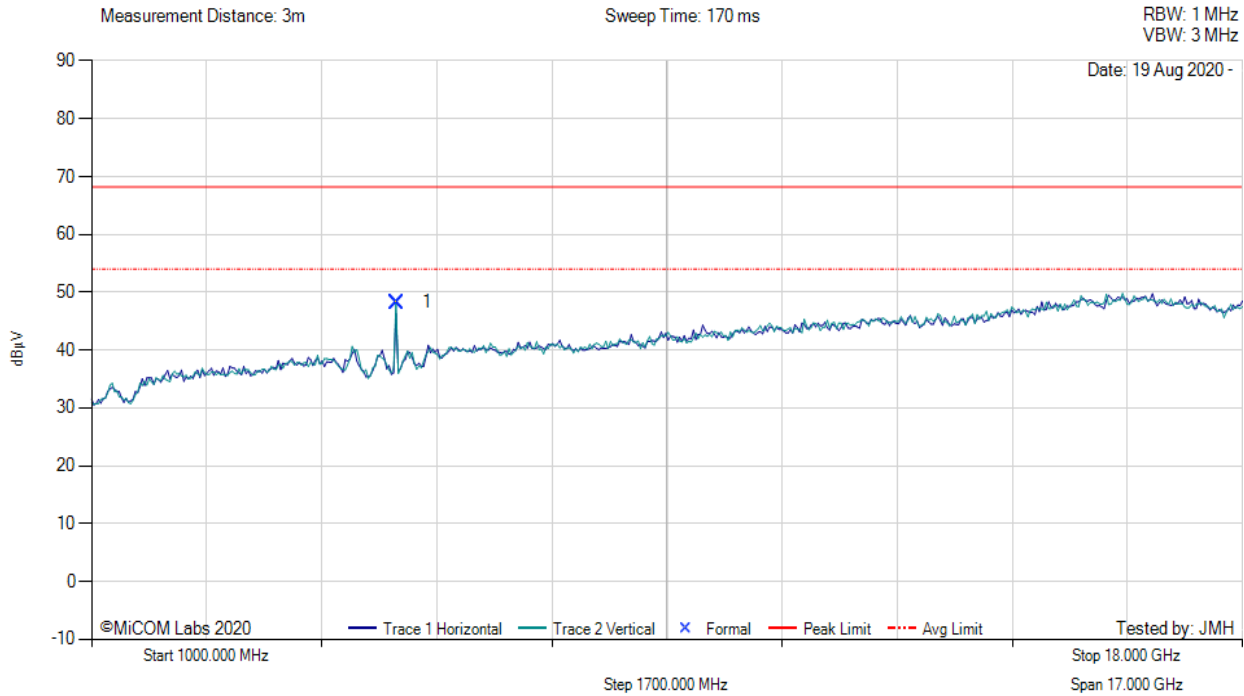

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5506.08 | 56.83 | 3.07 | -11.66 | 48.24 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5580.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 99

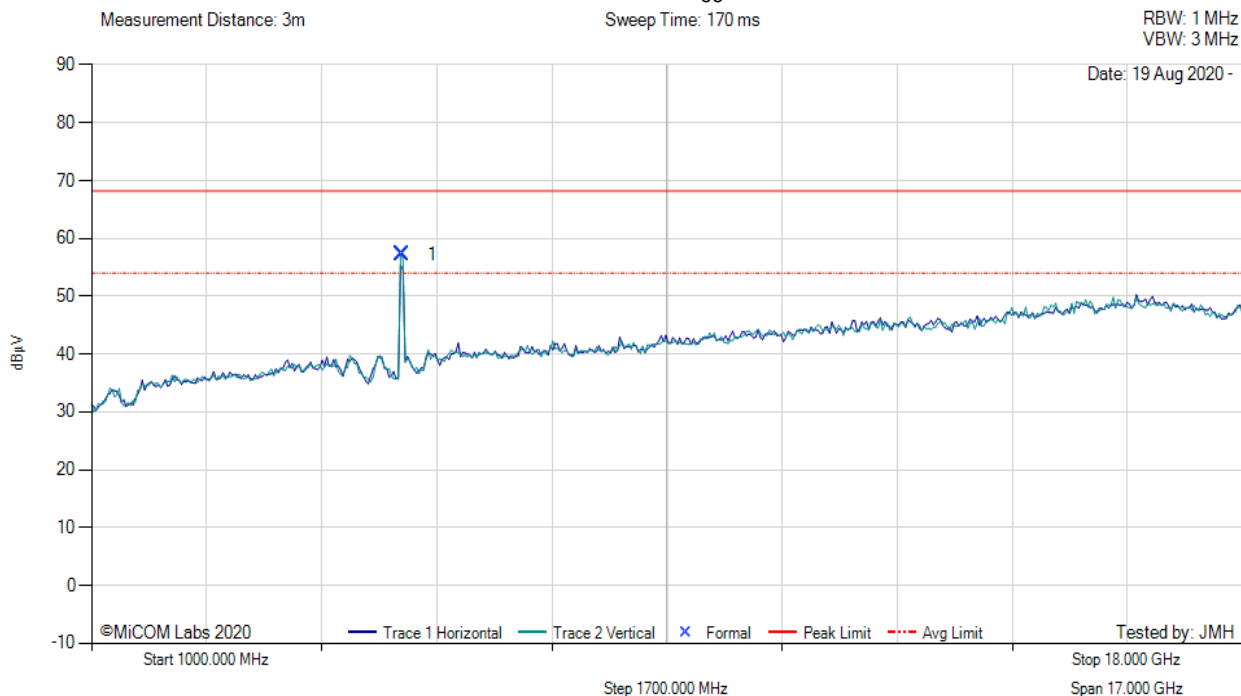

| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5584.91 | 65.65 | 3.12 | -11.56 | 57.21 | Fundamental | Vertical | 200 | 0 | -- | -- | |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

TX SPURIOUS & RESTRICTED BAND EMISSIONS



Variant: 802.11a, Test Freq: 5720.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 99

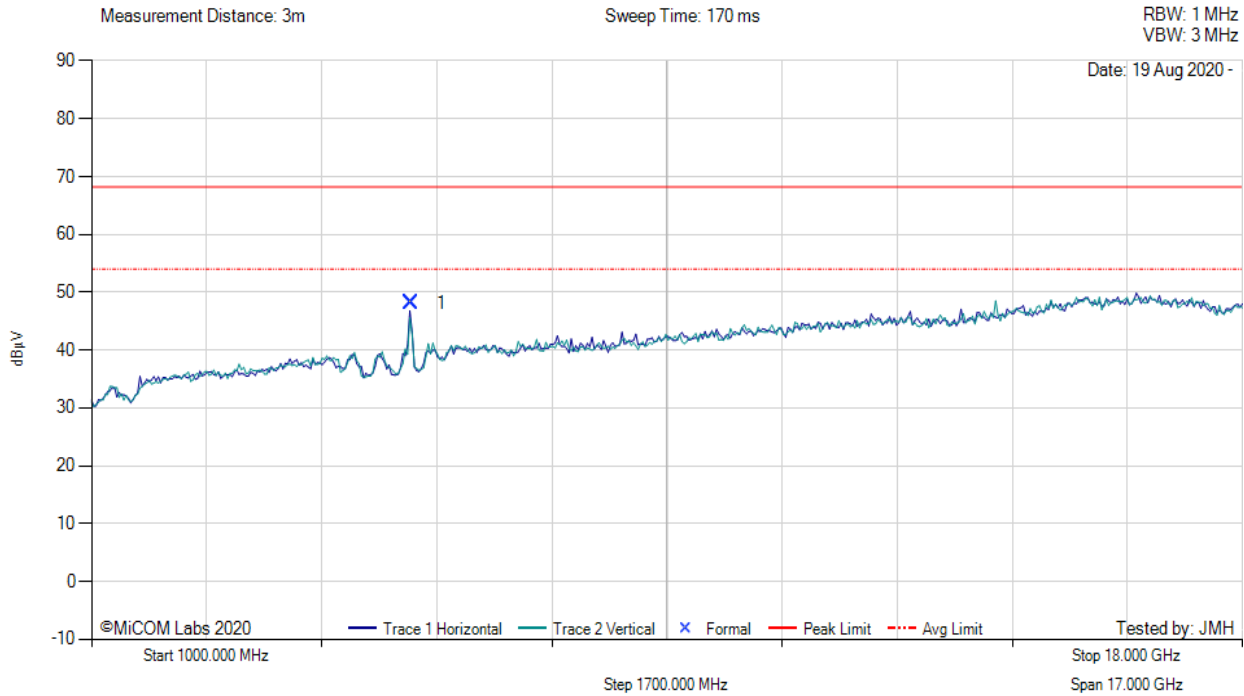


| 1000.00 - 18000.00 MHz | | | | | | | | | | | | |
|------------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5718.87 | 56.12 | 3.19 | -11.24 | 48.07 | Fundamental | Vertical | 200 | 0 | -- | -- | |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber. 5G Notch in front of amp to prevent overload.

[back to matrix](#)

A.1.2. Restricted Edge & Band-Edge Emissions

A.1.2.3. MikroTik HGO-antenna-OUT

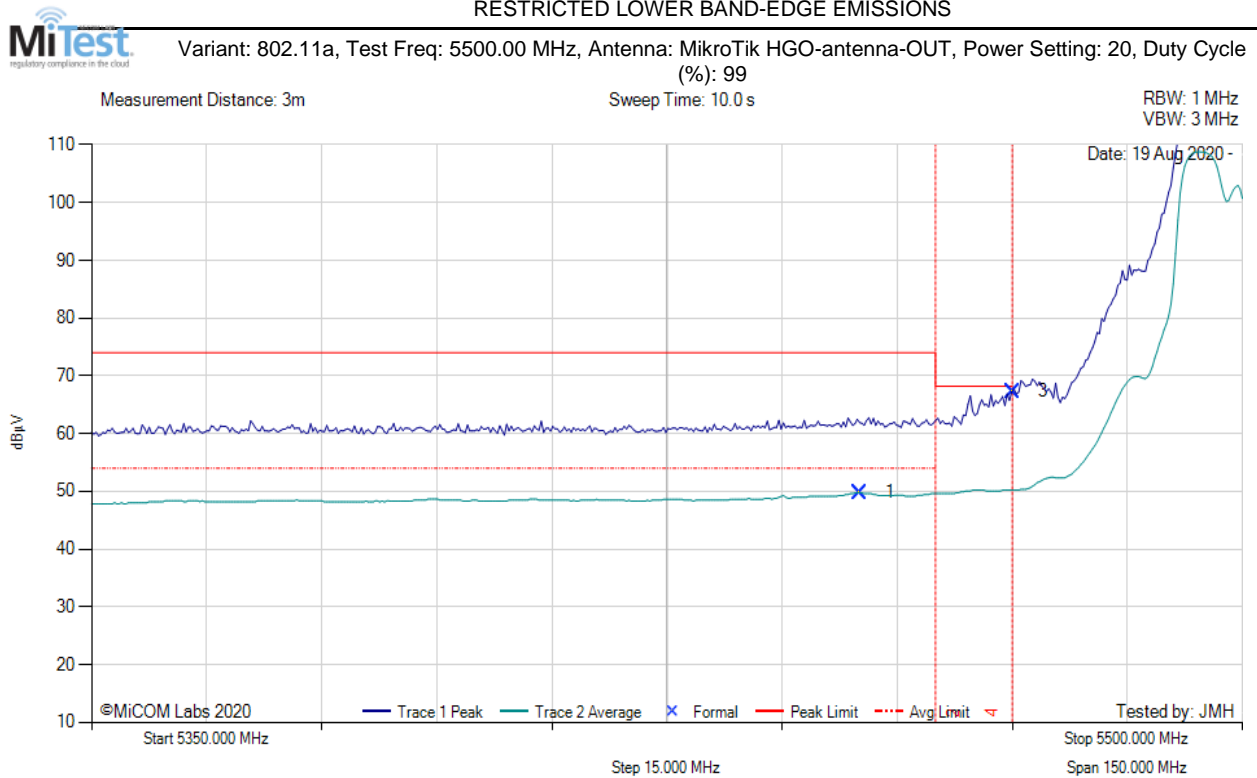

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5450.08 | 12.21 | 3.06 | 34.50 | 49.77 | Max Avg | Vertical | 188 | 175 | 54.0 | -4.2 | Pass |
| 3 | 5470.00 | 29.67 | 3.06 | 34.55 | 67.28 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.0 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS




Variant: 802.11ac-80, Test Freq: 5530.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 17, Duty Cycle (%): 82

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

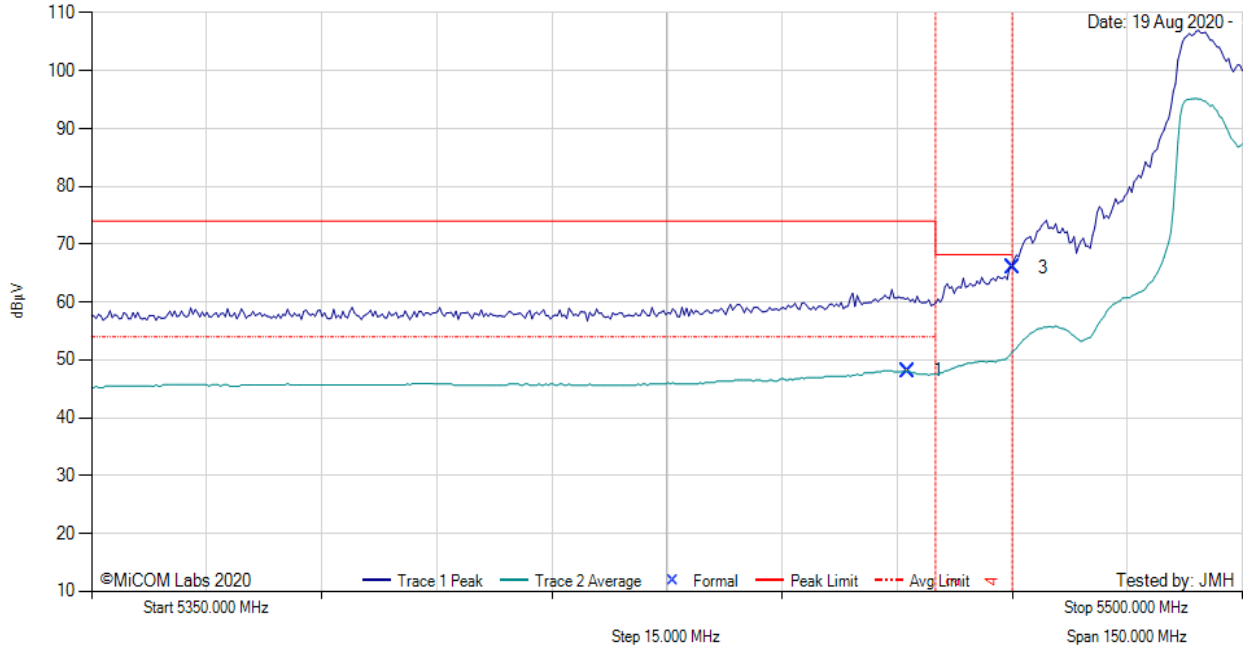

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 5456.39 | 10.56 | 3.05 | 34.52 | 48.13 | Max Avg | Vertical | 188 | 175 | 54.0 | -5.9 | Pass |
| 3 | 5470.00 | 28.41 | 3.06 | 34.55 | 66.02 | Max Peak | Vertical | 188 | 175 | 68.2 | -2.2 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. Power reduced to meet Band Edge Limit.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5500.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 20, Duty Cycle (%): 98

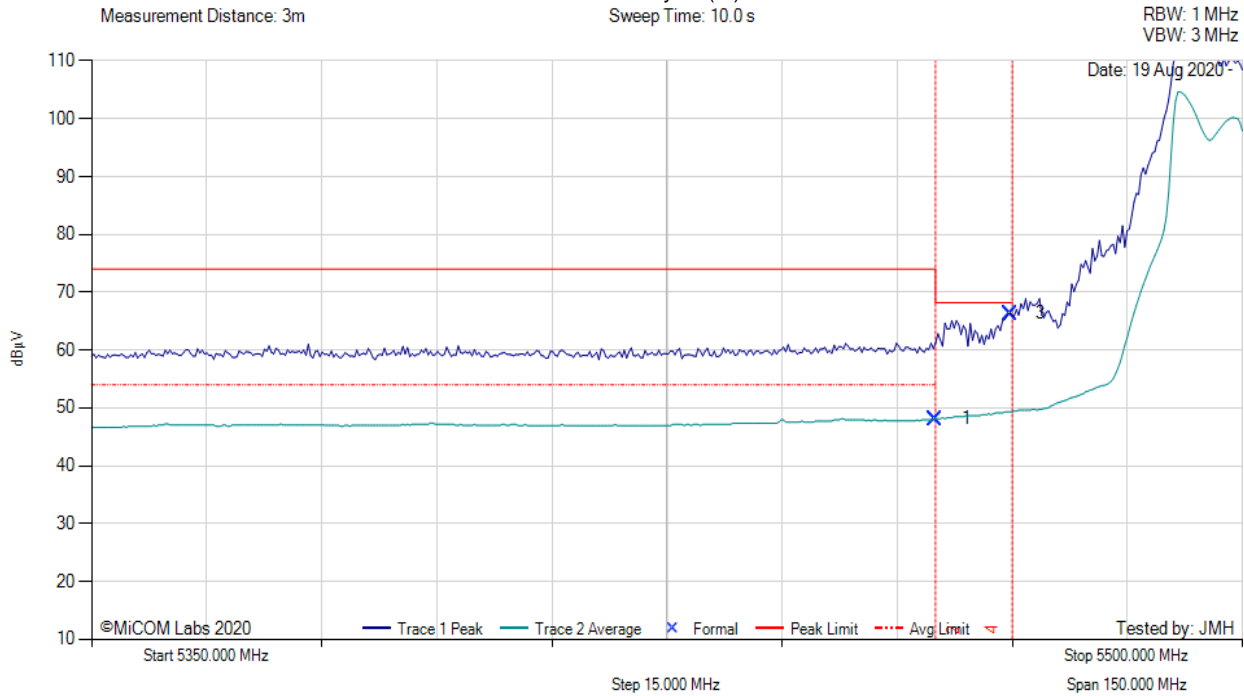

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5460.00 | 10.54 | 3.06 | 34.53 | 48.13 | Max Avg | Vertical | 188 | 175 | 54.0 | -5.9 | Pass |
| 3 | 5469.70 | 28.72 | 3.06 | 34.55 | 66.33 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.9 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5510.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 20, Duty Cycle (%): 93

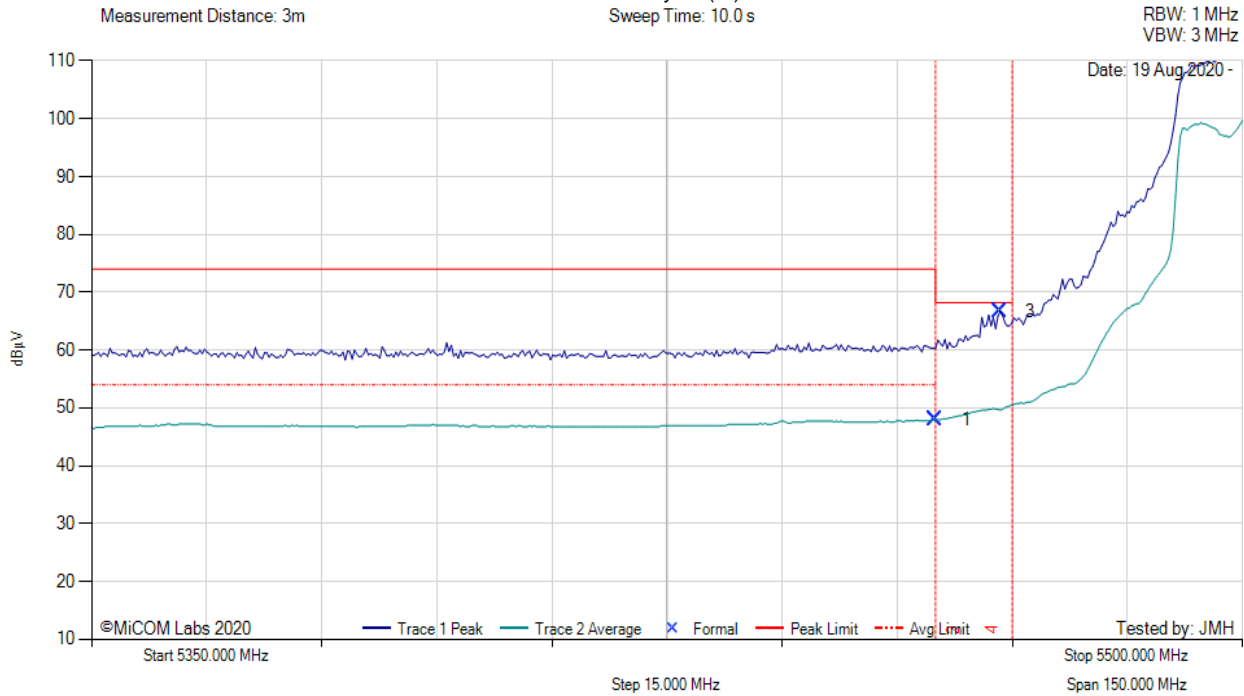

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5460.00 | 10.36 | 3.06 | 34.53 | 47.95 | Max Avg | Vertical | 188 | 175 | 54.0 | -6.1 | Pass |
| 3 | 5468.42 | 29.06 | 3.07 | 34.55 | 66.68 | Max Peak | Vertical | 188 | 175 | 68.2 | -1.6 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: Default, Duty Cycle (%): 99

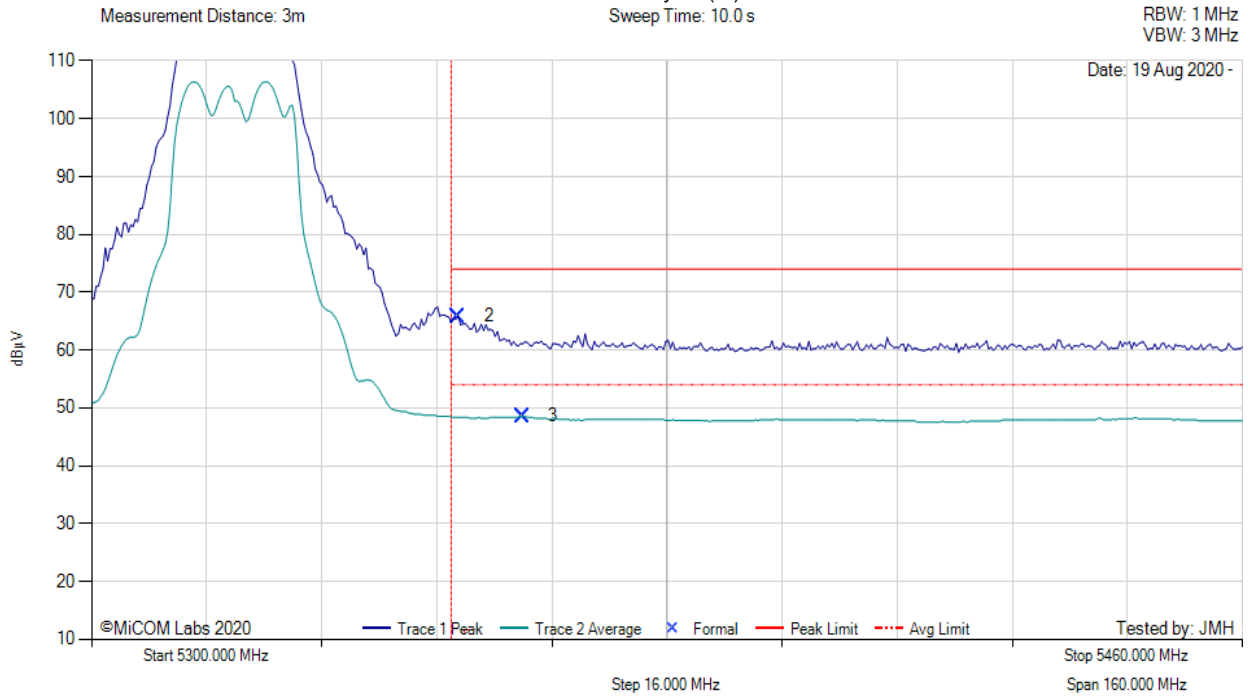

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5350.98 | 28.30 | 3.06 | 34.46 | 65.82 | Max Peak | Vertical | 192 | 205 | 74.0 | -8.2 | Pass |
| 3 | 5359.96 | 11.05 | 3.04 | 34.48 | 48.57 | Max Avg | Vertical | 192 | 205 | 54.0 | -5.4 | Pass |
| 1 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS




Variant: 802.11ac-80, Test Freq: 5290.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: 16, Duty Cycle (%): 82

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

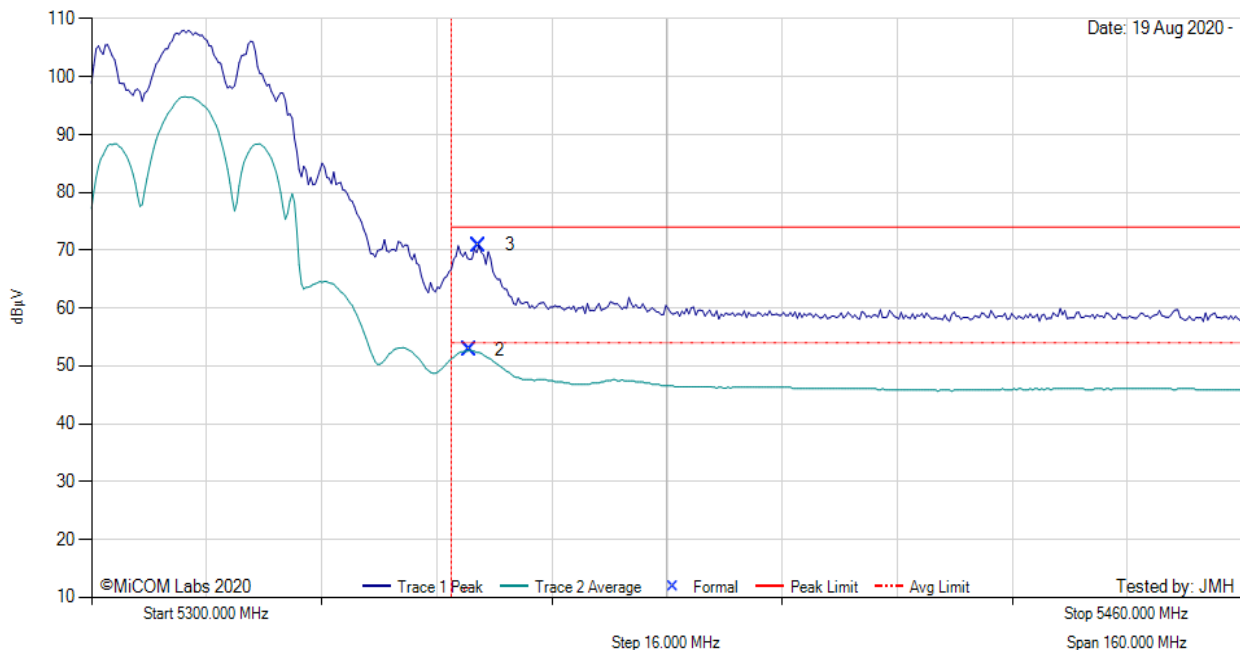

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 2 | 5352.57 | 15.24 | 3.05 | 34.47 | 52.76 | Max Avg | Vertical | 192 | 205 | 54.0 | -0.4 | Pass |
| 3 | 5353.87 | 33.32 | 3.05 | 34.47 | 70.84 | Max Peak | Vertical | 192 | 205 | 74.0 | -3.2 | Pass |
| 1 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber. Power Reduced to meet Band Edge Limit. DCCF of 0.86 added to average measurement.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5320.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: Default, Duty Cycle (%): 99

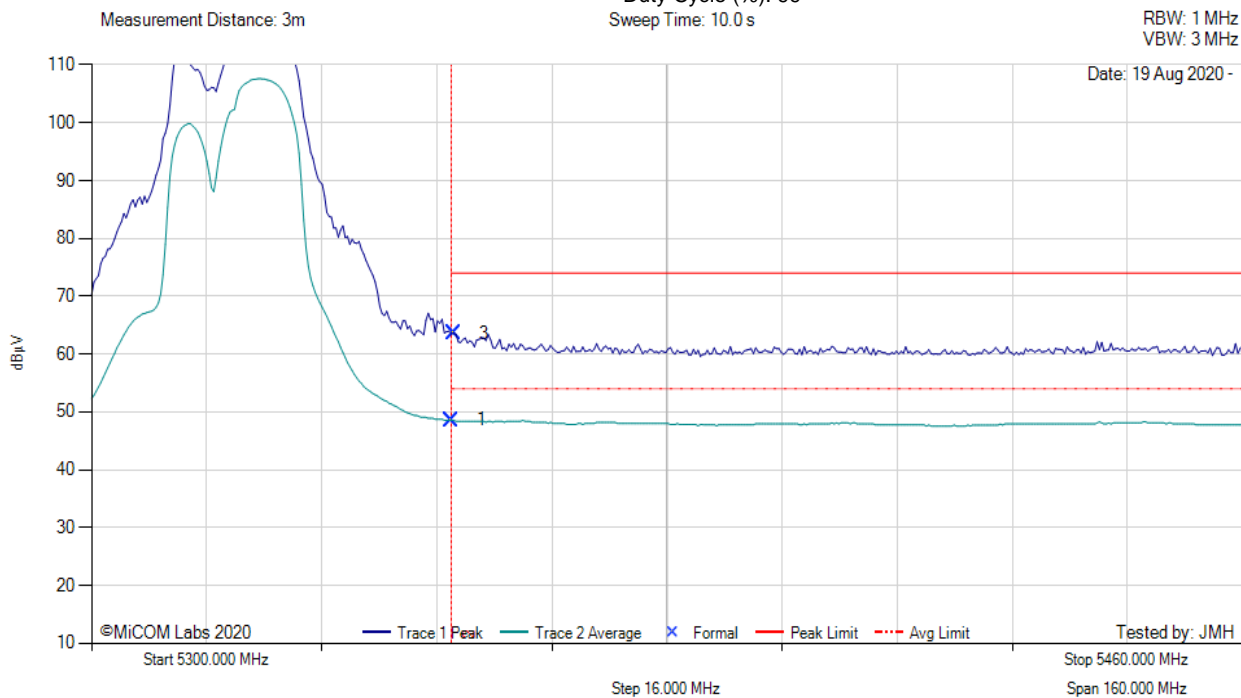

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5350.00 | 11.05 | 3.06 | 34.46 | 48.57 | Max Avg | Vertical | 192 | 205 | 54.0 | -5.4 | Pass |
| 3 | 5350.32 | 26.08 | 3.06 | 34.46 | 63.60 | Max Peak | Vertical | 192 | 205 | 74.0 | -10.4 | Pass |
| 2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |


Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5310.00 MHz, Antenna: MikroTik HGO-antenna-OUT, Power Setting: Default, Duty Cycle (%): 92

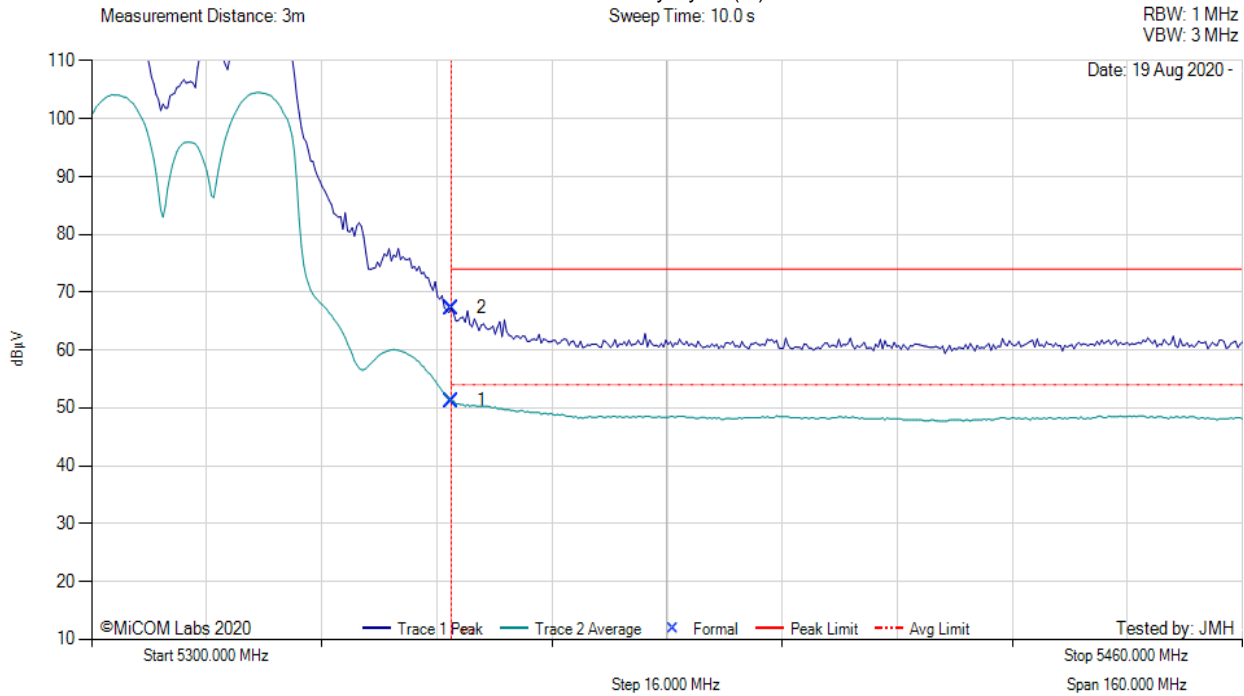

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5350.00 | 13.73 | 3.06 | 34.46 | 51.25 | Max Avg | Vertical | 192 | 205 | 54.0 | -2.8 | Pass |
| 2 | 5350.00 | 29.80 | 3.06 | 34.46 | 67.32 | Max Peak | Vertical | 192 | 205 | 74.0 | -6.7 | Pass |
| 3 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT Powered by POE, Connected to Laptop outside chamber.


[back to matrix](#)

A.1.2.4. MikroTik MTAS-5G-19D120

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11a, Test Freq: 5500.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 99

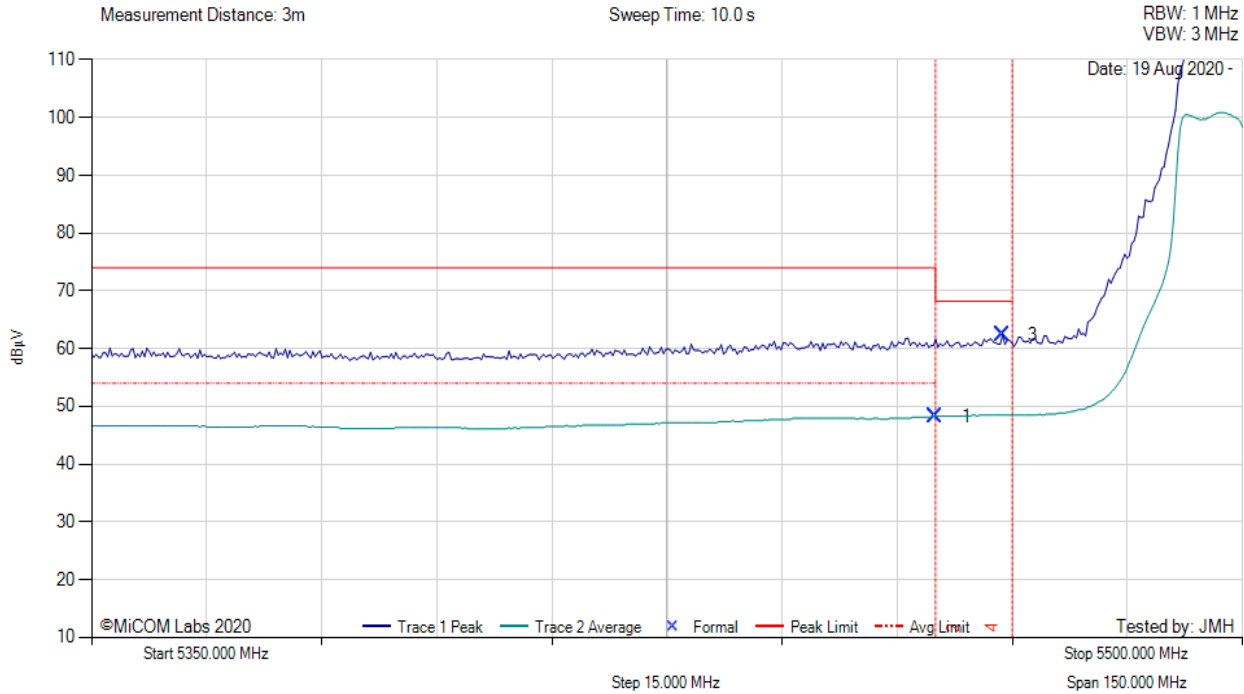

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5460.00 | 10.72 | 3.06 | 34.53 | 48.31 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.7 | Pass |
| 3 | 5468.72 | 24.79 | 3.06 | 34.55 | 62.40 | Max Peak | Vertical | 181 | 0 | 68.2 | -5.8 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11ac-80, Test Freq: 5530.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 98

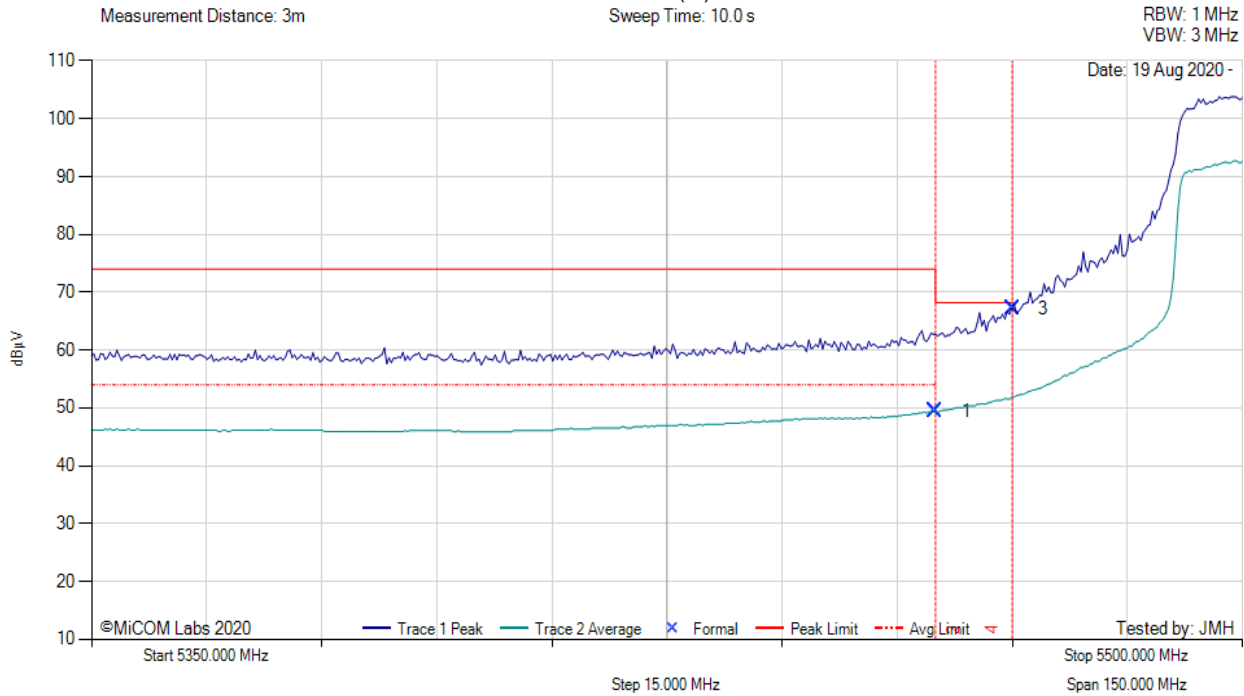

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5460.00 | 11.88 | 3.06 | 34.53 | 49.47 | Max Avg | Vertical | 0 | 0 | 54.0 | -4.5 | Pass |
| 3 | 5470.00 | 29.55 | 3.06 | 34.55 | 67.16 | Max Peak | Vertical | 0 | 0 | 68.2 | -1.1 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5500.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 98

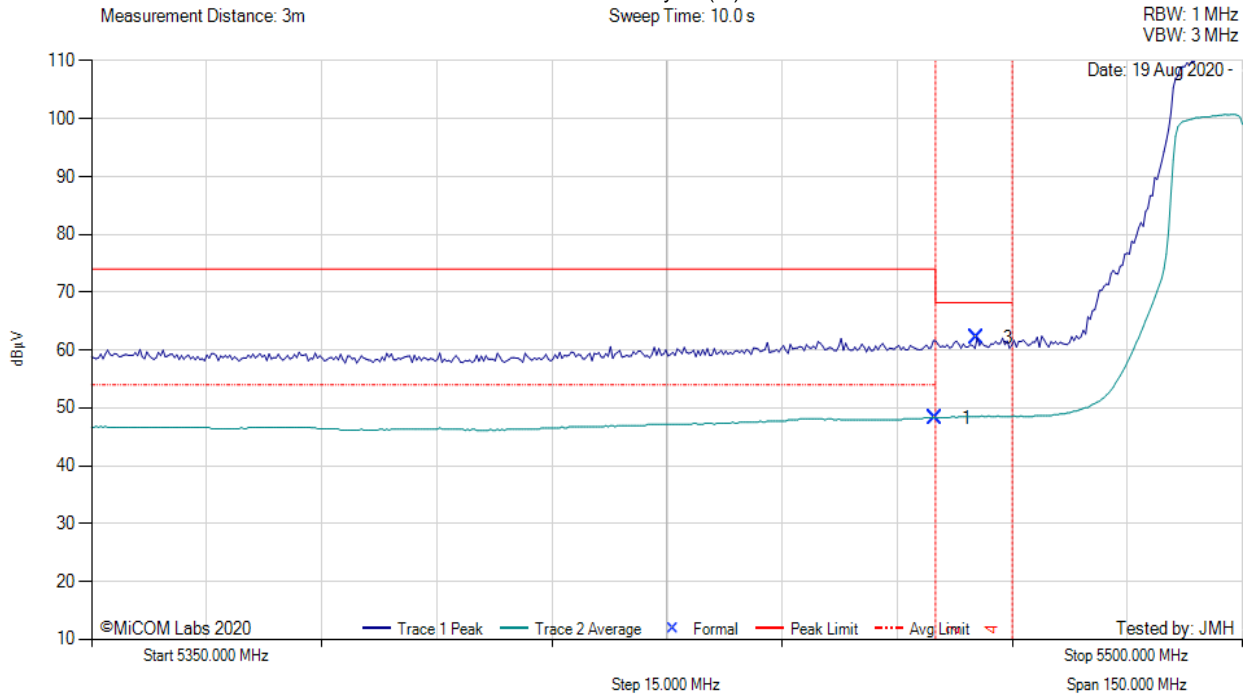

5350.00 - 5500.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 5460.00 | 10.72 | 3.06 | 34.53 | 48.31 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.7 | Pass |
| 3 | 5465.41 | 24.47 | 3.07 | 34.54 | 62.08 | Max Peak | Vertical | 181 | 0 | 68.2 | -6.2 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED LOWER BAND-EDGE EMISSIONS



Variant: 802.11n HT-40, Test Freq: 5510.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: 8, Duty Cycle (%): 98

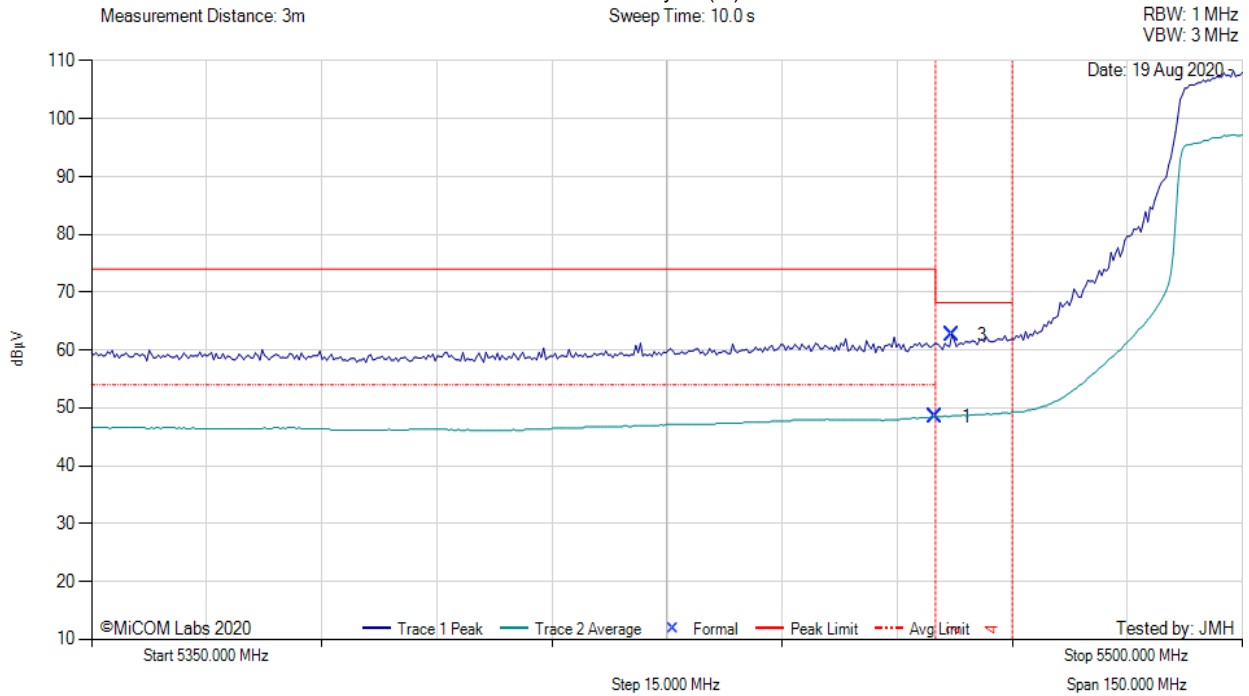

| 5350.00 - 5500.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5460.00 | 10.90 | 3.06 | 34.53 | 48.49 | Max Avg | Vertical | 181 | 0 | 54.0 | -5.5 | Pass |
| 3 | 5462.12 | 24.98 | 3.06 | 34.53 | 62.57 | Max Peak | Vertical | 181 | 0 | 68.2 | -5.7 | Pass |
| 2 | 5460.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |
| 4 | 5470.00 | -- | -- | -- | -- | Band-Edge | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS




Variant: 802.11a, Test Freq: 5320.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 98

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

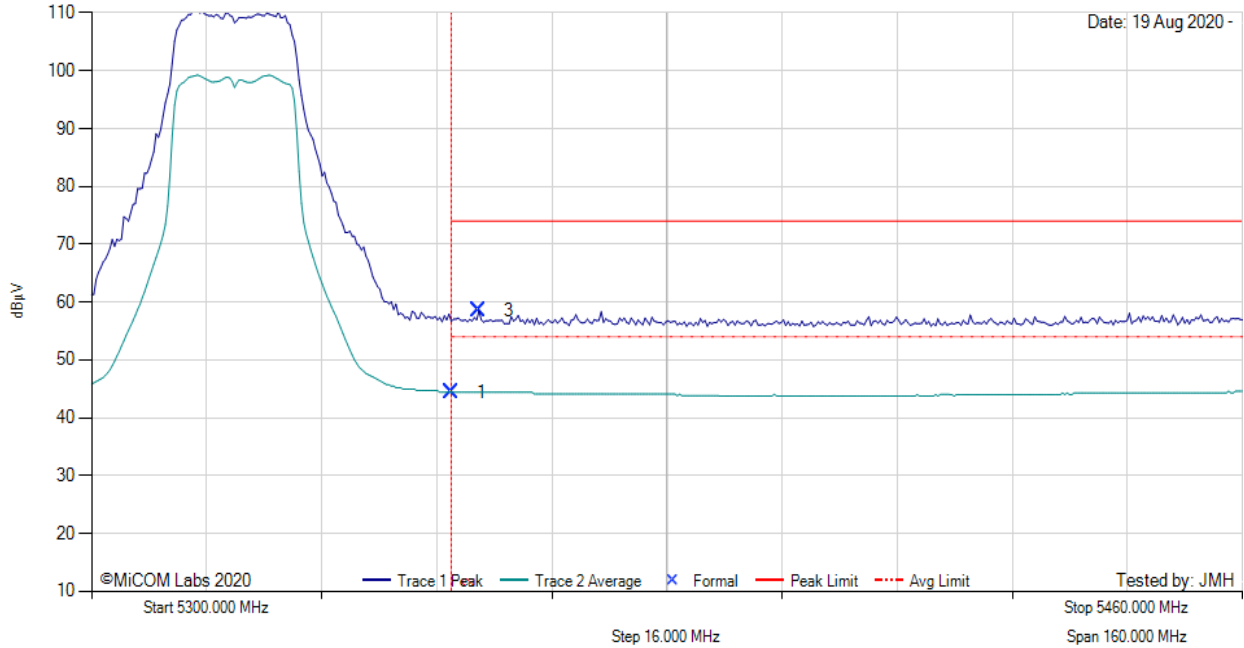

5300.00 - 5460.00 MHz

| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
|-----|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| 1 | 5350.00 | 6.90 | 3.06 | 34.46 | 44.42 | Max Avg | Vertical | 0 | 0 | 54.0 | -9.6 | Pass |
| 3 | 5353.85 | 20.99 | 3.05 | 34.47 | 58.51 | Max Peak | Vertical | 0 | 0 | 74.0 | -15.5 | Pass |
| 2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS




Variant: 802.11ac-80, Test Freq: 5290.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 82

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

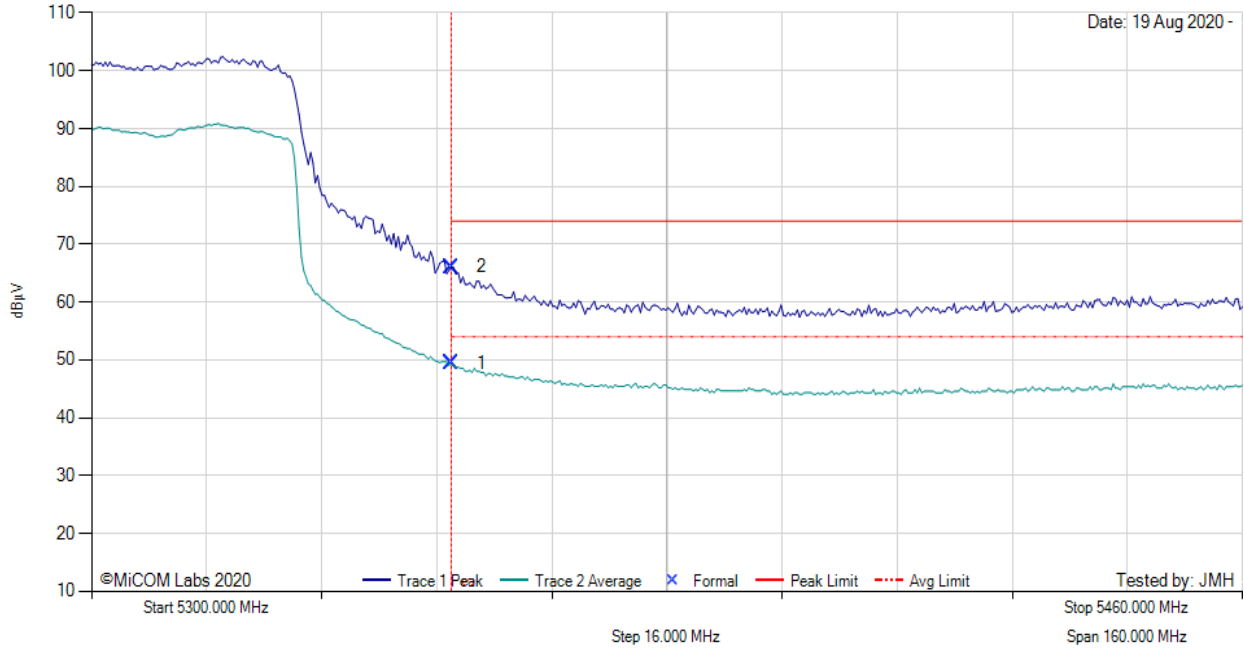

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5350.00 | 11.88 | 3.06 | 34.46 | 49.40 | Max Avg | Vertical | 182 | 0 | 54.0 | -4.6 | Pass |
| 2 | 5350.00 | 28.58 | 3.06 | 34.46 | 66.10 | Max Peak | Vertical | 182 | 0 | 74.0 | -7.9 | Pass |
| 3 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |


Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS



Variant: 802.11n HT-20, Test Freq: 5320.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 98

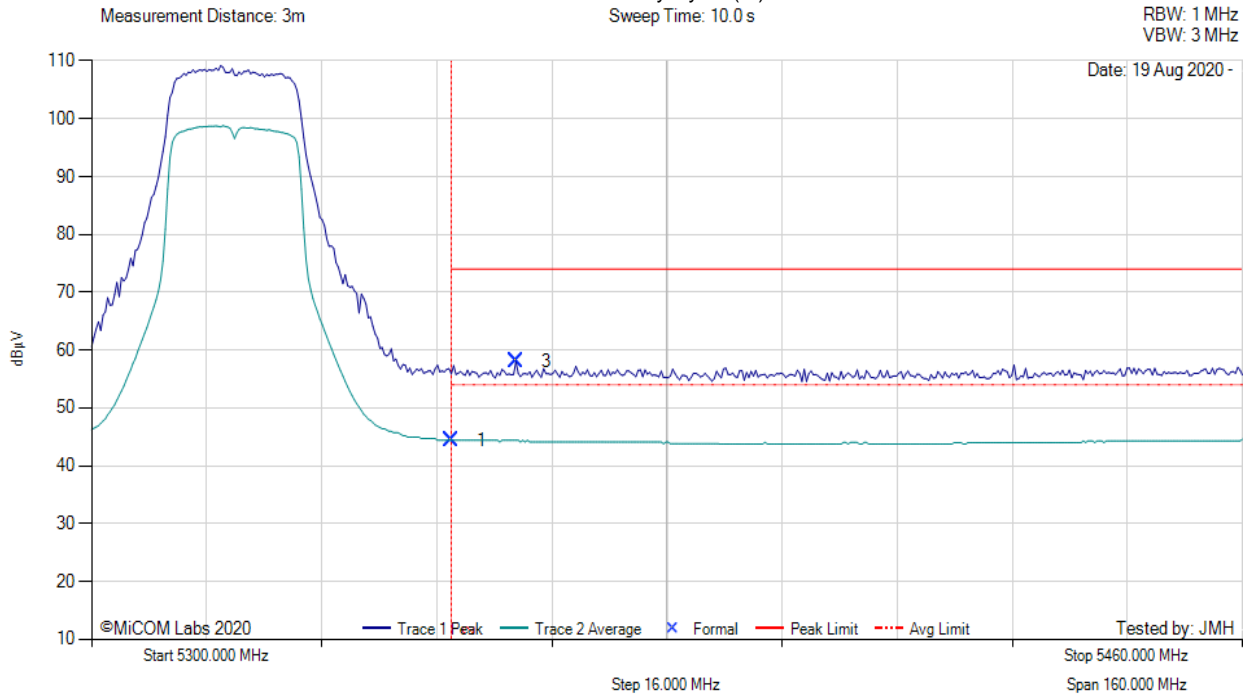

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5350.00 | 6.90 | 3.06 | 34.46 | 44.42 | Max Avg | Vertical | 182 | 0 | 54.0 | -9.6 | Pass |
| 3 | 5358.98 | 20.49 | 3.04 | 34.47 | 58.00 | Max Peak | Vertical | 182 | 0 | 74.0 | -16.0 | Pass |
| 2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)

RESTRICTED UPPER BAND-EDGE EMISSIONS




Variant: 802.11n HT-40, Test Freq: 5310.00 MHz, Antenna: MikroTik MTAS-5G-19D120, Power Setting: Default, Duty Cycle (%): 93

Measurement Distance: 3m

Sweep Time: 10.0 s

RBW: 1 MHz
VBW: 3 MHz

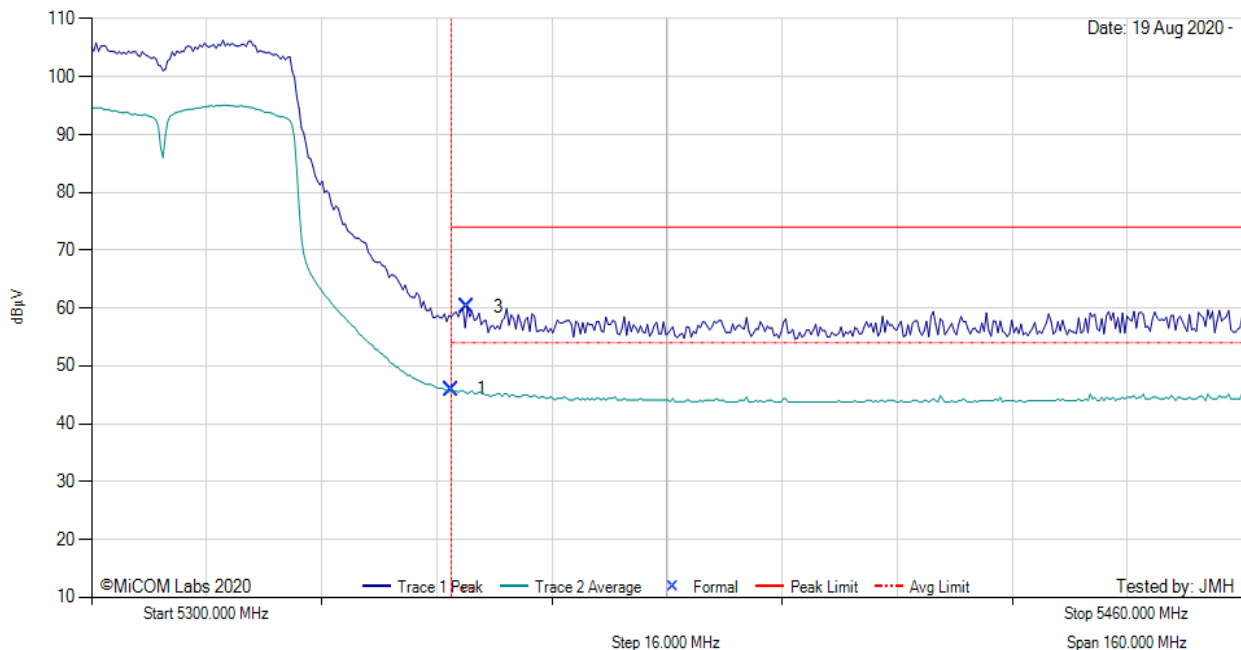

| 5300.00 - 5460.00 MHz | | | | | | | | | | | | |
|-----------------------|---------------|----------|---------------|---------|--------------|------------------|----------|--------|---------|--------------|-----------|------------|
| Num | Frequency MHz | Raw dBµV | Cable Loss dB | AF dB/m | Level dBµV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBµV/m | Margin dB | Pass /Fail |
| 1 | 5350.00 | 8.44 | 3.06 | 34.46 | 45.96 | Max Avg | Vertical | 182 | 0 | 54.0 | -8.0 | Pass |
| 3 | 5352.24 | 22.65 | 3.06 | 34.46 | 60.17 | Max Peak | Vertical | 182 | 0 | 74.0 | -15.8 | Pass |
| 2 | 5350.00 | -- | -- | -- | -- | Restricted-Band | -- | -- | -- | -- | -- | -- |

Test Notes: EUT powered by POE. Connected to Laptop outside chamber.

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com