

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

CLASS II PERMISSIVE CHANGE

Test Standard	FCC Part 15.247
FCC ID	TX2-RTL8821AU
Product name	802.11a/b/g/n/ac RTL8821AU Combo module
Brand Name	Realtek
Model	RTL8821AU
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)



Approved by:

Handwritten signature of Sam Chuang in black ink.

Sam Chuang
Manager

Reviewed by:

Handwritten signature of Jerry Chuang in black ink.

Jerry Chuang
Engineer

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	November 13, 2017	Initial Issue	ALL	Allison Chen
01	December 1, 2017	Rev.(01)	P.8, P.20, P.34, P.35, P.39, P.40	Allison Chen
02	December 4, 2017	Rev.(02)	P. 20, 30, 31, 44, 45	Angel Cheng

Rev. (01):

1. Remove Applied standards DA 00 705.
2. Remove RADIATION BANDEGE AND SPURIOUS EMISSIO Test Setup: 9kHz ~ 30MHz.
3. Update Power table.
4. Modify 2nd Harmonic in mid channel.
5. Other information, please refer to the T171012L01 and this test report.

Rev. (02):

1. Added radiation bandedge and spurious emission test setup: 9kHz ~ 30MHz.
2. Added note in below 1GHz test data.
3. Modify test setup photo.

Table of contents

1. GENERAL INFORMATION	4
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION	5
1.3 ANTENNA INFORMATION	5
1.4 MEASUREMENT UNCERTAINTY.....	6
1.5 FACILITIES AND TEST LOCATION	7
1.6 INSTRUMENT CALIBRATION	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT	8
1.8 TEST METHODOLOGY AND APPLIED STANDARDS	8
2. TEST SUMMERY	9
3. DESCRIPTION OF TEST MODES	10
3.1 THE WORST MODE OF OPERATING CONDITION	10
3.2 THE WORST MODE OF MEASUREMENT	11
3.3 EUT DUTY CYCLE.....	12
4. TEST RESULT	13
4.1 AC POWER LINE CONDUCTED EMISSION	13
4.2 OUTPUT POWER MEASUREMENT	16
4.3 RADIATION BANDEDGE AND SPURIOUS EMISSION	18
APPENDIX I - PHOTOGRAPHS OF EUT	

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	Realtek Semiconductor Corp. No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu, 300 Taiwan
Manufacturer	Realtek Semiconductor Corp. No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu, 300 Taiwan
Equipment	802.11a/b/g/n/ac RTL8821AU Combo module
Model No.	RTL8821AU
Model Discrepancy	N/A
Trade Name	Realtek
Received Date	October 12, 2017
Date of Test	November 6 ~ November 10, 2017
Output Power(W)	GFSK : 0.0011 8DPSK : 0.0011
Power Operation	1. Power from host device. (DC 5V, 1.5A) 2. Power from Li-ion Polymer Battery. Model: PR-464059G (1ICP5/40/59) Nominal Voltage: 3.8V Rated Capacity: 1630mAh / 6.2Wh Limited Charge voltage: 4.35V
Class II Permissive Change	Applicants add a new appearance of EUT and change the circuit and layout, but the antenna type and module are identical with original.

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table A1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
<input type="checkbox"/> 1 MHz or less	1	Middle
<input type="checkbox"/> 1 MHz to 10 MHz	2	1 near top and 1 near bottom
<input checked="" type="checkbox"/> More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	<input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils
Antenna Gain	1.97 dBi

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No. 11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Jerry Chuang	
Radiation	Jerry Chuang	
RF Conducted	Eric Lee	

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

AC Conduction Room					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
DC LISN	SCHWARZBECK	NNBM 8124	505	03/20/2017	03/19/2018
DC LISN	SCHWARZBECK	NNBM 8124	504	03/20/2017	03/19/2018
EMI Test Receiver	R&S	ESCI	W3010659	07/13/2017	07/12/2018

Wugu 966 Chamber A					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	06/20/2017	06/19/2018
Horn Antenna	EMCO	3117	00055165	02/20/2017	02/19/2018
Pre-Amplifier	EMCI	EMC 012635	980151	08/01/2017	07/31/2018
Pre-Amplifier	EMEC	EM330	060609	06/07/2017	06/06/2018
Spectrum Analyzer	Agilent	E4446A	US42510252	12/05/2016	12/04/2017
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R

Conducted Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Meter	Anritsu	ML2495A	1012009	07/03/2017	07/02/2018
Power Sensor	Anritsu	MA2411B	917072	07/03/2017	07/02/2018
Spectrum Analyzer	R&S	FSV 40	101073	10/05/2017	10/04/2018
Thermostatic/Hrgrosatic Chamber	GWINSTEK	GTC-288MH-CC	TH160402	05/23/2017	05/22/2018
Wideband Radio communication Tester	R&S	CMW500	116875	04/25/2017	04/24/2018

Remark:

- Each piece of equipment is scheduled for calibration once a year and Precision Dipole is scheduled for calibration once three years.
- N.C.R. = No Calibration Request.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	NB(A)	Dell	PP19L	N/A	CXSMM01BR D02D110	N/A	N/A

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247.

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.2	Antenna Requirement	Pass
15.207(a)	4.1	AC Conducted Emission	Pass
15.247(b)(1)	4.3	Output Power Measurement	Pass
15.247(d)	4.8	Radiation Band Edge	Pass
15.247(d)	4.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

<p>Operation mode</p>	<p>GFSK for BR-1Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)</p>
<p>Test Channel Frequencies</p>	<p>GFSK for BR-1Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz</p>

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	DC 5V
Test Mode	Mode 1:EUT power by host system
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	DC 5V
Test Mode	Mode 1:EUT power by host system.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4
Worst Position	<input type="checkbox"/> Placed in fixed position. <input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane) <input checked="" type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane) <input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	<input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	DC 5V
Test Mode	Mode 1:EUT power by host system.
Worst Mode	<input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Horizontal) were recorded in this report
3. For below 1G, AC power line conducted emission and radiation emission were performed the EUT transmit at the highest output power channel as worse case.

3.3 EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BR-1Mbps	2.9600	3.7700	78.51%	1.051
EDR-3Mbps	2.9600	3.7500	78.93%	1.028

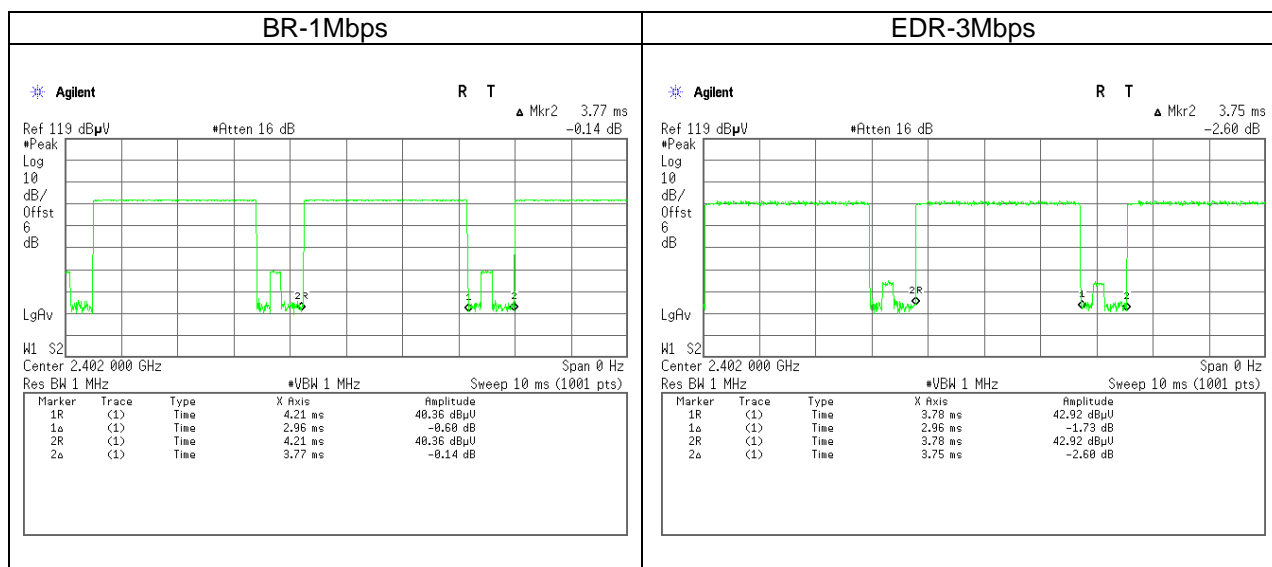

4. TEST RESULT

4.1 AC POWER LINE CONDUCTED EMISSION

4.1.1 Test Limit

According to §15.207(a)

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

4.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

4.1.3 Test Setup

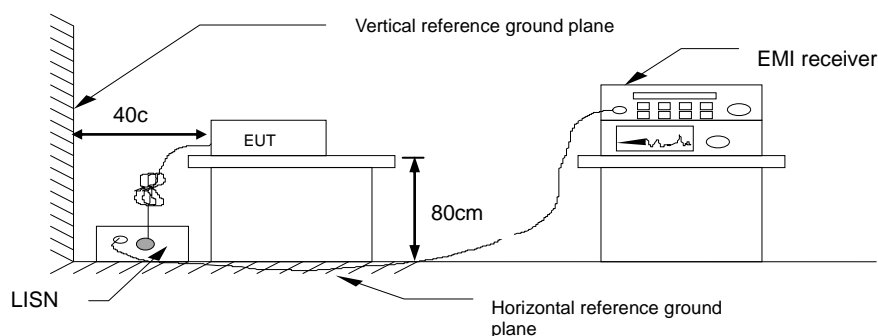


4.1.4 Test Result

PASS


Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage:	120Vac / 60Hz	Test Date	November 10, 2017
Phase:	Line	Test Engineer	Jerry Chuang

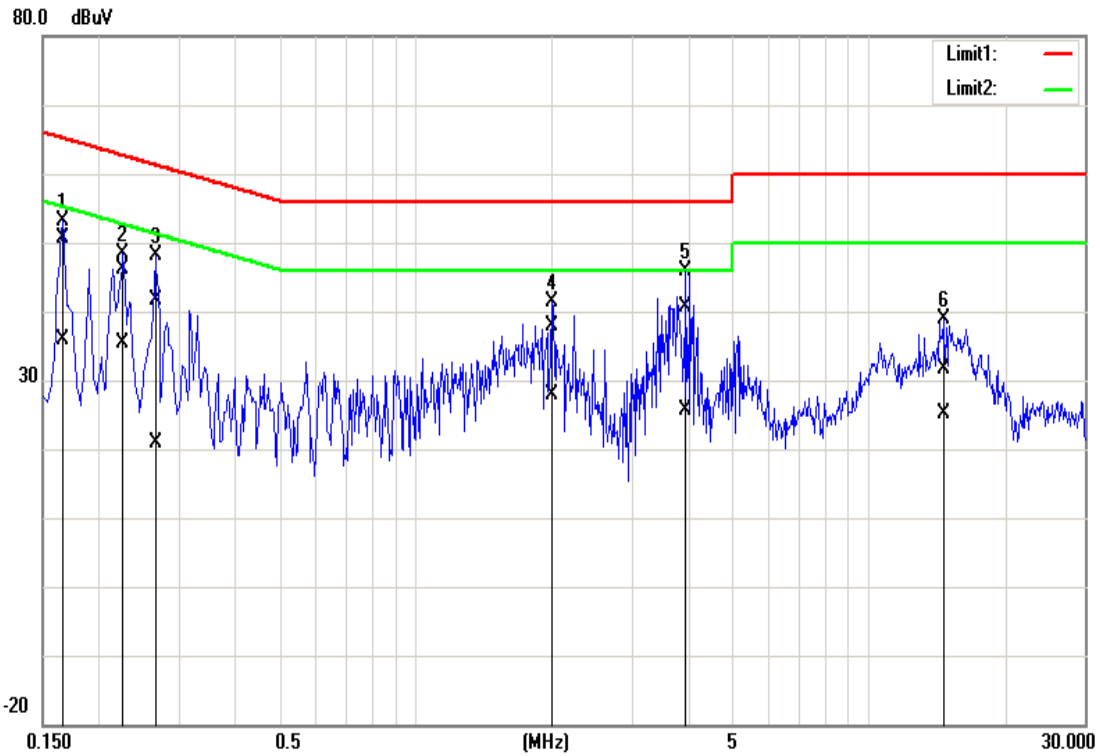

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1660	50.46	35.88	0.05	50.51	35.93	65.16	55.16	-14.65	-19.23
2	0.2260	45.99	35.33	0.05	46.04	35.38	62.60	52.60	-16.56	-17.22
3	0.2660	41.61	20.90	0.05	41.66	20.95	61.24	51.24	-19.58	-30.29
4	2.0100	37.89	27.70	0.09	37.98	27.79	56.00	46.00	-18.02	-18.21
5	3.9580	40.56	25.47	0.13	40.69	25.60	56.00	46.00	-15.31	-20.40
6	14.6580	31.55	24.84	0.18	31.73	25.02	60.00	50.00	-28.27	-24.98

Test Mode:	Mode 1	Temp/Hum	24(°C)/ 50%RH
Test Voltage:	120Vac / 60Hz	Test Date	November 10, 2017
Phase:	Neutral	Test Engineer	Jerry Chuang

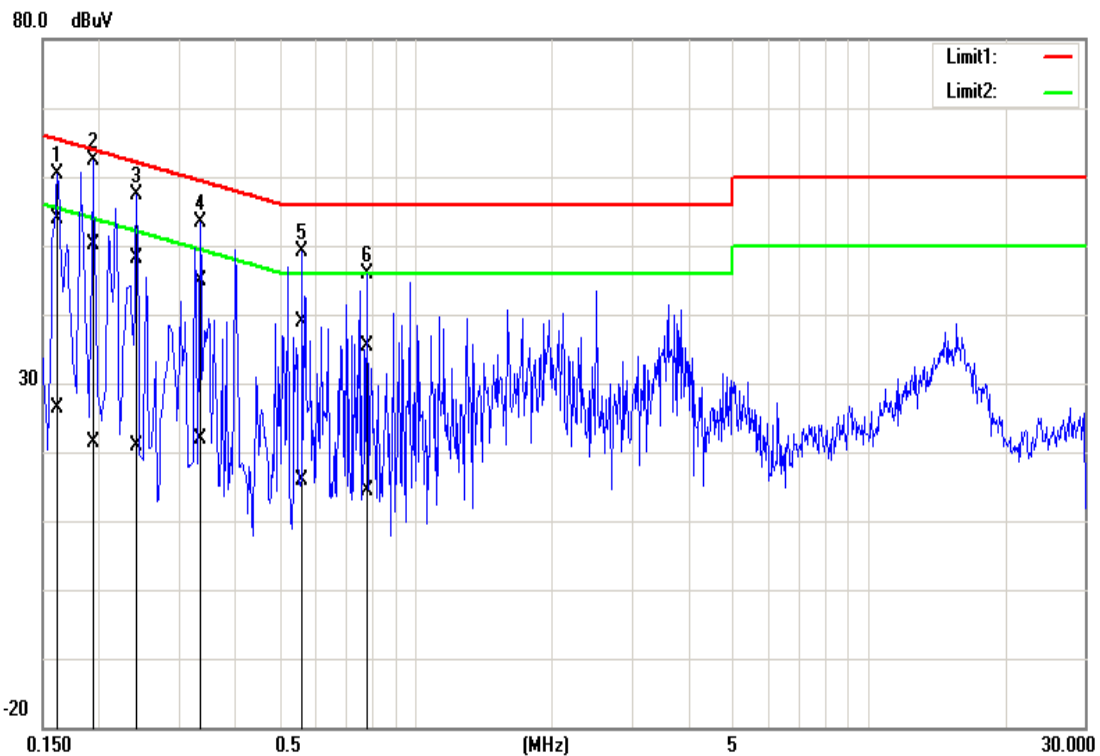

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)
1	0.1620	53.87	26.17	0.12	53.99	26.29	65.36	55.36	-11.37	-29.07
2	0.1940	50.04	21.15	0.12	50.16	21.27	63.86	53.86	-13.70	-32.59
3	0.2420	48.12	20.79	0.12	48.24	20.91	62.03	52.03	-13.79	-31.12
4	0.3340	44.83	21.69	0.13	44.96	21.82	59.35	49.35	-14.39	-27.53
5	0.5620	38.74	15.84	0.14	38.88	15.98	56.00	46.00	-17.12	-30.02
6	0.7820	35.17	14.23	0.14	35.31	14.37	56.00	46.00	-20.69	-31.63

4.2 OUTPUT POWER MEASUREMENT

4.2.1 Test Limit

According to §15.247(a)(1)

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	<input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 21dBm <input type="checkbox"/> Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

4.2.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

4.2.3 Test Setup

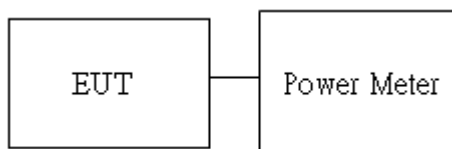

4.2.4 Test Result

Peak output power :

BT					
Config.	CH	Freq. (MHz)	PK Power (dBm)	PK Power (W)	FCC Limit (dBm)
GFSK BR-1Mbps (DH5)	0	2402	0.56	0.0011	21
	39	2441	0.41	0.0011	
	78	2480	0.14	0.0010	
8DPSK EDR- 3Mbps (DH5)	0	2402	0.42	0.0011	
	39	2441	0.49	0.0011	
	78	2480	0.27	0.0011	

Average output power :

BT			
Config.	CH	Freq. (MHz)	AV Power (dBm)
GFSK BR-1Mbps (DH5)	0	2402	-0.91
	39	2441	-1.13
	78	2480	-1.45
8DPSK EDR- 3Mbps (DH5)	0	2402	-2.22
	39	2441	-2.20
	78	2480	-2.54

4.3 RADIATION BANDEGE AND SPURIOUS EMISSION

4.3.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

4.3.2 Test Procedure


Test method Refer as ANSI C63.10.

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.
3. Span shall wide enough to full capture the emission measured. The SA from 30MHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.
4. For harmonic, the worst case of output power was BR-1Mbps. Therefore only BR-1Mbps record in the report.
5. The SA setting following :
 - (1) Below 1G : RBW = 100kHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2) Above 1G :
 - (2.1) For Peak measurement : RBW = 1MHz, VBW \geq 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.
 - (2.2) For Average measurement : RBW = 1MHz, VBW
 - If Duty Cycle \geq 98%, VBW=10Hz.
 - If Duty Cycle < 98%, VBW \geq 1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (kHz)	VBW setting
GFSK_BR-1Mbps	79%	2.9600	0.338	360Hz
8DPSK_EDR-3Mbps	79%	2.9600	0.338	360Hz

4.3.3 Test Setup


9kHz ~ 30MHz

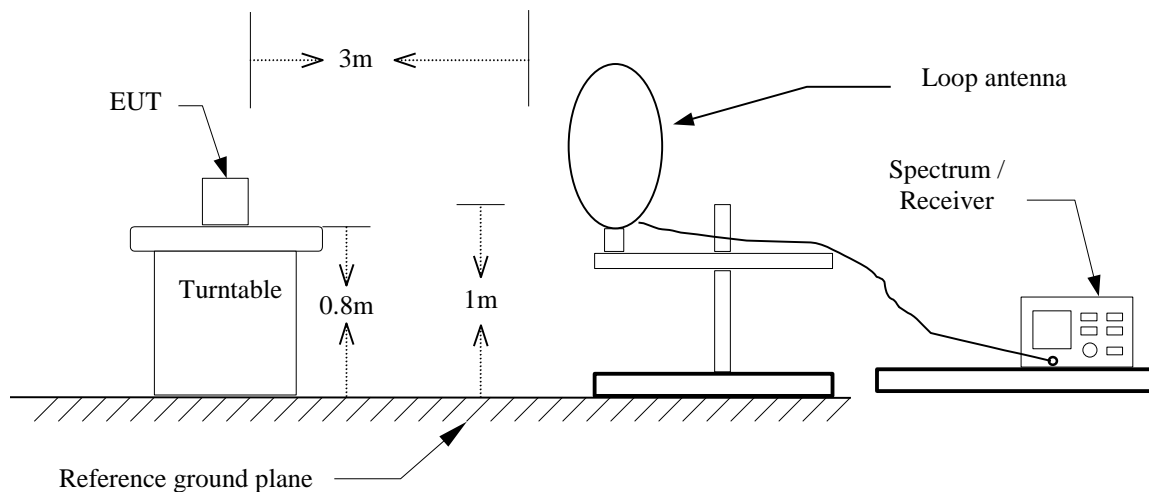

30MHz ~ 1GHz

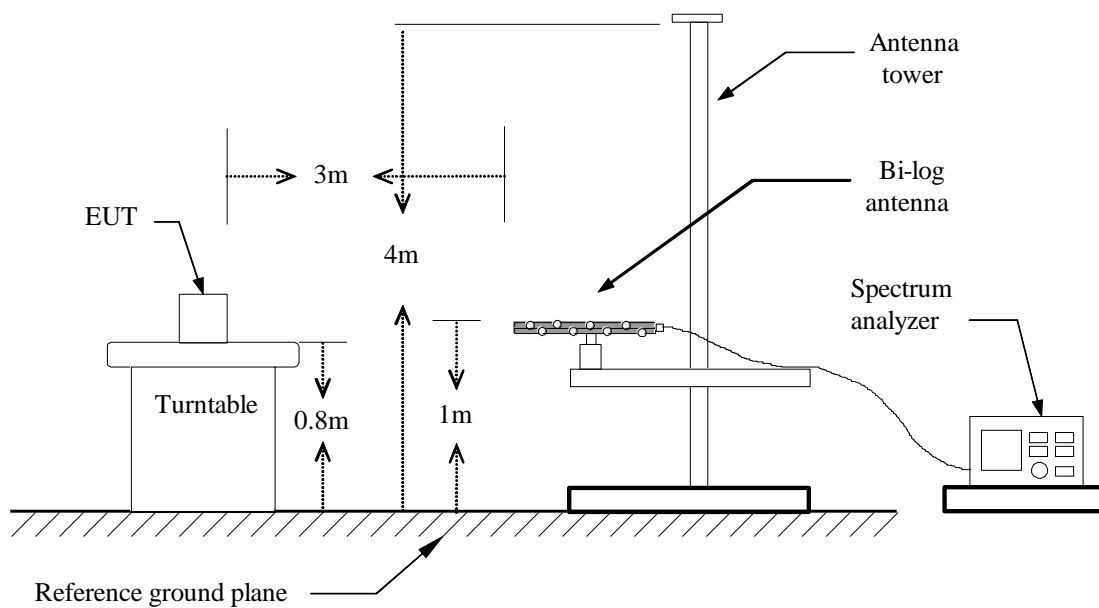


Above 1 GHz

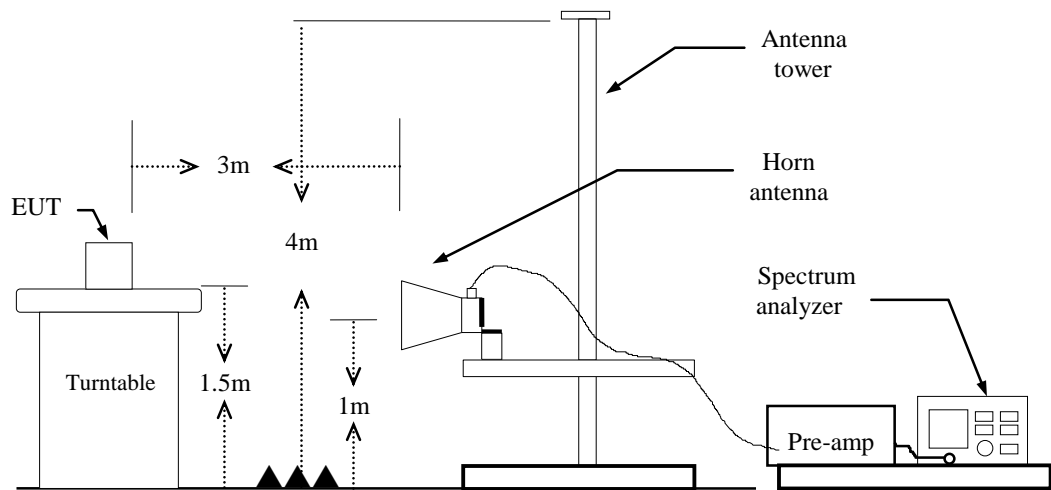

4.3.4 Test Result


Band Edge Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

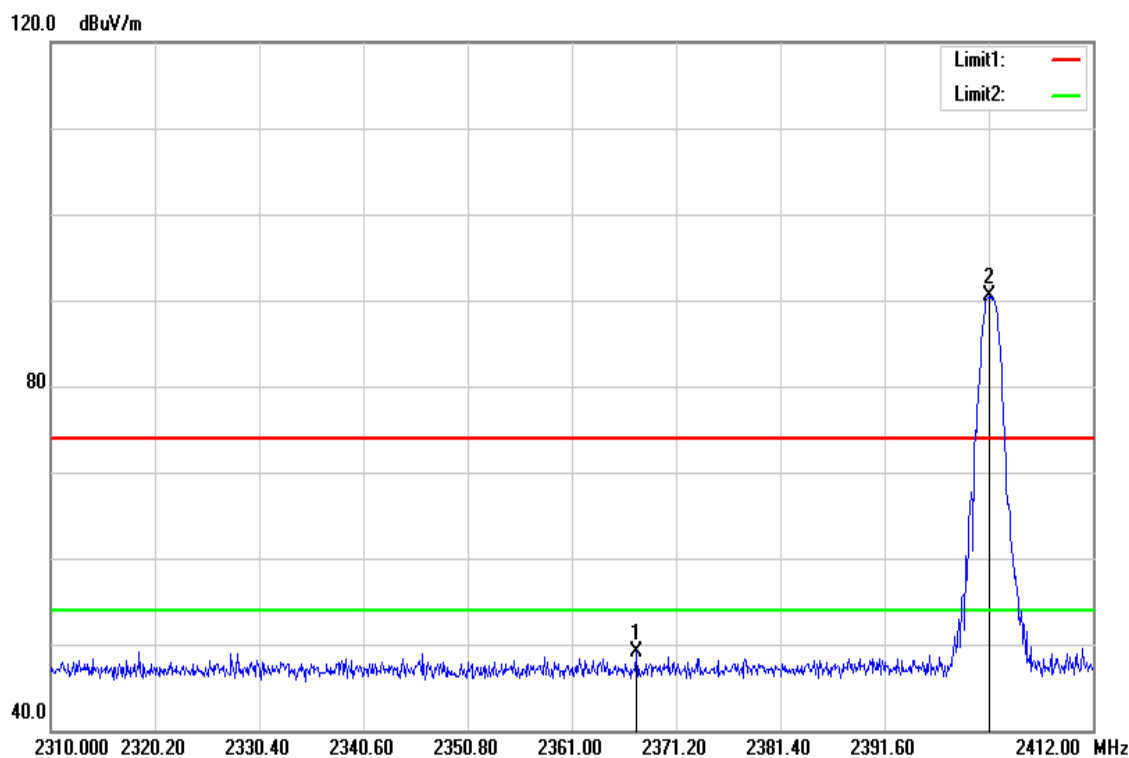


Frequency (MHz)	Reading (d uV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2367.324	49.70	-0.67	49.03	74.00	-24.97	peak
2401.800	90.99	-0.57	90.42	-	-	peak

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

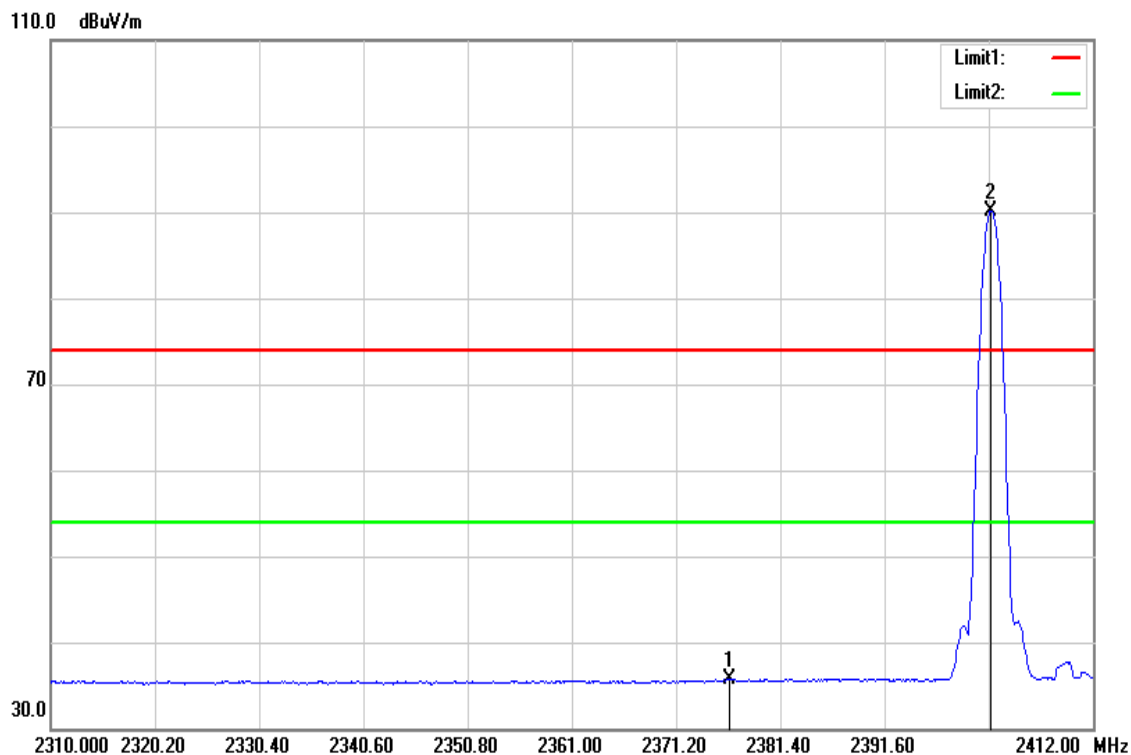


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2376.402	36.42	-0.64	35.78	54.00	-18.22	AVG
2402.004	90.76	-0.57	90.19	-	-	AVG

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

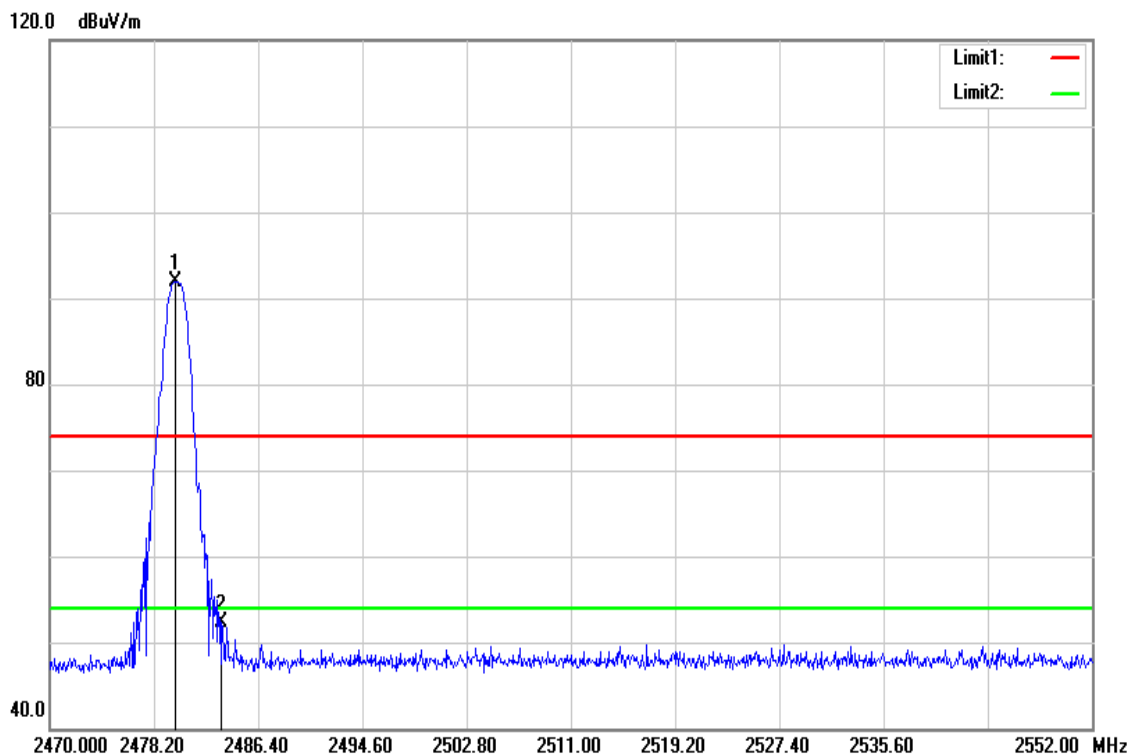


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2479.840	92.21	-0.31	91.90	-	-	peak
2483.500	52.69	-0.30	52.39	74.00	-21.61	peak

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

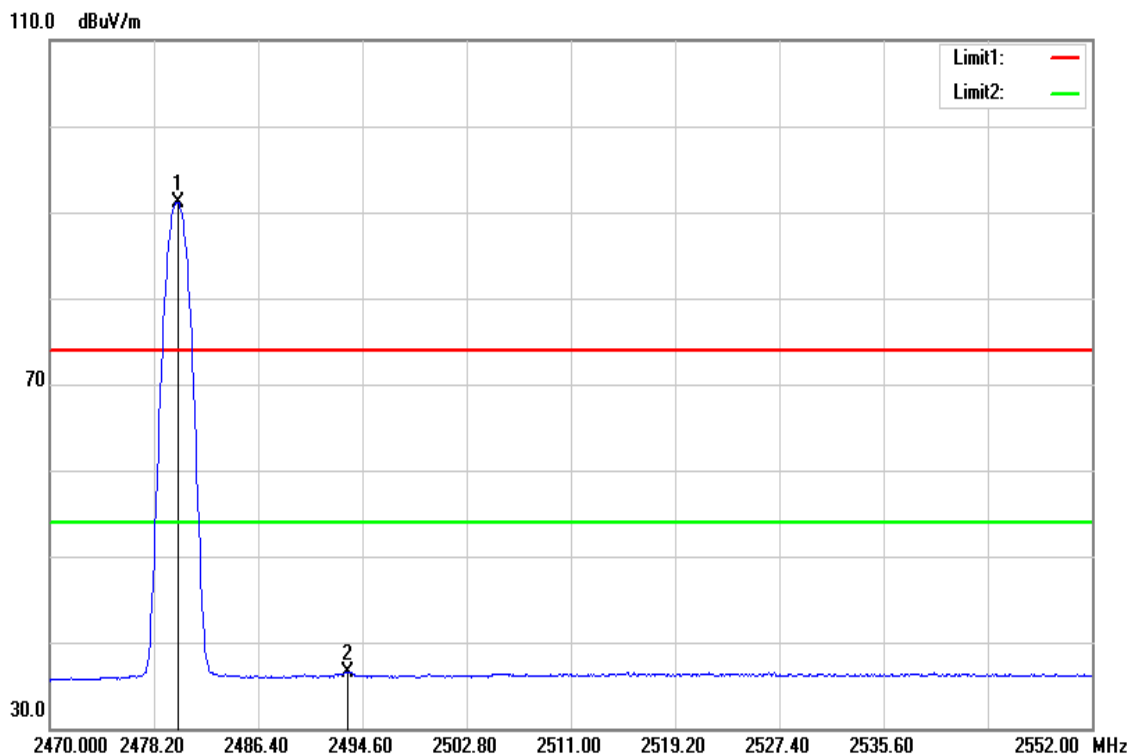


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.086	91.46	-0.31	91.15	-	-	AVG
2493.452	36.81	-0.27	36.54	54.00	-17.46	AVG

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

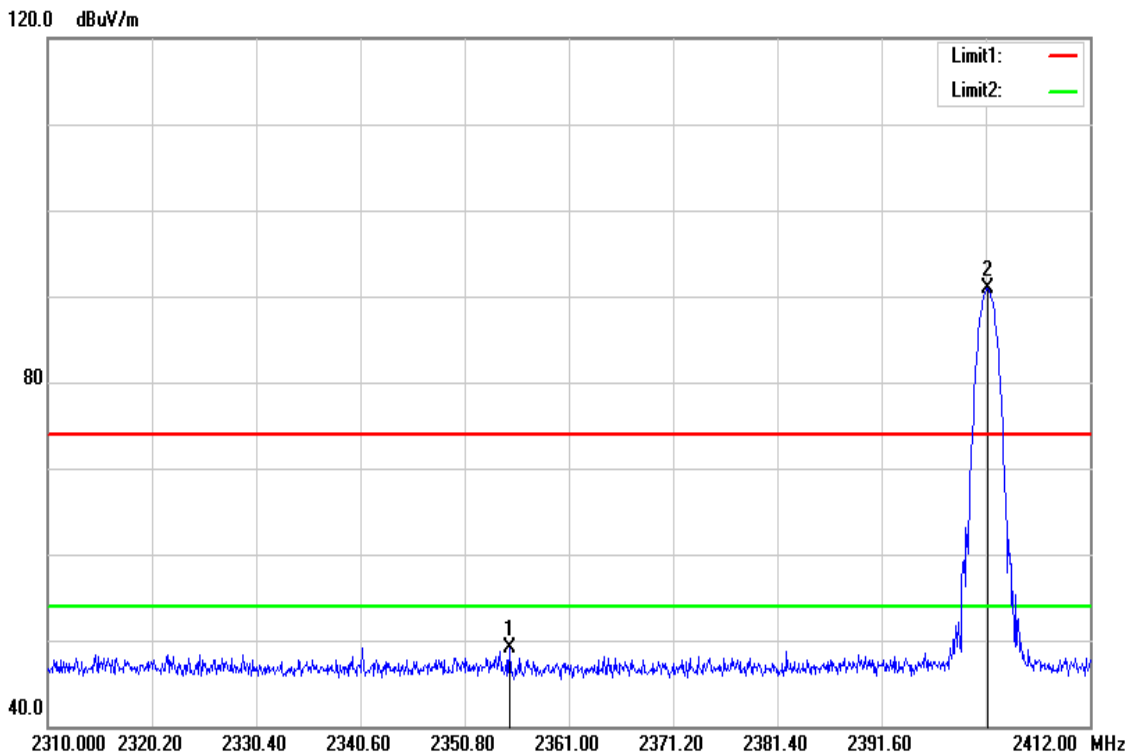


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2355.186	49.83	-0.71	49.12	74.00	-24.88	peak
2402.004	91.39	-0.57	90.82	-	-	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

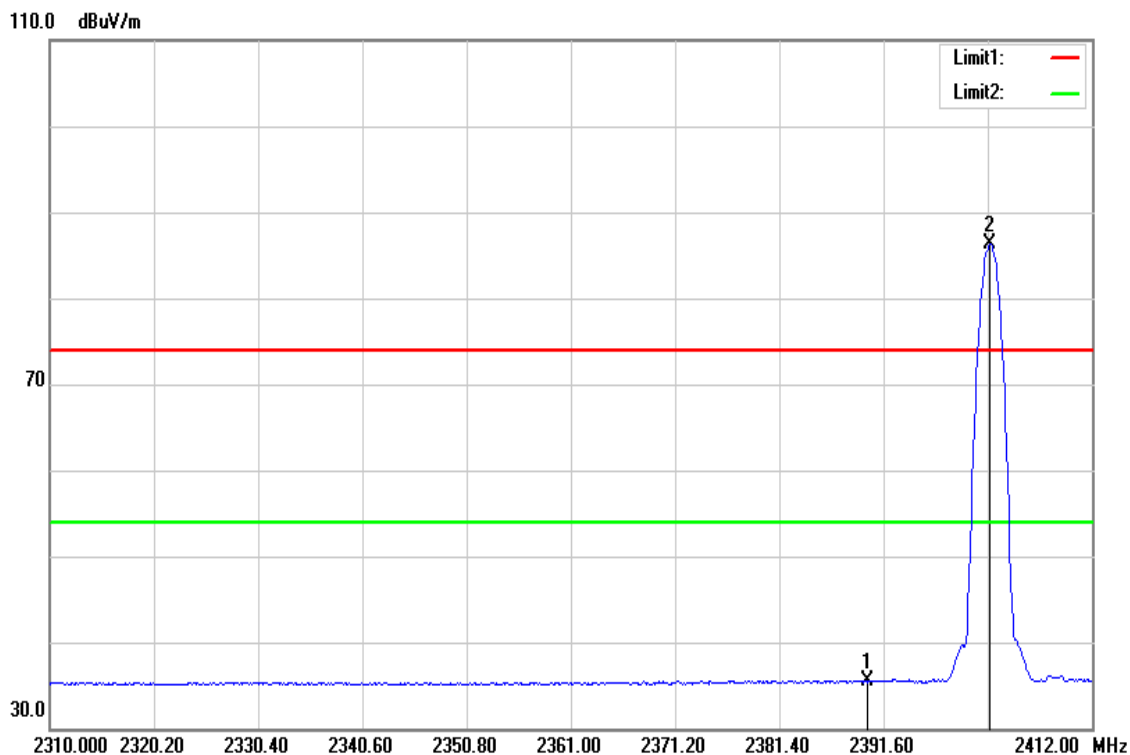


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390.000	36.06	-0.60	35.46	54.00	-18.54	AVG
2402.004	86.88	-0.57	86.31	-	-	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak		

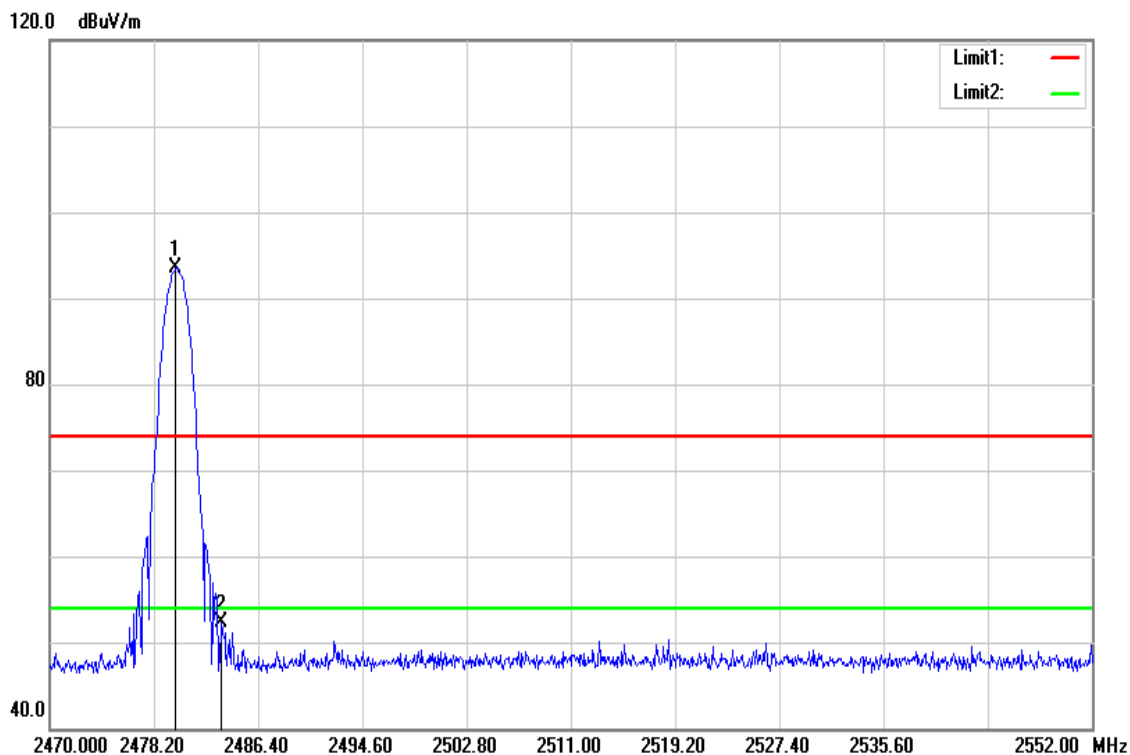

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2479.922	93.78	-0.31	93.47	-	-	peak
2483.500	52.58	-0.30	52.28	74.00	-21.72	peak


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Band Edge	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Average		

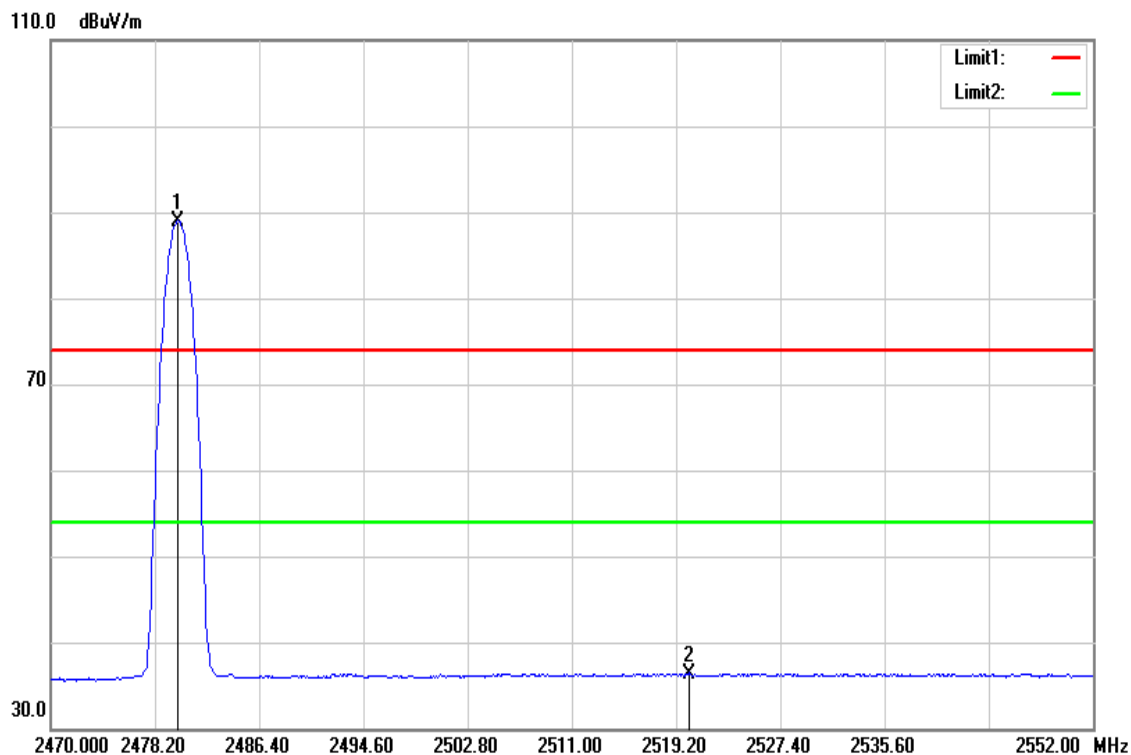

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2480.004	89.31	-0.31	89.00	-	-	AVG
2520.266	36.60	-0.20	36.40	54.00	-17.60	AVG

Below 1G Test Data


Test Mode:	BT Mode	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Qusi-peak		

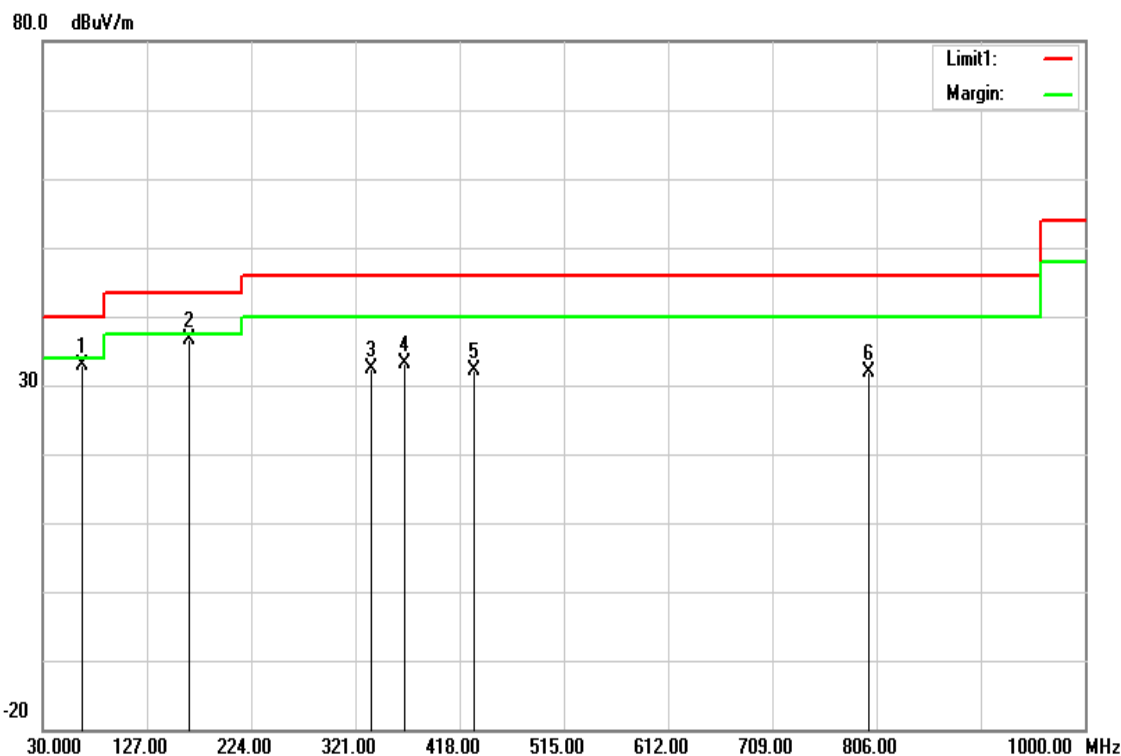

Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
66.8600	54.41	-21.42	32.99	40.00	-7.01	peak
166.7700	53.06	-16.36	36.70	43.50	-6.80	peak
335.5500	45.58	-13.30	32.28	46.00	-13.72	peak
366.5900	45.46	-12.45	33.01	46.00	-12.99	peak
431.5800	42.38	-10.25	32.13	46.00	-13.87	peak
799.2100	35.22	-3.39	31.83	46.00	-14.17	peak

Notes: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Test Mode:	BT Mode	Temp/Hum	24(°C)/ 33%RH
Test Item	30MHz-1GHz	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Qusi-peak		

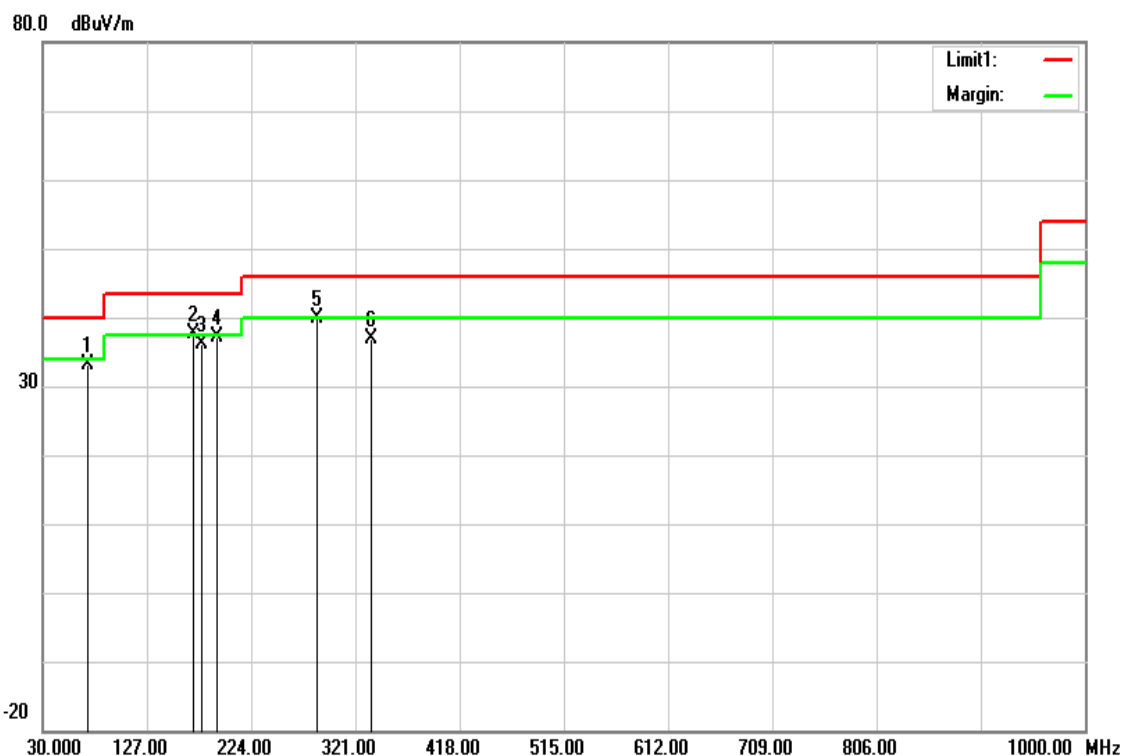


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Rem rk
71.7100	54.43	-21.29	33.14	40.00	-6.86	peak
169.6800	54.21	-16.53	37.68	43.50	-5.82	QP
177.4400	53.04	-17.00	36.04	43.50	-7.46	QP
191.9900	53.26	-16.04	37.22	43.50	-6.28	QP
285.1100	53.98	-14.22	39.76	46.00	-6.24	peak
335.5500	50.12	-13.30	36.82	46.00	-9.18	peak

Notes: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

Above 1G Test Data

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

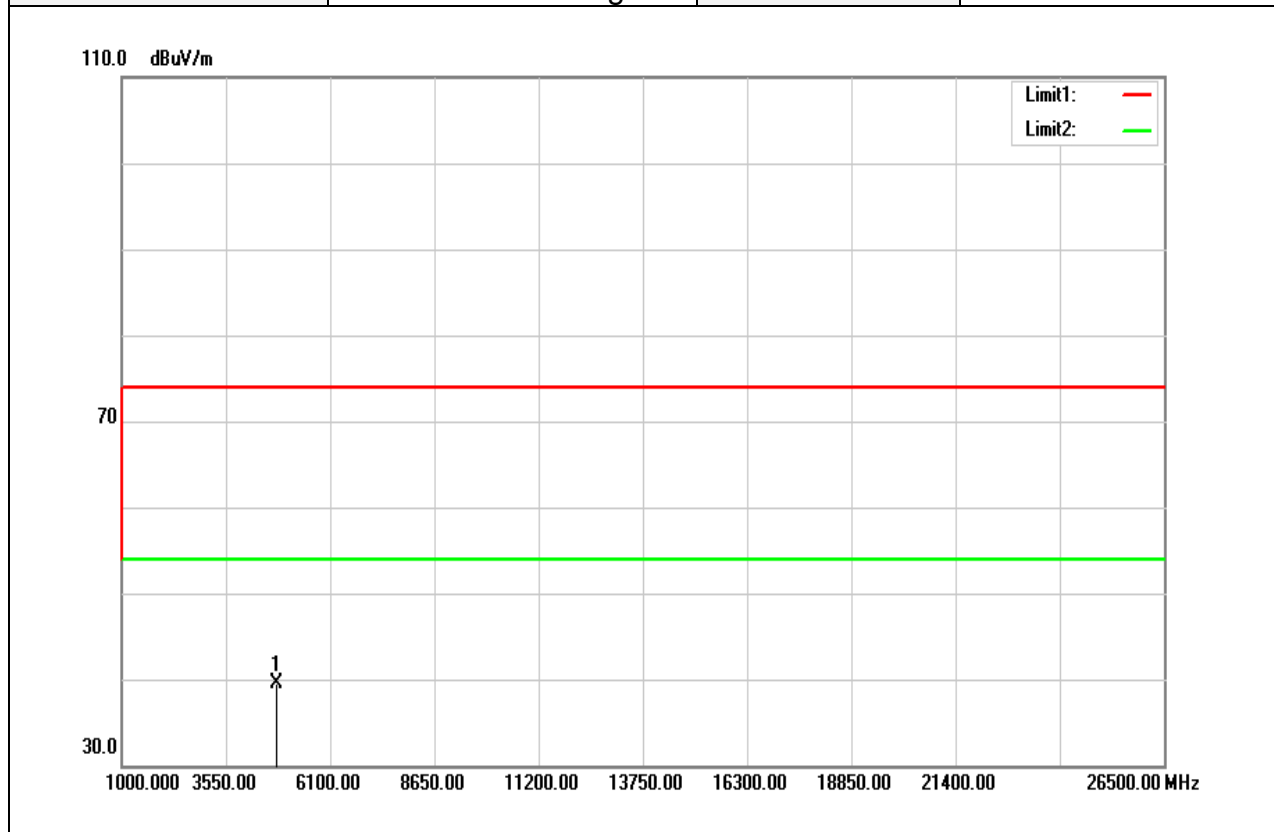


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	32.80	6.78	39.58	74.00	-34.42	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

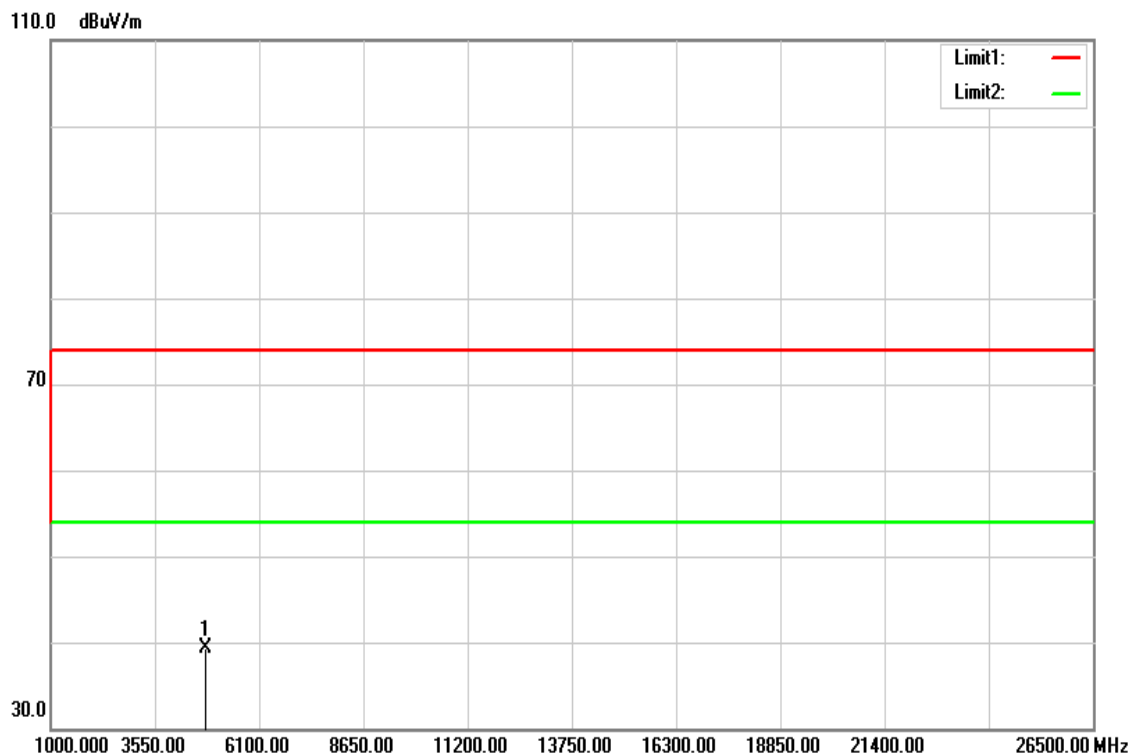


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	32.52	6.78	39.30	74.00	-34.70	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 6, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

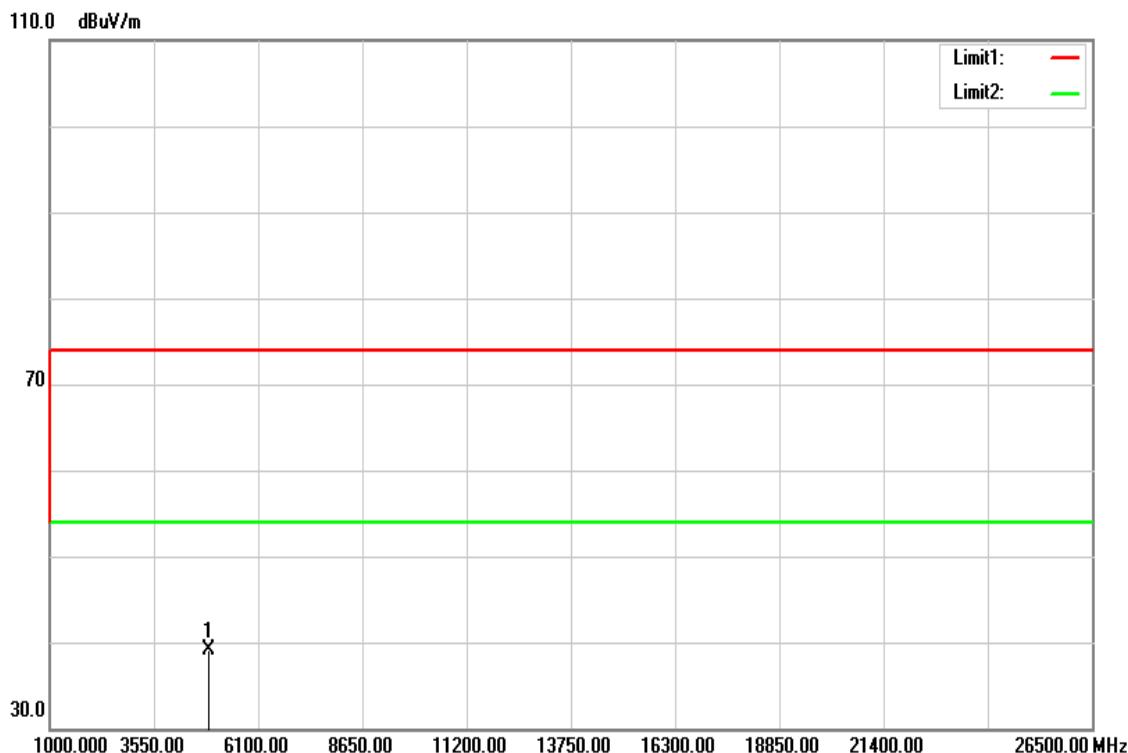


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	32.11	6.99	39.10	74.00	-34.90	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 6,2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

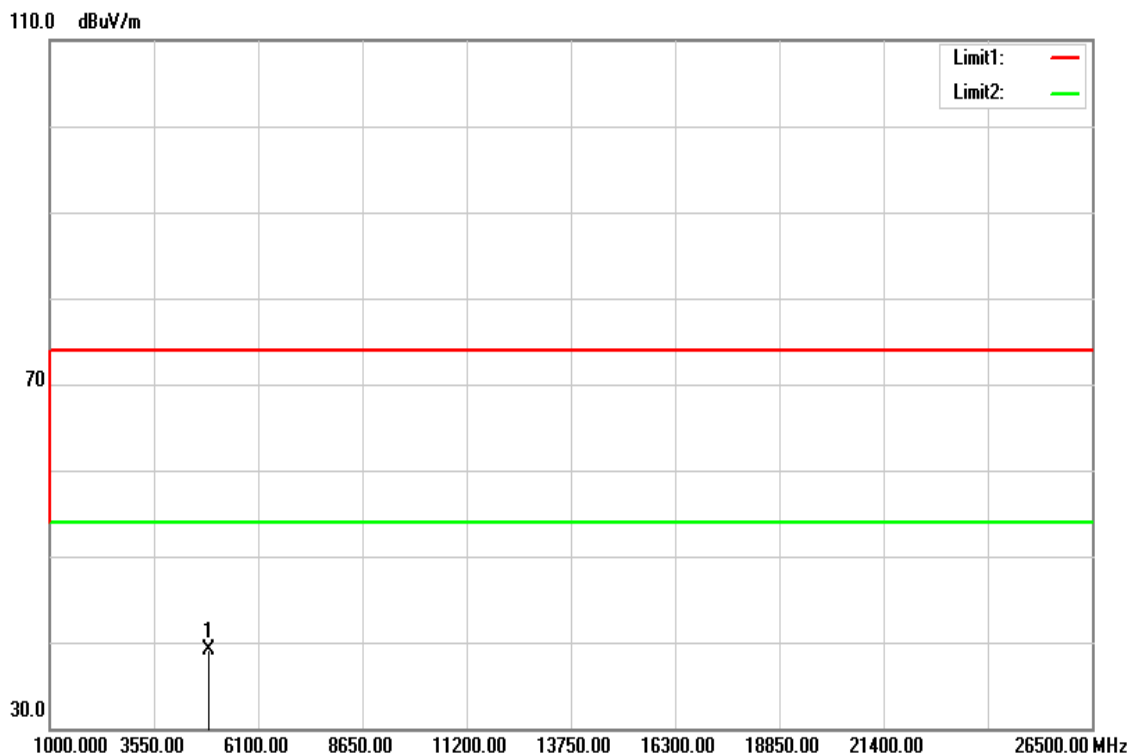


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	32.11	6.99	39.10	74.00	-34.90	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

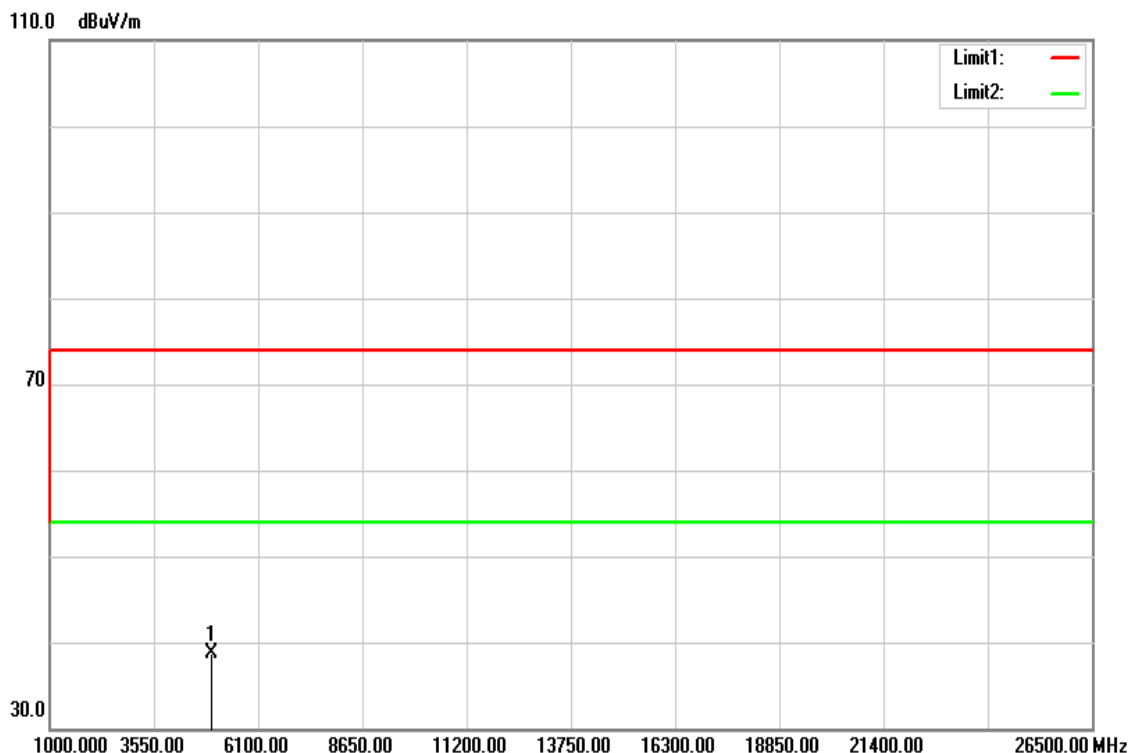


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBu /)	Margin (dB)	Remark
4960.000	31.53	7.18	38.71	74.00	-35.29	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BR-1Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

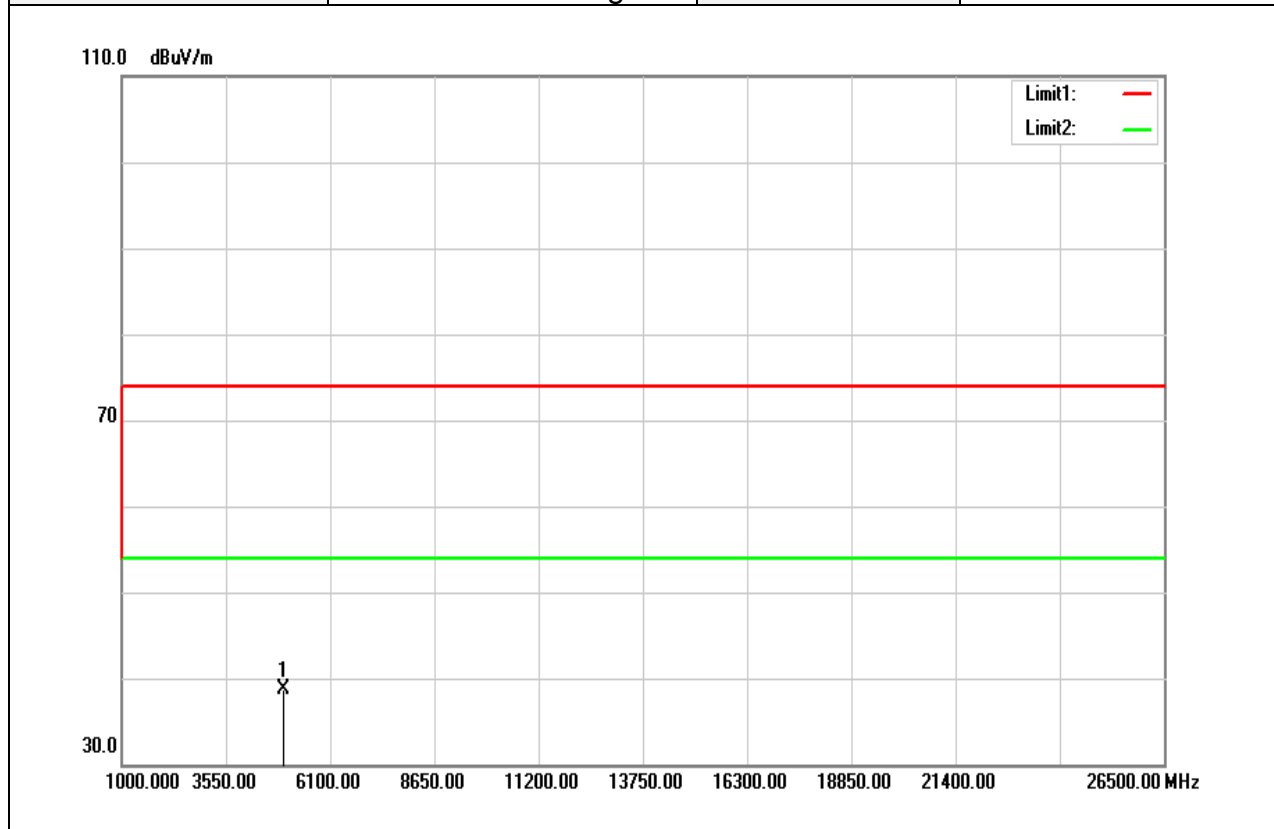


Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	31.44	7.18	38.62	74.00	-35.38	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

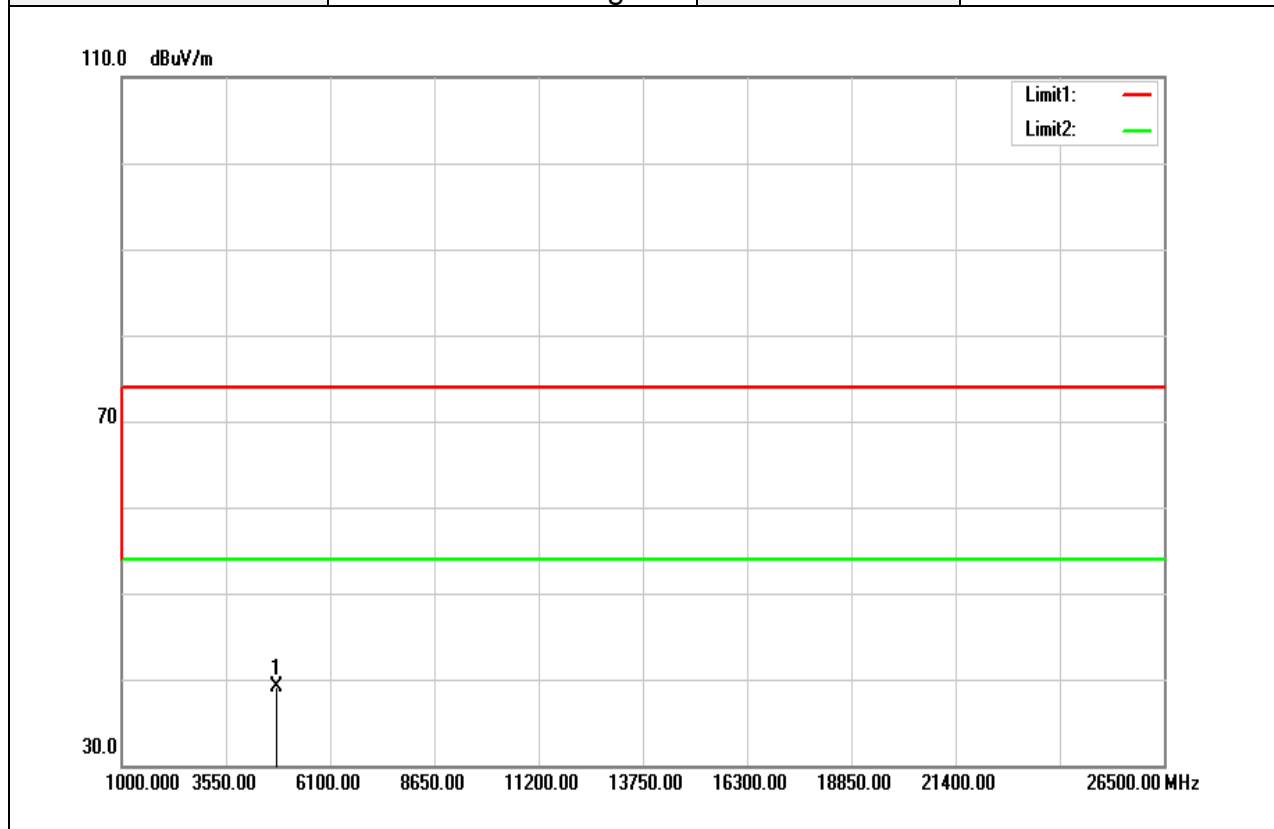


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (BuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	32.36	6.78	39.14	74.00	-34.86	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

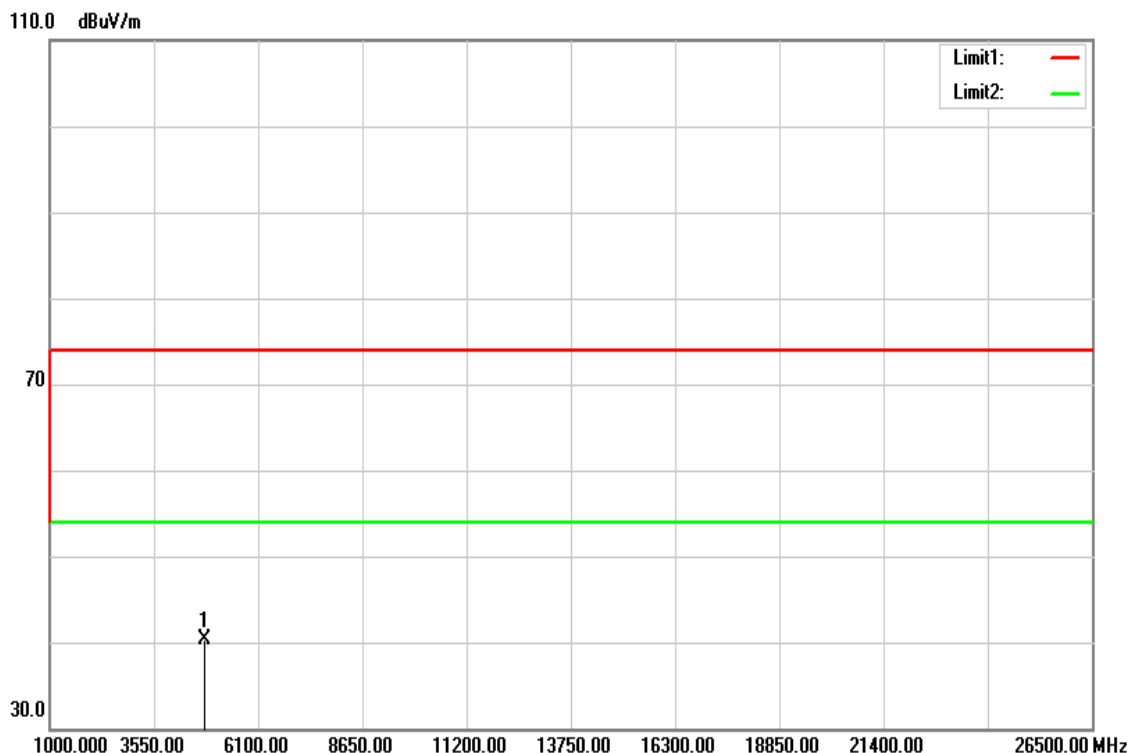


Frequency (MHz)	Reading (dBuV)	Correct Factor (B/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4804.000	33.50	6.78	40.28	74.00	-33.72	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 6 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

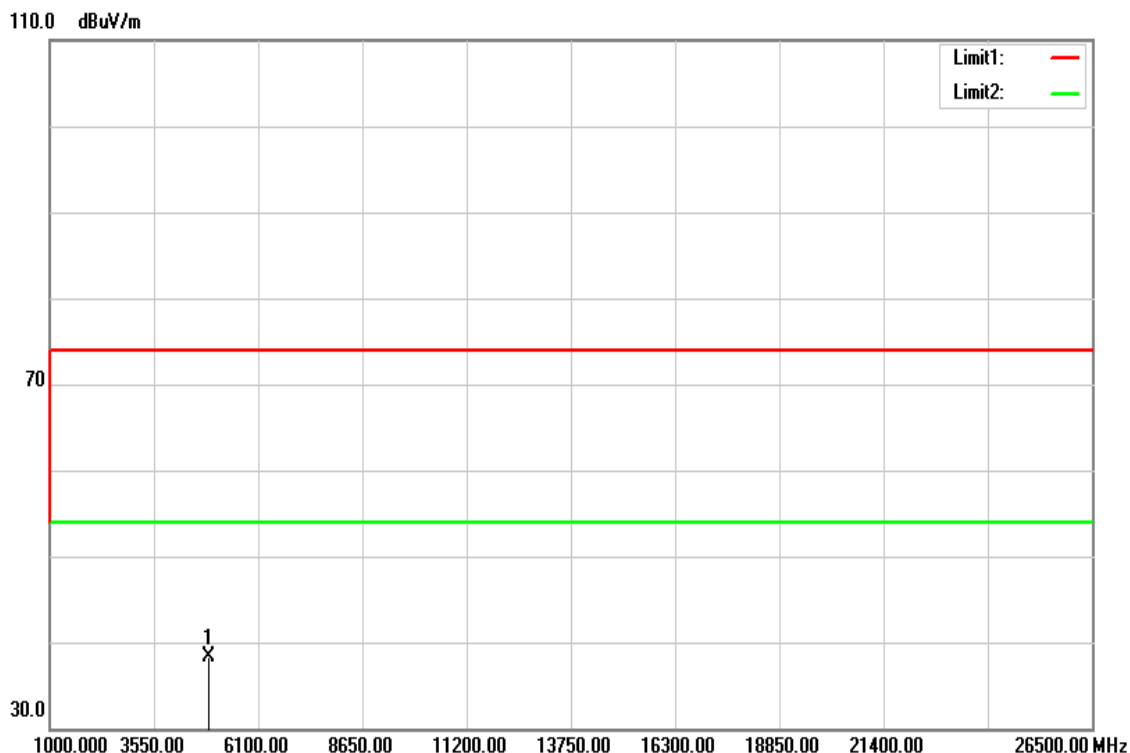


Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	31.37	6.99	38.36	74.00	-35.64	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 6017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

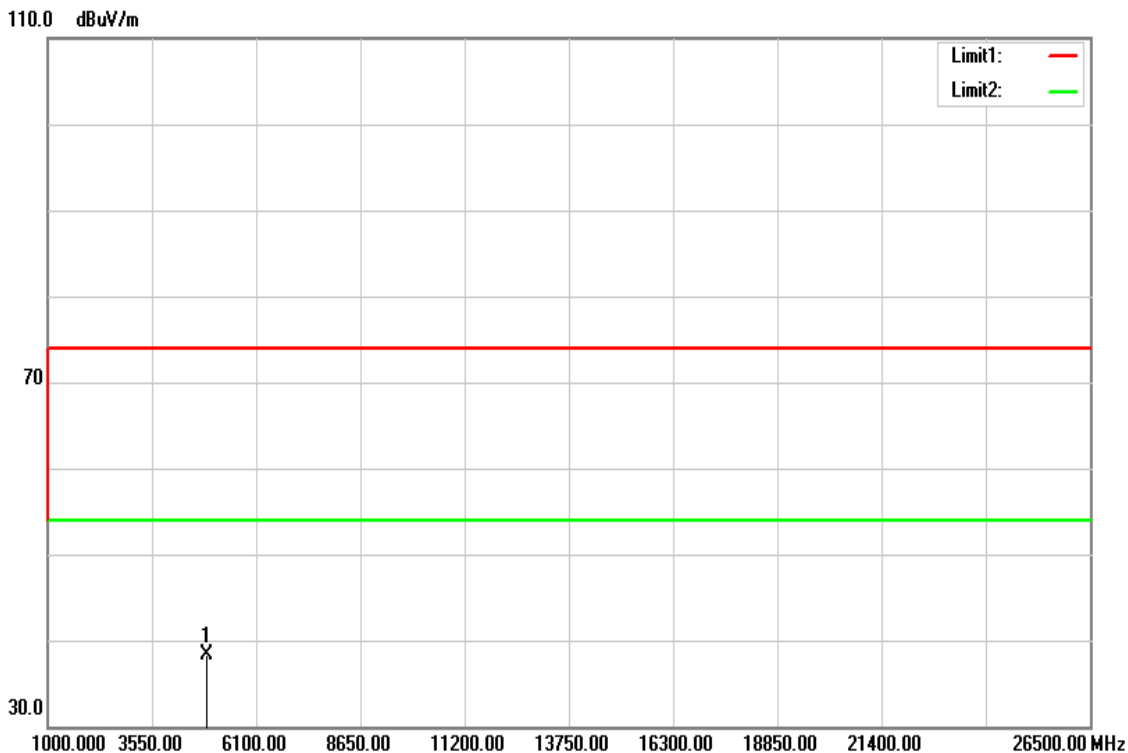


Frequency (MHz)	Reading (dB V)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4882.000	31.34	6.99	38.33	74.00	-35.67	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak and Average		

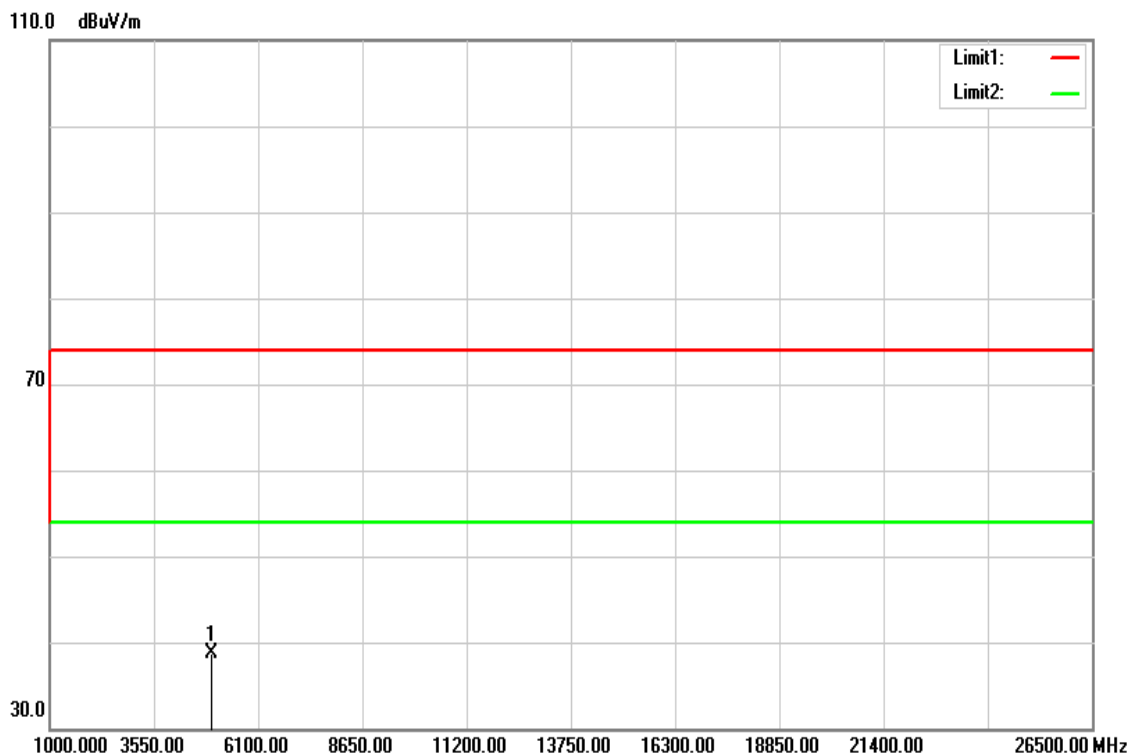


Frequency MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	31.61	7.18	38.79	74.00	-35.21	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	24(°C)/ 33%RH
Test Item	Harmonic	Test Date	November 10, 2017
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak and Average		

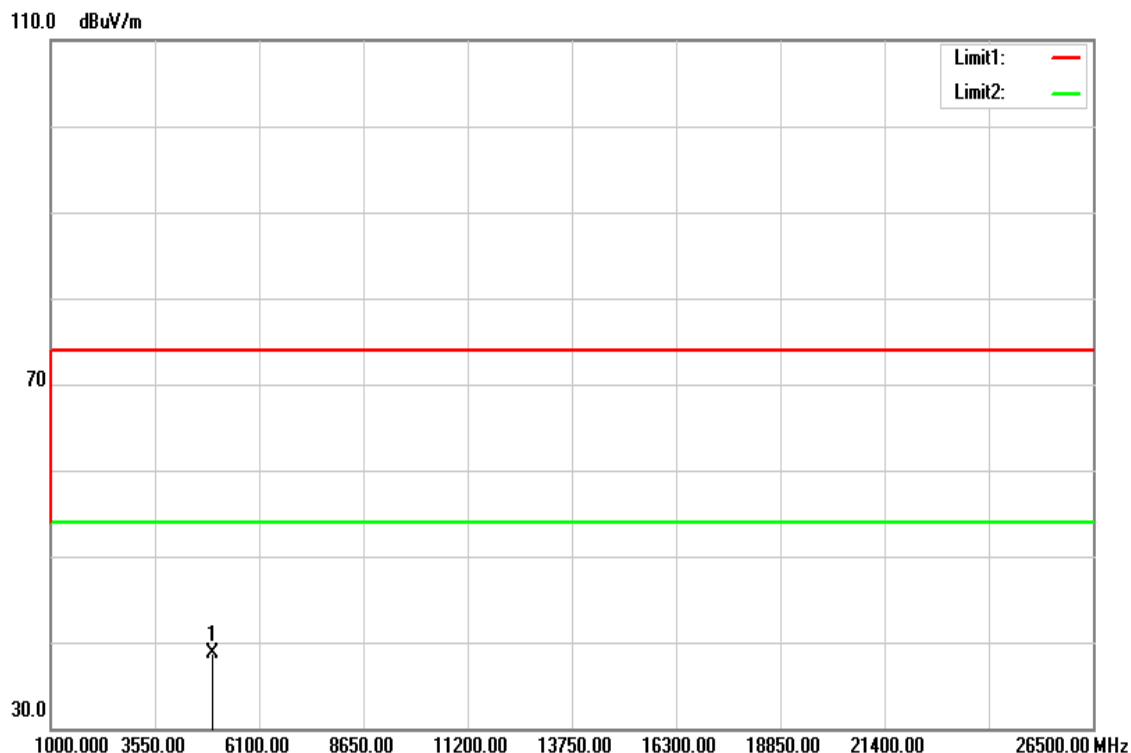

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
4960.000	31.54	7.18	38.72	74.00	-35.28	peak
N/A						

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit