


# TEST REPORT

**Applicant:** Realtek Semiconductor Corp.  
**Address:** No. 2, Innovation Road II, Hsinchu Science Park,  
Hsinchu 300, Taiwan  
**Equipment Type:** 11ax RTL8852BE Combo module  
**Model Name:** RTL8852BE  
**Brand Name:** N/A  
**FCC ID:** TX2-RTL8852BE  
**Test Standard:** FCC 47 CFR Part 2.1093  
(refer to section 3.1)  
**Maximum SAR:** Body 2.4GHz(1 g): 0.67 W/kg  
Body 5GHz(1 g): 0.96 W/kg  
Limbs 2.4GHz(10 g): 0.78 W/kg  
Limbs 5GHz(10 g): 1.00 W/kg  
**Sample Arrival Date:** Nov. 06, 2023  
**Test Date:** Dec. 09, 2023 - Dec. 12, 2023  
**Date of Issue:** Dec. 27, 2023

**ISSUED BY:**

Shenzhen BALUN Technology Co., Ltd.

**Tested by:** Xiong Lining**Checked by:** Xu Rui**Approved by:** Tolan Tu

(Testing Director)



<b>Revision History</b>		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Dec. 27, 2023</u>	<u>Initial Issue</u>

## TABLE OF CONTENTS

1	GENERAL INFORMATION .....	4
1.1	Test Laboratory .....	4
1.2	Test Location .....	4
1.3	Test Environment Condition .....	4
2	PRODUCT INFORMATION .....	5
2.1	Applicant Information .....	5
2.2	Manufacturer Information .....	5
2.3	General Description for Equipment under Test (EUT) .....	5
2.4	Ancillary Equipment .....	6
2.5	Technical Information .....	7
3	SUMMARY OF TEST RESULT .....	8
3.1	Test Standards .....	8
3.2	Device Category and SAR Limit .....	9
3.3	Test Result Summary .....	10
3.4	Test Uncertainty .....	12
4	MEASUREMENT SYSTEM .....	13
4.1	Specific Absorption Rate (SAR) Definition .....	13
4.2	DASY SAR System .....	14
5	SYSTEM VERIFICATION .....	21
5.1	Purpose of System Check .....	21
5.2	System Check Setup .....	21
6	TEST POSITION CONFIGURATIONS .....	22
6.1	Laptop Exposure Condition .....	22
6.2	Tablet Exposure Condition .....	23

7	MEASUREMENT PROCEDURE.....	24
7.1	Measurement Process Diagram.....	24
7.2	SAR Scan General Requirement .....	25
7.3	Measurement Procedure.....	26
7.4	Area & Zoom Scan Procedure .....	26
8	CONDUCTED RF OUPUT POWER.....	27
8.1	WIFI.....	27
8.2	Bluetooth .....	51
9	TEST EXCLUSION CONSIDERATION .....	52
9.1	EUT Antenna Location Sketch .....	52
9.2	SAR Test Consideration Table.....	54
10	TEST RESULT .....	61
10.1	Bluetooth (Aux. Antenna).....	62
10.2	WIFI 2.4GHz.....	63
10.3	WIFI 5GHz.....	65
11	SAR Measurement Variability.....	69
12	SIMULTANEOUS TRANSMISSION.....	70
12.1	Simultaneous Transmission Mode Considerations .....	70
12.2	Sum SAR of Simultaneous Transmission .....	71
13	TEST EQUIPMENTS LIST .....	74
ANNEX A	SIMULATING LIQUID VERIFICATION RESULT .....	75
ANNEX B	SYSTEM CHECK RESULT .....	76
ANNEX C	TEST DATA.....	81
ANNEX D	EUT EXTERNAL PHOTOS.....	99
ANNEX E	SAR TEST SETUP PHOTOS.....	99
ANNEX F	CALIBRATION REPORT .....	99
ANNEX G	TUNE-UP PROCEDURE .....	99

# 1 GENERAL INFORMATION

## 1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

## 1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

## 1.3 Test Environment Condition

Ambient Temperature	18°C to 25°C
Ambient Relative Humidity	30% to 70%

## 2 PRODUCT INFORMATION

### 2.1 Applicant Information

Applicant	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.2 Manufacturer Information

Manufacturer	Realtek Semiconductor Corp.
Address	No. 2, Innovation Road II, Hsinchu Science Park, Hsinchu 300, Taiwan

### 2.3 General Description for Equipment under Test (EUT)

EUT Name	11ax RTL8852BE Combo module
Model Name Under Test	RTL8852BE
Series Model Name	N/A
Description of Model Name Differentiation	N/A
Hardware Version	N/A
Software Version	N/A
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

#### 2.3.1 Host Information:

Product Name	Notebook Computer
Model Name	IdeaPad 5 2-in-1 16AHP9
Brand Name	Lenovo

### 2.3.2 Antenna Information:

Antenna Port	Model Name	Antenna Manufacturer	Antenna Type	Antenna Gain (dBi)				
				2.4 GHz	5.15 - 5.25 GHz	5.25 - 5.35 GHz	5.47 - 5.725 GHz	5.725 - 5.895 GHz
Main Antenna	AYP6Y-100469	AWAN	PIFA	2.26	3.16	3.08	2.43	3.22
Auxiliary Antenna	AYP6Y-100470		PIFA	2.16	3.41	3.33	2.89	3.82
Main Antenna	3.N201.0263	South Star	PIFA	1.79	2.31	1.52	2.73	2.61
Auxiliary Antenna	3.N201.0264		PIFA	1.69	1.87	2.28	2.82	3.18

## 2.4 Ancillary Equipment

Note: Not applicable.

## 2.5 Technical Information

Network and Wireless connectivity	Bluetooth (BR+EDR+BLE) 2.4G WIFI 802.11b, 802.11g, 802.11n(HT20/40), VHT20/40 and 802.11ax(HE20/40) 5G WIFI 802.11a, 802.11n(HT20/40), 802.11ac(VHT20/40/80) and 802.11ax(HE20/40/80), U-NII-1/2A/2C/3
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

Operating Mode	2.4G WLAN; 5G WLAN; Bluetooth	
Frequency Range	802.11b/g	2412 MHz ~ 2472 MHz
	VHT20/VHT40	2412 MHz ~ 2472 MHz
	802.11ax(HE20/HE40)	2412 MHz ~ 2472 MHz
	802.11a	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11n(HT20/HT40)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
		5470 MHz ~ 5725 MHz
		5725 MHz ~ 5850 MHz
	802.11ac(VHT20/VHT40/VHT80)	5150 MHz ~ 5250 MHz
		5250 MHz ~ 5350 MHz
5470 MHz ~ 5725 MHz		
5725 MHz ~ 5850 MHz		
802.11ax(HE20/HE40/HE80)	5150 MHz ~ 5250 MHz	
	5250 MHz ~ 5350 MHz	
	5470 MHz ~ 5725 MHz	
	5725 MHz ~ 5850 MHz	
Bluetooth	2402 MHz ~ 2480 MHz	
Antenna Type	WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
Hotspot Function	N/A	
Exposure Category	General Population/Uncontrolled exposure	
Product Type	Portable Device	
EUT Type	<input checked="" type="checkbox"/> Production unit	<input type="checkbox"/> Identical prototype

### 3 SUMMARY OF TEST RESULT

#### 3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices
2	ANSI C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
3	KDB 447498 D04 v01	447498 D04 Interim General RF Exposure Guidance v01
4	KDB 865664 D01 v01r04	SAR Measurement 100 MHz to 6 GHz
5	KDB 865664 D02 v01r02	RF Exposure Reporting
6	KDB 248227 D01 v02r02	SAR Guidance for IEEE 802.11 (Wi-Fi) Transmitters
7	KDB 616217 D04v01r02	SAR for laptop and tablets
8	IEC/IEEE 62209- 1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)



### 3.2 Device Category and SAR Limit

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user.

Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

Table of Exposure Limits:

Body Position	SAR Value (W/Kg)	
	General Population/ Uncontrolled Exposure	Occupational/ Controlled Exposure
Whole-Body SAR (averaged over the entire body)	0.08	0.4
Partial-Body SAR (averaged over any 1 gram of tissue)	1.60	8.0
SAR for hands, wrists, feet and ankles (averaged over any 10 grams of tissue)	4.0	20.0

NOTE:

**General Population/Uncontrolled Exposure:** Locations where there is the exposure of individuals who have no knowledge or control of their exposure. General population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

**Occupational/Controlled Exposure:** Locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### 3.3 Test Result Summary

#### 3.3.1 Highest SAR (1 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
			Body (0mm)	Body (0mm)
DTS	2.4G WLAN	SISO-Aux.	0.67	<b>0.96</b>
	2.4G WLAN	SISO-Main	0.51	
U-NII-2A	5.3G WLAN	SISO-Aux.	0.81	
	5.3G WLAN	SISO-Main	0.76	
U-NII-2C	5.6G WLAN	SISO-Aux.	0.70	
	5.6G WLAN	SISO-Main	0.91	
U-NII-3	5.8G WLAN	SISO-Aux.	<b>0.96</b>	
	5.8G WLAN	SISO-Main	0.80	
DSSS	Bluetooth	Aux.	0.43	
Limit (W/kg)			1.60	
Verdict			Pass	

#### 3.3.2 Highest SAR (10 g Value)

Equipment Class	Band	Antenna	Maximum Scaled SAR (W/kg)	Maximum Report SAR (W/kg)
			Limbs (0mm)	Limbs (0mm)
DTS	2.4G WLAN	SISO-Aux.	0.78	<b>1.00</b>
	2.4G WLAN	SISO-Main	0.63	
U-NII-2A	5.3G WLAN	SISO-Aux.	<b>1.00</b>	
	5.3G WLAN	SISO-Main	0.95	
U-NII-2C	5.6G WLAN	SISO-Aux.	0.86	
	5.6G WLAN	SISO-Main	0.86	
U-NII-3	5.8G WLAN	SISO-Aux.	0.90	
	5.8G WLAN	SISO-Main	0.79	
DSSS	Bluetooth	Aux.	0.17	
Limit (W/kg)			4.00	
Verdict			Pass	

### 3.3.3 Highest Simultaneous Transmission SAR Values (1 g Value)

Equipment Class	Maximum Report SAR (W/kg)		SPLSR
	Body(0mm)		
	1g SAR		
DTS	1.18		/
NII	<b>2.29</b>		<b>0.02</b>
DSSS	<b>2.29</b>		<b>0.02</b>
Limit (W/Kg)	1.60		0.04
Verdict	Pass		Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

### 3.3.4 Highest Simultaneous Transmission SAR Values (10 g Value)

Equipment Class	Maximum Report SAR (W/kg)		SPLSR
	Limbs (0mm)		
	1g SAR		
DTS	1.41		/
NII	<b>2.13</b>		/
DSSS	<b>2.13</b>		/
Limit (W/Kg)	4.00		/
Verdict	Pass		Pass

Note: The simultaneous transmission SAR detail please refer to section 12.

### 3.4 Test Uncertainty

According to KDB 865664 D01, when the highest measured 1 g SAR within a frequency band is  $< 1.5$  W/kg, the extensive SAR measurement uncertainty analysis is not required in SAR reports submitted for equipment approval.

The maximum 1 g SAR for the EUT in this report is 0.96 W/kg, which is lower than 1.5 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

The maximum 10 g SAR for the EUT in this report is 1.00 W/kg, which is lower than 3.75 W/kg, so the extensive SAR measurement uncertainty analysis is not required in this report.

## 4 MEASUREMENT SYSTEM

### 4.1 Specific Absorption Rate (SAR) Definition

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$\mathbf{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by


$$\mathbf{SAR} = \frac{\sigma E^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,

$\rho$  is the mass density of the tissue and  $E$  is the RMS electrical field strength.

## 4.2 DASY SAR System

### 4.2.1 DASY SAR System Diagram

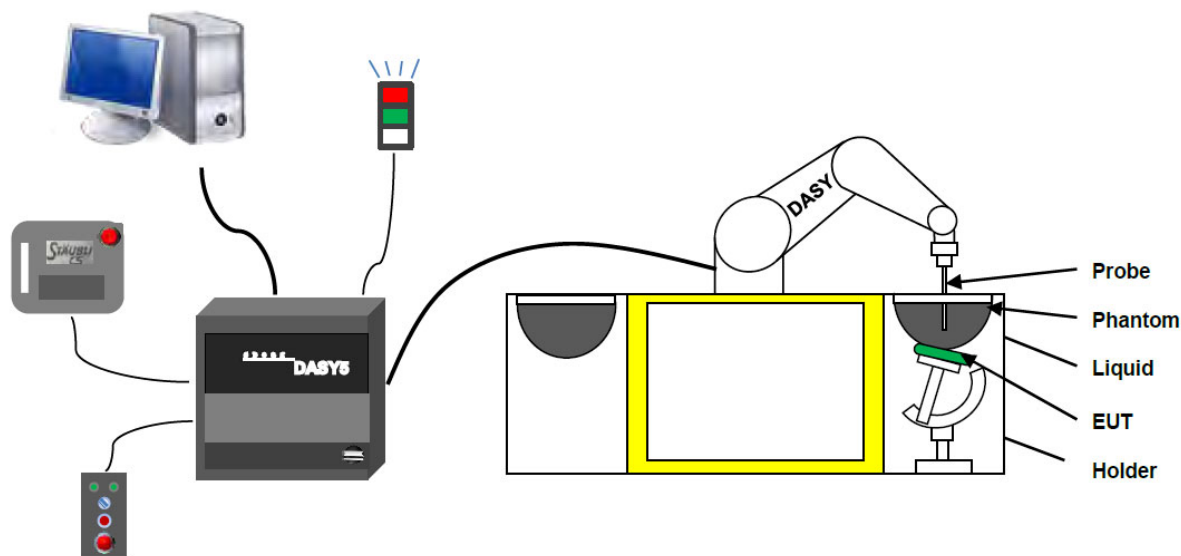

The DASY5 system for performing compliance tests consists of the following items:

1. A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).
2. A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
3. A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
4. A unit to operate the optical surface detector which is connected to the EOC.
5. The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.
6. The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.
7. DASY5 software and SEMCAD data evaluation software.
8. Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.
9. The generic twin phantom enabling the testing of left-hand and right-hand usage.
10. The device holder for handheld mobile phones.
11. Tissue simulating liquid mixed according to the given recipes.
12. System validation dipoles allowing to validate the proper functioning of the system.

#### 4.2.2 Robot

The Dasy SAR system uses the high precision robots. Symmetrical design with triangular core Built-in optical fiber for surface detection system For the 6-axis controller system, Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents). The robot series have many features that are important for our application:



- High precision  
(repeatability  $\pm 0.02$  mm)
- High reliability  
(industrial design)
- Low maintenance costs  
(virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements  
(brush less synchron motors; no stepper motors)
- Low ELF interference  
(motor control \_elds shielded via the closed metallic construction shields)

### 4.2.3 E-Field Probe

The probe is specially designed and calibrated for use in liquids with high permittivities for the measurements the Specific Dosimetric E-Field Probe EX3DV4-SN: 7510 with following specifications is used.

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	ISO/IEC 17025 calibration service available
Frequency	10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
Directivity	$\pm 0.2$ dB in HSL (rotation around probe axis) ; $\pm 0.4$ dB in HSL (rotation normal to probe axis)
Dynamic range	5 $\mu$ W/g to > 100 mW/g; Linearity: $\pm 0.2$ dB
Dimensions	Overall length: 337 mm (Tip: 9 mm) Tip diameter: 2.5 mm (Body: 10 mm) Distance from probe tip to dipole centers: 1.0 mm
Application	General dosimetry up to 3 GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms (EX3DV4)




#### E-Field Probe Calibration Process

Probe calibration is realized, in compliance with CENELEC EN 62209-1/-2 and IEEE 1528 std, with CALISAR, Antennessa proprietary calibration system. The calibration is performed with the EN 62209-1/2 annexe technique using reference guide at the five frequencies.



#### 4.2.4 Data Acquisition Electronics


The data acquisition electronics (DAE) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converte and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

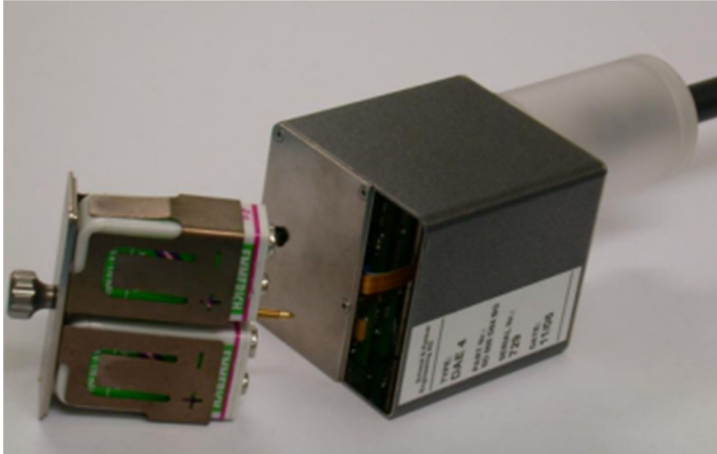

- Input Impedance: 200M $\Omega$ m
- The Inputs: Symmetrical and Floating
- Commom Mode Rejection: Above 80dB

#### 4.2.5 Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

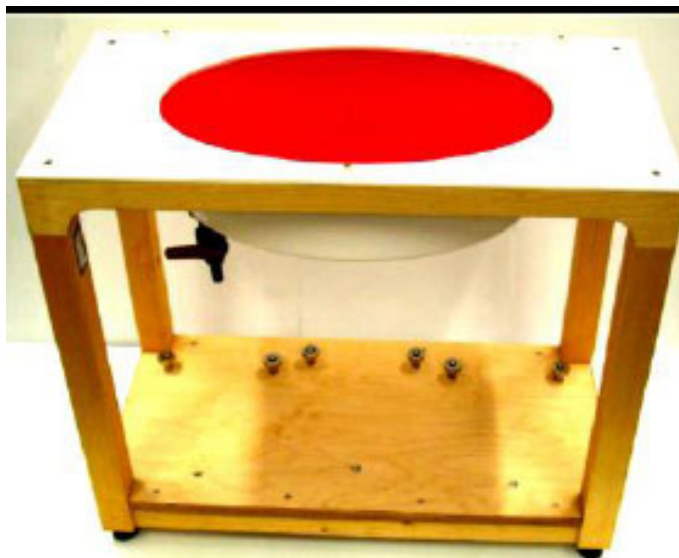

·Flat phantom

Photo of Phantom SN1012



Serial Number	Shell Thickness (mm)	Major ellipse axis (mm)	Minor axis(mm)
SN 1012 ELI4	2.0 ± 0.2	600	500

#### 4.2.6 Device Holder


The DASY5 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of  $65^\circ$ . The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. This device holder is used for standard mobile phones or PDA's only. If necessary an additional support of polystyrene material is used. Larger DUT's (e.g. notebooks) cannot be tested using this device holder. Instead a support of bigger polystyrene cubes and thin polystyrene plates is used to position the DUT in all relevant positions to find and measure spots with maximum SAR values. Therefore those devices are normally only tested at the flat part of the SAM.



The positioning system allows obtaining cheek and tilting position with a very good accuracy. Incompliance with CENELEC, the tilt angle uncertainty is lower than  $1^\circ$ .

#### 4.2.7 Simulating Liquid

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5%.

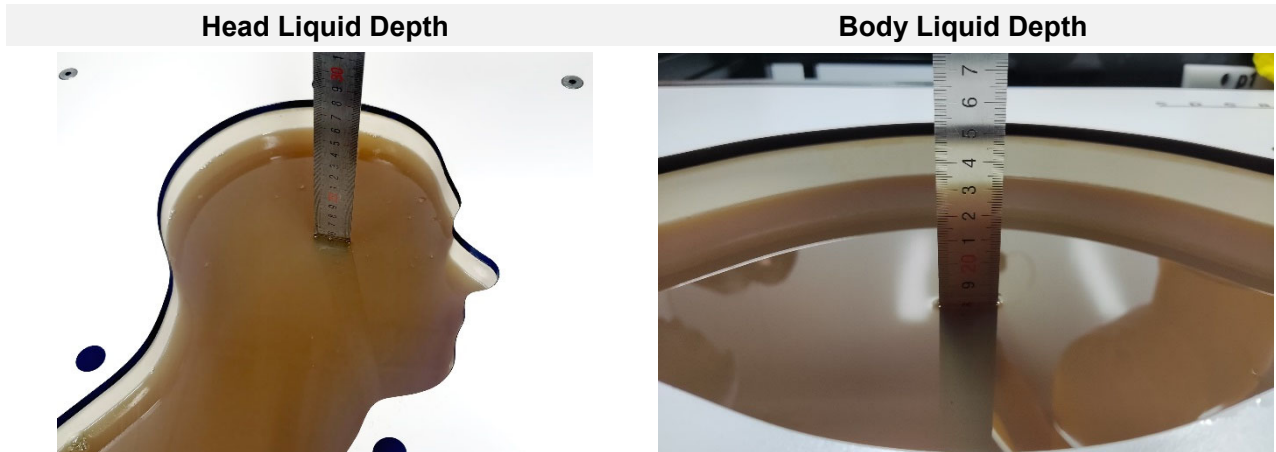

The following table gives the recipes for tissue simulating liquid.

TSL	Manufacturer / Model	Freq Range (MHz)	Main Ingredients
Head WideBand	SPEAG HBBL600-1000V6	600-10000	Ethenediol, Sodium petroleum sulfonate, Hexylene Glycol / 2-Methyl-pentane-2.4-diol, Alkoxylated alcohol


## 5 SYSTEM VERIFICATION

### 5.1 Purpose of System Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 5.2 System Check Setup


In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

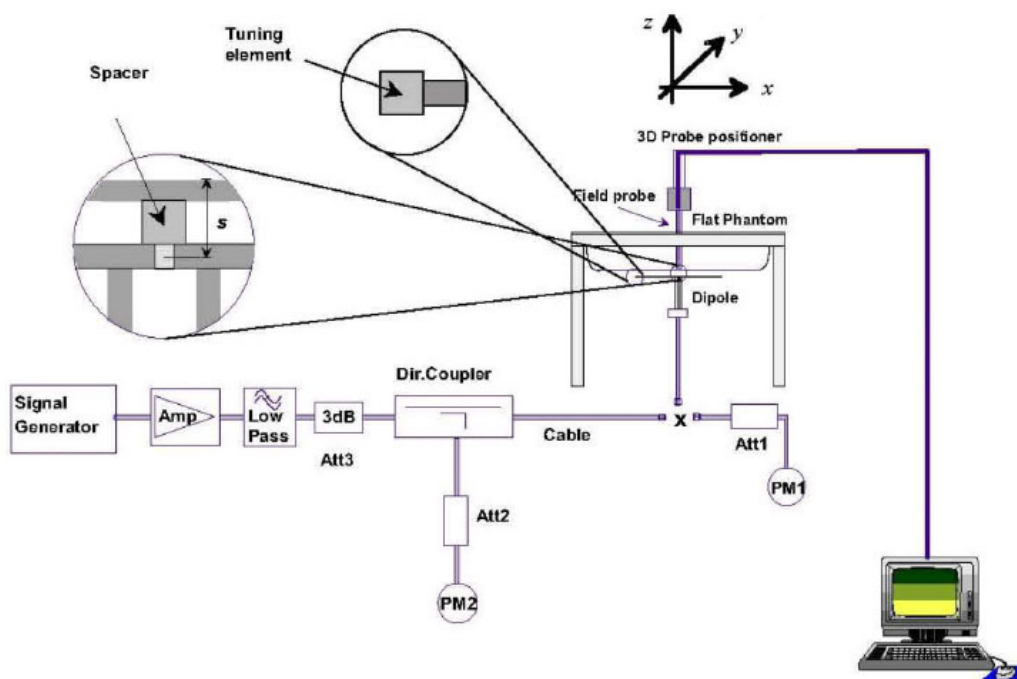

## 6 TEST POSITION CONFIGURATIONS

### 6.1 Laptop Exposure Condition

This DUT should consider one position which is bottom of laptop touching with phantom 0 mm air gap and the screen portion of the device shall be an open position at a 90° angle.

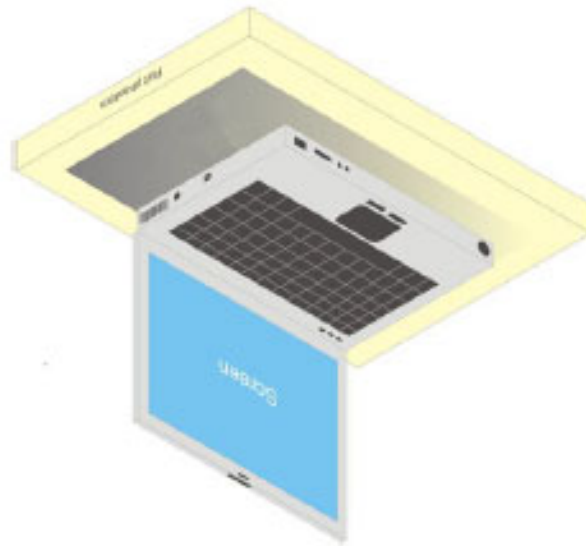

## 6.2 Tablet Exposure Condition

This DUT was tested in two different positions. They are back side and top edge in these positions, the surface of DUT is touching with phantom 0mm.


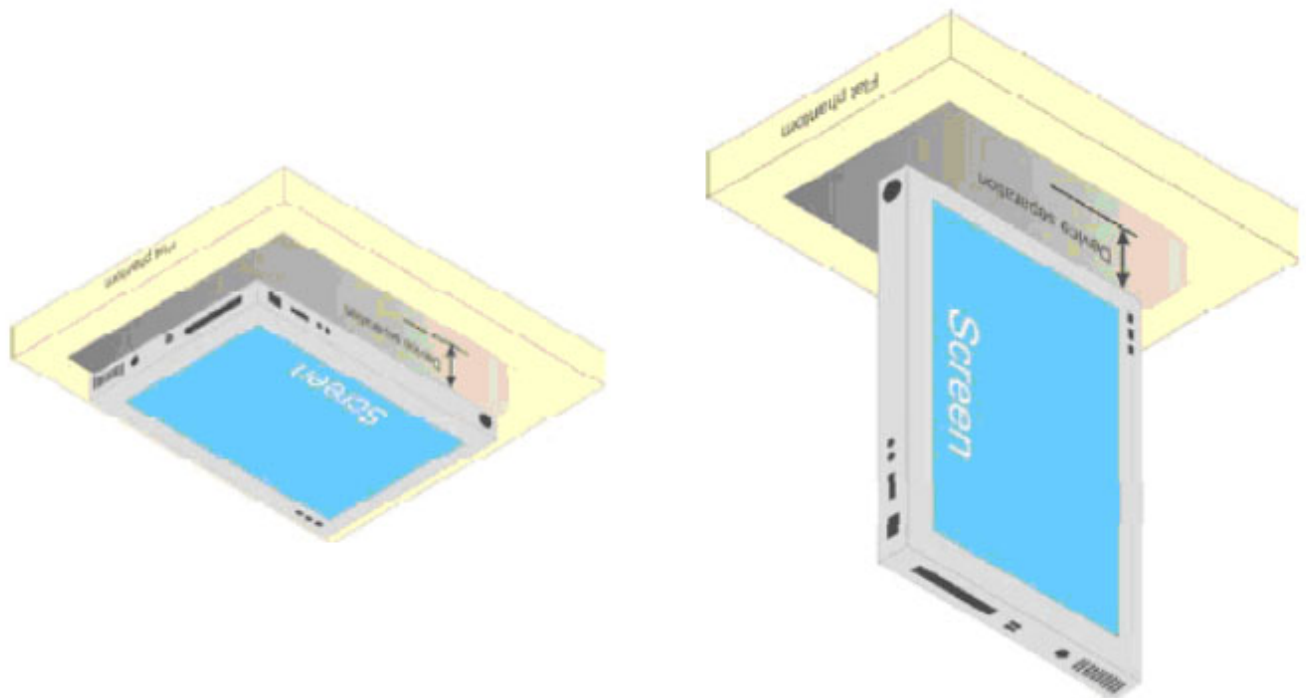


Fig Illustration for Lap-touching Position

## 7 MEASUREMENT PROCEDURE

### 7.1 Measurement Process Diagram



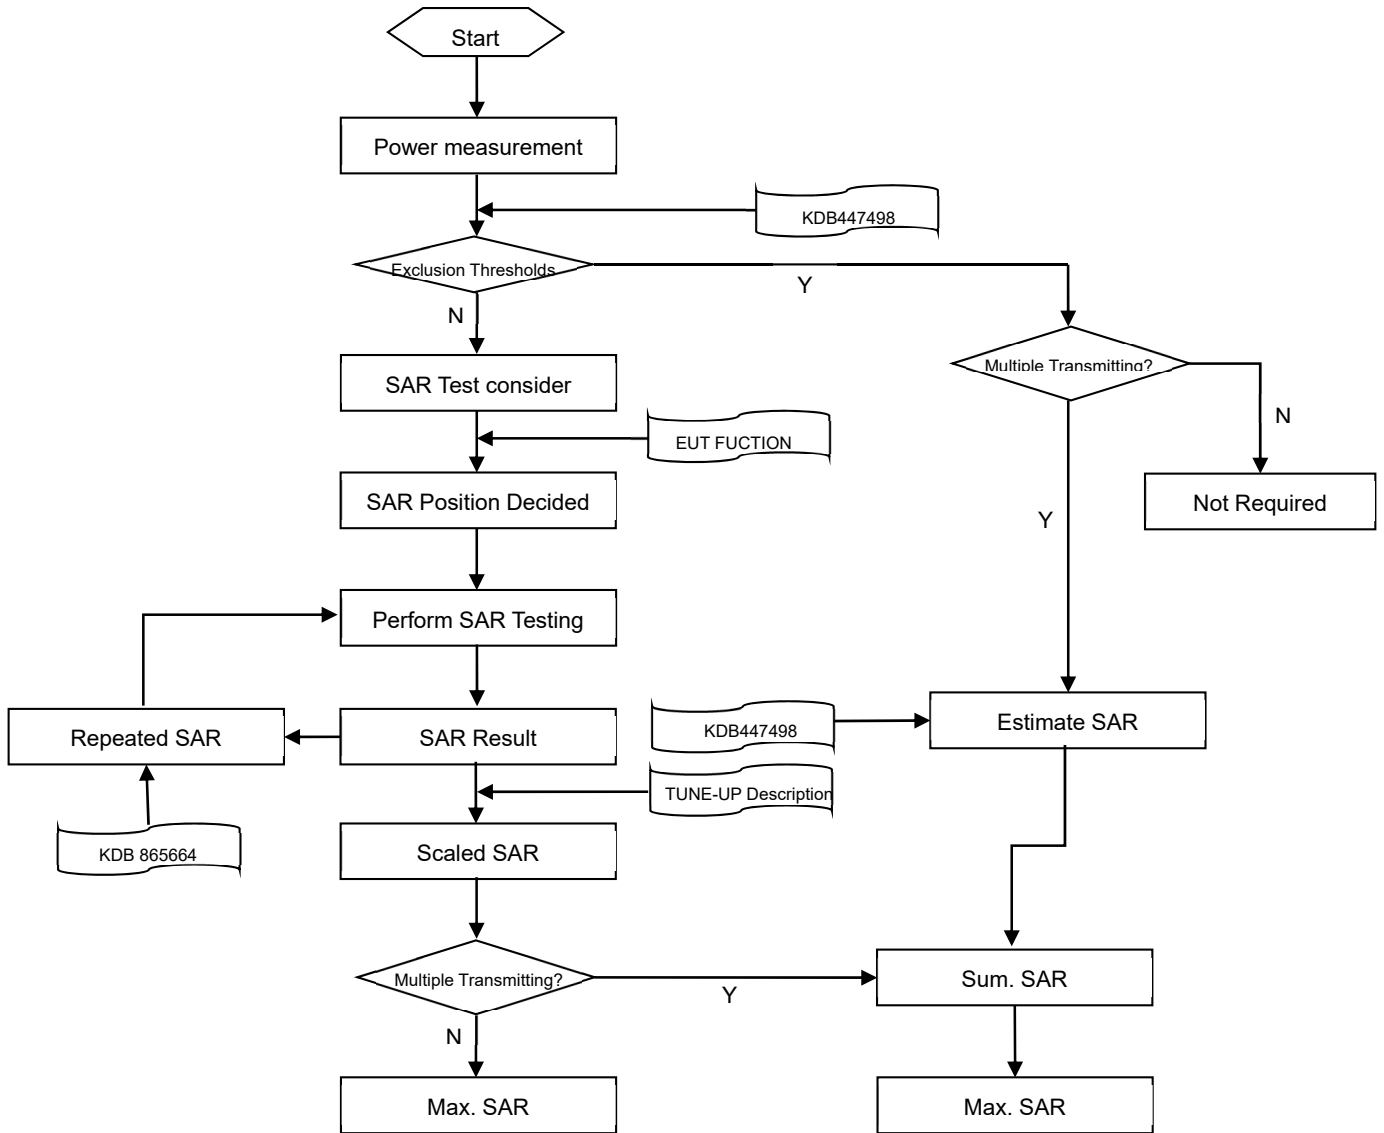

## 7.2 SAR Scan General Requirement

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1 g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013.

		≤3GHz	>3GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5±1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		30°±1°	20°±1°
Maximum area scan spatial resolution: $\Delta x$ Area , $\Delta y$ Area		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3–4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x$ Zoom , $\Delta y$ Zoom		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3–4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z$ Zoom (n)	≤ 5 mm	3–4 GHz: ≤ 4 mm
			4–5 GHz: ≤ 3 mm
			5–6 GHz: ≤ 2 mm
	graded grid	$\Delta z$ Zoom (1): between 1st two points closest to phantom surface	≤ 4 mm
4–5 GHz: ≤ 2.5 mm			
	$\Delta z$ Zoom (n>1): between subsequent points	≤ 1.5· $\Delta z$ Zoom (n-1)	
Minimum zoom scan volume	x, y, z	≥30 mm	3–4 GHz: ≥ 28 mm
			4–5 GHz: ≥ 25 mm
			5–6 GHz: ≥ 22 mm

### Note:

1.  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.
2. \* When zoom scan is required and the reported SAR from the area scan based 1 g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

### 7.3 Measurement Procedure

The following steps are used for each test position

- a. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- b. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- c. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- d. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

### 7.4 Area & Zoom Scan Procedure

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r04 quoted below.

When the 1 g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

## 8 CONDUCTED RF OUPUT POWER

### 8.1 WIFI

#### 8.1.1 2.4G WIFI (SISO-Main Antenna) (Laptop)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.69	16.50	Yes
		6	2437	<b>15.71</b>	16.50	Yes
		11	2462	15.48	16.50	Yes
		12	2467	14.72	16.50	No
		13	2472	11.64	12.00	No
	802.11g	1	2412	15.44	16.00	No
		6	2437	15.59	16.00	No
		11	2462	15.46	16.00	No
		12	2467	12.11	13.00	No
		13	2472	11.09	12.00	No
	VHT20	1	2412	15.11	16.00	No
		6	2437	15.28	16.00	No
		11	2462	15.10	16.00	No
		12	2467	12.05	13.00	No
		13	2472	11.20	12.00	No
	VHT40	3	2422	13.95	14.00	No
		6	2437	15.51	16.00	No
		9	2452	13.89	14.00	No
		10	2457	11.33	12.00	No
		11	2462	10.17	11.00	No
	802.11ax(HE20) (SU)	1	2412	15.38	16.00	No
		6	2437	15.17	16.00	No
		11	2462	15.11	16.00	No
		12	2467	12.44	13.00	No
		13	2472	11.35	12.00	No
	802.11ax(HE40) (SU)	3	2422	14.31	16.00	No
		6	2437	15.52	16.00	No
		9	2452	14.41	16.00	No
		10	2457	11.37	12.00	No
		11	2462	10.49	11.00	No
	802.11ax(HE20) (RU26)	1	2412	15.33	16.00	No
		6	2437	15.68	16.00	No
		11	2462	15.54	16.00	No

		12	2467	13.40	14.00	No
		13	2472	8.13	9.00	No
	802.11ax(HE20) (RU52)	1	2412	15.53	16.00	No
		6	2437	15.66	16.00	No
		11	2462	15.51	16.00	No
		12	2467	12.46	13.00	No
		13	2472	8.61	9.00	No
	802.11ax(HE20) (RU106)	1	2412	15.50	16.00	No
		6	2437	15.52	16.00	No
		11	2462	15.84	16.00	No
		12	2467	15.55	16.00	No
		13	2472	11.28	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Adjusted SAR = Report SAR \* (max power (OFDM)/ max power (DSSS)) = 0.415 \* (39.81mW/44.67mW) =0.370 W/Kg, so the 2.4G OFDM SAR test is not required.

## 8.1.2 2.4G WIFI (SISO-Aux. Antenna) (Laptop)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	15.56	16.50	Yes
		6	2437	15.75	16.50	Yes
		11	2462	<b>15.78</b>	16.50	Yes
		12	2467	14.93	16.50	No
		13	2472	11.59	12.00	No
	802.11g	1	2412	15.25	16.00	No
		6	2437	15.78	16.00	No
		11	2462	15.27	16.00	No
		12	2467	12.02	13.00	No
		13	2472	11.62	12.00	No
	VHT20	1	2412	15.31	16.00	No
		6	2437	15.58	16.00	No
		11	2462	15.41	16.00	No
		12	2467	12.57	13.00	No
		13	2472	11.52	12.00	No
	VHT40	3	2422	14.42	15.00	No
		6	2437	15.22	16.00	No
		9	2452	14.39	15.00	No
		10	2457	11.49	12.00	No
		11	2462	10.27	11.00	No
	802.11ax(HE20) (SU)	1	2412	15.42	16.00	No
		6	2437	15.48	16.00	No
		11	2462	15.50	16.00	No
		12	2467	12.41	13.00	No
		13	2472	11.19	12.00	No
	802.11ax(HE40) (SU)	3	2422	14.37	16.00	No
		6	2437	15.55	16.00	No
		9	2452	14.63	16.00	No
		10	2457	11.65	12.00	No
		11	2462	10.45	11.00	No
	802.11ax(HE20) (RU26)	1	2412	15.41	16.00	No
		6	2437	15.71	16.00	No
		11	2462	15.72	16.00	No
12		2467	13.79	14.00	No	
13		2472	7.96	9.00	No	
802.11ax(HE20)	1	2412	15.69	16.00	No	

	(RU52)	6	2437	15.49	16.00	No
		11	2462	15.71	16.00	No
		12	2467	12.42	13.00	No
		13	2472	8.62	9.00	No
	802.11ax(HE20) (RU106)	1	2412	15.70	16.00	No
		6	2437	15.64	16.00	No
		11	2462	15.37	16.00	No
		12	2467	15.69	16.00	No
		13	2472	11.69	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Adjusted SAR = Report SAR \* (max power (OFDM)/ max power (DSSS)) = 0.562 \* (39.81mW/44.67mW) = 0.501 W/Kg, so the 2.4G OFDM SAR test is not required.

## 8.1.3 5G WIFI (SISO-Main Antenna) (Laptop)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	15.02	15.50	No
		40	5200	14.91	15.50	No
		48	5240	15.17	15.50	No
	802.11n(HT20)	36	5180	14.98	15.50	No
		40	5200	15.06	15.50	No
		48	5240	14.93	15.50	No
	802.11n(HT40)	38	5190	15.11	15.50	No
		46	5230	15.11	15.50	No
	802.11ac(VHT20)	36	5180	14.98	15.50	No
		40	5200	15.01	15.50	No
		48	5240	15.10	15.50	No
	802.11ac(VHT40)	38	5190	15.13	15.50	No
		46	5230	14.95	15.50	No
	802.11ac(VHT80)	42	5210	15.18	15.50	No
	802.11ax(HE20) (SU)	36	5180	15.02	15.50	No
		40	5200	14.92	15.50	No
		48	5240	14.96	15.50	No
	802.11ax(HE40) (SU)	38	5190	15.19	15.50	No
		46	5230	14.98	15.50	No
	802.11ax(HE80) (SU)	42	5210	15.03	15.50	No
	802.11ax(HE20) (RU26)	36	5180	9.06	10.00	No
40		5200	10.02	11.00	No	
48		5240	9.61	10.00	No	
802.11ax(HE20) (RU52)	36	5180	10.91	11.00	No	
	40	5200	11.59	12.00	No	
	48	5240	11.04	12.00	No	
802.11ax(HE20) (RU106)	36	5180	11.52	14.00	No	
	40	5200	11.44	14.00	No	
	48	5240	11.38	14.00	No	
5.3 (5.25~5.35)	802.11a	52	5260	15.09	15.50	No
		60	5300	15.00	15.50	No
		64	5320	15.13	15.50	No
	802.11n(HT20)	52	5260	14.94	15.50	No
		60	5300	15.17	15.50	No
		64	5320	14.94	15.50	No
	802.11n(HT40)	54	5270	15.03	15.50	No
		62	5310	15.20	15.50	No
	802.11ac(VHT20)	52	5260	14.96	15.50	No

		60	5300	15.17	15.50	No
		64	5320	14.93	15.50	No
	802.11ac(VHT40)	54	5270	15.18	15.50	No
		62	5310	15.13	15.50	No
	802.11ac(VHT80)	58	5290	<b>15.12</b>	15.50	Yes
	802.11ax(HE20) (SU)	52	5260	14.96	15.50	No
		60	5300	15.15	15.50	No
		64	5320	15.20	15.50	No
	802.11ax(HE40) (SU)	54	5270	15.04	15.50	No
		62	5310	15.17	15.50	No
	802.11ax(HE80) (SU)	58	5290	8.52	9.00	No
	802.11ax(HE20) (RU26)	52	5260	9.47	11.00	No
		60	5300	8.58	9.00	No
		64	5320	10.49	11.00	No
	802.11ax(HE20) (RU52)	52	5260	12.66	13.00	No
		60	5300	10.67	11.00	No
64		5320	13.57	14.00	No	
802.11ax(HE20) (RU106)	52	5260	13.47	14.00	No	
	60	5300	13.50	14.00	No	
	64	5320	15.47	16.00	No	
5.6 (5.47~5.725)	802.11a	100	5500	14.54	15.00	No
		116	5580	14.63	15.00	No
		140	5700	14.47	15.00	No
		144	5720	14.59	15.00	No
	802.11n(HT20)	100	5500	14.49	15.00	No
		116	5580	14.60	15.00	No
		140	5700	14.50	15.00	No
		144	5720	14.58	15.00	No
	802.11n(HT40)	102	5510	14.49	15.00	No
		110	5550	14.44	15.00	No
		134	5670	14.45	15.00	No
		142	5710	14.45	15.00	No
	802.11ac(VHT20)	100	5500	14.48	15.00	No
		116	5580	14.62	15.00	No
		140	5700	14.61	15.00	No
		144	5720	14.53	15.00	No
	802.11ac(VHT40)	102	5510	14.54	15.00	No
		110	5550	14.63	15.00	No
		134	5670	14.41	15.00	No
		142	5710	14.64	15.00	No
802.11ac(VHT80)	106	5530	14.54	15.00	Yes	
	122	5610	14.63	15.00	Yes	



		138	5690	<b>14.65</b>	15.00	Yes	
	802.11ax(HE20) (SU)	100	5500	14.56	15.00	No	
		116	5580	14.44	15.00	No	
		140	5700	14.56	15.00	No	
		144	5720	14.48	15.00	No	
	802.11ax(HE40) (SU)	102	5510	14.92	15.00	No	
		110	5550	14.52	15.00	No	
		134	5670	14.44	15.00	No	
	802.11ax(HE80) (SU)	142	5710	14.70	15.00	No	
		106	5530	14.66	15.00	No	
		122	5610	14.48	15.00	No	
	802.11ax(HE20) (RU26)	138	5690	14.59	15.00	No	
		100	5500	9.36	10.00	No	
		116	5580	10.55	11.00	No	
		140	5700	9.13	10.00	No	
		144	5720	9.30	10.00	No	
	802.11ax(HE20) (RU52)	144	5720	8.90	10.00	No	
		100	5500	10.81	11.00	No	
		116	5580	11.40	12.00	No	
		140	5700	10.42	11.00	No	
		144	5720	9.97	10.00	No	
	802.11ax(HE20) (RU106)	144	5720	12.70	13.00	No	
		100	5500	13.04	14.00	No	
		116	5580	12.87	13.00	No	
140		5700	13.13	14.00	No		
144		5720	10.39	11.00	No		
5.8 (5.725~5.85)	802.11a	144	5720	13.14	14.00	No	
		149	5745	15.43	16.00	No	
		157	5785	15.60	16.00	No	
	802.11n(HT20)	165	5825	15.30	16.00	No	
		149	5745	15.49	16.00	No	
		157	5785	15.30	16.00	No	
	802.11n(HT40)	165	5825	15.30	16.00	No	
		151	5755	15.61	16.00	No	
	802.11ac(VHT20)	159	5795	15.56	16.00	No	
		149	5745	15.39	16.00	No	
		157	5785	15.44	16.00	No	
	802.11ac(VHT40)	165	5825	15.41	16.00	No	
		151	5755	15.40	16.00	No	
	802.11ac(VHT80)	159	5795	15.26	16.00	No	
	802.11ax(HE20) (SU)	155	5775	<b>15.51</b>	16.00	Yes	
		149	5745	15.61	16.00	No	
			157	5785	15.39	16.00	No

		165	5825	15.24	16.00	No
	802.11ax(HE40) (SU)	151	5755	15.52	16.00	No
		159	5795	15.35	16.00	No
	802.11ax(HE80) (SU)	155	5775	15.45	16.00	No
	802.11ax(HE20) (RU26)	149	5745	15.21	16.00	No
		157	5785	15.65	16.00	No
		165	5825	15.35	16.00	No
	802.11ax(HE20) (RU52)	149	5745	15.63	16.00	No
		157	5785	15.48	16.00	No
		165	5825	15.52	16.00	No
	802.11ax(HE20) (RU106)	149	5745	15.63	16.00	No
		157	5785	15.37	16.00	No
		165	5825	15.58	16.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

## 8.1.4 5G WIFI (SISO-Aux. Antenna) (Laptop)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	15.66	16.00	No
		40	5200	15.59	16.00	No
		48	5240	15.53	16.00	No
	802.11n(HT20)	36	5180	15.76	16.00	No
		40	5200	15.74	16.00	No
		48	5240	15.23	16.00	No
	802.11n(HT40)	38	5190	15.62	16.00	No
		46	5230	15.14	16.00	No
	802.11ac(VHT20)	36	5180	15.48	16.00	No
		40	5200	15.58	16.00	No
		48	5240	15.55	16.00	No
	802.11ac(VHT40)	38	5190	15.58	16.00	No
		46	5230	15.21	16.00	No
	802.11ac(VHT80)	42	5210	15.17	16.00	No
	802.11ax(HE20) (SU)	36	5180	15.33	16.00	No
		40	5200	15.35	16.00	No
		48	5240	15.30	16.00	No
	802.11ax(HE40) (SU)	38	5190	15.68	16.00	No
		46	5230	15.26	16.00	No
	802.11ax(HE80) (SU)	42	5210	14.91	16.00	No
	802.11ax(HE20) (RU26)	36	5180	9.28	10.00	No
40		5200	10.19	11.00	No	
48		5240	9.19	10.00	No	
802.11ax(HE20) (RU52)	36	5180	11.46	12.00	No	
	40	5200	12.13	13.00	No	
	48	5240	11.44	12.00	No	
802.11ax(HE20) (RU106)	36	5180	13.58	14.00	No	
	40	5200	13.09	14.00	No	
	48	5240	13.35	15.00	No	
5.3 (5.25~5.35)	802.11a	52	5260	15.45	16.00	No
		60	5300	15.62	16.00	No
		64	5320	15.60	16.00	No
	802.11n(HT20)	52	5260	15.38	16.00	No
		60	5300	15.42	16.00	No
		64	5320	15.28	16.00	No
	802.11n(HT40)	54	5270	15.62	16.00	No
		62	5310	15.36	16.00	No
	802.11ac(VHT20)	52	5260	15.20	16.00	No

		60	5300	15.50	16.00	No
		64	5320	15.36	16.00	No
	802.11ac(VHT40)	54	5270	15.57	16.00	No
		62	5310	15.43	16.00	No
	802.11ac(VHT80)	58	5290	<b>15.56</b>	16.00	Yes
	802.11ax(HE20) (SU)	52	5260	15.52	16.00	No
		60	5300	15.18	16.00	No
		64	5320	15.22	16.00	No
	802.11ax(HE40) (SU)	54	5270	15.60	16.00	No
		62	5310	15.41	16.00	No
	802.11ax(HE80) (SU)	58	5290	15.56	16.00	No
	802.11ax(HE20) (RU26)	52	5260	9.37	10.00	No
		60	5300	9.81	10.00	No
		64	5320	9.51	10.00	No
	802.11ax(HE20) (RU52)	52	5260	12.30	13.00	No
		60	5300	12.56	13.00	No
64		5320	11.10	12.00	No	
802.11ax(HE20) (RU106)	52	5260	13.25	14.00	No	
	60	5300	13.61	14.00	No	
	64	5320	13.23	14.00	No	
5.6 (5.47~5.725)	802.11a	100	5500	15.61	16.00	No
		116	5580	15.54	16.00	No
		140	5700	15.33	16.00	No
		144	5720	15.20	16.00	No
	802.11n(HT20)	100	5500	15.53	16.00	No
		116	5580	15.52	16.00	No
		140	5700	15.60	16.00	No
		144	5720	15.29	16.00	No
	802.11n(HT40)	102	5510	14.66	16.00	No
		110	5550	15.63	16.00	No
		134	5670	15.54	16.00	No
		142	5710	15.43	16.00	No
	802.11ac(VHT20)	100	5500	15.47	16.00	No
		116	5580	15.47	16.00	No
		140	5700	15.41	16.00	No
		144	5720	15.51	16.00	No
	802.11ac(VHT40)	102	5510	14.93	16.00	No
		110	5550	15.63	16.00	No
		134	5670	15.50	16.00	No
		142	5710	15.46	16.00	No
802.11ac(VHT80)	106	5530	14.68	16.00	Yes	
	122	5610	<b>15.59</b>	16.00	Yes	

		138	5690	15.33	16.00	Yes	
	802.11ax(HE20) (SU)	100	5500	15.28	16.00	No	
		116	5580	15.43	16.00	No	
		140	5700	15.38	16.00	No	
		144	5720	15.26	16.00	No	
	802.11ax(HE40) (SU)	102	5510	15.24	16.00	No	
		110	5550	15.76	16.00	No	
		134	5670	15.61	16.00	No	
	802.11ax(HE80) (SU)	142	5710	15.70	16.00	No	
		106	5530	14.97	16.00	No	
		122	5610	15.25	16.00	No	
	802.11ax(HE20) (RU26)	138	5690	15.27	16.00	No	
		100	5500	9.03	10.00	No	
		116	5580	10.02	10.50	No	
		140	5700	9.38	10.00	No	
		144	5720	10.72	11.00	No	
	802.11ax(HE20) (RU52)	144	5720	10.75	11.00	No	
		100	5500	11.46	12.00	No	
		116	5580	10.86	11.00	No	
		140	5700	10.41	11.00	No	
		144	5720	11.78	12.00	No	
	802.11ax(HE20) (RU106)	144	5720	11.69	12.00	No	
		100	5500	13.14	13.50	No	
		116	5580	13.26	14.00	No	
140		5700	13.26	14.00	No		
144		5720	11.48	12.00	No		
5.8 (5.725~5.85)	802.11a	144	5720	12.57	13.00	No	
		149	5745	15.62	16.00	No	
		157	5785	15.52	16.00	No	
	802.11n(HT20)	165	5825	15.41	16.00	No	
		149	5745	15.18	16.00	No	
		157	5785	15.46	16.00	No	
	802.11n(HT40)	165	5825	15.38	16.00	No	
		151	5755	15.26	16.00	No	
	802.11ac(VHT20)	159	5795	15.33	16.00	No	
		149	5745	15.13	16.00	No	
		157	5785	15.28	16.00	No	
	802.11ac(VHT40)	165	5825	15.19	16.00	No	
		151	5755	15.47	16.00	No	
	802.11ac(VHT80)	159	5795	15.39	16.00	No	
	802.11ax(HE20) (SU)	155	5775	<b>15.45</b>	16.00	Yes	
		149	5745	15.65	16.00	No	
			157	5785	15.56	16.00	No

		165	5825	15.58	16.00	No
	802.11ax(HE40) (SU)	151	5755	15.75	16.00	No
		159	5795	15.71	16.00	No
	802.11ax(HE80) (SU)	155	5775	15.51	16.00	No
	802.11ax(HE20) (RU26)	149	5745	15.67	16.00	No
		157	5785	15.56	16.00	No
		165	5825	15.66	16.00	No
	802.11ax(HE20) (RU52)	149	5745	15.65	16.00	No
		157	5785	15.41	16.00	No
		165	5825	15.41	16.00	No
	802.11ax(HE20) (RU106)	149	5745	15.45	16.00	No
		157	5785	15.68	16.00	No
		165	5825	15.65	16.00	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

## 8.1.5 2.4G WIFI (SISO-Main Antenna) (Tablet)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	11.66	12.00	Yes
		6	2437	<b>11.85</b>	12.00	Yes
		11	2462	11.74	12.00	Yes
		12	2467	11.65	12.00	No
		13	2472	11.64	12.00	No
	802.11g	1	2412	11.69	12.00	No
		6	2437	11.45	12.00	No
		11	2462	11.43	12.00	No
		12	2467	11.64	12.00	No
		13	2472	11.09	12.00	No
	VHT20	1	2412	11.56	12.00	No
		6	2437	11.53	12.00	No
		11	2462	11.69	12.00	No
		12	2467	11.65	12.00	No
		13	2472	11.20	12.00	No
	VHT40	3	2422	11.41	12.00	No
		6	2437	11.56	12.00	No
		9	2452	11.60	12.00	No
		10	2457	11.33	12.00	No
		11	2462	10.17	11.00	No
	802.11ax(HE20) (SU)	1	2412	11.43	12.00	No
		6	2437	11.53	12.00	No
		11	2462	11.66	12.00	No
		12	2467	11.59	12.00	No
		13	2472	11.35	12.00	No
	802.11ax(HE40) (SU)	3	2422	11.56	12.00	No
		6	2437	11.62	12.00	No
		9	2452	11.47	12.00	No
		10	2457	11.37	12.00	No
		11	2462	10.49	11.00	No
802.11ax(HE20) (RU26)	1	2412	11.52	12.00	No	
	6	2437	11.61	12.00	No	
	11	2462	11.62	12.00	No	
	12	2467	11.43	12.00	No	
	13	2472	8.63	9.00	No	
802.11ax(HE20)	1	2412	11.66	12.00	No	

	(RU52)	6	2437	11.57	12.00	No
		11	2462	11.47	12.00	No
		12	2467	11.53	12.00	No
		13	2472	8.61	9.00	No
	802.11ax(HE20) (RU106)	1	2412	11.58	12.00	No
		6	2437	11.49	12.00	No
		11	2462	11.60	12.00	No
		12	2467	11.44	12.00	No
		13	2472	11.54	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Adjusted SAR = Report SAR \* (max power (OFDM)/ max power (DSSS)) = 0.508 \* (15.85mW/15.85mW) =0.508 W/Kg, so the 2.4G OFDM SAR test is not required.



## 8.1.6 2.4G WIFI (SISO-Aux. Antenna) (Tablet)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
2.4 (2.4~2.4835)	802.11b	1	2412	11.40	12.00	Yes
		6	2437	11.42	12.00	Yes
		11	2462	<b>11.72</b>	12.00	Yes
		12	2467	11.70	12.00	No
		13	2472	11.59	12.00	No
	802.11g	1	2412	11.56	12.00	No
		6	2437	11.52	12.00	No
		11	2462	11.47	12.00	No
		12	2467	11.58	12.00	No
		13	2472	11.62	12.00	No
	VHT20	1	2412	11.58	12.00	No
		6	2437	11.49	12.00	No
		11	2462	11.70	12.00	No
		12	2467	11.45	12.00	No
		13	2472	11.45	12.00	No
	VHT40	3	2422	11.43	12.00	No
		6	2437	11.53	12.00	No
		9	2452	11.49	12.00	No
		10	2457	11.49	12.00	No
		11	2462	10.27	12.00	No
	802.11ax(HE20) (SU)	1	2412	11.57	12.00	No
		6	2437	11.70	12.00	No
		11	2462	11.46	12.00	No
		12	2467	11.53	12.00	No
		13	2472	11.19	12.00	No
	802.11ax(HE40) (SU)	3	2422	11.41	12.00	No
		6	2437	11.56	12.00	No
		9	2452	11.67	12.00	No
		10	2457	11.65	12.00	No
		11	2462	10.45	12.00	No
	802.11ax(HE20) (RU26)	1	2412	11.60	12.00	No
		6	2437	11.66	12.00	No
		11	2462	11.58	12.00	No
12		2467	11.56	12.00	No	
13		2472	7.96	9.00	No	
802.11ax(HE20)	1	2412	11.63	12.00	No	

	(RU52)	6	2437	11.43	12.00	No
		11	2462	11.45	12.00	No
		12	2467	11.53	12.00	No
		13	2472	8.62	9.00	No
	802.11ax(HE20) (RU106)	1	2412	11.52	12.00	No
		6	2437	11.68	12.00	No
		11	2462	11.41	12.00	No
		12	2467	11.61	12.00	No
		13	2472	11.69	12.00	No

Note: According KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

Adjusted SAR = Report SAR \* (max power (OFDM)/ max power (DSSS)) = 0.672 \* (15.85mW/15.85mW) = 0.672 W/Kg, so the 2.4G OFDM SAR test is not required.

## 8.1.7 5G WIFI (SISO-Main Antenna) (Tablet)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	10.02	10.50	No
		40	5200	10.04	10.50	No
		48	5240	10.19	10.50	No
	802.11n(HT20)	36	5180	9.92	10.50	No
		40	5200	10.20	10.50	No
		48	5240	9.96	10.50	No
	802.11n(HT40)	38	5190	10.20	10.50	No
		46	5230	10.04	10.50	No
	802.11ac(VHT20)	36	5180	9.98	10.50	No
		40	5200	10.12	10.50	No
		48	5240	9.99	10.50	No
	802.11ac(VHT40)	38	5190	10.06	10.50	No
		46	5230	10.04	10.50	No
	802.11ac(VHT80)	42	5210	10.18	10.50	No
	802.11ax(HE20) (SU)	36	5180	10.18	10.50	No
		40	5200	10.19	10.50	No
		48	5240	10.09	10.50	No
	802.11ax(HE40) (SU)	38	5190	10.16	10.50	No
		46	5230	9.98	10.50	No
	802.11ax(HE80) (SU)	42	5210	9.91	10.50	No
	802.11ax(HE20) (RU26)	36	5180	9.06	10.00	No
40		5200	10.02	10.50	No	
48		5240	9.61	10.00	No	
802.11ax(HE20) (RU52)	36	5180	9.98	10.50	No	
	40	5200	9.93	10.50	No	
	48	5240	10.18	10.50	No	
802.11ax(HE20) (RU106)	36	5180	10.18	10.50	No	
	40	5200	10.02	10.50	No	
	48	5240	10.16	10.50	No	
5.3 (5.25~5.35)	802.11a	52	5260	9.92	10.50	No
		60	5300	10.00	10.50	No
		64	5320	10.09	10.50	No
	802.11n(HT20)	52	5260	10.15	10.50	No
		60	5300	10.00	10.50	No
		64	5320	10.06	10.50	No
	802.11n(HT40)	54	5270	10.01	10.50	No
		62	5310	10.11	10.50	No
	802.11ac(VHT20)	52	5260	10.07	10.50	No
60		5300	10.02	10.50	No	

		64	5320	9.93	10.50	No
	802.11ac(VHT40)	54	5270	9.90	10.50	No
		62	5310	10.10	10.50	No
	802.11ac(VHT80)	58	5290	<b>10.11</b>	10.50	Yes
	802.11ax(HE20) (SU)	52	5260	10.13	10.50	No
		60	5300	9.95	10.50	No
		64	5320	9.90	10.50	No
	802.11ax(HE40) (SU)	54	5270	9.93	10.50	No
		62	5310	10.13	10.50	No
	802.11ax(HE80) (SU)	58	5290	10.19	10.50	No
	802.11ax(HE20) (RU26)	52	5260	8.52	9.00	No
		60	5300	10.22	10.50	No
		64	5320	8.89	9.00	No
	802.11ax(HE20) (RU52)	52	5260	10.13	10.50	No
		60	5300	9.91	10.50	No
		64	5320	10.07	10.50	No
	802.11ax(HE20) (RU106)	52	5260	10.18	10.50	No
		60	5300	9.99	10.50	No
		64	5320	9.91	10.50	No
5.6 (5.47~5.725)	802.11a	100	5500	10.15	10.50	No
		116	5580	10.18	10.50	No
		140	5700	10.18	10.50	No
		144	5720	10.17	10.50	No
	802.11n(HT20)	100	5500	10.09	10.50	No
		116	5580	9.96	10.50	No
		140	5700	10.10	10.50	No
		144	5720	10.18	10.50	No
	802.11n(HT40)	102	5510	10.45	10.50	No
		110	5550	9.90	10.50	No
		134	5670	10.12	10.50	No
		142	5710	9.93	10.50	No
	802.11ac(VHT20)	100	5500	10.18	10.50	No
		116	5580	10.05	10.50	No
		140	5700	9.97	10.50	No
		144	5720	10.19	10.50	No
	802.11ac(VHT40)	102	5510	10.04	10.50	No
		110	5550	10.04	10.50	No
		134	5670	9.98	10.50	No
		142	5710	10.13	10.50	No
	802.11ac(VHT80)	106	5530	9.89	10.50	Yes
		122	5610	10.03	10.50	Yes
		138	5690	<b>10.15</b>	10.50	Yes

	802.11ax(HE20) (SU)	100	5500	10.03	10.50	No
		116	5580	10.02	10.50	No
		140	5700	10.01	10.50	No
		144	5720	10.00	10.50	No
	802.11ax(HE40) (SU)	102	5510	9.93	10.50	No
		110	5550	9.90	10.50	No
		134	5670	9.99	10.50	No
		142	5710	10.13	10.50	No
	802.11ax(HE80) (SU)	106	5530	10.04	10.50	No
		122	5610	10.05	10.50	No
		138	5690	10.06	10.50	No
	802.11ax(HE20) (RU26)	100	5500	9.36	10.50	No
		116	5580	10.18	10.50	No
		140	5700	9.13	10.50	No
		144	5720	9.30	10.50	No
		144	5720	8.90	10.50	No
	802.11ax(HE20) (RU52)	100	5500	9.96	10.50	No
		116	5580	10.06	10.50	No
		140	5700	10.42	10.50	No
		144	5720	9.97	10.50	No
144		5720	10.12	10.50	No	
802.11ax(HE20) (RU106)	100	5500	10.09	10.50	No	
	116	5580	10.08	10.50	No	
	140	5700	10.20	10.50	No	
	144	5720	10.39	10.50	No	
	144	5720	10.00	10.50	No	
5.8 (5.725~5.85)	802.11a	149	5745	10.12	10.50	No
		157	5785	10.16	10.50	No
		165	5825	9.98	10.50	No
	802.11n(HT20)	149	5745	10.12	10.50	No
		157	5785	9.90	10.50	No
		165	5825	10.06	10.50	No
	802.11n(HT40)	151	5755	10.18	10.50	No
		159	5795	10.15	10.50	No
	802.11ac(VHT20)	149	5745	9.92	10.50	No
		157	5785	9.94	10.50	No
		165	5825	9.91	10.50	No
	802.11ac(VHT40)	151	5755	9.98	10.50	No
		159	5795	9.97	10.50	No
	802.11ac(VHT80)	155	5775	<b>10.13</b>	10.50	Yes
	802.11ax(HE20) (SU)	149	5745	9.93	10.50	No
		157	5785	9.91	10.50	No
165		5825	9.91	10.50	No	

	802.11ax(HE40) (SU)	151	5755	9.96	10.50	No
		159	5795	10.19	10.50	No
	802.11ax(HE80) (SU)	155	5775	10.03	10.50	No
	802.11ax(HE20) (RU26)	149	5745	9.90	10.50	No
		157	5785	10.19	10.50	No
		165	5825	10.11	10.50	No
	802.11ax(HE20) (RU52)	149	5745	9.90	10.50	No
		157	5785	10.20	10.50	No
		165	5825	10.20	10.50	No
	802.11ax(HE20) (RU106)	149	5745	9.97	10.50	No
		157	5785	10.09	10.50	No
		165	5825	10.03	10.50	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

## 8.1.8 5G WIFI (SISO-Aux. Antenna) (Tablet)

Band (GHz)	Mode	Channel	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	SAR Test Require.
5.2 (5.15~5.25)	802.11a	36	5180	10.16	10.50	No
		40	5200	10.05	10.50	No
		48	5240	10.17	10.50	No
	802.11n(HT20)	36	5180	10.13	10.50	No
		40	5200	10.06	10.50	No
		48	5240	10.15	10.50	No
	802.11n(HT40)	38	5190	10.14	10.50	No
		46	5230	10.20	10.50	No
	802.11ac(VHT20)	36	5180	10.07	10.50	No
		40	5200	10.19	10.50	No
		48	5240	10.00	10.50	No
	802.11ac(VHT40)	38	5190	10.10	10.50	No
		46	5230	10.16	10.50	No
	802.11ac(VHT80)	42	5210	10.18	10.50	No
	802.11ax(HE20) (SU)	36	5180	9.99	10.50	No
		40	5200	10.12	10.50	No
		48	5240	10.13	10.50	No
	802.11ax(HE40) (SU)	38	5190	9.92	10.50	No
		46	5230	10.11	10.50	No
	802.11ax(HE80) (SU)	42	5210	10.01	10.50	No
	802.11ax(HE20) (RU26)	36	5180	9.28	10.50	No
40		5200	10.19	10.50	No	
48		5240	9.19	10.50	No	
802.11ax(HE20) (RU52)	36	5180	10.18	10.50	No	
	40	5200	9.92	10.50	No	
	48	5240	10.16	10.50	No	
802.11ax(HE20) (RU106)	36	5180	9.97	10.50	No	
	40	5200	10.20	10.50	No	
	48	5240	10.20	10.50	No	
5.3 (5.25~5.35)	802.11a	52	5260	10.12	10.50	No
		60	5300	10.13	10.50	No
		64	5320	10.11	10.50	No
	802.11n(HT20)	52	5260	9.99	10.50	No
		60	5300	10.15	10.50	No
		64	5320	10.19	10.50	No
	802.11n(HT40)	54	5270	9.99	10.50	No
		62	5310	10.13	10.50	No
	802.11ac(VHT20)	52	5260	10.18	10.50	No
60		5300	10.00	10.50	No	

		64	5320	10.20	10.50	No
	802.11ac(VHT40)	54	5270	10.04	10.50	No
		62	5310	10.01	10.50	No
	802.11ac(VHT80)	58	5290	<b>9.94</b>	10.50	Yes
	802.11ax(HE20) (SU)	52	5260	9.92	10.50	No
		60	5300	9.96	10.50	No
		64	5320	10.04	10.50	No
	802.11ax(HE40) (SU)	54	5270	10.04	10.50	No
		62	5310	10.14	10.50	No
	802.11ax(HE80) (SU)	58	5290	10.15	10.50	No
	802.11ax(HE20) (RU26)	52	5260	9.37	10.50	No
		60	5300	9.81	10.50	No
		64	5320	9.51	10.50	No
	802.11ax(HE20) (RU52)	52	5260	10.16	10.50	No
		60	5300	10.06	10.50	No
64		5320	10.19	10.50	No	
802.11ax(HE20) (RU106)	52	5260	10.18	10.50	No	
	60	5300	10.10	10.50	No	
	64	5320	10.10	10.50	No	
5.6 (5.47~5.725)	802.11a	100	5500	9.97	10.50	No
		116	5580	10.13	10.50	No
		140	5700	9.95	10.50	No
		144	5720	10.02	10.50	No
	802.11n(HT20)	100	5500	9.94	10.50	No
		116	5580	9.98	10.50	No
		140	5700	10.02	10.50	No
		144	5720	9.91	10.50	No
	802.11n(HT40)	102	5510	10.15	10.50	No
		110	5550	10.06	10.50	No
		134	5670	10.14	10.50	No
		142	5710	10.05	10.50	No
	802.11ac(VHT20)	100	5500	10.16	10.50	No
		116	5580	9.98	10.50	No
		140	5700	10.13	10.50	No
		144	5720	9.92	10.50	No
	802.11ac(VHT40)	102	5510	9.94	10.50	No
		110	5550	10.04	10.50	No
		134	5670	10.20	10.50	No
		142	5710	9.91	10.50	No
	802.11ac(VHT80)	106	5530	9.99	10.50	Yes
		122	5610	9.93	10.50	Yes
		138	5690	<b>10.29</b>	10.50	Yes



	802.11ax(HE20) (SU)	100	5500	9.96	10.50	No
		116	5580	10.12	10.50	No
		140	5700	9.97	10.50	No
		144	5720	10.20	10.50	No
	802.11ax(HE40) (SU)	102	5510	9.98	10.50	No
		110	5550	10.11	10.50	No
		134	5670	10.10	10.50	No
		142	5710	10.03	10.50	No
	802.11ax(HE80) (SU)	106	5530	10.19	10.50	No
		122	5610	10.01	10.50	No
		138	5690	10.12	10.50	No
	802.11ax(HE20) (RU26)	100	5500	9.03	10.50	No
		116	5580	10.02	10.50	No
		140	5700	9.38	10.50	No
		144	5720	9.91	10.50	No
		144	5720	10.03	10.50	No
	802.11ax(HE20) (RU52)	100	5500	10.10	10.50	No
		116	5580	10.07	10.50	No
		140	5700	10.41	10.50	No
		144	5720	10.07	10.50	No
144		5720	10.02	10.50	No	
802.11ax(HE20) (RU106)	100	5500	10.06	10.50	No	
	116	5580	10.05	10.50	No	
	140	5700	10.05	10.50	No	
	144	5720	10.09	10.50	No	
	144	5720	9.90	10.50	No	
5.8 (5.725~5.85)	802.11a	149	5745	10.13	10.50	No
		157	5785	10.03	10.50	No
		165	5825	10.20	10.50	No
	802.11n(HT20)	149	5745	10.09	10.50	No
		157	5785	10.14	10.50	No
		165	5825	10.2	10.50	No
	802.11n(HT40)	151	5755	10.06	10.50	No
		159	5795	10.15	10.50	No
	802.11ac(VHT20)	149	5745	10.00	10.50	No
		157	5785	9.97	10.50	No
		165	5825	9.90	10.50	No
	802.11ac(VHT40)	151	5755	9.91	10.50	No
		159	5795	10.11	10.50	No
	802.11ac(VHT80)	155	5775	<b>10.15</b>	10.50	Yes
	802.11ax(HE20) (SU)	149	5745	10.13	10.50	No
		157	5785	10.10	10.50	No
165		5825	9.97	10.50	No	

	802.11ax(HE40) (SU)	151	5755	10.20	10.50	No
		159	5795	9.94	10.50	No
	802.11ax(HE80) (SU)	155	5775	9.95	10.50	No
	802.11ax(HE20) (RU26)	149	5745	9.91	10.50	No
		157	5785	10.19	10.50	No
		165	5825	10.04	10.50	No
	802.11ax(HE20) (RU52)	149	5745	10.19	10.50	No
		157	5785	10.16	10.50	No
		165	5825	10.14	10.50	No
	802.11ax(HE20) (RU106)	149	5745	10.08	10.50	No
		157	5785	10.20	10.50	No
		165	5825	9.95	10.50	No

Note: When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.

## 8.2 Bluetooth

### 8.2.1 Bluetooth (Aux. Antenna)


Mode	GFSK			π/4-DQPSK		
Channel	0	39	78	0	39	78
Frequency (MHz)	2402	2441	2480	2402	2441	2480
Average Power (dBm)	7.41	7.27	<b>7.50</b>	7.37	7.34	7.35
Tune-Up Limit (dBm)	8.00	8.00	8.00	8.00	8.00	8.00
SAR Test Require	Yes	Yes	Yes	No	No	No
Mode	8-DPSK			/		
Channel	0	39	78	/	/	/
Frequency (MHz)	2402	2441	2480	/	/	/
Average Power (dBm)	7.35	7.32	7.29	/	/	/
Tune-Up Limit (dBm)	8.00	8.00	8.00	/	/	/
SAR Test Require	No	No	No	/	/	/
Mode	BLE-1Mbps			BLE-2Mbps		
Channel	0	19	39	1	19	38
Frequency (MHz)	2402	2440	2480	2404	2440	2478
Average Power (dBm)	7.36	7.35	7.41	7.30	7.29	7.45
Tune-Up Limit (dBm)	8.00	8.00	8.00	8.00	8.00	8.00
SAR Test Require	No	No	No	No	No	No

Note: Since Bluetooth BR mode is the maximum output power mode, SAR measurements were performed with test software using DH5 modulation, and SAR measurement is not required for the EDR and LE. When the secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode.

The Bluetooth duty DH5 cycle is 77.35%, as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation.

#### Duty Cycle


#### Bluetooth-GFSK

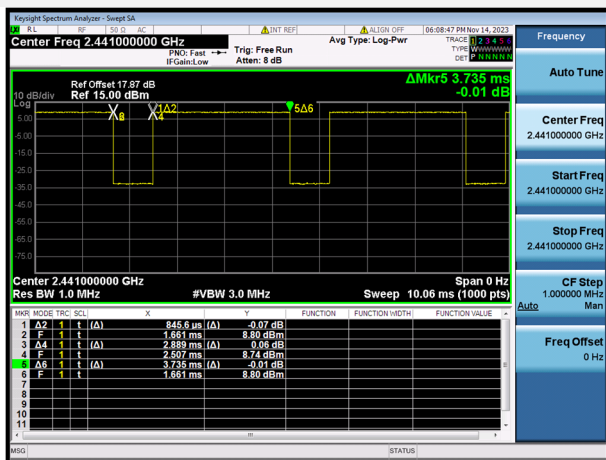


## 9 TEST EXCLUSION CONSIDERATION

### 9.1 EUT Antenna Location Sketch

9.1.1 NB Mode SAR dimensioned photo:

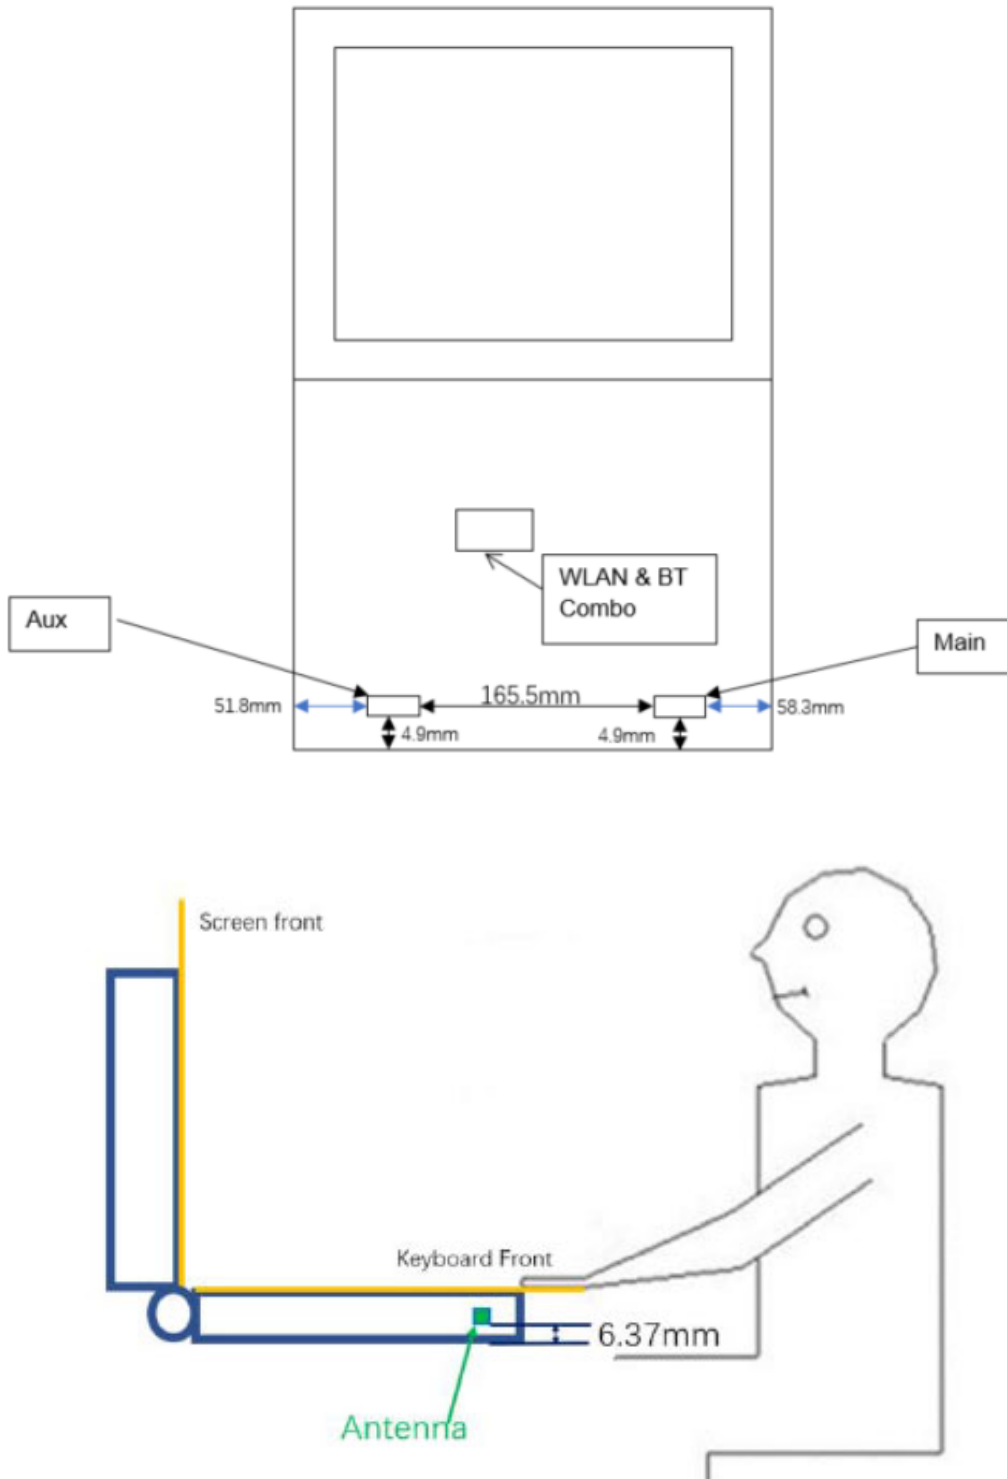

9.1.2 Tablet Mode SAR dimensioned photo:

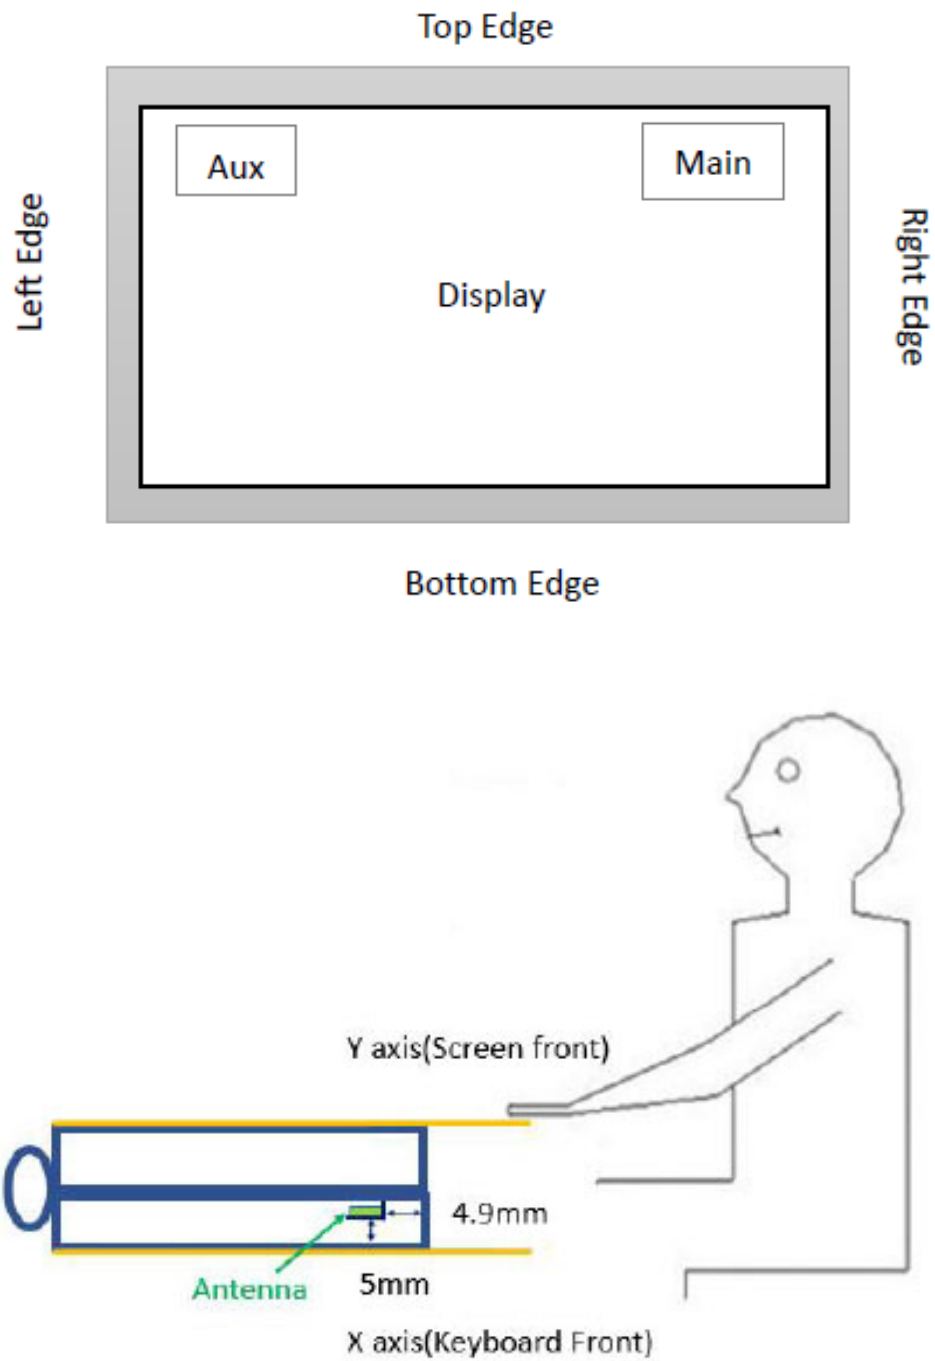

Antenna	Support Bands
Antenna Aux.	BT、WLAN 2.4G/5G
Antenna Main	WLAN 2.4G/5G

## 9.2 SAR Test Consideration Table

According with FCC KDB 447498 D04, Appendix B, The SAR-based exemption formula applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold Pth (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). The following table shows the power threshold from 5mm to 50mm.

Power Thresholds (mW)					
Frequency (MHz)	At separation distance of $\leq 5$ mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
300	39 mW	65 mW	88 mW	110 mW	129 mW
450	22 mW	44 mW	67 mW	89 mW	112 mW
835	9 mW	25 mW	44 mW	66 mW	90 mW
1900	3 mW	12 mW	26 mW	44 mW	66 mW
2450	3 mW	10 mW	22 mW	38 mW	59 mW
3600	2 mW	8 mW	18 mW	32 mW	49 mW
5800	1 mW	6 mW	14 mW	25 mW	40 mW
Frequency (MHz)	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of 50 mm
300	148 mW	166 mW	184 mW	201 mW	217 mW
450	135 mW	158 mW	180 mW	203 mW	226 mW
835	116 mW	145 mW	175 mW	207 mW	240 mW
1900	92 mW	122 mW	157 mW	195 mW	236 mW
2450	83 mW	111 mW	143 mW	179 mW	219 mW
3600	71 mW	96 mW	125 mW	158 mW	195 mW
5800	58 mW	80 mW	106 mW	136 mW	169 mW

### 9.2.1 SAR Test Consideration

This host is a notebook computer, under normal use the RF exposure scenarios are shown in the table below:

RF exposure Position	RF exposure scenarios
Bottom Side	Body
Back Side (with keyboard)	Body
Left Edge	Body
Right Edge	Body
Top Edge	Body
Bottom Edge	Body

## SISO-Main Antenna Body RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3
Calculated Frequency (MHz)		2462	5320	5710	5825
Bottom Side	Distance to User (mm)	6.37			
	Max. Peak Power (dBm)	16.50	15.50	15.00	16.00
	Max. Peak Power (mW)	44.67	35.48	31.62	39.81
	Exclusion Threshold (mW)	4.33	2.43	2.31	2.27
	SAR Test Required	Yes	Yes	Yes	Yes
Back Side (with keyboard)	Distance to User (mm)	5.00			
	Max. Peak Power (dBm)	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	2.73	1.47	1.39	1.37
	SAR Test Required	Yes	Yes	Yes	Yes
Left Edge	Distance to User (mm)	217.30			
	Max. Peak Power (dBm)	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	3583.39	3633.47	3638.11	3639.41
	SAR Test Required	No	No	No	No
Right Edge	Distance to User (mm)	58.30			
	Max. Peak Power (dBm)	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	292.96	238.36	233.89	232.65
	SAR Test Required	No	No	No	No
Top Edge	Distance to User (mm)	4.90			
	Max. Peak Power (dBm)	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	2.63	1.41	1.34	1.31
	SAR Test Required	Yes	Yes	Yes	Yes
Bottom Edge	Distance to User (mm)	350.00			
	Max. Peak Power (dBm)	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	8877.18	9748.51	9832.67	9856.53
	SAR Test Required	No	No	No	No



## SISO-Aux. Antenna Body RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3
Calculated Frequency (MHz)		2480	2462	5320	5710	5825
Bottom Side	Distance to User (mm)	6.37				
	Max. Peak Power (dBm)	8.00	16.50	16.00	16.00	16.00
	Max. Peak Power (mW)	6.31	44.67	39.81	39.81	39.81
	Exclusion Threshold (mW)	4.31	4.33	2.43	2.31	2.27
	SAR Test Required	Yes	Yes	Yes	Yes	Yes
Back Side (with keyboard)	Distance to User (mm)	5.00				
	Max. Peak Power (dBm)	8.00	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	6.31	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	2.72	2.73	1.47	1.39	1.37
	SAR Test Required	Yes	Yes	Yes	Yes	Yes
Left Edge	Distance to User (mm)	51.80				
	Max. Peak Power (dBm)	8.00	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	6.31	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	233.44	233.94	186.61	182.78	181.71
	SAR Test Required	No	No	No	No	No
Right Edge	Distance to User (mm)	223.80				
	Max. Peak Power (dBm)	8.00	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	6.31	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	3790.82	3790.14	3862.12	3868.79	3870.68
	SAR Test Required	No	No	No	No	No
Top Edge	Distance to User (mm)	4.90				
	Max. Peak Power (dBm)	8.00	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	6.31	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	2.61	2.63	1.41	1.34	1.31
	SAR Test Required	Yes	Yes	Yes	Yes	Yes
Bottom Edge	Distance to User (mm)	350.00				
	Max. Peak Power (dBm)	8.00	12.00	10.50	10.50	10.50
	Max. Peak Power (mW)	6.31	15.85	11.22	11.22	11.22
	Exclusion Threshold (mW)	8885.04	8877.18	9748.51	9832.67	9856.53
	SAR Test Required	No	No	No	No	No

RF exposure Position	RF exposure scenarios
Front Edge of Keyboard	Limbs
Left Edge of Keyboard	Limbs
Right Edge of Keyboard	Limbs
Palm rest Side of Keyboard	Limbs

## SISO-Main Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3
Calculated Frequency (MHz)		2462	5320	5710	5825
Front Edge of Keyboard	Distance to User (mm)	4.90			
	Max. Peak Power (dBm)	16.50	15.50	15.00	16.00
	Max. Peak Power (mW)	44.67	35.48	31.62	39.81
	Exclusion Threshold (mW)	6.58	3.53	3.34	3.29
	SAR Test Required	Yes	Yes	Yes	Yes
Left Edge of Keyboard	Distance to User (mm)	217.30			
	Max. Peak Power (dBm)	16.50	15.50	15.00	16.00
	Max. Peak Power (mW)	44.67	35.48	31.62	39.81
	Exclusion Threshold (mW)	8958.47	9083.68	9095.27	9098.53
	SAR Test Required	No	No	No	No
Right Edge of Keyboard	Distance to User (mm)	58.30			
	Max. Peak Power (dBm)	16.50	15.50	15.00	16.00
	Max. Peak Power (mW)	44.67	35.48	31.62	39.81
	Exclusion Threshold (mW)	732.41	595.91	584.73	581.62
	SAR Test Required	No	No	No	No
Palm rest Side of Keyboard	Distance to User (mm)	5.00			
	Max. Peak Power (dBm)	16.50	15.50	15.00	16.00
	Max. Peak Power (mW)	44.67	35.48	31.62	39.81
	Exclusion Threshold (mW)	6.83	3.69	3.48	3.43
	SAR Test Required	Yes	Yes	Yes	Yes

## SISO-Aux. Antenna Limbs RF exposure scenarios

Test Position Configurations	Mode	Bluetooth	WLAN 2.4GHz	U-NII-2A	U-NII-2C	U-NII-3
Calculated Frequency (MHz)		2480	2462	5320	5710	5825
Front Edge of Keyboard	Distance to User (mm)	4.90				
	Max. Peak Power (dBm)	8.00	16.50	16.00	16.00	16.00
	Max. Peak Power (mW)	6.31	44.67	39.81	39.81	39.81
	Exclusion Threshold (mW)	6.54	6.58	3.53	3.34	3.29
	SAR Test Required	Yes	Yes	Yes	Yes	Yes
Left Edge of Keyboard	Distance to User (mm)	51.80				
	Max. Peak Power (dBm)	8.00	16.50	16.00	16.00	16.00
	Max. Peak Power (mW)	6.31	44.67	39.81	39.81	39.81
	Exclusion Threshold (mW)	583.60	584.85	466.53	456.95	454.29
	SAR Test Required	No	No	No	No	No
Right Edge of Keyboard	Distance to User (mm)	223.80				
	Max. Peak Power (dBm)	8.00	16.50	16.00	16.00	16.00
	Max. Peak Power (mW)	6.31	44.67	39.81	39.81	39.81
	Exclusion Threshold (mW)	9477.04	9475.36	9655.29	9671.98	9676.69
	SAR Test Required	No	No	No	No	No
Palm rest Side of Keyboard	Distance to User (mm)	5.00				
	Max. Peak Power (dBm)	8.00	16.50	16.00	16.00	16.00
	Max. Peak Power (mW)	6.31	44.67	39.81	39.81	39.81
	Exclusion Threshold (mW)	6.79	6.83	3.69	3.48	3.43
	SAR Test Required	Yes	Yes	Yes	Yes	Yes

## Note:

1. Maximum power is the source-based time-average power and represents the maximum RF output power including tune-up tolerance among production units
2. Per KDB 447498 D04, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. Per KDB 447498 D04, standalone SAR test exclusion threshold is applied; If the distance of the antenna to the user is < 5mm, 5mm is used to determine SAR exclusion threshold
4. Per KDB 447498 D04, for separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive), the threshold Pth (mW) is given by Following:

$$P_{th}(mW) = \begin{cases} ERP_{20cm}(d/20cm)^x & d \leq 20cm \\ ERP_{20cm} & 20cm < d \leq 40cm \end{cases}$$

where

$$x = -\log_{10} \left( \frac{60}{ERP_{20cm}\sqrt{f}} \right)$$

- a. f(GHz) is the RF channel transmit frequency in GHz
- b. d is the separation distance (cm), The result is rounded to one decimal place for comparison
- c.  $ERP_{20cm}$  are determined by:

$$ERP_{20cm}(mW) = f(x) = \begin{cases} 2040f & 0.3GHz \leq f < 1.5GHz \\ 3060 & 1.5GHz \leq f \leq 6GHz \end{cases}$$

5. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion.8. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
6. Per KDB 248227 D01 SAR is not required for the following 2.4 GHz OFDM conditions.
  - a. When KDB Publication 447498 D04 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.
7. Per KDB 248227 D01 SAR is not required for the following U-NII-1 and U-NII-2A bands conditions.
  - a. When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest reported SAR for a test configuration is  $\leq 1.2$  W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, each band is tested independently for SAR.
  - b. When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest reported SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, each band is tested independently for SAR.
8. For Limbs SAR, SAR test exemption considered by applying a factor of 2.5 to the applicable power level thresholds.

## 10 TEST RESULT

1. The reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)".
  - c. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor
2. Per KDB 447498 D04, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/kg

## 10.1 Bluetooth (Aux. Antenna)

### 10.1.1 Bluetooth Body SAR

Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																
DH5	AWAN	Laptop	Aux.	Bottom Side	0	78	2480	0.01	0.256	7.50	8.00	1.122	77.35	1.293	0.371	/
		Tablet	Aux.	Back Side (with keyboard)	0	78	2480	0.02	0.293	7.50	8.00	1.122	77.35	1.293	<b>0.425</b>	1#
				Top Edge	0	78	2480	0.11	0.137	7.50	8.00	1.122	77.35	1.293	0.199	/
	South Star	Laptop	Aux.	Bottom Side	0	78	2480	-0.09	0.225	7.50	8.00	1.122	77.35	1.293	0.326	/
		Tablet	Aux.	Back Side (with keyboard)	0	78	2480	-0.07	0.281	7.50	8.00	1.122	77.35	1.293	0.408	/
				Top Edge	0	78	2480	-0.06	0.158	7.50	8.00	1.122	77.35	1.293	0.229	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

### 10.1.2 Bluetooth Limbs SAR

Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
<b>Limbs</b>																
DH5	AWAN	Laptop	Aux.	Front Edge of Keyboard	0	78	2480	0.02	0.081	7.50	8.00	1.122	77.35	1.293	0.118	/
				Palm rest Side of Keyboard	0	78	2480	0.02	0.120	7.50	8.00	1.122	77.35	1.293	<b>0.174</b>	2#
	South Star	Laptop	Aux.	Front Edge of Keyboard	0	78	2480	-0.17	0.051	7.50	8.00	1.122	77.35	1.293	0.074	/
				Palm rest Side of Keyboard	0	78	2480	-0.18	0.109	7.50	8.00	1.122	77.35	1.293	0.158	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

## 10.2 WIFI 2.4GHZ

### 10.2.1 WIFI 2.4GHZ Body SAR

Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																
802.11b	AWAN	Laptop	Aux.	Bottom Side	0	11	2462	-0.04	0.474	15.78	16.50	1.180	99.63	1.004	0.562	/
		Tablet		Back Side (with keyboard)	0	11	2462	-0.07	0.627	11.72	12.00	1.067	99.63	1.004	<b>0.672</b>	3#
				Top Edge	0	11	2462	0.10	0.298	11.72	12.00	1.067	99.63	1.004	0.319	/
	South Star	Laptop	Aux.	Bottom Side	0	11	2462	-0.10	0.362	15.78	16.50	1.180	99.63	1.004	0.429	/
		Tablet		Back Side (with keyboard)	0	11	2462	0.02	0.524	11.72	12.00	1.067	99.63	1.004	0.561	/
				Top Edge	0	11	2462	0.15	0.186	11.72	12.00	1.067	99.63	1.004	0.199	/
	AWAN	Laptop	Main	Bottom Side	0	6	2437	-0.13	0.345	15.71	16.50	1.199	99.63	1.004	0.415	/
		Tablet		Back Side (with keyboard)	0	6	2437	0.00	0.489	11.85	12.00	1.035	99.63	1.004	<b>0.508</b>	4#
				Top Edge	0	6	2437	0.15	0.147	11.85	12.00	1.035	99.63	1.004	0.153	/
	South Star	Laptop	Main	Bottom Side	0	6	2437	0.19	0.345	15.71	16.50	1.199	99.63	1.004	0.415	/
		Tablet		Back Side (with keyboard)	0	6	2437	-0.03	0.428	11.85	12.00	1.035	99.63	1.004	0.445	/
				Top Edge	0	6	2437	0.16	0.142	11.85	12.00	1.035	99.63	1.004	0.148	/
Note: Refer to ANNEX C for the detailed test data for each test configuration.																

### 10.2.2 WIFI 2.4GHz Limbs SAR

Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.
<b>Limbs</b>																
802.11b	AWAN	Laptop	Aux.	Front Edge of Keyboard	0	11	2462	0.05	0.117	15.78	16.50	1.180	99.63	1.004	0.139	/
				Palm rest Side of Keyboard	0	11	2462	-0.13	0.654	15.78	16.50	1.180	99.63	1.004	<b>0.775</b>	<b>5#</b>
	South Star	Laptop	Aux.	Front Edge of Keyboard	0	11	2462	0.07	0.103	15.78	16.50	1.180	99.63	1.004	0.122	/
				Palm rest Side of Keyboard	0	11	2462	-0.14	0.569	15.78	16.50	1.180	99.63	1.004	0.674	/
	AWAN	Laptop	Main	Front Edge of Keyboard	0	6	2437	0.11	0.103	15.71	16.50	1.199	99.63	1.004	0.124	/
				Palm rest Side of Keyboard	0	6	2437	0.07	0.489	15.71	16.50	1.199	99.63	1.004	0.589	/
	South Star	Laptop	Main	Front Edge of Keyboard	0	6	2437	0.00	0.101	15.71	16.50	1.199	99.63	1.004	0.122	/
				Palm rest Side of Keyboard	0	6	2437	0.06	0.523	15.71	16.50	1.199	99.63	1.004	<b>0.630</b>	<b>6#</b>
Note: Refer to ANNEX C for the detailed test data for each test configuration.																



### 10.3 WIFI 5GHZ

#### 10.3.1 WIFI 5GHz Body SAR

Fre. Band	Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	1g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	1g Scaled SAR (W/kg)	Meas. No.
<b>Body</b>																	
U-NII-2A	802.11ac 80	AWAN	Laptop	Aux.	Bottom Side	0	58	5290	-0.06	0.369	15.56	16.00	1.107	91.43	1.094	0.447	/
			Tablet		Back Side (with keyboard)	0	58	5290	-0.12	0.576	9.94	10.50	1.138	91.43	1.094	0.717	/
					Top Edge	0	58	5290	0.12	0.212	9.94	10.50	1.138	91.43	1.094	0.264	/
		South Star	Laptop	Aux.	Bottom Side	0	58	5290	0.06	0.300	15.56	16.00	1.107	91.43	1.094	0.363	/
			Tablet		Back Side (with keyboard)	0	58	5290	0.15	0.647	9.94	10.50	1.138	91.43	1.094	<b>0.805</b>	7#
					Top Edge	0	58	5290	0.04	0.315	9.94	10.50	1.138	91.43	1.094	0.392	/
	AWAN	Laptop	Main	Bottom Side	0	58	5290	0.02	0.468	15.12	15.50	1.091	91.43	1.094	0.559	/	
		Tablet		Back Side (with keyboard)	0	58	5290	-0.03	0.636	10.11	10.50	1.094	91.43	1.094	<b>0.761</b>	8#	
				Top Edge	0	58	5290	-0.16	0.381	10.11	10.50	1.094	91.43	1.094	0.456	/	
	South Star	Laptop	Main	Bottom Side	0	58	5290	0.02	0.322	15.12	15.50	1.091	91.43	1.094	0.384	/	
		Tablet		Back Side (with keyboard)	0	58	5290	-0.07	0.607	10.11	10.50	1.094	91.43	1.094	0.726	/	
				Top Edge	0	58	5290	0.13	0.346	10.11	10.50	1.094	91.43	1.094	0.414	/	
U-NII-2C	802.11ac 80	AWAN	Tablet	Aux.	Bottom Side	0	122	5610	-0.14	0.468	15.59	16.00	1.099	91.43	1.094	0.563	/
					Back Side (with keyboard)	0	138	5690	0.09	0.609	10.29	10.50	1.050	91.43	1.094	<b>0.700</b>	11#
					Top Edge	0	138	5690	-0.03	0.315	10.29	10.50	1.050	91.43	1.094	0.362	/
					Back Side (with keyboard)	0	106	5530	0.04	0.551	9.99	10.50	1.125	91.43	1.094	0.678	/
					Back Side (with keyboard)	0	122	5610	0.15	0.548	9.93	10.50	1.140	91.43	1.094	0.683	/
	South Star	Tablet	Aux.	Bottom Side	0	122	5610	0.03	0.403	15.59	16.00	1.099	91.43	1.094	0.485	/	
				Back Side (with keyboard)	0	138	5690	-0.09	0.573	10.29	10.50	1.050	91.43	1.094	0.658	/	
				Top Edge	0	138	5690	0.00	0.316	10.29	10.50	1.050	91.43	1.094	0.363	/	
				Back Side (with keyboard)	0	106	5530	0.03	0.522	9.99	10.50	1.125	91.43	1.094	0.642	/	
				Back Side (with keyboard)	0	122	5610	-0.06	0.543	9.93	10.50	1.140	91.43	1.094	0.677	/	
AWAN	Laptop	Main	Bottom Side	0	138	5690	-0.06	0.382	14.65	15.00	1.084	91.43	1.094	0.453	/		

U-NII-3	802.11ac	80	South Star	Tablet	Main	Back Side (with keyboard)	0	138	5690	0.18	0.763	10.15	10.50	1.084	91.43	1.094	<b>0.905</b>	12#	
						Top Edge	0	138	5690	-0.16	0.338	10.15	10.50	1.084	91.43	1.094	0.401	/	
						Back Side (with keyboard)	0	106	5530	-0.05	0.712	9.89	10.50	1.151	91.43	1.094	0.897	/	
						Back Side (with keyboard)	0	122	5610	-0.17	0.698	10.03	10.50	1.114	91.43	1.094	0.851	/	
			South Star	Tablet	Main	Laptop	Bottom Side	0	138	5690	-0.11	0.355	14.65	15.00	1.084	91.43	1.094	0.421	/
						Tablet	Back Side (with keyboard)	0	138	5690	0.16	0.704	10.15	10.50	1.084	91.43	1.094	0.835	/
			Top Edge	0			138	5690	0.03	0.393	10.15	10.50	1.084	91.43	1.094	0.466	/		
			Back Side (with keyboard)	0			106	5530	-0.16	0.659	9.89	10.50	1.151	91.43	1.094	0.830	/		
			Back Side (with keyboard)	0			122	5610	0.05	0.681	10.03	10.50	1.114	91.43	1.094	0.830	/		
			AWAN	Tablet	Aux.	Tablet	Bottom Side	0	155	5775	-0.17	0.509	15.51	16.00	1.119	91.43	1.094	0.623	/
							Back Side (with keyboard)	0	155	5775	-0.16	0.720	10.15	10.50	1.084	91.43	1.094	0.854	/
							Top Edge	0	155	5775	0.01	0.254	10.15	10.50	1.084	91.43	1.094	0.301	/
			South Star	Tablet	Aux.	Tablet	Bottom Side	0	155	5775	0.09	0.502	15.51	16.00	1.119	91.43	1.094	0.615	/
							Back Side (with keyboard)	0	155	5775	0.01	0.808	10.15	10.50	1.084	91.43	1.094	<b>0.958</b>	15#
							Top Edge	0	155	5775	0.16	0.303	10.15	10.50	1.084	91.43	1.094	0.359	/
AWAN	Tablet	Main	Tablet	Bottom Side	0	155	5775	0.09	0.253	15.45	16.00	1.135	91.43	1.094	0.314	/			
				Back Side (with keyboard)	0	155	5775	0.08	0.565	10.13	10.50	1.089	91.43	1.094	0.673	/			
				Top Edge	0	155	5775	0.14	0.264	10.13	10.50	1.089	91.43	1.094	0.315	/			
South Star	Tablet	Main	Tablet	Bottom Side	0	155	5775	0.19	0.311	15.45	16.00	1.135	91.43	1.094	0.386	/			
				Back Side (with keyboard)	0	155	5775	0.08	0.675	10.13	10.50	1.089	91.43	1.094	<b>0.804</b>	16#			
				Top Edge	0	155	5775	0.08	0.329	10.13	10.50	1.089	91.43	1.094	0.392	/			

Note: Refer to ANNEX C for the detailed test data for each test configuration.

### 10.3.2 WIFI 5GHz Limbs SAR

Fre. Band	Mode	Antenna Manufacturer	Test State	Antenna	Position	Dist. (mm)	Ch.	Freq. (MHz)	Power Drift (dB)	10g Meas SAR (W/kg)	Meas. Power (dBm)	Max. tune-up power (dBm)	Scaling Factor	Duty cycle (%)	Duty cycle Factor	10g Scaled SAR (W/kg)	Meas. No.		
<b>Limbs</b>																			
U-NII-2A	802.11ac 80	AWAN	Laptop	Aux.	Front Edge of Keyboard	0	58	5290	0.00	0.140	14.07	16.00	1.560	91.43	1.094	0.239	/		
					Palm rest Side of Keyboard	0	58	5290	-0.07	0.587	14.07	16.00	1.560	91.43	1.094	<b>1.002</b>	9#		
		South Star	Laptop	Aux.	Front Edge of Keyboard	0	58	5290	0.10	0.131	14.07	16.00	1.560	91.43	1.094	0.224	/		
					Palm rest Side of Keyboard	0	58	5290	-0.16	0.512	14.07	16.00	1.560	91.43	1.094	0.874	/		
		AWAN	Laptop	Main	Front Edge of Keyboard	0	58	5290	0.04	0.163	14.74	15.50	1.191	91.43	1.094	0.212	/		
					Palm rest Side of Keyboard	0	58	5290	0.04	0.711	14.74	15.50	1.191	91.43	1.094	0.926	/		
		South Star	Laptop	Main	Front Edge of Keyboard	0	58	5290	0.09	0.151	14.74	15.50	1.191	91.43	1.094	0.197	/		
					Palm rest Side of Keyboard	0	58	5290	0.09	0.729	14.74	15.50	1.191	91.43	1.094	<b>0.950</b>	10#		
		U-NII-2C	802.11ac 80	AWAN	Laptop	Aux.	Front Edge of Keyboard	0	138	5690	0.05	0.111	15.33	16.00	1.167	91.43	1.094	0.142	/
							Palm rest Side of Keyboard	0	138	5690	0.01	0.675	15.33	16.00	1.167	91.43	1.094	<b>0.862</b>	13#
				South Star	Laptop	Aux.	Front Edge of Keyboard	0	138	5690	0.12	0.099	15.33	16.00	1.167	91.43	1.094	0.126	/
							Palm rest Side of Keyboard	0	138	5690	0.19	0.581	15.33	16.00	1.167	91.43	1.094	0.742	/
AWAN	Laptop			Main	Front Edge of Keyboard	0	138	5690	-0.06	0.180	14.65	15.00	1.084	91.43	1.094	0.213	/		
					Palm rest Side of Keyboard	0	138	5690	0.05	0.726	14.65	15.00	1.084	91.43	1.094	<b>0.861</b>	14#		
South Star	Laptop			Main	Front Edge of Keyboard	0	138	5690	0.05	0.147	14.65	15.00	1.084	91.43	1.094	0.174	/		
					Palm rest Side of Keyboard	0	138	5690	0.01	0.685	14.65	15.00	1.084	91.43	1.094	0.812	/		
U-NII-3	802.11ac 80	AWAN	Laptop	Aux.	Front Edge of Keyboard	0	155	5775	0.01	0.106	15.51	16.00	1.119	91.43	1.094	0.130	/		
					Palm rest Side of Keyboard	0	155	5775	0.08	0.733	15.51	16.00	1.119	91.43	1.094	<b>0.897</b>	17#		

	South Star	Laptop	Aux.	Front Edge of Keyboard	0	155	5775	-0.16	0.129	15.51	16.00	1.119	91.43	1.094	0.158	/
				Palm rest Side of Keyboard	0	155	5775	0.13	0.531	15.51	16.00	1.119	91.43	1.094	0.650	/
	AWAN	Laptop	Main	Front Edge of Keyboard	0	155	5775	-0.18	0.166	15.45	16.00	1.135	91.43	1.094	0.206	/
				Palm rest Side of Keyboard	0	155	5775	0.16	0.638	15.45	16.00	1.135	91.43	1.094	<b>0.792</b>	18#
	South Star	Laptop	Main	Front Edge of Keyboard	0	155	5775	0.04	0.132	15.45	16.00	1.135	91.43	1.094	0.164	/
				Palm rest Side of Keyboard	0	155	5775	0.06	0.611	15.45	16.00	1.135	91.43	1.094	0.759	/

Note: Refer to ANNEX C for the detailed test data for each test configuration.

## 11 SAR Measurement Variability

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are  $\leq 1.45$  W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is  $\leq 1.10$ , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

1. When the highest measured SAR is  $< 0.80$  W/kg, repeated measurement is not required.
2. When the highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. If the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$ , or when the original or repeated measurement is  $\geq 1.45$  W/kg, perform a second repeated measurement.
4. If the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ , and the original, first or second repeated measurement is  $\geq 1.5$  W/kg, perform a third repeated measurement.

Frequency Band (MHz)	Wireless Band	Antenna manufacturer	Test Mode	Antenna	RF Exposure Conditions	Test Position	Highest Measured SAR (W/kg)	Repeated SAR (Yes/No)	Highest Measured SAR (W/kg)	Largest to Smallest SAR Radio
5775	802.11ac80	South Star	Tablet	Aux.	Body	Back Side (with keyboard)	0.808	Yes	0.784	1.03

Note 1: The ratio of largest to smallest SAR for the original and first repeated measurements is  $< 1.20$ , the second repeated measurement is not required.

Note 2: For product specific 10g SAR, the highest measured 10g SAR is  $1.00 < 2.00$  W/kg, repeated measurement is not required.

## 12 SIMULTANEOUS TRANSMISSION

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR 1g of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR 1g 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR 1g is greater than the SAR limit (SAR 1g 1.6 W/kg), SAR test exclusion is determined by the SAR to Peak Location Ratio (SPLSR).

According KDB 447498 D04, simultaneous transmission:

- a)  $SPLSR = (SAR1 + SAR2)^{1.5} / R_i$  (min. separation distance, mm), and the peak separation distance is determined from the square root of  $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$ , where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.  
SAR1 is the highest reported or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.  
SAR2 is the highest reported or estimated SAR for the second of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition as the first.
- b) If  $SPLSR \leq 0.04$ , simultaneously transmission SAR measurement is not necessary.
- c) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

### 12.1 Simultaneous Transmission Mode Considerations

No.	Simultaneous Tx Combination	Body&Limbs
1	Bluetooth + WLAN 2.4GHz (Antenna Main)	Yes
2	WLAN 2.4GHz (Antenna Auxiliary) + WLAN 2.4GHz (Antenna Main)	Yes
3	Bluetooth + WLAN 5GHz (Antenna Auxiliary)	Yes
4	Bluetooth + WLAN 5GHz (Antenna Main)	Yes
5	WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes
6	Bluetooth + WLAN 5GHz (Antenna Auxiliary) + WLAN 5GHz (Antenna Main)	Yes

Note:

- The EUT supports the Antenna Auxiliary with TX/RX diversity function for WLAN and Bluetooth, the Antenna Main with TX/RX diversity function for WLAN.
- WLAN 2.4GHz and Bluetooth will not be transmitting from the Antenna Auxiliary at same time.


## 12.2 Sum SAR of Simultaneous Transmission

### 12.2.1 Body Simultaneous Transmission SAR Evaluation for WLAN Antenna with Bluetooth

State	Position		Stand alone SAR				
			1	2	3	4	5
			Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	MAX. WLAN 5GHz (Antenna Auxiliary)	MAX. WLAN 5GHz (Antenna Main)
Body	Laptop	Bottom Side	0.371	0.562	0.415	0.623	0.559
Body	Tablet	Back Side of Keyboard	0.425	0.672	0.508	0.958	0.905
Body	Tablet	Top Edge	0.229	0.319	0.153	0.392	0.466
SUM SAR						SPLSR	
Sum SAR (1+3)	Sum SAR (1+4)	Sum SAR (1+5)	Sum SAR (2+3)	Sum SAR (4+5)	Sum SAR (1+4+5)	Sum SAR (4+5)	Sum SAR (1+4+5)
0.786	0.994	0.930	0.977	1.182	1.553	/	/
0.933	1.383	1.330	1.180	1.863	<b>2.288</b>	0.010 <sup>1#</sup>	<b>0.020<sup>2#</sup></b>
0.382	0.621	0.695	0.472	0.858	1.087	/	/
<p>Note:</p> <p>1: The highest Summed 1g SAR is 2.288W/Kg &gt; 1.6 W/kg, so Simultaneous Transmission SAR test exclusion is determined by the SAR to peak location separation ratio.</p> <p>2: The SPLSR is 0.02 &lt; 0.04, so Simultaneous Transmission SAR test is not required.</p>							


**SPLSR Analysis 1#**

Case 1	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
1	WLAN5G Ant.Aux	Back Side	0.958	-0.003	-0.114	-0.178	201.1	1.86	0.01	Not required
2	WLAN5G Ant.Main		0.905	-0.008	0.087	-0.178				

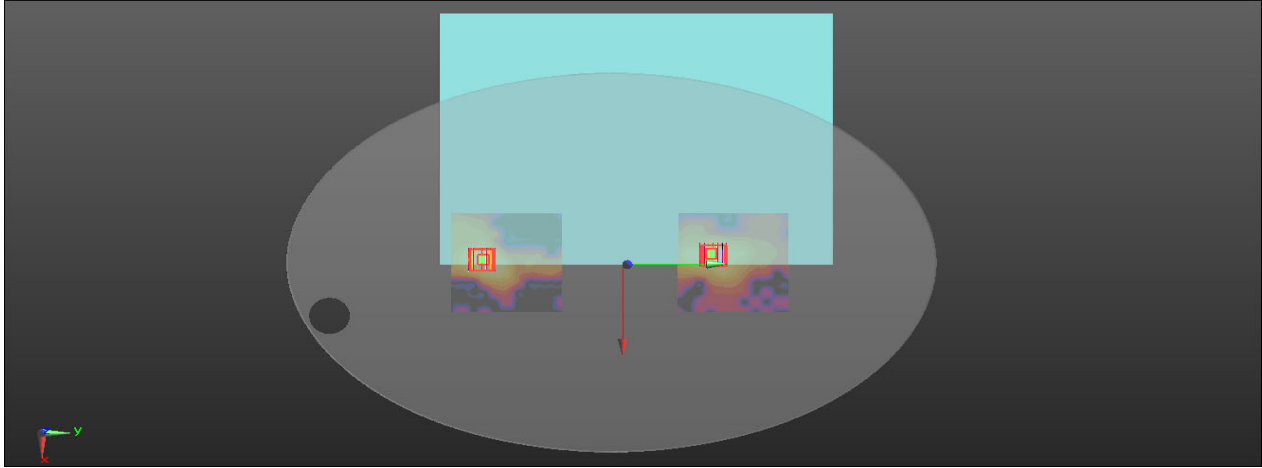

**SPLSR Analysis 2#**

Case 2	Band	Position	SAR (W/kg)	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
				X	Y	Z				
1	WLAN5G Ant.Aux+BT	Back Side	1.383	-0.003	-0.114	-0.178	201.1	2.29	0.02	Not required
2	WLAN5G Ant.Main		0.905	-0.008	0.087	-0.178				

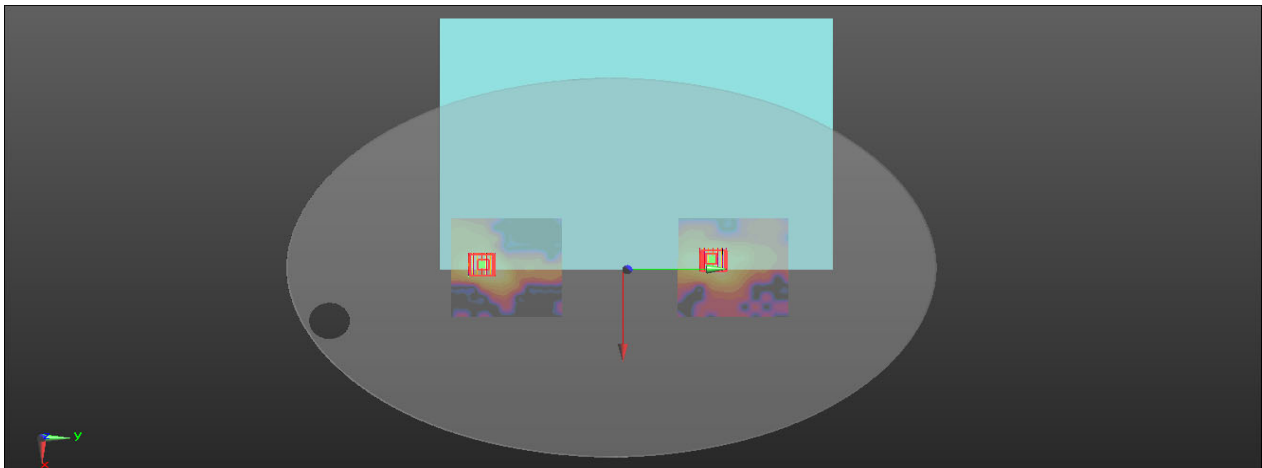



12.2.2 Limbs Simultaneous Transmission SAR Evaluation for WLAN Antenna with Bluetooth

State	Position		Stand alone SAR				
			1	2	3	4	5
			Bluetooth	WLAN 2.4GHz (Antenna Auxiliary)	WLAN 2.4GHz (Antenna Main)	MAX. WLAN 5GHz (Antenna Auxiliary)	MAX. WLAN 5GHz (Antenna Main)
Limbs	Laptop	Front Edge of Keyboard	0.118	0.139	0.122	0.239	0.213
Limbs	Laptop	Palm rest Side of Keyboard	0.174	0.775	0.630	1.002	0.950
SUM SAR							
Sum SAR (1+3)	Sum SAR (1+4)	Sum SAR (1+5)	Sum SAR (2+3)	Sum SAR (4+5)	Sum SAR (1+4+5)		
0.240	0.357	0.331	0.261	0.452	0.570		
0.804	1.176	1.124	1.405	1.952	<b>2.126</b>		
Note: 1: The highest Summed 10g SAR is 2.126W/Kg < 4.0 W/kg, so Simultaneous Transmission SAR test is not required.							

## 13 TEST EQUIPMENTS LIST

Description	Manufacturer	Model	Serial No./Version	Cal. Date	Cal. Due
PC	Dell	N/A	N/A	N/A	N/A
Test Software	Speag	DASY5	52.8.8.1222	N/A	N/A
2450MHz Validation Dipole	Speag	D2450V2	SN: 952	2021/05/19	2024/05/19
5GHz Validation Dipole	Speag	D5GHzV2	SN: 1200	2021/05/18	2024/05/18
E-Field Probe	Speag	EX3DV4	SN: 7510	2023/01/19	2024/01/19
Data Acquisition Electronicsr	Speag	DAE4	SN: 1710	2023/01/30	2024/01/30
Signal Generator	R&S	SMB100A	177746	2023/05/10	2024/05/10
Power Meter	R&S	NRVD-B2	835843/014	2023/09/05	2024/09/05
Power Sensor	R&S	NRV-Z4	100381	2023/09/05	2024/09/05
Power Sensor	R&S	NRV-Z2	100211	2023/09/05	2024/09/05
Network Analyzer	Agilent	E5071C	MY46103472	2023/11/14	2024/11/14
Thermometer	Elitech	RC-4	EF5238001629	2023/10/09	2024/10/09
Thermometer	Elitech	RC-4HC	EF7239002655	2023/11/17	2024/11/17
Power Amplifier	SATIMO	6552B	22374	N/A	N/A
Dielectric Probe Kit	Speag	DAK3.5	SN: 1312	N/A	N/A
Phantom	Speag	ELI4	SN: 1012	N/A	N/A
Attenuator	COM-MW	ZA-S1-31	1305003187	N/A	N/A
Directional coupler	AA-MCS	AAMCS-UDC	000272	N/A	N/A

Note: For dipole antennas, BALUN has adopted 3 years as calibration intervals, and on annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

1. There is no physical damage on the dipole;
2. System validation with specific dipole is within 10% of calibrated value;
3. Return-loss in within 20% of calibrated measurement.
4. Impedance (real or imaginary parts) in within 5 Ohms of calibrated measurement.

## ANNEX A SIMULATING LIQUID VERIFICATION RESULT

The dielectric parameters of the liquids were verified prior to the SAR evaluation using a DAK3.5 Dielectric Probe Kit.

Date	Liquid Type	Fre. (MHz)	Temp. (°C)	Meas. Conductivity ( $\sigma$ ) (S/m)	Meas. Permittivity ( $\epsilon$ )	Target Conductivity ( $\sigma$ ) (S/m)	Target Permittivity ( $\epsilon$ )	Conductivity Tolerance (%)	Permittivity Tolerance (%)
2023.12.09	Head	2450	21.3	1.80	39.71	1.80	39.20	0.22	1.29
2023.12.10	Head	5250	21.5	4.70	35.76	4.71	35.93	-0.21	-0.47
2023.12.11	Head	5600	21.5	5.05	35.37	5.07	35.53	-0.39	-0.45
2023.12.12	Head	5750	21.4	5.18	35.68	5.22	35.36	-0.84	0.89

Note: The tolerance limit of Conductivity and Permittivity is  $\pm 5\%$ .

## ANNEX B SYSTEM CHECK RESULT

Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 % (for 1 g).

### Head liquid 1g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2023.12.09	Head	2450	100	5.370	53.70	53.00	1.32
2023.12.10	Head	5250	100	7.680	76.80	77.80	-1.29
2023.12.11	Head	5600	100	8.250	82.50	81.20	1.60
2023.12.12	Head	5750	100	7.820	78.20	77.20	1.30

Note: The tolerance limit of System validation  $\pm 10\%$ .

### Head liquid 10g

Date	Liquid Type	Freq. (MHz)	Power (mW)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Dipole SAR (W/kg)	Tolerance (%)
2023.12.09	Head	2450	100	2.420	24.20	24.10	0.41
2023.12.10	Head	5250	100	2.250	22.50	22.10	1.81
2023.12.11	Head	5600	100	2.360	23.60	23.10	2.16
2023.12.12	Head	5750	100	2.180	21.80	21.70	0.46

Note: The tolerance limit of System validation  $\pm 10\%$ .

## System Performance Check Data (2450MHz)

Date: 2023.12.09

Communication System Band: D2450 (2450.0 MHz); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.804$  S/m;  $\epsilon_r = 39.705$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 2450/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.48 W/kg


**CW 2450/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 52.98 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 11.3 W/kg

**SAR(1 g) = 5.37 W/kg; SAR(10 g) = 2.42 W/kg**

Maximum value of SAR (measured) = 6.28 W/kg

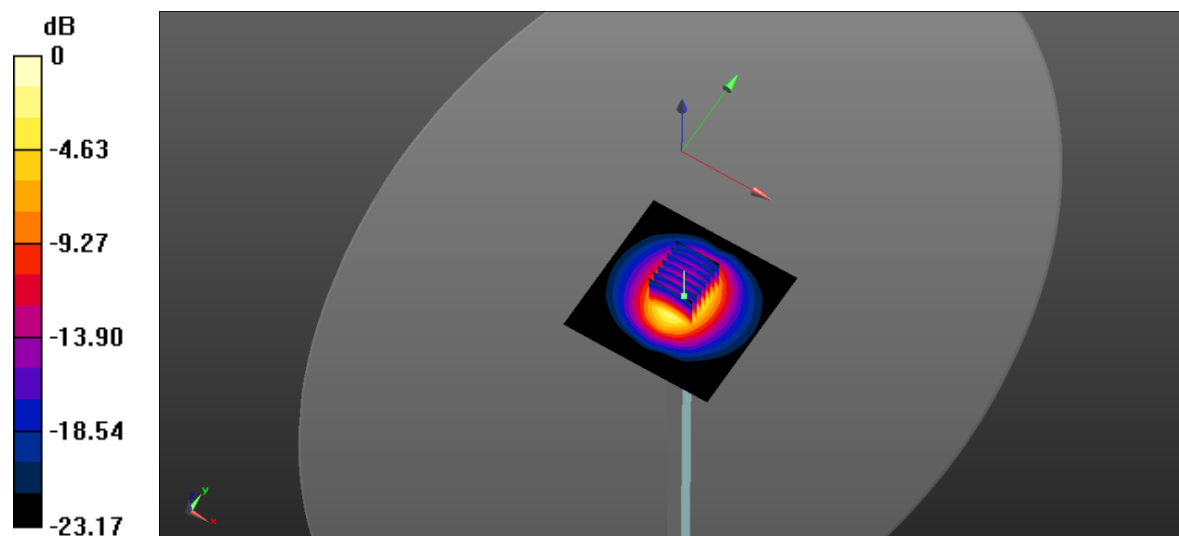

0 dB = 6.28 W/kg

## System Performance Check Data (5250MHz)

Date: 2023.12.10

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.7$  S/m;  $\epsilon_r = 35.762$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.67, 5.67, 5.67); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5250/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.33 W/kg


**CW 5250/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 42.61 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 31.5 W/kg

**SAR(1 g) = 7.68 W/kg; SAR(10 g) = 2.25 W/kg**

Maximum value of SAR (measured) = 19.6 W/kg

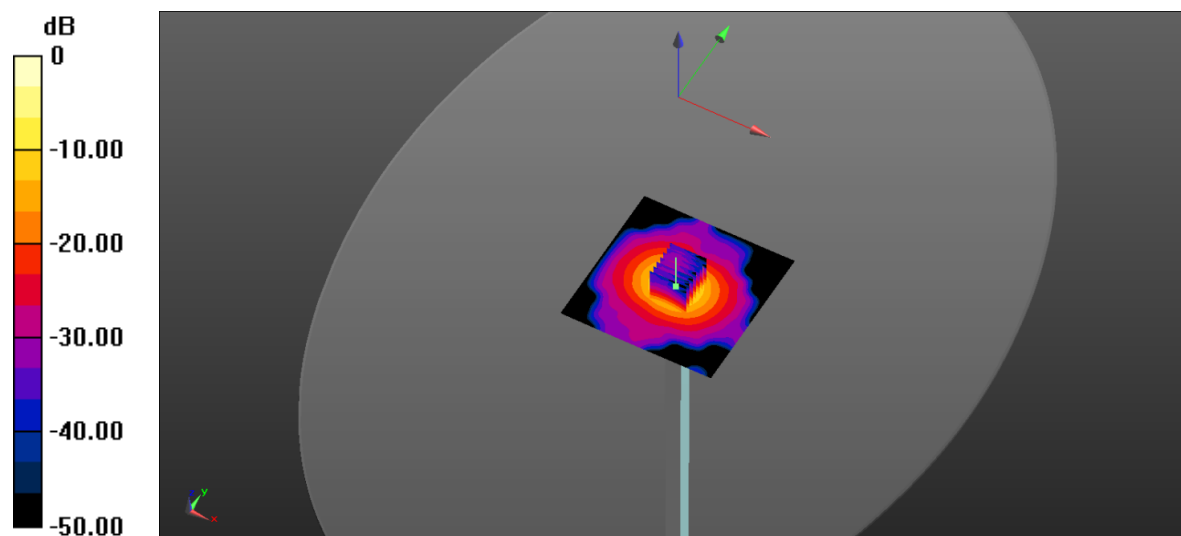

0 dB = 19.6 W/kg

## System Performance Check Data (5600MHz)

Date: 2023.12.11

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5600$  MHz;  $\sigma = 5.05$  S/m;  $\epsilon_r = 35.37$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.88, 4.88, 4.88); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5600/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 9.31 W/kg


**CW 5600/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 41.75 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 37.4 W/kg

**SAR(1 g) = 8.25 W/kg; SAR(10 g) = 2.36 W/kg**

Maximum value of SAR (measured) = 21.1 W/kg

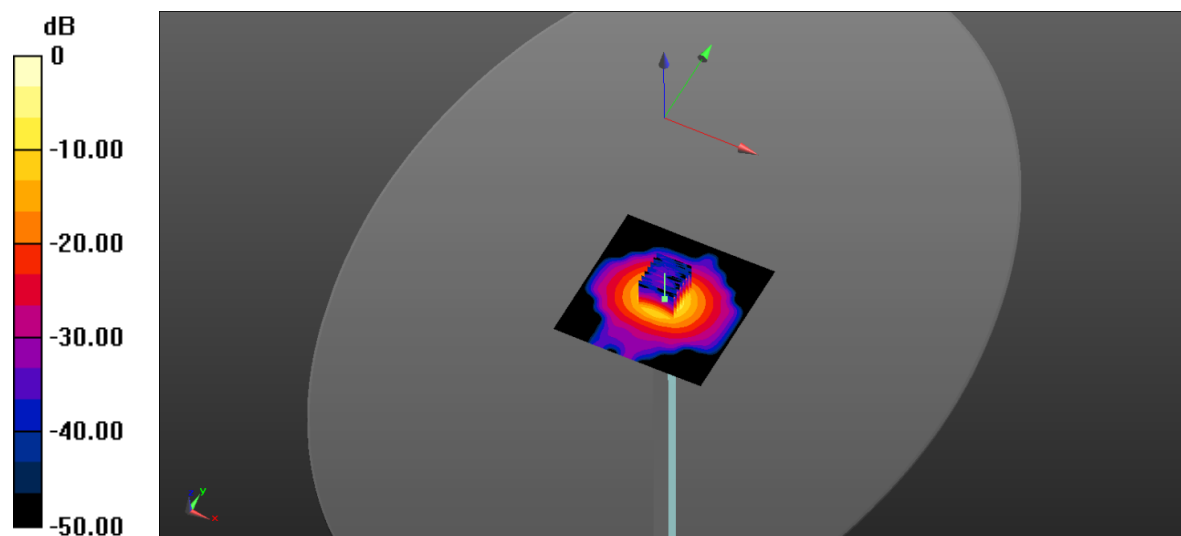

0 dB = 21.1 W/kg

## System Performance Check Data (5750MHz)

Date: 2023.12.12

Communication System Band: D5GHz (5000.0 - 6000.0 MHz); Frequency: 5750 MHz; Duty Cycle: 1:1

Medium parameters used:  $f = 5750$  MHz;  $\sigma = 5.176$  S/m;  $\epsilon_r = 35.675$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.83, 4.83, 4.83); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**CW 5750/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 8.59 W/kg


**CW 5750/Zoom Scan (7x7x21)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 37.88 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 36.3 W/kg

**SAR(1 g) = 7.82 W/kg; SAR(10 g) = 2.18 W/kg**

Maximum value of SAR (measured) = 20.2 W/kg

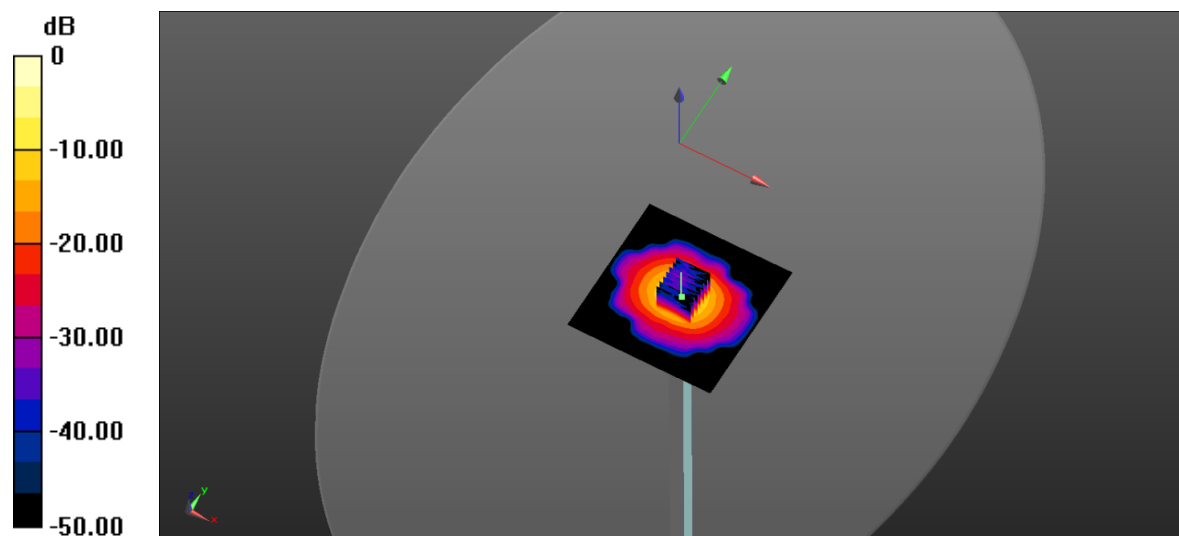

0 dB = 20.2 W/kg



## ANNEX C TEST DATA

### Meas.1 Body Plane with Back Side 0mm on 78 Channel in Bluetooth mode with Antenna Aux

Date: 2023.12.09

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.293

Medium parameters used (interpolated):  $f = 2480$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 39.483$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch78/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


**Ch78/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.506 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.638 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.352 W/kg

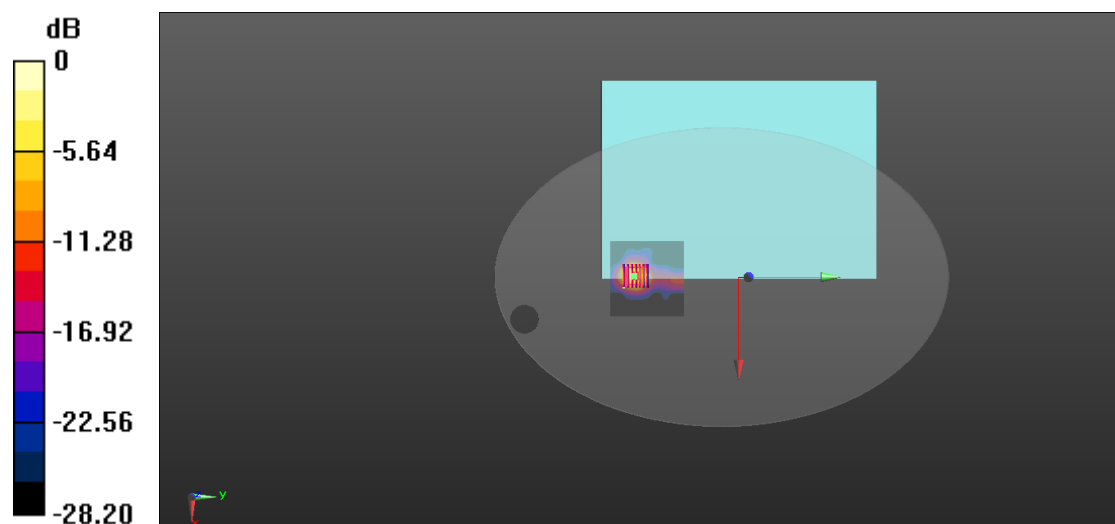

0 dB = 0.352 W/kg

**Meas.2 Limbs Plane with Palm rest Side 0mm on 78 Channel in Bluetooth mode with Antenna Aux**

Date: 2023.12.09

Communication System Band: BT; Frequency: 2480 MHz; Duty Cycle: 1:1.293

Medium parameters used (interpolated):  $f = 2480$  MHz;  $\sigma = 1.845$  S/m;  $\epsilon_r = 39.483$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch78/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.367 W/kg


**Ch78/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.506 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.638 W/kg

**SAR(1 g) = 0.293 W/kg; SAR(10 g) = 0.120 W/kg**

Maximum value of SAR (measured) = 0.352 W/kg

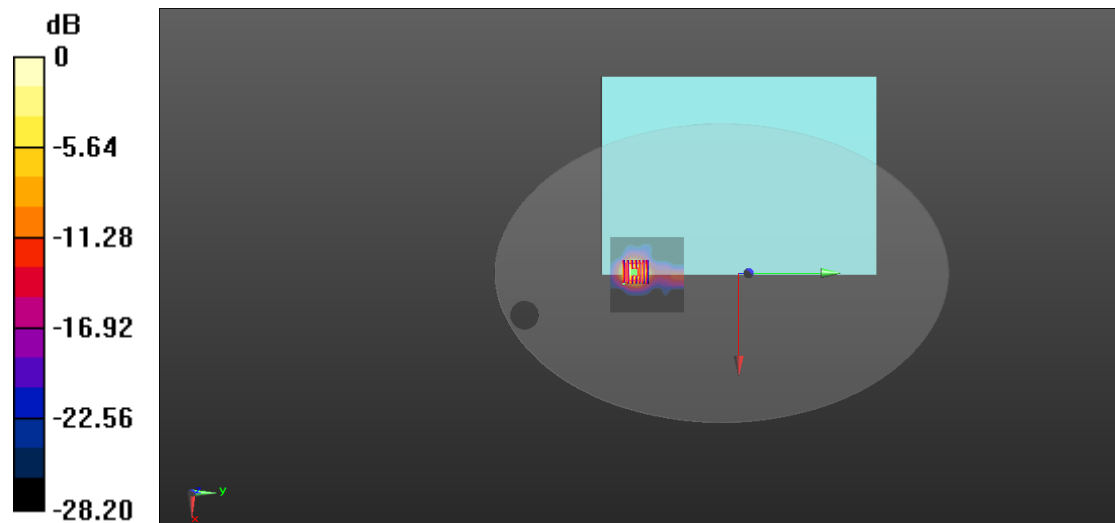

0 dB = 0.352 W/kg

**Meas.3 Body Plane with Back Side 0mm on 11 Channel in IEEE802.11b mode with Antenna Aux**

Date: 2023.12.09

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.821$  S/m;  $\epsilon_r = 39.623$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch11/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.788 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.467 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.256 W/kg**

Maximum value of SAR (measured) = 0.739 W/kg

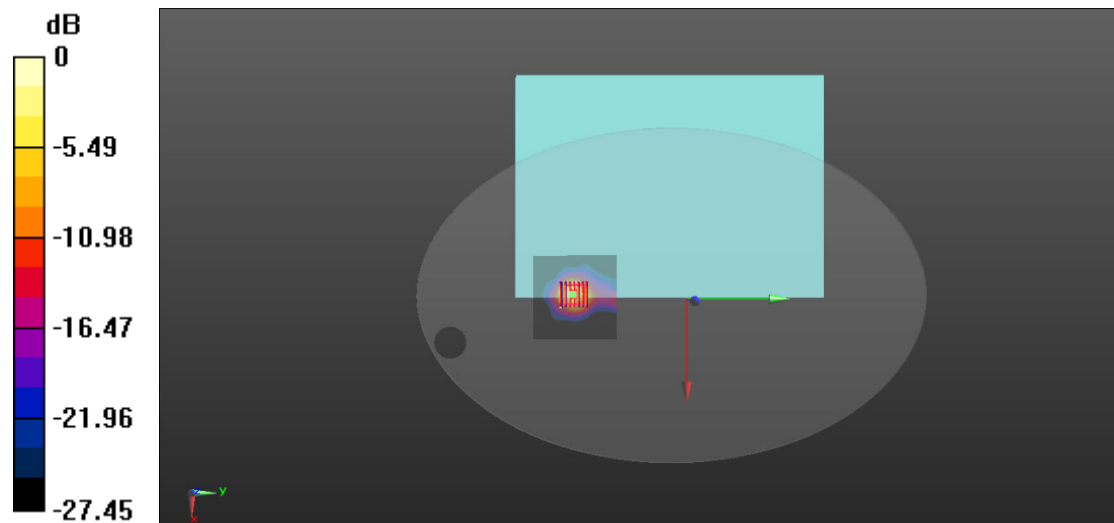

0 dB = 0.739 W/kg

**Meas.4 Body Plane with Back Side 0mm on 6 Channel in IEEE802.11b mode with Antenna Main**

Date: 2023.12.09

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.786$  S/m;  $\epsilon_r = 39.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.635 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.380 V/m; Power Drift = 1.26 dB

Peak SAR (extrapolated) = 1.08 W/kg

**SAR(1 g) = 0.489 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 0.562 W/kg

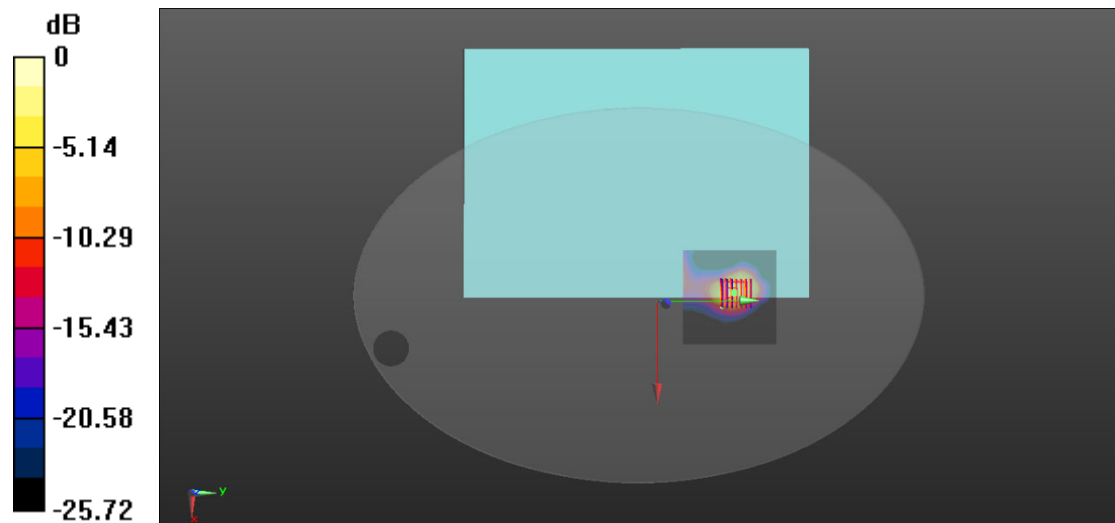

0 dB = 0.562 W/kg

**Meas.5 Limbs Plane with Palm rest Side 0mm on 11 Channel in IEEE802.11b mode with Antenna Aux**

Date: 2023.12.09

Communication System Band: 2.4G; Frequency: 2462 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated):  $f = 2462$  MHz;  $\sigma = 1.798$  S/m;  $\epsilon_r = 39.35$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.94 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.015 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 3.43 W/kg

**SAR(1 g) = 1.59 W/kg; SAR(10 g) = 0.654 W/kg**

Maximum value of SAR (measured) = 1.87 W/kg

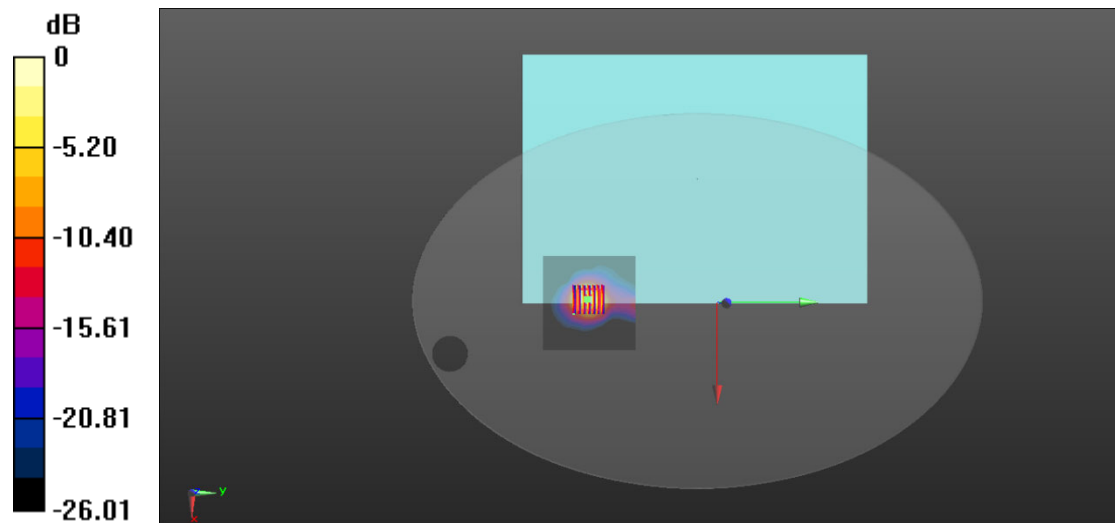

0 dB = 1.87 W/kg

**Meas.6 Limbs Plane with Palm rest Side 0mm on 6 Channel in IEEE802.11b mode with Antenna Main**

Date: 2023.12.09

Communication System Band: 2.4G; Frequency: 2437 MHz; Duty Cycle: 1:1.004

Medium parameters used (interpolated):  $f = 2437$  MHz;  $\sigma = 1.786$  S/m;  $\epsilon_r = 39.764$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(7.78, 7.78, 7.78); Calibrated: 2023.01.19;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch6/Area Scan (81x81x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.53 W/kg


**Ch6/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.256 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.65 W/kg

**SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.523 W/kg**

Maximum value of SAR (measured) = 1.36 W/kg

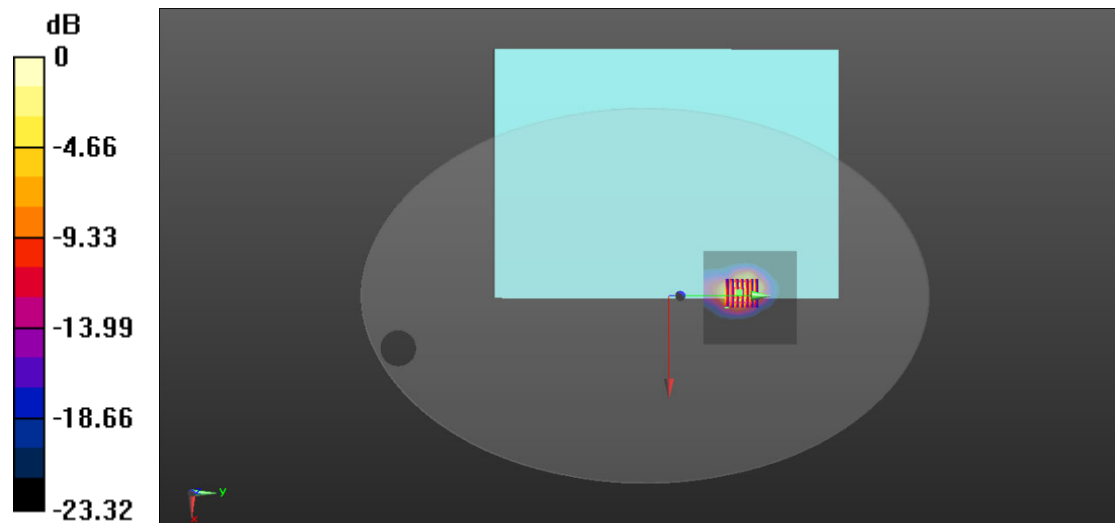

0 dB = 1.36 W/kg

**Meas.7 Body Plane with Back Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.10

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5290$  MHz;  $\sigma = 4.787$  S/m;  $\epsilon_r = 35.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.67, 5.67, 5.67); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch58/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.35 W/kg

**SAR(1 g) = 0.647 W/kg; SAR(10 g) = 0.221 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

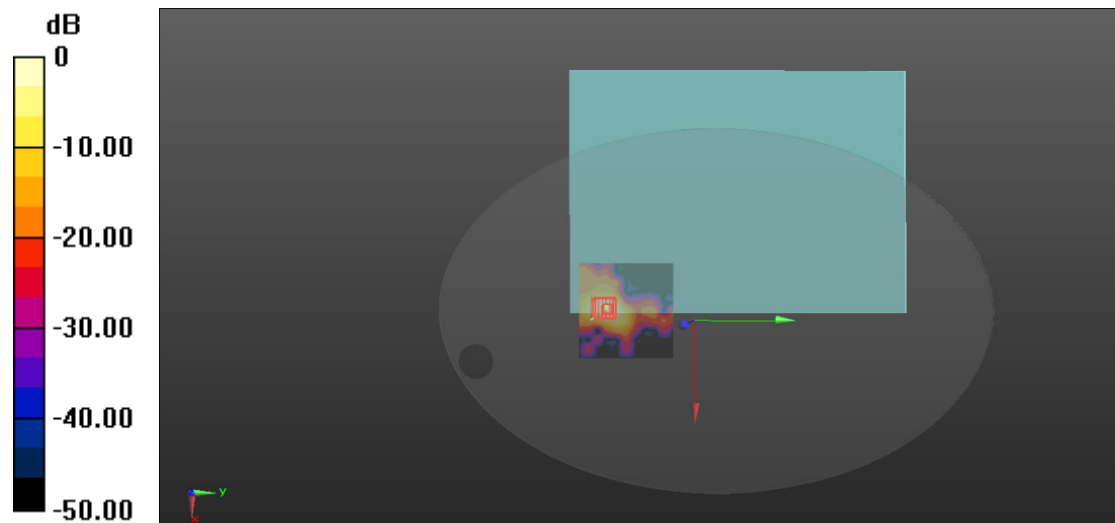

0 dB = 1.22 W/kg

**Meas.8 Body Plane with Back Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.10

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5290$  MHz;  $\sigma = 4.787$  S/m;  $\epsilon_r = 35.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.67, 5.67, 5.67); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch58/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.43 W/kg


**Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.1480 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.46 W/kg

**SAR(1 g) = 0.636 W/kg; SAR(10 g) = 0.191 W/kg**

Maximum value of SAR (measured) = 1.28 W/kg

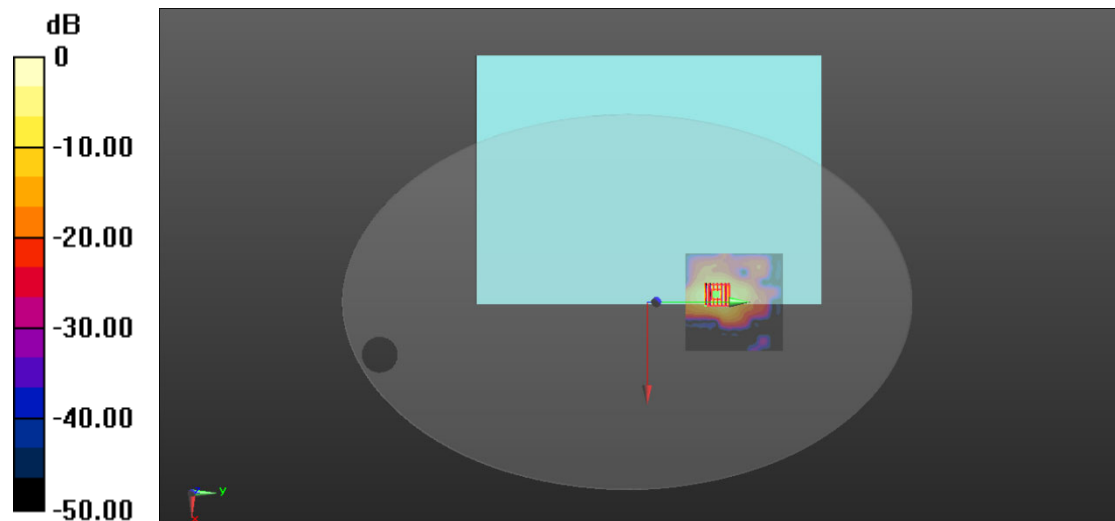

0 dB = 1.28 W/kg



**Meas.9 Limbs Plane with Palm rest Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.10

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5290$  MHz;  $\sigma = 4.787$  S/m;  $\epsilon_r = 35.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.67, 5.67, 5.67); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch58/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.46 W/kg


**Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4400 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 6.26 W/kg

**SAR(1 g) = 1.71 W/kg; SAR(10 g) = 0.587 W/kg**

Maximum value of SAR (measured) = 3.20 W/kg

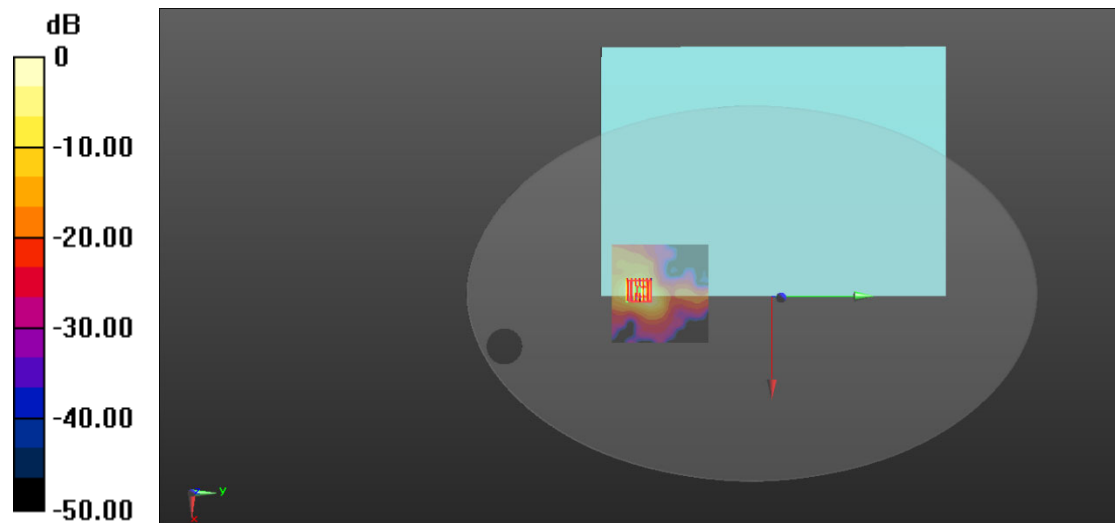

0 dB = 3.20 W/kg

**Meas.10 Limbs Plane with Palm rest Side 0mm on 58 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.10

Communication System Band: 5.3G; Frequency: 5290 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5290$  MHz;  $\sigma = 4.787$  S/m;  $\epsilon_r = 35.451$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(5.67, 5.67, 5.67); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch58/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.27 W/kg


**Ch58/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9570 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 9.16 W/kg

**SAR(1 g) = 2.41 W/kg; SAR(10 g) = 0.729 W/kg**

Maximum value of SAR (measured) = 4.78 W/kg

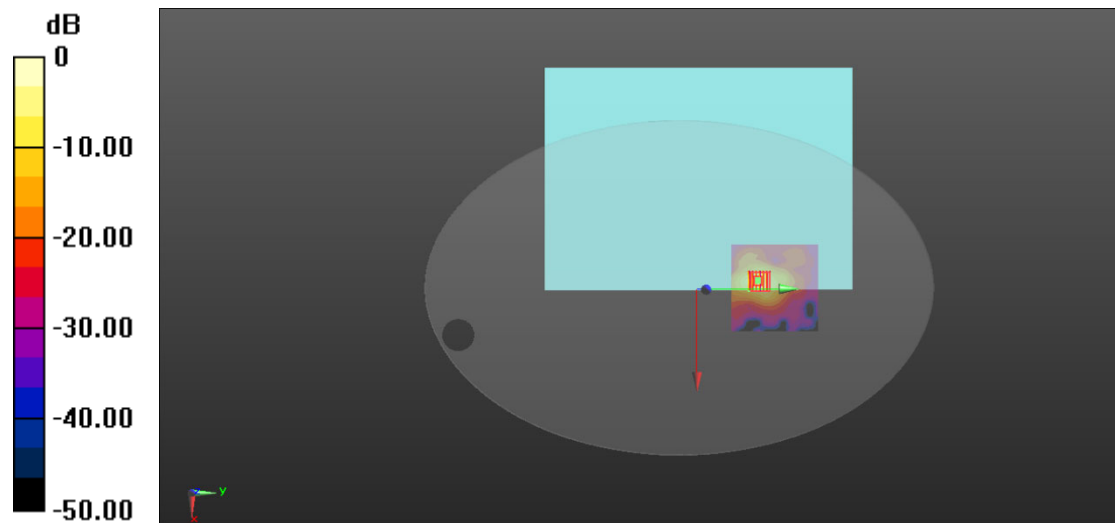

0 dB = 4.78 W/kg

**Meas.11 Body Plane with Back Side 0mm on 122 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.11

Communication System Band: 5.6G; Frequency: 5610 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5610$  MHz;  $\sigma = 5.068$  S/m;  $\epsilon_r = 35.231$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.88, 4.88, 4.88); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch122/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.25 W/kg


**Ch122/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.3460 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.47 W/kg

**SAR(1 g) = 0.609 W/kg; SAR(10 g) = 0.202 W/kg**

Maximum value of SAR (measured) = 1.20 W/kg

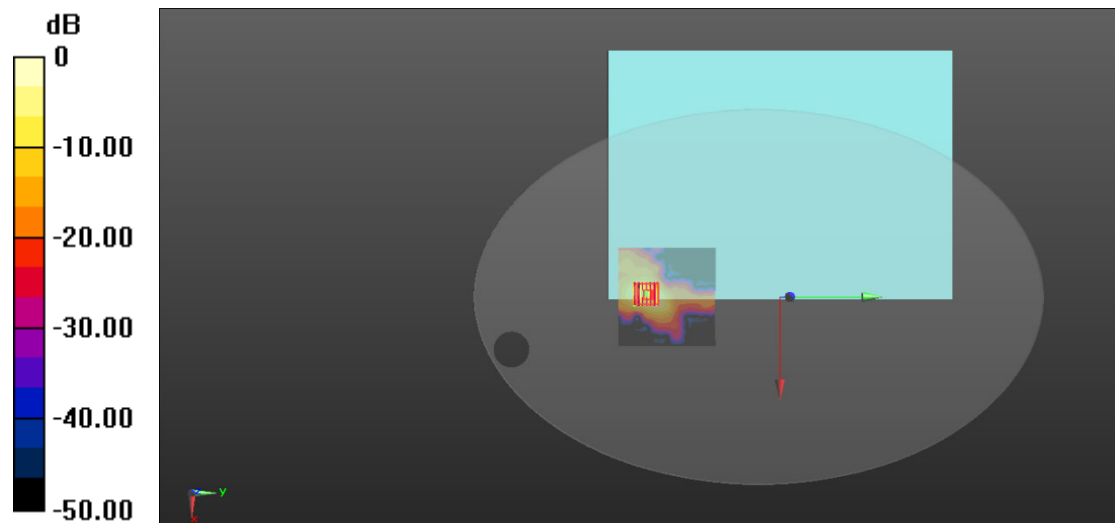

0 dB = 1.20 W/kg

**Meas.12 Body Plane with Back Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.11

Communication System Band: 5.6G; Frequency: 5690 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.188$  S/m;  $\epsilon_r = 34.967$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.88, 4.88, 4.88); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch138/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.78 W/kg


**Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.6560 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.19 W/kg

**SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 1.47 W/kg

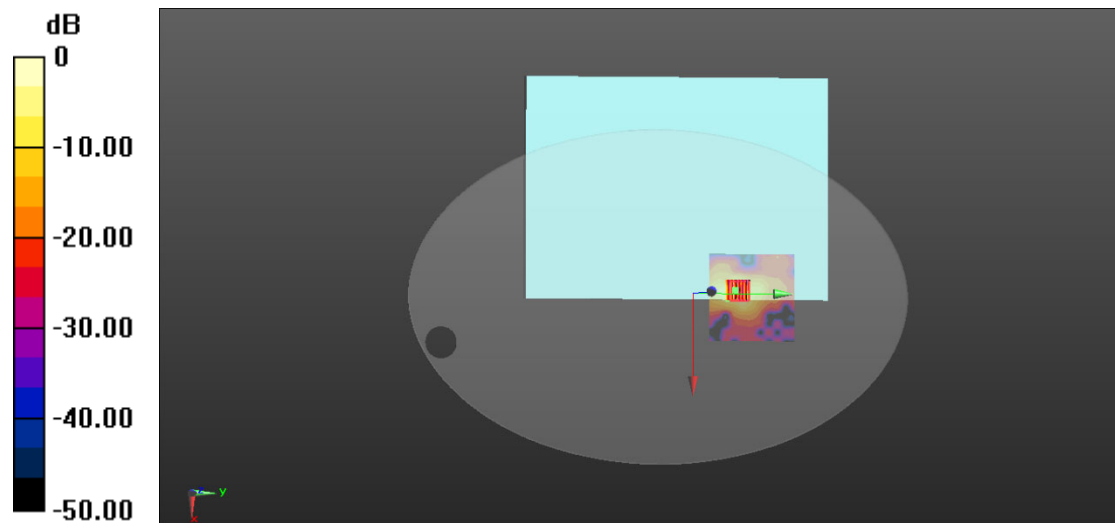

0 dB = 1.47 W/kg

**Meas.13 Limbs Plane with Palm rest Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.11

Communication System Band: 5.6G; Frequency: 5690 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.188$  S/m;  $\epsilon_r = 34.967$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.88, 4.88, 4.88); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch138/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.18 W/kg


**Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.4510 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 8.37 W/kg

**SAR(1 g) = 2.03 W/kg; SAR(10 g) = 0.675 W/kg**

Maximum value of SAR (measured) = 3.97 W/kg

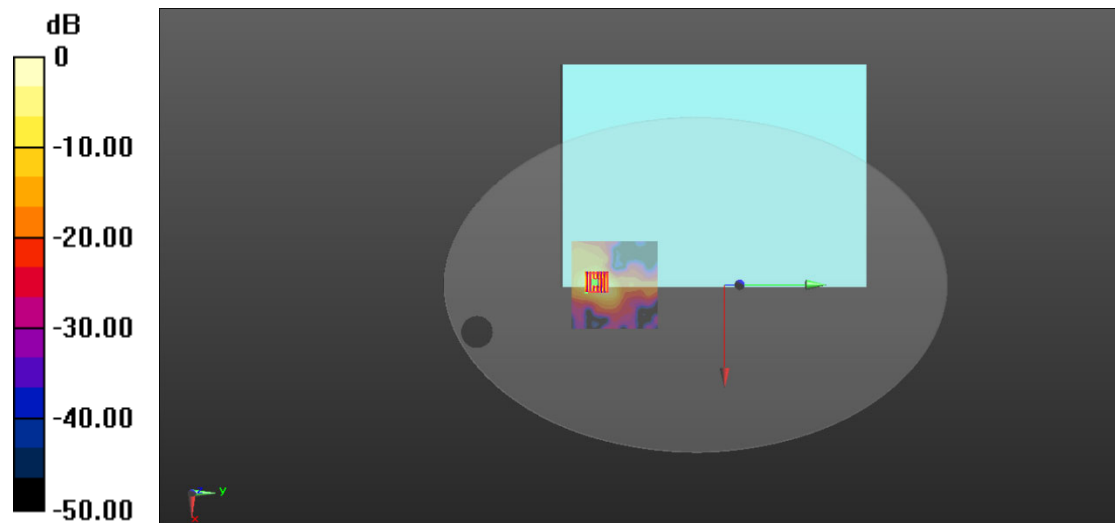

0 dB = 3.97 W/kg

**Meas.14 Limbs Plane with Palm rest Side 0mm on 138 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.11

Communication System Band: 5.6G; Frequency: 5690 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5690$  MHz;  $\sigma = 5.188$  S/m;  $\epsilon_r = 34.967$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.3°C Liquid Temperature: 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.88, 4.88, 4.88); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch138/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.35 W/kg


**Ch138/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9350 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 9.72 W/kg

**SAR(1 g) = 2.33 W/kg; SAR(10 g) = 0.726 W/kg**

Maximum value of SAR (measured) = 4.46 W/kg

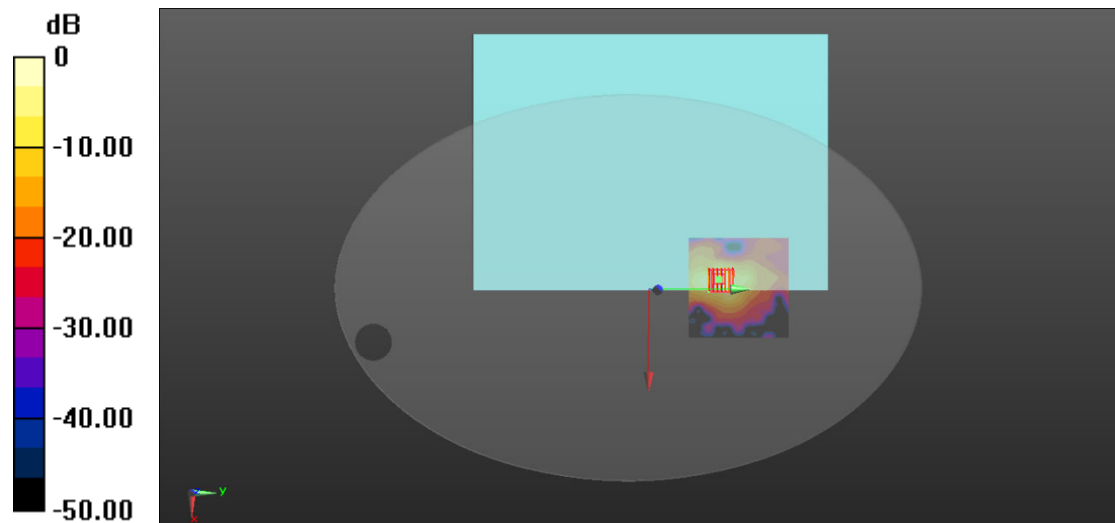

0 dB = 4.46 W/kg

**Meas.15 Body Plane with Back Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.12

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.366$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.83, 4.83, 4.83); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.38 W/kg

**SAR(1 g) = 0.808 W/kg; SAR(10 g) = 0.271 W/kg**

Maximum value of SAR (measured) = 1.57 W/kg

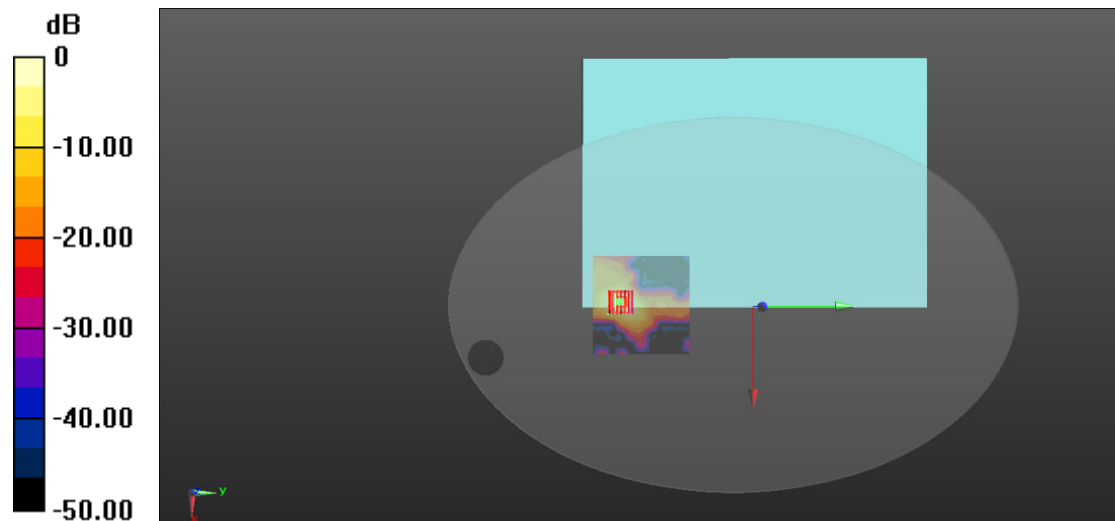

0 dB = 1.57 W/kg

**Meas.16 Body Plane with Back Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.12

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.366$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.83, 4.83, 4.83); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.60 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.7920 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.86 W/kg

**SAR(1 g) = 0.675 W/kg; SAR(10 g) = 0.215 W/kg**

Maximum value of SAR (measured) = 1.32 W/kg

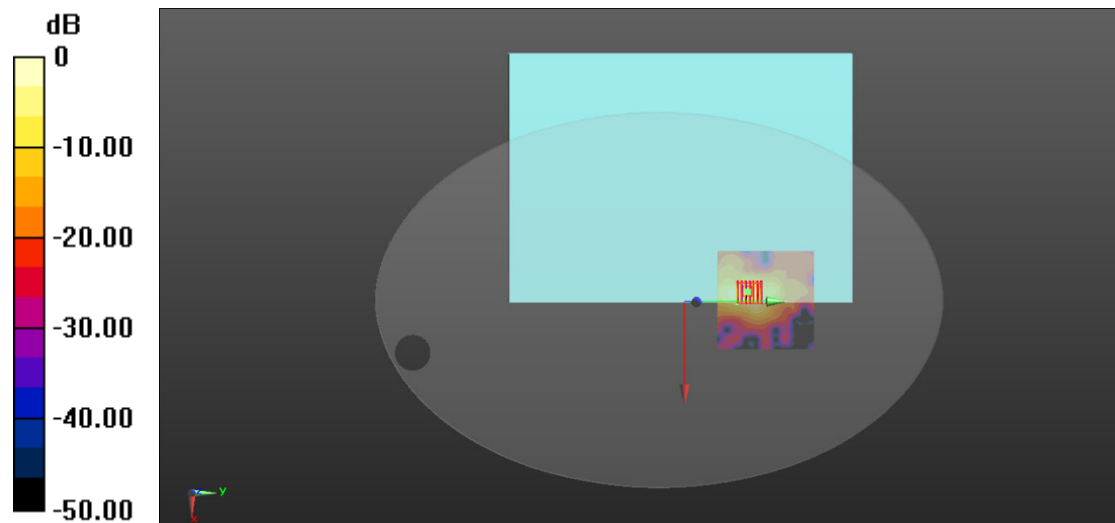

0 dB = 1.32 W/kg



**Meas.17 Limbs Plane with Palm rest Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Aux**

Date: 2023.12.12

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.366$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.83, 4.83, 4.83); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.53 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.162 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 9.05 W/kg

**SAR(1 g) = 2.18 W/kg; SAR(10 g) = 0.733 W/kg**

Maximum value of SAR (measured) = 4.10 W/kg

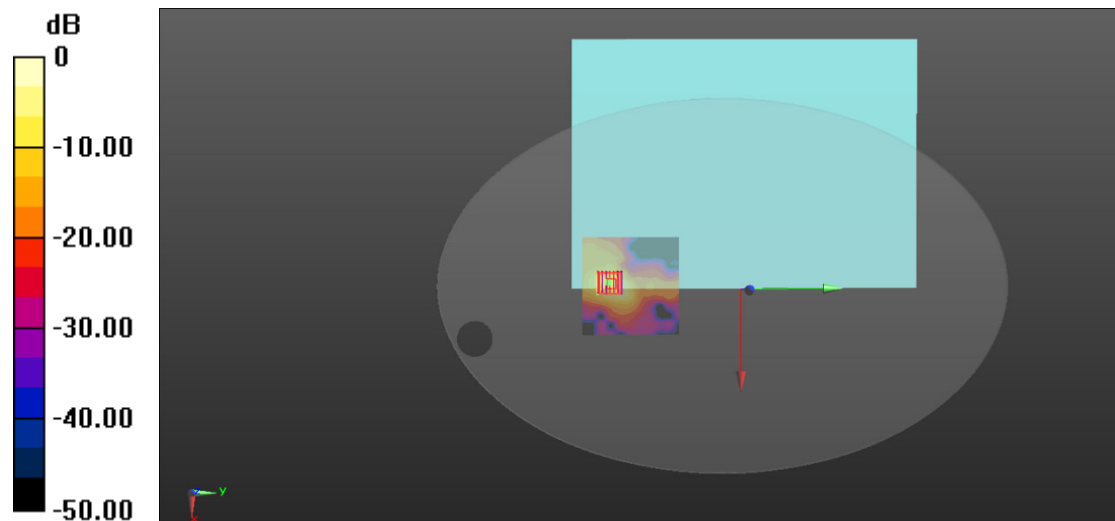

0 dB = 4.10 W/kg

**Meas.18 Limbs Plane with Palm rest Side 0mm on 155 Channel in IEEE802.11ac80 mode with Antenna Main**

Date: 2023.12.12

Communication System Band: 5.8G; Frequency: 5775 MHz; Duty Cycle: 1:1.094

Medium parameters used (interpolated):  $f = 5775$  MHz;  $\sigma = 5.223$  S/m;  $\epsilon_r = 35.366$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Ambient Temperature: 22.7°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN7510; ConvF(4.83, 4.83, 4.83); Calibrated: 2023.01.19;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2023.01.30
- Phantom: ELI v4.0 (30deg probe tilt); Type: QDOVA001BB; Serial: TP:1012
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

**Ch155/Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 4.68 W/kg


**Ch155/Zoom Scan (7x7x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.8780 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 8.50 W/kg

**SAR(1 g) = 1.99 W/kg; SAR(10 g) = 0.638 W/kg**

Maximum value of SAR (measured) = 3.86 W/kg

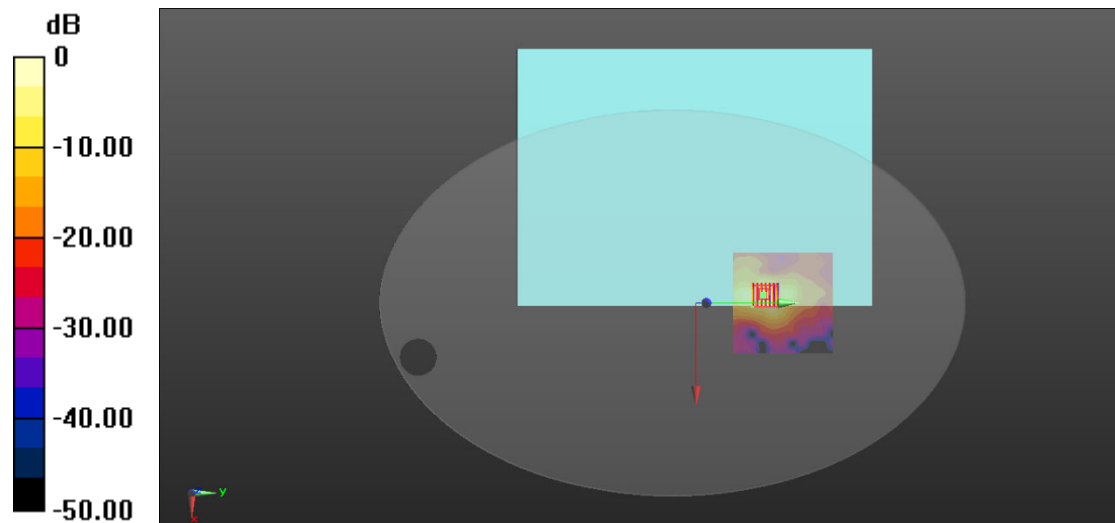

0 dB = 3.86 W/kg

## **ANNEX D EUT EXTERNAL PHOTOS**

Please refer the document “BL-SZ23B0215-AW.pdf”.

## **ANNEX E SAR TEST SETUP PHOTOS**

Please refer the document “BL-SZ23B0215-AS-1.pdf”.

## **ANNEX F CALIBRATION REPORT**

Please refer the document “BL-SZ23B0215-AC-1.pdf”.

## **ANNEX G TUNE-UP PROCEDURE**

Please refer the document “BL-SZ23B0215-AT-5.pdf”.

## Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--