



FCC
Test Report
for
IEEE 802.15.4 Wireless microcontroller module
JN5139-T01-C10

Report Number 02-324/3877/1/09

Report Produced by: -

R.N. Electronics Ltd.

1 Arnolds Court
Arnolds Farm Lane
Mountnessing
ESSEX
CM13 1UT

www.RNelectronics.com

Telephone 01277 352219

Facsimile 01277 352968

1. Contents

1.	CONTENTS	2
2.	SUMMARY OF TEST RESULTS.....	3
3.	INFORMATION ABOUT EQUIPMENT UNDER TEST.....	4
3.1	Equipment Specification.....	4
3.2	EMISSIONS CONFIGURATION	6
4.	SPECIFICATIONS.....	7
4.1	Deviations.....	7
5.	TESTS, METHODS AND RESULTS.....	8
5.1	Conducted Emissions	8
5.2	Radiated Emissions	9
5.3	Intentional Radiator Field Strength	10
5.4	Maximum Spectral Power Density	11
5.5	6dB Bandwidth.....	12
6.	PLOTS AND RESULTS.....	13
6.1	Conducted Emissions	13
6.2	Radiated Emissions	13
6.3	6dB Bandwidth.....	50
7.	Explanatory Notes	52
7.1	Explanation of FAIL LIMIT 1 Statement.....	52
7.2	Explanation of limit line calculations for radiated measurements.....	52
8.	PHOTOGRAPHS.....	53
8.2	EUT	55
8.3	EUT in Test Board.....	56
9.	SIGNAL LEADS.....	57
10.	TEST EQUIPMENT CALIBRATION LIST.....	58
11.	AUXILIARY EQUIPMENT	59
11.1	Auxiliary equipment supplied by Jennic Ltd.....	59
11.2	Auxiliary equipment supplied by RN Electronics Limited.....	59
12.	MODIFICATIONS	60
13.	Compliance information	61

2. Summary of Test Results

The IEEE 802.15.4 Wireless microcontroller module JN5139-T01-C10 was tested to the following standards: -

FCC Part 15C (effective date October 1, 2008); Class DTS Intentional Radiator

Any compliance statements are made reliant on the modes of operation as instructed to us by the Manufacturer based on their specific knowledge of the application and functionality of the equipment tested. Whilst every effort is made to assure quality of testing, type tests are not exhaustive and although no non-conformances may be found, this doesn't exclude the possibility of equipment not meeting the intentions of the standard, particularly under different conditions to those during testing.

Title	Reference	Results
1. Conducted Emissions	FCC Part 15C §15.207	NOT APPLICABLE ¹
2. Radiated Emissions	FCC Part 15C §15.205, §15.209 & §15.247(d)	PASSED
3. Modulation Bandwidth	FCC Part 15C §15.215(c), §15.247(a)(2)	PASSED
4. Intentional Radiator Field Strength	FCC Part 15C §15.247(b)	PASSED
5. Power Spectral Density	FCC Part 15C §15.247(e)	PASSED

This report relates to the equipment tested as identified by a unique serial number and at the time it was tested. It does not relate to any other similar equipment and performance of the product before or after the test cannot be guaranteed.

Date of Test: 4th & 5th February 2009

Test Engineer:

Approved By:

Customer Representative:

¹ The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines".

3. Information about Equipment Under Test
3.1 Equipment Specification

Applicant Jennic Ltd
Furnival Street
Sheffield
S1 4QT
UK

Manufacturer/Brand Name Jennic Ltd

Full name of EUT IEEE 802.15.4 Wireless microcontroller module

Model Number of EUT JN5139-T01-C10

Serial Number of EUT #09

FCC ID (if applicable):

Date when equipment was received by RN Electronics Limited 3rd February 2009

Date of test: 4th & 5th February 2009

Customer order number: PO 005126/CF

A visual description of the EUT is as follows: A canned IC on small PCB with a dedicated integral antenna. For purposes of test mounted on a motherboard with battery/ DC voltage input & RS232 communications fly lead (For programming).

The main function of the EUT is: 2.4GHz (IEEE 802.15.4) wireless microcontroller module

Antenna: Integral

Equipment Under Test Information specification:

Height	6.9mm
Width	20mm
Depth	30.8mm
Weight	0.01kg
Voltage	3V DC (Battery)
Current required from above voltage source	0.05A
Highest Frequencies used / generated	2.405 - 2.480 GHz

Purpose of Test: To demonstrate compliance with FCC OET regulations for intentional radiators.


Modes of operation:

Mode	Description of mode	Used for Testing
Continuous TX 2.405GHz	Unit continuously transmitting on bottom channel	YES
Continuous TX 2.440GHz	Unit continuously transmitting on Middle channel	YES
Continuous TX 2.480GHz	Unit continuously transmitting on Top channel	YES
Continuous RX 2.405GHz	Unit continuously receiving on bottom channel	YES
Continuous RX 2.440GHz	Unit continuously receiving on Middle channel	YES
Continuous RX 2.480GHz	Unit continuously receiving on Top channel	YES

Any modifications made to the **EUT**, whilst under test, can be found in Section 12.

This report was printed on: 27 February 2009

3.2 Emissions configuration

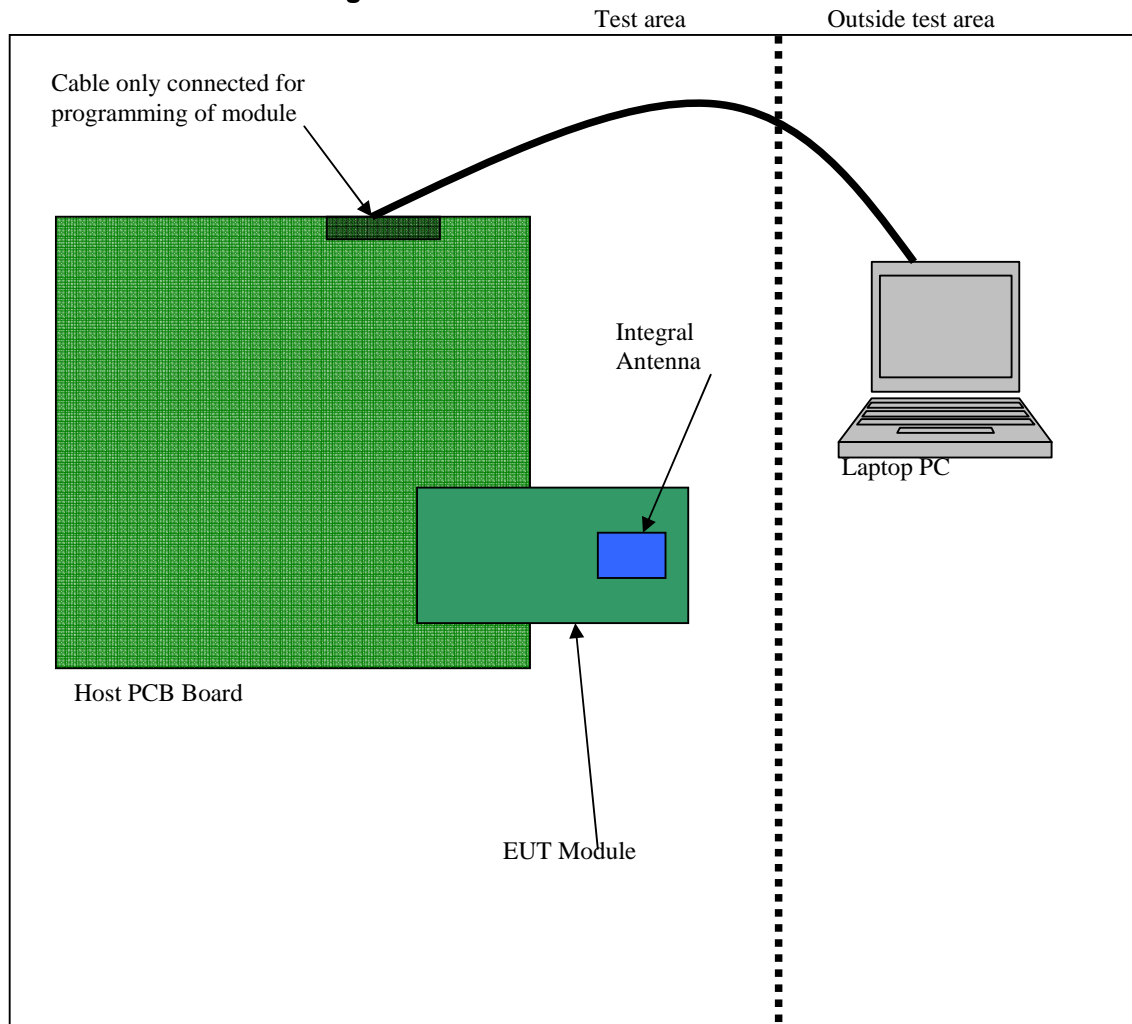

The equipment under test was supplied by 3V DC from two new Batteries situated on the provided host PCB board. The battery levels were monitored throughout tests to ensure the levels did not drop below the +/- 10% required. The unit had an integral antenna. To change channels and select the correct modes for test a programming lead was connected and the unit programmed. The programming lead was removed for tests. Application programming software was provided by Jennic Ltd. A laptop provided by RN Electronics was used to program the modules.

For radiated emissions the support equipment was situated outside the chamber.

Top, Middle & Bottom channels were checked/ tested in both Transmit and receive modes using the 16MHz clock option. All power levels were left at maximum (default setting).

Description of ancillary equipment connected to the equipment under test, for the purpose of tests, can be found in Section 11.

4. Specifications

The tests were performed by RN Electronics Engineer Daniel Sims who set up the tests, the test equipment, and operated it in accordance with the **R.N. Electronics Ltd** procedures manual, FCC Part 15 and those specifications incorporated by reference into 47CFR15 (e.g. ANSI C63.4-2003).

R.N. Electronics Ltd sites M and OATS are listed with the FCC. Registration Number 293246

4.1 Deviations

None.

5. Tests, Methods and Results
5.1 Conducted Emissions

NOT APPLICABLE.

The digital device tested is intended to be powered from 3V DC supply (battery) and intended for modular approval. Any third party device it is incorporated into with a connection to the AC power line will require demonstration of compliance with the limits. Refer to §15.207(c) "Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to AC power lines"

5.2 Radiated Emissions

5.2.1 Test Methods

Test Requirements FCC Part 15C, Reference (15.209)

Test Method: FCC Part 15C, Reference (15.209)

5.2.1.1 Configuration of EUT

The EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres. The EUT was rotated in all three orthogonal planes. Radiated Emissions testing was performed with a new battery.

5.2.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Below 30MHz, measurements were made in a semi-anechoic chamber (pre-scan) with final measurements on an OATS without a ground plane. The antenna was placed 1m above the ground. The equipment and the antenna were rotated 360° to record the worst case emissions.

30MHz - 1GHz, measurements were made on a site listed with the FCC. The equipment was rotated 360° and the antenna scanned 1 – 4 metres in both horizontal and vertical polarisations to record the worst case emissions.

Above 1GHz, measurements were made in a semi-anechoic chamber with appropriate absorbing material for use in this range. The antenna was placed 1m above the ground in line with the EUT, which was rotated through 360° to record the worst case emissions.

At least 6 signals within 20dB and all signals within 10dB of the limit were investigated.

5.2.2 Test results

Tests were performed using Test Site M.

Test Environment: M or OATS

Temperature: 15-21°C Humidity: 33-37%

Analyser plots for the Quasi-Peak / Average values as applicable and any table of signals within 20dB of the limit line can be found in Section 6.2 of this report.

These show that the EUT has **PASSED** this test.

5.2.2.1 Test Equipment used

E001, TMS81, TMS933, E003, E268, TMS79, TMS82

See Section 10 for more details

5.3 Intentional Radiator Field Strength

5.3.1 Test Methods

Test Requirements FCC Part 15C, Reference (15.247(b))

Test Method: FCC Part 15C, Reference (15.247)

5.3.1.1 Configuration of EUT

The EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres. The antenna was used in both Horizontal and Vertical polarisations. The EUT was rotated in all three orthogonal planes.

5.3.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Measurements were made in a semi-anechoic chamber.

Both the equipment and the antenna were rotated 360° to record the maximised emission.

5.3.2 Test results

Tests were performed using Test Site M.

Test Environment:

Temperature: 20°C Humidity: 37%

The maximised field strength measured was:-

Frequency (MHz)	Power (100kHz RBW) (dBuV/m @ 3 metres)	Power (1MHz RBW) (dBuV/m @ 3 metres)
2405	91.2	94.5
2440	91.0	94.7
2480	89.8	93.5

These results show that the EUT has **PASSED** this test.

5.3.2.1 Test Equipment used

E003, E268, TMS79, TMS82

See Section 10 for more details

5.4 Maximum Spectral Power Density

5.4.1 Test Methods

Test Requirements FCC Part 15C, Reference (15.247(e))

Test Method: FCC Part 15C, Reference (15.247)

5.4.1.1 Configuration of EUT

A test jig was provided with an SMA 50ohm coaxial connector which was checked for maximum conducted power at the antenna port. The unit under test was powered with new batteries.

5.4.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Measurements were made in a semi-anechoic chamber.

Test site 'M' has been listed with the FCC. The equipment was rotated 360° and the antenna scanned 1 – 4 metres to record the worst case emissions.

5.4.2 Test results

Tests were performed using Test Site A.

Temperature of test Environment: 22°C

The spectral power density from the alternative sample was as shown in the table below:

Frequency (MHz)	Peak Power (dBm/3kHz)
2405	-17.4
2440	-16.7
2480	-17.0

Limit: +8dBm/3kHz

These results show that the EUT has **PASSED** to this test.

5.4.2.1 Test Equipment used

C031, C032, E002, E005, E266, E003

See Section 10 for more details.

5.5 6dB Bandwidth

5.5.1 Test Methods

Test Requirements FCC Part 15C, Reference (15.247(a))

Test Method: FCC Part 15C, Reference (15.247)

5.5.1.1 Configuration of EUT

The EUT was placed on a 0.8 metres high turntable. The front edge of the EUT was initially positioned facing the antenna. The EUT was measured at a distance of 3 metres.

5.5.1.2 Test Procedure

Tests were made in accordance with FCC Part 15 using the measuring equipment noted below.

Measurements were made in a semi-anechoic chamber.

Test site 'M' has been listed with the FCC.

5.5.2 Test results

Tests were performed using Test Site M.

Temperature of test Environment: 20°C

Analyser plots for the 6dB bandwidth can be found in Section 6.6 of this report.

Frequency (MHz)	6dB Bandwidth (MHz)	Plot Reference
2405	1.5875	Bottom Channel 6dB
2440	1.5875	Middle Channel 6dB
2480	1.6000	Top Channel 6dB

These results show that the **EUT** has **PASSED** this test.

5.5.2.1 Test Equipment used

E268, TMS82, E003

See Section 10 for more details.

6. Plots and Results
6.1 Conducted Emissions

NONE - TEST NOT APPLICABLE


6.2 Radiated Emissions

Top, Middle & Bottom Channels were tested. However whilst all spurious signals have been reported for each channel, only middle channel plots are shown within this report.



11:45:03 JUL 25, 2003 12:28:17 SEP 11, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP

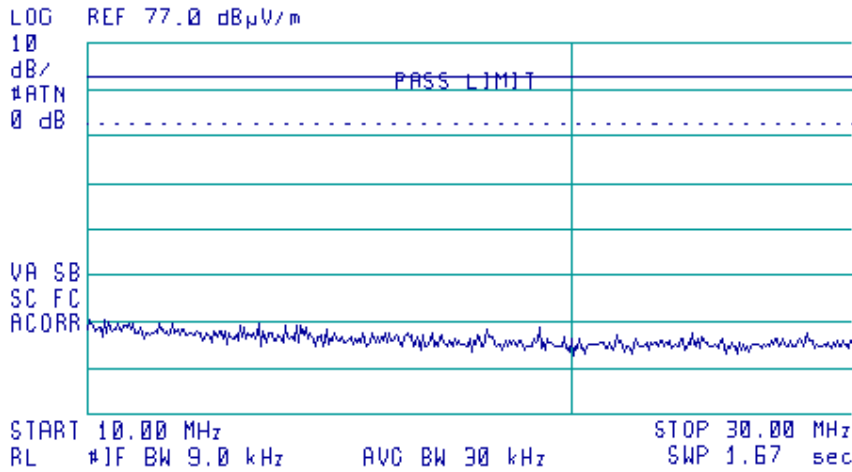


Quasi-Peak Values 10MHz to 30MHz Parallel.

The plot shows a swept response of peak values using the quasi-peak limit line



11:45:03 JUL 25, 2003 12:28:17 SEP 11, 2003

ACTV DET: PEAK
MEAS DET: PEAK QP

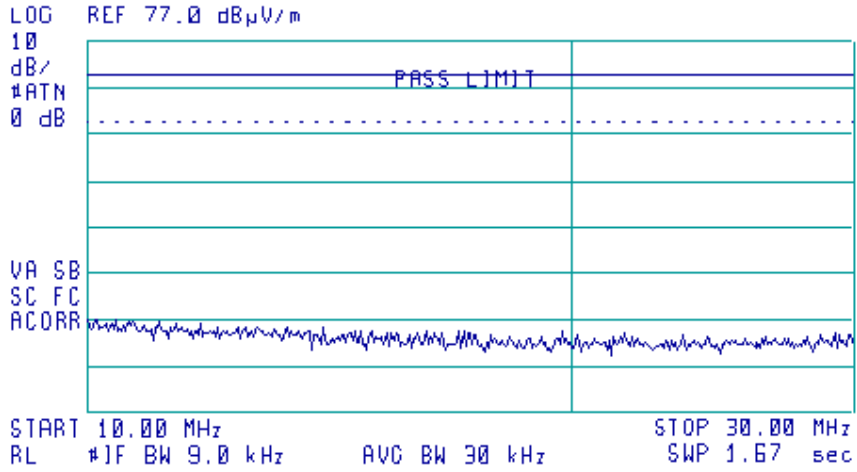


Quasi-Peak Values 10MHz to 30MHz Perpendicular.

The plot shows a swept response of peak values using the quasi-peak limit line



11:45:03 JUL 25, 2003 12:35:11 JAN 29, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP

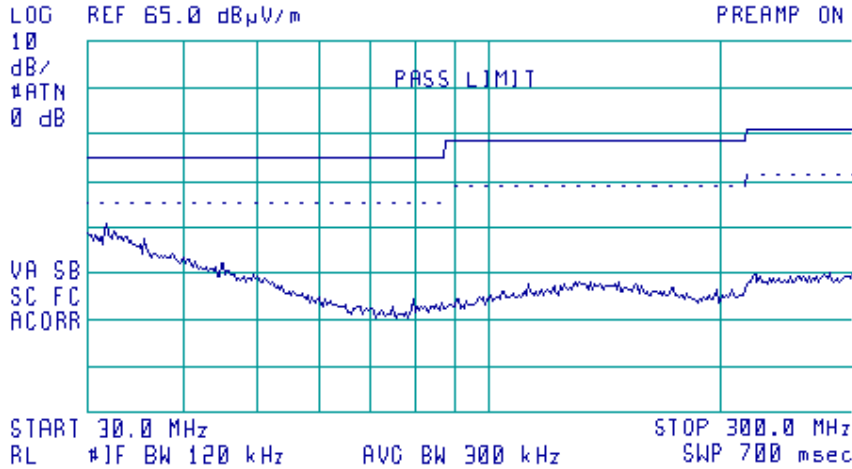

Quasi-Peak Values of 30 MHz. to 300 MHz. Horizontal Polarisation

The plot shows a swept response of peak values using the quasi-peak limit line

(Any peaks within 20dB of the limit line have been calculated and appear in the table on following page of this report)

Table of signals within 20dB of the limit line for Quasi-Peak Horizontal


None.

Measurement Uncertainty of ± 5.2 dB Applies



11:45:03 JUL 25, 2003 12:35:11 JAN 29, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP

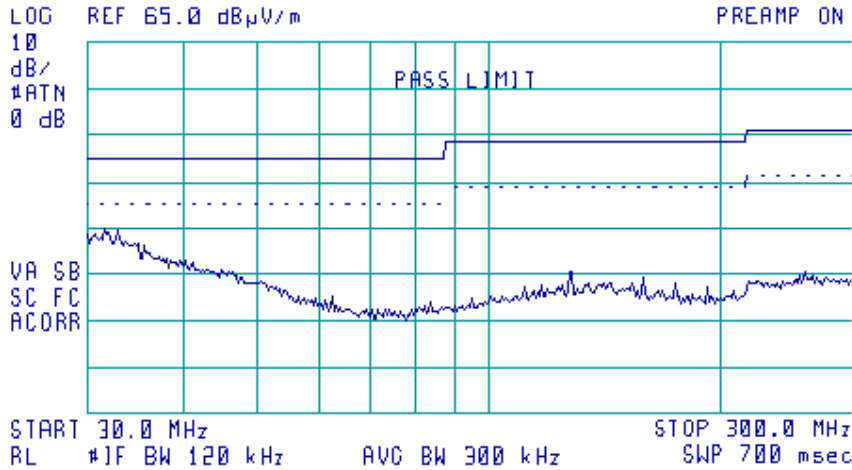

Quasi-Peak Values of 30 MHz. to 300 MHz. Vertical Polarisation

The plot shows a swept response of peak values using the quasi-peak limit line

(Any peaks within 20dB of the limit line have been calculated and appear in the table on following page of this report)

Table of signals within 20dB of the limit line for Quasi-peak Vertical


None.

Measurement Uncertainty of ± 5.2 dB Applies



11:45:03 JUL 25, 2003 12:35:11 JAN 29, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP

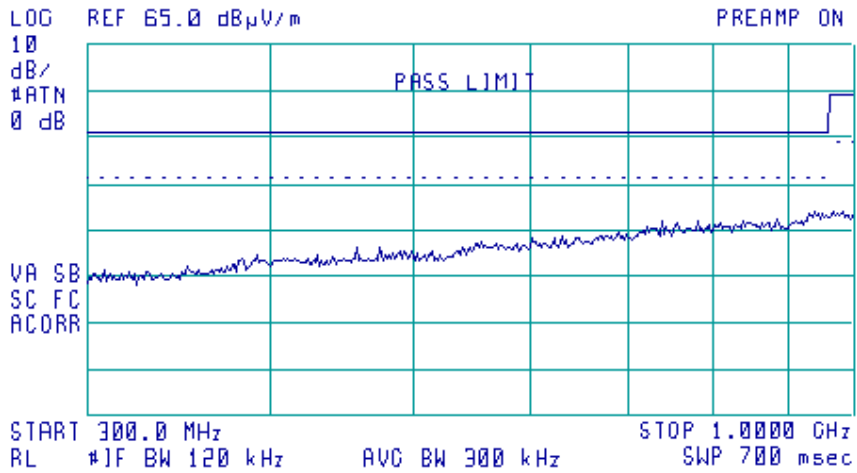

Quasi-Peak Values of 300 MHz. to 1 GHz. Horizontal Polarisation

The plot shows a swept response of peak values using the quasi-peak limit line

(Any peaks within 20dB of the limit line have been calculated and appear in the table on following page of this report)

Table of signals within 20dB of the limit line for Quasi-Peak Horizontal


None.

Measurement Uncertainty of ± 5.2 dB Applies



11:45:03 JUL 25, 2003 12:35:11 JAN 29, 2004

ACTV DET: PEAK
MEAS DET: PEAK QP

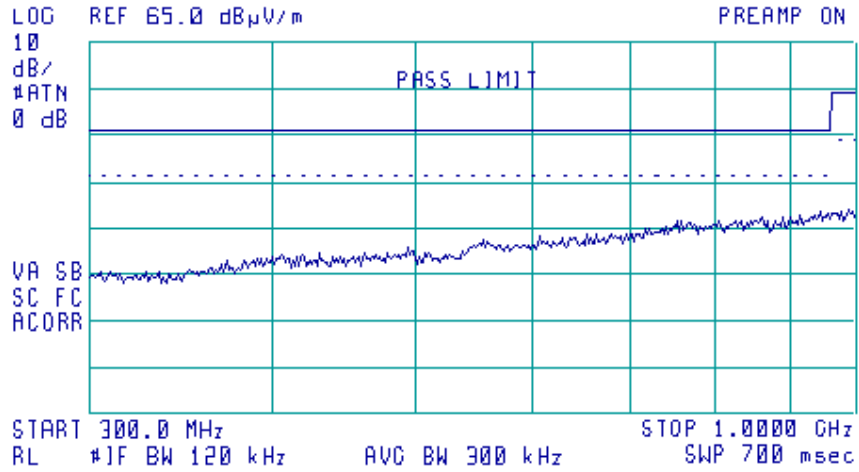

Quasi-Peak Values of 300 MHz. to 1 GHz. Vertical Polarisation


The plot shows a swept response of peak values using the quasi-peak limit line

(Any peaks within 20dB of the limit line have been calculated and appear in the table on following page of this report)


Table of signals within 20dB of the limit line for Quasi-peak Vertical

None.


Measurement Uncertainty of ± 5.2 dB Applies

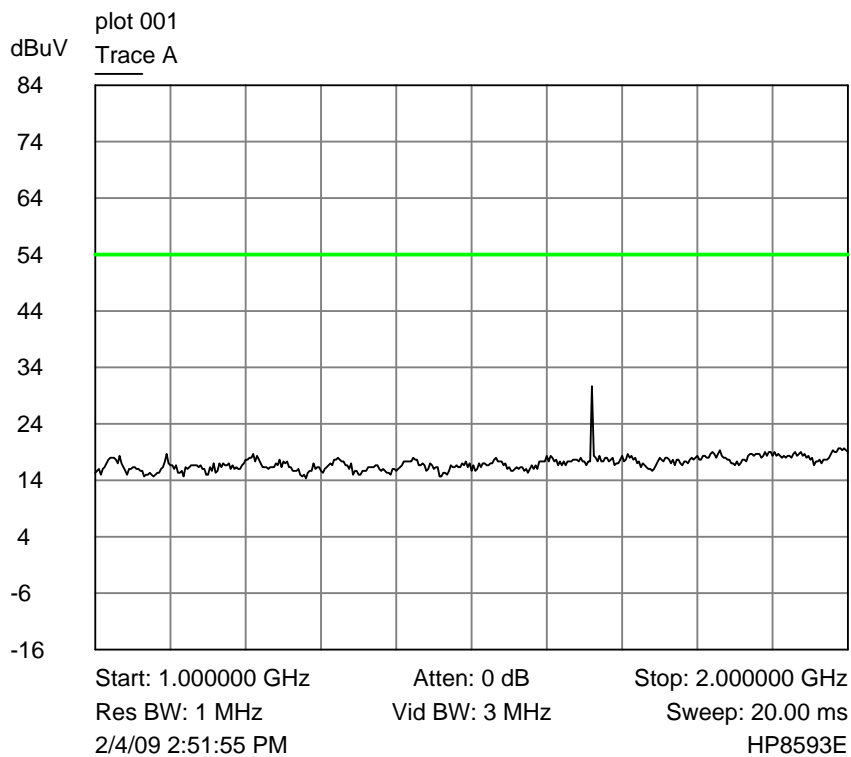


Average Values of 1 – 2 GHz. Vertical Polarisation

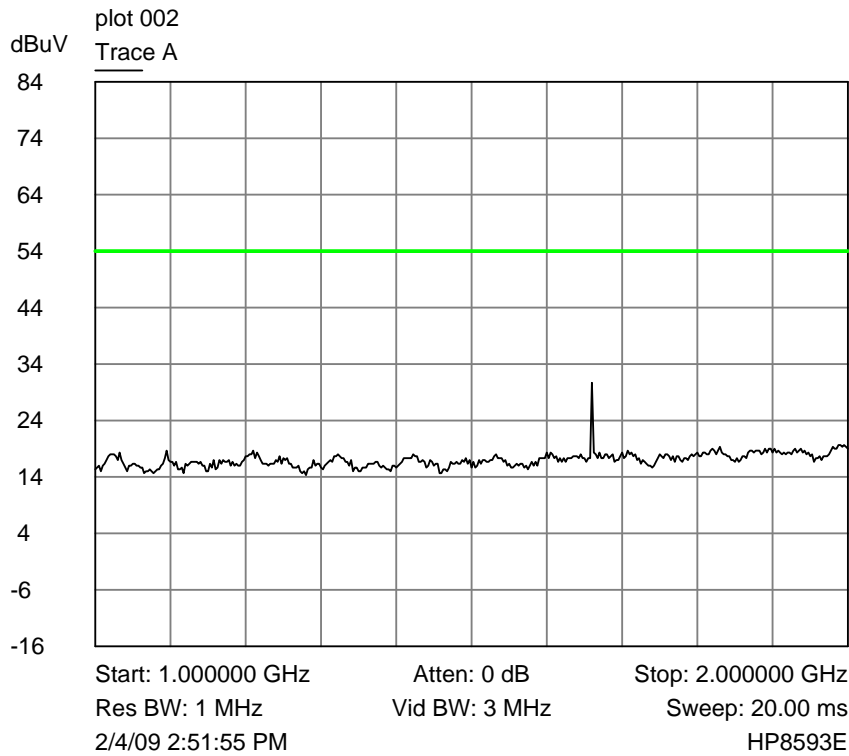


Average Values of 1 – 2 GHz. Horizontal Polarisation

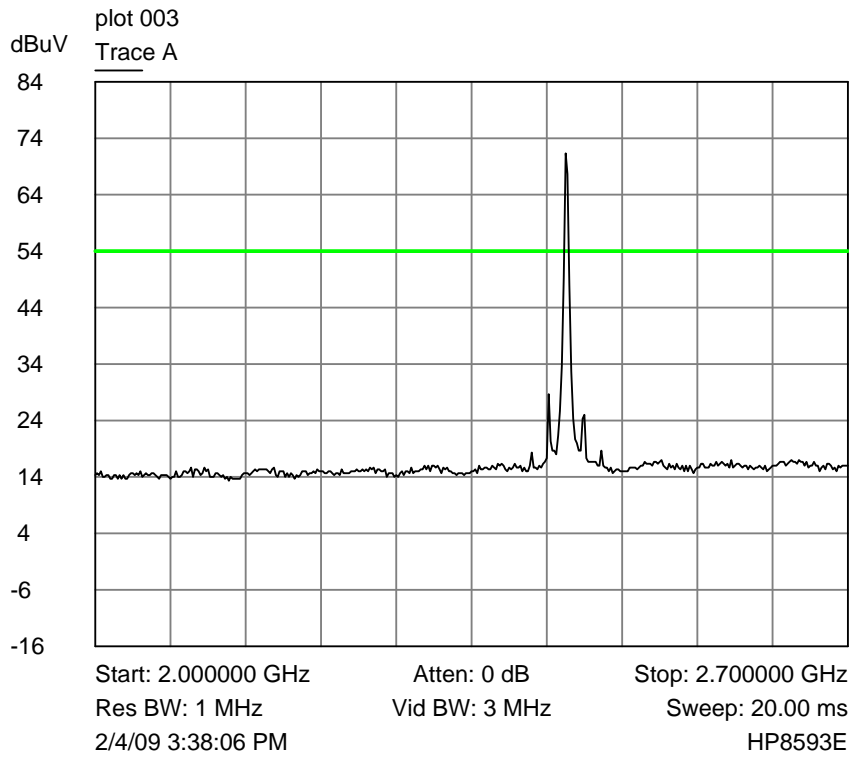


Average Values of 2 – 2.7 GHz.
Vertical Polarisation

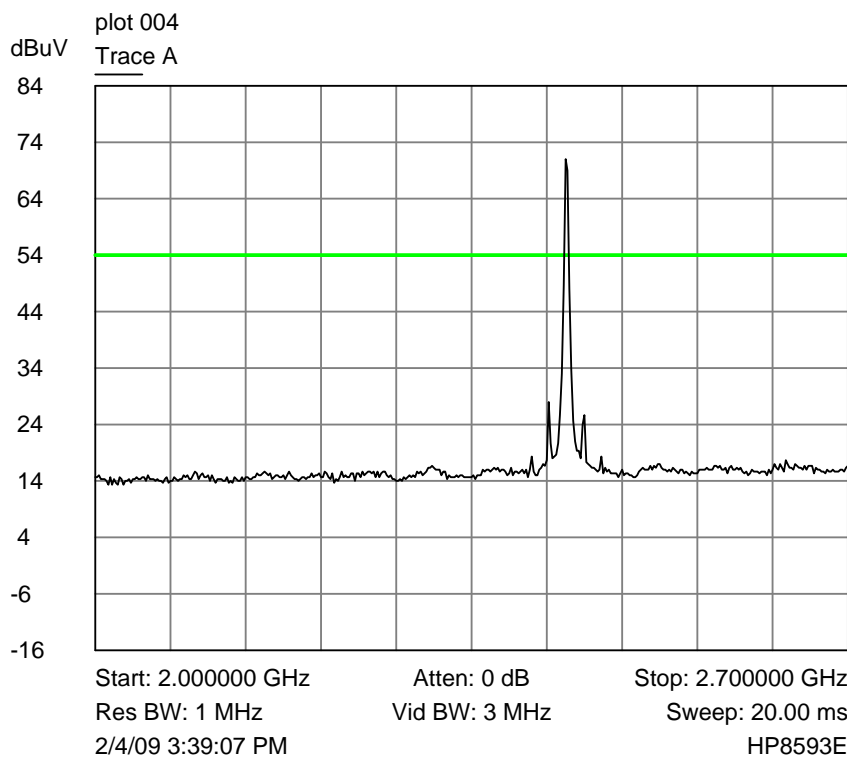


**Average Values of 2 – 2.7 GHz.
Horizontal Polarisation**

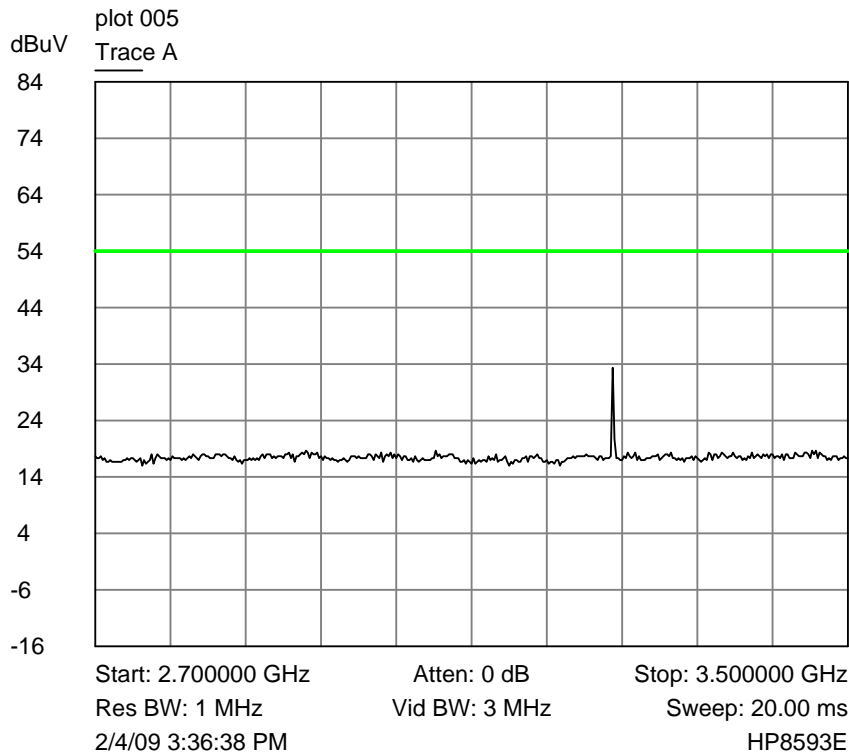


Average Values of 2.7 – 3.5 GHz. Vertical Polarisation

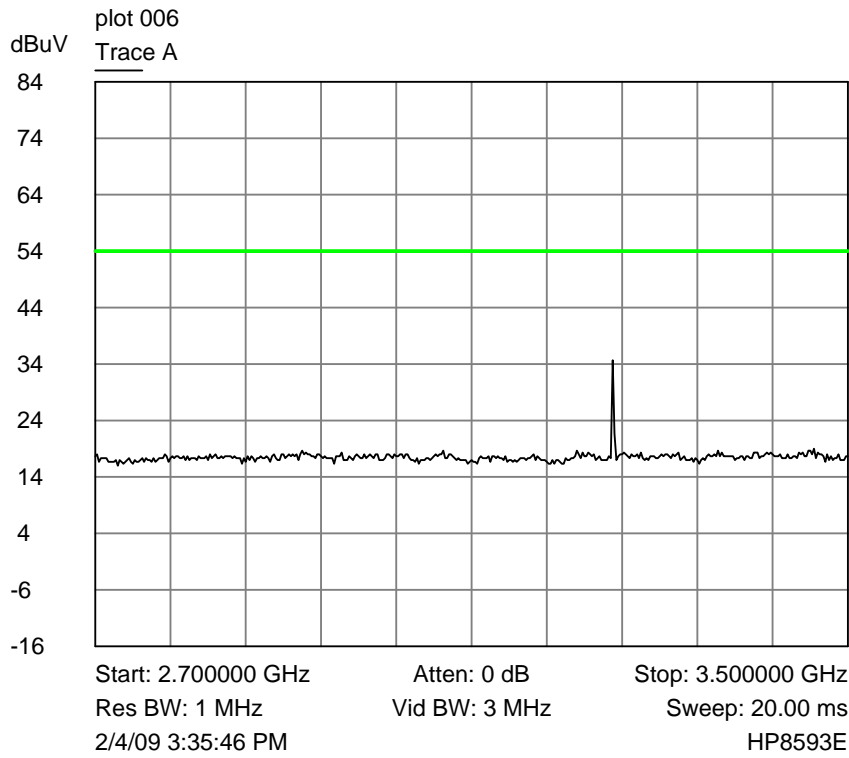


Average Values of 2.7 – 3.5 GHz. Horizontal Polarisation

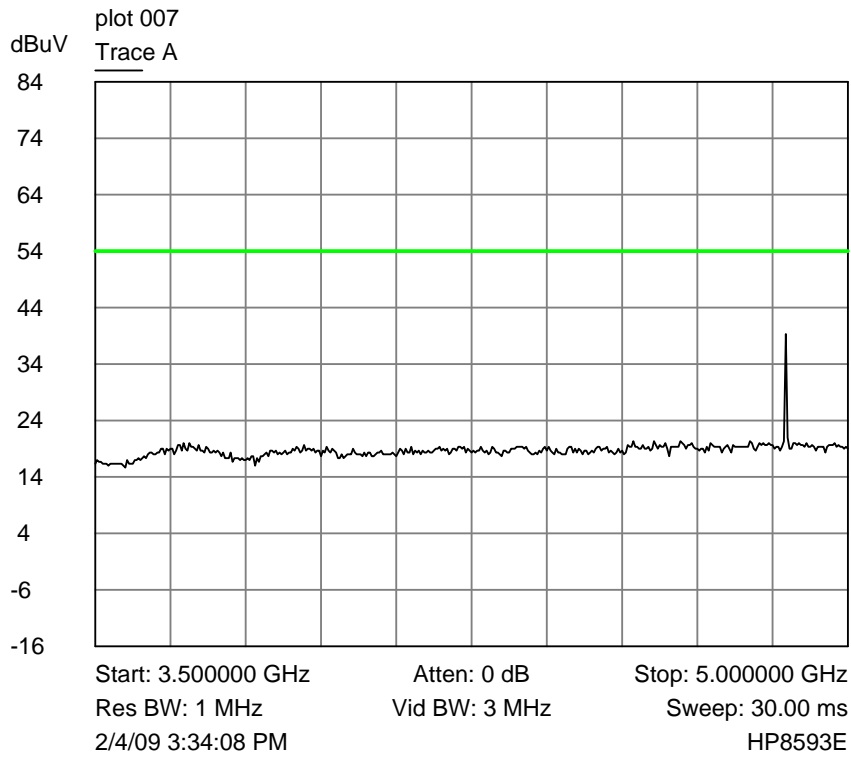


Average Values of 3.5 – 5 GHz. Horizontal Polarisation

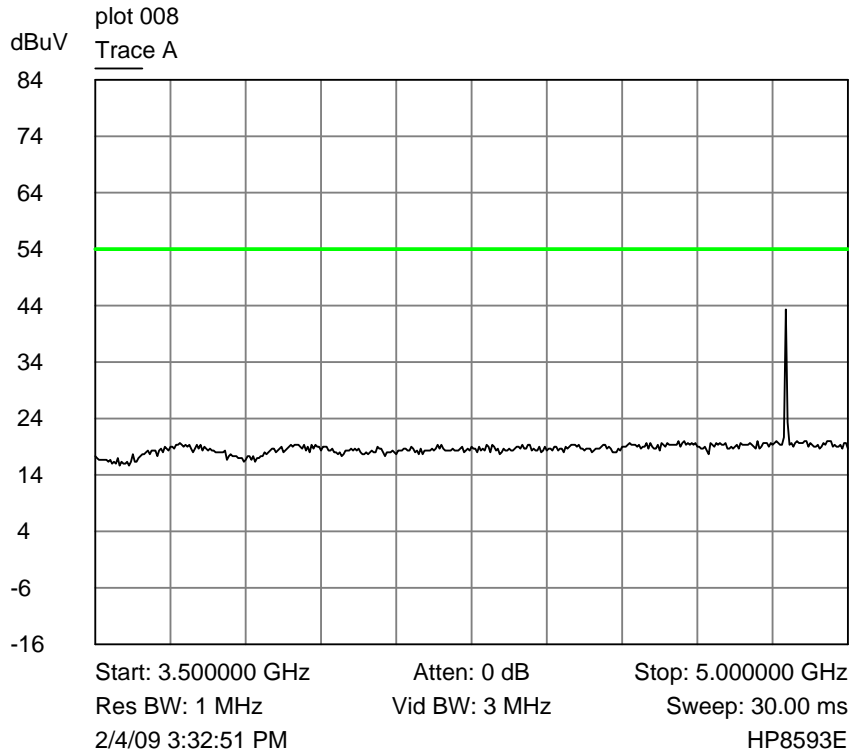


Average Values of 3.5 – 5 GHz. Vertical Polarisation

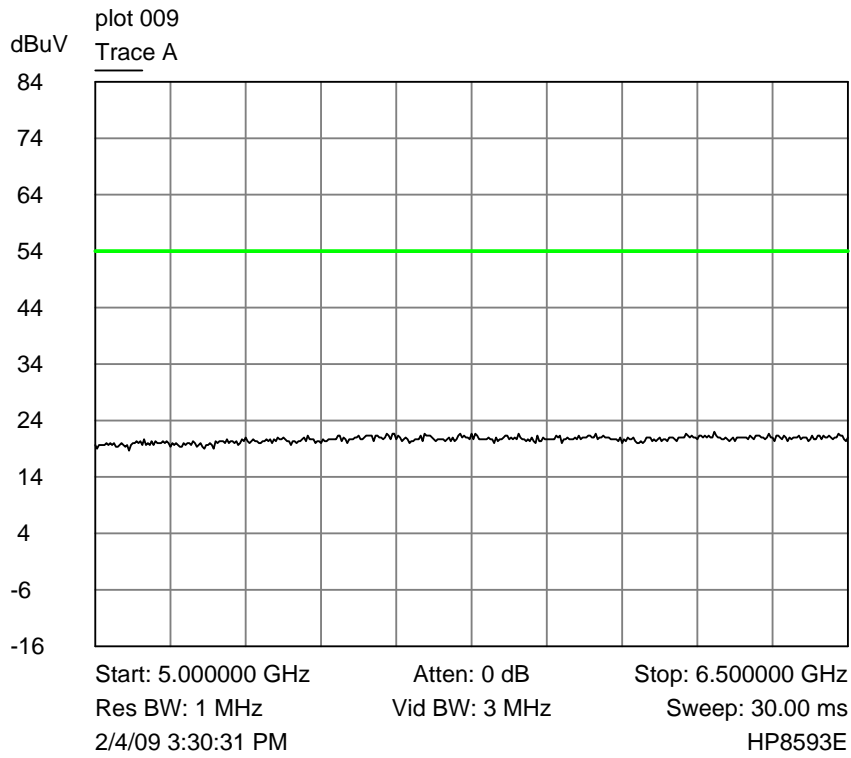


Average Values of 5 – 6.5 GHz. Vertical Polarisation

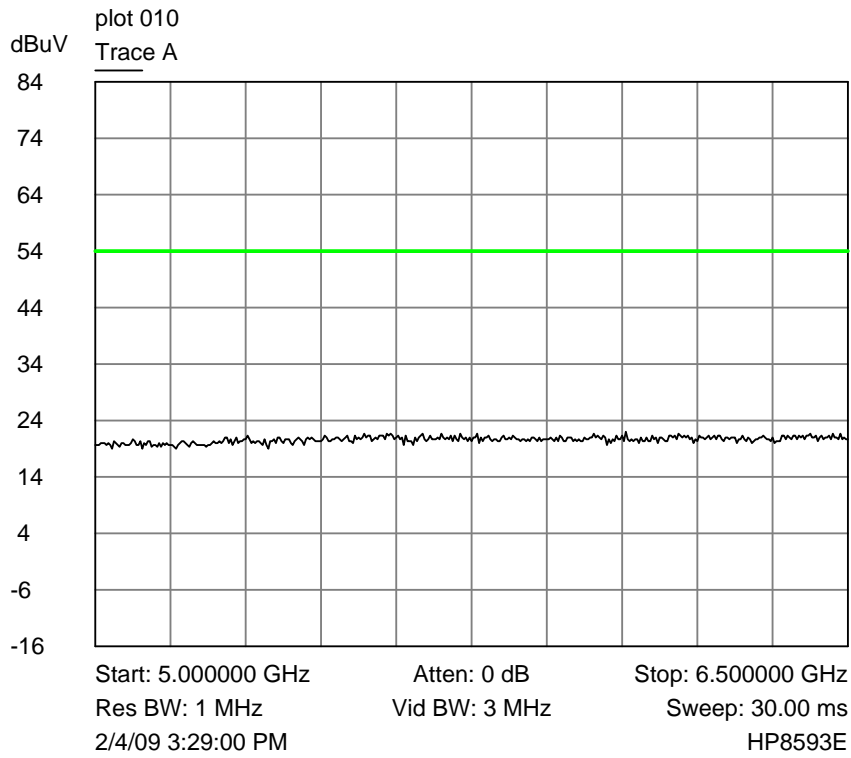


Average Values of 5 – 6.5 GHz. Horizontal Polarisation

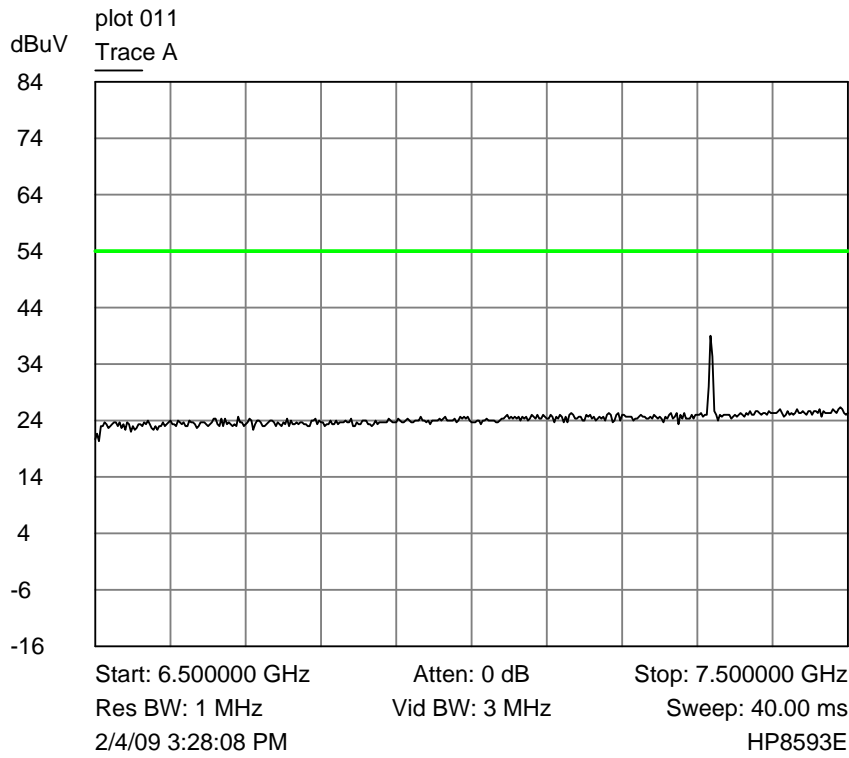


Average Values of 6.5 – 7.5 GHz. Horizontal Polarisation

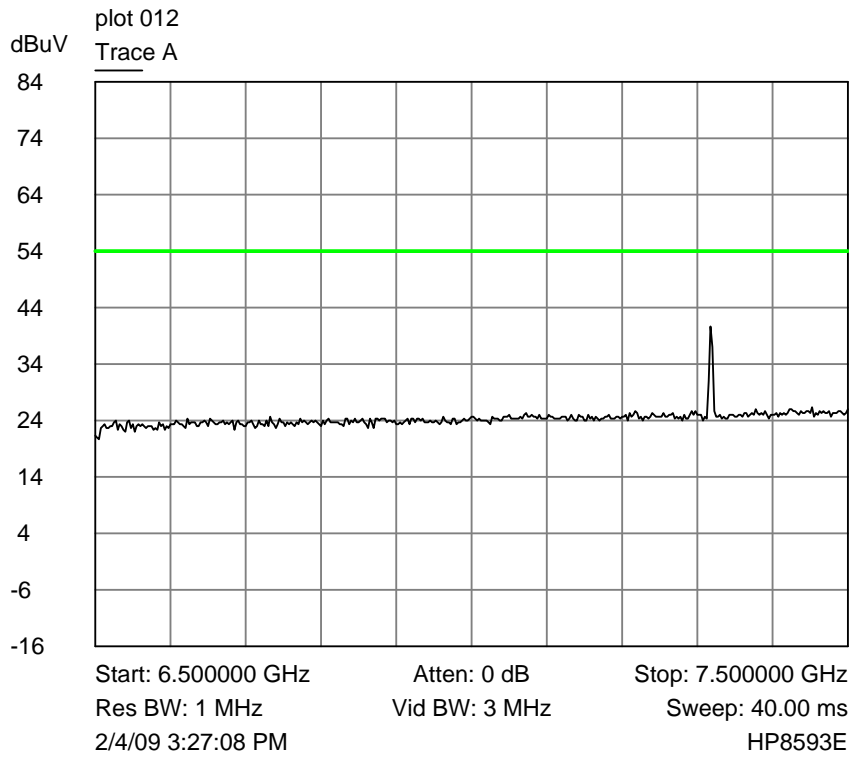


Average Values of 6.5 – 7.5 GHz. Vertical Polarisation

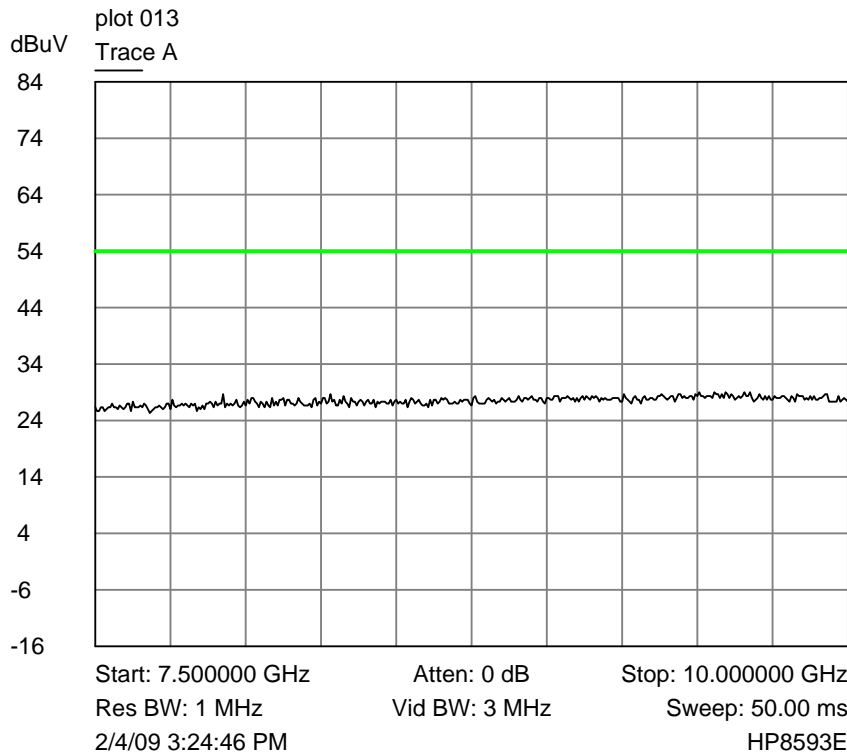


Average Values of 7.5 – 10 GHz. Vertical Polarisation

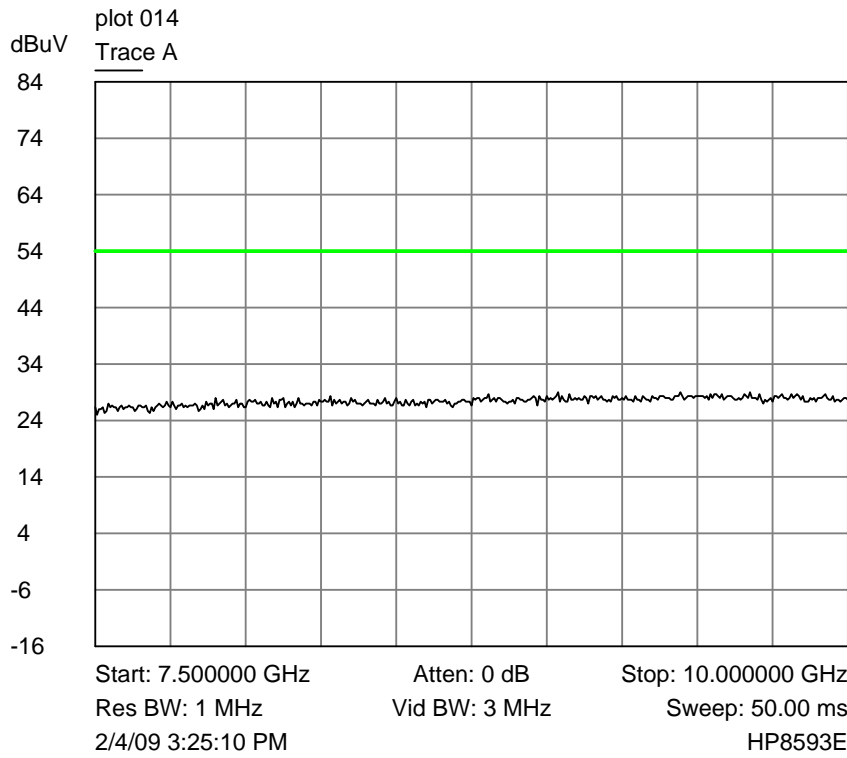


Average Values of 7.5 – 10 GHz. Horizontal Polarisation

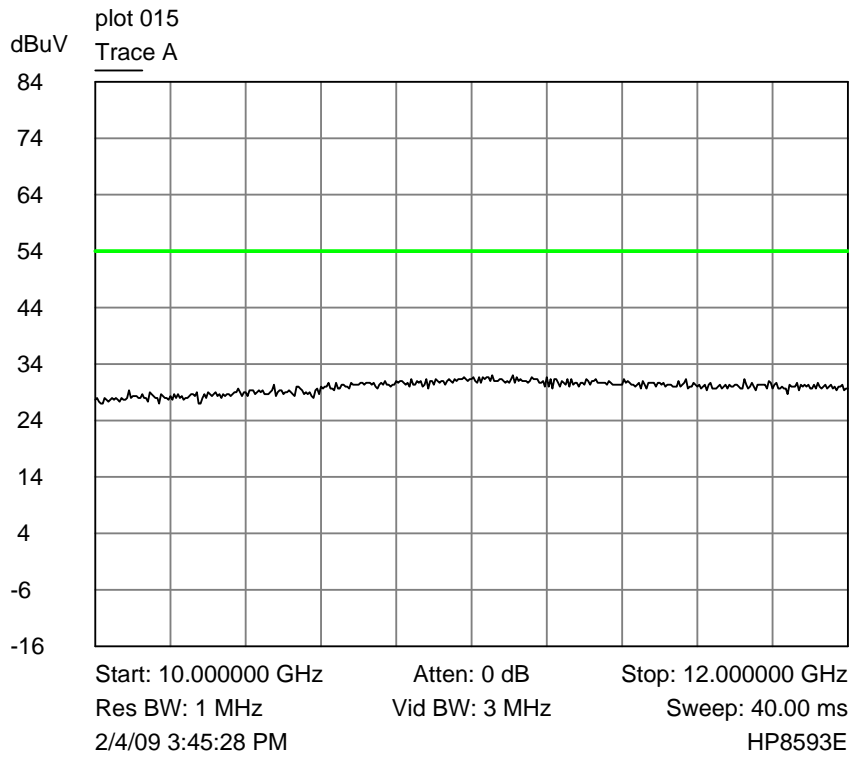


Average Values of 10 – 12 GHz. Vertical Polarisation

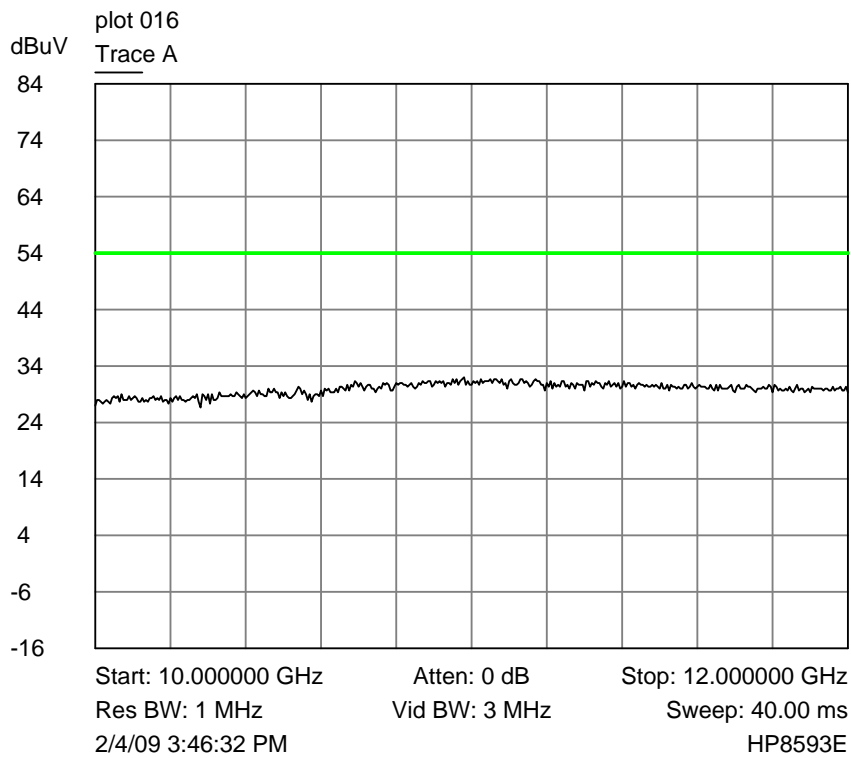


Average Values of 10 – 12 GHz. Horizontal Polarisation

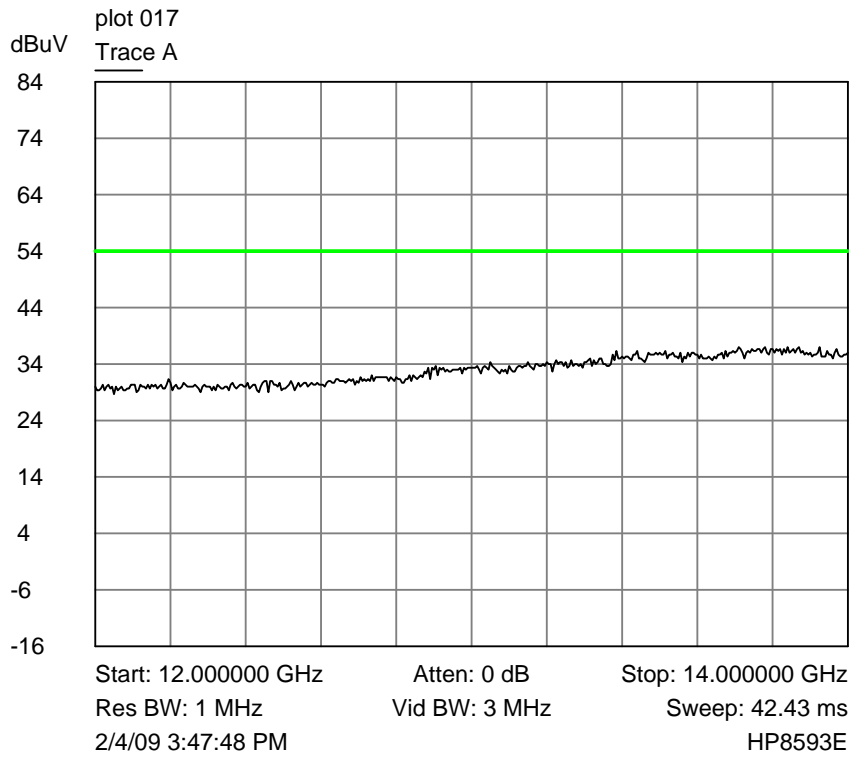


Average Values of 12 – 14 GHz. Horizontal Polarisation

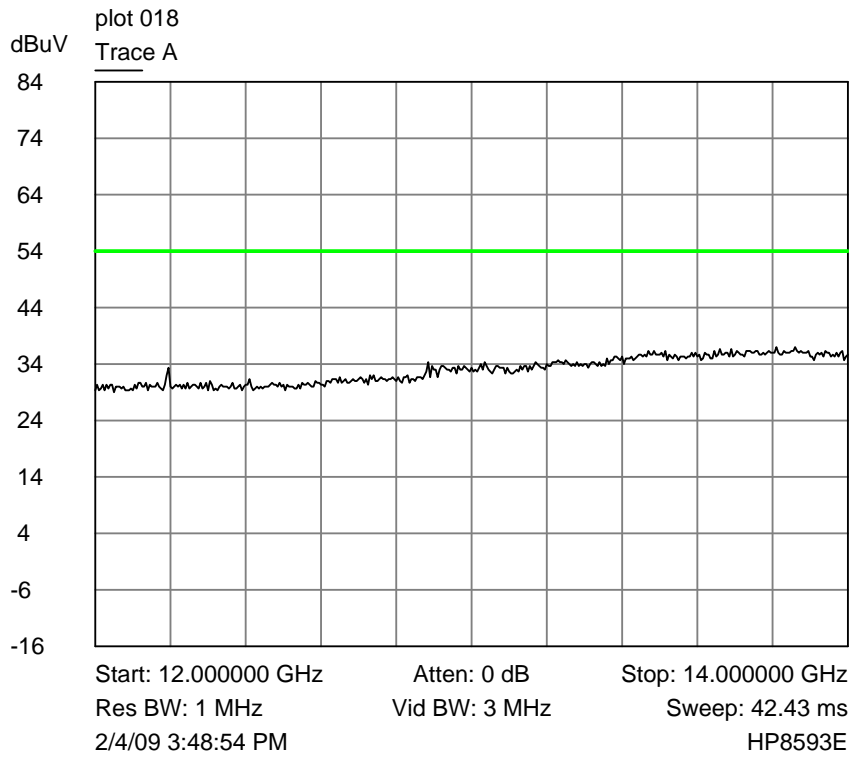


Average Values of 12 – 14 GHz. Vertical Polarisation

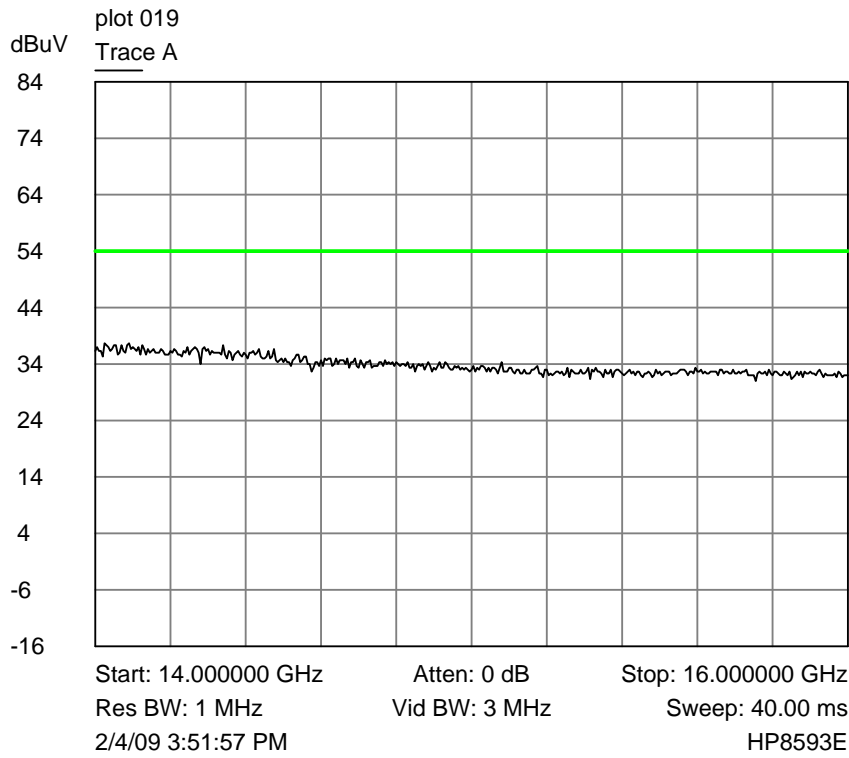


Average Values of 14 – 16 GHz. Vertical Polarisation

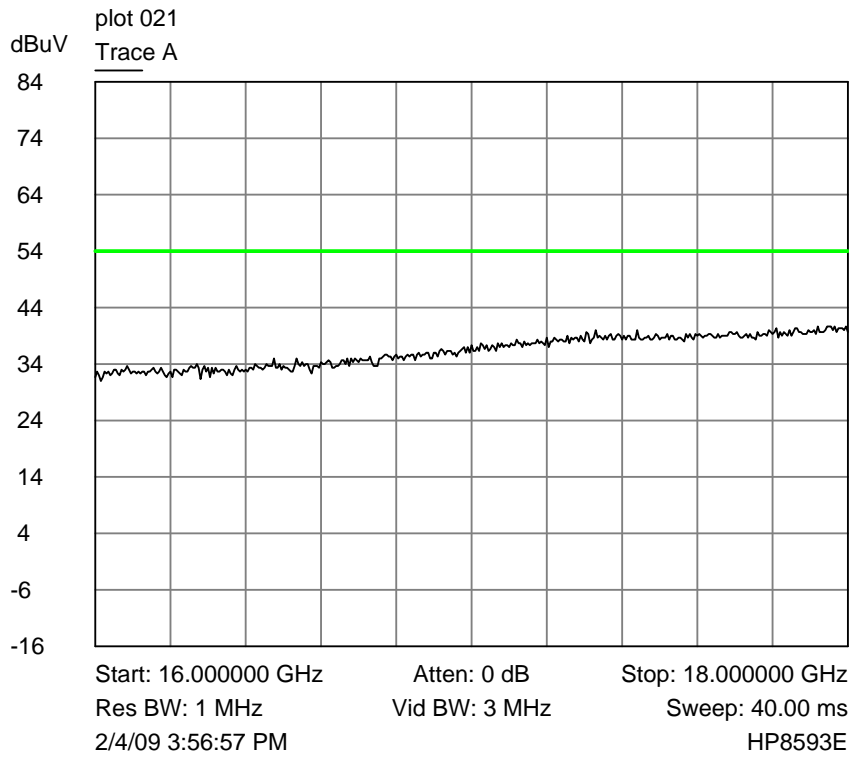


Average Values of 16 – 18 GHz. Horizontal Polarisation

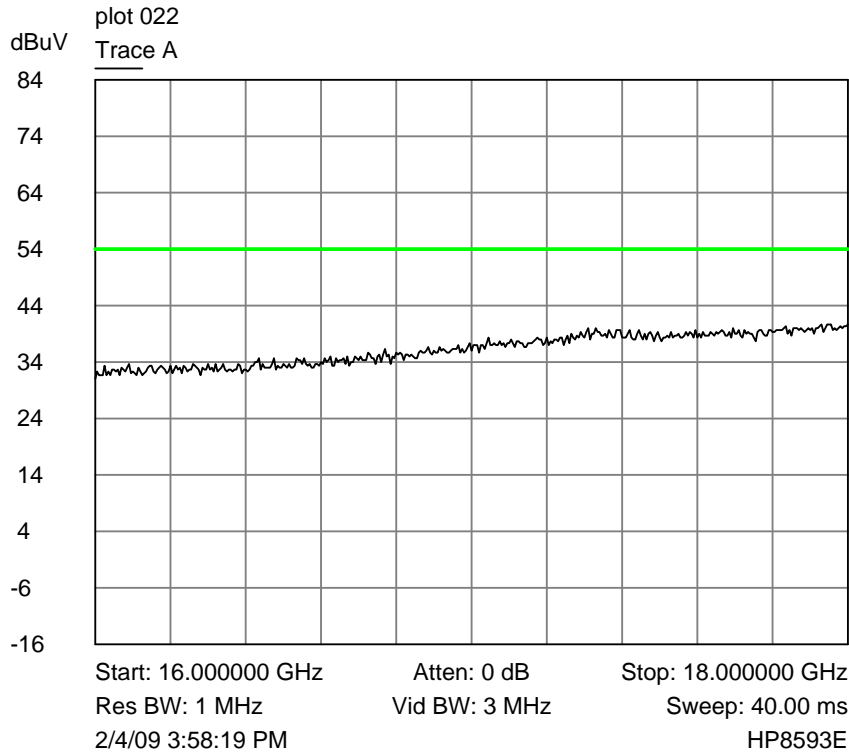


Average Values of 16 – 18 GHz. Vertical Polarisation

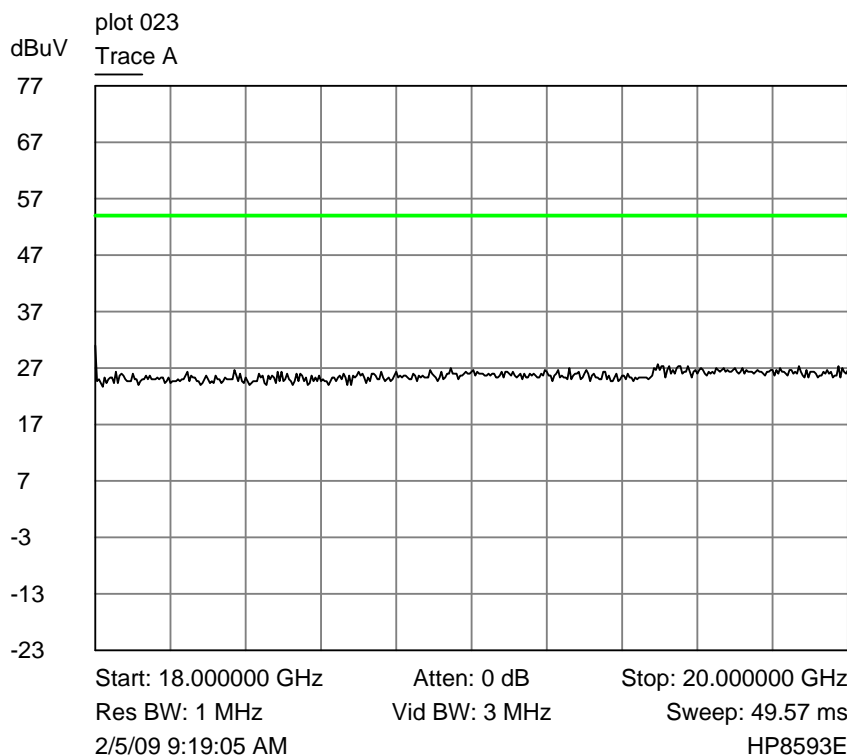


Average Values of 18 – 20 GHz. Vertical & Horizontal Polarisation

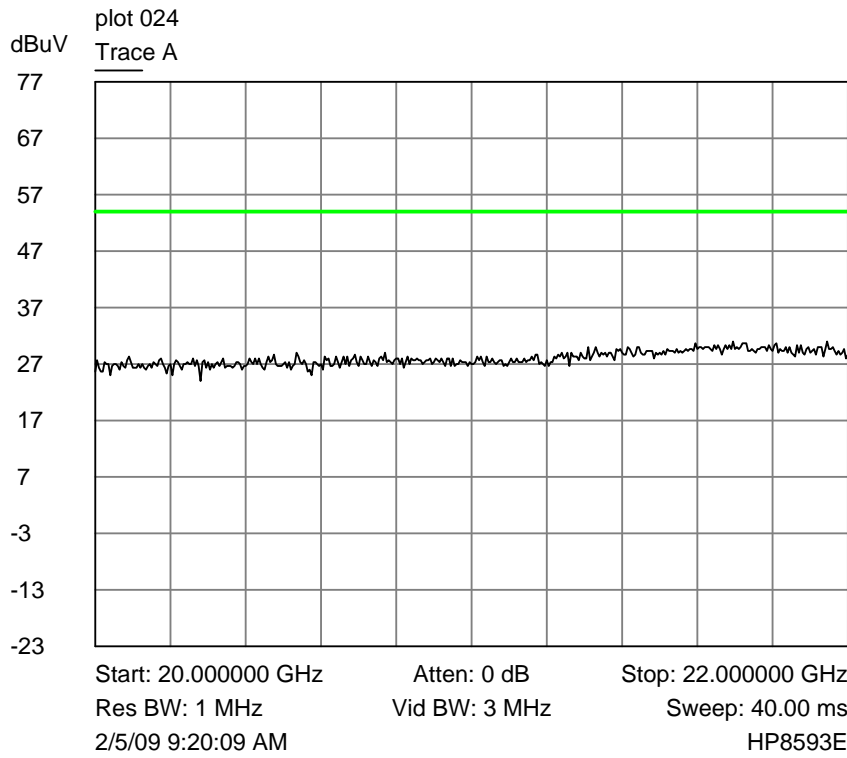

Average Values of 20 – 22 GHz. Vertical & Horizontal Polarisation

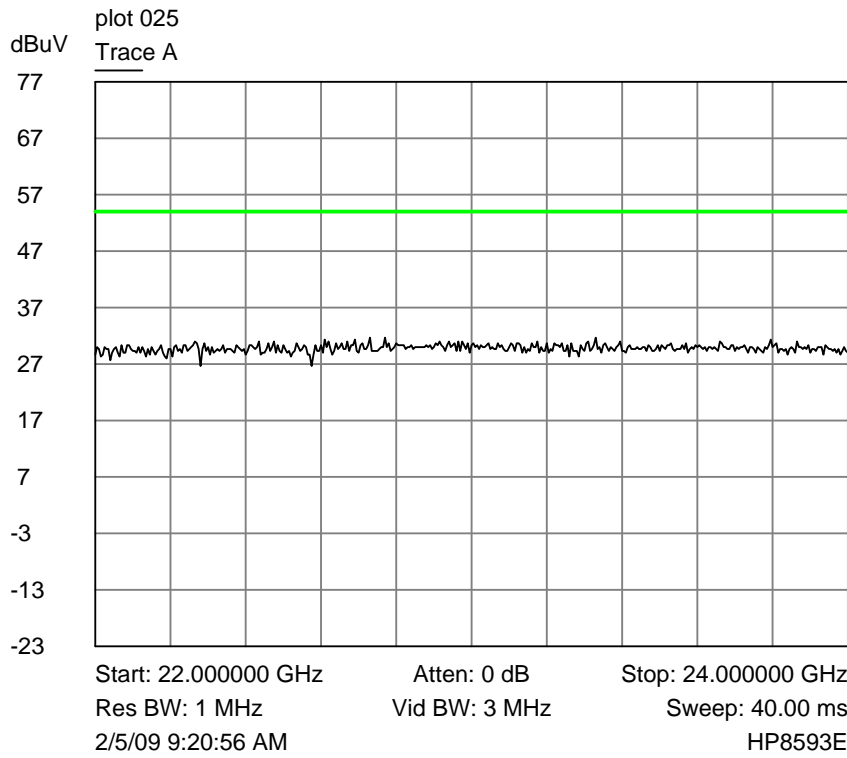

Average Values of 22 – 24 GHz. Vertical & Horizontal Polarisation

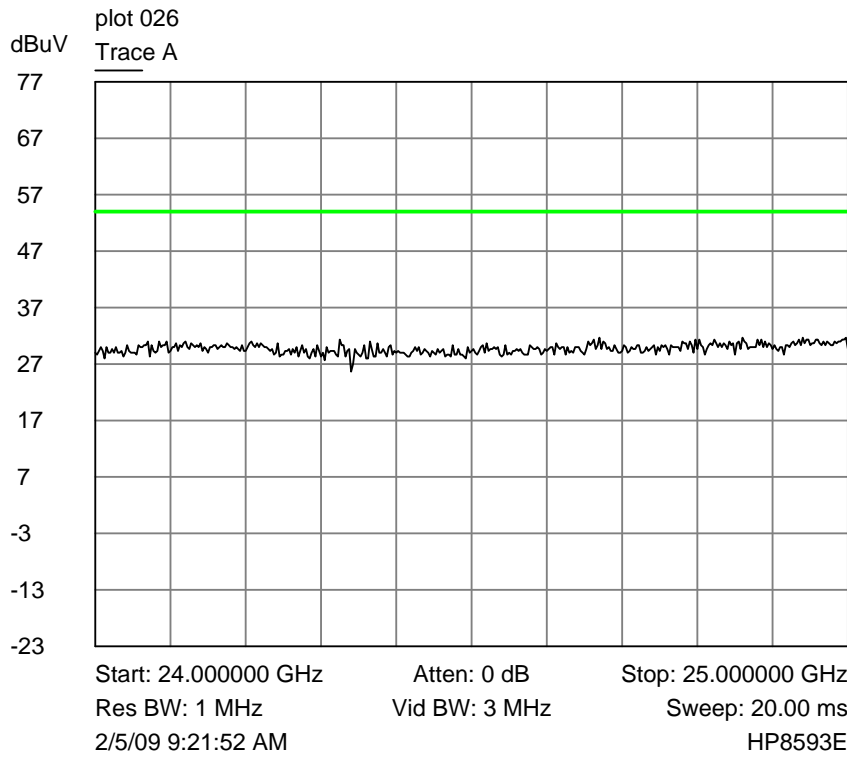

Average Values of 24 – 25 GHz. Vertical & Horizontal Polarisation

Tables of signals within 20dB of the limit line for 1GHz - 25GHz

EUT Transmitting on Low Channel

Signal	Freq (MHz)	Polarisation	Avg Amp (dBuV/m)	Avg -Limit ¹ (dBuV/m)	Comments
1	1603	V	37.7	-16.3	Restricted Band
2	1603	H	41.1	-12.9	Restricted Band
3	3206	V	37.0	-17.0	Restricted Band
4	3206	H	44.3	-9.7	Restricted Band
5	4810	V	48.8	-5.2	Restricted Band
6	4810	H	43.1	-10.9	Restricted Band
7	12025	V	35.5	-18.5	Restricted Band
8	7215	H	38.1	-15.9	
9	7215	V	46.0	-8.0	
10	9620	V	34.5	-19.5	
11	9620	H	36.1	-17.9	

EUT Transmitting on Middle Channel

Signal	Freq (MHz)	Polarisation	Avg Amp (dBuV/m)	Avg -Limit ¹ (dBuV/m)	Comments
1	1626	V	38.9	-15.1	Restricted Band
2	1626	H	40.0	-14.0	Restricted Band
3	3253	V	43.6	-10.4	Restricted Band
4	3253	H	44.2	-9.8	Restricted Band
5	4880	V	47.0	-7.0	Restricted Band
6	4880	H	45.2	-8.8	Restricted Band
7	7320	H	41.0	-13.0	Restricted Band
8	7320	V	46.1	-7.9	Restricted Band
9	12200	V	36.2	-17.8	Restricted Band
10	12200	H	34.0	-20.0	Restricted Band

EUT Transmitting on High channel

Signal	Freq (MHz)	Polarisation	Avg Amp (dBuV/m)	Avg -Limit ¹ (dBuV/m)	Comments
1	1653	V	36.0	-18.0	Restricted Band
2	1653	H	38.0	-16.0	Restricted Band
3	3306	V	41.4	-12.6	Restricted Band
4	3306	H	41.5	-12.5	Restricted Band
5	4960	V	39.5	-14.5	Restricted Band
6	4960	H	39.6	-14.6	Restricted Band
7	7440	H	43.1	-10.9	Restricted Band
8	7440	V	42.0	-12.0	Restricted Band
9	12400	H	36.5	-17.5	Restricted Band
10	12400	V	34.0	-20.0	Restricted Band
11	9920	V	32.0	-22.0	

In all the above measurements the fundamental signal was continuously on, and in no case were the peak emissions more than 13dB above the average.

¹Limit for emissions within the restricted bands of 15.205 comes from 15.209 = 54dBuV/m at 3m.



Limit for emissions outside the restricted bands of 15.205 comes from 15.247(d) = -20dB from highest in-band emission measured in 100kHz. However, all spurious found were within the tighter limits of 15.209 and are thus referenced to this limit.

Highest in-band emissions measured in 100kHz bandwidth, per 15.209(d):

Channel	Frequency (MHz)	Field (dBuV/m)
Low	2405	91.2
Middle	2440	91.0


High	2480	89.8
------	------	------

6.3 6dB Bandwidth

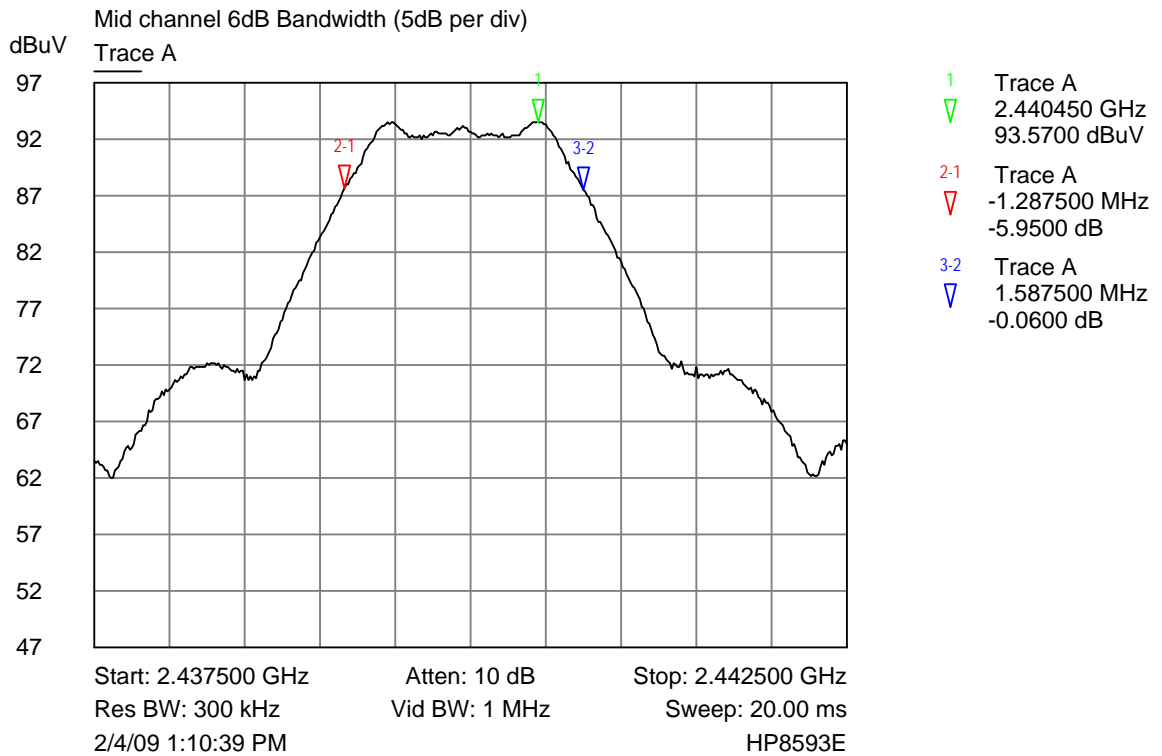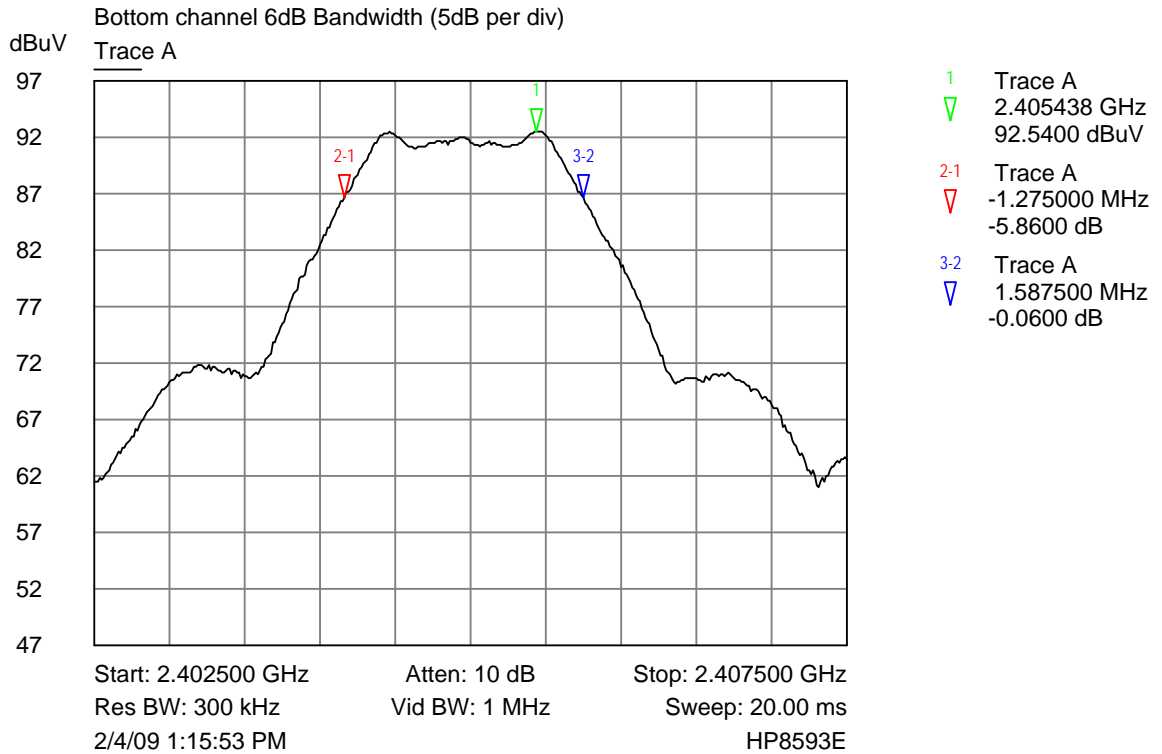

Top channel 6dB Bandwidth (5dB per div)

dBuV
Trace A

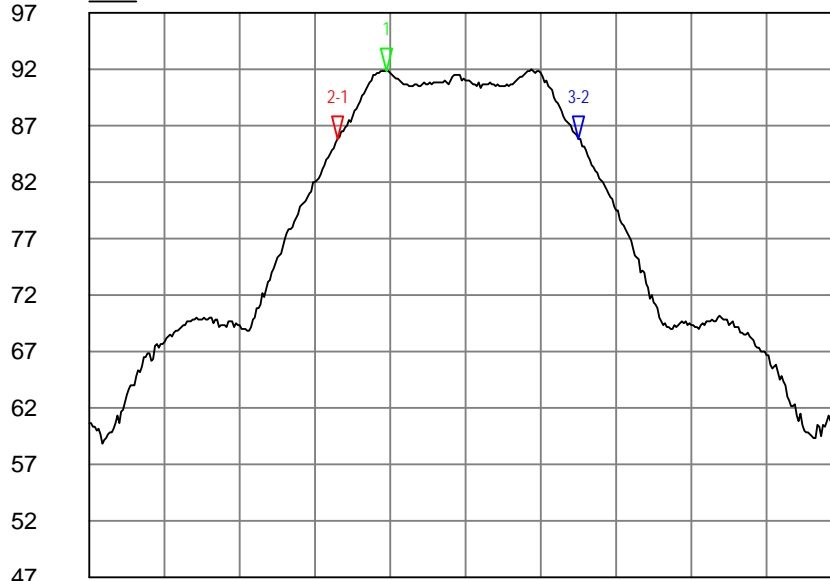

- 1 Trace A
2.479475 GHz
91.8800 dBuV
- 2-1 Trace A
-325.000000 kHz
-6.0300 dB
- 3-2 Trace A
1.600000 MHz
0 dB

Start: 2.477500 GHz Atten: 10 dB Stop: 2.482500 GHz
Res BW: 300 kHz Vid BW: 1 MHz Sweep: 20.00 ms
2/4/09 12:16:43 PM HP8593E

7 Explanatory Notes
7.1 Explanation of FAIL LIMIT 1 Statement

The **FAIL MARGIN 1** statement(s) may appear on the graphical plots when the receiver used to measure your equipment detects a signal that exceeds the dashed line. This does not mean that the **EUT** has failed the test, only that the 10 dB calculation margin set, has been exceeded on a peak measurement.

Following the indication that the margin has been exceeded, measurements are made at the frequency (ies) of the peaks. These peaks have been calculated to either Quasi Peak or Average Peak dependant on the test. A table of results has been printed on the reverse of the page. This table looks similar to the one illustrated below: -

Signal Number	Frequency (MHz)	Peak (dBμV)	PK Delta L 1 (dB)	Avg (dBμV)	Av Delta L 1 (dB)
1	12345.0000	12.9	-2.5	10.2	-5.2

The First column, labelled Signal Number, is a number that the receiver has given to each signal, which has been calculated.

Column Two, labelled Frequency (MHz), is the frequency of the signal received.

Column Three, labelled Peak (dBμV), (can also be labelled, in the case of Quasi Peak, Peak dBμV/m) is the Level that was received at peak amount in dB above 1μV.

Column Four, labelled PK Delta L1 (dB), is the same level as Column three but is given in a level relative to the limit line required.

Column Five, labelled AVG (dBμV), (can also be labelled, in the case of Quasi Peak, QP dBμV/m) when undertaking a Quasi peak test, This is the Average or Quasi peak calculation results given in dBμV or dBμV/m above 1μV.

Column Six, labelled AV Delta L 1 (dB), (can also be labelled, in the case of Quasi Peak, QP Delta L 1 (dB)) is the Average or Quasi Peak calculation relevant to the limit line. The results entered in this column indicate the signal level relative to the compliance limit required. Negative numbers indicate that the product is compliant.

7.2 Explanation of limit line calculations for radiated measurements

The limits given in the test standard are normally expressed as absolute values (e.g. in μV/m at a specified distance), whereas the measured values are expressed as peak, quasi peak or average values in dBμV/m referenced to the measuring instrument inputs. RN Electronics calibrate the test set-up to account for any path losses, antenna gains, etc. so that the value read at the receiver relates directly to the absolute value required, except that it is expressed in dB relative to one microVolt and may need to take account of any alternative measuring distance used. Examples:

- (a) limit of 500 μV/m equates to $20.\log (500) = 54 \text{ dB } \mu\text{V/m}$.
- (b) limit of 300 μV/m at 10m equates to $20.\log (300 \cdot 10/3) = 60 \text{ dB } \mu\text{V/m at 3m}$

8. Photographs



**Photograph of the EUT as viewed from in front of
the antenna, site M.**

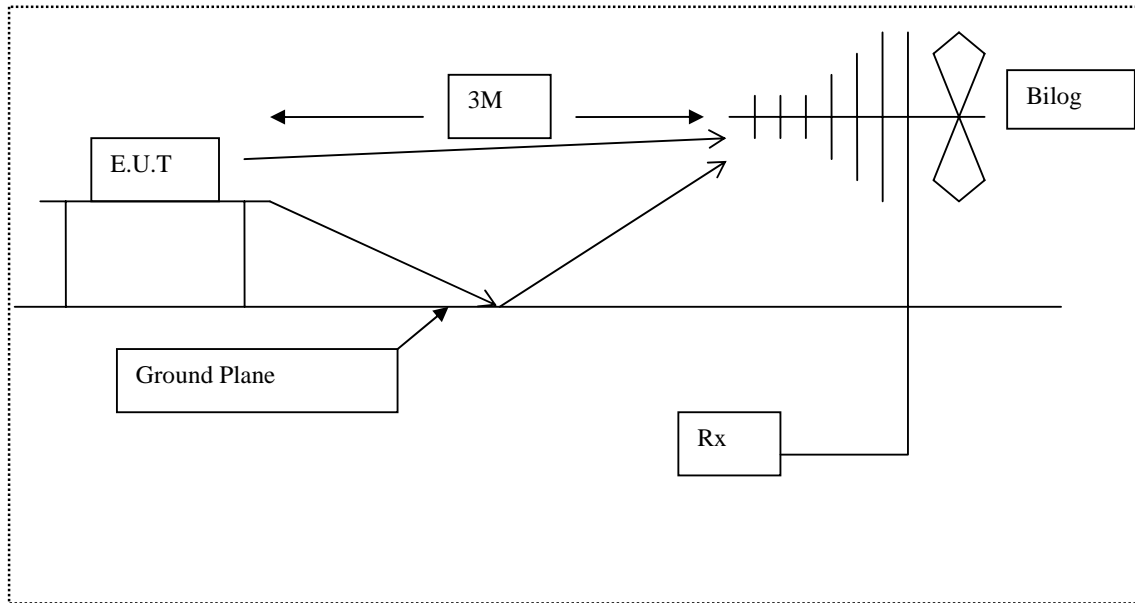


Diagram of the radiated emissions test setup.

8.2 EUT



8.3 EUT in Test Board



9. Signal Leads

None. EUT Battery powered.

10. Test Equipment Calibration list

The following table lists the test equipment used, last calibration date and calibration interval. All test equipment used has been maintained within the calibration requirements of **R.N. Electronics Ltd.** test facility quality system. Calibration intervals are regularly reviewed dependent on equipment manufacturer's recommendations and actual usage of the equipment.

RNNo	Model	Description	Manufacturer	Date Calibrated	Period
C031	437B	Power Meter	Hewlett Packard	14-Oct-08	12
C032	8482A	Power Sensor	Hewlett Packard	16-Oct-08	12
E001	HP8542E	EMI Receiver & RF Filter	Hewlett Packard	13-Nov-07	18
E002	HP8594E	Spectrum Analyser + EMC S/ware	Hewlett Packard	N/A	12
E003	HP8593E	Spectrum Analyser	Hewlett Packard	10-Oct-08	24
E005	HP8447F	Pre-Amplifier	Hewlett Packard	09-Oct-08	12
E266	2032	5.4GHz Signal Generator	Marconi Instruments	27-Mar-08	24
E268	BHA 9118	1-18 GHz Horn Antenna	Schaffner	26-May-06	60
TMS79	460451	Std Gain Horn Antenna 18-26.5 GHz	ETS Systems	26-May-06	60
TMS81	6502	Active Loop Antenna	EMCO	11-Dec-07	24
TMS82	8449B	Pre Amplifier 1 - 26 GHz	Agilent	28-Oct-08	12
TMS933	CBL6141A	Bilog Antenna 30MHz - 2GHz	York EMC	10-Sep-07	36

11. Auxiliary equipment

11.1 Auxiliary equipment supplied by Jennic Ltd

Auxiliary equipment used for the purpose of test supplied by the above has been listed below

Manufacturer	Description	Model Number	Serial Number
Jennic Ltd	Motherboard PCB	DR1048 V1.1	7593
Jennic Ltd	Test Jig (UFL to SMA)	-	-

11.2 Auxiliary equipment supplied by RN Electronics Limited

Auxiliary equipment used for the purpose of test supplied by the above has been listed below

RN Numb	Manufacturer	Description	Model Number	Serial Number
I005	HP	Laptop	NX9010	CNF3512U85

12. Modifications

In order for the EUT to produce the results shown within this report the following modifications, if any, were implemented.

NONE.

n.b. The settings of the device - continuous transmit, power level, frequency were set by test software not normally available to the user.

13. Compliance information

Products subject to the Declaration of Conformity procedure are required to be supplied with a compliance information statement. A copy of this statement may be included here:

NOT APPLICABLE - Device to be Certified.



Certificate of Test

The equipment noted below has been tested by **R.N. Electronics Limited** and conforms with the relevant subpart of FCC part 15, subject to deviations as detailed in this report.

This certificate relates to the equipment, as identified by unique serial number(s) and further detailed in the referenced report, in the condition(s) at the time it was tested. It does not relate to any other similar equipment and performance of the product before or after the test cannot be guaranteed. Furthermore, this is a certificate of test only and should not be confused with an equipment authorisation.

Equipment:	IEEE 802.15.4 Wireless microcontroller module
Model Number(s):	JN5139-T01-C10
Unique Serial Number(s):	#09
Manufacturer:	Jennic Ltd
Customer Purchase Order Number:	PO 005126/CF
R.N. Electronics Limited Report Number:	02-324/3877/1/09
Test Standards:	FCC Part 15C: effective date October 1, 2008 Class DTS Intentional Radiator
Date:	4th & 5th February 2009

For and on behalf of
R.N. Electronics Limited

Signature:

QMF21 – 8: FCC PART 15C: RNE ISSUE 04: - MAY 08