

TEST REPORT

Test report no.: 1-4852/12-05-10-A



Testing laboratory

CETECOM ICT Services GmbH
Untertuerkheimer Strasse 6 – 10
66117 Saarbruecken / Germany
Phone: + 49 681 5 98 - 0
Fax: + 49 681 5 98 - 9075
Internet: <http://www.cetecom.com>
e-mail: ict@cetecom.com

Accredited Testing Laboratory:

The testing laboratory (area of testing) is accredited according to DIN EN ISO/IEC 17025 (2005) by the Deutsche Akkreditierungsstelle GmbH (DAkkS). The accreditation is valid for the scope of testing procedures as stated in the accreditation certificate with the registration number: D-PL-12076-01-01
Area of Testing: Radio/Satellite Communications

Applicant

Oticon A/S
Kongebakken 9
2765 Smørum / DENMARK
Phone: +45 39 17 71 00
Contact: Jørgen Peter Hanuscheck
e-mail: jnp@oticon.dk
Phone: +45 39 13 85 38

Manufacturer

Oticon A/S
Kongebakken 9
2765 Smørum / DENMARK

Test standard/s

47 CFR Part 15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
RSS - Gen Issue 3	General Requirements and Information for the Certification of Radiocommunication Equipment

For further applied test standards please refer to section 3 of this test report.

Test Item

Kind of test item:	Hearing Aid Accessory
Model name:	Audio Streaming Module
FCC ID:	U28CL2STRM
IC:	1350B-CL2STRM
Frequency:	3.84 MHz
Technology tested:	Magnetic coupling
Antenna:	Integrated ferrite – coil antenna; external loop-neck antenna
Power Supply:	3.70 V DC by Li – polymer - battery
Temperature Range:	0°C to +35 °C

This test report is electronically signed and valid without handwriting signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Test report authorised:


p.o.
cn=Joerg Warken, o=CETECOM ICT
Services GmbH, ou=WAK-111223,
email=Joerg.Warken@cetecom.com,
c=DE
2012.12.19 13:34:55 +01'00'

Stefan Bös
Testing Manager

Test performed:


cn=Tobias Wittenmeier, o=CETECOM ICT
Services GmbH, ou=WIT-111222,
email=tobias.wittenmeier@cetecom.com,
c=DE
2012.12.19 13:13:53 +01'00'

Tobias Wittenmeier

1 Table of contents

1	Table of contents	2
2	General information	3
2.1	Notes and disclaimer	3
2.2	Application details	3
3	Test standard/s	3
4	Test environment	4
5	Test item	4
6	Test laboratories sub-contracted	4
7	Summary of measurement results	5
8	RF measurement testing	6
8.1	Description of test setup	6
8.1.1	Radiated measurements	6
8.1.2	Conducted measurements	7
8.2	Additional comments	7
8.3	RSP100 test report cover sheet / performance test data	8
9	Measurement results	9
9.1	Timing of the transmitter	9
9.2	Bandwidth of the modulated carrier	10
9.3	Field strength of the fundamental	12
9.4	Fieldstrength of the harmonics and spurious	13
9.5	Receiver spurious emissions	17
9.6	Conducted limits	18
10	Test equipment and ancillaries used for tests	20
11	Observations	21
Annex A	Photographs of the test setup	22
Annex B	External photographs of the EUT	26
Annex C	Internal photographs of the EUT	29
Annex D	Document history	32
Annex E	Further information	32
Annex F	Accreditation Certificate	33

2 General information

2.1 Notes and disclaimer

The test results of this test report relate exclusively to the test item specified in this test report. CETECOM ICT Services GmbH does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item.

The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM ICT Services GmbH.

The testing service provided by CETECOM ICT Services GmbH has been rendered under the current "General Terms and Conditions for CETECOM ICT Services GmbH".

CETECOM ICT Services GmbH will not be liable for any loss or damage resulting from false, inaccurate, inappropriate or incomplete product information provided by the customer.

Under no circumstances does the CETECOM ICT Services GmbH test report include any endorsement or warranty regarding the functionality, quality or performance of any other product or service provided.

Under no circumstances does the CETECOM ICT Services GmbH test report include or imply any product or service warranties from CETECOM ICT Services GmbH, including, without limitation, any implied warranties of merchantability, fitness for purpose, or non-infringement, all of which are expressly disclaimed by CETECOM ICT Services GmbH.

All rights and remedies regarding vendor's products and services for which CETECOM ICT Services GmbH has prepared this test report shall be provided by the party offering such products or services and not by CETECOM ICT Services GmbH.

In no case this test report can be considered as a Letter of Approval.

This test report is electronically signed and valid without handwritten signature. For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

2.2 Application details

Date of receipt of order:	2012-09-28
Date of receipt of test item:	2012-11-12
Start of test:	2012-11-12
End of test:	2012-11-13
Person(s) present during the test:	-/-

3 Test standard/s

Test standard	Date	Test standard description
47 CFR Part 15	2010-10	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices
RSS - 210 Issue 8	2010-12	Spectrum Management and Telecommunications - Radio Standards Specification Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
RSS - Gen Issue 3	2010-12	General Requirements and Information for the Certification of Radiocommunication Equipment

4 Test environment

Temperature:	T_{nom}	+22 °C during room temperature tests
	T_{max}	+35 °C during high temperature tests
	T_{min}	0 °C during low temperature tests
Relative humidity content:		55 %
Barometric pressure:		not relevant for this kind of testing
Power supply:	V_{nom}	3.70 V DC by Li – polymer - battery
	V_{max}	4.10 V
	V_{min}	3.45 V

5 Test item

Kind of test item	:	Hearing Aid Accessory
Type identification	:	Audio Streaming Module (Oticon Streamer Pro)
S/N serial number	:	TX units: EUT No. 1: 0800149 EUT No. 2: 0800151 EUT No. 3: 0800153 Photo unit: EUT No. 4: 0800142
HW hardware status	:	Rev. 3
SW software status	:	0.9.3
Frequency band [MHz]	:	3.84 MHz
Type of radio transmission	:	Modulated carrier
Use of frequency spectrum	:	
Type of modulation	:	A1D
Number of channels	:	1
Antenna	:	Integrated ferrite – coil antenna; external loop-neck antenna
Power supply	:	3.70 V DC by Li – polymer - battery
Temperature range	:	0°C to +35 °C

6 Test laboratories sub-contracted

None

7 Summary of measurement results

- No deviations from the technical specifications were ascertained**
- There were deviations from the technical specifications ascertained

TC Identifier	Description	Verdict	Date	Remark
RF-Testing	CFR Part 15 RSS 210, Issue 8	Passed	2012-12-19	-/-

Test Specification Clause	Test Case	Temperature Conditions	Power Source Voltages	Pass	Fail	NA	NP	Results
§ 15.35 (c) / RSS-GEN Issue 3 Section 4.5	Timing of the transmitter (Duty cycle correction factor)	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.223 / RSS-210 Issue 8	Bandwidth of the modulated carrier	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.223 / RSS-210 Issue 8	Fieldstrength of fundamental	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.209 (a) / RSS-210 Issue 8	Fieldstrength of harmonics and spurious	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies
§ 15.109 / RSS-210 Issue 8	Receiver spurious emissions	Nominal	Nominal	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	-/-
§ 15.107 / § 15.207	Conducted limits	Nominal	Nominal	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	complies

Note: NA = Not Applicable; NP = Not Performed


8 RF measurement testing

8.1 Description of test setup

8.1.1 Radiated measurements

The radiated measurements are performed in vertical and horizontal plane in the frequency range from 9 kHz to 25 GHz in semi-anechoic chambers. The EUT is positioned on a non-conductive support with a height of 0.80 m above a conductive ground plane that covers the whole chamber. The receiving antennas are confirmed with specifications ANSI C63.2-1996 and ANSI C63.4-2009. These antennas can be moved over the height range between 1.0 m and 4.0 m in order to search for maximum field strength emitted from EUT. The measurement distances between EUT and receiving antennas are indicated in the test setups for the various frequency ranges. For each measurement, the EUT is rotated in all three axes until the maximum field strength is received. The wanted and unwanted emissions are received by spectrum analysers where the detector modes and resolution bandwidths over various frequency ranges are set according to requirement ANSI C63-4-2003. Antennas are confirmed with ANSI C63.2-1996 item 15.

Semi anechoic chamber

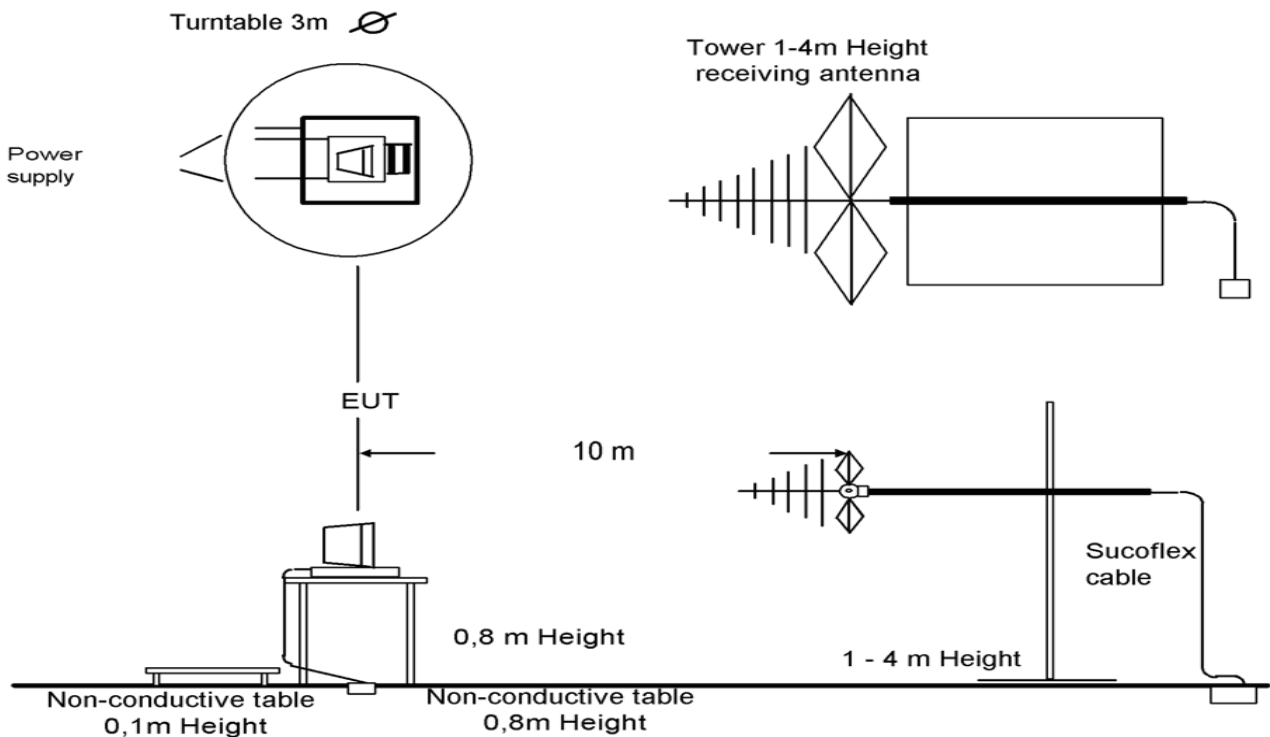


Picture 1: Diagram radiated measurements

9 kHz - 30 MHz:	active loop antenna
30 MHz – 1 GHz:	tri-log antenna
> 1 GHz:	horn antenna

The EUT is powered by an external power supply with nominal voltage. The signalling (if needed) is performed from outside the chamber with a signalling unit by air link using signalling antenna.

8.1.2 Conducted measurements

The EUT's RF signal is coupled out by the antenna connector which is supplied by the manufacturer. The signal is first 10dB attenuated before it is power divided (~6dB loss per branch). The measurement readings on the signalling unit/spectrum analyzer are corrected by the specific test set-up loss. The attenuator, power divider, and the spectrum analyzer are impedance matched on 50 Ohm.

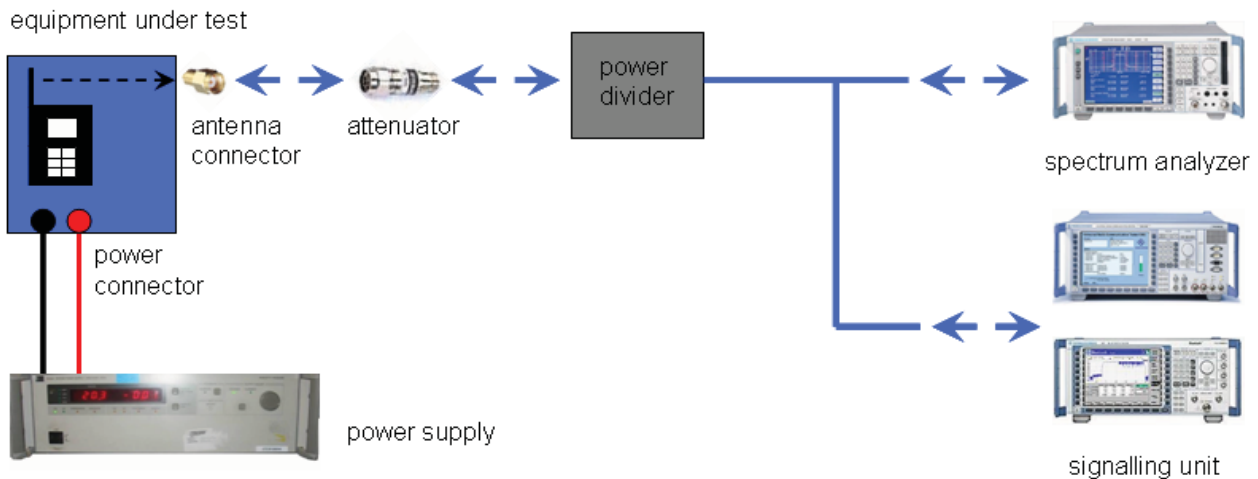

Picture 2: Diagram conducted measurements

8.2 Additional comments

Reference documents: none

Manufacturer declaration:

The provided test sample for radiated measurements had a transmitter duty cycle of 50% for ease of test, this is also the duty cycle in the normal use mode.

Special test descriptions:

We perform the radiated pre-scans in different spherical positions and consolidate the results in one result plot. The test procedure includes scans in the theta axes every 120° and in phi axes @ 0° and 90° for both polarizations vertical & horizontal or magnetic emissions.

All measurements were performed with the integrated ferrite-coil antenna. The operation of the EUT with this internal antenna is the worst case test situation.

Configuration descriptions: None

8.3 RSP100 test report cover sheet / performance test data

Test Report Number	:	1-4852/12-05-10-A
Equipment Model Number	:	Audio Streaming Module
Certification Number	:	1350B-CL2STRM
Manufacturer (complete Address)	:	Oticon A/S Kongebakken 9 2765 Smørum / DENMARK
Tested to radio standards specification no.	:	RSS 210, Issue 8, Annex 2
Open Area Test Site IC No.	:	IC 3462C-1
Frequency Range or fixed frequency	:	3.84 MHz
Field Strength [dB μ V/m] (at which distance)	:	34.5 @ 10m
Occupied bandwidth (99%-BW) [kHz]	:	284 kHz
Type of modulation	:	A1D
Emission Designator (TRC-43)	:	284KA1D
Antenna Information	:	Integrated ferrite – coil antenna; external loop-neck antenna
Transmitter Spurious (worst case) [dB μ V/m @ 10m]:		22 @ 912.7 MHz
Receiver Spurious (worst case) [dB μ V/m @ 3m]:		No RX mode!

ATTESTATION:

DECLARATION OF COMPLIANCE:

I attest that the testing was performed or supervised by me; that the test measurements were made in accordance with the above-mentioned Industry Canada standard(s); and that the equipment identified in this application has been subjected to all the applicable test conditions specified in the Industry Canada standards and all of the requirements of the standard have been met.

Laboratory Manager:

2012-12-19
Date

Tobias Wittenmeier
Name



Signature

9 Measurement results

9.1 Timing of the transmitter

Measurement:

Measurement parameter	
Detector:	-/-
Sweep time:	-/-
Resolution bandwidth:	-/-
Video bandwidth:	-/-
Span:	-/-
Trace-Mode:	-/-

Limits:

FCC	IC
Timing of the transmitter	
<p>(c) Unless otherwise specified, e.g. Section 15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to notification or verification.</p>	

Duty cycle of the sample with test mode: 50%

In normal use the duty cycle is approximately 50% (declared by the manufacturer).

Result: The result of the measurement is passed.

9.2 Bandwidth of the modulated carrier**Limits:**

FCC	IC
CFR Part SUBCLAUSE § 15.223	RSS-210 Issue 8
Bandwidth of the modulated carrier	


Measured with the integrated OBW-function of the spectrum analyser Rohde&Schwarz ESPI (measurement criteria is the integrated power in %)

Result EUT No 3 0800149:

	Occupied Bandwidth (kHz)
6 dB (75%)	68
20 dB (99%)	284


Plots of the measurement EUT No.3 0800149

Plot 1: 6dB (75%) – bandwidth

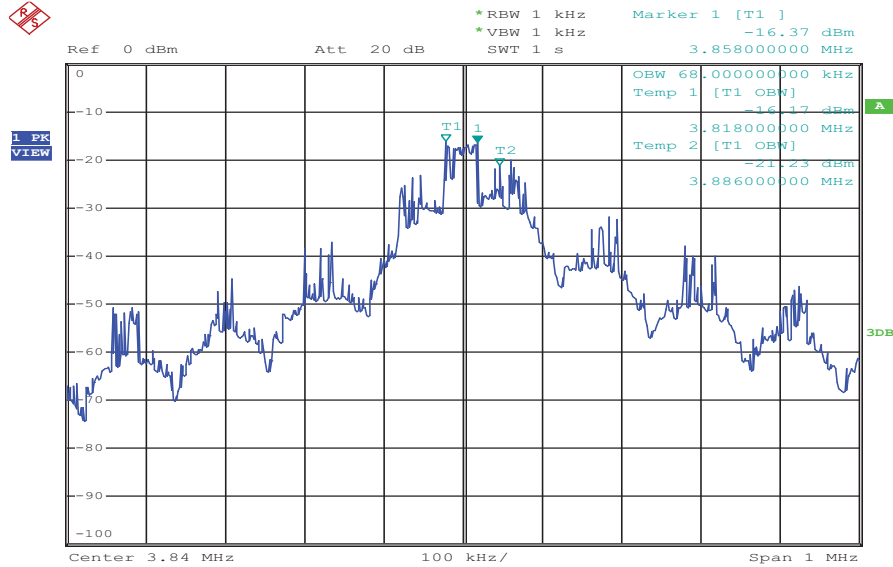

Date: 13.NOV.2012 12:11:59

Plot 2: 20dB (99%) - bandwidth

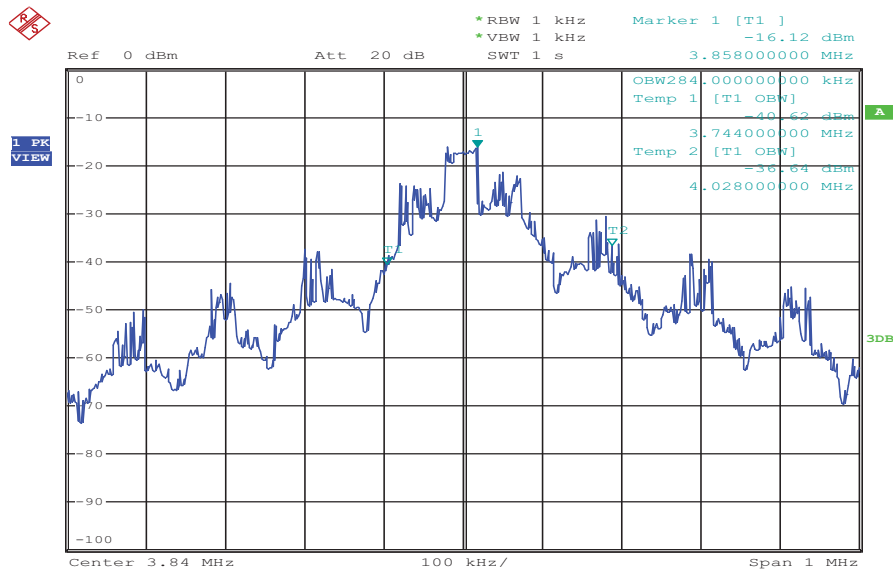

Date: 13.NOV.2012 12:10:46

9.3 Field strength of the fundamental

Measurement:

Measurement parameter	
Detector:	Quasi Peak (CISPR)
Resolution bandwidth:	10kHz
Trace-Mode:	Max Hold

Limits:

FCC		IC	
CFR Part SUBCLAUSE § 15.223		RSS-210 Issue 8	
Fundamental Frequency (MHz)	Field strength of Fundamental (µV/m)	Measurement distance (m)	
1.705 – 10.0	[15] or [6dB-BW(kHz) / F(MHz)] Whichever is higher	30	

Result:

*Recalculation to a measurement distance of 30m with a correction of 40 dB/decade.

TEST CONDITIONS		MAXIMUM POWER (dBµV/m)	
Frequency		3.84 MHz	3.84 MHz
EUT 1: 0800149		at 10 m distance	at 30 m distance
T _{nom}	V _{nom}	34.5	14.5*
EUT 2: 0800151		at 10 m distance	at 30 m distance
T _{nom}	V _{nom}	34.0	14.0*
EUT 3: 0800153		at 10 m distance	at 30 m distance
T _{nom}	V _{nom}	33.5	13.5*
Measurement uncertainty		±3dB	

Result: The result of the measurement is passed.

9.4 Fieldstrength of the harmonics and spurious

Measurement:

Measurement parameter	
Detector:	Average / Quasi Peak
Sweep time:	Auto
Resolution bandwidth:	3 kHz - 120 kHz
Video bandwidth:	Comparable to RBW
Trace-Mode:	Max hold

Limits:

FCC		IC	
Field strength of the harmonics and spurious.			
Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)	
0.009 – 0.490	2400/F(kHz)	300	
0.490 – 1.705	24000/F(kHz)	30	
1.705 – 30	30 (29.5 dBµV/m)	30	
30 – 88	100 (40 dBµV/m)	3	
88 – 216	150 (43.5 dBµV/m)	3	
216 – 960	200 (46 dBµV/m)	3	


Result: EUT No. 3 0800149

EMISSION LIMITATIONS				
f [MHz]	Detector	Limit max. allowed [dBµV/m]	Amplitude of emission [dBµV/m]	Results
No critical peaks found!				

Result: The result of the measurement is passed.

Plots of the measurements EUT No. 3 0800149

Plot 1: 9 kHz – 30 MHz magnetic

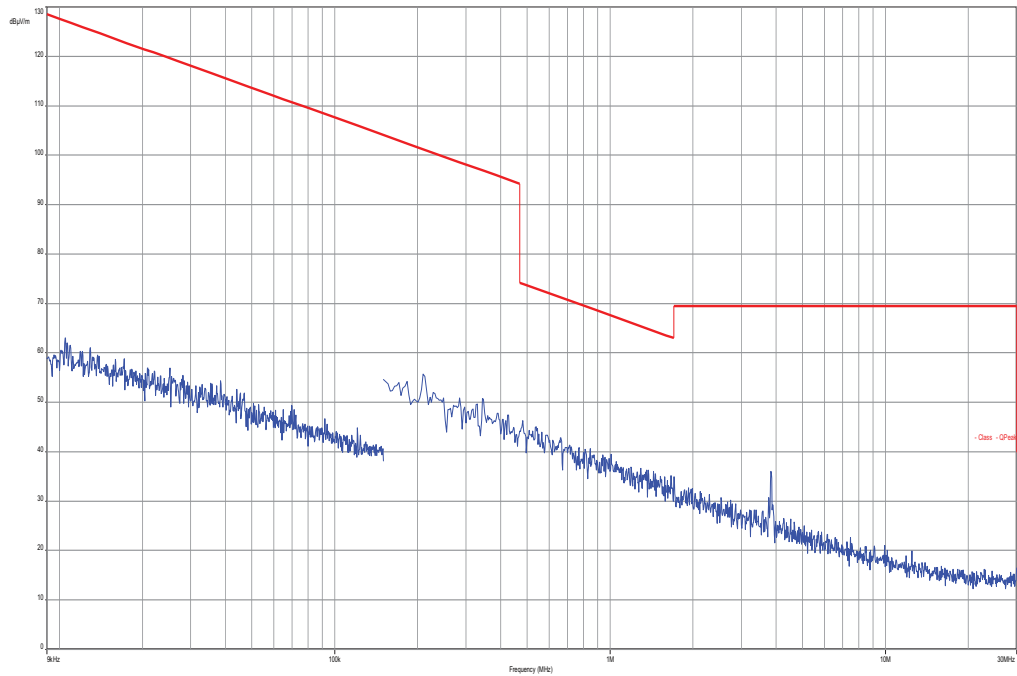

Plot 2: 30 MHz – 1000 MHz

CETECOM ICT Services GmbH


Common Information

EUT: Streamer Pro + nec loop antenna
 Serial Number: 0148
 Test Description: FCC part 15 C class B @ 10 m
 Operating Conditions: nec loop mode + charging
 Operator Name: Wolsdorfer
 Comment: AC: 115 V / 60 Hz

Scan Setup: STAN_Fin [EMI radiated]

Hardware Setup: Electric Field (NOS)
 Receiver: [ESCI 3]
 Level Unit: dBµV/m

Subrange	Step Size	Detectors	IF BW	Meas. Time	Preamp
30 MHz - 2 GHz	60 kHz	QPK	120 kHz	1 s	20 dB

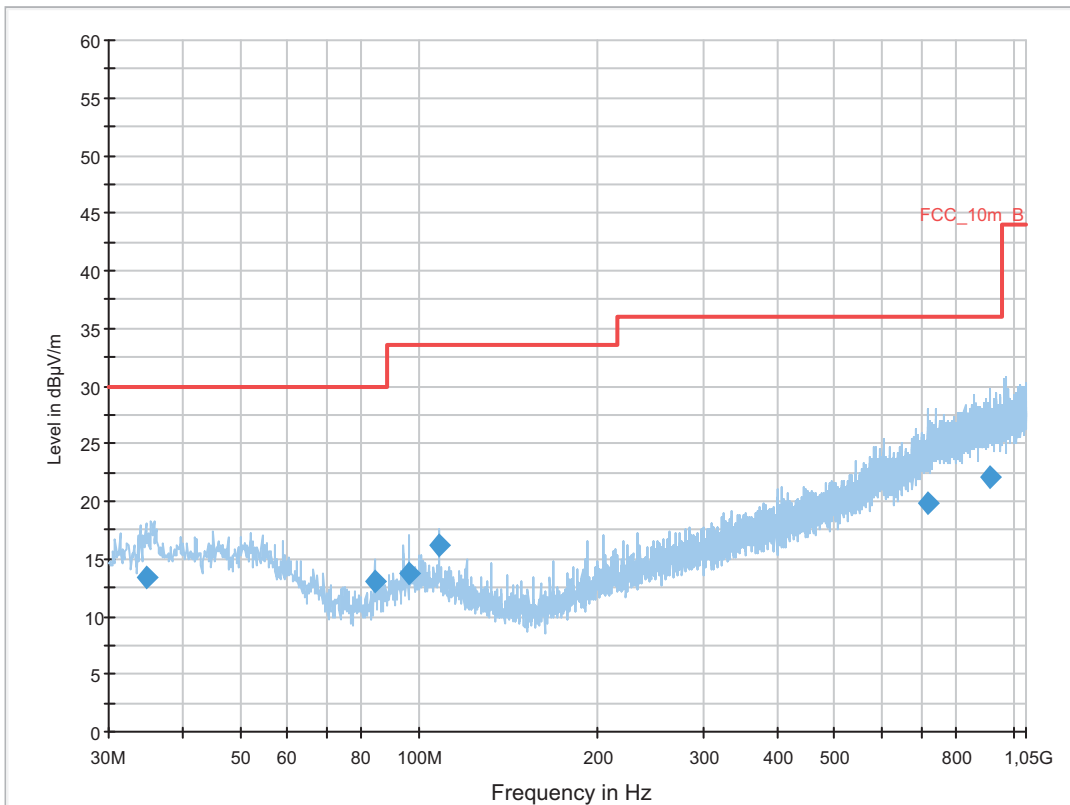

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)	Comment
34.761750	13.4	1000.0	120.000	132.0	V	-2.0	13.0	16.6	30.0	
84.001350	13.1	1000.0	120.000	170.0	V	280.0	9.7	16.9	30.0	
96.017400	13.8	1000.0	120.000	120.0	V	171.0	11.4	19.7	33.5	
108.024150	16.2	1000.0	120.000	104.0	V	100.0	11.2	17.3	33.5	
719.129550	19.8	1000.0	120.000	105.0	H	190.0	23.0	16.2	36.0	
912.715200	22.0	1000.0	120.000	170.0	V	261.0	25.2	14.0	36.0	

Hardware Setup: EMI radiated\Electric Field (NOS) - [EMI radiated]

Subrange 1

Frequency Range: 30 MHz - 2 GHz

Receiver: Receiver [ESCI 3]
@ GPIB0 (ADR 20), SN 100083/003, FW 4.42

Signal Path: without Notch
FW 1.0

Antenna: VULB 9163
SN 9163-295, FW ---
Correction Table (vertical): VULP6113
Correction Table (horizontal): VULP6113
Correction Table (vertical): Cable_EN_1GHz (1005)
Correction Table (horizontal): Cable_EN_1GHz (1005)

Antenna Tower: Tower [EMCO 2090 Antenna Tower]
@ GPIB0 (ADR 8), FW REV 3.12

Turntable: Turntable [EMCO Turntable]
@ GPIB0 (ADR 9), FW REV 3.12

EMC 32 Version 8.52

9.5 Receiver spurious emissions

Not applicable, no active receiver part is included in the radio module

9.6 Conducted limits

Measurement:

Measurement parameter	
Detector:	Peak - Quasi Peak / Average
Sweep time:	Auto
Video bandwidth:	F < 150 kHz: 200 Hz F > 150 kHz: 9 kHz
Resolution bandwidth:	F < 150 kHz: 1 kHz F > 150 kHz: 100 kHz
Span:	9 kHz to 30 MHz
Trace-Mode:	Max Hold

Limits:


FCC		IC	
CFR Part SUBCLAUSE § 15.223		RSS-210 Issue 8	
Conducted limits			
Frequency of Emission (MHz)	Conducted Limit (dBµV)		
	Quasi-peak	Average	
0.15 – 0.5	66 to 56 *	56 to 46 *	
0.5 – 5	56	46	
5 - 30	60	50	

*Decreases with the logarithm of the frequency


Result: Passed.

Plots of the measurement EUT No.3 0800151

Plot 1: 9 kHz – 30 MHz neutral line

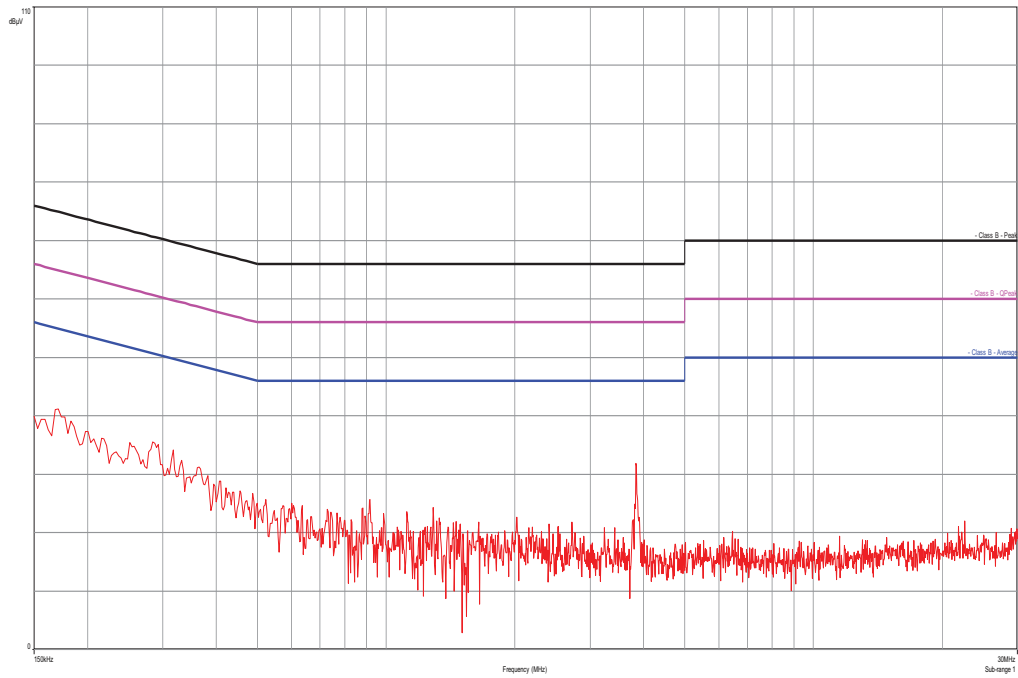

Plot 2: 9 kHz – 30 MHz phase line

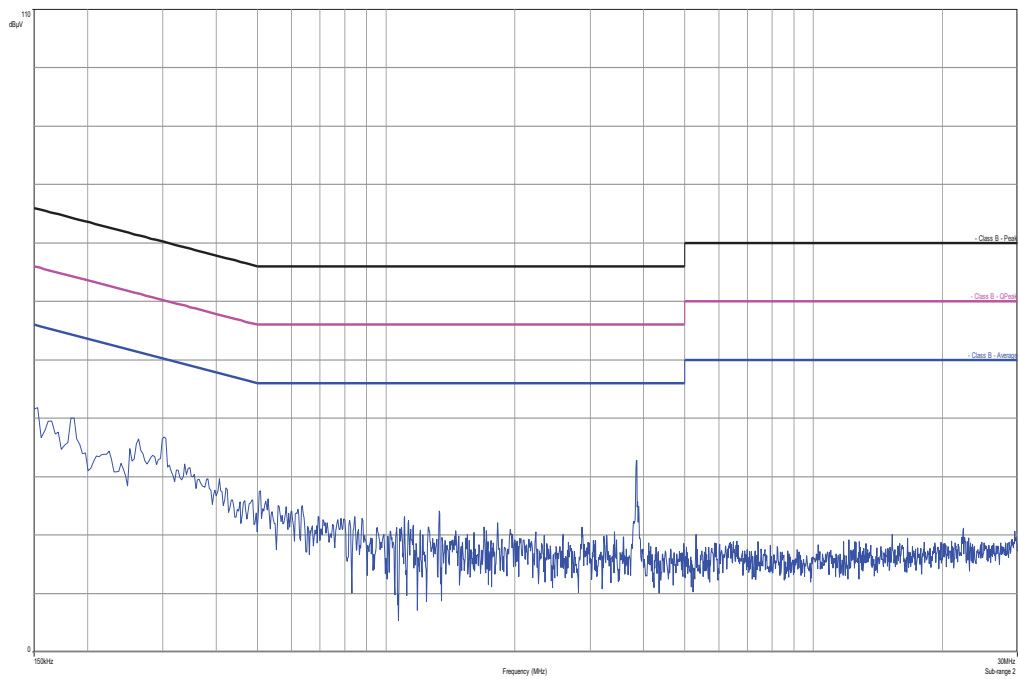

10 Test equipment and ancillaries used for tests

Typically, the calibrations of the test apparatus are commissioned to and performed by an accredited calibration laboratory. The calibration intervals are determined in accordance with the DIN EN ISO/IEC 17025. In addition to the external calibrations, the laboratory executes comparison measurements with other calibrated test systems or effective verifications. Weekly chamber inspections and range calibrations are performed. Where possible, rf-generating and signalling equipment as well as measuring receivers and analyzers are connected to an external high-precision 10 MHz reference (GPS-based or rubidium frequency standard).

In order to simplify the identification of the equipment used at some special tests, some items of test equipment and ancillaries can be provided with an identifier or number in the equipment list below (Labor/Item).

No.	Lab / Item	Equipment	Type	Manufact.	Serial No.	INV. No Cetecom	Kind of Calibration	Last Calibration	Next Calibration
1	n. a.	Isolating Transformer	RT5A	Grundig	8041	300001626	g		
2	n. a.	Active Loop Antenna	6502	EMCO	2210	300001015	ne		
3	n. a.	Anechoic chamber	FAC 3/5m	MWB / TDK	87400/02	300000996	ev		
4	Spec.A. 2_2e	System rack for EMI measurement solution	85900	HP I.V.	*	300000222	ne		
5	9	Artificial Mains 9 kHz to 30 MHz	ESH3-Z5	R&S	828576/020	300001210	Ve	06.01.2012	06.01.2014
6	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2719A15013	300001156	ne		
7	n. a.	Relais Matrix	PSU	R&S	890167/024	300001168	ne		
8	n. a.	Isolating Transformer	RT5A	Grundig	9242	300001263	ne		
9	n. a.	Three-Way Power Splitter, 50 Ohm	11850C	HP Meßtechnik		300000997	ne		
10	n. a.	Switch / Control Unit	3488A	HP Meßtechnik	2605e08770	300001443	ne		
11	n. a.	Amplifier	js42-00502650-28-5a	Parzich GMBH	928979	300003143	ne		
12	n. a.	Band Reject filter	WRCG185 5/1910-1835/1925-40/8SS	Wainwright	7	300003350	ev		
13	n. a.	Band Reject filter	WRCG240 0/2483-2375/2505-50/10SS	Wainwright	11	300003351	ev		
14	n. a.	Highpass Filter	WHKX2.9/1 8G-12SS	Wainwright	1	300003492	ev		
15	n. a.	Highpass Filter	WHK1.1/15 G-10SS	Wainwright	3	300003255	ev		
16	n. a.	Highpass Filter	WHKX7.0/1 8G-8SS	Wainwright	18	300003789	ne		
17	n. a.	TRILOG Broadband Test-Antenna 30 MHz - 3 GHz	VULB9163	Schwarzbeck	371	300003854	vKI!	14.10.2011	14.10.2014
18	n. a.	MXE EMI Receiver 20 Hz bis 26,5 GHz	N9038A	Agilent Technologies	MY51210197	300004405	k	19.12.2011	19.12.2012
19	n. a.	Power Supply	LA30/5GA	Zentro Elektronik	2046	300000711	NK!		
20	n. a.	EMI Test Receiver 9 kHz - 3 GHz incl. Preselector	ESPI3	R&S	101713	300004059	k	22.08.2012	22.08.2013

Agenda: Kind of Calibration

k	calibration / calibrated	EK	limited calibration
ne	not required (k, ev, izw, zw not required)	zw	cyclical maintenance (external cyclical maintenance)
ev	periodic self verification	izw	internal cyclical maintenance
Ve	long-term stability recognized	g	blocked for accredited testing
vlk!	Attention: extended calibration interval		
NK!	Attention: not calibrated	*)	next calibration ordered / currently in progress

11 Observations

No observations exceeding those reported with the single test cases have been made.