



SPORTON International Inc.


No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

Project No: CB10501347

Maximum Permissible Exposure Report

Applicant's company	Senao Networks Inc.
Applicant Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan
FCC ID	U2M-OAP8250AG
Manufacturer's company	Senao Networks, Inc.
Manufacturer Address	3F, No. 529, Chung Cheng Rd., Hsintien, Taipei, Taiwan

Product Name	Outdoor Wireless Access Point
Brand Name	SENAO EnGenius [®]
Model Name	OAP8250AG & OAP8251AG & EWS870AP & EWS871AP
Ref. Standard(s)	47 CFR FCC Part 2 Subpart J, section 2.1091
Received Date	Nov. 10, 2015
Final Test Date	Jun. 02, 2016
Submission Type	Original Equipment

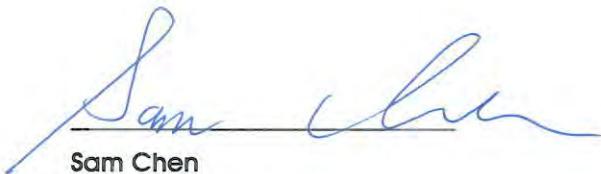

Sam Chen

SPORTON INTERNATIONAL INC.





Table of Contents

1. GENERAL DESCRIPTION.....	1
1.1. EUT General Information	1
1.2. Table for Multiple List.....	1
1.3. Testing Location.....	1
2. MAXIMUM PERMISSIBLE EXPOSURE.....	2
2.1. Limit of Maximum Permissible Exposure	2
2.2. MPE Calculation Method	2
2.3. Calculated Result and Limit.....	3



History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA541521AA	Rev. 01	Initial issue of report	Aug. 17, 2016

1. GENERAL DESCRIPTION

1.1. EUT General Information

RF General Information			
Evaluation Mode	Frequency Range (MHz)	Operating Frequency (MHz)	Modulation Type
2.4GHz WLAN	2400-2483.5	2412-2462	802.11b: DSSS (DBPSK, DQPSK, CCK) 802.11g/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)
5GHz WLAN	5150-5250 5725-5850	5180-5240 5745-5825	802.11a/n: OFDM (BPSK, QPSK, 16QAM, 64QAM) 802.11ac: OFDM (BPSK, QPSK, 16QAM, 64QAM, 256QAM)

1.2. Table for Multiple List

The model names are identical to each other in all aspects except for the following table:

Equipment	EUT	Model Name	Internal Antenna	External Antenna	Equipped Antenna
Outdoor Wireless Access Point	1	OAP8251AG EWS871AP	X	V	Set 1~2
	2	OAP8250AG EWS870AP	V	X	Set 3

1.3. Testing Location

Testing Location		
<input type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-327-0973
<input checked="" type="checkbox"/>	JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

2. MAXIMUM PERMISSIBLE EXPOSURE

2.1. Limit of Maximum Permissible Exposure

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

2.2. MPE Calculation Method

The MPE was calculated at 25 cm to show compliance with the power density limit.

The following formula was used to calculate the Power Density:

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

2.3. Calculated Result and Limit

Exposure Environment: General Population / Uncontrolled Exposure

For EUT 1

For Non-Beamforming Mode

For 5GHz Band:

Antenna Type : Dipole Antenna

Conducted Power for IEEE 802.11a: 27.36dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	6.01	3.9902	27.3596	544.4553	0.276753	1	Complies

For 2.4GHz Band:

Antenna Type : Dipole Antenna

Conducted Power for IEEE 802.11g: 27.88 dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	4.50	2.8184	27.8843	614.3639	0.220575	1	Complies

For Beamforming Mode
For 5GHz Band:
Antenna Type : Dipole Antenna
Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 23.47dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	12.03	15.9610	23.4707	222.3651	0.452123	1	Complies

Note:
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2.4GHz Band:
Antenna Type : Dipole Antenna
Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 25.47dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	10.52	11.2735	25.4673	352.1524	0.505733	1	Complies

Note:
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.452123 / 1 + 0.505733 / 1 = 0.957856$, which is less than "1". This confirmed that the device complies.

For EUT 2

For Non-Beamforming Mode

For 5GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 28.41dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	6.25	4.2170	28.4060	692.7817	0.372157	1	Complies

For 2.4GHz Band:

Antenna Type : PIFA Antenna

Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 28.63dBm

Distance (cm)	Test Freq. (MHz)	Antenna Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	6.45	4.4157	28.6295	729.3666	0.410276	1	Complies

For Beamforming Mode
For 5GHz Band:
Antenna Type : PIFA Antenna
Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 23.59dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	5785	12.09	16.1673	23.5851	228.3024	0.470197	1	Complies

Note:
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

For 2.4GHz Band:
Antenna Type : PIFA Antenna
Conducted Power for IEEE 802.11ac MCS0/Nss1 (VHT20): 23.91dBm

Distance (cm)	Test Freq. (MHz)	Directional Gain (dBi)	Antenna Gain (numeric)	The maximum combined Average Output Power		Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)	Test Result
				(dBm)	(mW)			
25	2437	12.04	16.0139	23.9127	246.1917	0.502227	1	Complies

Note:
$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

Conclusion:

Both of the WLAN 2.4GHz Band and WLAN 5GHz Band can transmit simultaneously, the formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

Therefore, the worst-case situation is $0.470197 / 1 + 0.502227 / 1 = 0.972423$, which is less than "1". This confirmed that the device complies.