

# FCC TEST REPORT

For

**Z-Wave In-Wall Paddle Dimmer 0-10V 120/277V**

**Model Number: ZW3010DV**

**FCC ID: U2ZZW3010DV**

**Report Number : WT208001512**

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection  
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan,  
Shenzhen, China  
Tel : 0086-755-86928965  
Fax : 0086-755-86009898-31396  
Web : [www.smq.com.cn](http://www.smq.com.cn)  
Email : [emcrf@smq.com.cn](mailto:emcrf@smq.com.cn)

## Test report declaration




Applicant : SHEENWAY ASIA LTD.  
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim Sha Tsui, Kowloon, Hong Kong, China  
Manufacturer : SHEENWAY ASIA LTD.  
Address : Room1313, 13/F, Austin Tower, 22-26 Austin Avenue, Tsim Sha Tsui, Kowloon, Hong Kong, China  
EUT Description : Z-Wave In-Wall Paddle Dimmer 0-10V 120/277V  
Model No. : ZW3010DV  
FCC ID : U2ZZW3010DV

Test Standards:

**FCC Part 15 (October 1, 2019 Edition)**  
**ANSI C63.10-2013**

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 and the energy emitted by the sample EUT tested as described in this report is in compliance with FCC Rules Part 15.249.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Project Engineer:  Date: Sep.08, 2020  
(Zhou Fangai)  
Checked by:  Date: Sep.08, 2020  
(Lin Yixiang)  
Approved by:  Date: Sep.08, 2020  
(Lin Bin)

## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION</b> .....	<b>2</b>
<b>1. TEST RESULTS SUMMARY</b> .....	<b>4</b>
<b>2. GENERAL INFORMATION</b> .....	<b>5</b>
2.1. Report information.....	5
2.2. Laboratory Accreditation and Relationship to Customer .....	5
2.3. Measurement Uncertainty .....	6
<b>3. PRODUCT DESCRIPTION</b> .....	<b>7</b>
3.1. EUT Description .....	7
3.2. Block Diagram of EUT Configuration .....	7
3.3. Operating Condition of EUT .....	7
3.4. Special Accessories .....	7
3.5. Equipment Modifications .....	7
3.6. Support Equipment List.....	7
3.7. Test Conditions .....	7
<b>4. TEST EQUIPMENT USED</b> .....	<b>9</b>
<b>5. CONDUCTED EMISSION TEST</b> .....	<b>10</b>
5.1. Test Standard and Limit .....	10
5.2. Test Procedure.....	10
5.3. Test Arrangement .....	10
5.4. Test Data.....	10
<b>6. RADIATED EMISSION TEST</b> .....	<b>13</b>
6.1. Test Standard and Limit .....	13
6.2. Test Procedure.....	13
6.3. Test Arrangement .....	13
6.4. Test Data.....	14
<b>7. OCCUPIED BANDWIDTH</b> .....	<b>21</b>
7.1. Test Standard and Limit .....	21
7.2. Test Procedure.....	21
7.3. Test Arrangement .....	21
7.4. Test Data.....	21
<b>8. BAND EDGE</b> .....	<b>23</b>
8.1. Test Standard and Limit .....	23
8.2. Band Edge FCC 15.249(d) Limit .....	23
8.3. Test Procedure.....	23
8.4. Test Arrangement .....	23
8.5. Test Data.....	23
<b>9. ANTENNA REQUIREMENT</b> .....	<b>25</b>

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
Conducted Emission	15.207	Pass
Radiated Emission	15.249	Pass
Occupied Bandwidth	15.215	Pass
Band Edges	15.249	Pass
Antenna Requirement	15.203	Pass

Remark: "N/A" means "Not applicable."

## **2. GENERAL INFORMATION**

### **2.1. Report information**

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

### **2.2. Laboratory Accreditation and Relationship to Customer**

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

### **2.3. Measurement Uncertainty**

Conducted Emission

9 kHz~150 kHz 3.7dB

150 kHz~30MHz 3.3dB

Radiated Emission

30MHz~1000MHz 4.3dB

1GHz~6GHz 4.6 dB

6GHz~18GHz 5.1dB


### 3. PRODUCT DESCRIPTION

#### 3.1. EUT Description

Description : Z-Wave In-Wall Paddle Dimmer 0-10V 120/277V  
Manufacturer : SHEENWAY ASIA LTD.  
Model Number : ZW3010DV  
Rated Input : AC 120V/60Hz, AC 277V/60Hz  
Power supply : AC 120V/60Hz, AC 277V/60Hz  
Operate Frequency : 908.4MHz, 916MHz  
Modulation : 908.4MHz: FSK, 916MHz: GFSK  
Antenna Designation : Helical Antenna

Remark:--

#### 3.2. Block Diagram of EUT Configuration

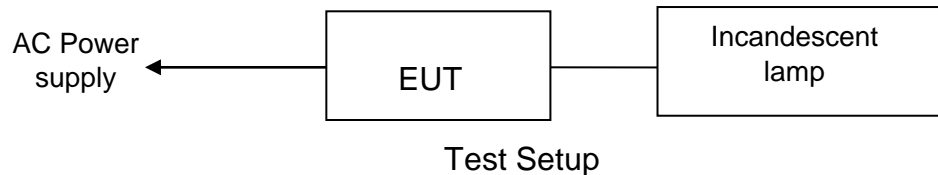

#### 3.3. Operating Condition of EUT

Test Mode 1: Transmitting at 908.4MHz  
Test Mode 2: Transmitting at 916MHz

#### 3.4. Special Accessories

Not available for this EUT intended for grant.

#### 3.5. Equipment Modifications

Not available for this EUT intended for grant.

#### 3.6. Support Equipment List

Table 2 Support Equipment List

Name	Model No	S/N	Manufacturer
Incandescent lamp	--	--	--

#### 3.7. Test Conditions

Date of test: Jun.09, 2020 – Aug.07, 2020

Date of EUT Receive: Jun.19, 2019  
Temperature: (22-24) °C  
Relative Humidity: (44-49) %



#### 4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB2603	Test Receiver	R&S	ESCS30	Feb.14,2020	1 Year
SB8501/06	AMN	R&S	ESH2-Z5	Feb.14,2020	1 Year
SB3436	Test Receiver	R&S	ESI26	Nov.07,2019	1 Year
SB3955	Broadband Antenna	Schwarzbeck	VULB9163	Jan.10,2020	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Feb.14,2020	1 Year
SB3435	Horn Antenna	R&S	HF906	Dec.17,2019	1 Year
SB9060	Signal Analyzer	R&S	FSQ40	May.18, 2020	1 Year

## 5. CONDUCTED EMISSION TEST

### 5.1. Test Standard and Limit

#### 5.1.1. Test Standard

FCC Part 15 15.207

#### 5.1.2. Test Limit

Table 4 Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB $\mu$ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

\*Decreasing linearly with logarithm of the frequency

\*The lower limit shall apply at the transition frequency.

### 5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). AN EMI test receiver is used to test the emissions from both sides of AC line. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

### 5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 5.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.


Test mode 1: Transmitting at 908.4MHz (worst-case)

Table 5 Conducted Emission Test Data


Test mode: 1							
Line							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.150	46.1	66	29.8	56	36.4	20.1	9.7
0.174	42.2	64.8	26.9	54.8	32.5	17.2	9.7
0.194	43.4	63.9	28.9	53.9	33.7	19.2	9.7
0.238	41.0	62.2	29.0	52.2	31.3	19.3	9.7
0.302	38.2	60.2	28.8	50.2	28.5	19.1	9.7
0.666	40.5	56	32.2	46	30.7	22.4	9.8
Neutral							
Frequency MHz	QP		AV		QP	AV	Factor (dB)
	Level (dBuV)	Limit (dBuV)	Level (dBuV)	Limit (dBuV)	Reading (dBuV)	Reading (dBuV)	
0.150	44.8	66	28.4	56	35.1	18.7	9.7
0.214	42.7	63.0	30.2	53.0	33.0	20.5	9.7
0.332	39.7	59.4	31.1	49.4	30.0	21.4	9.7
0.662	39.3	56	36.6	46	29.5	26.8	9.8
1.450	35.9	56	31.0	46	26.1	21.2	9.8
2.362	35.9	56	31.1	46	26.0	21.2	9.9

- REMARKS: 1. Emission level(dBuV)=Read Value(dBuV) + Correction Factor(dB)  
 2. Correction Factor(dB) =LISN Factor (dB) + Cable Factor (dB)+Limiter Factor(dB)  
 3. The other emission levels were very low against the limit.

## Line

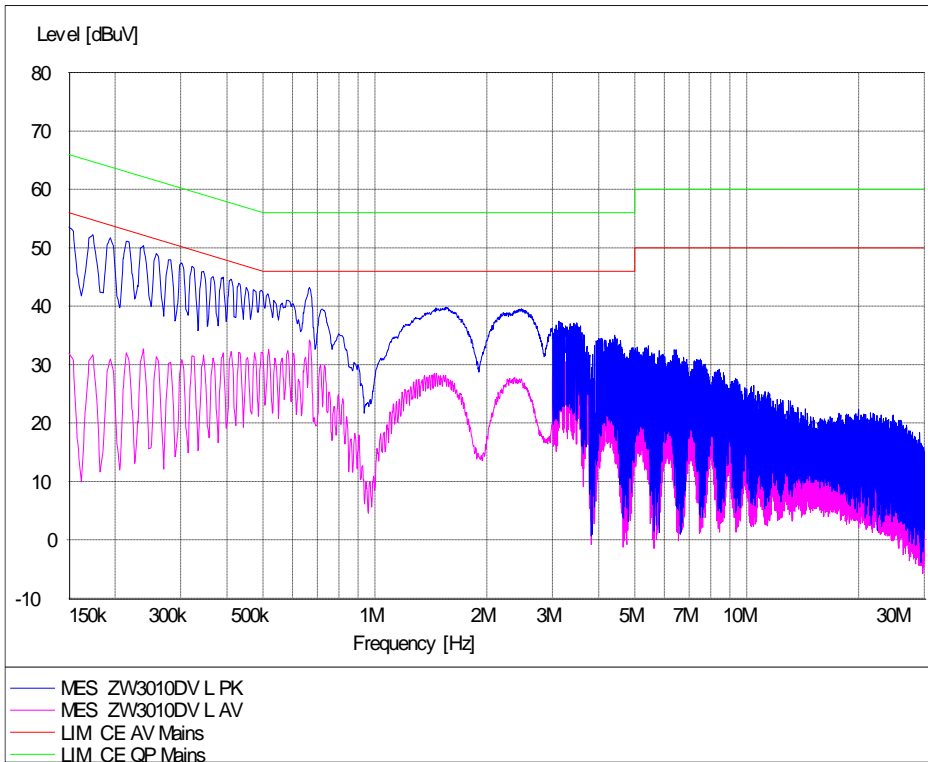

## Neutral

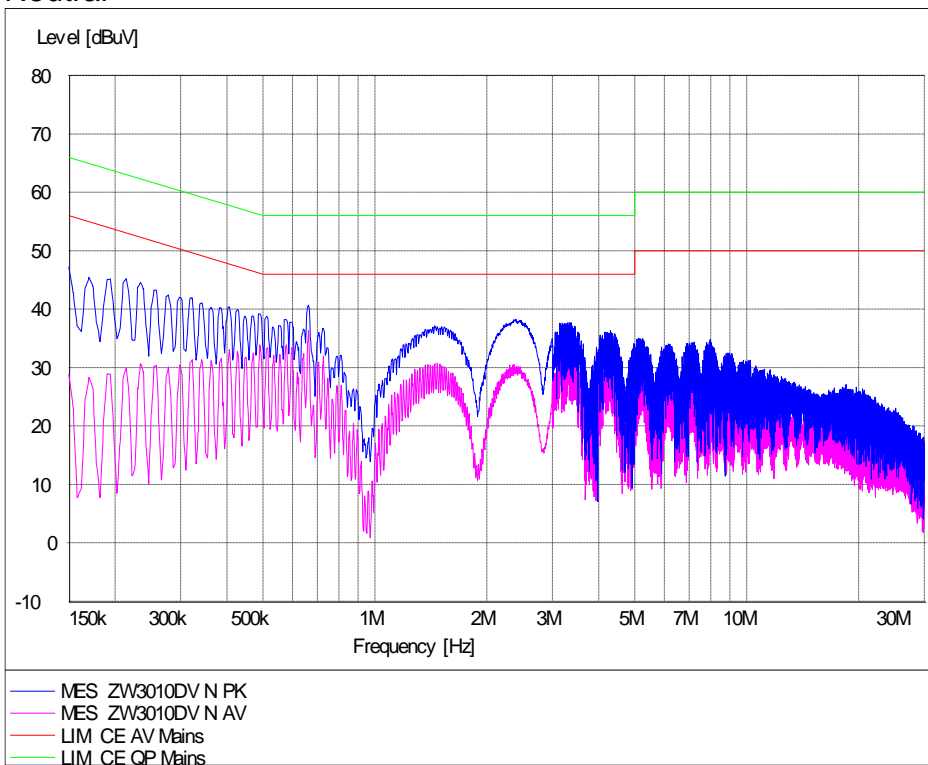

## 6. RADIATED EMISSION TEST

### 6.1. Test Standard and Limit

#### 6.1.1. Test Standard

FCC Part 15 15.249

#### 6.1.2. Test Limit

Table 6 Radiated Emission Test Limit

FREQUENCY MHz	FIELD STRENGTHS LIMITS ( $\mu\text{V/m}$ )	FIELD STRENGTHS LIMITS dB ( $\mu\text{V/m}$ )
Fundamental	50000	94.0
Harmonics	500	54.0
30 ~ 88	100	40.0
88 ~ 216	150	43.5
216 ~ 960	200	46.0
960 ~	500	54.0

\* The lower limit shall apply at the transition frequency.

\* The test distance is 3m.

### 6.2. Test Procedure

Radiated emission test below 1 GHz, test at SAC, the EUT is placed on a turntable, which is 0.8 meter above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can move up and down to find out the maximum emission level. Radiated emission test above 1 GHz, test at FAR, the EUT is placed on a non-conductive table, which is 1.5 meter above ground. Broadband antenna is used as a receiving antenna at frequency range 30MHz to 1000MHz, Horn antenna is used as a receiving antenna at frequency range above 1GHz. Both horizontal and vertical polarization of the antenna is set on test, in order to find out the max emission, the relative positions of this EUT were rotated through three orthogonal axes.

The RBW of the EMI test receiver is:

30~1000MHz 120 KHz

1000-18000MHz 1MHz

### 6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture. The EUT shall be measured in the XYZ three positions, and the test data which was shown in the

follow was the worst case.

#### 6.4. Test Data

The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 7 Radiated Emission Test Data

Test mode: 1								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB $\mu$ V)	Emission Level dB ( $\mu$ V/m)	Limits dB ( $\mu$ V/m)	EUT axes	Note
31.072	Vertical	0.6	12.3	15.6	28.5	40	X	QP
43.394	Vertical	0.7	13.6	7.9	22.2	40	X	QP
51.145	Vertical	0.8	13.3	6.3	20.4	40	X	QP
908.403	Vertical	3.9	21.1	60.9	85.9	94	X	Fundamental QP
6358.911	Vertical	-35.1	34.7	52.3	51.9	74	X	PK
6358.911	Vertical	-35.1	34.7	41.6	41.2	54	X	AV
8175.309	Vertical	-37.7	36.1	53.5	51.9	74	X	PK
8175.309	Vertical	-37.7	36.1	42.6	41.0	54	X	AV
55.190	Horizontal	0.8	13.0	4.3	18.1	40	X	QP
100.170	Horizontal	1.1	13.2	1.3	15.6	43.5	X	QP
192.014	Horizontal	1.6	10.6	0.6	12.8	43.5	X	QP
908.407	Horizontal	3.9	21.1	62.3	87.3	94	X	Fundamental QP
8175.682	Horizontal	-37.7	36.1	54.3	52.7	74	X	PK
8175.682	Horizontal	-37.7	36.1	43.4	41.8	54	X	AV
9752.900	Horizontal	-35.5	37.1	51.1	52.7	74	X	PK
9752.900	Horizontal	-35.5	37.1	37.1	38.7	54	X	AV

Table 8 Radiated Emission Test Data

Test mode: 2								
Frequency (MHz)	Polarization	Correction Factor (dB)	Antenna Factor (dB/m)	Reading Value (dB $\mu$ V)	Emission Level dB ( $\mu$ V/m)	Limits dB ( $\mu$ V/m)	EUT axes	Note
55.691	Horizontal	0.9	13.0	4.0	17.9	40	X	QP
99.321	Horizontal	1.1	12.8	0.7	14.6	43.5	X	QP
196.024	Horizontal	1.6	10.6	0.5	12.7	43.5	X	QP
916.006	Horizontal	3.9	21.1	60.7	85.7	94	X	Fundamental QP
4579.722	Horizontal	-39.2	33.7	50.5	45.0	74	X	PK
4579.722	Horizontal	-39.2	33.7	39.7	34.2	54	X	AV
9607.518	Horizontal	-36.5	37.1	51.8	52.4	74	X	PK
9607.518	Horizontal	-36.5	37.1	37.7	38.3	54	X	AV
31.284	Vertical	0.6	12.3	14.7	27.6	40	X	QP
44.260	Vertical	0.7	13.6	8.5	22.8	40	X	QP
52.374	Vertical	0.7	13.3	7.9	21.9	40	X	QP
916.006	Vertical	3.9	21.1	59.1	84.1	94	X	Fundamental QP
6411.958	Vertical	-34.5	34.8	51.4	51.7	74	X	PK
6411.958	Vertical	-34.5	34.8	41.9	42.2	54	X	AV
8244.072	Vertical	-37.6	36.5	53.8	52.7	74	X	PK
8244.072	Vertical	-37.6	36.5	44.3	43.2	54	X	AV

- Note: 1. Emission level (dB $\mu$ V/m)=Reading Value(dBuV) + Correction Factor(dB)+Antenna Factor (dB/m)  
 2. Correction Factor (dB) = Cable Factor (dB)+Amplifier Factor(dB)  
 3. No other spurious and harmonic emissions were reported greater than listed emissions above table.


Table 9 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	
6.31175 - 6.31225	123 - 138	2200 - 2300	
8.291 - 8.294	149.9 - 150.05	2310 - 2390	
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	
12.29 - 12.293	167.72 - 173.2	3332 - 3339	
12.51975 -	240 - 285	3345.8 - 3358	
12.52025	322 - 335.4	3600 - 4400	
12.57675 -			
12.57725			
13.36 - 13.41			


All the emission levels of the above band were less than the limit 20dB.




Test mode 1, below 1GHz, Horizontal

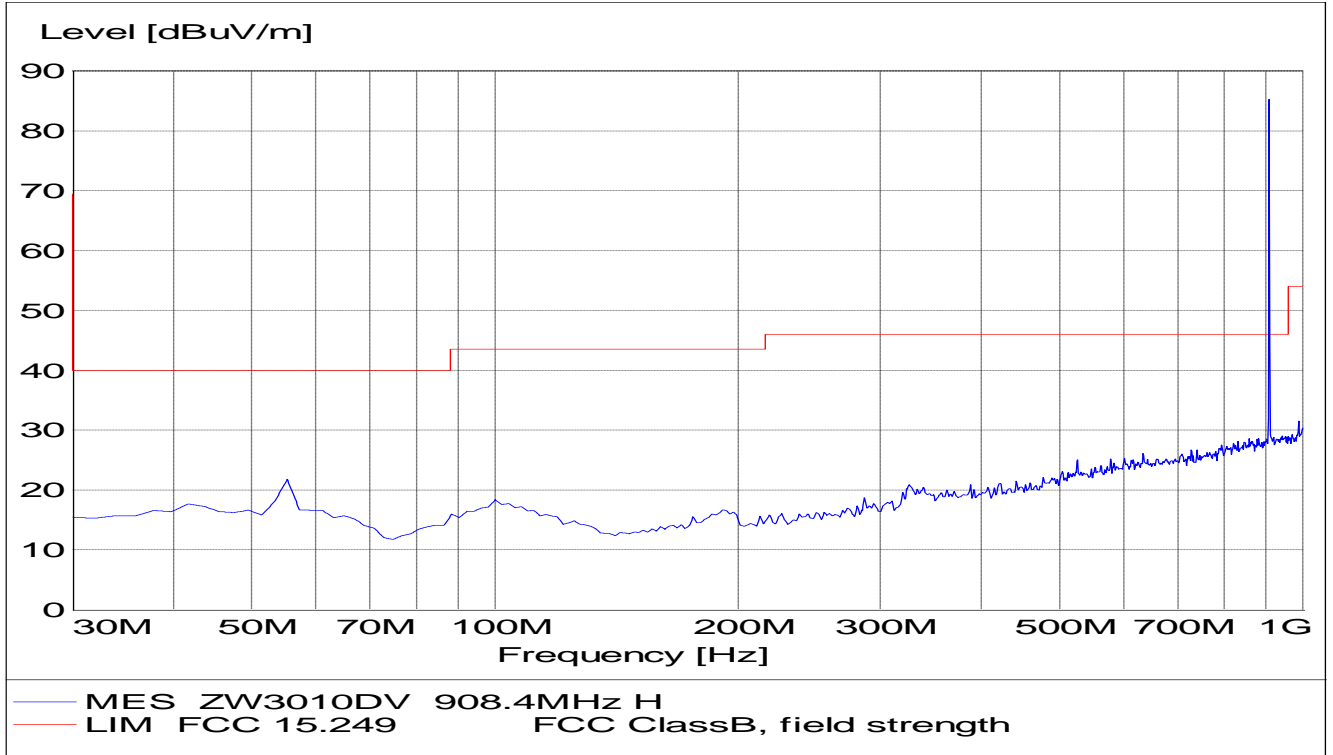


Test mode 1, below 1GHz, Vertical

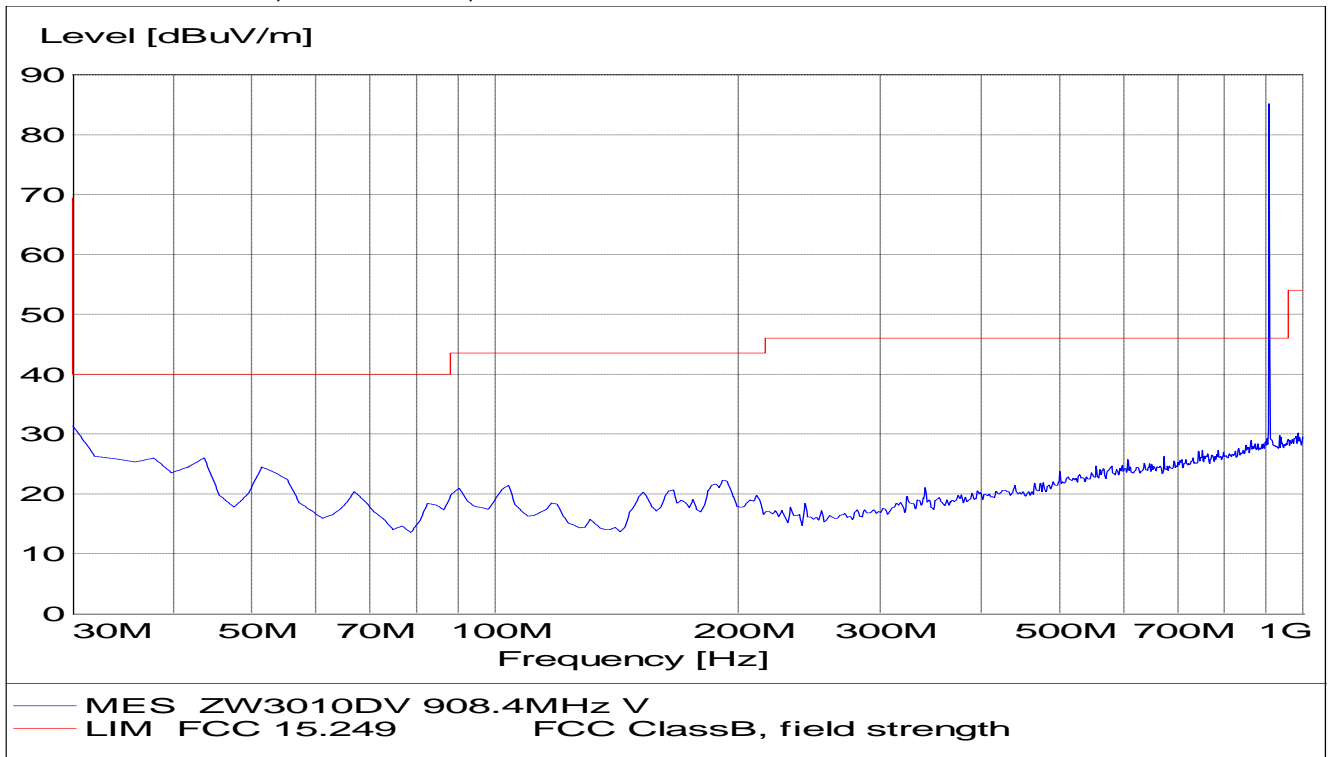


Test mode 1, above 1GHz, Horizontal

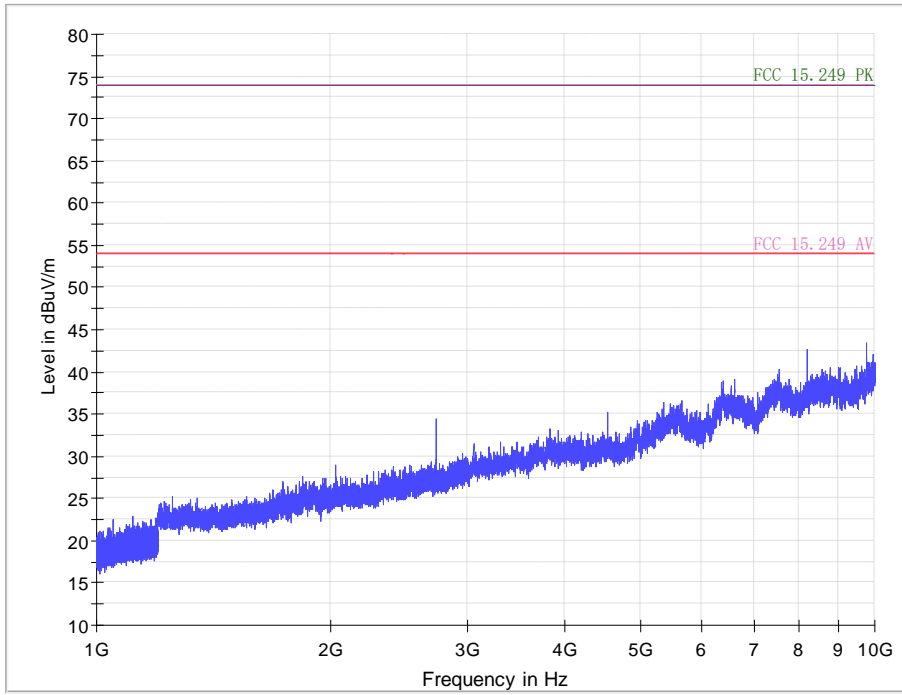


Test mode 1, above 1GHz, Vertical

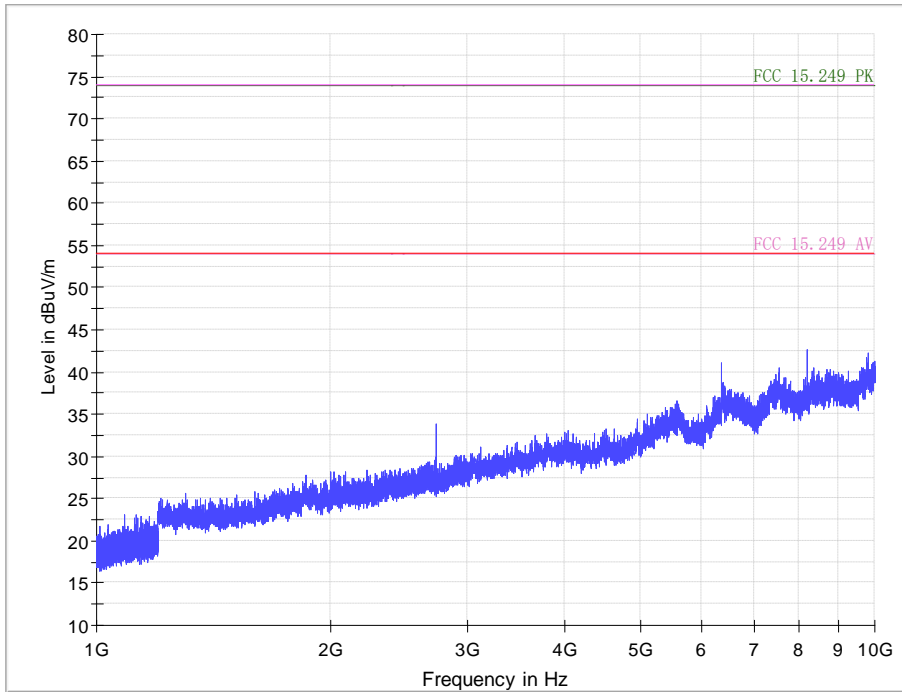


Test mode 2, below 1GHz, Horizontal

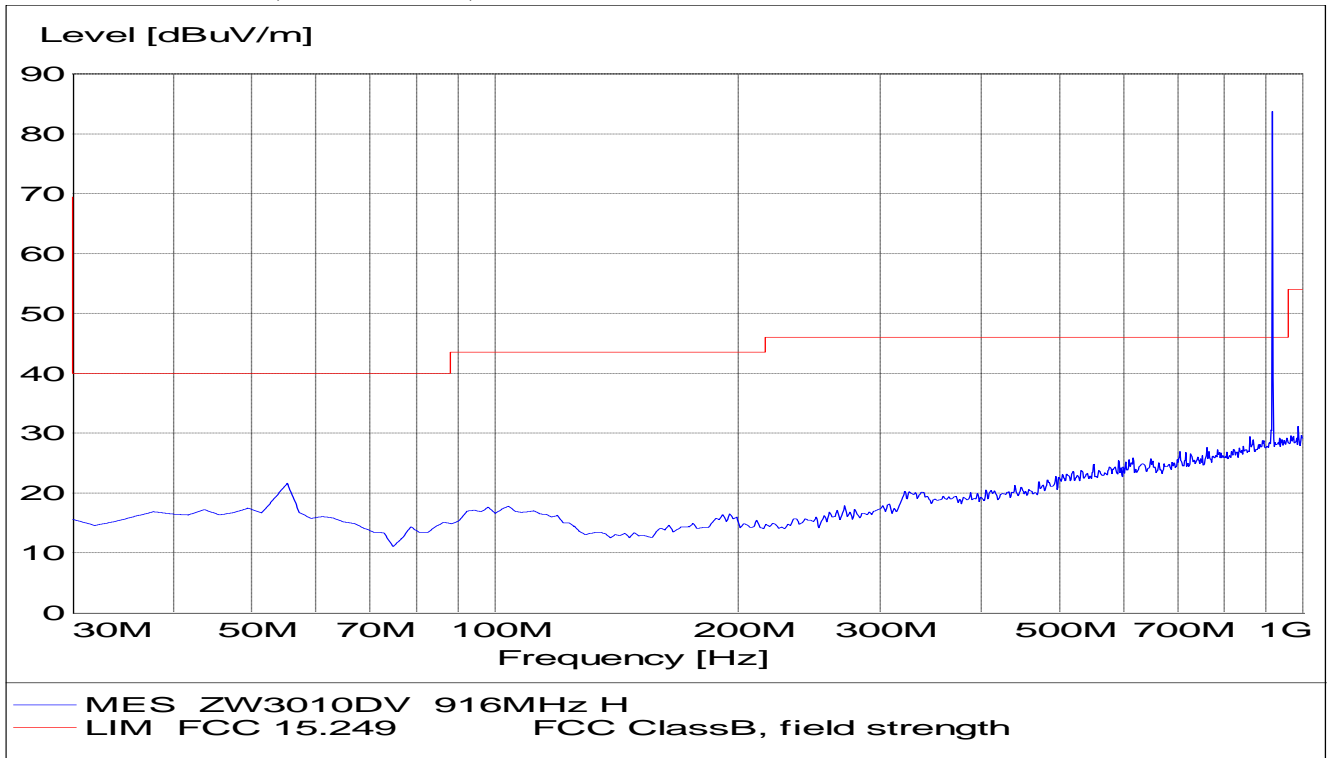


Test mode 2, below 1GHz, Vertical

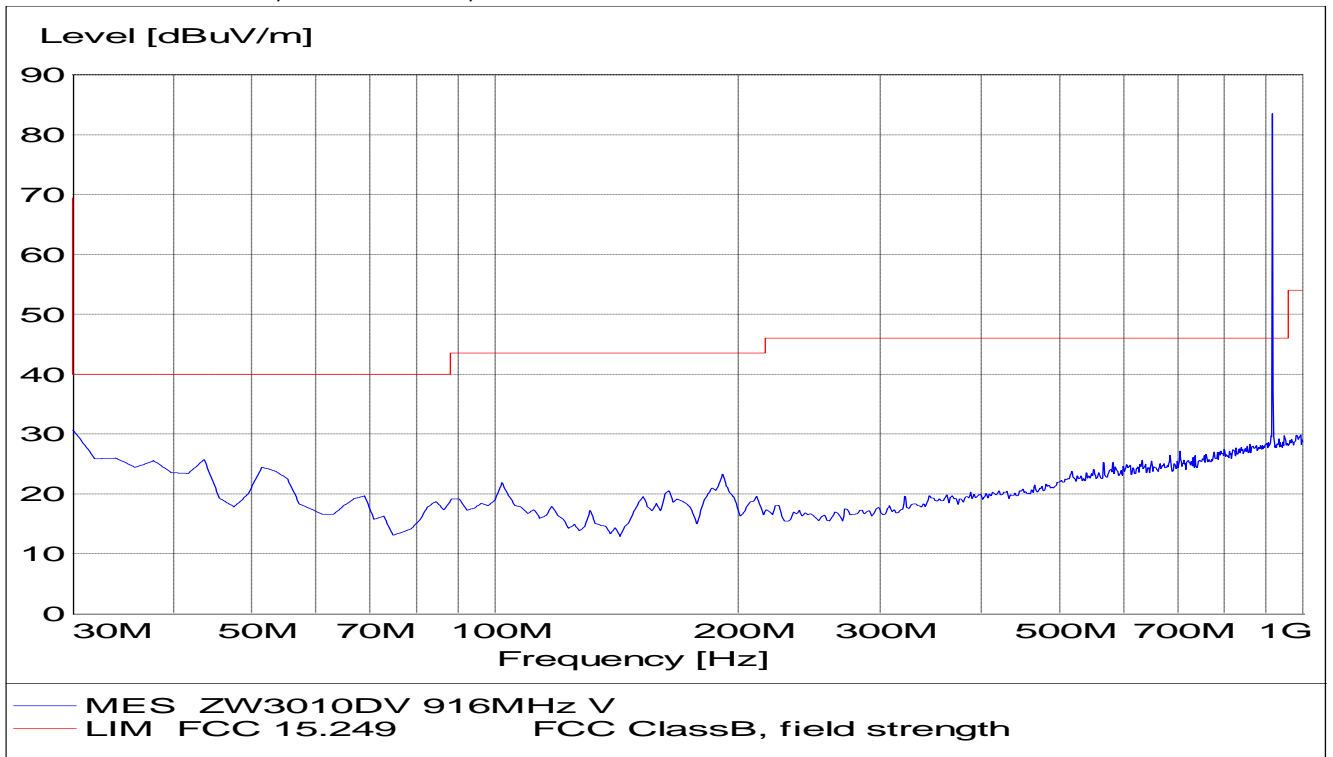

### Test mode 2, above 1GHz, Horizontal

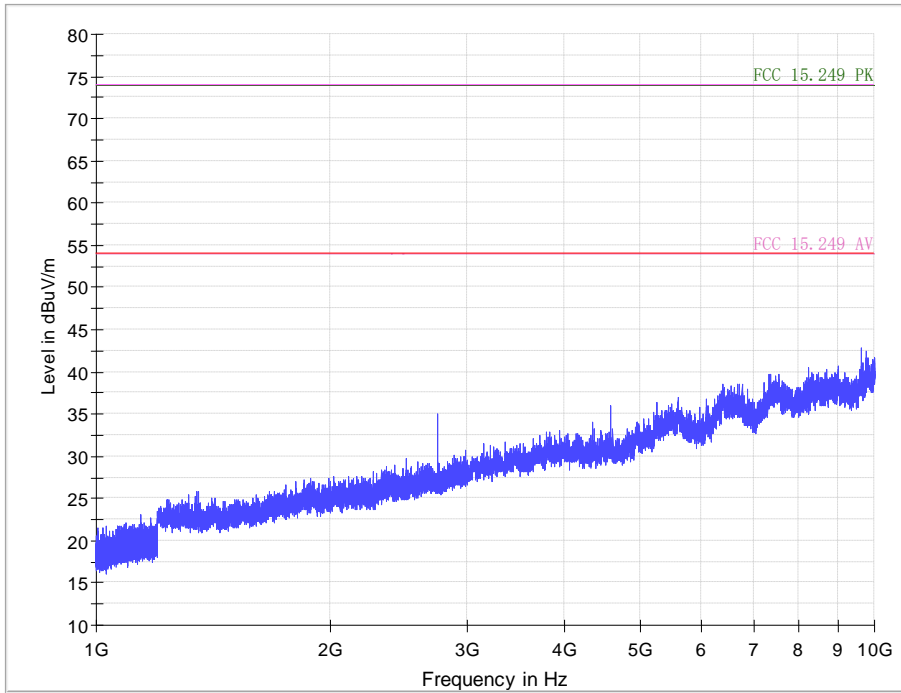

### Test mode 2, above 1GHz, Vertical

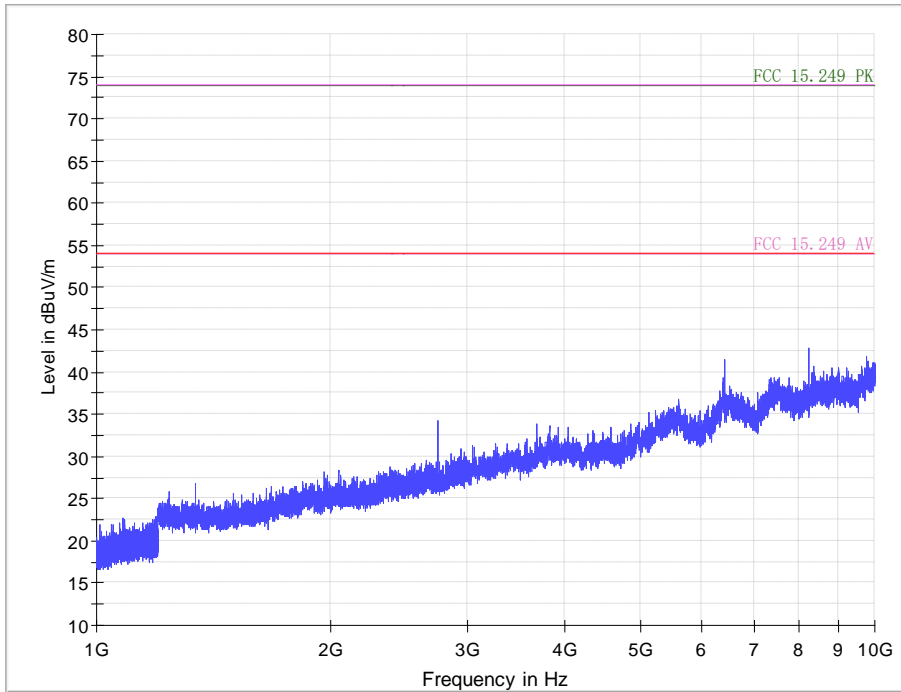

## 7. OCCUPIED BANDWIDTH

### 7.1. Test Standard and Limit

#### 7.1.1. Test Standard

FCC Part 15 15.215

### 7.2. Test Procedure


1. Set EUT as normal operation
2. Set EMI test receiver Center Frequency = fundamental frequency, RBW=1% to 5% of the OBW, VBW=3 times of RBW, Span=Wide enough to capture the complete power envelope.
3. Set EMI test receiver Max hold. Mark peak, -20dB.

### 7.3. Test Arrangement


The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

### 7.4. Test Data

Transmitting at 908.4MHz: 20dB bandwidth =87.8 kHz

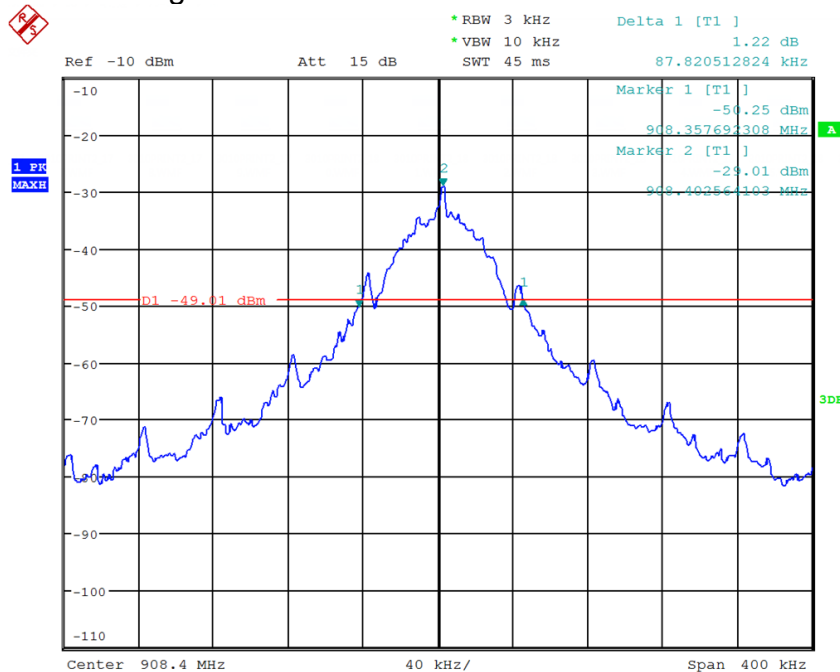

# Transmitting at 916MHz: 20dB bandwidth =146.8 kHz

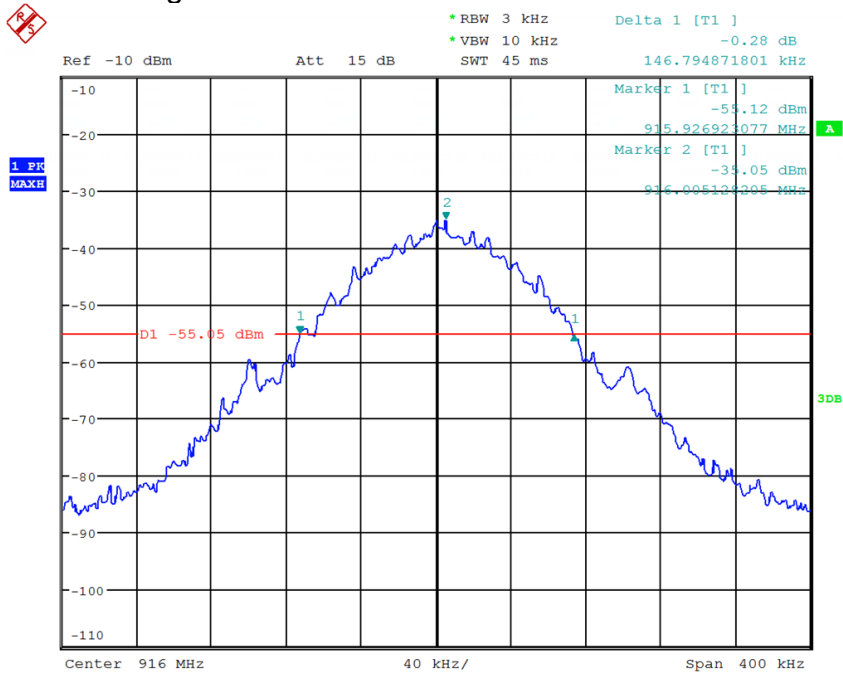

## **8. BAND EDGE**

### **8.1. Test Standard and Limit**

#### 8.1.1. Test Standard

FCC Part 15 15.249

### **8.2. Band Edge FCC 15.249(d) Limit**

Emission radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation

### **8.3. Test Procedure**

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instruments. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Measure the highest amplitude appearing on spectral display and set it as reference level. Plot the graph with marking the highest point and edge frequency.
4. Repeat above procedures until all measured frequencies were complete.


### **8.4. Test Arrangement**

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.


### **8.5. Test Data**

All the emission outside 902 to 928 is lower than 46 dB ( $\mu\text{V}/\text{m}$ ). The detailed information refers to test picture.

### Transmitting at 908.4MHz

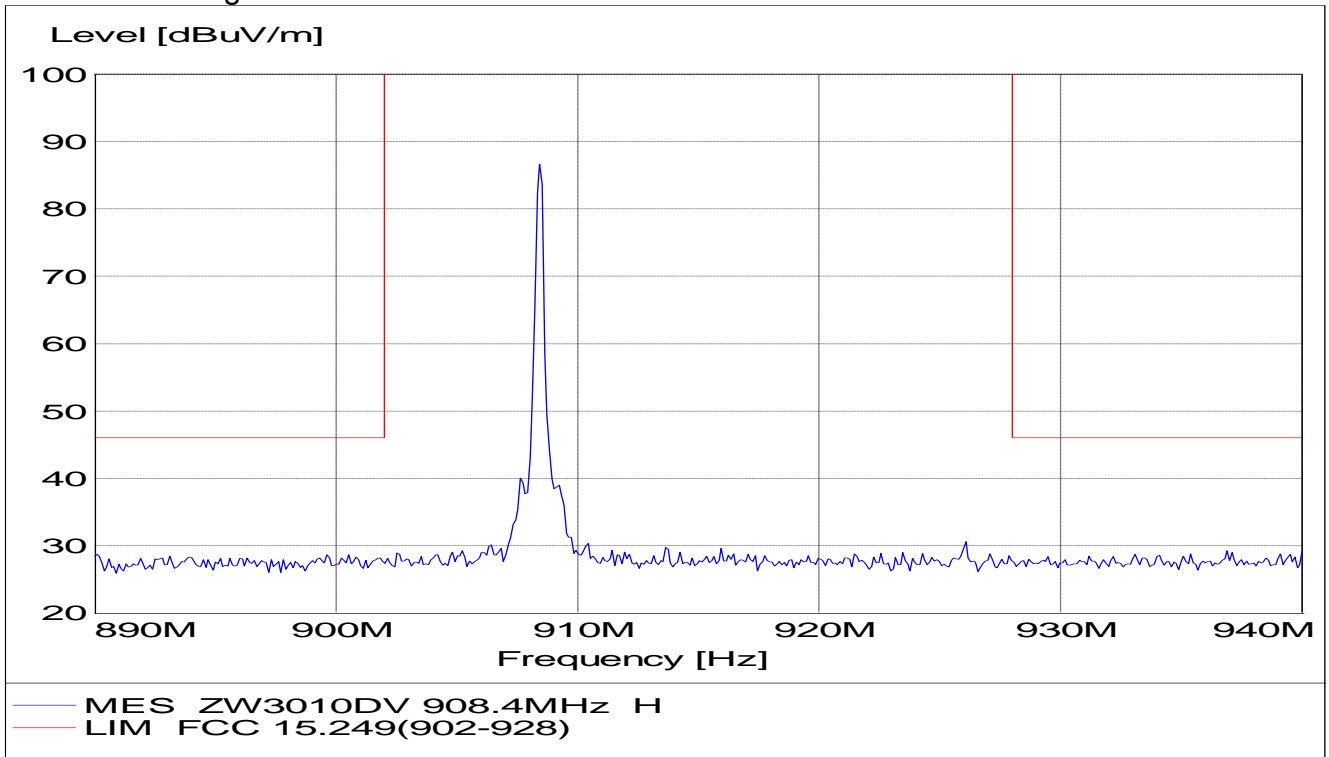

### Transmitting at 916MHz

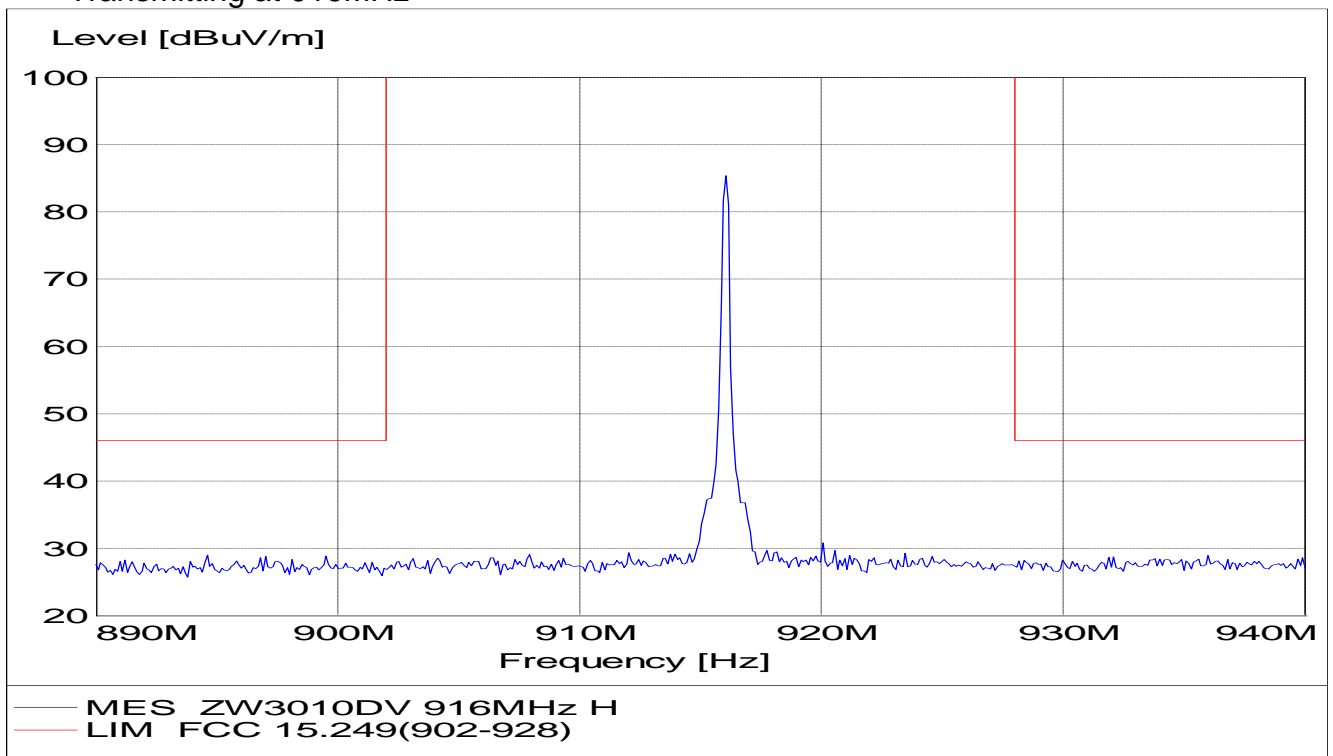



## 9. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The EUT has a built in antenna which is integrated inside the enclosure, this is permanently attached antenna and meets the requirements of this section.

-----End of Report-----