

# RADIO PERFORMANCE TEST REPORT

**Test Report No.** : OT-221-RWD-039  
**Reception No.** : 2201000065  
**Applicant** : BLUECOM Co., Ltd.  
**Address** : 116, Venture-ro, Yeonsu-gu, Incheon, South Korea  
**Manufacturer** : BLUECOM Co., Ltd.  
**Address** : 116, Venture-ro, Yeonsu-gu, Incheon, South Korea  
**Type of Equipment** : Bluetooth Earbuds  
**FCC ID.** : U3WT100ANC  
**Model Name** : T100 ANC  
**Multiple Model Name** : N/A  
**Serial number** : N/A  
**Total page of Report** : 48 pages (including this page)  
**Date of Incoming** : December 24, 2021  
**Date of issue** : January 19, 2022

## SUMMARY

The equipment complies with the regulation; *FCC PART 15 SUBPART C Section 15.247*

This test report only contains the result of a single test of the sample supplied for the examination.


It is not a generally valid assessment of the features of the respective products of the mass-production.



Tested by  
Joon-Woo, Kim / Assistant Manager  
ONETECH Corp.



Reviewed by  
Tae-Ho, Kim / Senior Manager  
ONETECH Corp.

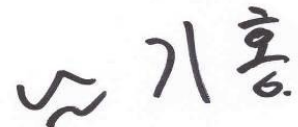

Approved by  
Ki-Hong, Nam / General Manager  
ONETECH Corp.

## CONTENTS

	Page
<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>5</b>
<b>2. TEST SUMMARY.....</b>	<b>6</b>
<b>2.1 Test items and results .....</b>	<b>6</b>
<b>2.2 Additions, deviations, exclusions from standards .....</b>	<b>6</b>
<b>2.3 Related Submittal(s) / Grant(s).....</b>	<b>6</b>
<b>2.4 Purpose of the test.....</b>	<b>6</b>
<b>2.5 Test Methodology .....</b>	<b>6</b>
<b>2.6 Test Facility .....</b>	<b>6</b>
<b>3. GENERAL INFORMATION.....</b>	<b>7</b>
<b>3.1 Product Description.....</b>	<b>7</b>
<b>3.2 Alternative type(s)/model(s); also covered by this test report.....</b>	<b>8</b>
<b>4. EUT MODIFICATIONS.....</b>	<b>8</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>9</b>
<b>5.1 Justification .....</b>	<b>9</b>
<b>5.2 Peripheral equipment .....</b>	<b>9</b>
<b>5.3 Mode of operation during the test.....</b>	<b>9</b>
<b>5.4 Configuration of Test System .....</b>	<b>12</b>
<b>6. PRELIMINARY TEST .....</b>	<b>12</b>
<b>6.1 AC Power line Conducted Emissions Tests .....</b>	<b>12</b>
<b>6.2 General Radiated Emissions Tests .....</b>	<b>12</b>
<b>7. MINIMUM 6 dB BANDWIDTH.....</b>	<b>13</b>
<b>7.1 Operating environment .....</b>	<b>13</b>
<b>7.2 Test set-up .....</b>	<b>13</b>
<b>7.3 Test Date.....</b>	<b>13</b>
<b>7.4 Test data for Bluetooth LE 1 Mbps.....</b>	<b>14</b>
<b>7.4.1 Test data for Left Earbud .....</b>	<b>14</b>
<b>7.4.2 Test data for Right Earbud.....</b>	<b>16</b>
<b>8. MAXIMUM PEAK OUTPUT POWER.....</b>	<b>18</b>
<b>8.1 Operating environment .....</b>	<b>18</b>
<b>8.2 Test set-up .....</b>	<b>18</b>
<b>8.3 Test Date.....</b>	<b>18</b>
<b>8.4 Test data for Bluetooth LE 1 Mbps.....</b>	<b>19</b>

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

8.4.1 Test data for Left Earbud .....	19
8.4.2 Test data for Right Earbud .....	21
<b>9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND .....</b>	<b>23</b>
9.1 Operating environment .....	23
9.2 Test set-up for conducted measurement .....	23
9.3 Test set-up for radiated measurement .....	23
9.4 Test Date .....	23
9.5 Test data for conducted emission (Bluetooth LE 1Mbps) .....	24
9.5.1 Test data for Left Earbud .....	24
9.5.2 Test data for Right Earbud .....	29
9.6 Test data for radiated emission .....	34
9.6.1 Radiated Emission which fall in the Restricted Band (Bluetooth LE 1 Mbps).....	34
9.6.2 Spurious & Harmonic Radiated Emission (Bluetooth LE 1 Mbps).....	36
<b>10. PEAK POWER SPECTRAL DENSITY .....</b>	<b>38</b>
10.1 Operating environment .....	38
10.2 Test set-up .....	38
10.3 Test Date .....	38
10.4 Test data for Bluetooth LE 1 Mbps.....	39
10.4.1 Test data for Left Earbud .....	39
10.4.2 Test data for Right Earbud .....	41
<b>11. RADIATED EMISSION TEST .....</b>	<b>43</b>
11.1 Operating environment .....	43
11.2 Test set-up .....	43
11.3 Test Date .....	43
11.4 Test data for Left Earbud .....	44
11.4.1 Test data for 30 MHz ~ 1000 MHz.....	44
11.4.2 Test data for Below 30 MHz.....	45
11.4.3 Test data for above 1 GHz .....	45
11.5 Test data for Right Earbud.....	46
11.5.1 Test data for 30 MHz ~ 1000 MHz.....	46
11.5.2 Test data for Below 30 MHz.....	47
11.5.3 Test data for above 1 GHz .....	47
<b>12. LIST OF TEST EQUIPMENT .....</b>	<b>48</b>

**Revision History**

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-221-RWD-039	January 19, 2022	Initial Release	All

## 1. VERIFICATION OF COMPLIANCE

Applicant : BLUECOM Co., Ltd.  
 Address : 116, Venture-ro, Yeonsu-gu, Incheon, South Korea  
 Contact Person : Ki-eok Park / Principal Engineer  
 Telephone No. : 82-32-8100-582  
 FCC ID : U3WT100ANC  
 Model Name : T100 ANC  
 Brand Name : N/A  
 Serial Number : N/A  
 Date : January 19, 2022

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Bluetooth Earbuds
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

## 2. TEST SUMMARY

### 2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note. : This test is not performed because the EUT is operated by DC battery.

### 2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

### 2.3 Related Submittal(s) / Grant(s)

Original submittal only

### 2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

### 2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

### 2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

### 3. GENERAL INFORMATION

#### 3.1 Product Description

The BLUECOM Co., Ltd., Model T100 ANC (referred to as the EUT in this report) is a Bluetooth Earbuds. The product specification described herein was obtained from product data sheet or user’s manual.

Device Type		Bluetooth Earbuds		
Operating Frequency		Bluetooth	2 402 MHz ~ 2 480 MHz	
		Bluetooth LE		
RF Output Power	Left Earbud	Bluetooth	1 Mbps	11.83 dBm
			2 Mbps	9.38 dBm
			3 Mbps	9.57 dBm
	Right Earbud	Bluetooth LE	1 Mbps	4.42 dBm
		Bluetooth	1 Mbps	12.21 dBm
			2 Mbps	9.51 dBm
			3 Mbps	9.73 dBm
		Bluetooth LE	1 Mbps	3.93 dBm
Number of Channel		Bluetooth	79 Channels	
		Bluetooth LE	40 Channels	
Modulation Type		Bluetooth	GFSK for 1 Mbps, $\pi/4$ -DQPSK for 2 Mbps, 8-DPSK for 3 Mbps	
		Bluetooth LE	GFSK	
Antenna Type	Left Earbud	FPCB Antenna		
	Right Earbud			
Antenna Gain	Left Earbud	0.39 dBi		
	Right Earbud	0.39 dBi		
List of each Osc. or crystal Freq.(Freq. $\geq$ 1 MHz)		32 MHz		
Rated Supply Voltage		DC 3.7 V		

**3.2 Alternative type(s)/model(s); also covered by this test report.**

-. None

**4. EUT MODIFICATIONS**

-. None



## 5. SYSTEM TEST CONFIGURATION

### 5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	BLUECOM Co., Ltd.	N/A	N/A
Battery	BLUECOM Co., Ltd.	N/A	N/A

### 5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
T100 ANC	BLUECOM Co., Ltd.	Bluetooth Earbuds (EUT)	-
XU100303-17037A	Lenovo	Notebook Computer	EUT

### 5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XY” axis, but the worst data was recorded in this report.

-. Frequency / Channel Operations

Channel	Frequency
0	2 402
19	2 440
39	2 480

### Duty cycle for Bluetooth LE 1 Mbps


-. Left Earbud

Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
Bluetooth LE	2.1325	0.3598	85.56	0.68

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor : 10 \* Log(1 / (Duty Cycle / 100))

-. Test Plot

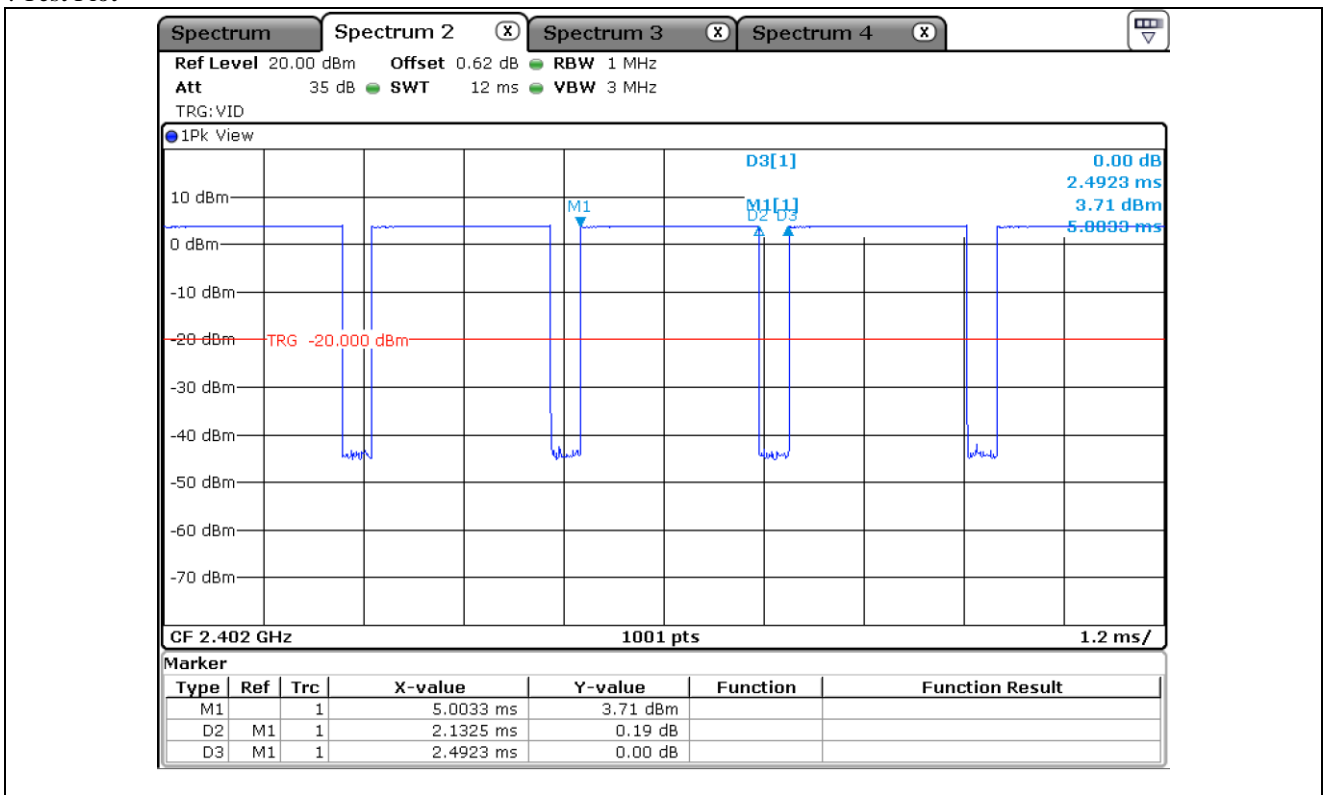


- Right Earbud

Mode	Tx On Time [ ms ]	Tx Off Time [ ms ]	Duty Cycle [ % ]	Correction Factor [ dB ]
Bluetooth LE	2.1325	0.3598	85.56	0.68

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) \* 100

Correction Factor : 10 \* Log(1 / (Duty Cycle / 100))

- Test Plot

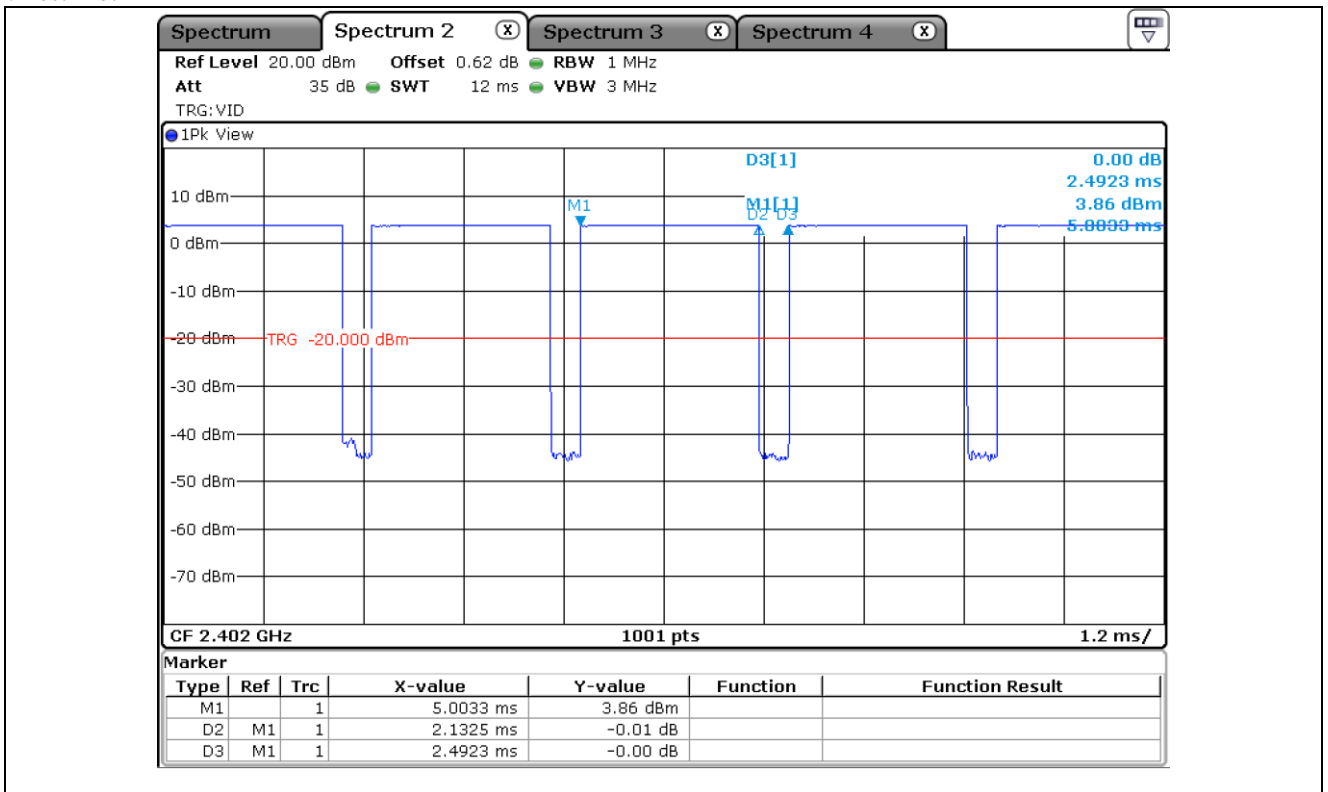

**5.4 Configuration of Test System**

**Line Conducted Test:** As the EUT is operated by DC battery, this test item is not requirement to be performed.

**Radiated Emission Test:** Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

**5.5 Antenna Requirement**

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**Antenna Construction:**

The antenna of the EUT is a FPCB Antenna on the main board in the EUT, so no consideration of replacement by the user.

**6. PRELIMINARY TEST**

**6.1 AC Power line Conducted Emissions Tests**

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
This test is not performed because the EUT is wireless function does not work while charging mode.	

**6.2 General Radiated Emissions Tests**

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


## 7. MINIMUM 6 dB BANDWIDTH

### 7.1 Operating environment

Temperature : 22.5 °C  
 Relative humidity : 53.5 % R.H.

### 7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

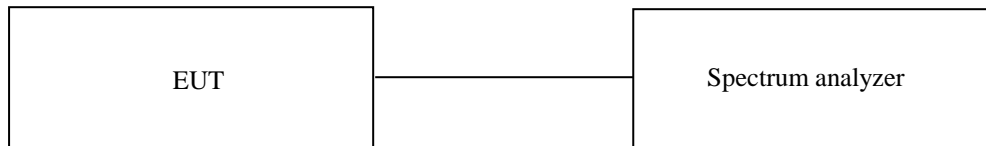

### 7.3 Test Date


January 10, 2022 ~ January 17, 2022


**7.4 Test data for Bluetooth LE 1 Mbps**

**7.4.1 Test data for Left Earbud**


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	674.30	500.00	174.30
Middle	2 440.00	664.30	500.00	164.30
High	2 480.00	669.30	500.00	169.30

Remark. Margin = Measured Value - Limit

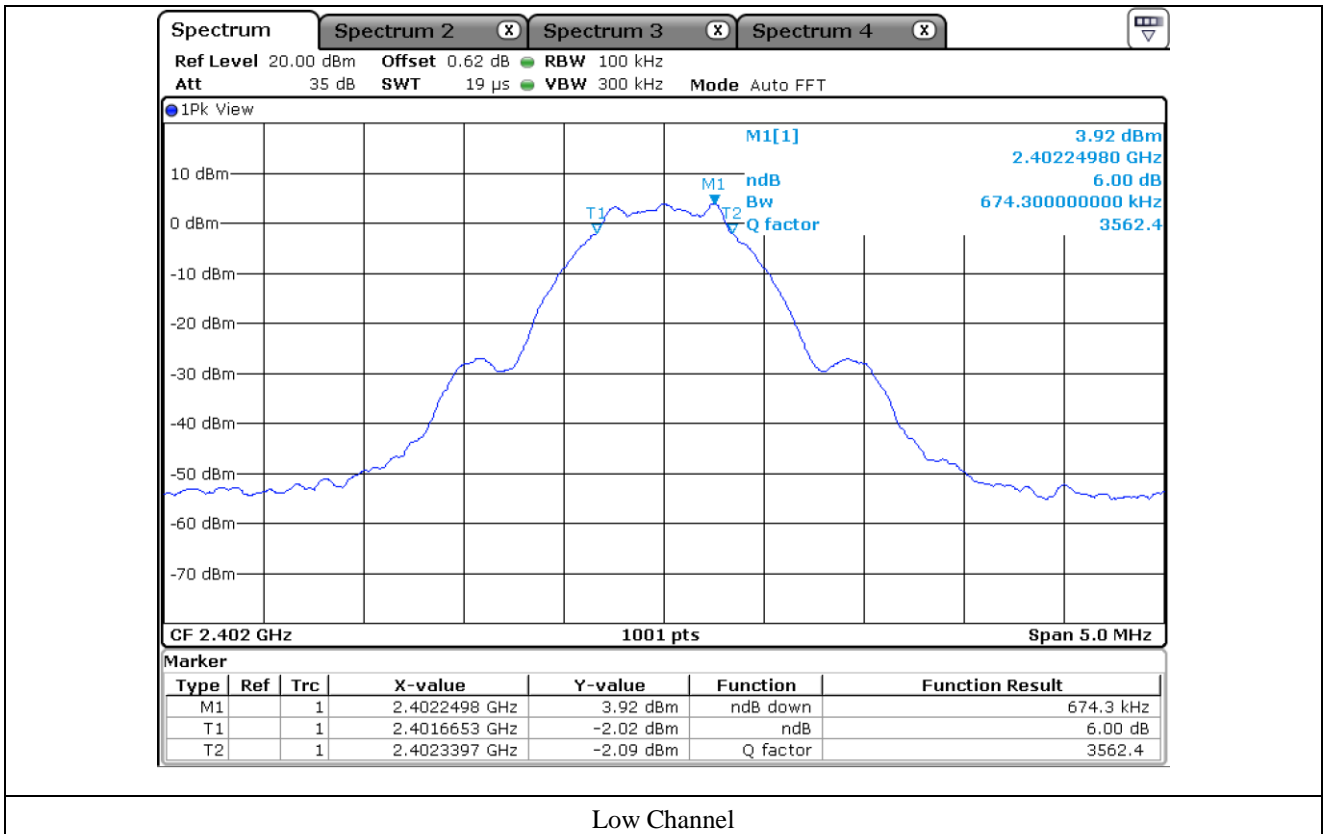

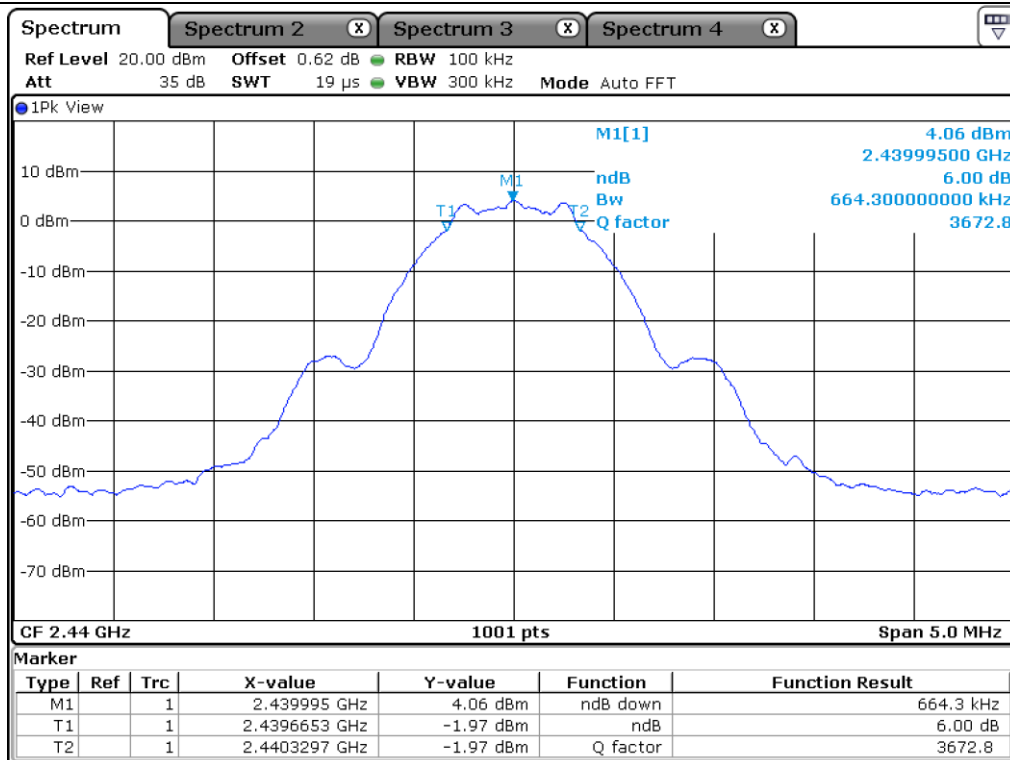

Middle Channel

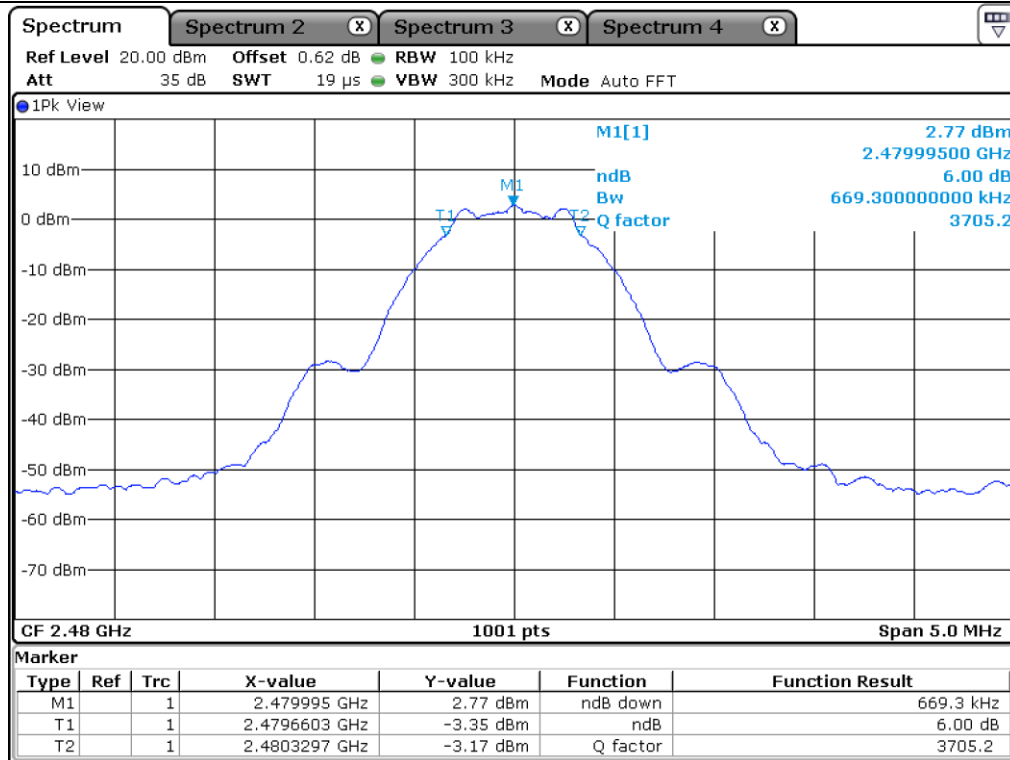

High Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


### 7.4.2 Test data for Right Earbud

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	674.30	500.00	174.30
Middle	2 440.00	664.30	500.00	164.30
High	2 480.00	664.30	500.00	164.30


Remark. Margin = Measured Value - Limit

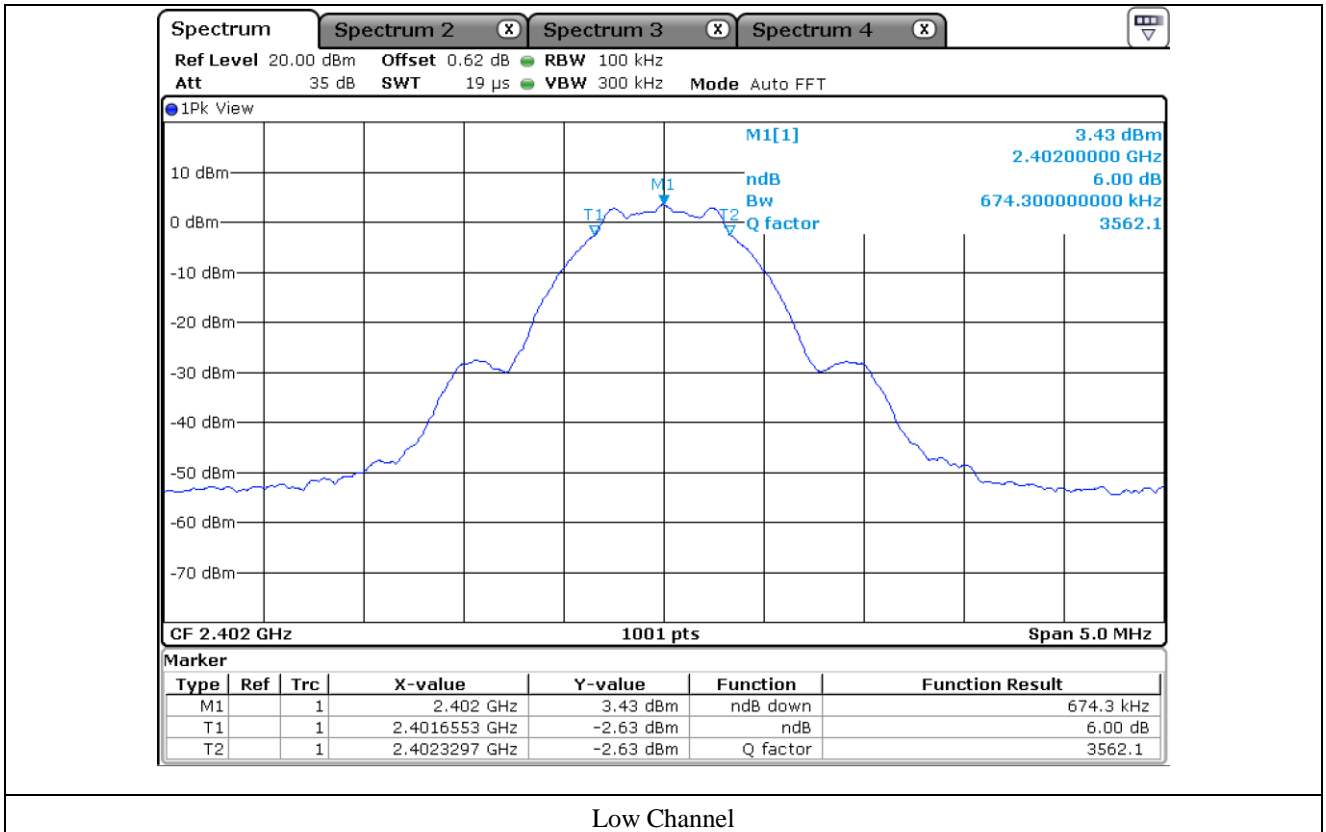



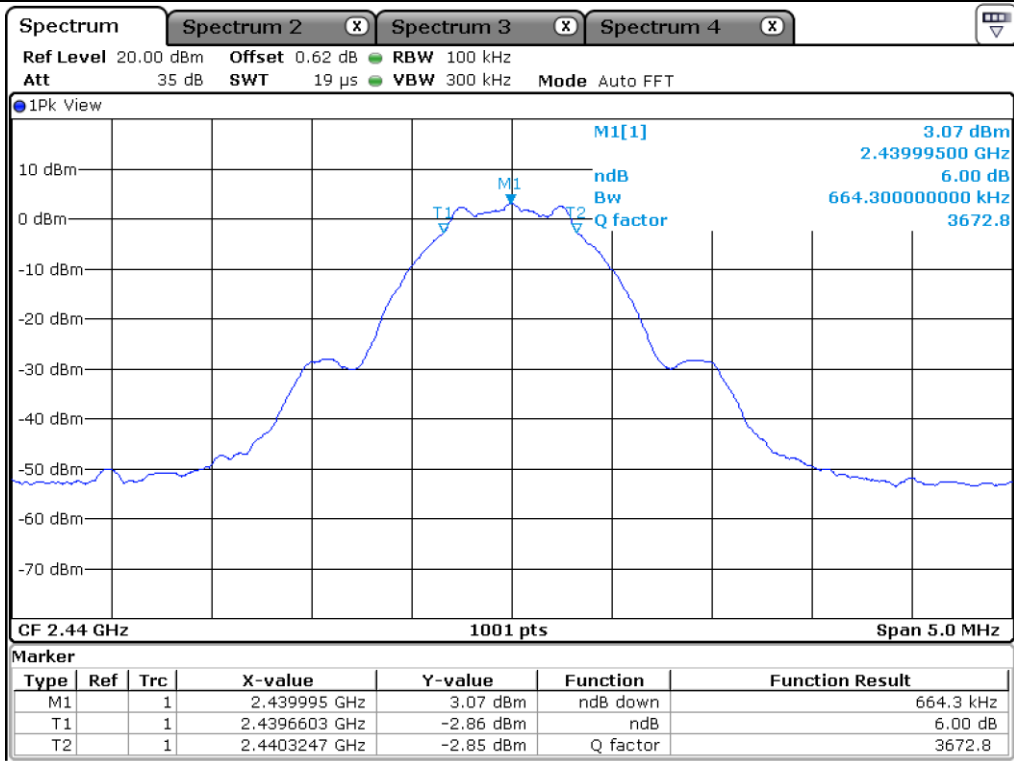

Middle Channel

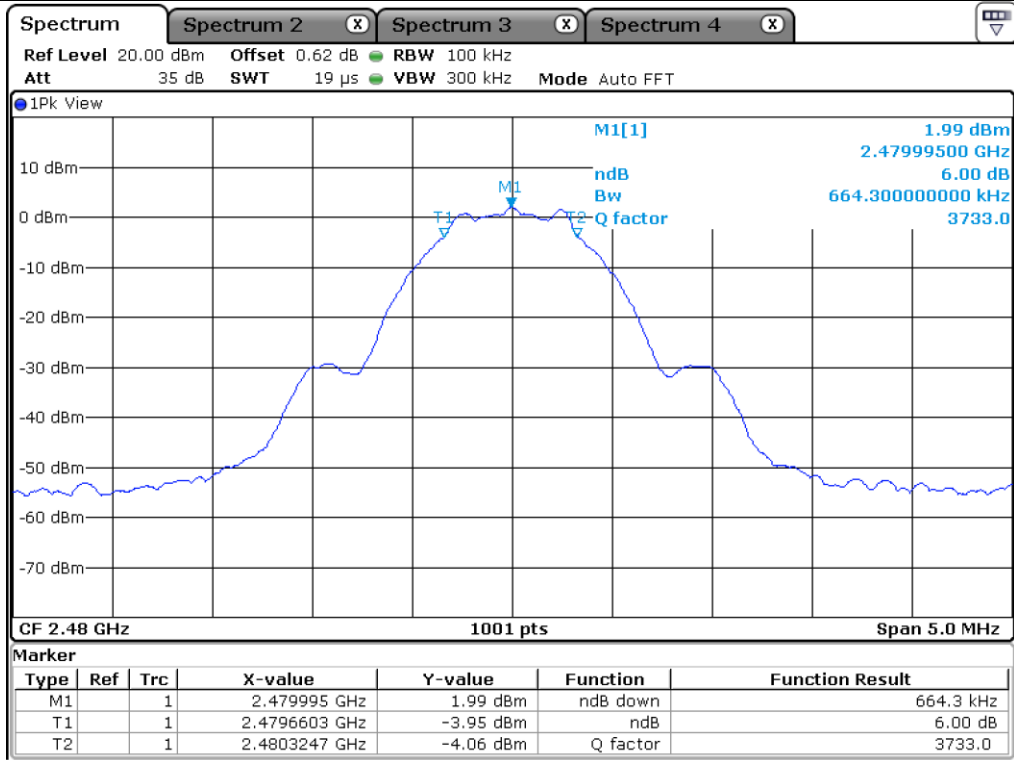

High Channel

## 8. MAXIMUM PEAK OUTPUT POWER


### 8.1 Operating environment

Temperature : 22.5 °C  
 Relative humidity : 53.5 % R.H.

### 8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $\geq$  DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

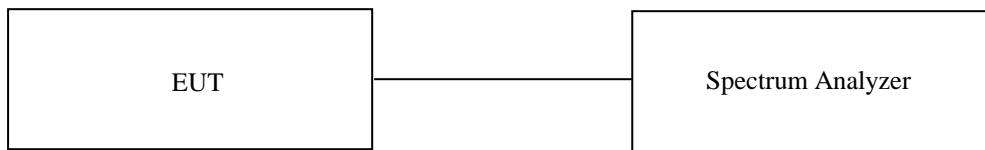

### 8.3 Test Date

January 10, 2022 ~ January 17, 2022


### 8.4 Test data for Bluetooth LE 1 Mbps


#### 8.4.1 Test data for Left Earbud

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth(kHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	674.30	4.33	30.00	25.67
MIDDLE	2 440.00	664.30	4.42	30.00	25.58
HIGH	2 480.00	669.30	2.82	30.00	27.18

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

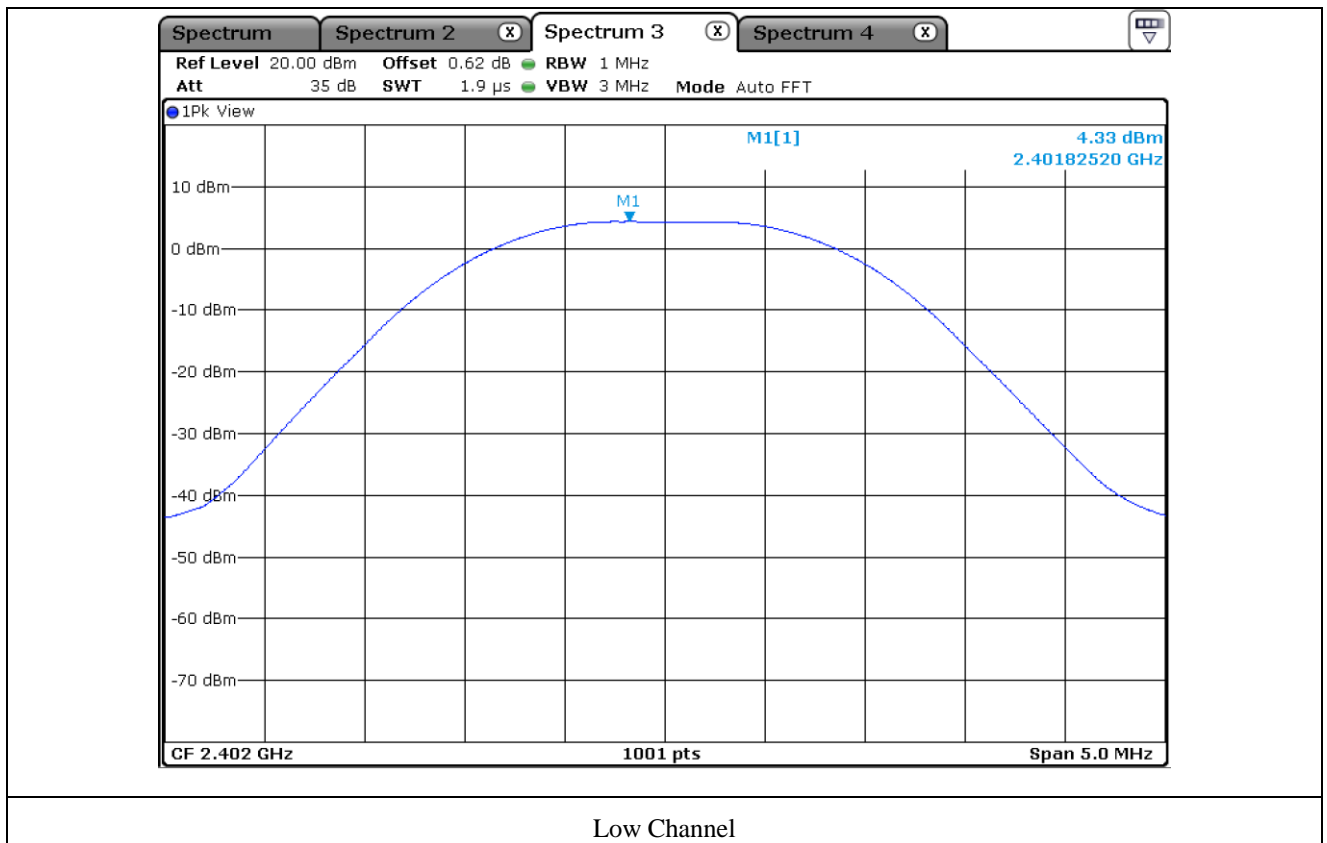

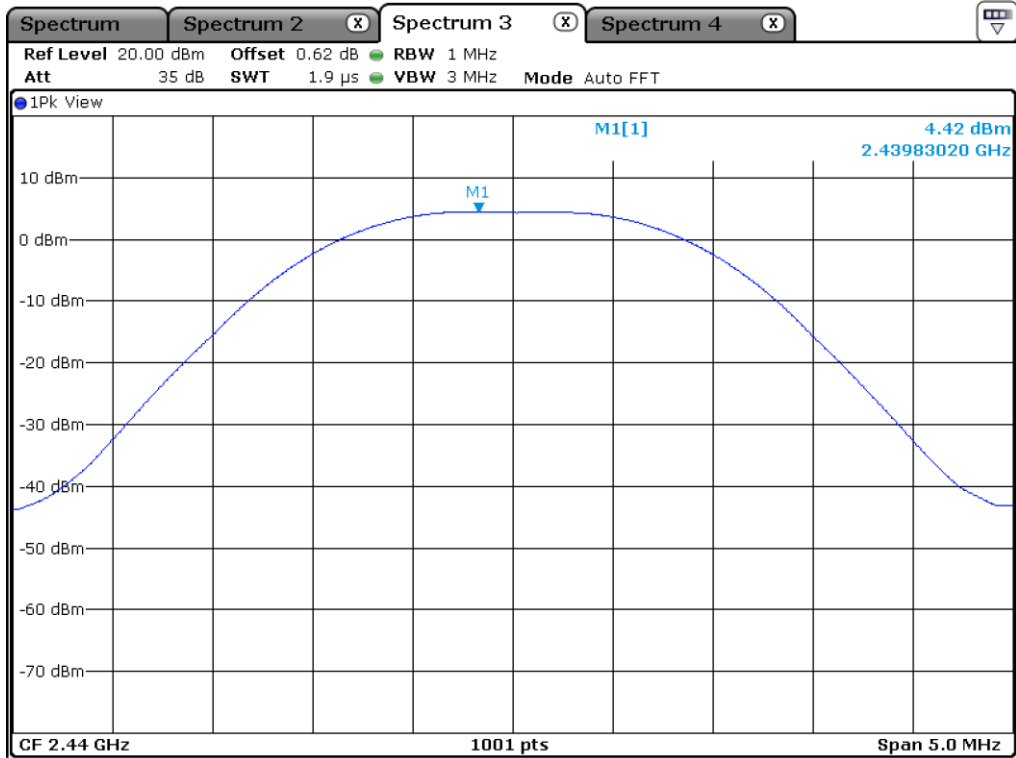

Middle Channel

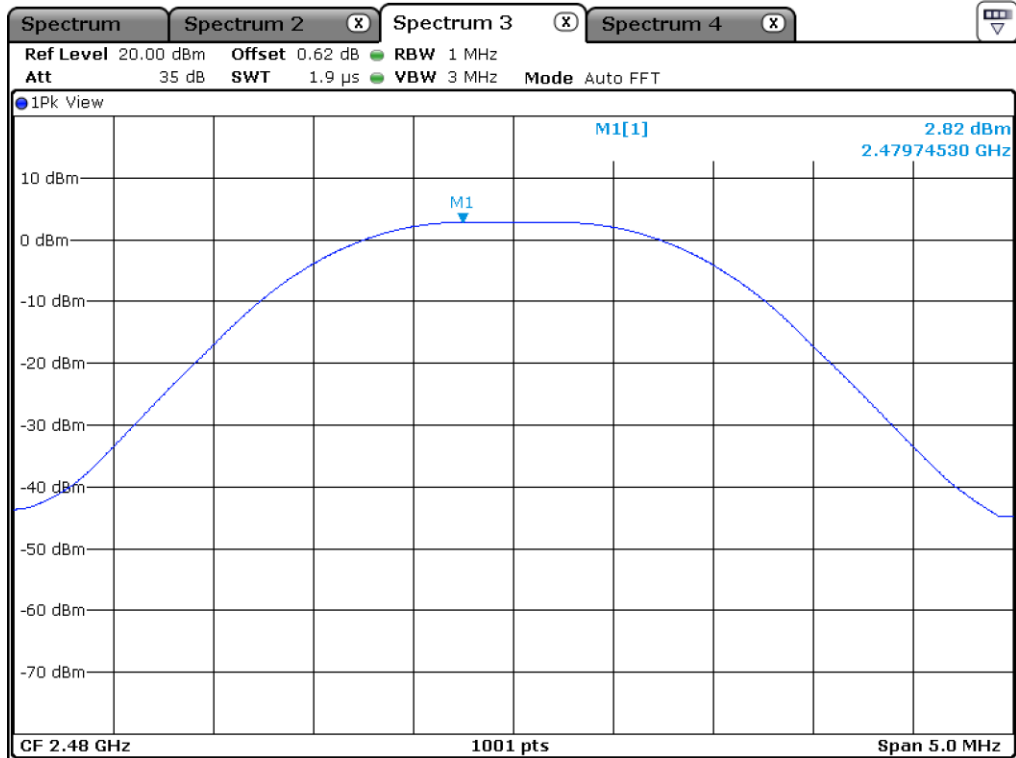

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)


### 8.4.2 Test data for Right Earbud

-. Test Result : Pass


CHANNEL	FREQUENCY (MHz)	6 dB Bandwidth(kHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	674.30	3.93	30.00	26.07
MIDDLE	2 440.00	664.30	3.25	30.00	26.75
HIGH	2 480.00	664.30	2.21	30.00	27.79

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)

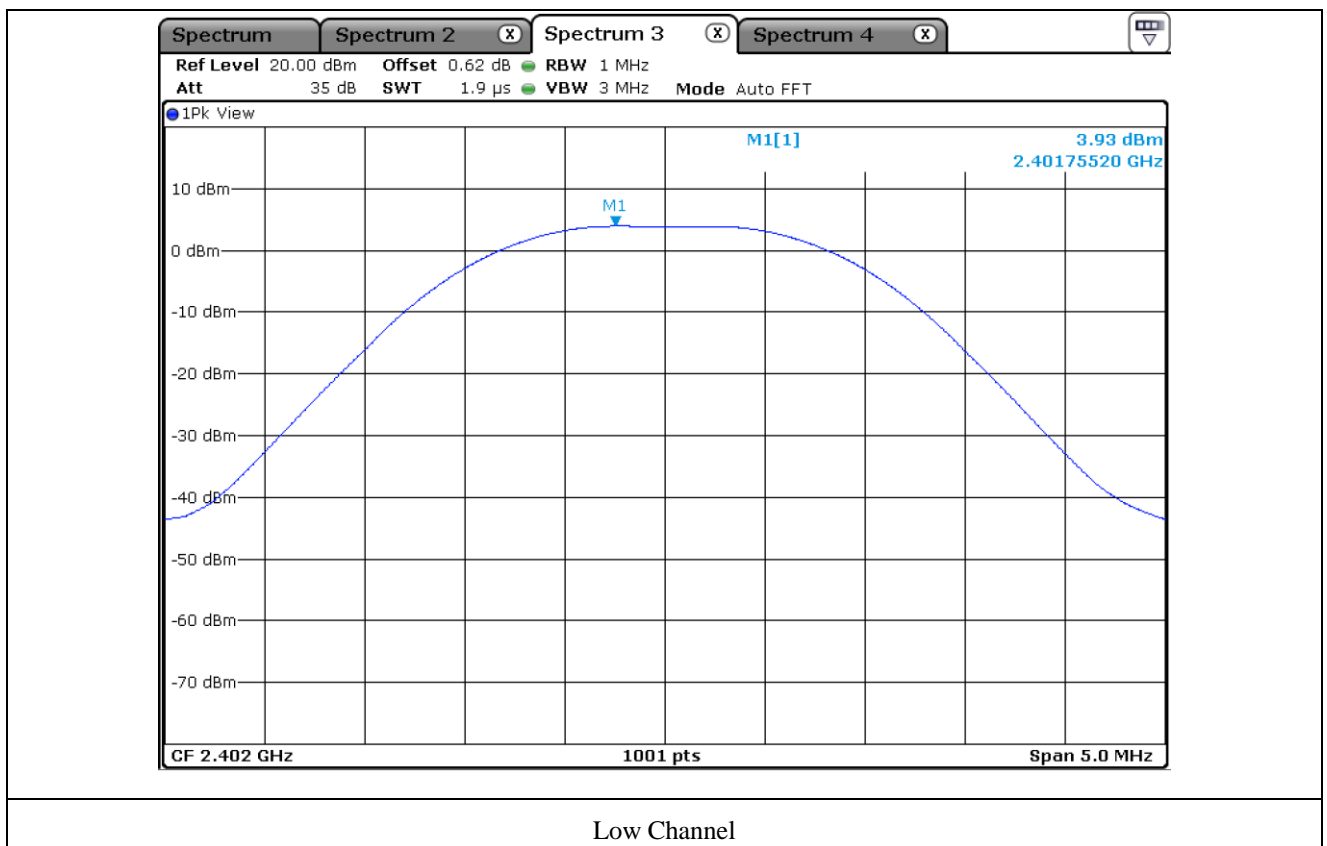

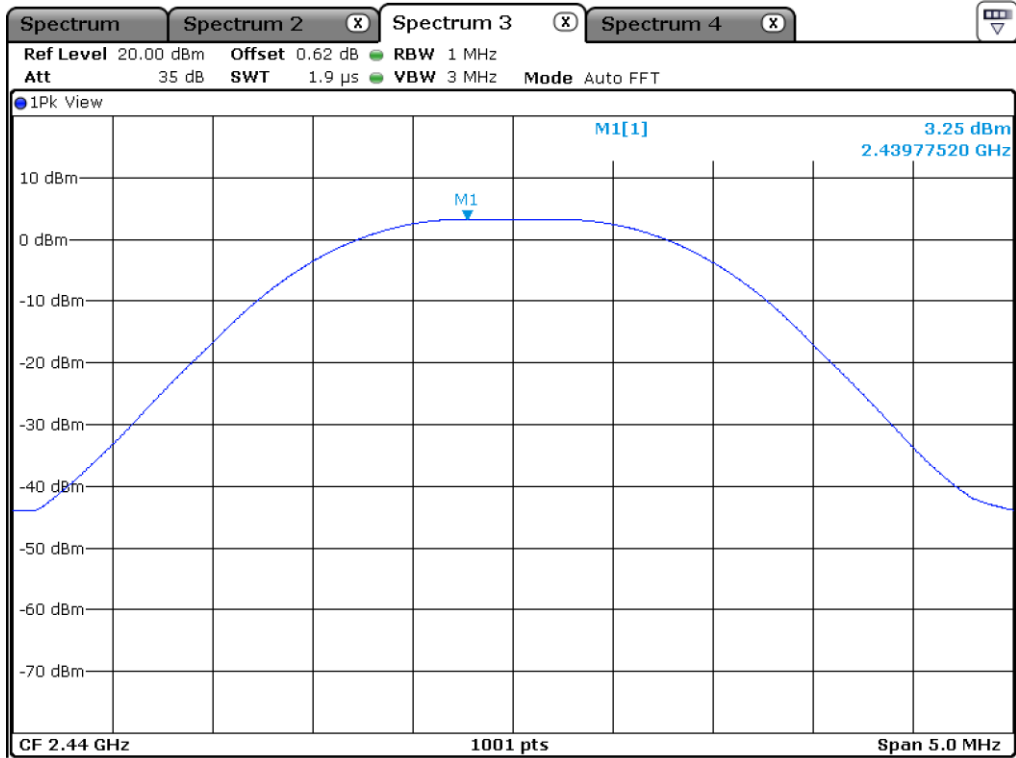

Middle Channel

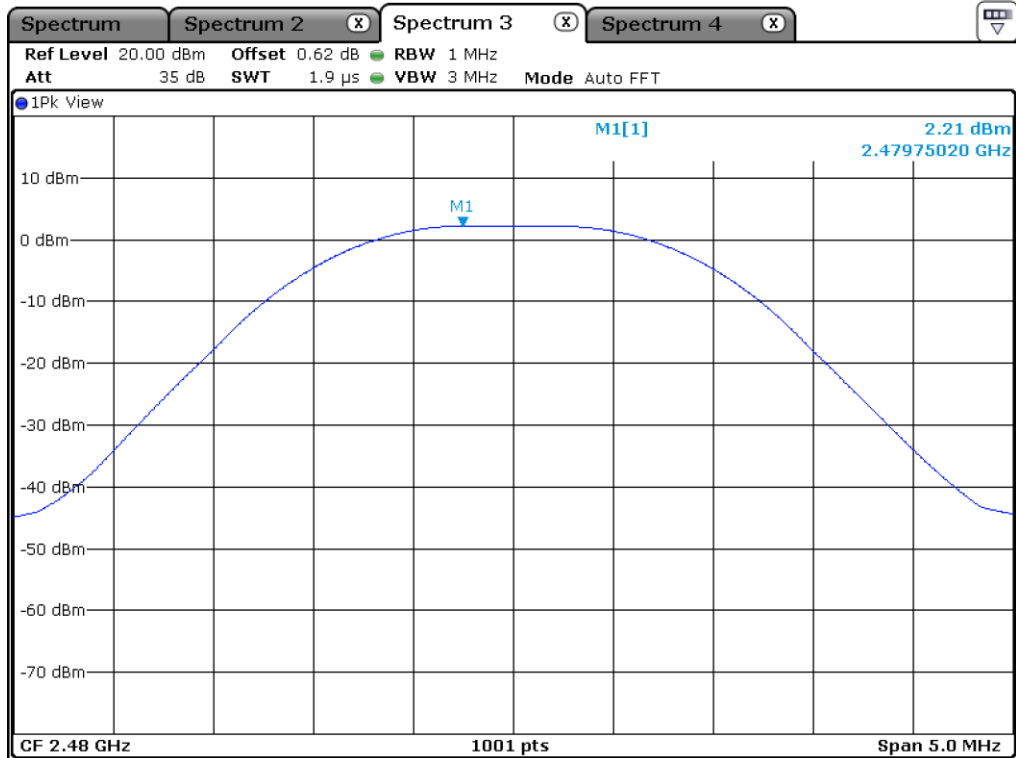

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)


## 9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

### 9.1 Operating environment

Temperature : 22.5 °C  
 Relative humidity : 53.5 % R.H.

### 9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

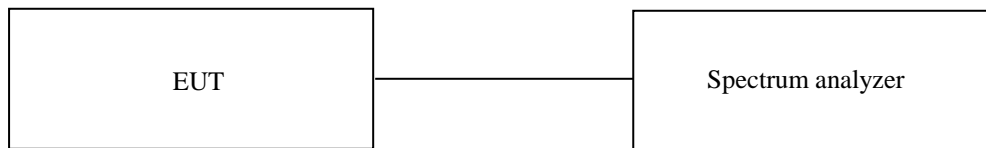

### 9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

### 9.4 Test Date


January 10, 2022 ~ January 17, 2022

9.5 Test data for conducted emission (Bluetooth LE 1Mbps)

9.5.1 Test data for Left Earbud

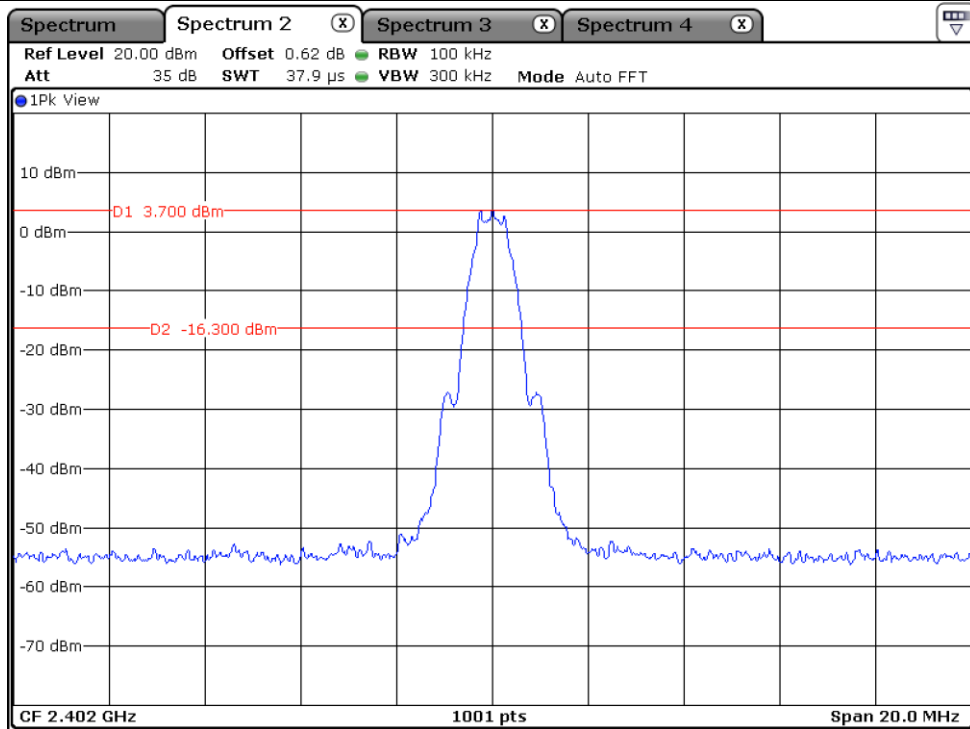

Low Channel

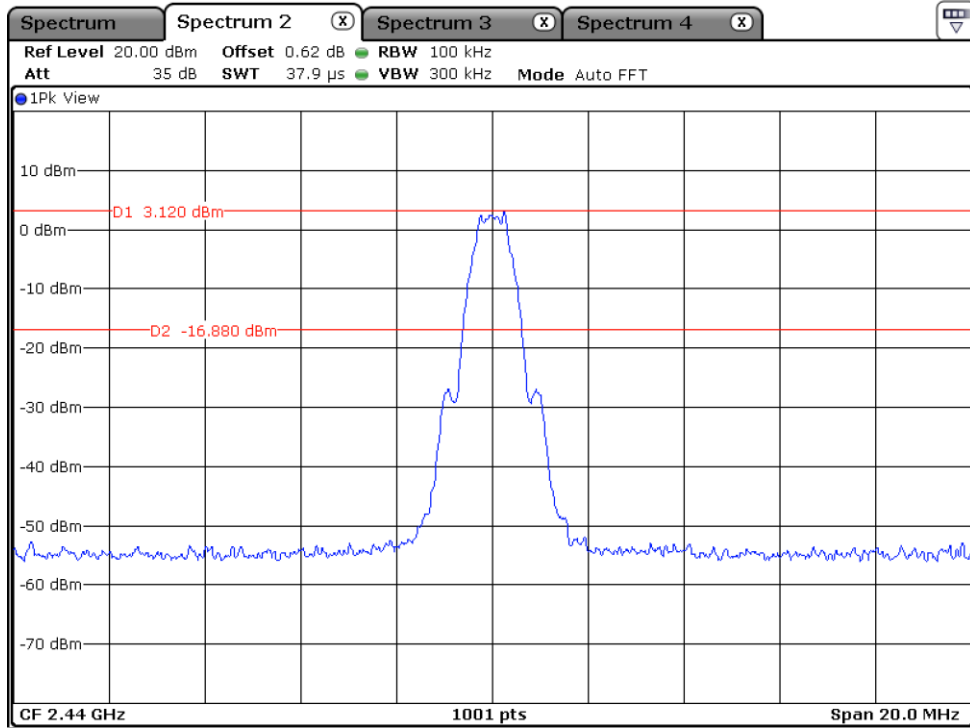


Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)




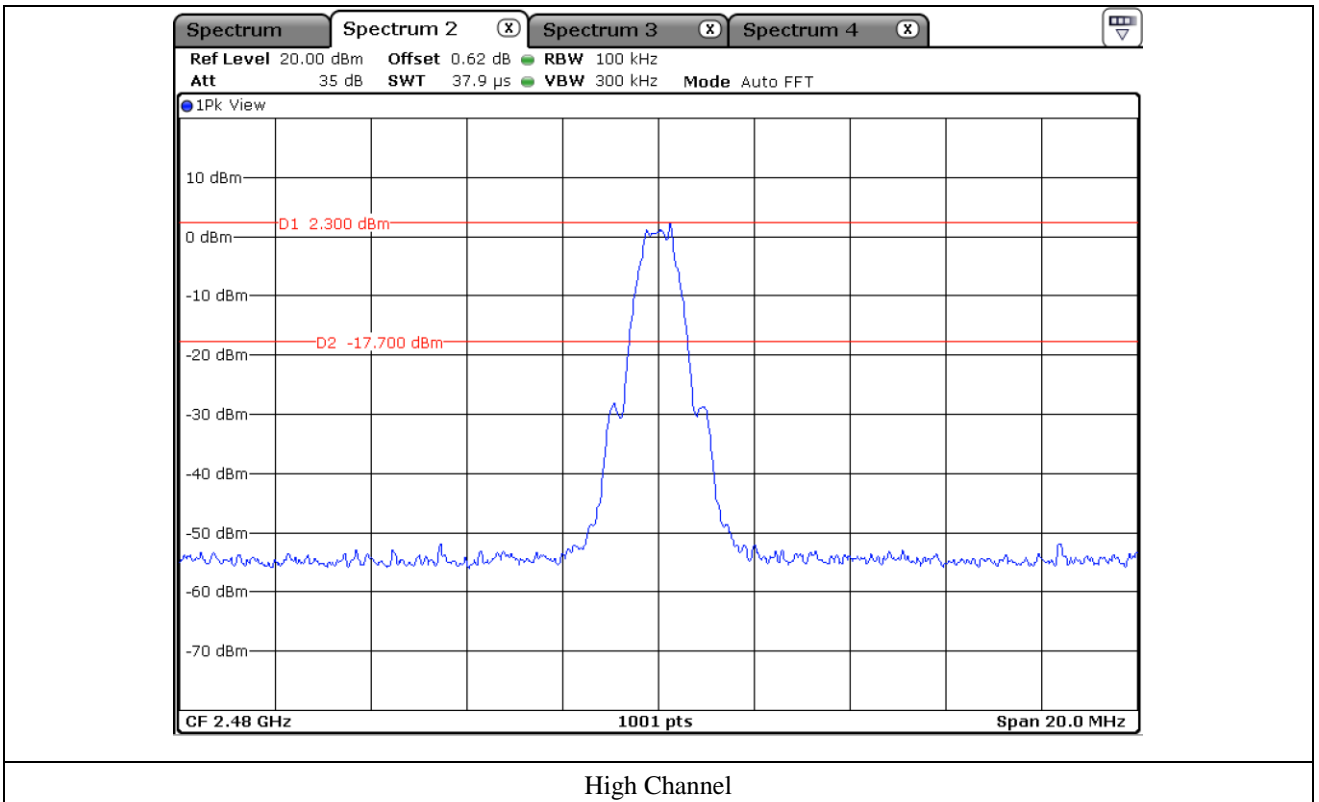

High Channel

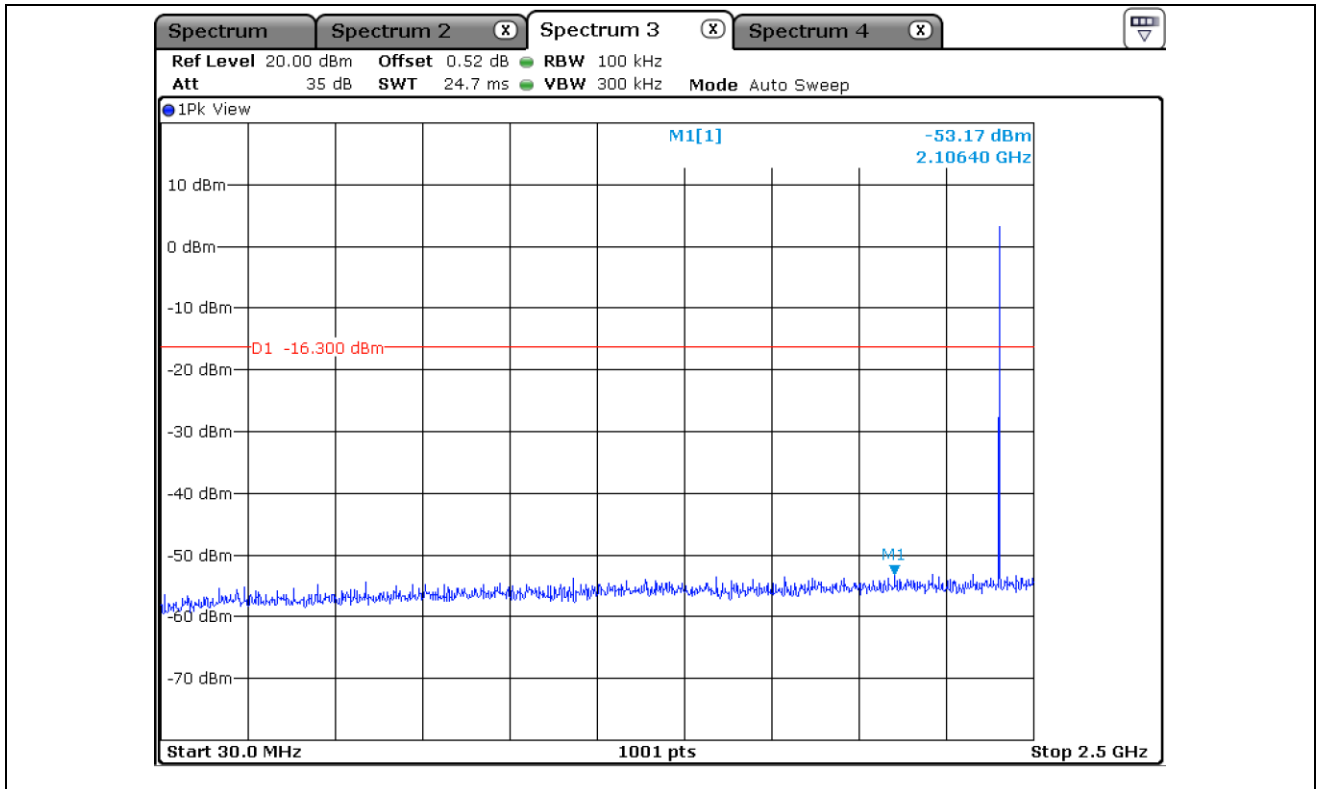

Low Channel

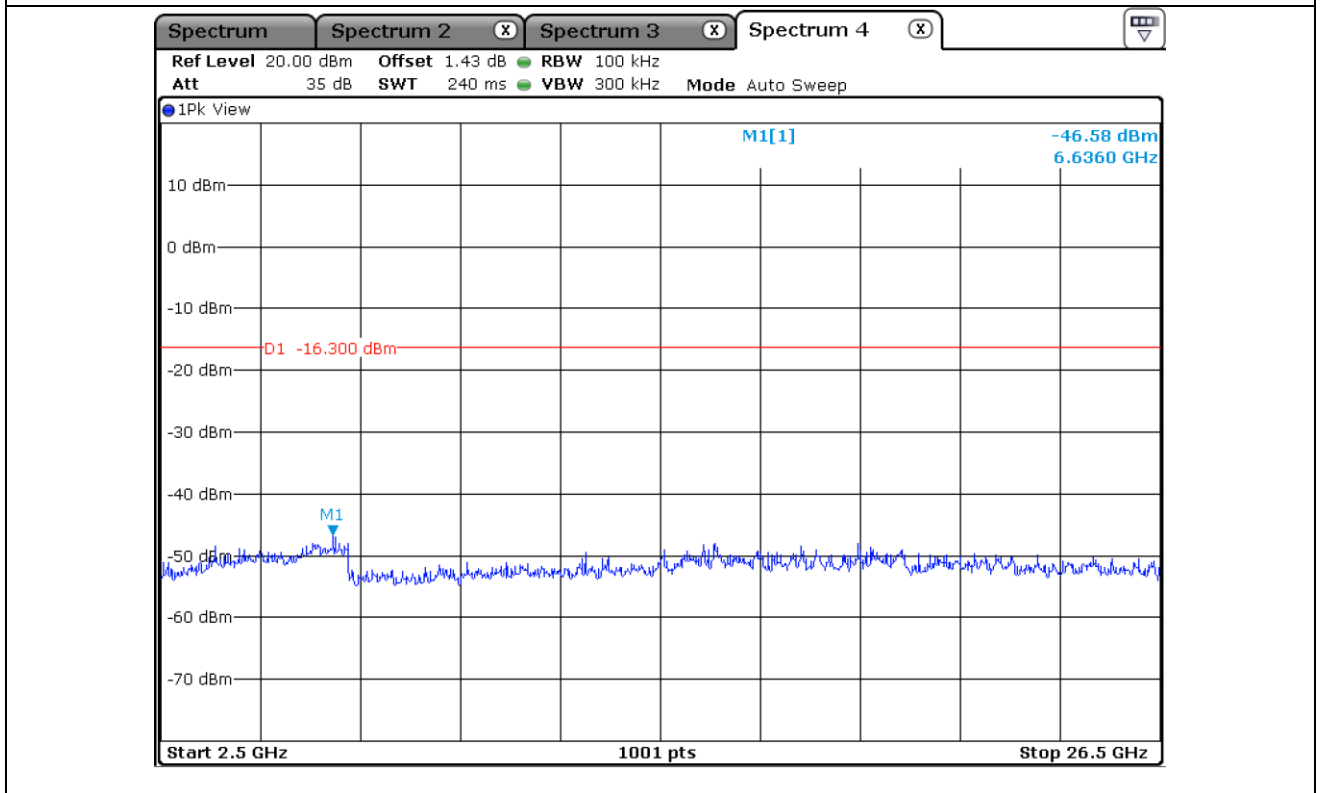


Low Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

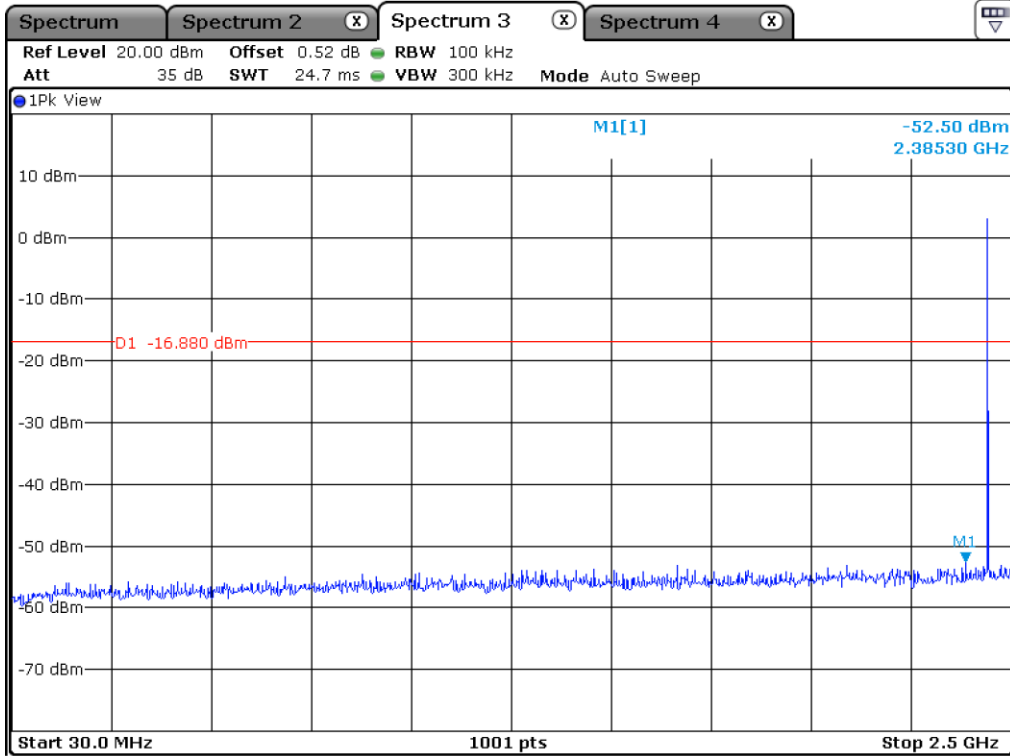

Middle Channel

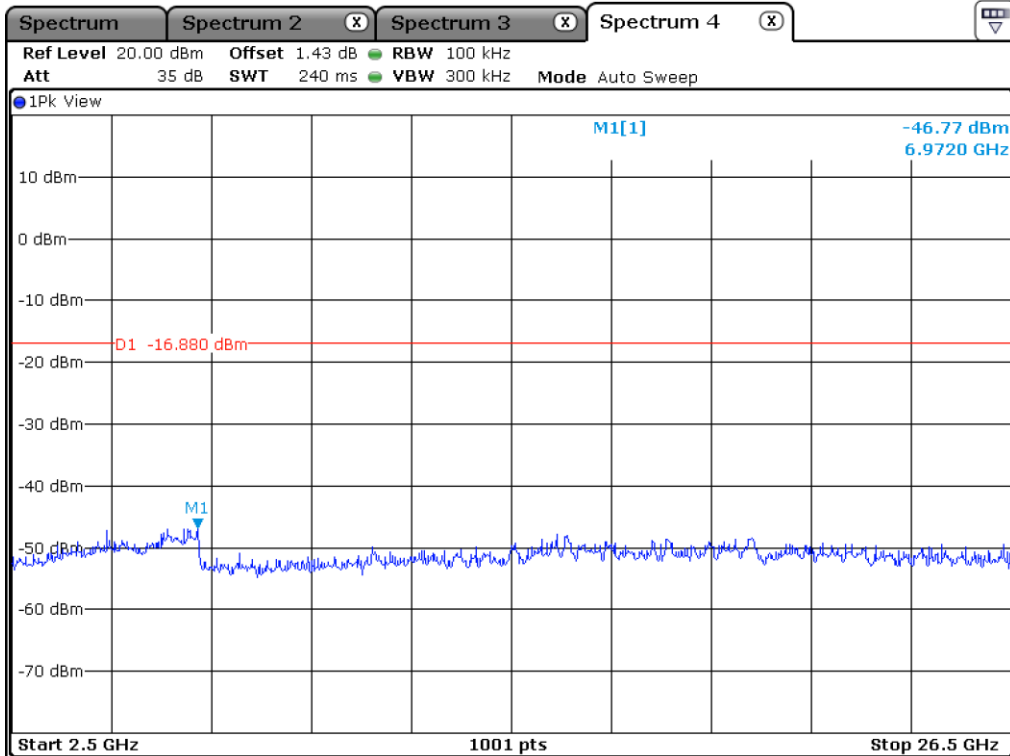


Middle Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

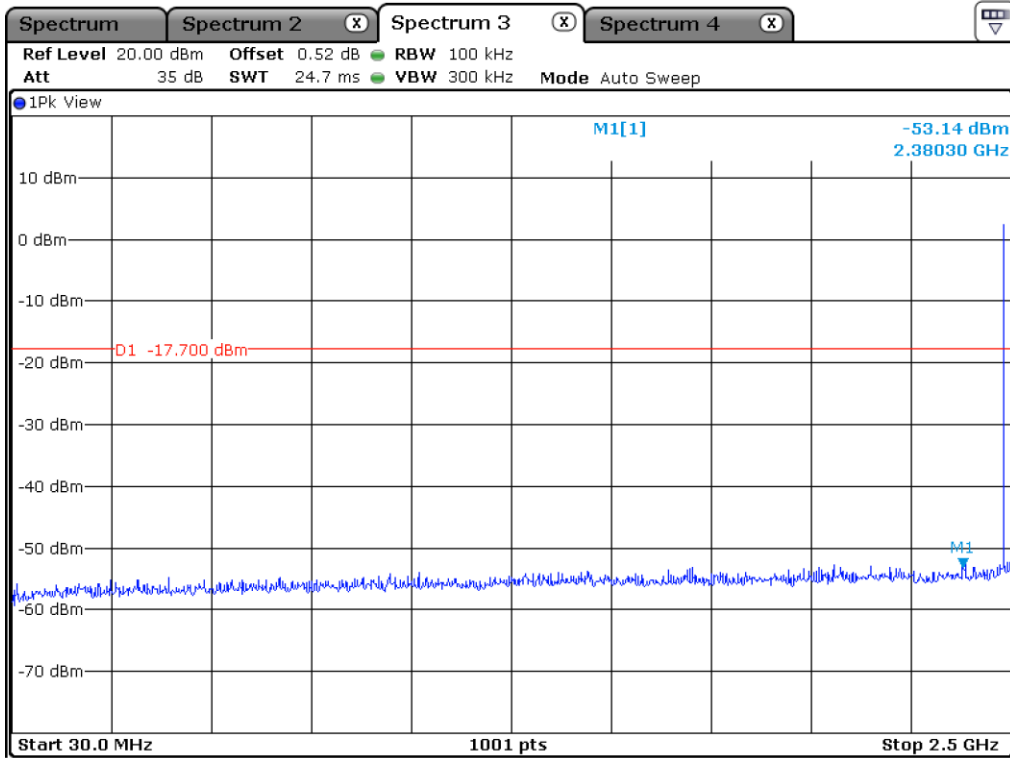

High Channel

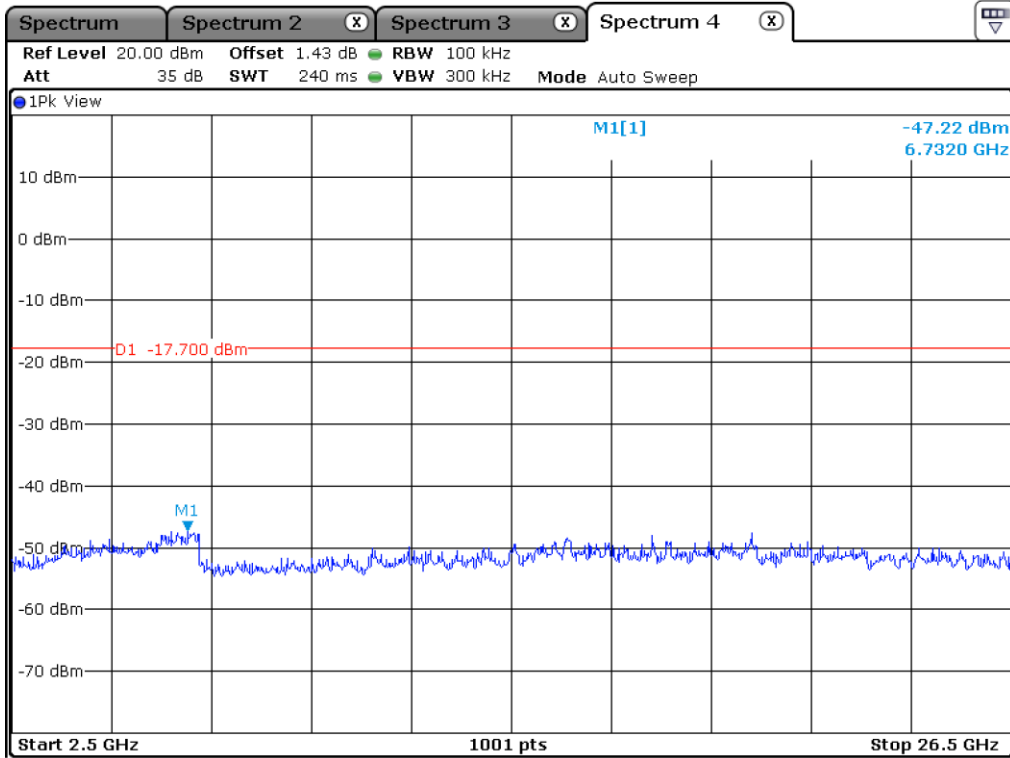


High Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

9.5.2 Test data for Right Earbud

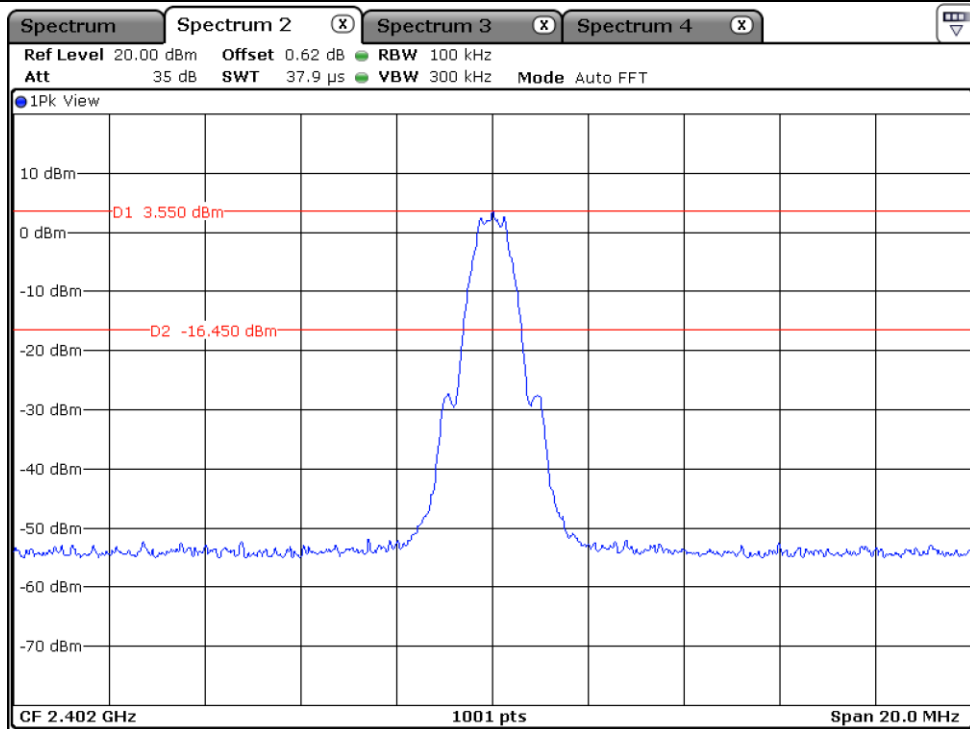

Low Channel

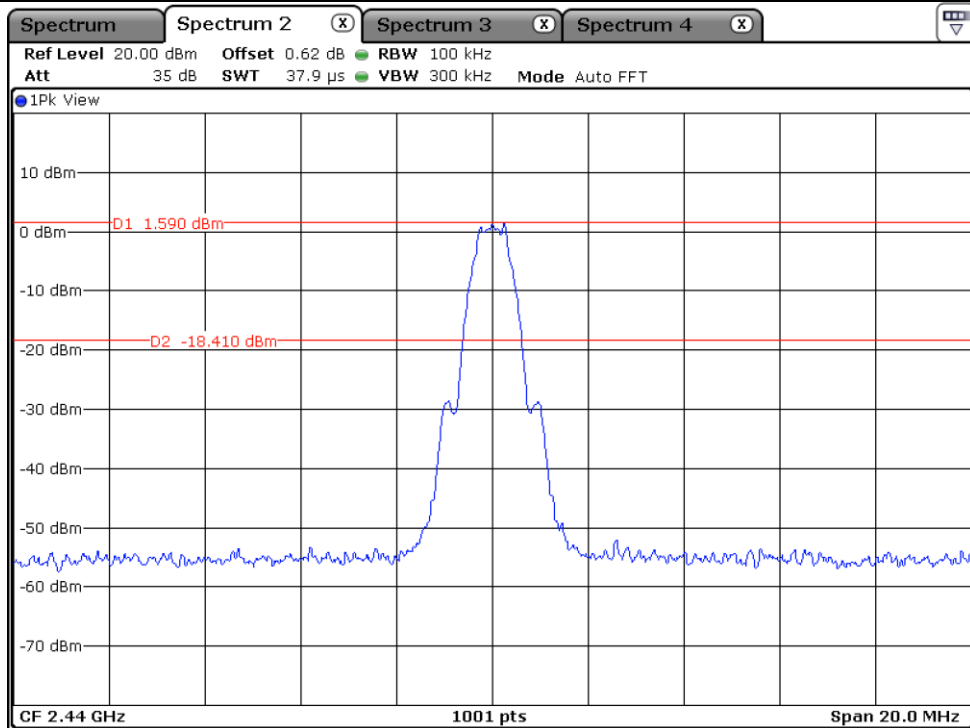


Middle Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.


OTC-TRF-RF-001(0)

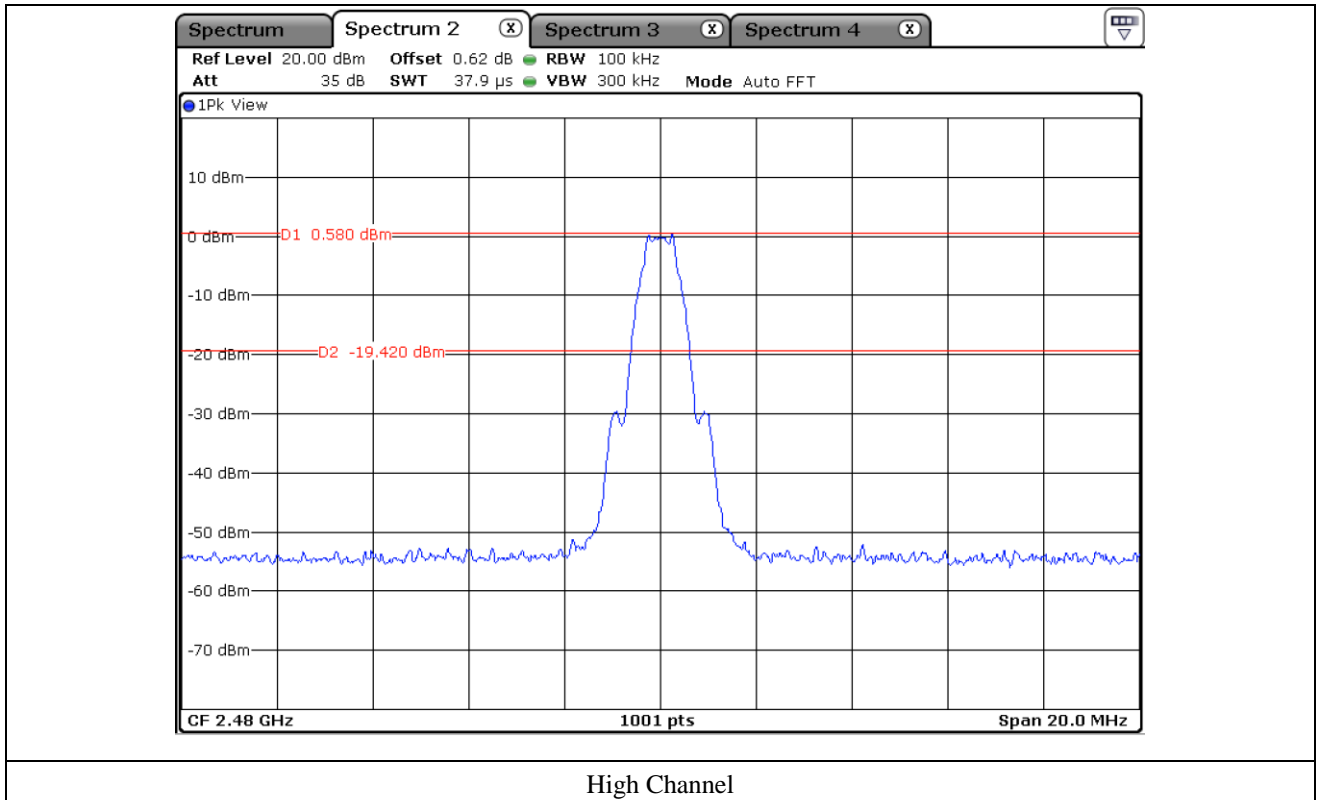

High Channel

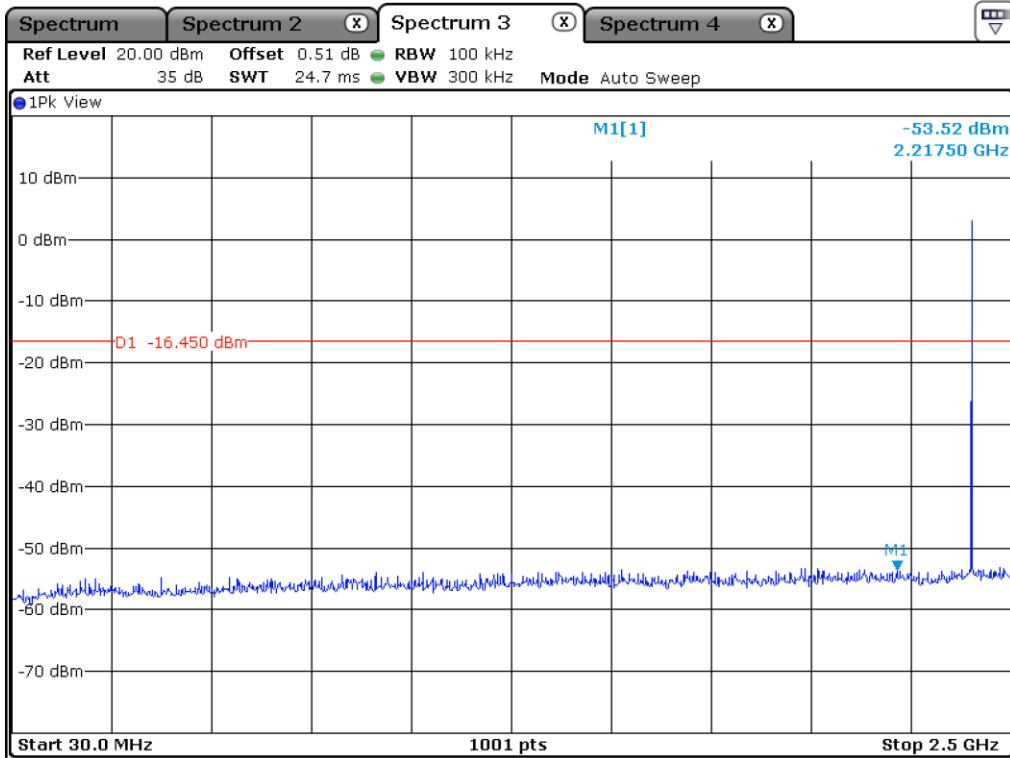

Low Channel

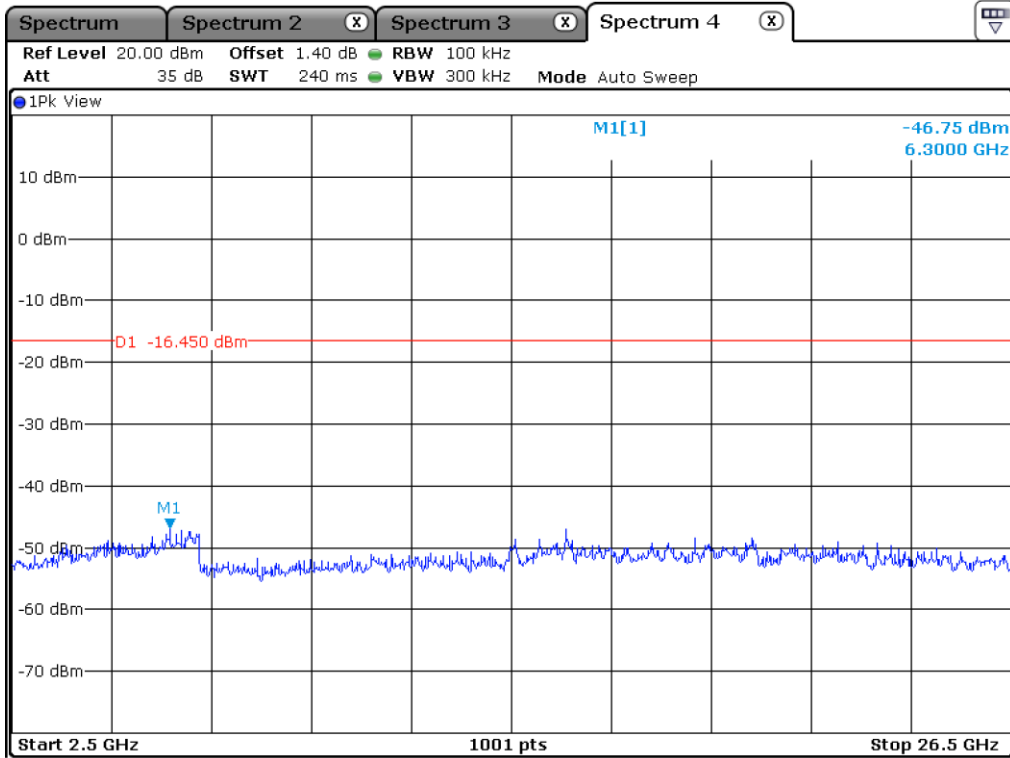


Low Channel


This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

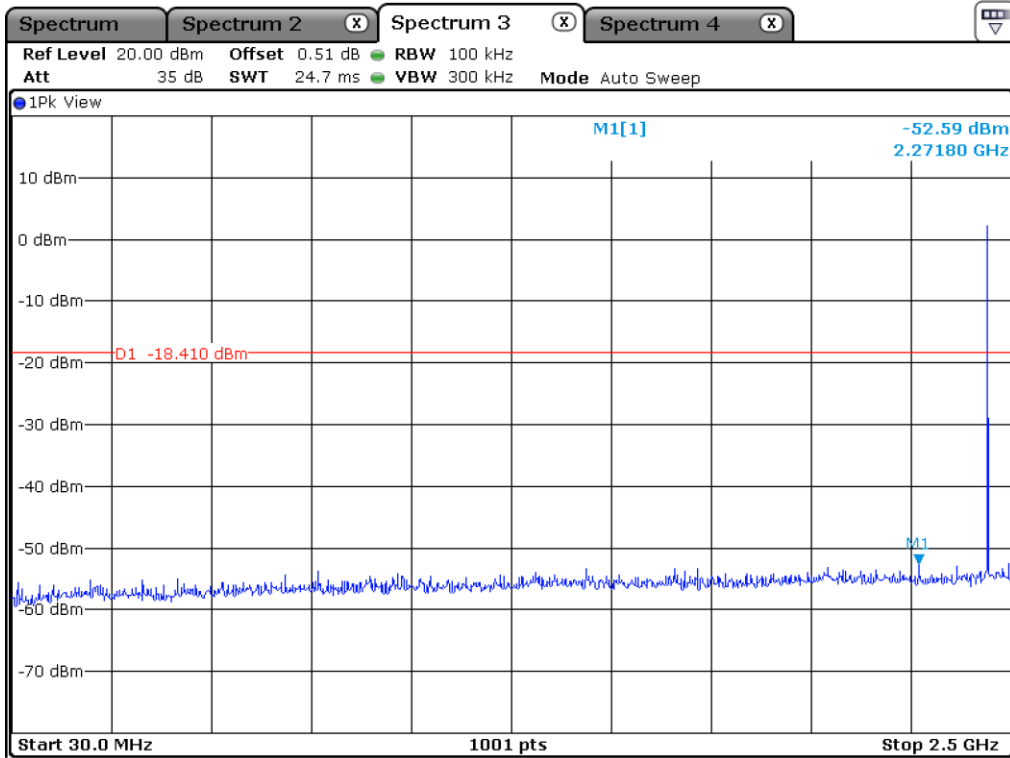

Middle Channel

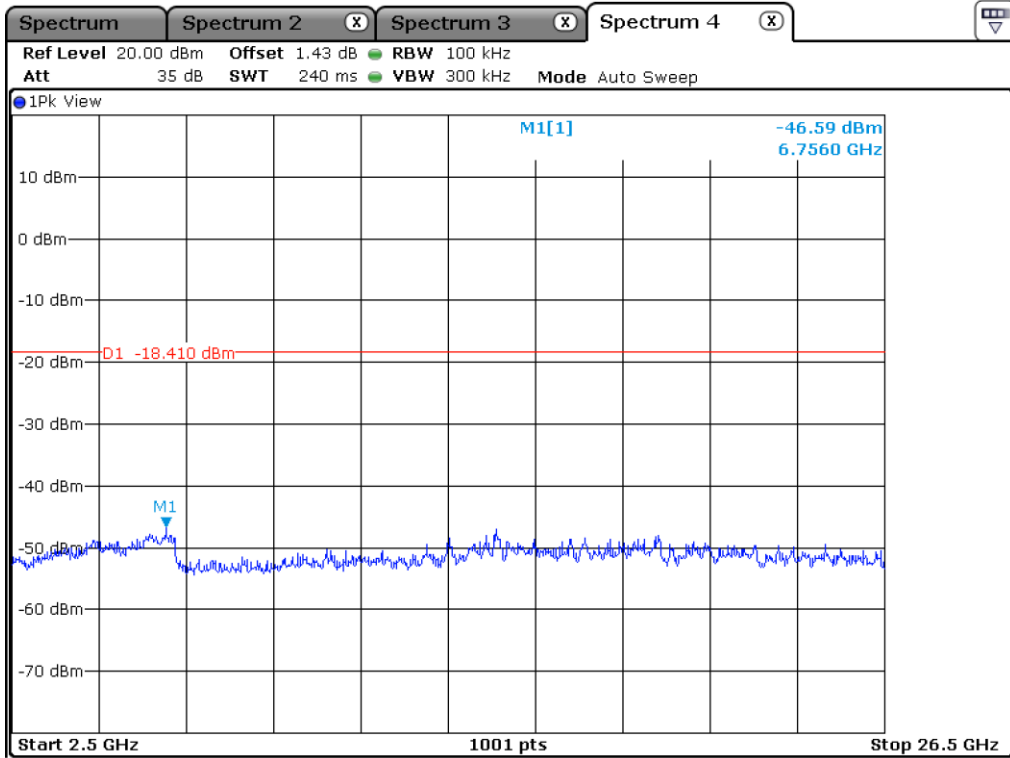


Middle Channel

This Report is not correlated with the authentication of KOLAS


It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)



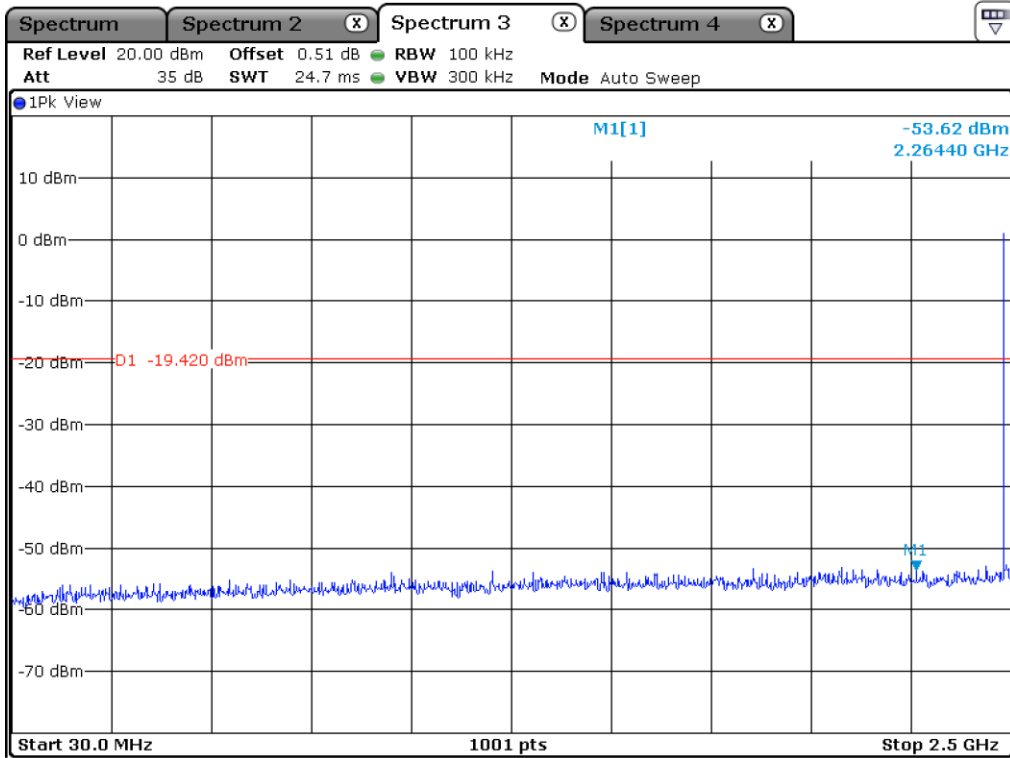

High Channel

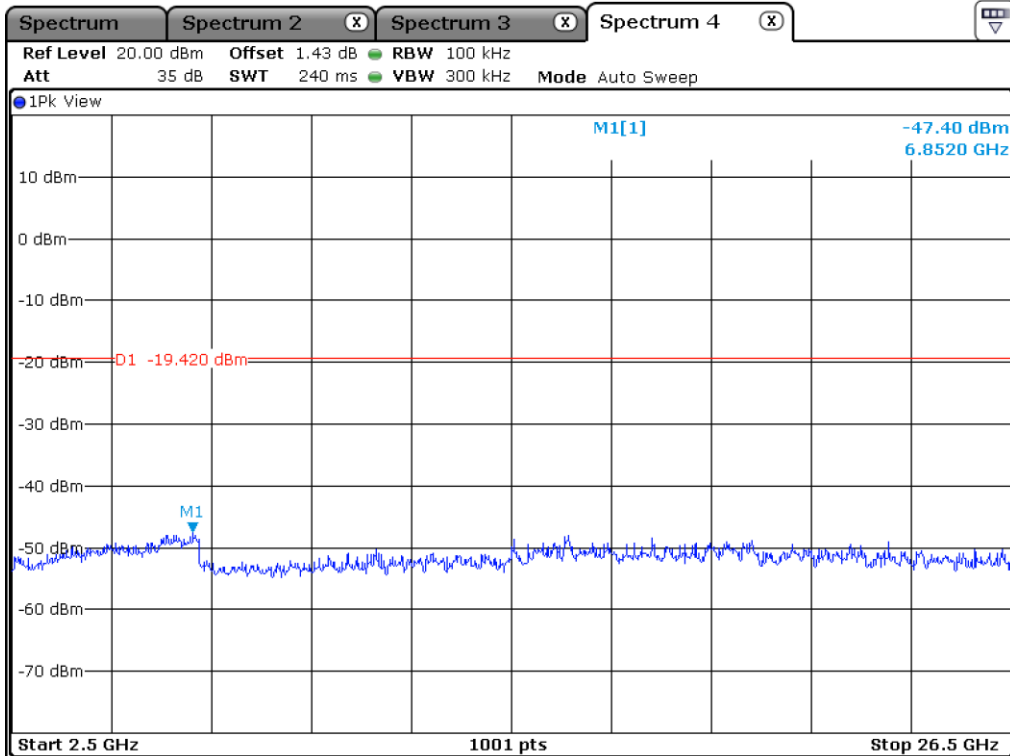

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

**9.6 Test data for radiated emission**

**9.6.1 Radiated Emission which fall in the Restricted Band (Bluetooth LE 1 Mbps)**

**9.6.1.1 Test data for Left Earbud**

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 85.56 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
2 385.962	54.58	Peak	H	28.30	5.46	47.10	-	41.24	74.00	32.76
2 389.087	44.64	Average	H	28.30	5.46	47.10	0.68	31.98	54.00	22.02
2 369.694	53.75	Peak	V	28.30	5.46	47.10	-	40.41	74.00	33.59
2 341.570	43.72	Average	V	28.30	5.46	47.10	0.68	31.06	54.00	22.94
<b>Test Data for High Channel</b>										
2 490.639	55.42	Peak	H	27.70	5.46	47.10	-	41.48	74.00	32.52
2 483.506	47.54	Average	H	27.70	5.46	47.10	0.68	34.28	54.00	19.72
2 485.864	55.88	Peak	V	27.70	5.46	47.10	-	41.94	74.00	32.06
2 483.506	44.81	Average	V	27.70	5.46	47.10	0.68	31.55	54.00	22.45

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{Amp Gain}$$

**9.6.1.2 Test data for Right Earbud**

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode  
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 85.56 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
2 361.974	53.29	Peak	H	28.30	5.46	47.10	-	39.95	74.00	34.05
2 361.790	43.53	Average	H	28.30	5.46	47.10	0.68	30.87	54.00	23.13
2 350.577	53.40	Peak	V	28.30	5.46	47.10	-	40.06	74.00	33.94
2 374.841	43.37	Average	V	28.30	5.46	47.10	0.68	30.71	54.00	23.29
<b>Test Data for High Channel</b>										
2 484.985	55.49	Peak	H	27.70	5.46	47.10	-	41.55	74.00	32.45
2 483.506	43.38	Average	H	27.70	5.46	47.10	0.68	30.12	54.00	23.88
2 484.486	53.90	Peak	V	27.70	5.46	47.10	-	39.96	74.00	34.04
2 485.025	44.19	Average	V	27.70	5.46	47.10	0.68	30.93	54.00	23.07

Tabulated test data for Restricted Band

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{Amp Gain}$$

### 9.6.2 Spurious & Harmonic Radiated Emission (Bluetooth LE 1 Mbps)

#### 9.6.2.1 Test data for Left Earbud

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 85.56 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
4 804.00	48.39	Peak	H	31.30	7.90	46.20	-	41.39	74.00	32.61
4 804.00	38.44	Average	H	31.30	7.90	46.20	0.68	32.12	54.00	21.88
4 804.00	48.49	Peak	V	31.30	7.90	46.20	-	41.49	74.00	32.51
4 804.00	38.62	Average	V	31.30	7.90	46.20	0.68	32.30	54.00	21.70
<b>Test Data for Middle Channel</b>										
4 880.00	54.30	Peak	H	31.20	7.90	46.20	-	47.20	74.00	26.80
4 880.00	43.14	Average	H	31.20	7.90	46.20	0.68	36.72	54.00	17.28
4 880.00	53.81	Peak	V	31.20	7.90	46.20	-	46.71	74.00	27.29
4 880.00	42.60	Average	V	31.20	7.90	46.20	0.68	36.18	54.00	17.82
<b>Test Data for High Channel</b>										
4 960.00	54.03	Peak	H	31.20	7.90	46.20	-	46.93	74.00	27.07
4 960.00	43.11	Average	H	31.20	7.90	46.20	0.68	36.69	54.00	17.31
4 960.00	53.50	Peak	V	31.20	7.90	46.20	-	46.40	74.00	27.60
4 960.00	42.92	Average	V	31.20	7.90	46.20	0.68	36.50	54.00	17.50

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{Amp Gain}$$

### 9.6.2.2 Test data for Right Earbud

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,  
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 85.56 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	Amp Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
<b>Test Data for Low Channel</b>										
4 804.00	53.84	Peak	H	31.30	7.90	46.20	-	46.84	74.00	27.16
4 804.00	42.88	Average	H	31.30	7.90	46.20	0.68	36.56	54.00	17.44
4 804.00	53.78	Peak	V	31.30	7.90	46.20	-	46.78	74.00	27.22
4 804.00	42.71	Average	V	31.30	7.90	46.20	0.68	36.39	54.00	17.61
<b>Test Data for Middle Channel</b>										
4 880.00	53.19	Peak	H	31.20	7.90	46.20	-	46.09	74.00	27.91
4 880.00	42.75	Average	H	31.20	7.90	46.20	0.68	36.33	54.00	17.67
4 880.00	53.64	Peak	V	31.20	7.90	46.20	-	46.54	74.00	27.46
4 880.00	43.60	Average	V	31.20	7.90	46.20	0.68	37.18	54.00	16.82
<b>Test Data for High Channel</b>										
4 960.00	52.99	Peak	H	31.20	7.90	46.20	-	45.89	74.00	28.11
4 960.00	42.76	Average	H	31.20	7.90	46.20	0.68	36.34	54.00	17.66
4 960.00	53.92	Peak	V	31.20	7.90	46.20	-	46.82	74.00	27.18
4 960.00	43.19	Average	V	31.20	7.90	46.20	0.68	36.77	54.00	17.23

Remark: “H”: Horizontal, “V”: Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{Duty Factor} - \text{Amp Gain}$$

## 10. PEAK POWER SPECTRAL DENSITY


### 10.1 Operating environment

Temperature : 22.5 °C  
 Relative humidity : 53.5 % R.H.

### 10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ , the video bandwidth is set to 3 times the resolution bandwidth.

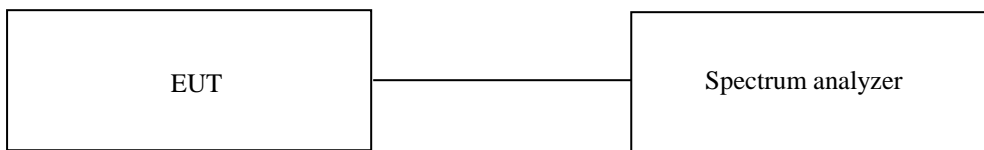

### 10.3 Test Date

January 10, 2022 ~ January 17, 2022

### 10.4 Test data for Bluetooth LE 1 Mbps


#### 10.4.1 Test data for Left Earbud


-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-17.88	8.00	25.88
Middle	2 440.00	-17.72	8.00	25.72
High	2 480.00	-19.03	8.00	27.03

Remark. Margin = Limit – Measured value

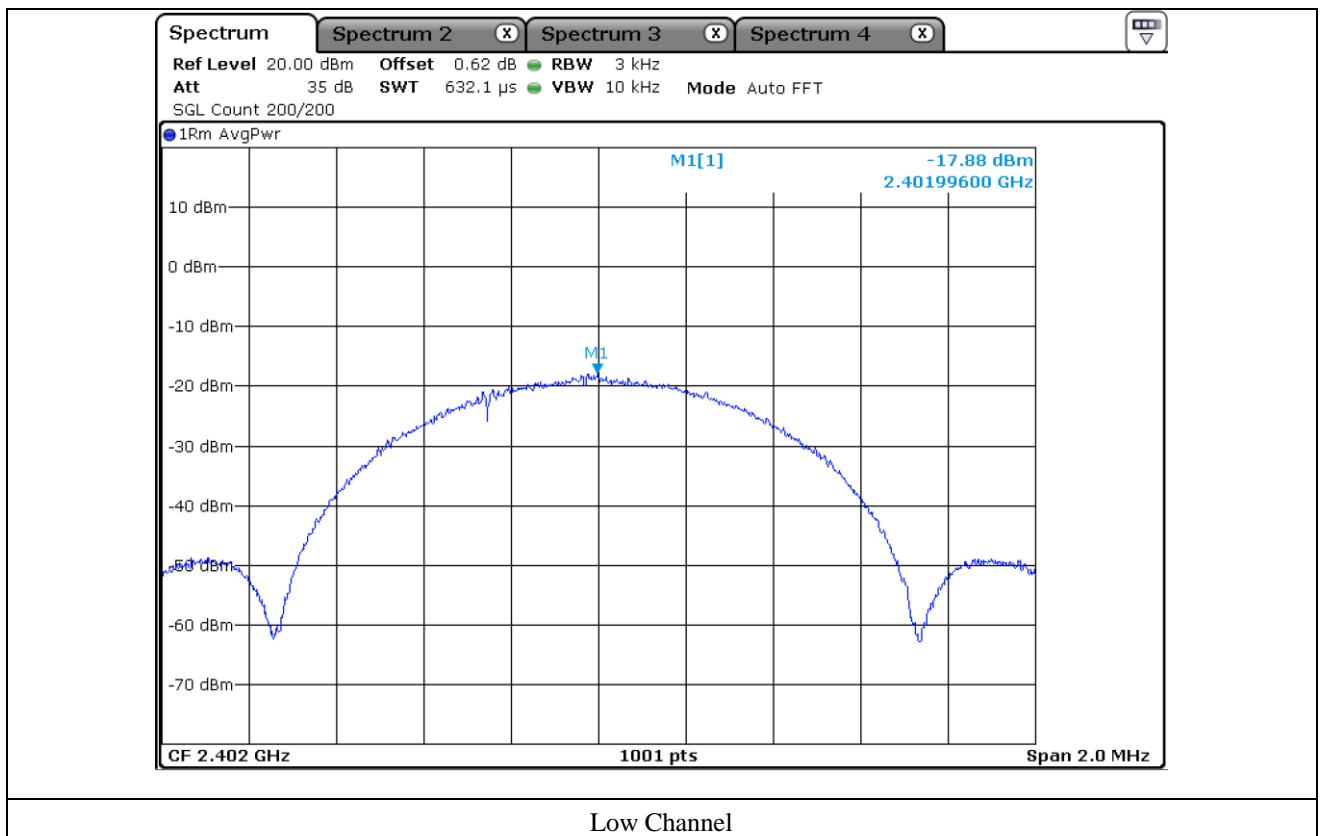

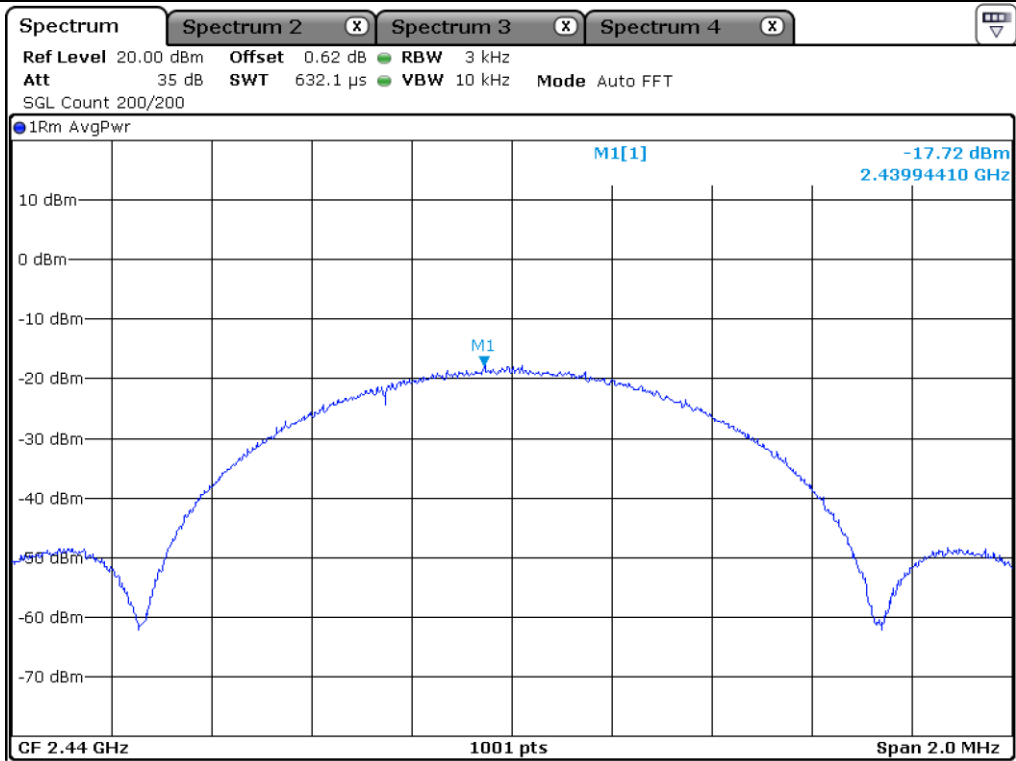

Middle Channel

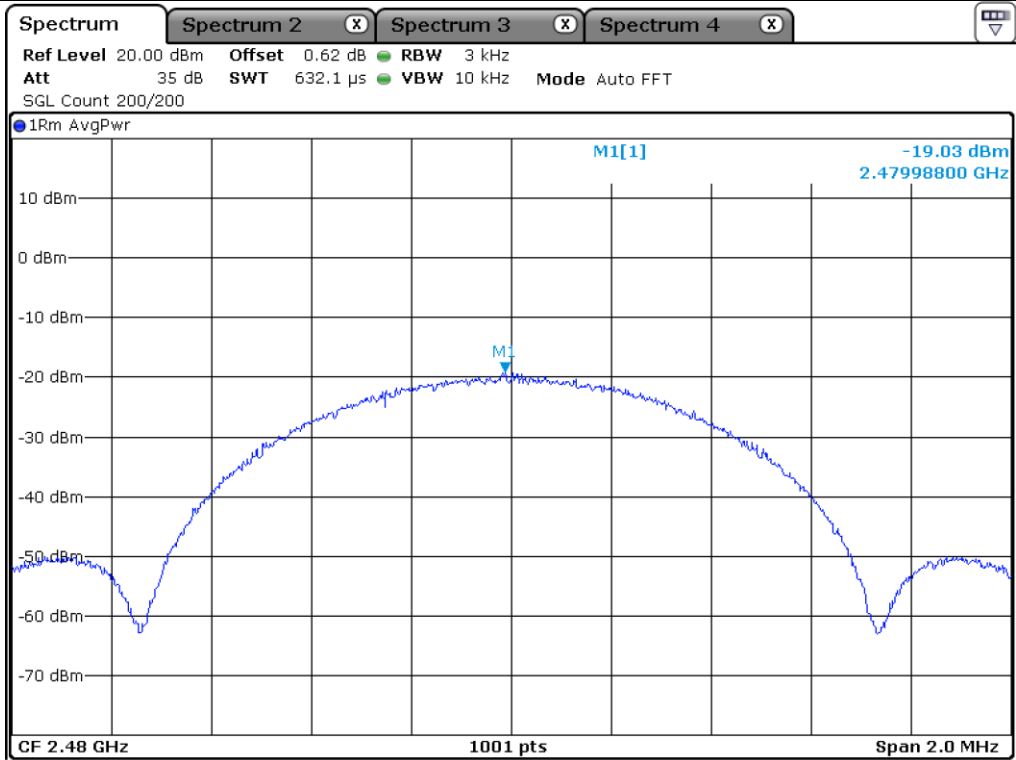

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)




### 10.4.2 Test data for Right Earbud


-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode


CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-18.11	8.00	26.11
Middle	2 440.00	-19.05	8.00	27.05
High	2 480.00	-19.54	8.00	27.54

Remark. Margin = Limit – Measured value

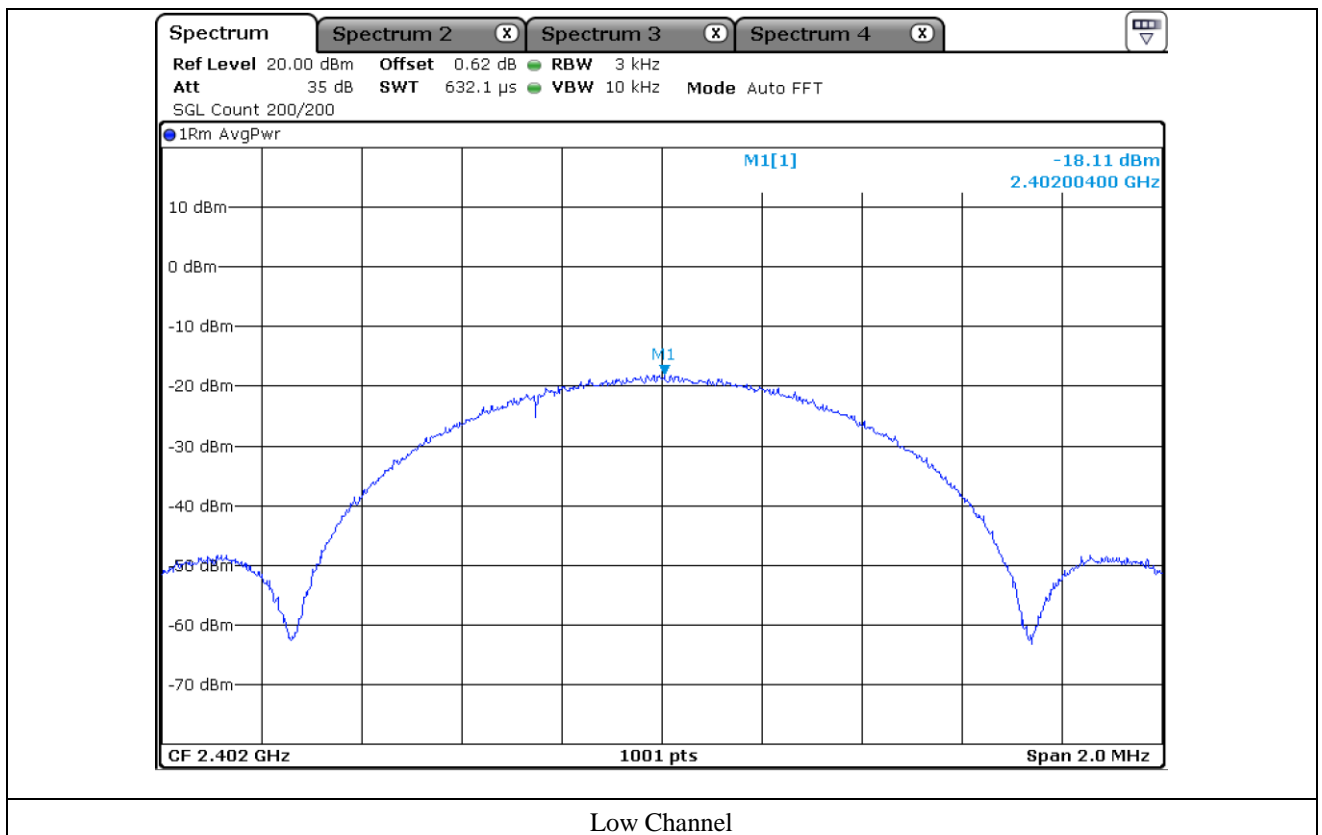

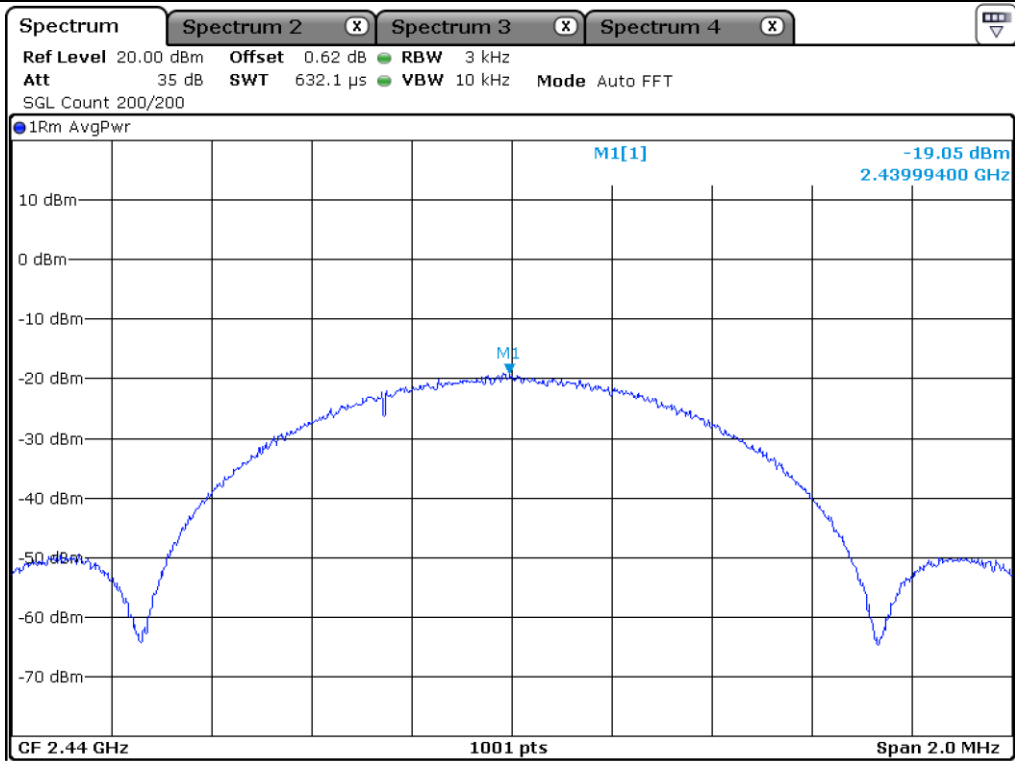

Middle Channel

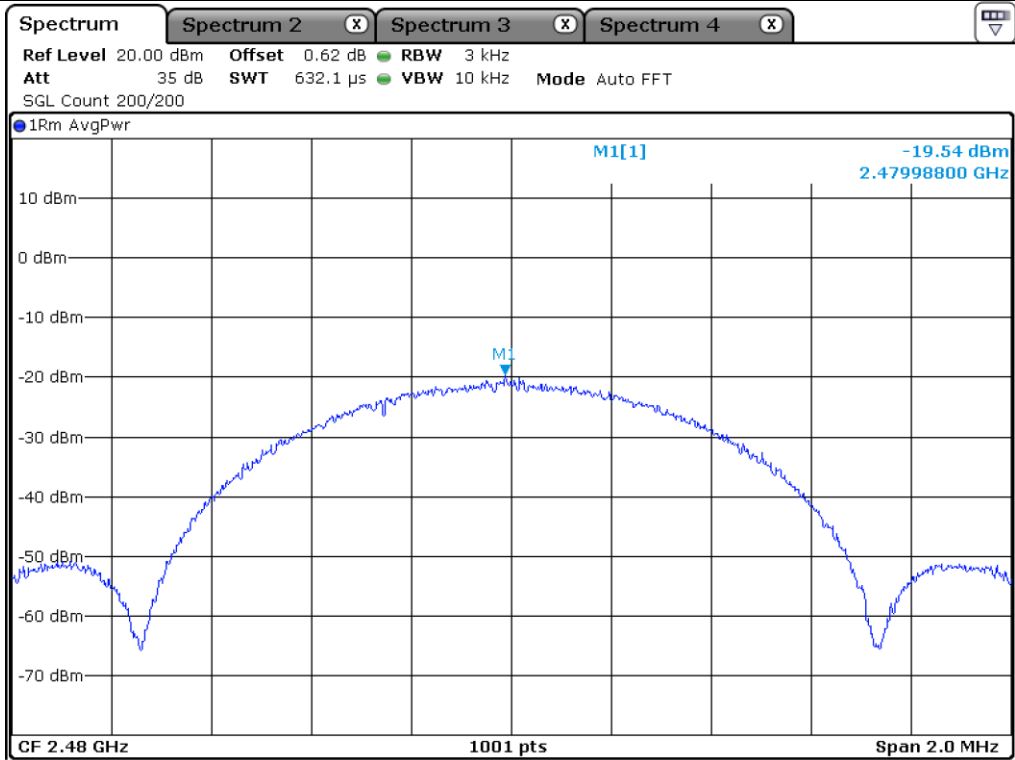

High Channel

This Report is not correlated with the authentication of KOLAS

It should not be reproduced except in full, without the written approval of ONETECH Corp.

OTC-TRF-RF-001(0)

## 11. RADIATED EMISSION TEST

### 11.1 Operating environment

Temperature : 22.5 °C  
Relative humidity : 53.5 % R.H.

### 11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

### 11.3 Test Date

January 10, 2022 ~ January 17, 2022

**11.4 Test data for Left Earbud**

**11.4.1 Test data for 30 MHz ~ 1000 MHz**


Humidity Level : 53.5 % R.H. Temperature: 22.5 ° C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Bluetooth Earbuds

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

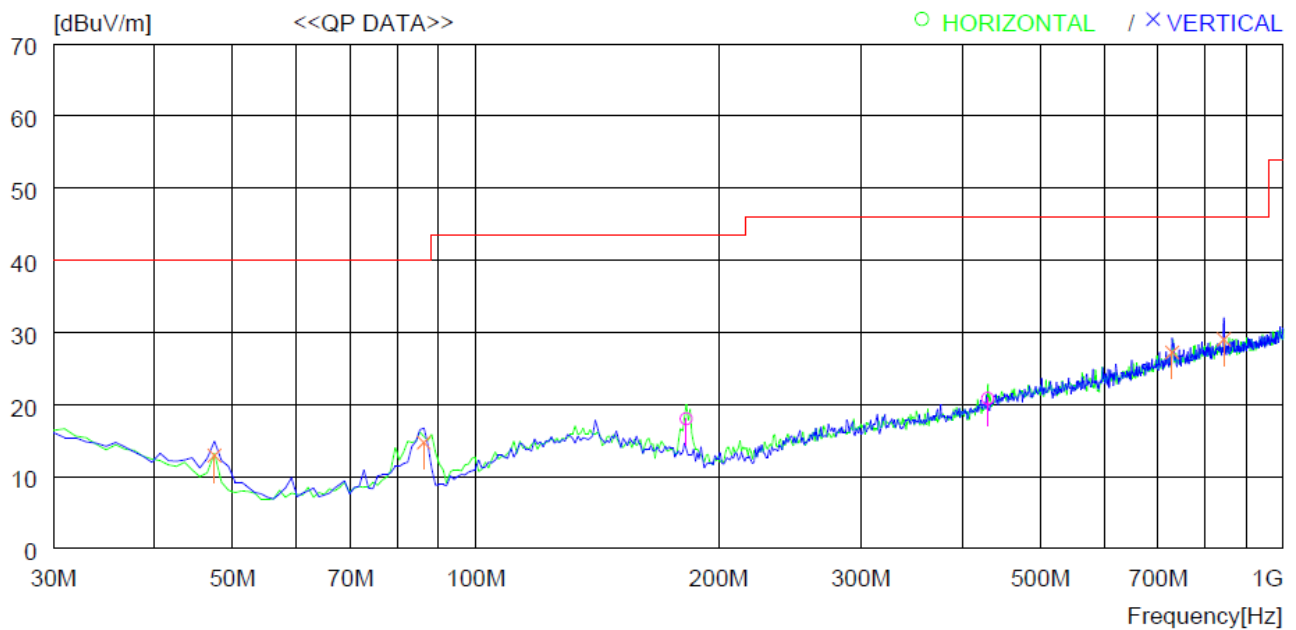

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	182.290	30.3	16.3	3.9	32.5	18.0	43.5	25.5	300	359
2	430.611	25.3	21.8	6.1	32.4	20.8	46.0	25.2	300	359
----- Vertical -----										
3	47.460	29.4	14.1	1.9	32.5	12.9	40.0	27.1	100	0
4	86.260	31.4	13.2	2.6	32.5	14.7	40.0	25.3	200	7
5	728.394	25.8	26.0	7.9	32.5	27.2	46.0	18.8	200	359
6	843.821	25.4	27.2	8.6	32.2	29.0	46.0	17.0	200	359

**11.4.2 Test data for Below 30 MHz**

- Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- Frequency range : 9 kHz ~ 30 MHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

**11.4.3 Test data for above 1 GHz**

- Resolution bandwidth : 1 MHz for Peak and Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

**11.5 Test data for Right Earbud**

**11.5.1 Test data for 30 MHz ~ 1000 MHz**


Humidity Level : 53.5 % R.H. Temperature: 22.5 ° C

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Bluetooth Earbuds

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

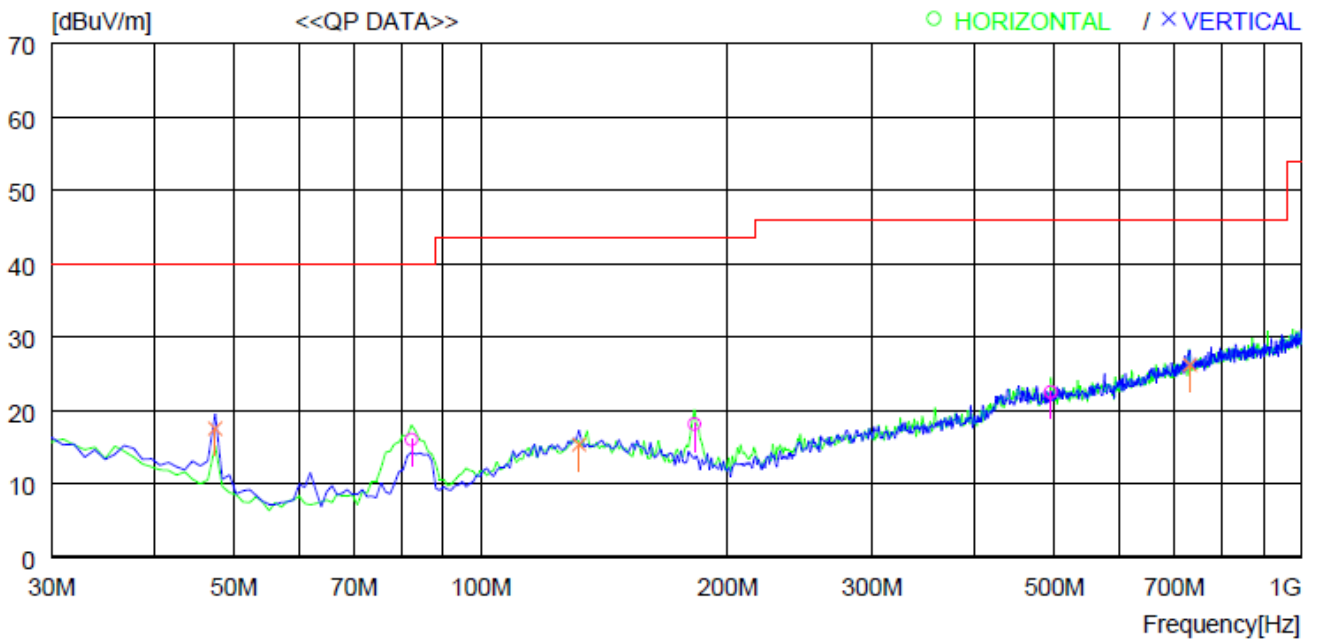

No.	FREQ [MHz]	READING QP [dBuV]	ANT FACTOR [dB]	LOSS [dB]	GAIN [dB]	RESULT [dBuV/m]	LIMIT [dBuV/m]	MARGIN [dB]	ANTENNA [cm]	TABLE [DEG]
----- Horizontal -----										
1	82.380	32.8	13.0	2.7	32.5	16.0	40.0	24.0	400	239
2	182.290	30.4	16.3	3.9	32.5	18.1	43.5	25.4	400	280
3	495.601	25.2	23.1	6.6	32.4	22.5	46.0	23.5	200	359
----- Vertical -----										
4	47.460	34.0	14.1	1.9	32.5	17.5	40.0	22.5	100	359
5	131.850	25.0	19.4	3.4	32.5	15.3	43.5	28.2	400	74
6	732.274	24.6	26.1	8.0	32.5	26.2	46.0	19.8	200	240

**11.5.2 Test data for Below 30 MHz**

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

**11.5.3 Test data for above 1 GHz**

- . Resolution bandwidth : 1 MHz for Peak and Average Mode
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

## 12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101457	Apr. 16, 2021 (1Y)
ESR	Rohde & Schwarz	EMI TEST RECEIVER	101470	Oct. 18, 2021 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	312544	Mar. 16, 2021 (1Y)
DT3000-3t	Innco System	Turn Table	DT3000/093	N/A
MA-4000XPET	Innco System	Antenna Master	MA4000/509	N/A
BBHA9120D	Schwarzbeck	Horn Antenna	295	Mar. 04, 2021(1Y)
SCU 18	Rohde & Schwarz	Amplifier	102209	Oct. 14, 2021(1Y)
HLP-2008	TDK RF Solutions	Hybrid Antenna	131314	Feb. 27, 2020 (2Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter (1-3 GHz)	N/A	Feb. 08, 2021 (1Y)
ZUP36-6	TDK-Lambda	DC POWER SUPPLY	6MJ-850Z16-0014	Jan. 03, 2021 (1Y)