



FCC RADIO TEST REPORT

FCC ID : U4G-SGVNRNA
Equipment : Mobile Computer/Barcode Reader
Brand Name : Datalogic
Model Name : SGVNRNA
Applicant : Datalogic S.r.l.
Via San Vitalino 13, 40012 Lippo di Calderara di Reno (BO) – Italy
Manufacturer : Datalogic S.r.l.
Via San Vitalino 13, 40012 Lippo di Calderara di Reno (BO) – Italy
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 17, 2024 and testing was performed from Apr. 25, 2024 to May 30, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report..... 3

Summary of Test Result..... 4

1 General Description..... 5

 1.1 Product Feature of Equipment Under Test..... 5

 1.2 Modification of EUT 6

 1.3 Testing Location 6

 1.4 Applicable Standards..... 6

2 Test Configuration of Equipment Under Test 7

 2.1 Carrier Frequency Channel 7

 2.2 Test Mode..... 8

 2.3 Connection Diagram of Test System..... 10

 2.4 Support Unit used in test configuration and system 10

 2.5 EUT Operation Test Setup 10

 2.6 Measurement Results Explanation Example..... 11

3 Test Result..... 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement..... 13

 3.3 Power Spectral Density Measurement 14

 3.4 Conducted Band Edges and Spurious Emission Measurement 15

 3.5 Radiated Band Edges and Spurious Emission Measurement 16

 3.6 AC Conducted Emission Measurement..... 20

 3.7 Antenna Requirements 22

4 List of Measuring Equipment 23

5 Measurement Uncertainty 25

Appendix A. Conducted Test Results

Appendix B. AC Conducted Emission Test Result

Appendix C. Radiated Spurious Emission

Appendix D. Radiated Spurious Emission Plots

Appendix E. Duty Cycle Plots

Appendix F. Setup Photographs



History of this test report

Report No.	Version	Description	Issue Date
FR440146B	01	Initial issue of report	Jul. 03, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	6.42 dB under the limit at 2488.36 MHz
3.6	15.207	AC Conducted Emission	Pass	8.78 dB under the limit at 0.63 MHz
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

1. The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.
2. The purpose of different equipment name is for marketing segmentation.

Reviewed by: Wei Chen

Report Producer: Wilda Wei



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11a/ax, NFC, WPC Rx, and GNSS
Antenna Type	WWAN: <Ant. 0>: Loop Antenna <Ant. 1>: Loop Antenna <Ant. 2+3>: Coupling monopole Antenna <Ant. 4>: PIFA Antenna <Ant. 5>: PIFA Antenna <Ant. 6>: Loop Antenna <Ant. 7>: Monopole Antenna WLAN: <Ant. 8>: Coupling monopole Antenna <Ant. 9>: Loop Antenna Bluetooth: Coupling monopole Antenna GPS/Glonass/BDS/Galileo: Coupling monopole Antenna NFC: Loop Antenna WPC Rx: Single Coil Antenna
Sample 1	scan (Argon)
Sample 2	scan (Xenon)
HW Version	DVT2
SW Version	dl4490_gms-userdebug_1.04.001.20240520_a13_qfil_fastboot

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	-1.1

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List		
S/N	P/N	Performed Test Item
919f8e49	944850003	RF Conducted Measurement
V24D00530 V24D00429	944850003 944850006	Radiated Spurious Emission
V24D00547 V24D00390	944850003 944850006	AC Conducted Emission



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY(TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.


The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	Mode 7: Bluetooth Tx CH00_2402 MHz_125Kbps
	Mode 8: Bluetooth Tx CH19_2440 MHz_125Kbps
	Mode 9: Bluetooth Tx CH39_2480 MHz_125Kbps
	Mode 10: Bluetooth Tx CH00_2402 MHz_500Kbps
	Mode 11: Bluetooth Tx CH19_2440 MHz_500Kbps
	Mode 12: Bluetooth Tx CH39_2480 MHz_500Kbps



Summary table of Test Cases	
Test Item	Bluetooth – LE / GFSK
Radiated Test Cases	<p><Sample 1></p> <p>Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps</p> <p>Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps</p> <p>Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps</p> <p>Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps</p> <p>Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps</p> <p>Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps</p> <p><Sample 2></p> <p>Mode 7: Bluetooth Tx CH39_2480 MHz_2Mbps</p>
AC Conducted Emission	Mode 1: GSM 900 Link + WLAN (2.4GHz) Link + Bluetooth Link + NFC Link + GPS + Battery (low power) + USB Cable (Charging from AC Adapter) for Sample 1
Remark:	
<ol style="list-style-type: none">1. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.2. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test.	

2.3 Connection Diagram of Test System

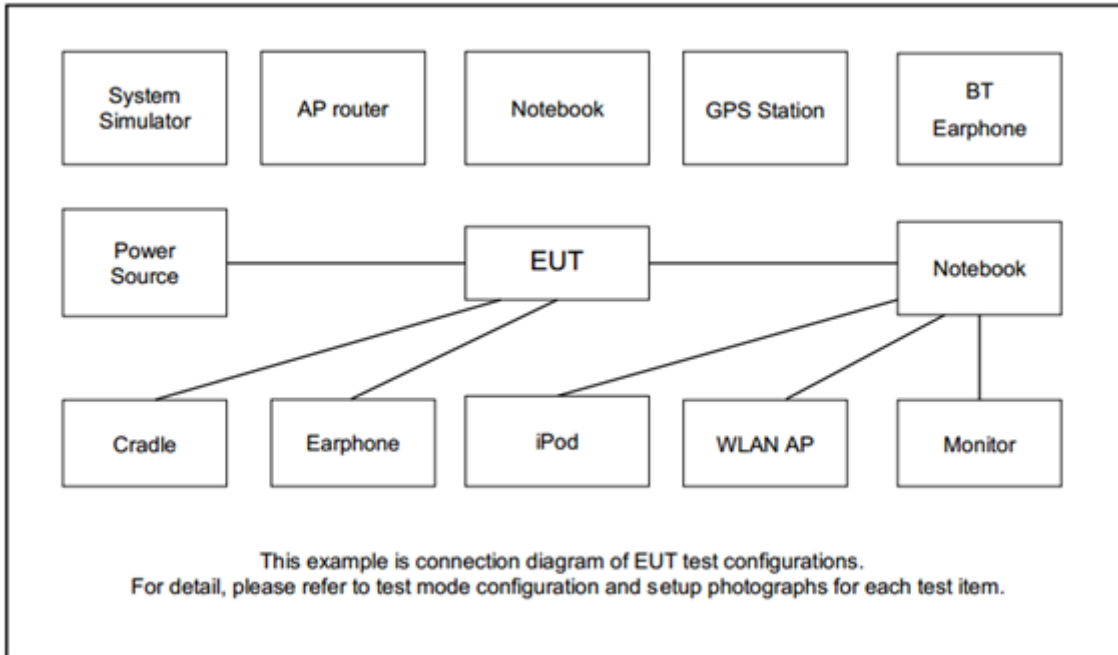

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	GPS Station	Pendulum	GSG-54	N/A	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Sony Ericsson	MW600	PY700A2029	N/A	N/A
4.	WLAN AP	ASUS	GT-AXE11000	FCC DoC	N/A	Unshielded,1.8m
5.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	SD Card	ADATA	MicroSD HC	FCC DoC	N/A	N/A
7.	NFC Card	Metro Taipei	Easy Card	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT 4.0.00206.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1.
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator.
4. The path loss is compensated to the results for each measurement.
5. Set the maximum power setting and enable the EUT to transmit continuously.
6. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

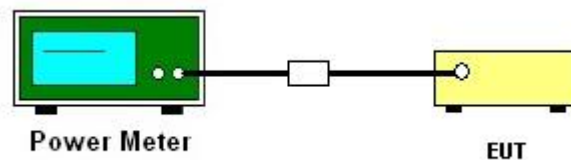

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

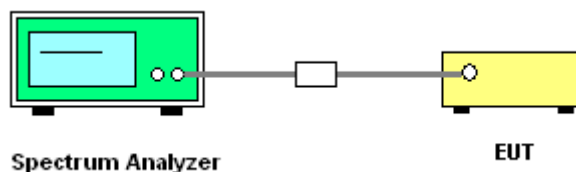

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedure

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

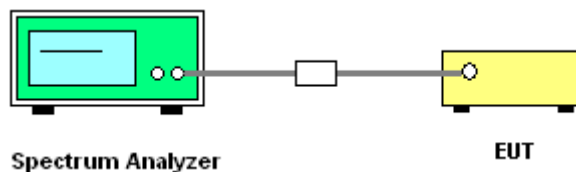

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated test below 30MHz

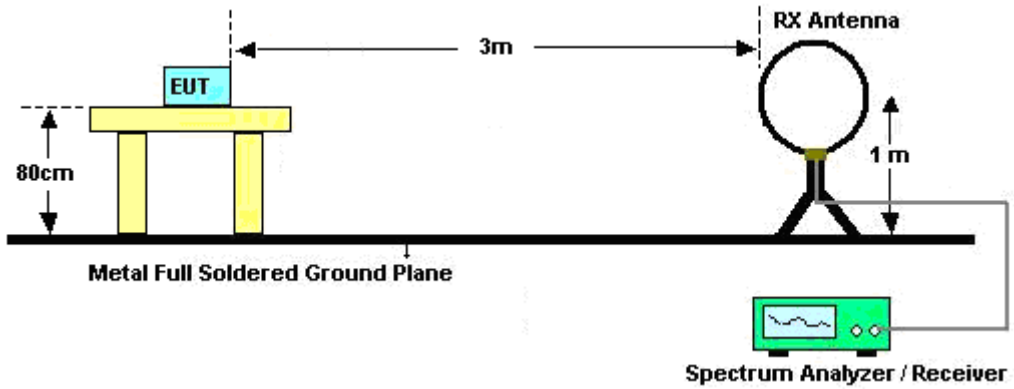


For radiated test from 30MHz to 1GHz

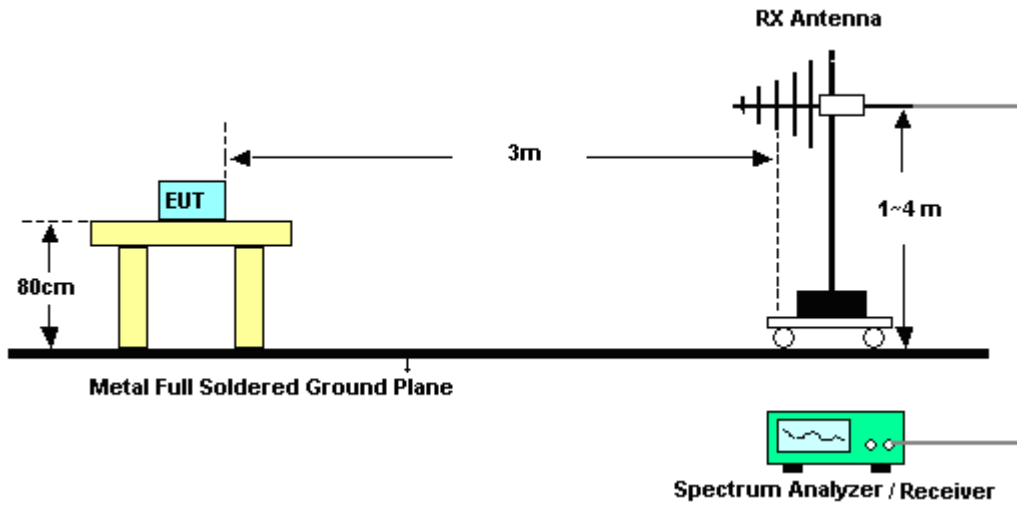

For radiated test from 1GHz to 18GHz

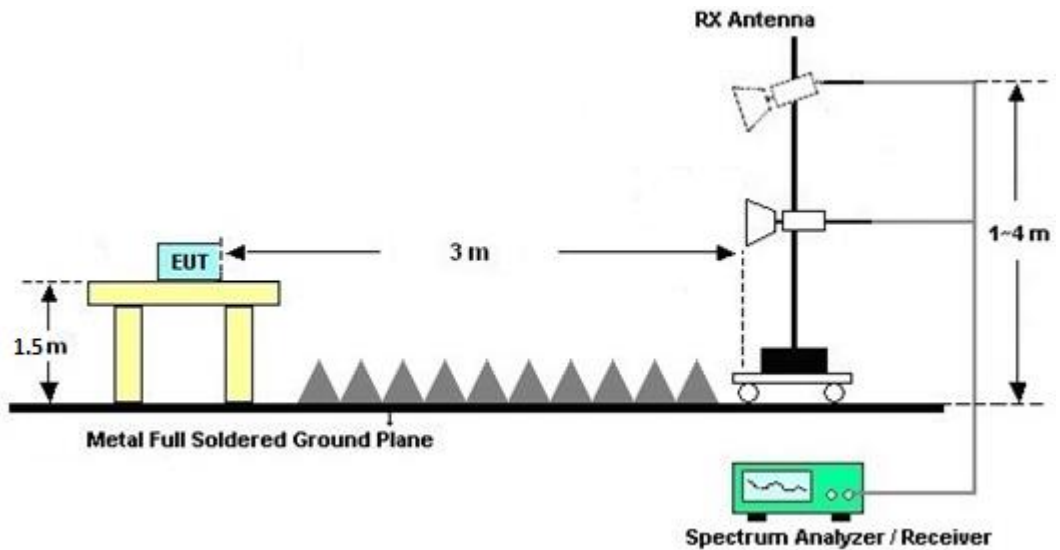

For radiated test above 18GHz

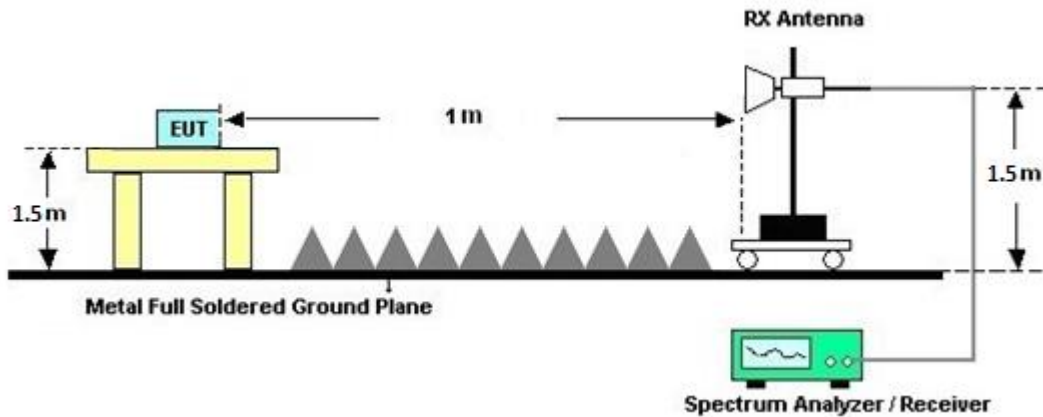

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

For terminal test result, the testing follows FCC KDB 174176.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

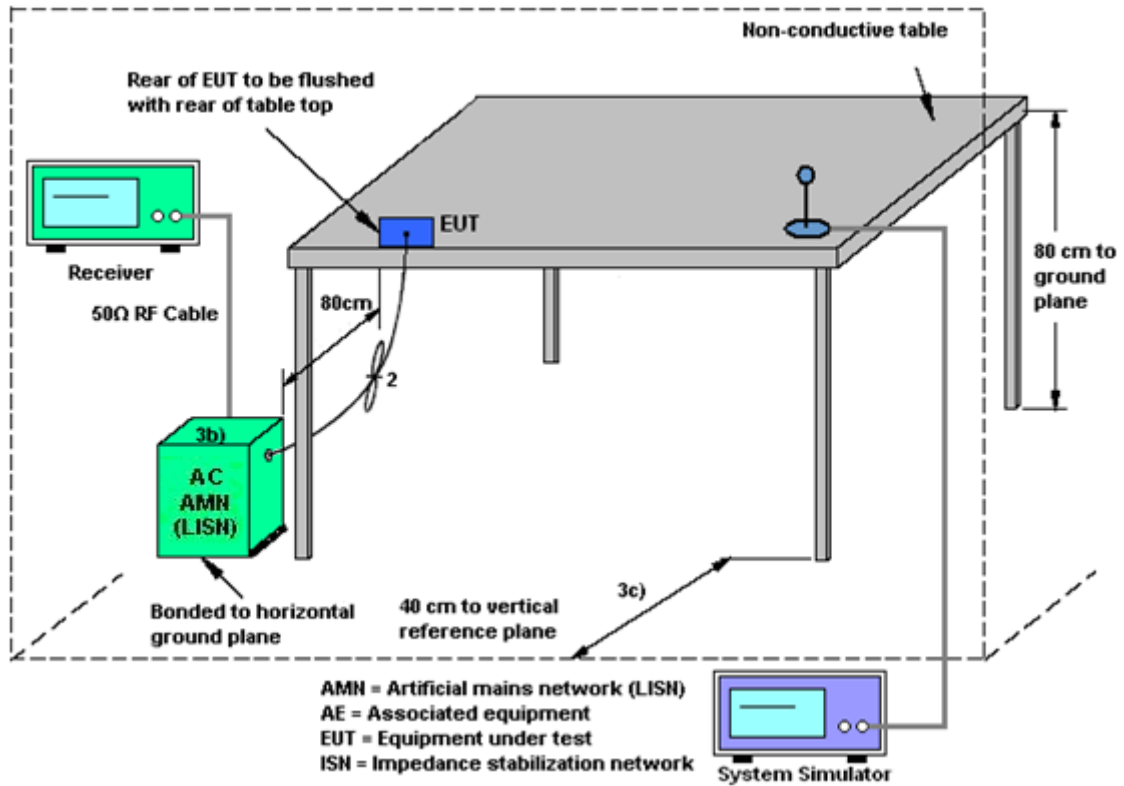

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Apr. 25, 2024~ May 29, 2024	Sep. 11, 2024	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA9170	1224	18GHz~40GHz	Jul. 10, 2023	Apr. 25, 2024~ May 29, 2024	Jul. 09, 2024	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-06	47020 & 06	30MHz to 1GHz	Oct. 07, 2023	Apr. 25, 2024~ May 29, 2024	Oct. 06, 2024	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 28, 2024	Apr. 25, 2024~ May 29, 2024	Mar. 27, 2025	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 03, 2023	Apr. 25, 2024~ May 29, 2024	Jul. 02, 2024	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 07, 2023	Apr. 25, 2024~ May 29, 2024	Dec. 06, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 25, 2023	Apr. 25, 2024~ May 29, 2024	Dec. 24, 2024	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 27, 2023	Apr. 25, 2024~ May 29, 2024	Jun. 26, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 15, 2024	Apr. 25, 2024~ May 29, 2024	Jan. 14, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 OST	SN3	3GHz High Pass Filter	Jun. 29, 2023	Apr. 25, 2024~ May 29, 2024	Jun. 28, 2024	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Nov. 13, 2023	Apr. 25, 2024~ May 29, 2024	Nov. 12, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Apr. 25, 2024~ May 29, 2024	Mar. 05, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 08, 2023	Apr. 25, 2024~ May 29, 2024	Aug. 07, 2024	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Jan. 02, 2024	Apr. 25, 2024~ May 29, 2024	Jan. 01, 2025	Radiation (03CH16-HY)
Software	Audix	E3 6.2009-8-24	RK-001136	N/A	N/A	Apr. 25, 2024~ May 29, 2024	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Apr. 25, 2024~ May 29, 2024	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 25, 2024~ May 29, 2024	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 25, 2024~ May 29, 2024	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ChainTek	APC-1000W	N/A	N/A	N/A	May 15, 2024~ May 28, 2024	N/A	Conduction (CO05-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102388	9kHz~3.6GHz	Dec. 06, 2023	May 15, 2024~ May 28, 2024	Dec. 05, 2024	Conduction (CO05-HY)
Hygrometer	Testo	608-H1	34913912	N/A	Oct. 26, 2023	May 15, 2024~ May 28, 2024	Oct. 25, 2024	Conduction (CO05-HY)
LISN	Rohde & Schwarz	ENV216	100081	9kHz~30MHz	Nov. 22, 2023	May 15, 2024~ May 28, 2024	Nov. 21, 2024	Conduction (CO05-HY)
Software	Rohde & Schwarz	EMC32	N/A	N/A	N/A	May 15, 2024~ May 28, 2024	N/A	Conduction (CO05-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	00691	N/A	Jul. 28, 2023	May 15, 2024~ May 28, 2024	Jul. 27, 2024	Conduction (CO05-HY)
LISN Cable	MVE	RG-400	260260	N/A	Dec. 28, 2023	May 15, 2024~ May 28, 2024	Dec. 27, 2024	Conduction (CO05-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	May15, 2024~ May 30, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 27, 2023	May15, 2024~ May 30, 2024	Jul. 26, 2024	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 27, 2023	May15, 2024~ May 30, 2024	Jul. 26, 2024	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	May15, 2024~ May 30, 2024	Jan. 23, 2025	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50 dB
---	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Ju Chang	Temperature:	21~25	°C
Test Date:	2024/05/15~2024/05/30	Relative Humidity:	51~54	%

<1Mbps & 2Mbps>

TEST RESULTS DATA								
<u>6dB and 99% Occupied Bandwidth</u>								
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.016	0.674	0.50	Pass
BLE	1Mbps	1	19	2440	1.016	0.679	0.50	Pass
BLE	1Mbps	1	39	2480	1.016	0.670	0.50	Pass

TEST RESULTS DATA										
<u>Peak Power Table</u>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	1.78	30.00	-1.10	0.68	36.00	Pass
BLE	1Mbps	1	19	2440	0.94	30.00	-1.10	-0.16	36.00	Pass
BLE	1Mbps	1	39	2480	0.82	30.00	-1.10	-0.28	36.00	Pass

TEST RESULTS DATA											
<u>Average Power Table (Reporting Only)</u>											
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail	
BLE	1Mbps	1	0	2402	1.78	30.00	-1.10	0.68	36.00	Pass	
BLE	1Mbps	1	19	2440	0.94	30.00	-1.10	-0.16	36.00	Pass	
BLE	1Mbps	1	39	2480	0.82	30.00	-1.10	-0.28	36.00	Pass	

TEST RESULTS DATA									
<u>Peak Power Density</u>									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.92	-13.56	-1.10	8.00	Pass
BLE	1Mbps	1	19	2440	-0.19	-14.56	-1.10	8.00	Pass
BLE	1Mbps	1	39	2480	-0.24	-14.71	-1.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.999	1.148	0.50	Pass
BLE	2Mbps	1	19	2440	1.999	1.160	0.50	Pass
BLE	2Mbps	1	39	2480	1.995	1.152	0.50	Pass

TEST RESULTS DATA
Peak Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.61	30.00	-1.10	1.51	36.00	Pass
BLE	2Mbps	1	19	2440	1.95	30.00	-1.10	0.85	36.00	Pass
BLE	2Mbps	1	39	2480	1.78	30.00	-1.10	0.68	36.00	Pass

TEST RESULTS DATA
Average Power Table (Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.61	30.00	-1.10	1.51	36.00	Pass
BLE	2Mbps	1	19	2440	1.95	30.00	-1.10	0.85	36.00	Pass
BLE	2Mbps	1	39	2480	1.78	30.00	-1.10	0.68	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	0.87	-16.56	-1.10	8.00	Pass
BLE	2Mbps	1	19	2440	-0.25	-17.63	-1.10	8.00	Pass
BLE	2Mbps	1	39	2480	-0.32	-17.73	-1.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

<125Kbps & 500Kbps>

TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	125k	1	0	2402	1.16
BLE	125k	1	19	2440	0.41
BLE	125k	1	39	2480	0.26


TEST RESULTS DATA
Average Power Table
(Reporting Only)

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)
BLE	500k	1	0	2402	1.65
BLE	500k	1	19	2440	0.85
BLE	500k	1	39	2480	0.63




6dB Bandwidth

<1Mbps>

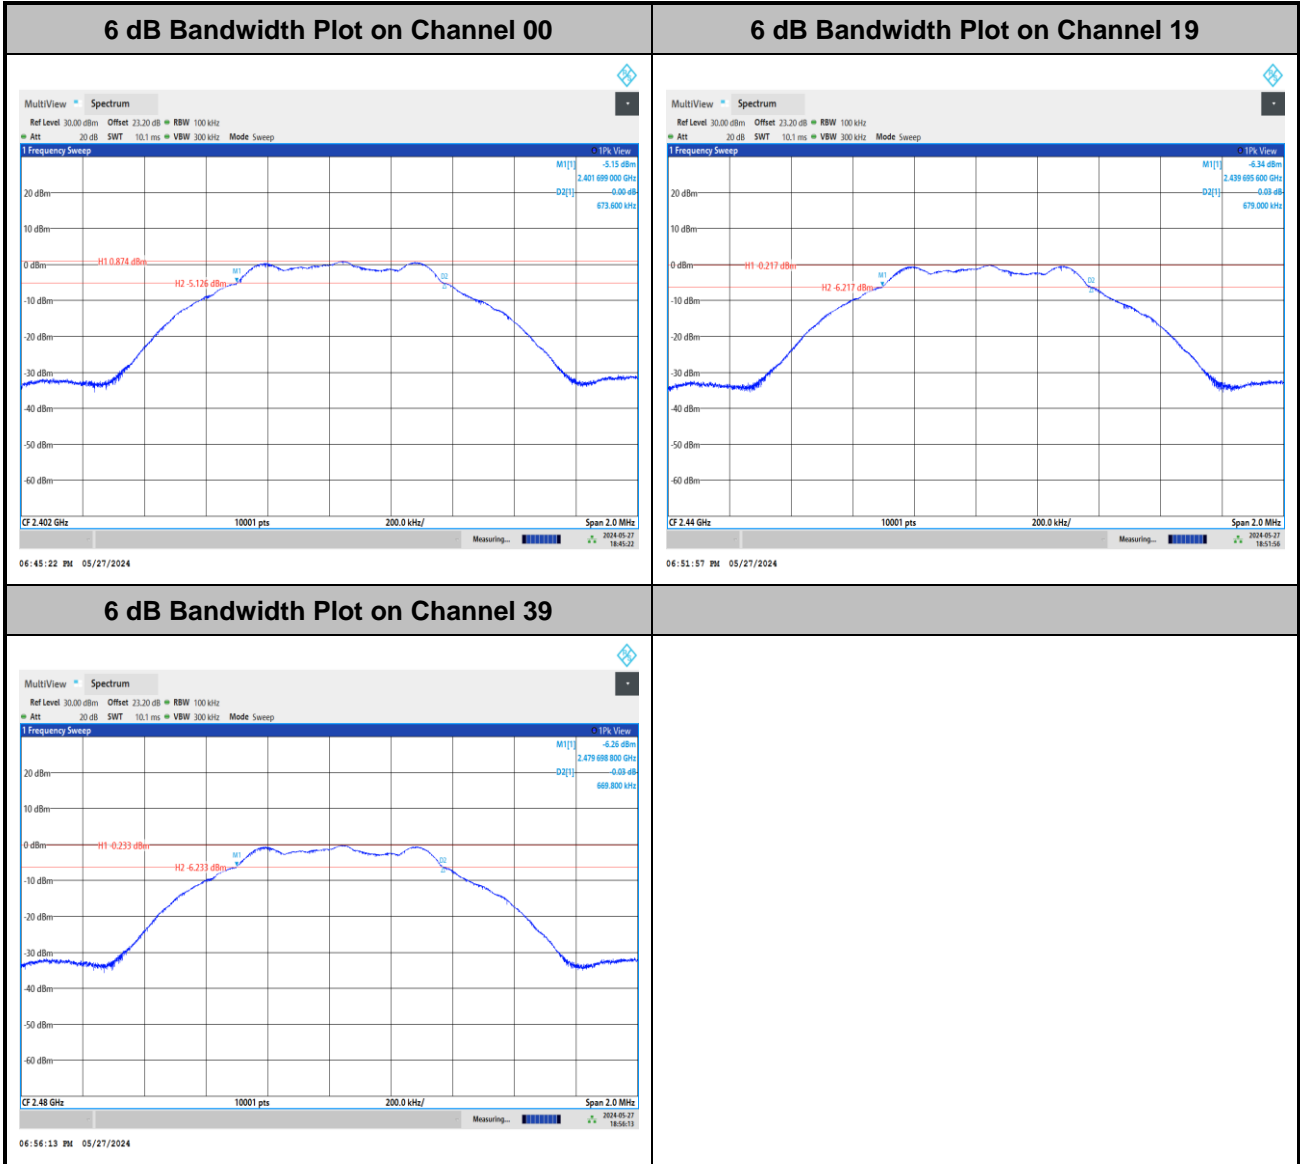



<2Mbps>

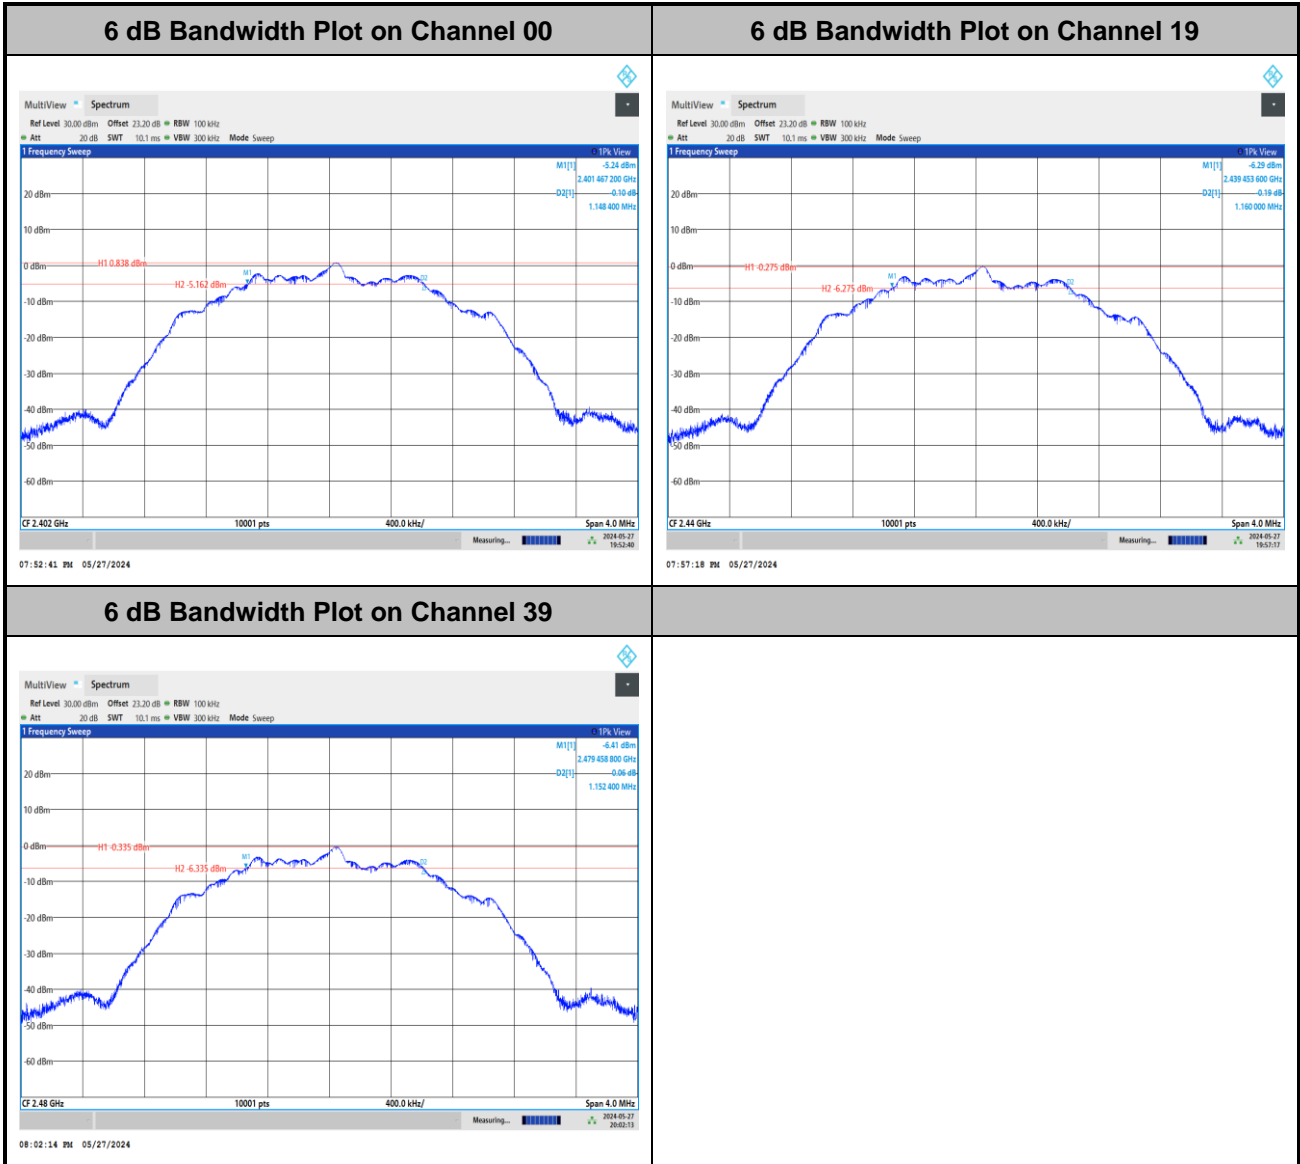





99% Occupied Bandwidth

<1Mbps>


99% Occupied Bandwidth Plot on Channel 00

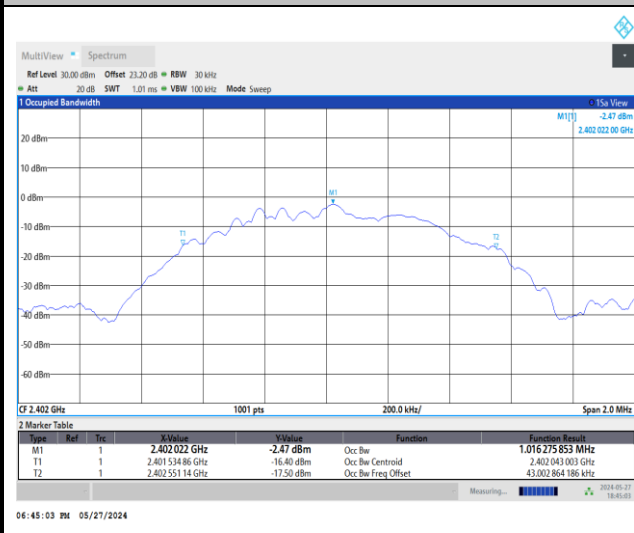

99% Occupied Bandwidth Plot on Channel 19

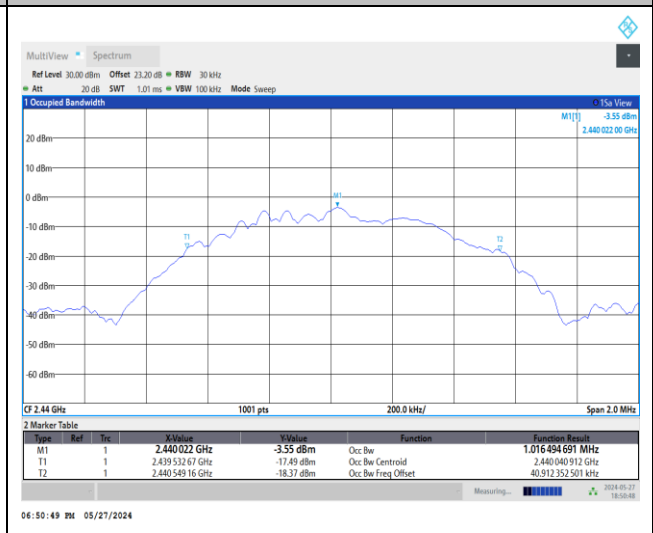


99% Occupied Bandwidth Plot on Channel 39

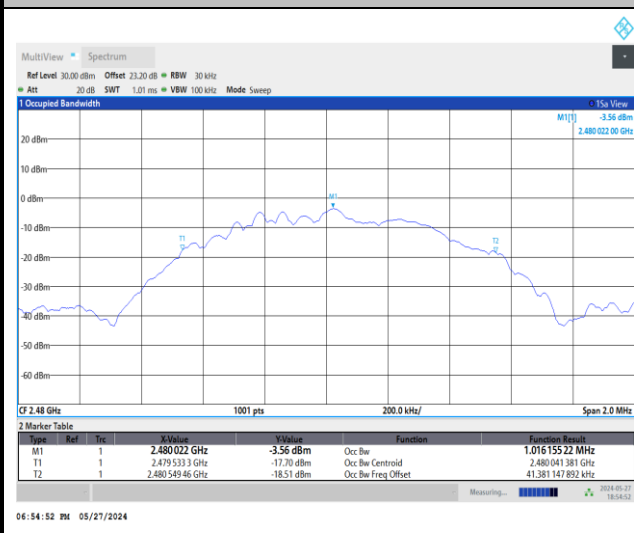




<2Mbps>

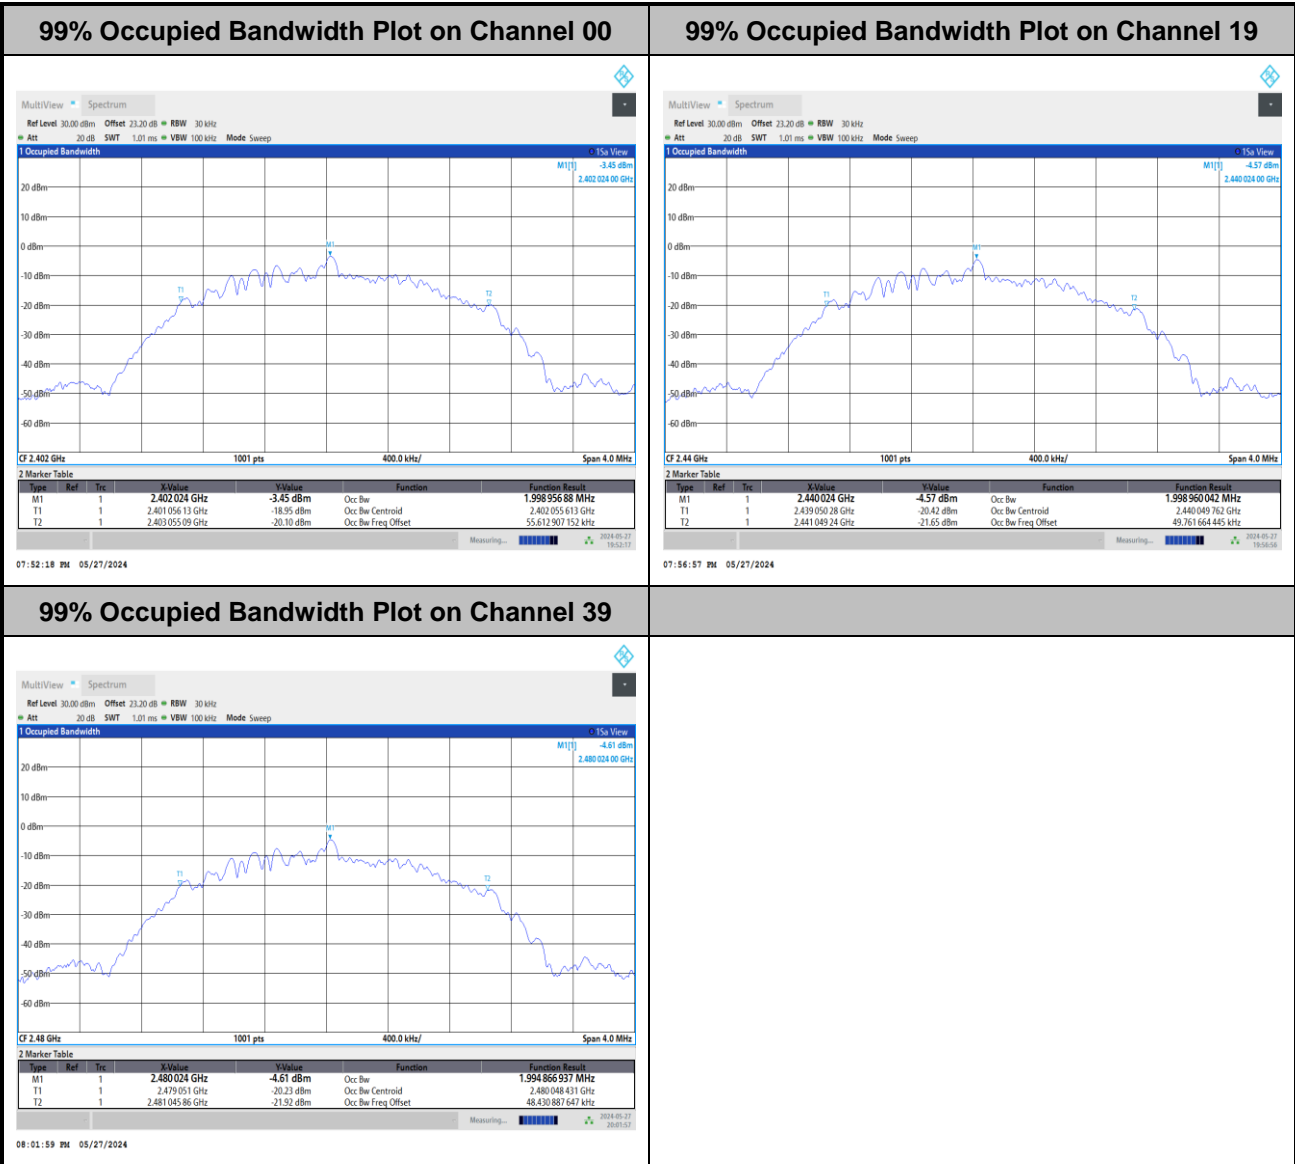




Power Spectral Density (dBm/3kHz)

<1Mbps>

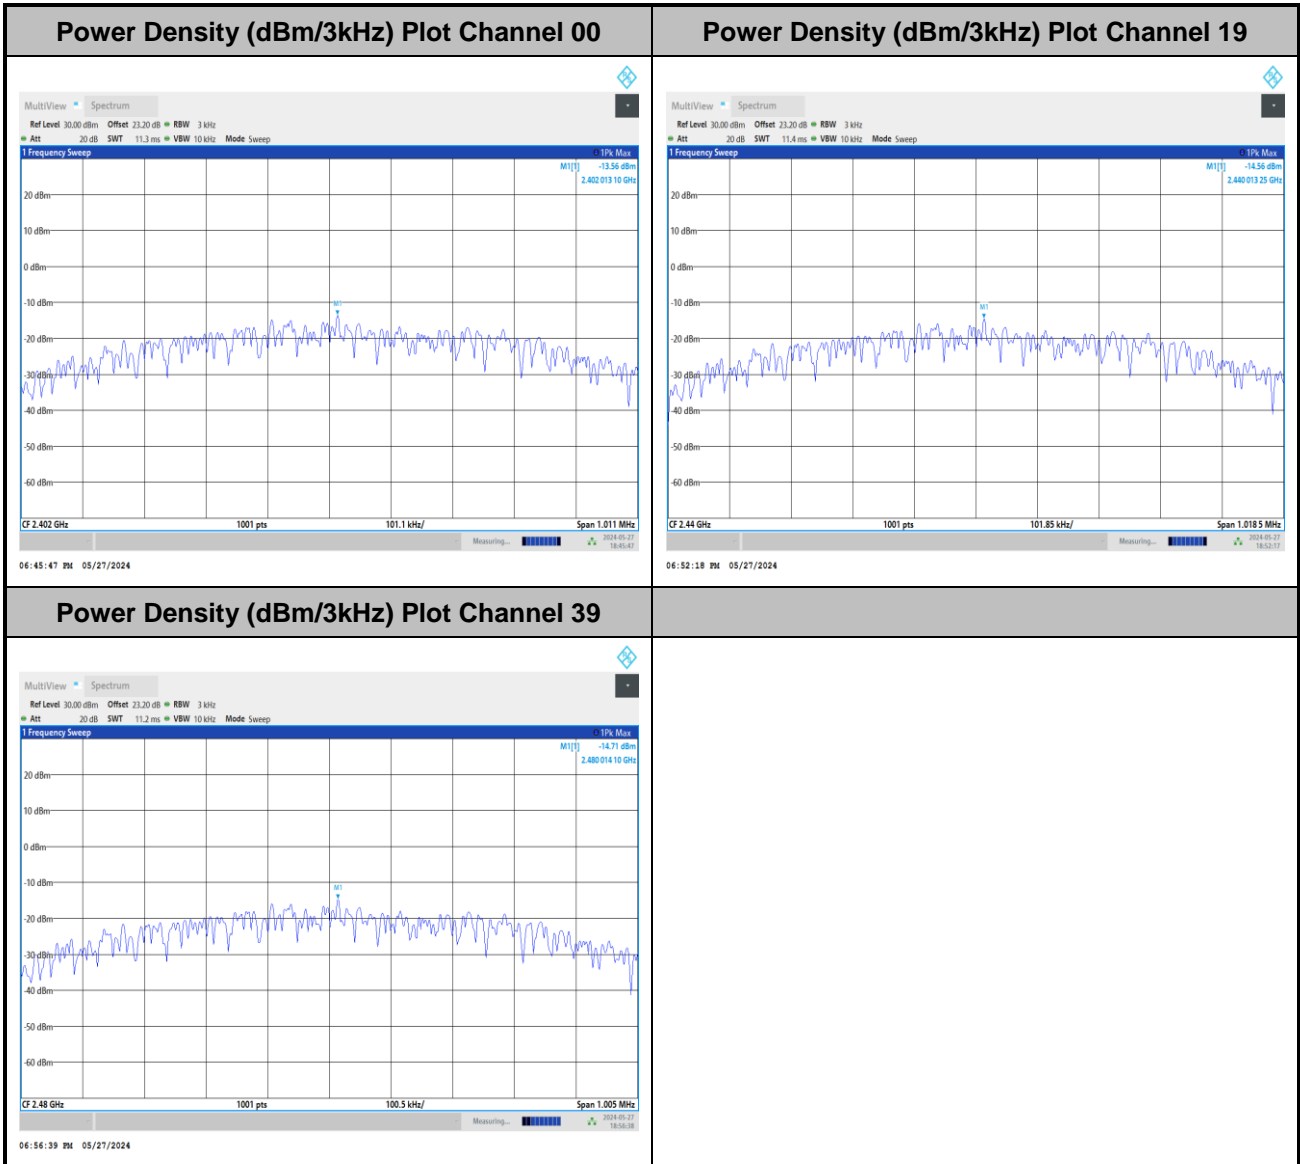



<2Mbps>

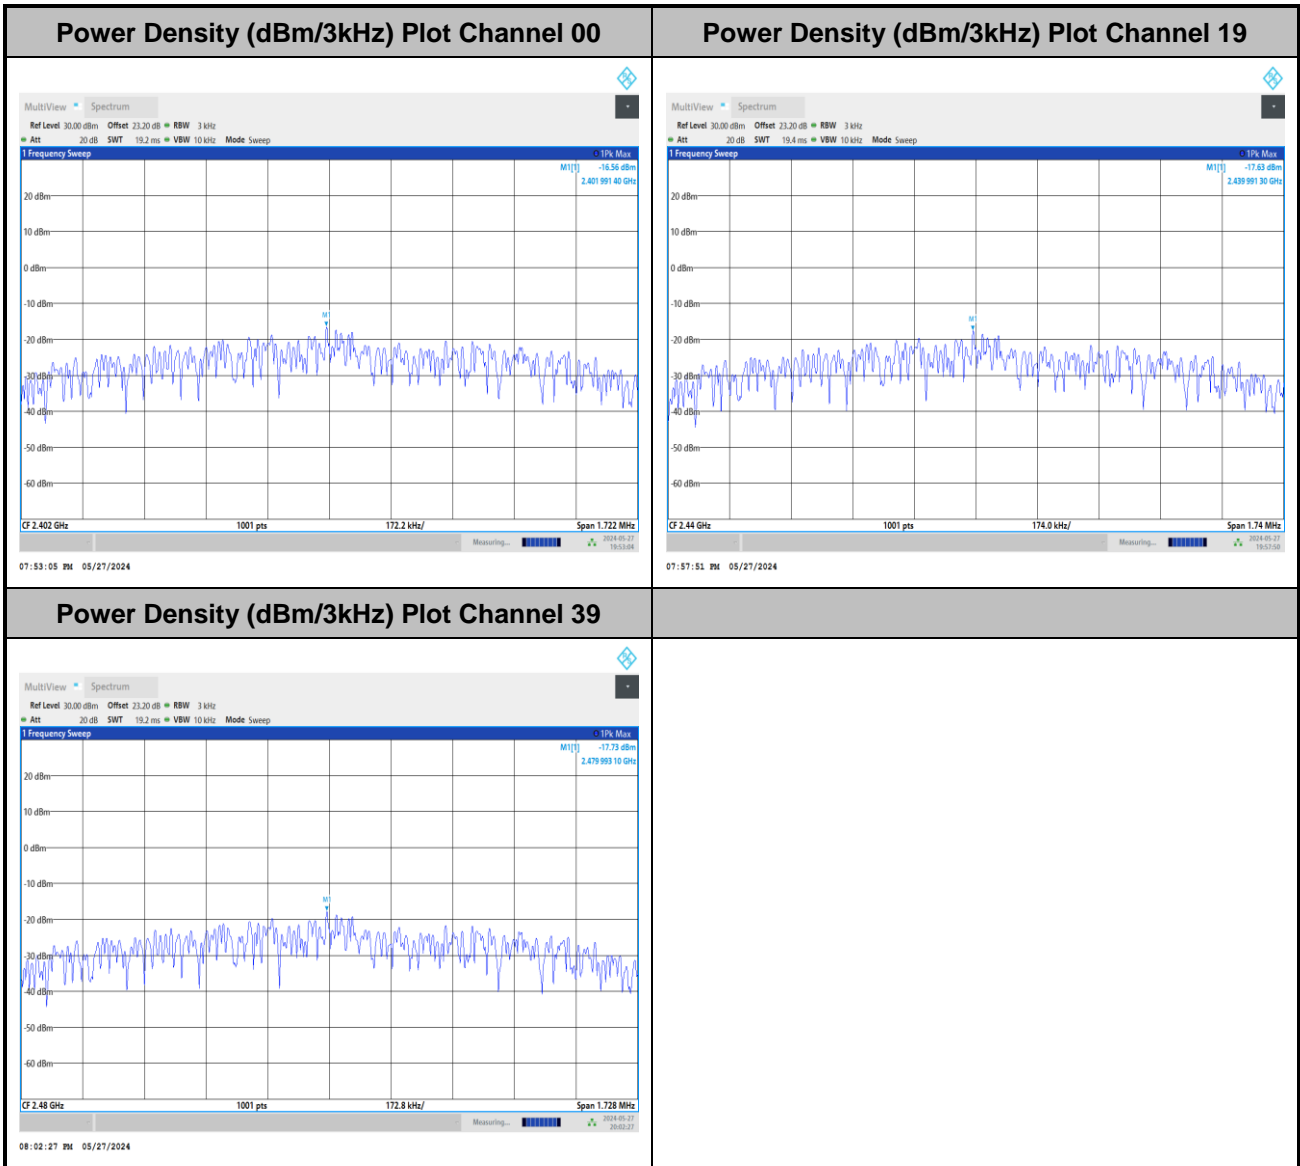




Band Edge and Conducted Spurious Emission


<1Mbps>

Channel 00


100kHz PSD reference Level Plot

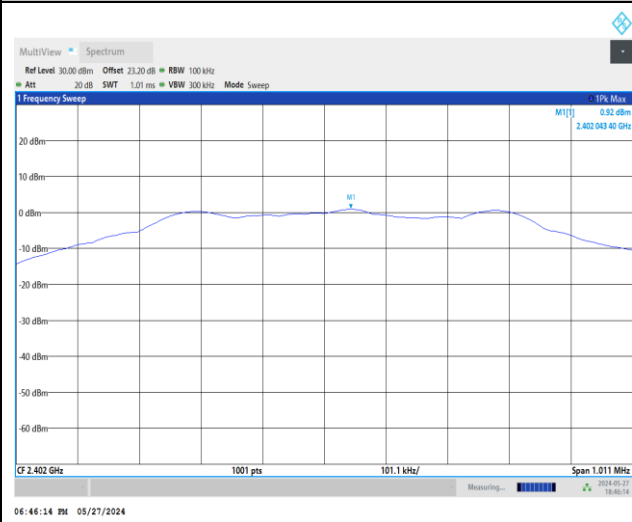


Low Channel Plot

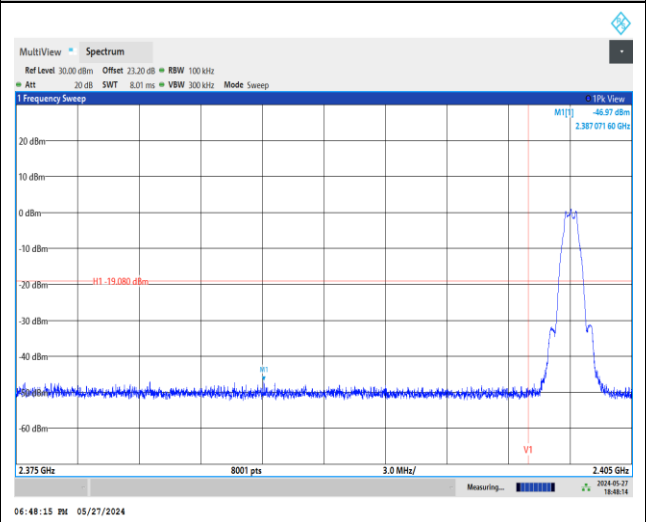

Spurious Emission 30MHz~1GHz Plot

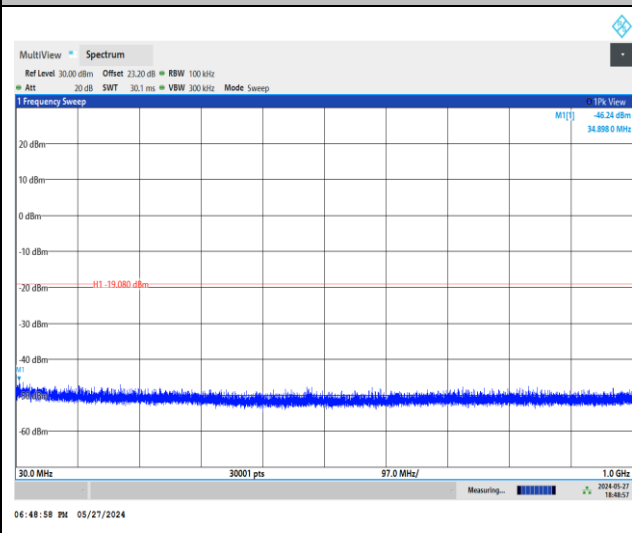


Spurious Emission 1GHz~26.5GHz Plot

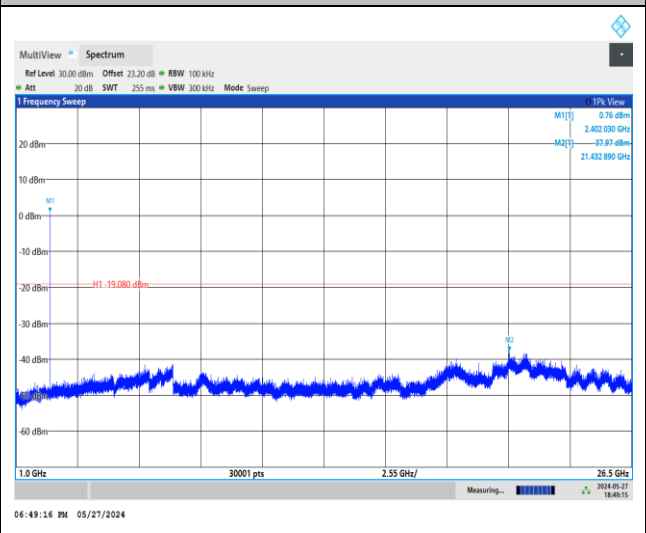



Channel 19


100kHz PSD reference Level Plot

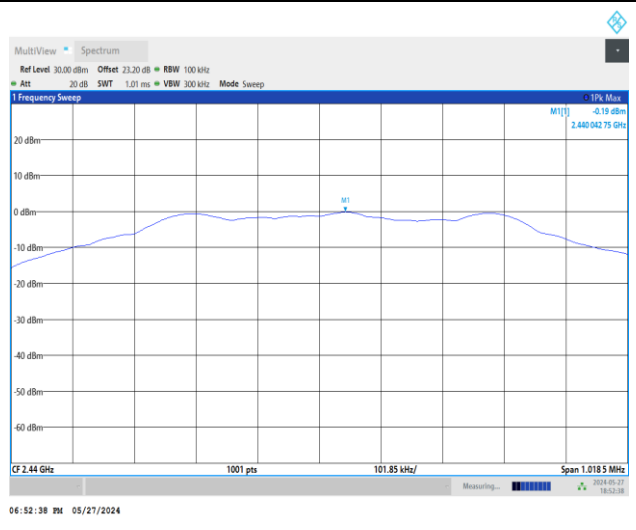


Mid Channel Plot



Spurious Emission 30MHz~1GHz Plot

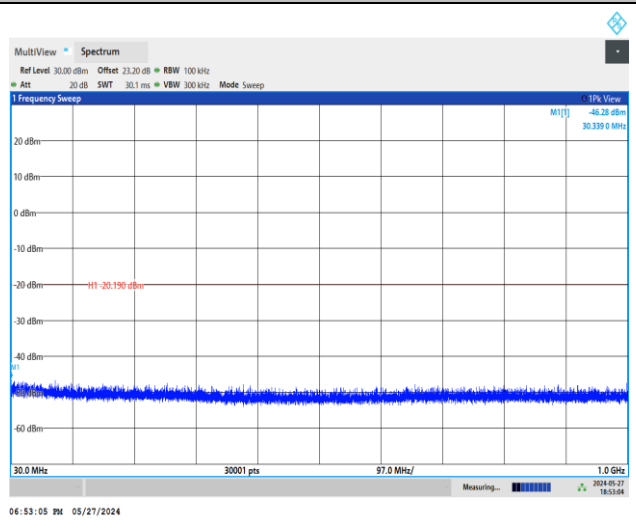


Spurious Emission 1GHz~26.5GHz Plot

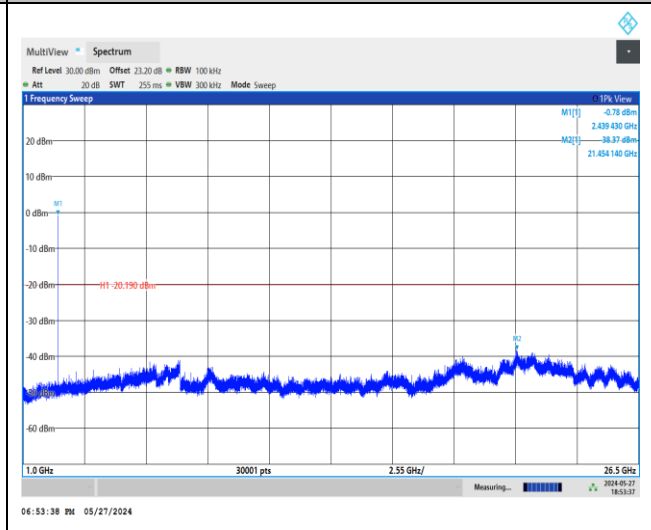




Channel 39


100kHz PSD reference Level Plot

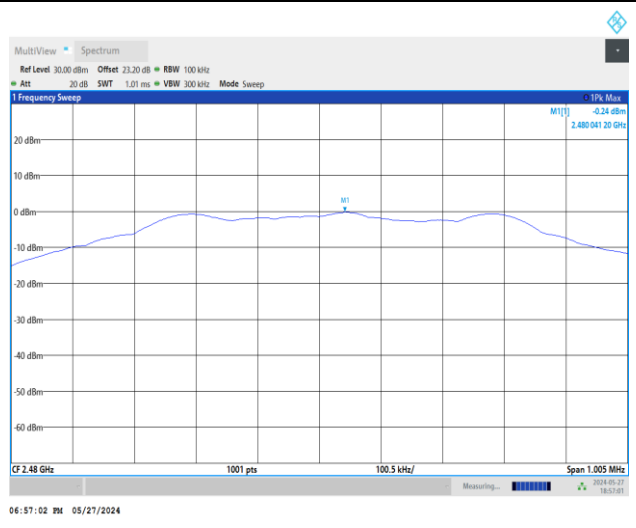


High Channel Plot

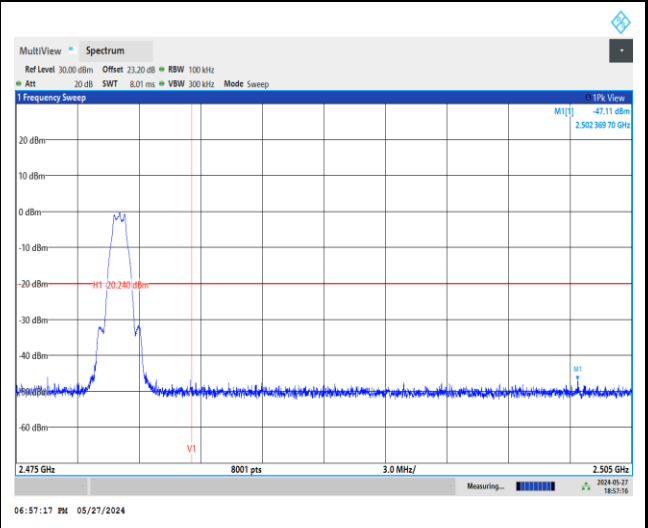

Spurious Emission 30MHz~1GHz Plot

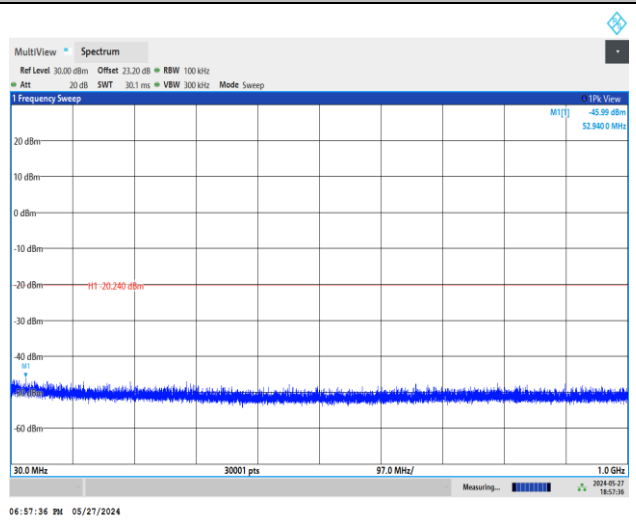


Spurious Emission 1GHz~26.5GHz Plot

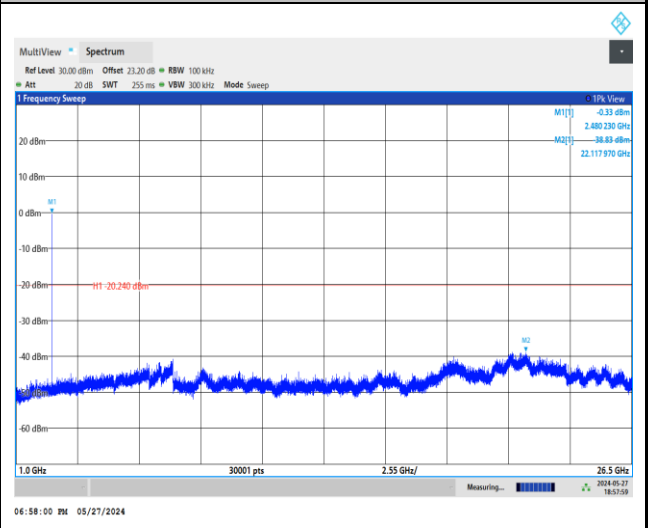




<2Mbps>

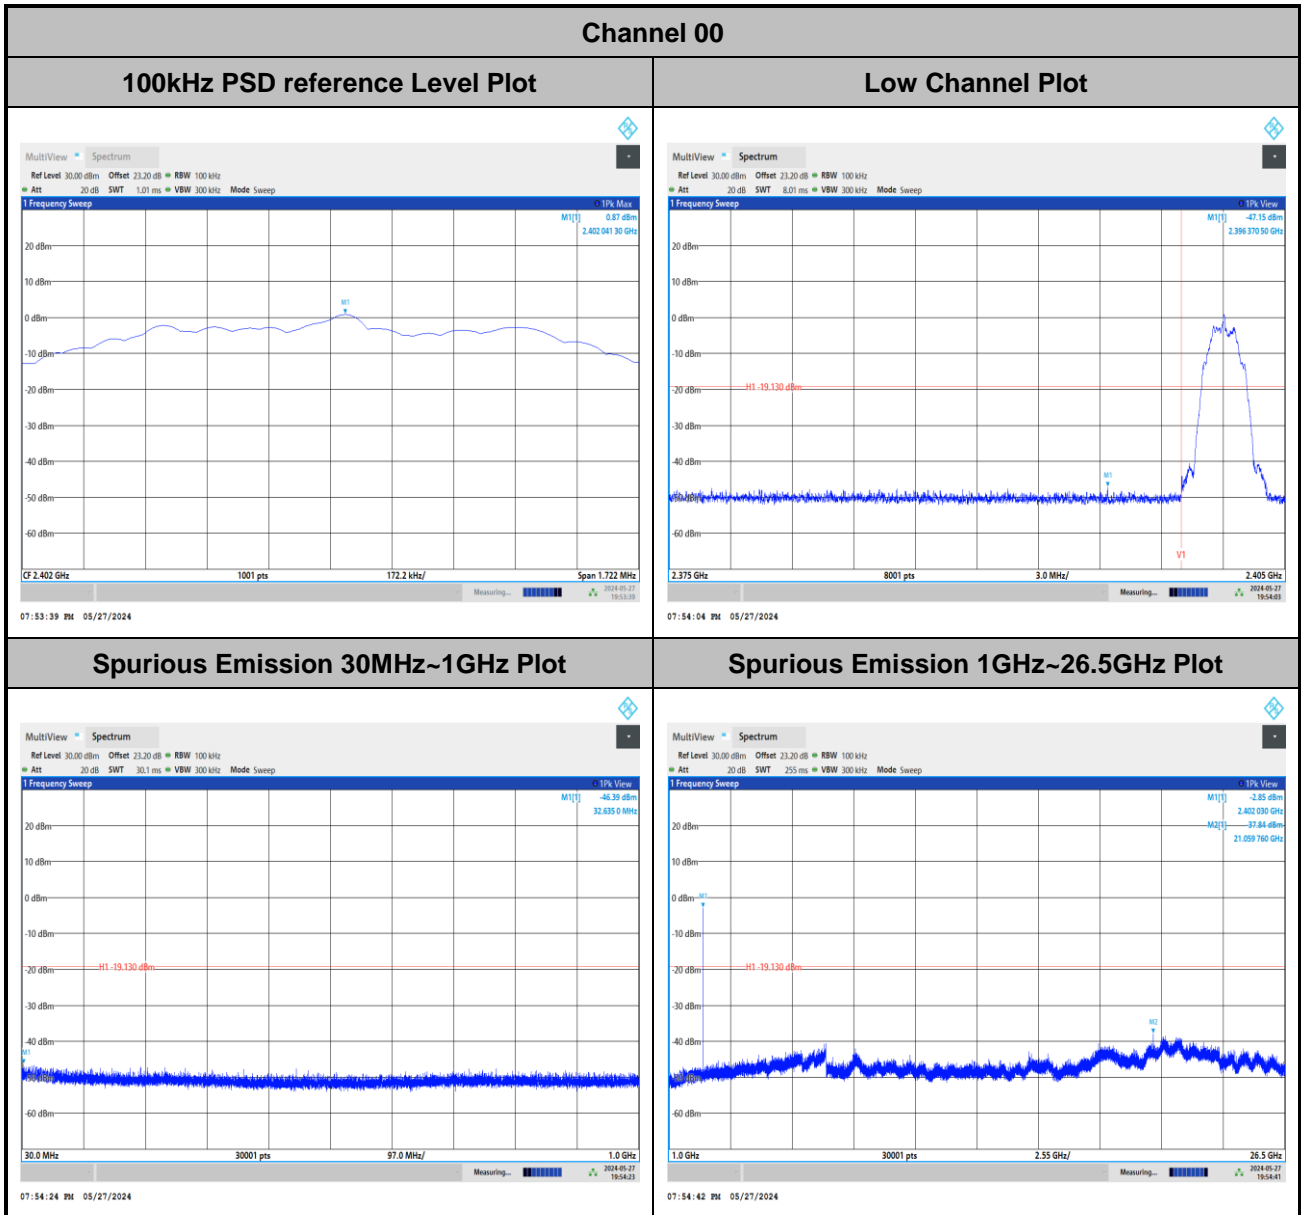




Channel 19

100kHz PSD reference Level Plot

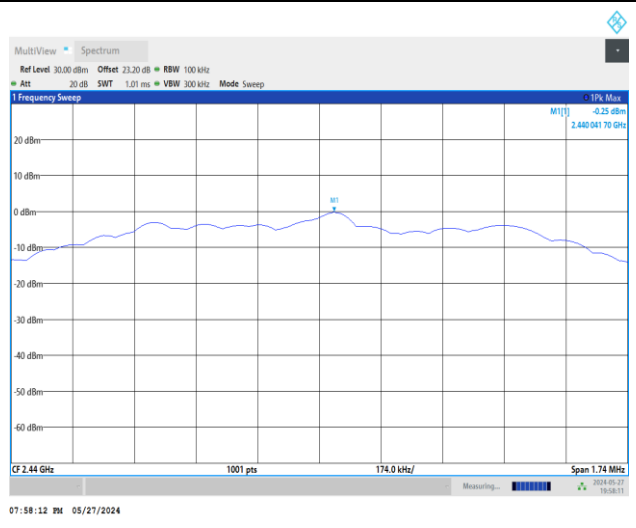


Mid Channel Plot

Spurious Emission 30MHz~1GHz Plot

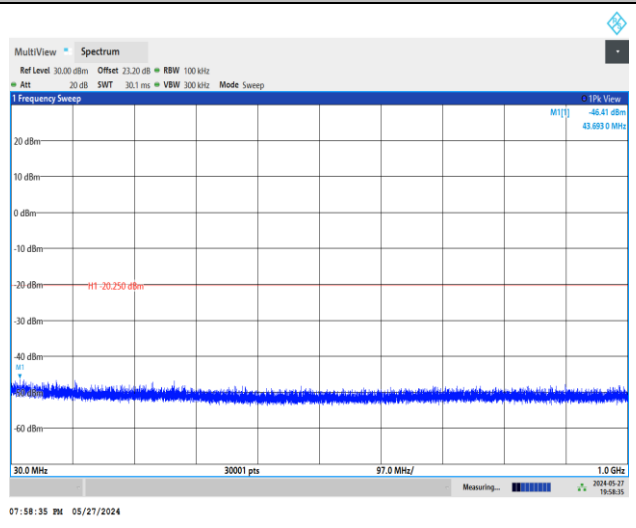


Spurious Emission 1GHz~26.5GHz Plot

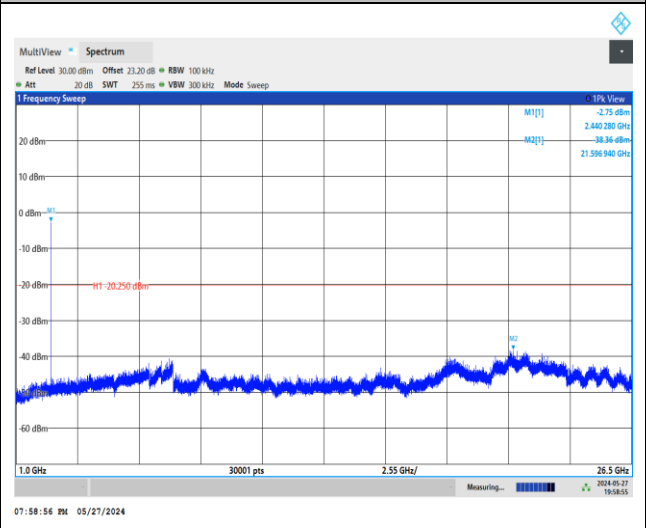




Channel 39


100kHz PSD reference Level Plot

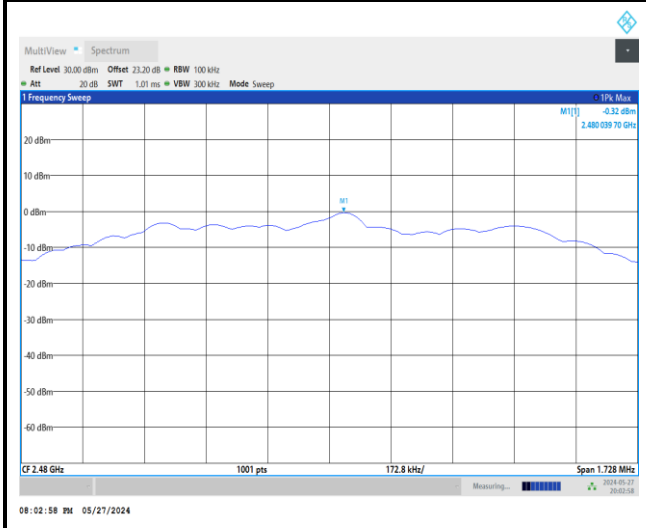


High Channel Plot

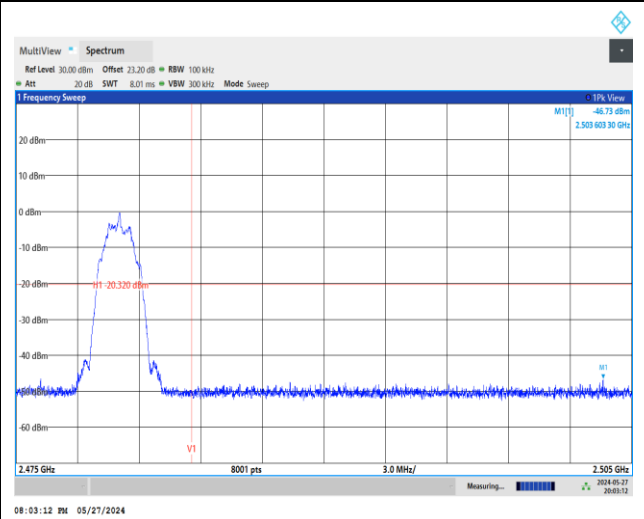

Spurious Emission 30MHz~1GHz Plot

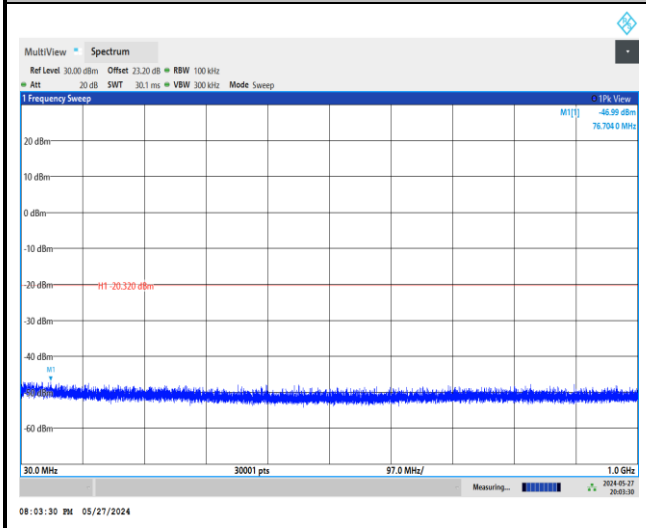

Spurious Emission 1GHz~26.5GHz Plot

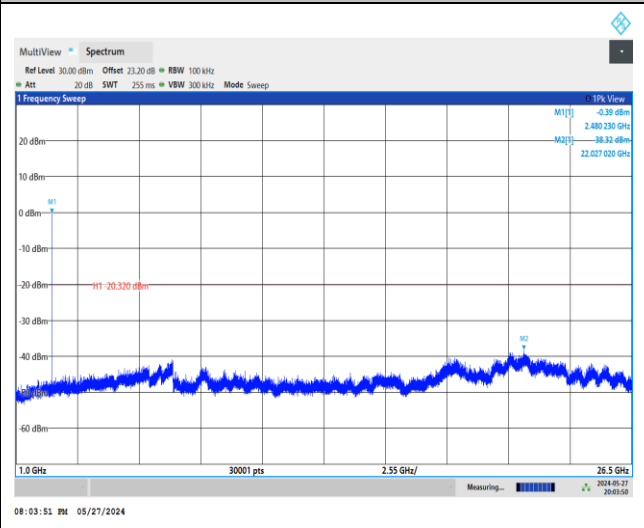




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Calvin Wang	Temperature :	23~26°C
		Relative Humidity :	45~55%

Original

Report NO : 440146
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

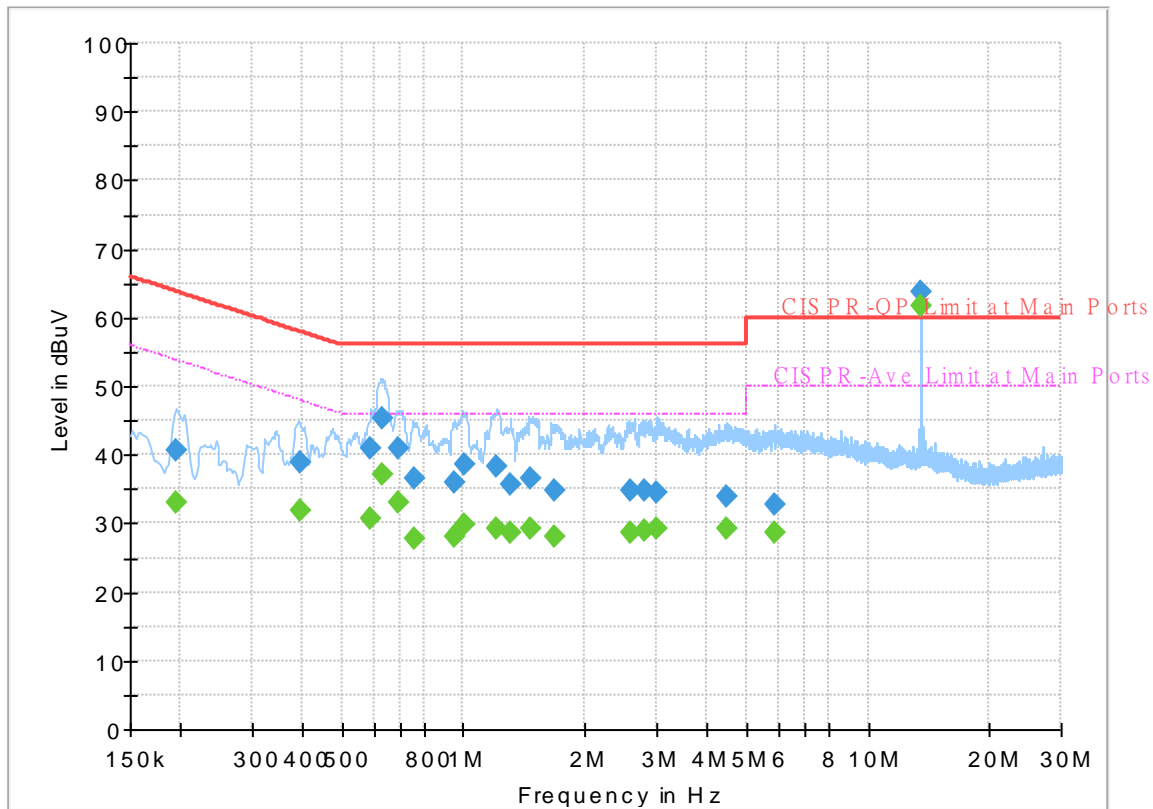


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.195000	---	33.01	53.82	20.81	L1	OFF	19.8
0.195000	40.73	---	63.82	23.09	L1	OFF	19.8
0.393000	---	31.78	48.00	16.22	L1	OFF	19.8
0.393000	38.79	---	58.00	19.21	L1	OFF	19.8
0.588750	---	30.61	46.00	15.39	L1	OFF	19.8
0.588750	41.07	---	56.00	14.93	L1	OFF	19.8
0.627000	---	37.22	46.00	8.78	L1	OFF	19.8
0.627000	45.41	---	56.00	10.59	L1	OFF	19.8
0.690000	---	33.09	46.00	12.91	L1	OFF	19.8
0.690000	40.89	---	56.00	15.11	L1	OFF	19.8
0.759750	---	27.70	46.00	18.30	L1	OFF	19.8
0.759750	36.48	---	56.00	19.52	L1	OFF	19.8
0.951000	---	28.12	46.00	17.88	L1	OFF	19.8
0.951000	35.89	---	56.00	20.11	L1	OFF	19.8
1.009500	---	29.77	46.00	16.23	L1	OFF	19.8
1.009500	38.69	---	56.00	17.31	L1	OFF	19.8
1.209750	---	29.34	46.00	16.66	L1	OFF	19.8
1.209750	38.27	---	56.00	17.73	L1	OFF	19.8
1.304250	---	28.57	46.00	17.43	L1	OFF	19.9
1.304250	35.69	---	56.00	20.31	L1	OFF	19.9
1.473000	---	29.20	46.00	16.80	L1	OFF	19.9

1.473000	36.47	---	56.00	19.53	L1	OFF	19.9
1.680000	---	28.14	46.00	17.86	L1	OFF	19.9
1.680000	34.80	---	56.00	21.20	L1	OFF	19.9
2.602500	---	28.62	46.00	17.38	L1	OFF	19.9
2.602500	34.83	---	56.00	21.17	L1	OFF	19.9
2.802750	---	28.85	46.00	17.15	L1	OFF	19.9
2.802750	34.93	---	56.00	21.07	L1	OFF	19.9
3.005250	---	29.13	46.00	16.87	L1	OFF	19.9
3.005250	34.45	---	56.00	21.55	L1	OFF	19.9
4.456500	---	29.13	46.00	16.87	L1	OFF	20.0
4.456500	33.99	---	56.00	22.01	L1	OFF	20.0
5.905500	---	28.79	50.00	21.21	L1	OFF	20.1
5.905500	32.81	---	60.00	27.19	L1	OFF	20.1
13.560000	---	61.78	50.00	-11.78	L1	OFF	20.5
13.560000	63.63	---	60.00	-3.63	L1	OFF	20.5

Report NO : 440146
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

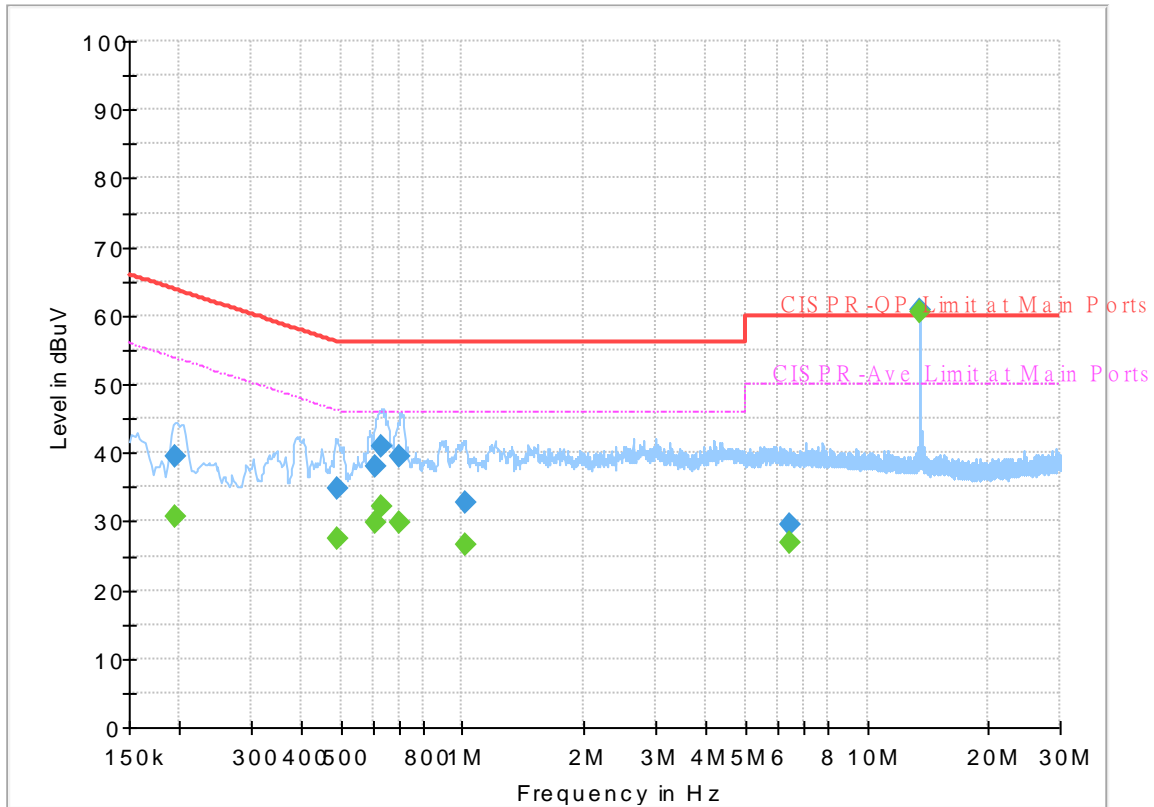


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.195000	---	30.75	53.82	23.07	N	OFF	19.8
0.195000	39.40	---	63.82	24.42	N	OFF	19.8
0.489750	---	27.40	46.17	18.77	N	OFF	19.8
0.489750	34.78	---	56.17	21.39	N	OFF	19.8
0.609000	---	29.77	46.00	16.23	N	OFF	19.8
0.609000	38.09	---	56.00	17.91	N	OFF	19.8
0.633750	---	32.27	46.00	13.73	N	OFF	19.8
0.633750	40.86	---	56.00	15.14	N	OFF	19.8
0.701250	---	29.83	46.00	16.17	N	OFF	19.8
0.701250	39.33	---	56.00	16.67	N	OFF	19.8
1.014000	---	26.68	46.00	19.32	N	OFF	19.8
1.014000	32.77	---	56.00	23.23	N	OFF	19.8
6.441000	---	26.97	50.00	23.03	N	OFF	20.1
6.441000	29.48	---	60.00	30.52	N	OFF	20.1
13.560000	---	60.57	50.00	-10.57	N	OFF	20.5
13.560000	60.95	---	60.00	-0.95	N	OFF	20.5

Terminal

Report NO : 440146
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

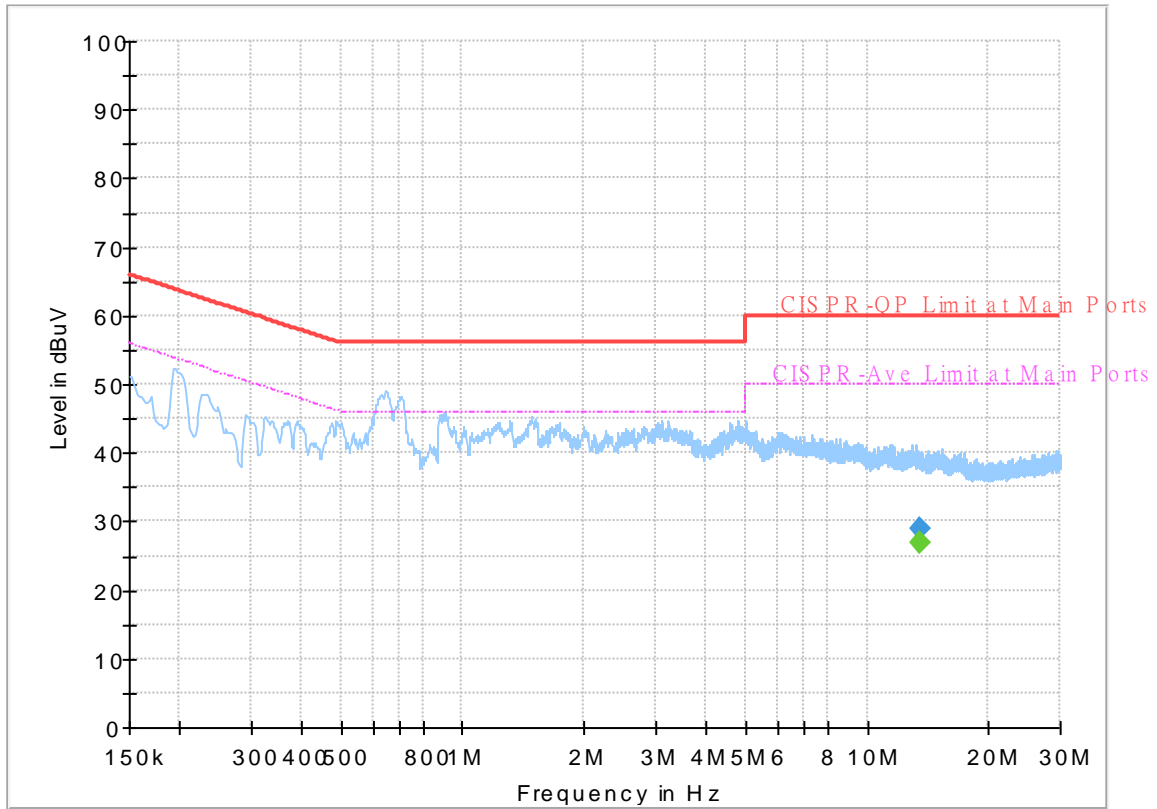


Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	26.83	50.00	23.17	L1	OFF	20.5
13.560000	29.08	---	60.00	30.92	L1	OFF	20.5

Report NO : 440146
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

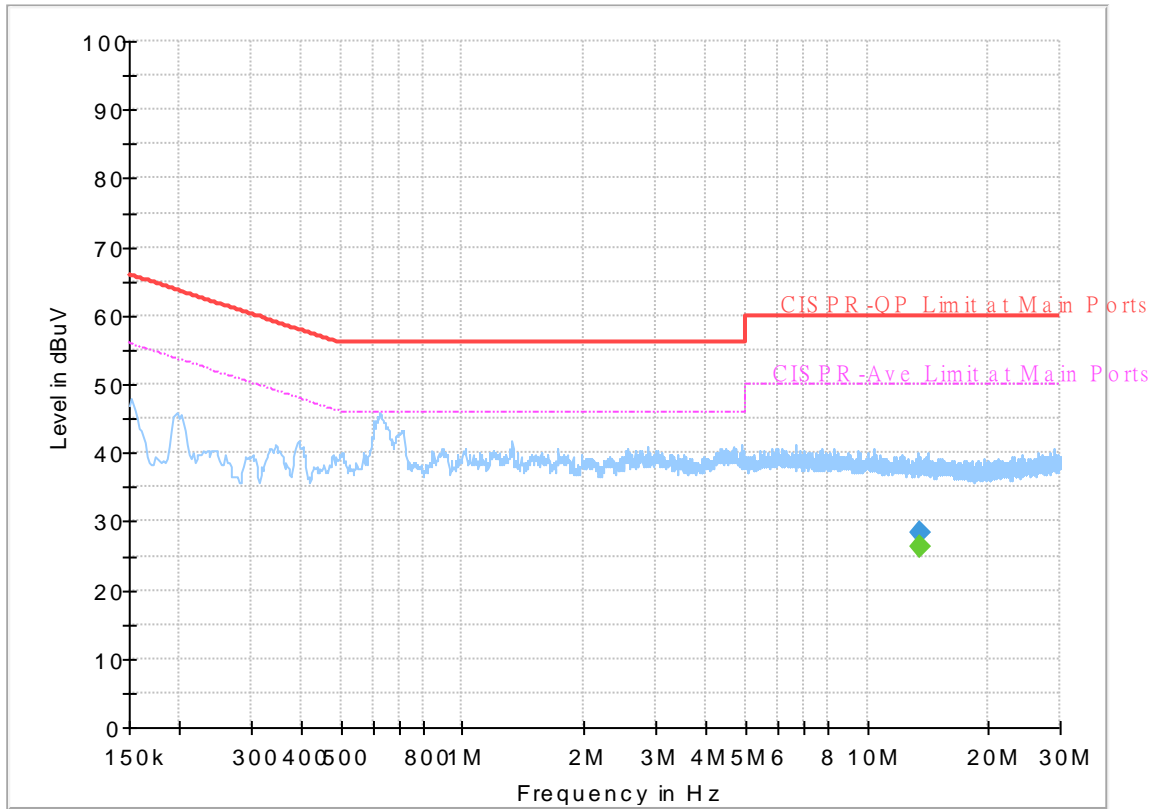

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
13.560000	---	26.43	50.00	23.57	N	OFF	20.5
13.560000	28.43	---	60.00	31.57	N	OFF	20.5



Appendix C. Radiated Spurious Emission

Test Engineer :	Bill Chang, Gary Guo and Steven Wu	Temperature :	18.2~20.2°C
		Relative Humidity :	54.2~56.1%

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 00 2402MHz		2343.81	55.15	-18.85	74	40.45	27.1	17.53	29.93	100	78	P	H	
		2388.645	46.13	-7.87	54	31.14	27.29	17.61	29.91	100	78	A	H	
	*	2402	93.66	-	-	78.54	27.4	17.63	29.91	100	78	P	H	
	*	2402	93.08	-	-	77.96	27.4	17.63	29.91	100	78	A	H	
													H	
			2386.965	55.46	-18.54	74	40.49	27.27	17.61	29.91	100	23	P	V
			2328.48	45.97	-8.03	54	31.3	27.1	17.5	29.93	100	23	A	V
	*		2402	89.53	-	-	74.41	27.4	17.63	29.91	100	23	P	V
	*		2402	88.9	-	-	73.78	27.4	17.63	29.91	100	23	A	V
														V
BLE CH 19 2440MHz		2374.82	55.27	-18.73	74	40.4	27.2	17.59	29.92	100	76	P	H	
		2372.58	45.78	-8.22	54	30.92	27.2	17.58	29.92	100	76	A	H	
	*	2440	92.9	-	-	77.55	27.6	17.65	29.9	100	76	P	H	
	*	2440	92.07	-	-	76.72	27.6	17.65	29.9	100	76	A	H	
			2492.44	56.11	-17.89	74	40.61	27.7	17.68	29.88	100	76	P	H
			2496.57	46.53	-7.47	54	31.03	27.7	17.68	29.88	100	76	A	H
			2315.74	54.85	-19.15	74	40.21	27.1	17.48	29.94	100	153	P	V
			2388.26	45.77	-8.23	54	30.79	27.28	17.61	29.91	100	153	A	V
	*		2440	89.39	-	-	74.04	27.6	17.65	29.9	100	153	P	V
	*		2440	88.69	-	-	73.34	27.6	17.65	29.9	100	153	A	V
			2487.4	55.57	-18.43	74	40.07	27.7	17.68	29.88	100	153	P	V
			2486.35	46.67	-7.33	54	31.17	27.7	17.68	29.88	100	153	A	V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz	*	2480	93.59	-	-	78.11	27.7	17.67	29.89	101	307	P	H
	*	2480	92.91	-	-	77.43	27.7	17.67	29.89	101	307	A	H
		2484.64	56.68	-17.32	74	41.18	27.7	17.68	29.88	101	307	P	H
		2488.76	46.64	-7.36	54	31.14	27.7	17.68	29.88	101	307	A	H
													H
													H
	*	2480	90.83	-	-	75.35	27.7	17.67	29.89	400	10	P	V
	*	2480	90.05	-	-	74.57	27.7	17.67	29.89	400	10	A	V
		2486.96	56.39	-17.61	74	40.89	27.7	17.68	29.88	400	10	P	V
		2489.76	47.03	-6.97	54	31.53	27.7	17.68	29.88	400	10	A	V
													V
													V
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.											



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	38.68	-35.32	74	61.4	32.32	11.12	66.16	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	39.45	-34.55	74	62.17	32.32	11.12	66.16	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 19 2440MHz		4880	39.72	-34.28	74	61.8	32.62	11.32	66.02	-	-	P	H	
		7320	43.58	-30.42	74	58.46	36.78	13.8	65.46	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	39.67	-34.33	74	61.75	32.62	11.32	66.02	-	-	P	V
			7320	44.27	-29.73	74	59.15	36.78	13.8	65.46	-	-	P	V
														V
														V
														V
														V
														V
														V
														V
													V	



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4880	39.81	-34.19	74	61.89	32.62	11.32	66.02	-	-	P	H
		7320	44.29	-29.71	74	59.17	36.78	13.8	65.46	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4880	39.58	-34.42	74	61.66	32.62	11.32	66.02	-	-	P
		7320	44.4	-29.6	74	59.28	36.78	13.8	65.46	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
BLE CH 00 2402MHz		2365.02	54.86	-19.14	74	40.01	27.2	17.57	29.92	100	25	P	H	
		2380.875	46.64	-7.36	54	31.75	27.21	17.6	29.92	100	25	A	H	
	*	2402	94.33	-	-	79.21	27.4	17.63	29.91	100	25	P	H	
	*	2402	92.67	-	-	77.55	27.4	17.63	29.91	100	25	A	H	
													H	
														H
			2389.065	55.33	-18.67	74	40.34	27.29	17.61	29.91	214	67	P	V
			2387.91	46.83	-7.17	54	31.85	27.28	17.61	29.91	214	67	A	V
	*		2402	92.64	-	-	77.52	27.4	17.63	29.91	214	67	P	V
	*		2402	90.8	-	-	75.68	27.4	17.63	29.91	214	67	A	V
														V
													V	
BLE CH 19 2440MHz		2389.1	55.68	-18.32	74	40.69	27.29	17.61	29.91	100	26	P	H	
		2379.86	46.63	-7.37	54	31.76	27.2	17.59	29.92	100	26	A	H	
	*	2440	92.56	-	-	77.21	27.6	17.65	29.9	100	26	P	H	
	*	2440	90.89	-	-	75.54	27.6	17.65	29.9	100	26	A	H	
			2488.17	56.46	-17.54	74	40.96	27.7	17.68	29.88	100	26	P	H
			2494.47	47.18	-6.82	54	31.68	27.7	17.68	29.88	100	26	A	H
			2376.64	55.03	-18.97	74	40.16	27.2	17.59	29.92	198	69	P	V
			2373	46.79	-7.21	54	31.93	27.2	17.58	29.92	198	69	A	V
	*		2440	90.53	-	-	75.18	27.6	17.65	29.9	198	69	P	V
	*		2440	88.91	-	-	73.56	27.6	17.65	29.9	198	69	A	V
			2485.3	56.11	-17.89	74	40.61	27.7	17.68	29.88	198	69	P	V
		2495.8	47.21	-6.79	54	31.71	27.7	17.68	29.88	198	69	A	V	



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
BLE CH 39 2480MHz	*	2480	93.72	-	-	78.24	27.7	17.67	29.89	251	323	P	H	
	*	2480	92.25	-	-	76.77	27.7	17.67	29.89	251	323	A	H	
		2486.76	55.9	-18.1	74	40.4	27.7	17.68	29.88	251	323	P	H	
		2489.8	47.43	-6.57	54	31.93	27.7	17.68	29.88	251	323	A	H	
													H	
														H
	*	2480	91.72	-	-	76.24	27.7	17.67	29.89	257	81	P	V	
	*	2480	88.73	-	-	73.25	27.7	17.67	29.89	257	81	A	V	
		2496.2	55.68	-18.32	74	40.18	27.7	17.68	29.88	257	81	P	V	
		2488.36	47.58	-6.42	54	32.08	27.7	17.68	29.88	257	81	A	V	
														V
														V
	Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	39.61	-34.39	74	62.33	32.32	11.12	66.16	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	39.08	-34.92	74	61.8	32.32	11.12	66.16	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
		4880	39.07	-34.93	74	61.15	32.62	11.32	66.02	-	-	P	H
		7320	44.65	-29.35	74	59.53	36.78	13.8	65.46	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
		4880	39.51	-34.49	74	61.59	32.62	11.32	66.02	-	-	P	V
		7320	43.72	-30.28	74	58.6	36.78	13.8	65.46	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 39 2480MHz		4960	40.28	-33.72	74	61.59	33.02	11.54	65.87	-	-	P	H
		7440	43.79	-30.21	74	59.03	36.32	13.91	65.47	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	40.4	-33.6	74	61.71	33.02	11.54	65.87	-	-	P
		7440	43.6	-30.4	74	58.84	36.32	13.91	65.47	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE SHF		23663	40.13	-33.87	74	56.92	38.85	-2.64	53	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			23523	39.31	-34.69	74	56.24	38.7	-2.63	53	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
2.4GHz BLE LF		30.54	22.82	-17.18	40	30.35	24.15	0.76	32.44	-	-	P	H	
		123.96	32.02	-11.48	43.5	45.26	17.51	1.64	32.39	-	-	P	H	
		216.3	26.55	-19.45	46	41.78	15.08	2.09	32.4	-	-	P	H	
		634.6	28.54	-17.46	46	30.96	26.37	3.87	32.66	-	-	P	H	
		714.4	32.66	-13.34	46	34.3	26.86	4.19	32.69	-	-	P	H	
		917.4	32.75	-13.25	46	30.29	29.55	4.7	31.79	-	-	P	H	
														H
														H
														H
														H
														H
														H
			45.93	29.29	-10.71	40	44.52	16.26	0.98	32.47	-	-	P	V
			183.36	31.28	-12.22	43.5	46.69	15	1.94	32.35	-	-	P	V
			217.38	25.67	-20.33	46	40.8	15.18	2.09	32.4	-	-	P	V
			540.1	25.11	-20.89	46	29.98	24.28	3.42	32.57	-	-	P	V
			750.1	30.87	-15.13	46	30.92	28.17	4.29	32.51	-	-	P	V
			838.3	31.37	-14.63	46	30.43	28.77	4.46	32.29	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Bill Chang, Gary Guo and Steven Wu	Temperature :	18.2~20.2°C
		Relative Humidity :	54.2~56.1%

Note symbol

-L	Low channel location
-R	High channel location







<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

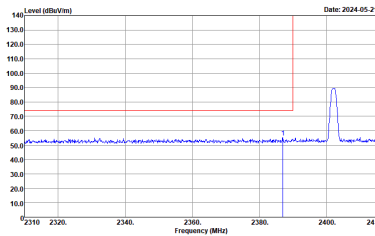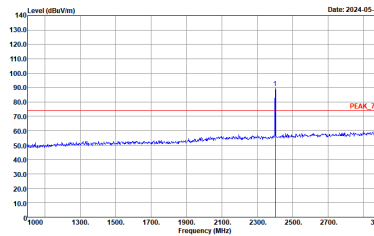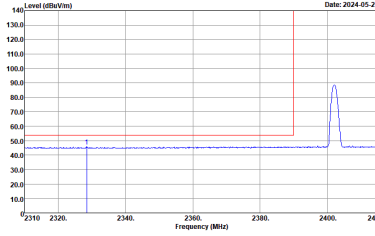
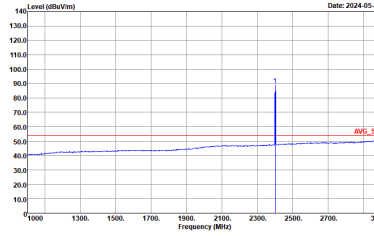


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2402 MHz, labeled 'PEAK_74'.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the average level at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the average level at 2402 MHz, labeled 'AVG_54'.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

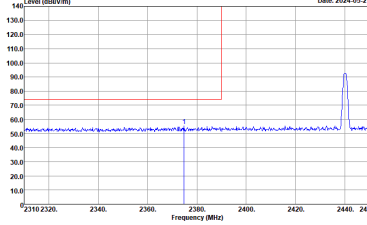
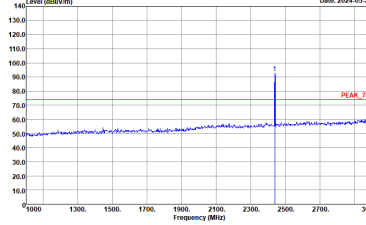
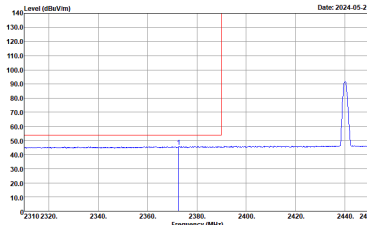
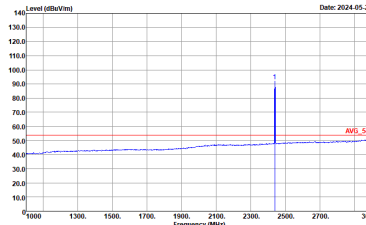


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

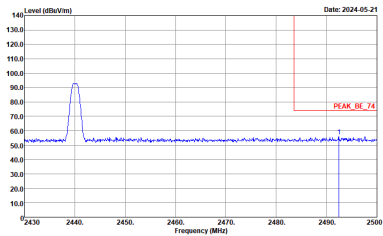
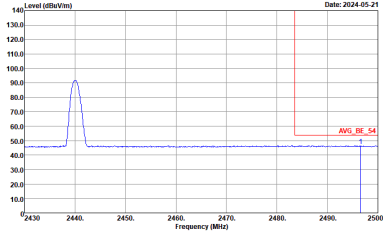


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	Left blank

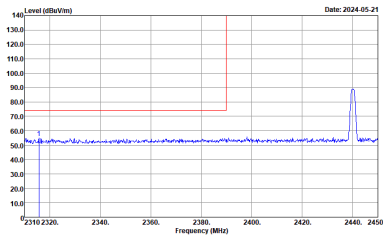
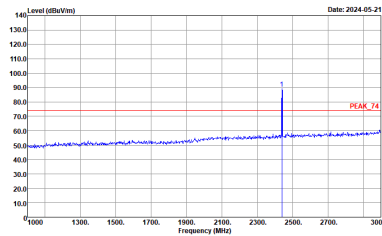
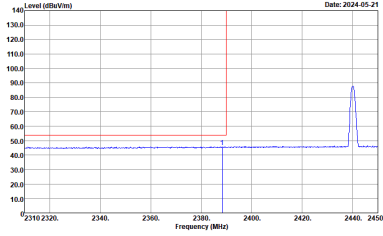
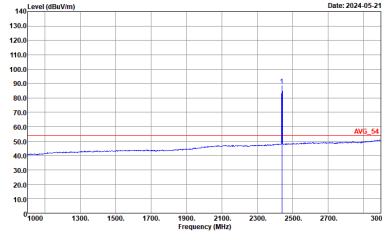


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2450 MHz. A red line indicates the peak level at approximately 135 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the peak level at approximately 75 dBm/100kHz, labeled 'PEAK_74'.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2450 MHz. A red line indicates the average level at approximately 50 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average level. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the average level at approximately 50 dBm/100kHz, labeled 'AVG_54'.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>



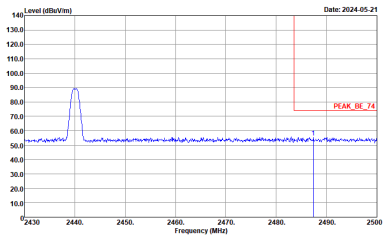
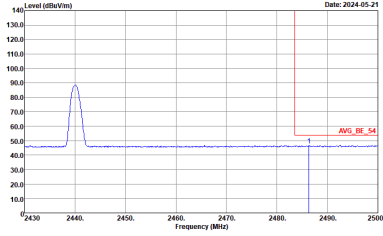


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	Left blank

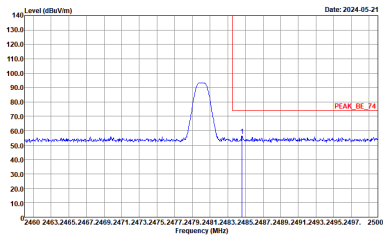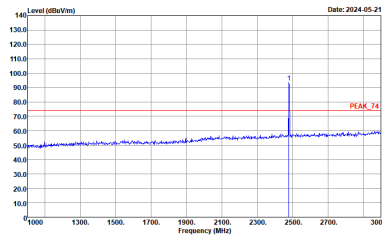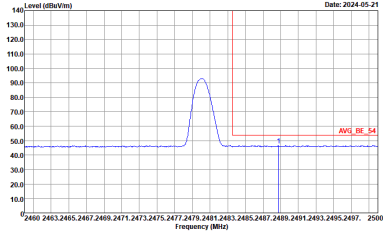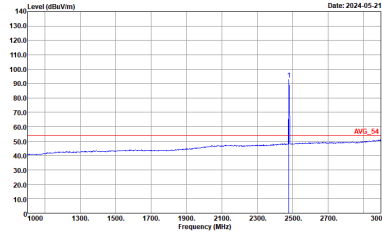

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot is labeled 'PEAK_BE_74'.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot is labeled 'PEAK_74'.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 50 dBm/100kHz. The plot is labeled 'AVG_BE_54'.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 50 dBm/100kHz. The plot is labeled 'AVG_54'.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

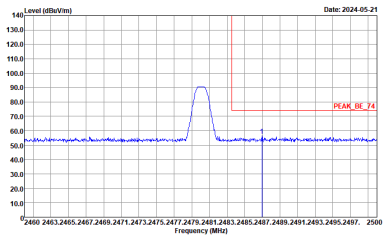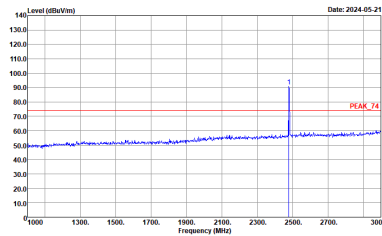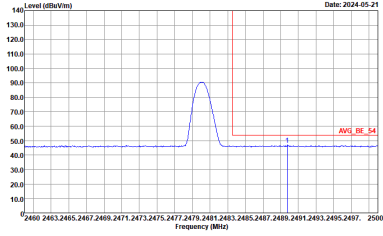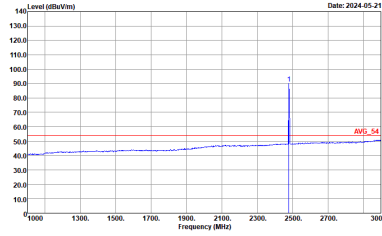

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 90 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the noise floor. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 90 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the noise floor. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the noise floor. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the noise floor. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL</p>

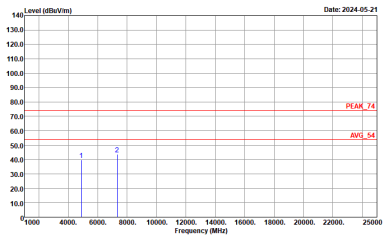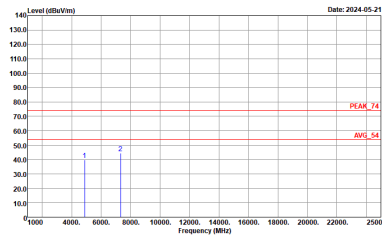

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH16-HY Condition : PEAK_T4 3m 9120D_1522_240328 HORIZONTAL</p>	 <p>Site : 03CH16-HY Condition : PEAK_T4 3m 9120D_1522_240328 VERTICAL</p>







BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_1522_240328 HORIZONTAL :</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_1522_240328 VERTICAL :</p>



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

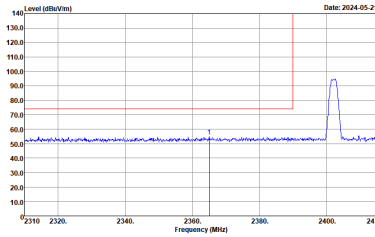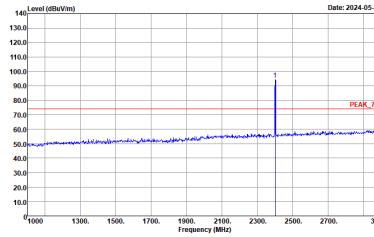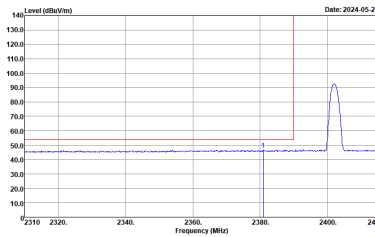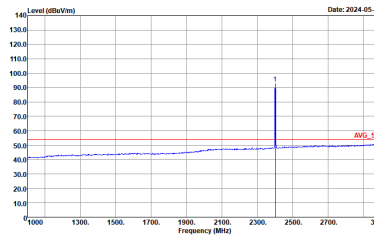BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing the average spectrum. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg	<p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	<p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>

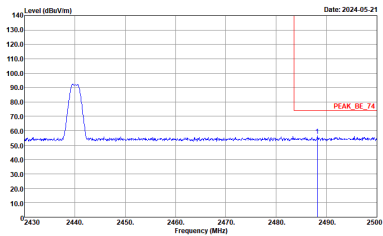
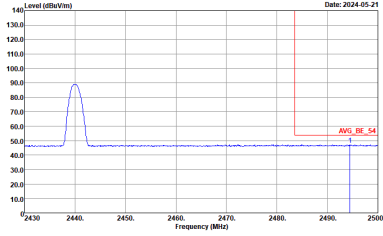


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000kHz VBW:5.000kHz SWT:Auto</p>	<p>Left blank</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	<p>Date: 2024-05-21</p> <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>



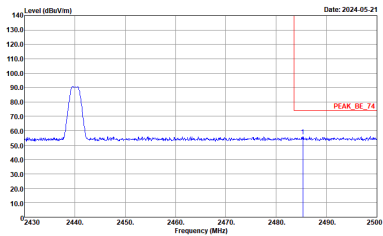
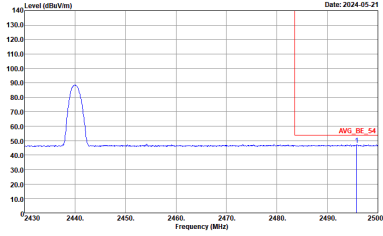


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
<p>Peak</p>	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWF:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	 <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.000KHz SWF:Auto</p>	<p>Left blank</p>

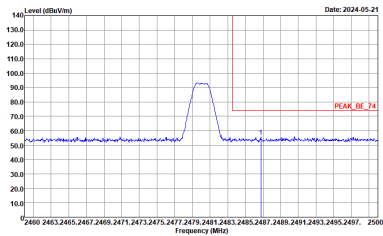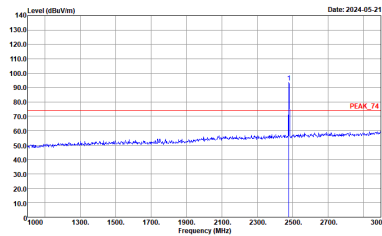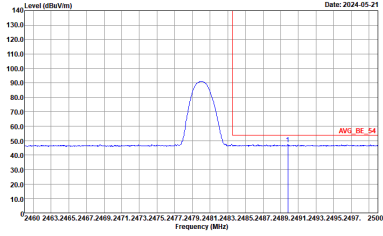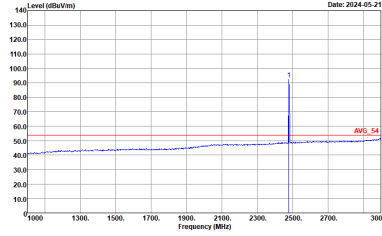

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH16-HY Condition : AV6_BE_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	 <p>Site : 03CH16-HY Condition : AV6_54 3m 91200_1522_240328 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>

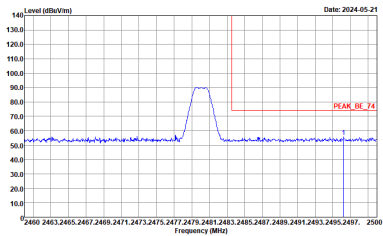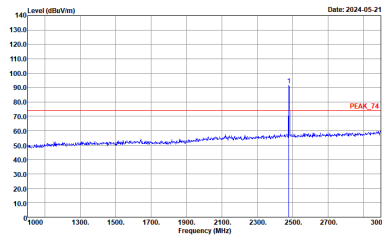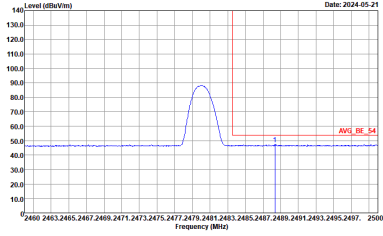
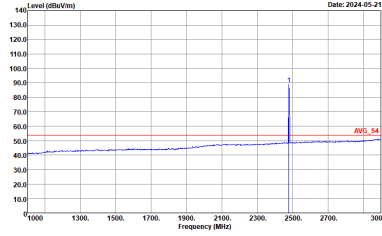


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 90 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the signal. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : PEAK_BE_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 90 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the signal. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the signal. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : AVG_BE_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 55 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the signal. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH16-HY Condition : AVG_54 3m 91200_1522_240328 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>





2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

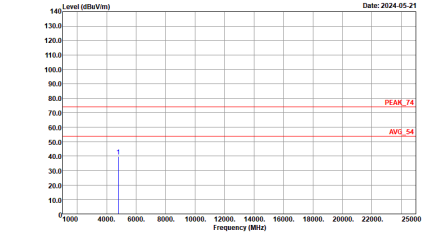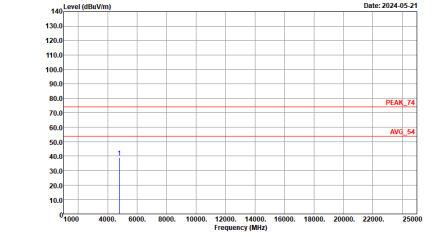BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 HORIZONTAL</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 91200_1522_240328 VERTICAL</p>

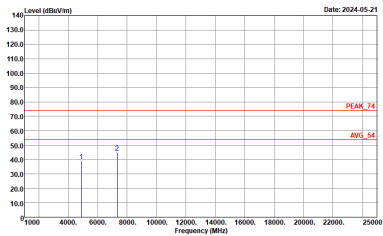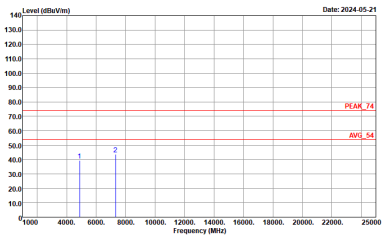

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK_T4 3m 9120D_1522_240328 HORIZONTAL :</p>	 <p>Site : 03CH16-HY Condition : PEAK_T4 3m 9120D_1522_240328 VERTICAL :</p>

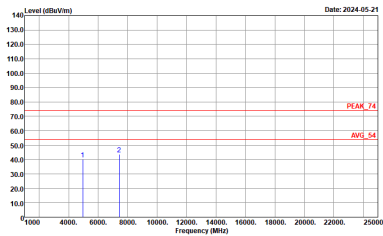
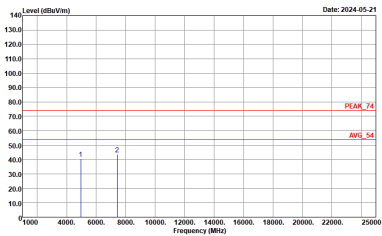


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_1522_240328 HORIZONTAL :</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 3m 9120D_1522_240328 VERTICAL :</p>



Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

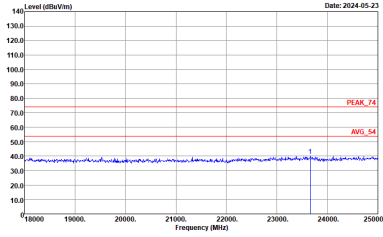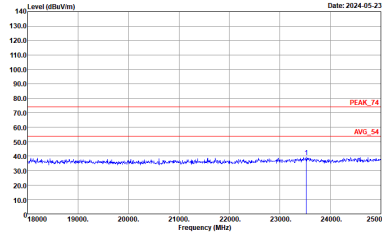BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	 <p>Site : 03CH16-HY Condition : PEAK_74 1m SHF_993_231124 HORIZONTAL</p>	 <p>Site : 03CH16-HY Condition : PEAK_74 1m SHF_993_231124 VERTICAL</p>



Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_231007_H HORIZONTAL</p>	<p>Site : 03CH16-HY Condition : QP 3m BIL06_47020_231007_H VERTICAL</p>



Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth - LE for 1Mbps	61.66	386	2.59	2.7kHz
Bluetooth - LE for 2Mbps	32.59	204	4.90	5.1kHz

